

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 August 2001 (23.08.2001)

PCT

(10) International Publication Number
WO 01/60948 A1

(51) International Patent Classification⁷: C10G 1/10,
B09B 3/00, C08J 11/10

(21) International Application Number: PCT/EP01/01717

(22) International Filing Date: 15 February 2001 (15.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
RE2000A000008 18 February 2000 (18.02.2000) IT

(71) Applicant: TESI AMBIENTE S.R.L. [IT/IT]; Via Te-
vere, 22, I-37136 Verona (IT).

(72) Inventor: CABRINI, Clementino; Piazza Pozza, 15,
I-37100 Verona (IT).

(74) Agents: CORRADINI, Corrado et al.; Via Dante
Alighieri, 4, I-42100 Reggio Emilia (IT).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: PROCESS AND PLANT FOR TREATING MATERIALS CONTAINING CH POLYMER CHAINS

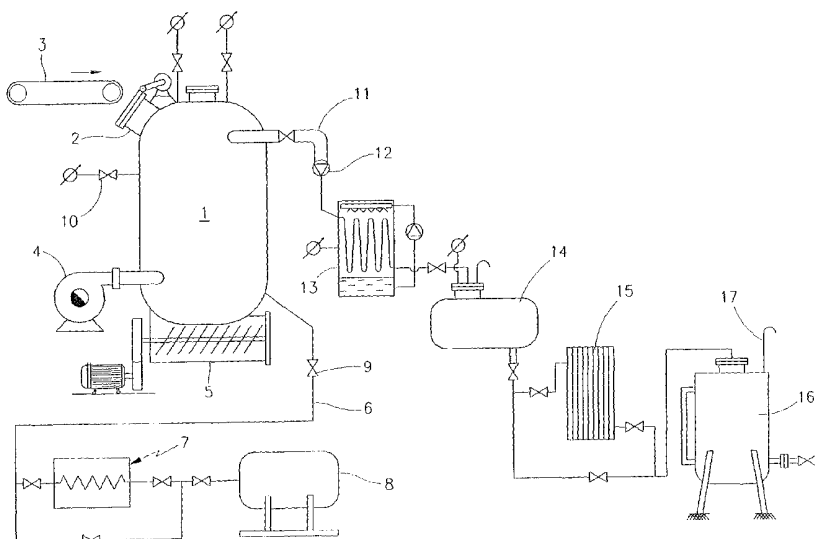

(57) Abstract: Process for treating materials containing CH polymer chains comprising the following steps: by external means, triggering combustion of the material in an environment insulated from the outside; drawing off the gaseous combustion products from said environment to put it under vacuum; feeding combustion-supporting gas in a quantity insufficient to create centres of combustion while maintaining the environment under vacuum in order to favour a process of molecular decomposition of the material; subjecting the produced gases to condensation and collecting the condensate in a non-pressurized environment. Plant suitable for performing the process.



WO 01/60948 A1

Description

PROCESS AND PLANT FOR TREATING MATERIALS CONTAINING CH POLYMER CHAINS

5

Technical field

The present invention relates to the disposal of solid materials by incineration, and in particular the disposal of solid materials which generate highly pollutant gases when they burn.

10

Background art

This type of material is very wide-ranging and comprises a large variety of synthetic products, plastic materials, and others.

15 This type of material is usually disposed of by incinerators, which involve a considerable energy cost and, notwithstanding gas purification, present drawbacks concerning the production of gaseous dioxins and other pollutant gases.

20 In addition to an understandable plant complication, the known processes involve oxidizing the treated material, so depleting its calorific value and rendering it very deficient as a fuel.

It is immediately evident that this considerably affects the economy of the process.

25 The object of this patent is to dispose of materials consisting in particular of plastic materials of synthetic origin by the destruction or depolymerization of their CH chains, with simultaneous recovery of the resultant liquid condensate of the process, which has high energy power.

30 A last but not less important object of the invention is to implement cleaning of the off-gases such as to satisfy the current severe ecological regulations.

Disclosure of the invention

These objects of the invention are attained by the process and plant defined in the claims.

35 The process of the invention represents the combination of two mutually interacting steps, and takes place under vacuum at low

- 2 -

temperature in the presence of an oxidizing agent such as oxygen or ozone.

The material to be treated is preferably comminuted into pieces of uniform dimensions, of the order of 50 mm to 300 mm, and then fed
5 into a vessel acting as a reactor.

The quantity of material, or charge, fed into the vessel preferably occupies a quarter of its capacity, below which a normal burner, of the type used in common boilers, opens into the vessel.

10 The system is initiated by flame triggering with said burner. The time required for triggering by the flame is of the order of one minute.

When triggering has occurred, the entire vessel or reactor is subjected to forced suction by a fan by which it is emptied of its
15 initial reaction gas, the suction fan after a short period then reducing the pressure within the vessel or reactor to prevent undesirable combustion reactions.

The absolute pressure within the reactor is stabilized at around 250 mm Hg.

20 The lack of air within the reactor considerably slows down the combustion process, which was initially accompanied by flame, to then become increasingly more similar to thermal cracking. After this initiation step, with the reaction stabilized, normal operation commences, during which an oxidizing agent, generally
25 oxygen, is fed into the reaction chamber in a quantity from 0.5 to 1.5 wt% of the material to be treated.

Care must be taken to feed the oxidizing agent, facilitating the process of molecular breakdown, at a rate which does not result in the creation of centres of combustion with triggering of flame.

30 During the entire reaction, the feed of oxidizing agent is constantly balanced with the quantity of reaction gas generated by the molecular splitting of the polymer chains, in order to favour the entire process to the maximum extent.

The molecular splitting of the polymer chains is aimed at
35 restoring certain chemical parameters which preceded the formation of polymer chains, in the absence of combustion and with the

- 3 -

intention of obtaining the greatest possible gas quantity as the final result of the reaction.

The reaction gases obtained in this manner are fed to a condenser which converts them into liquid form (phase).

5 The process comprises purifying the obtained liquid phase of undesirable substances and by-products, principally the sulphur component if present in the starting materials.

Another undesirable component is the chlorine component which, if present on entry, is eliminated by circulation through a suitable
10 removal circuit followed by neutralization by treatment with calcium carbonate CaCO_3 or sodium bicarbonate 2NaHCO_3 .

The liquid cleaned of the undesirable components is fed to certain vessels performing the double task of storage and further purification of the product by gravity.

15 The entire system requires a suitable vent to prevent pressurization during the cycle.

In this manner there is extracted from most of the polymerized CH chains a quantity of gas and/or liquid of high calorific value and at low depolymerization cost.

20 All those parts which cannot be transformed are discharged at the end of the cycle and are classed as process residues.

Said residues are not necessarily unsuitable for other possible uses, but are unsuitable for adequate transformation with the present process.

25 The nature of the residues in question means that they may be able to be reused by other techniques of destructive type such as combustion, or of selective type based on individual polymer chains, with consequent processing to obtain products suitable for moulding or extrusion.

30 If required by local regulations, the process can include cleaning of the off-gases and emissions by known means.

The aforescribed process is implemented in a plant illustrated schematically in Figure 1, the description of which will include further process parameters.

35 Said plant comprises a vessel or reactor 1 provided with a sealed closure hatch 2 through which the material to be treated is loaded

- 4 -

with the aid of a conveyor 3. The material occupies about a quarter of the volume of the reactor 1, to the base of which there is applied a normal fuel oil burner 4 for the purpose of triggering the reaction.

5 Into a reactor of inner diameter 1500 mm and internal height of 4500 mm, material is loaded to a volume equal to about a quarter of the reactor volume.

At the base of the reactor 1 there is shown a usual system 5 for discharging the spent product.

10 One or more conduits 6 open into the base of the reactor 1 below the material to be treated, they originating from an evaporator 7 fed by the vessel 8 containing oxygen or ozone, to be fed into the material.

The conduit 6 comprises known means 9 for metering the oxygen or
15 ozone.

Valves 10 for the feed of air in addition to or as an alternative to the oxygen feed can be provided in the upper part of the reactor.

The oxygen fed during the cycle is from 0.5 to 1.5 wt% of the
20 material to be treated, and is preferably of the order of 1 wt%.

From close to the top of the reactor there extends a gas collection conduit 11 which, by means of a fan 12 positioned upstream of the condenser, leads the gases to a condenser 13 in which they are reduced to the liquid phase.

25 Besides emptying the reactor of the off-gases generated during the triggering stage of the process, the action of the fan reduces the absolute pressure within the reactor to close to 250 mm Hg during normal operation.

The temperature at which depolymerization occurs, with
30 simultaneous infeed of oxygen, is of the order of 200°C.

The condenser 13 is of the water-cooled type and reduces the temperature to between about 45°C and 50°C.

Downstream of the condenser 13 there are provided in series a separator 14 for separating the sulphur, and a dechlorination
35 device 15, downstream of which the liquid is stored in a tank 16 provided with means 17 to prevent its pressurization.

- 5 -

The separator 14 is a vessel with a grid which retains the sulphur present in the condensate in the form of paste or pulp.

The dechlorination device is a usual device operating with calcium carbonate CaCO_3 or sodium bicarbonate 2NaHCO_3 , within which the chlorine is collected in the form of chloride salts.

The liquid collected in the tank has the appearance of a liquid of greater or lesser viscosity depending on the material treated, and has a calorific value of between 3,000 and 10,000 kCal/kg.

The ratio of the liquid obtained to the material treated is of the order of about 0.8 litres per kilogram.

The treatment of a load of material based on CH chains requires about one hour, and leaves a solid residue equal to about 10% of the material fed into the reactor.

The process is interrupted when a substantial reduction in the liquid produced is noted, due partly to depletion of the material but mainly to the fact that the quantity of material composed of process residues remaining in the reactor is too small.

The residual material is withdrawn from the reactor and set aside until, after about ten cycles, a quantity of residual material sufficient to form a new load has accumulated.

It is not worth while to repeat the treatment of the residual material more than once.

The process has been described as a batch process, but it can also be implemented as a continuous process in a reactor provided with convenient sealed means for loading the material.

Claims


1. A process for treating materials containing CH polymer chains characterised by comprising the following steps:
- 5 - by external means, triggering combustion of the material in an environment insulated from the outside;
- drawing off the gaseous combustion products from said environment to put it under vacuum;
- feeding combustion-supporting gas in a quantity insufficient to
- 10 create centres of combustion while maintaining the environment under vacuum in order to favour a process of molecular decomposition of the material;
- subjecting the produced gases to condensation and collecting the condensate in a non-pressurized environment.
- 15
2. A process as claimed in claim 1, characterised in that the quantity of material treated occupies about a quarter of the volume of the insulated environment in which the process takes place.
- 20
3. A process as claimed in claim 1, characterised in that the environment is maintained under vacuum, at an absolute pressure of the order of 250 mm Hg.
- 25
4. A process as claimed in claim 1, characterised in that the combustion-supporting gas is oxygen or ozone and is fed in a quantity from 0.5 to 1.5 wt% of the material under treatment.
5. A process as claimed in claim 1, characterised in that the
- 30 temperature within the environment is of the order of 200°C.
6. A process as claimed in claim 1, characterised in that the condensate is subjected to sulphur separation treatment.
- 35
7. A process as claimed in claim 1, characterised in that the condensate or the product gases are treated with calcium carbonate

- 7 -

or sodium bicarbonate to neutralize chlorine.

8. A plant for treating materials containing polymer CH chains, characterised by comprising a reactor for containing the material to be treated; means for loading the reactor; means for discharging and removing the process residues; means for triggering combustion inside the reactor; means for putting the reactor under vacuum by suction; means for feeding and metering oxygen or ozone into the reactor; means for condensing the gases withdrawn from the reactor and means for collecting the condensate.
9. A plant as claimed in claim 8, characterised in that the means for triggering combustion are a burner.
10. A plant as claimed in claim 9, characterised in that said burner is positioned at the base of the reactor.
11. A plant as claimed in claim 8, characterised in that the means for putting the reactor under vacuum comprise a fan arranged to create an absolute pressure of about 250 mm Hg in the reactor.
12. A plant as claimed in claim 8, characterised in that the means for feeding a combustion-supporting gas into the reactor open into the reactor base.
13. A plant as claimed in claim 8, characterised by comprising a water-fed condenser of known type.
14. A plant as claimed in claim 8, characterised by comprising sulphur separation means.

FIG.1

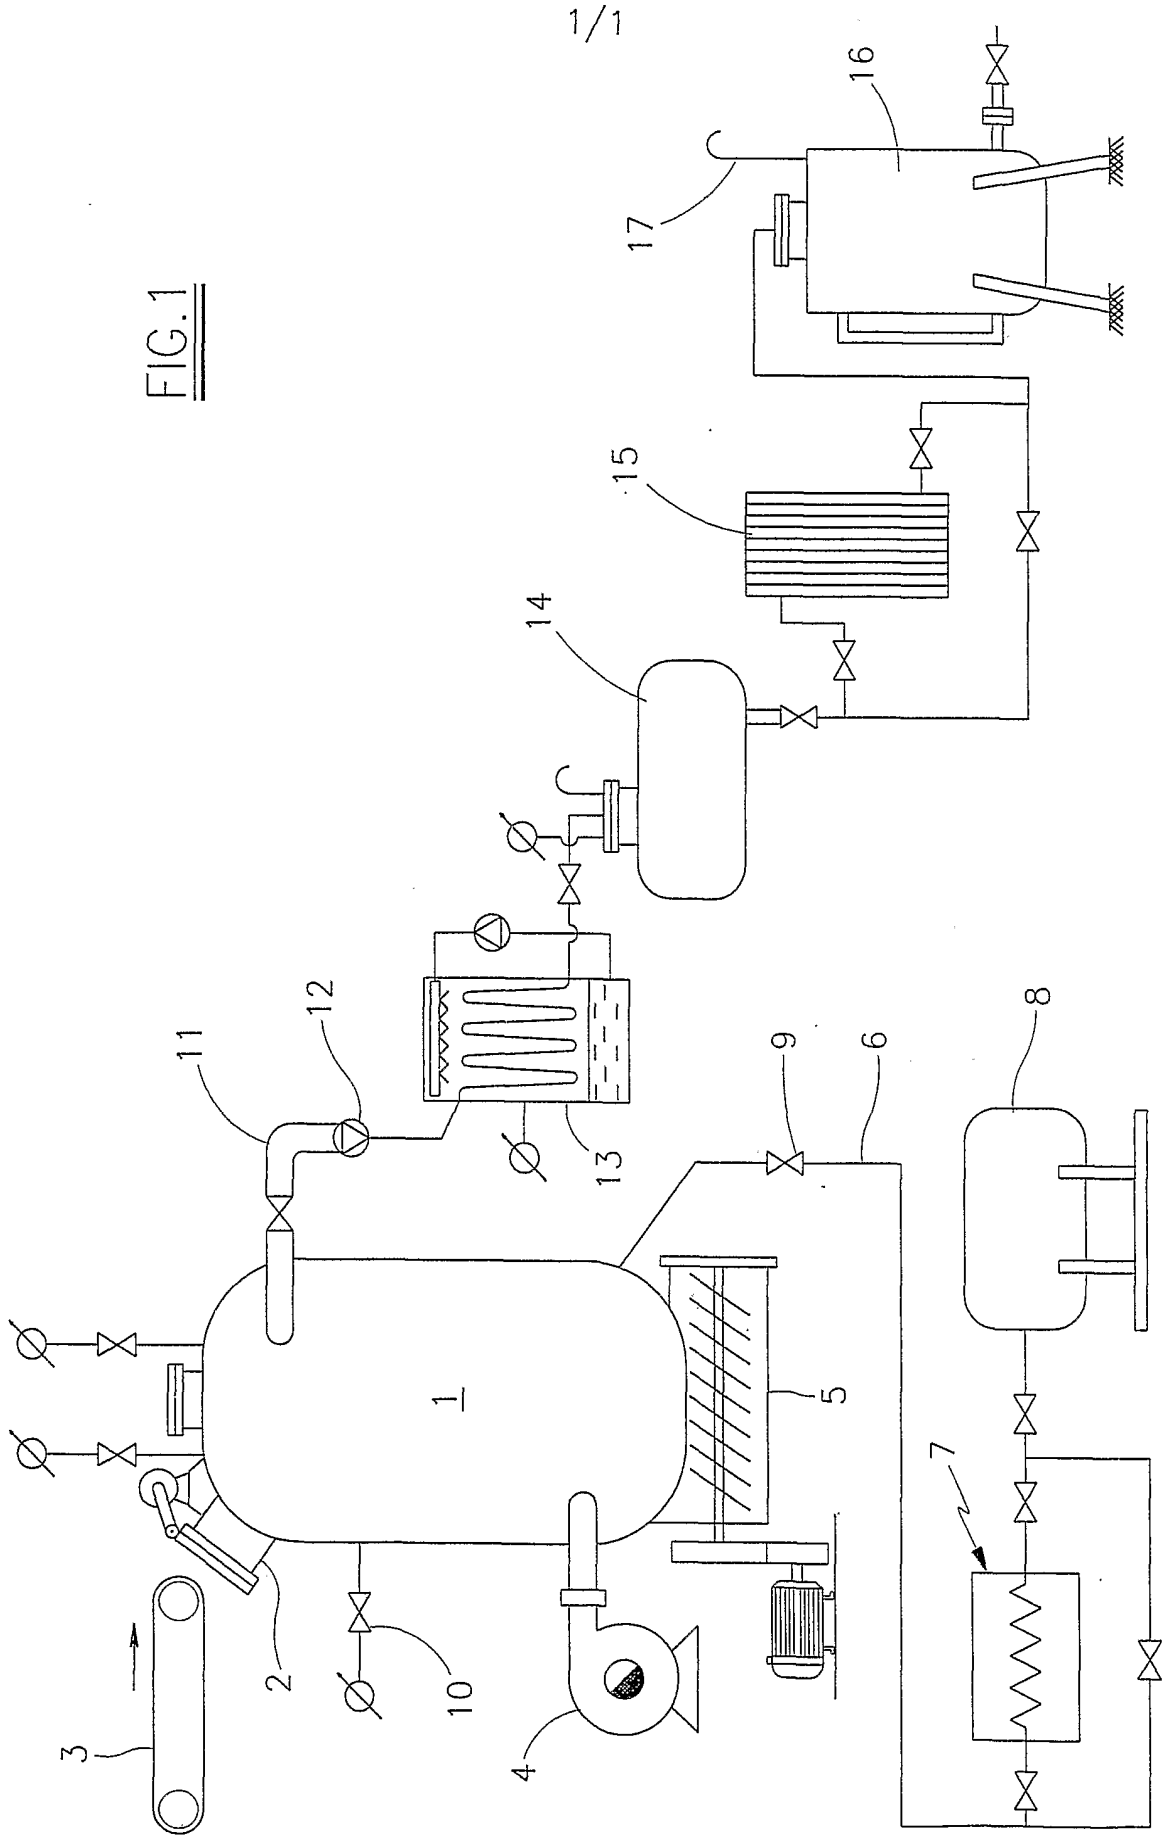

1/1

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/EP 01/01717

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C10G1/10 B09B3/00 C08J11/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C10G C08J B09B F23G F23J B01D B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
WPI Data, PAJ, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 468 011 A (SIKANDER ET AL) 28 August 1984 (1984-08-28) column 5, line 9 -column 6, line 5 ---	1-5,8-13
X	US 5 157 176 A (MUNGER) 20 October 1992 (1992-10-20) column 2, line 46 -column 6, line 62 ---	1-5,8-13
Y	US 5 746 987 A (AULBAUGH ET AL) 5 May 1998 (1998-05-05) column 5, line 1 -column 7, line 31 ---	7
X	US 5 746 987 A (AULBAUGH ET AL) 5 May 1998 (1998-05-05) column 5, line 1 -column 7, line 31 ---	1-5,8-13
X	EP 0 672 743 A (ALD VACUUM TECHNOLOGIES GMBH) 20 September 1995 (1995-09-20) page 2, line 1 -page 2, line 4 page 5, line 7 -page 5, line 50 --- -/--	1-5

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *8* document member of the same patent family

Date of the actual completion of the international search

28 May 2001

Date of mailing of the international search report

06/06/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Doolan, G

INTERNATIONAL SEARCH REPORT

Internal Application No
PCT/EP 01/01717

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 284 616 A (SOLBAKKEN ET AL) 18 August 1981 (1981-08-18) column 1, line 15 -column 1, line 21 column 14, line 58 -column 15, line 12 -----	1-5
Y	US 5 102 638 A (GIRRBACH ET AL) 7 April 1992 (1992-04-07) the whole document -----	7
A	US 4 839 021 A (ROY) 13 June 1989 (1989-06-13) column 1, line 8 -column 2, line 12 -----	1,3

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/01717

Patent document cited in search report	Publication date	Patent family member(s)	Publication date		
US 4468011 A	28-08-1984	SE 451464 B	12-10-1987		
		DE 3243813 A	07-07-1983		
		DE 8233235 U	01-09-1983		
		DK 531982 A,B,	02-06-1983		
		FI 823981 A,B,	02-06-1983		
		JP 1609728 C	15-07-1991		
		JP 2035016 B	08-08-1990		
		JP 58197236 A	16-11-1983		
		SE 8107177 A	02-06-1983		
		SE 458472 B	03-04-1989		
		SE 8206846 A	02-06-1983		
		SU 1466655 A	15-03-1989		
		US 4564174 A	14-01-1986		
		US 4606762 A	19-08-1986		
US 5157176 A	20-10-1992	AU 8434491 A	18-02-1992		
		CA 2088146 A	27-01-1992		
		DE 69114294 D	07-12-1995		
		DE 69114294 T	04-04-1996		
		DK 541710 T	27-12-1995		
		EP 0541710 A	19-05-1993		
		ES 2078540 T	16-12-1995		
		JP 5509128 T	16-12-1993		
		KR 171226 B	20-03-1999		
		WO 9201767 A	06-02-1992		
		US 5435890 A	25-07-1995		
		US 5746987 A	05-05-1998	US 5628969 A	13-05-1997
				US 6143136 A	07-11-2000
AU 726855 B	23-11-2000				
AU 7433296 A	07-05-1997				
BR 9611967 A	28-12-1999				
CN 1202841 A	23-12-1998				
CZ 9801137 A	16-09-1998				
EP 0857093 A	12-08-1998				
HU 9902084 A	28-10-1999				
JP 2000500695 T	25-01-2000				
NO 981738 A	17-04-1998				
PL 326277 A	31-08-1998				
TR 9800695 T	22-06-1998				
WO 9714517 A	24-04-1997				
EP 672743 A	20-09-1995	DE 4409401 C	01-06-1995		
		DE 4409402 A	21-09-1995		
		AT 172231 T	15-10-1998		
		DE 59503892 D	19-11-1998		
		DK 672743 T	23-06-1999		
		JP 8042827 A	16-02-1996		
		US 5595483 A	21-01-1997		
US 4284616 A	18-08-1981	US 4250158 A	10-02-1981		
		AT 113679 A	15-08-1983		
		BR 7906609 A	26-02-1980		
		CA 1149134 A	05-07-1983		
		EP 0003803 A	05-09-1979		
		EP 0070040 A	19-01-1983		
		FR 2446312 A	08-08-1980		
		GB 2036066 A,B	25-06-1980		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/01717

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4284616 A		GR 74008 A	06-06-1984
		JP 55500113 T	28-02-1980
		WO 7900625 A	06-09-1979
		AR 222480 A	29-05-1981
		AU 524513 B	23-09-1982
		AU 4424279 A	23-08-1979
		BE 874201 A	29-05-1979
		FR 2417543 A	14-09-1979
		GB 1604184 A	02-12-1981
		GB 1604185 A	02-12-1981
		US 5102638 A	07-04-1992
BR 9003060 A	27-08-1991		
DE 59005324 D	19-05-1994		
EP 0406675 A	09-01-1991		
JP 3131319 A	04-06-1991		
US 4839021 A	13-06-1989	US 4740270 A	26-04-1988