

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 933 465 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
02.05.2003 Bulletin 2003/18

(51) Int Cl.7: **D06F 58/10**

(21) Application number: **98101607.4**

(22) Date of filing: **30.01.1998**

(54) **Laundry drier and method for drying laundry which uses such drier**

Wäschetrockner und Verfahren zum Trocknen von Wäsche mit einem solchen Wäschetrockner

Séchoir à linge et procédé pour sécher le linge utilisant un tel séchoir

(84) Designated Contracting States:
CH DE ES FR GB IT LI SE

(43) Date of publication of application:
04.08.1999 Bulletin 1999/31

(73) Proprietor: **WHIRLPOOL CORPORATION**
Benton Harbor Michigan 49022 (US)

(72) Inventors:
• **Maki, Kevin**
V.le G. Borghi 27, 21025 Comerio (IT)
• **Serrini, Patrizia**
V.le G. Borghi 27, 21025 Comerio (IT)
• **Civanelli, Claudio**
V.le G. Borghi 27, 21025 Comerio (IT)

(74) Representative: **Guerci, Alessandro**
Whirlpool Europe S.r.l.
Patent Department
Viale G. Borghi 27
21025 Comerio (VA) (IT)

(56) References cited:
EP-A- 0 556 907 **FR-A- 2 279 878**
US-A- 3 303 577 **US-A- 3 668 784**

• **PATENT ABSTRACTS OF JAPAN vol. 015, no.**
141 (C-0822), 10 April 1991 -& JP 03 023896 A
(MASUKI TAKASU), 31 January 1991,

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 933 465 B1

Description

[0001] The present invention relates to a laundry drier, particularly of the domestic type, comprising a chamber where laundry is contained, an outer casing housing said chamber, a blower to feed drying air through said chamber and conduits suitable to convey said drying air into and outside said chamber.

[0002] In the conventional laundry driers the chamber where laundry is placed in order to be dried is a rotating drum through which the air flow is mainly horizontal. The movement of the laundry is a tumbling motion caused by the rotation of the horizontal drum. Conventional laundry driers are quite complicate and expensive domestic appliances since they have to control both air flow and drum rotation. Moreover they are not actually efficient in term of energy-saving.

[0003] JP-A-03 023 896 discloses a laundry dryer where hot air is circulated transversely through a cylindrical rotating basket.

[0004] US-A-3 668 784 discloses a laundry dryer having tangential slot-shaped air distributors placed on a rounded bottom surface of the chamber.

[0005] US-A-3 303 577 discloses a laundry dryer having an inclined perforated plate or grid placed at the bottom portion of a hopper.

[0006] It would be desirable, and it is actually an object of the present invention, to provide a laundry drier which is capable of assuring an improved energy efficiency and, at the same time, a low cost due to a simpler construction.

[0007] This aim is reached according to the present invention in a laundry drier which comprises air distribution means placed substantially at the bottom of the chamber, the laundry being maintained in a substantially fluidized condition in said chamber by the drying air flowing through said air distribution means.

[0008] Another aim of the present invention is to provide a new method of laundry drying according to which an air flow entering through an air distributor agitates the load, suspending and moving it like a fluid.

[0009] This new and innovative technology permits to improve considerably the actual performances of the clothes dryers. The benefits are the following: energy savings, fabric care, time savings and cost savings. In view of energy saving advantages of the laundry drier according to the invention, it is more easy for appliances producers to cope with European Community guidelines relating to energy savings in domestic appliances, for instance in producing laundry driers in class A, without the need to provide the drier with a heat pump. The remarkable potential of the new drying method permits to reach class A, using a drying process different from the traditional method. High air flow and floating of the laundry expose, on average, more surface of clothes, increasing the rate of evaporation. There is thus the possibility to improve considerably the efficiency of the drying process and to reach an efficiency closer to the theoretical limit (0.7 kWh per kg of water). Furthermore, due to the high air speed, it is possible that some of the liquid water is removed mechanically in form of liquid droplets. That water doesn't need to be evaporated, and so the above mentioned theoretical limit could be even passed.

That water doesn't need to be evaporated, and so the above mentioned theoretical limit could be even passed.

[0010] In other words, the drying time and energy consumption can be considerably reduced. Another improvement concerns the fabric care: the temperatures involved in the drying process are lower than in the traditional method and also the mechanical action on the fibers is reduced (reduced or avoided tumbling of the load).

[0011] For a better understanding, the invention will be further described by way of non-limiting example with reference to the accompanying drawings, in which:

- Figure 1 is a perspective, schematic view of a laundry drier according to the present invention,
- Figure 2 is a see-through view of the inner side of the laundry drier shown in Figure 1,
- Figure 3 is a schematic view of the air flow circuit of a laundry drier according to a second embodiment of the present invention,
- Figure 4 is a schematic, perspective view of a component of a laundry drier according to a third embodiment of the present invention, and
- Figure 5 is a schematic view of the laundry chamber of a laundry drier according to a fourth embodiment of the present invention.

[0012] The use of "fluidized bed" in a clothes dryer is a radically different method for drying. Basically the "fluidized bed" system consists of few components: a top-loading cabinet 10, a fan or blower 12, and a perforated plate 14 between the fan 12 and the load to be dried. The laundry drier according to the present invention does not need a heating element; of course, in order to shorten the drying time, a heating element may be included in the air flow path, upstream the blower 12. Using a velocity of the air comprised preferably between 0.5 and 20 m/s, and more preferably between 1 and 10 m/s, that is sufficient to counterbalance the gravitational force, it is possible to suspend and move the load like a fluid. In order to obtain that, it is necessary to have a volume available that is much bigger than the volume of the drum of a conventional dryer (typically around 100 liters). This is obtained by removing completely the drum, due to the fact that now the agitation or surface renewal of the load isn't obtained any more by the tumbling motion of the laundry due to rotation of the drum itself, but just by the air flow. The volume available becomes in this way around 200-300 liters.

[0013] The resulting construction is simply a box as the one shown in Figure 2, with the same external size of a conventional domestic appliance (in Europe typically cm. 60 x 60 x 85h), with the perforated plate 14 at the bottom, a blower 12 which blows the air through the perforated bottom 14 and the load and a connection funnel-

shaped conduit between the blower 12 and the perforated plate 14. The air distributor, i.e. the perforated bottom plate 14, may have different configurations; it may be formed by concentric rings in the same plane, by concentric rings in the form of a cone, by parallel slots in a flat plate or by dished and perforated plates concave both upward or downward. In order to provide a good distribution of the fluidized bed made by single items of clothes, it is necessary to restrict the air flow so that a pressure drop across the restriction is created. The pressure drop across the air distributor 14 should be at least 30% of the bed pressure drop. The embodiment shown in Figure 2 applies to a dryer conceptually equivalent to a so called "air vented dryer".

[0014] Figure 3 shows another embodiment which can be compared to the so called "condenser dryer". In this case an heating element 16 and an heat exchanger 18 are added to the components disclosed with reference to the above first embodiment, and the air flow is closed in an air channel 19. Another blower 20 should be added to improve the cooling of the process air. The functioning is similar to the one of a conventional condenser dryer, but due to the increased air flow, the energy consumption is significantly reduced. The heater 16 and the condenser 18 could be conveniently substituted by a condenser and an evaporator of a heat pump, to get a further reduction of the energy consumption.

[0015] Figure 4 shows another embodiment which relates to a different type of air distributor which is derived from the mechanism of the dishwasher. In this case the air is driven in the laundry chamber 10 through a rotating arm 22, similar to the ones used in the dishwashers, a part from its size, in order to enhance the even distribution of the air through the load. The rotating arm 22 is provided with a plurality of air nozzles 23. The concentration of the air flow in "stronger" streams does improve the movement of the laundry.

[0016] All the above embodiments shown in Figures 2-4 relate to a laundry drier in which the horizontal cross section of the cabinet 10 corresponds (if the insulation thickness of the appliance is disregarded) to the cross section of the chamber in which the laundry is placed. If an increase of laundry movement in the fluidized bed is desired, mainly in order to decrease the drying time, the embodiment shown schematically in Figure 5 may be adopted, in which the chamber 24 for the laundry has a circular cross section. In this embodiment auxiliary air conduits 26 link the plenum chamber P downstream the blower 12 and upstream the air distributor 14 with lateral cylindrical wall 24a of the chamber 24. The auxiliary conduits 26 are placed in the interspace between the side wall 24a of the chamber 24 and the side walls of the cabinet or casing 10. The nozzles 26a of the conduits 26 adjacent the wall 24a are substantially tangential to such wall, in order to cause a swirling action on the fluidized laundry. In Figure 5, for sake of simplicity, only two conduits 26 are shown; of course the number of such conduits has to be chosen depending on the de-

sired degree of swirling action.

[0017] In all the above embodiments a pulsing air flow may be chosen; the pulsing flow may avoid problems of clogging of the fluidized bed. The frequency of air pulse and the duration of each pulse may vary in a wide range, for instance drying air flow pulses of 5-20 seconds spaced by intervals of 5 to 10 seconds.

[0018] The laundry drier according to the present invention may comprise a humidity sensor downstream the fluidized bed in order to end the drying cycle when the degree of humidity of air leaving laundry has reached a predetermined level. The degree of humidity and/or the pressure drop across the fluidized bed may be also used for adjusting, through a control process unit of the drier, the rotational speed of the motor of blower 12 and hence the air flow rate through the fluidized bed.

Claims

1. Laundry drier, particularly of the domestic type, comprising a chamber (10, 24) where the clothes are contained, an outer casing (10) housing said chamber, a blower (12) to feed drying air to said chamber, and conduits suitable to convey said drying air into and outside said chamber, **characterized in that** it further comprises a perforated horizontal plate (14) placed at the bottom of said chamber (10, 24) for maintaining laundry in a substantially fluidized condition in the chamber by the drying air flowing through said perforated plate, the horizontal cross section of the chamber (10) corresponding substantially to the horizontal cross section of the outer casing (10).
2. Laundry drier according to claim 1, **characterized in that** said conduits comprise cooling means (18, 20) for condensing humidity downstream the chamber (10, 24) and means (19) for recirculating drying air.
3. Laundry drier according to claim 1, **characterized in that** said chamber (24) has a substantially circular horizontal cross section and is provided with auxiliary air distribution means (26, 26a) flowing into a side wall (24a) of the chamber (24).
4. Laundry drier according to claim 3, **characterized in that** said auxiliary air distribution means (26) comprise nozzles (26a) arranged in a substantially tangential arrangement on the circular wall (24a) of the chamber (24).
5. Laundry drier according to any of claims 1-5, **characterized in that** it further comprises a horizontal arm (22) rotating around a substantially vertical axis and having a plurality of air nozzles (23) for improving the fluidization of laundry.

6. Laundry drier according to any of the preceding claims, **characterized in that** the air speed in the chamber (10, 24) is comprised between 0,5 and 20 m/s, preferably between 1 and 10 m/s.

5

Patentansprüche



1. Wäschetrockner, insbesondere als Haushaltgerät, mit einer Wäsche aufnehmenden Kammer (10, 24), einem die genannte Kammer aufnehmenden Gehäuse (10), einem Ventilator (12) zur Zuführung von Trocknungsluft zur genannten Kammer und mit Leitungen, die zur Förderung der genannten Trocknungsluft innerhalb und außerhalb der genannten Kammer geeignet sind, **dadurch gekennzeichnet, dass** er ferner eine im Wesentlichen auf dem Boden der Kammer (10, 24) angeordnete, horizontale, perforierte Platte (14) aufweist, die die Wäsche in einem im Wesentlichen fluidisierten Zustand in der Kammer durch die Trocknungsluft hält, die durch die perforierte Platte strömt, wobei der horizontale Querschnitt der Kammer (10) im Wesentlichen dem horizontalen Querschnitt des Außengehäuses (10) entspricht.
2. Wäschetrockner nach Anspruch 1, **dadurch gekennzeichnet, dass** die genannten Leitungen Kühlmittel (18, 20) zum Kondensieren der Feuchtigkeit stromabwärts von der Kammer (10, 24) und Mittel (19) zur Zuführung der Trocknungsluft aufweisen.
3. Wäschetrockner nach Anspruch 1, **dadurch gekennzeichnet, dass** die genannte Kammer (24) einen im Wesentlichen runden, horizontalen Querschnitt aufweist und mit Hilfsluftverteilungsmitteln (26, 26a) versehen ist, die in eine Seitenwand (24a) der Kammer (24) führen.
4. Wäschetrockner nach Anspruch 3, **dadurch gekennzeichnet, dass** die genannten Hilfsluftverteilungsmitteln (26) Düsen (26a) aufweisen, die im Wesentlichen in einer tangentialen Anordnung in die runde Wand (24a) der Kammer (24) einmünden.
5. Wäschetrockner nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** er ferner einen Horizontalarm (22) aufweist, der sich um eine im Wesentlichen vertikale Achse dreht und eine Vielzahl von Düsen (23) zur Verbesserung der Fluidisierung der Wäsche hat.
6. Wäschetrockner nach einem der vorstehenden Ansprüche,



dadurch gekennzeichnet,

dass die Luftgeschwindigkeit in der Kammer (10, 24) zwischen 0,5 und 20m/s, vorzugsweise zwischen 1 und 10m/s, liegt.

Revendications

1. Sèche-linge, notamment comprenant une chambre (10, 24), qui contient les vêtements, une enceinte extérieure (10) logeant ladite chambre, un ventilateur (12) servant à envoyer un air de séchage à ladite chambre et des conduits convenant pour véhiculer ledit système de séchage dans et à l'extérieur de ladite chambre, **caractérisé en ce qu'il** comporte en outre une plaque horizontale perforée (14) disposée au fond de ladite chambre (10, 24) pour maintenir le linge dans un état essentiellement fluidisé dans la chambre sous l'effet de la circulation de l'air de séchage à travers ladite plaque perforée, la section transversale horizontale de la chambre (10) correspondant essentiellement à la section transversale horizontale de l'enceinte extérieure (10).
2. Sèche-linge selon la revendication 1, **caractérisé en ce que** lesdits conduits comprennent des moyens de refroidissement (18, 20) servant à condenser l'humidité en aval de la chambre (10, 24), et des moyens pour faire recirculer l'air de séchage.
3. Sèche-linge selon la revendication 1, **caractérisé en ce que** ladite chambre (24) possède une section transversale horizontale essentiellement circulaire et comporte des moyens auxiliaires de distribution d'air (26, 26a) pénétrant dans une paroi latérale (24a) de la chambre (24).
4. Sèche-linge selon la revendication 3, **caractérisé en ce que** lesdits moyens auxiliaires de distribution d'air (26) comprennent des buses (26a) disposées selon une disposition essentiellement tangentielle à la paroi circulaire (24a) de la chambre (24).
5. Sèche-linge selon l'une quelconque des revendications 1 à 5, **caractérisé en ce qu'il** comporte en outre un bras horizontal (22) tournant autour d'un axe essentiellement vertical et possédant une pluralité de buses de projection d'air (23) pour améliorer la fluidisation du linge.
6. Sèche-linge selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la vitesse de l'air dans la chambre (10, 24) est comprise entre 0,5 et 20 m/s et de préférence entre 1 et 10 m/s.

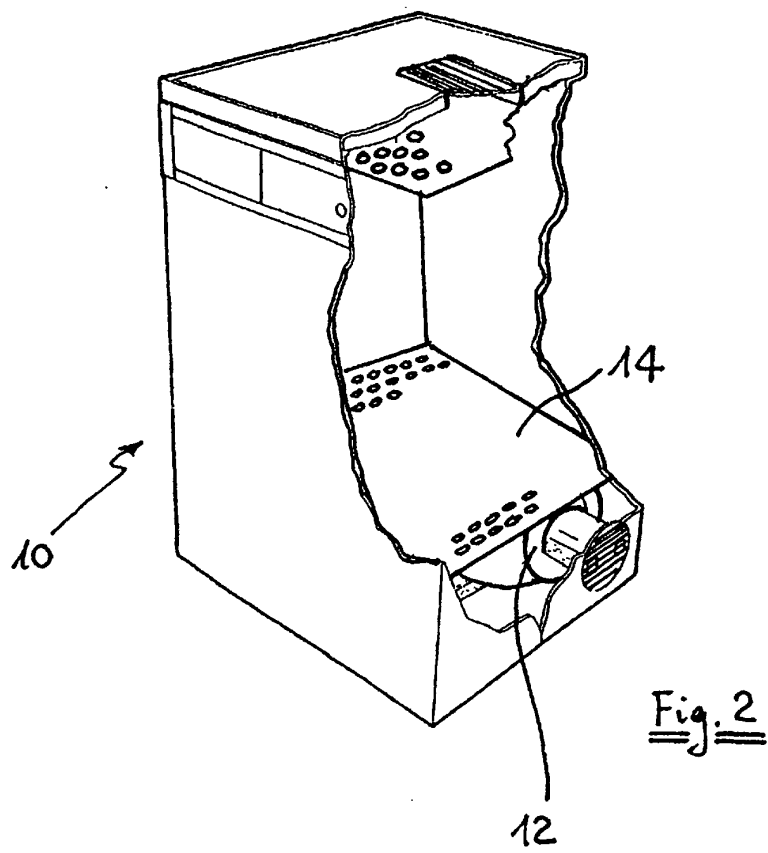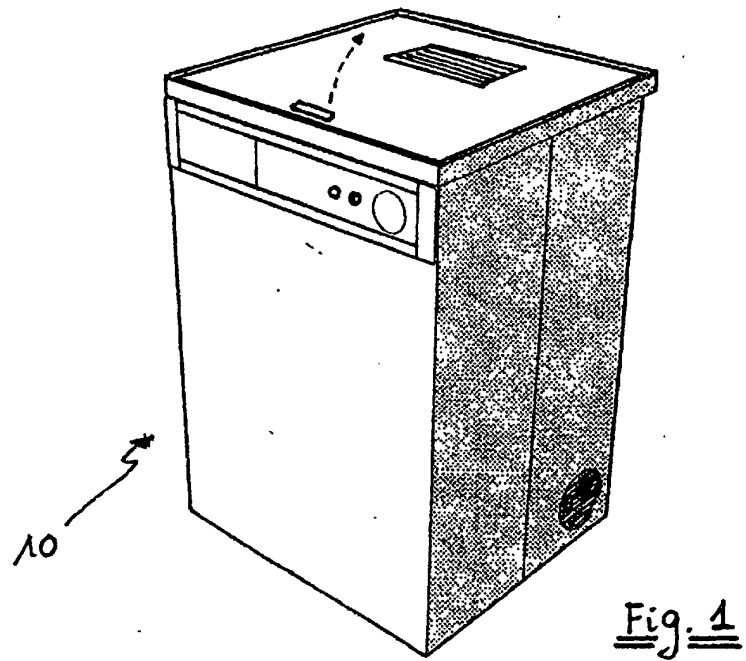

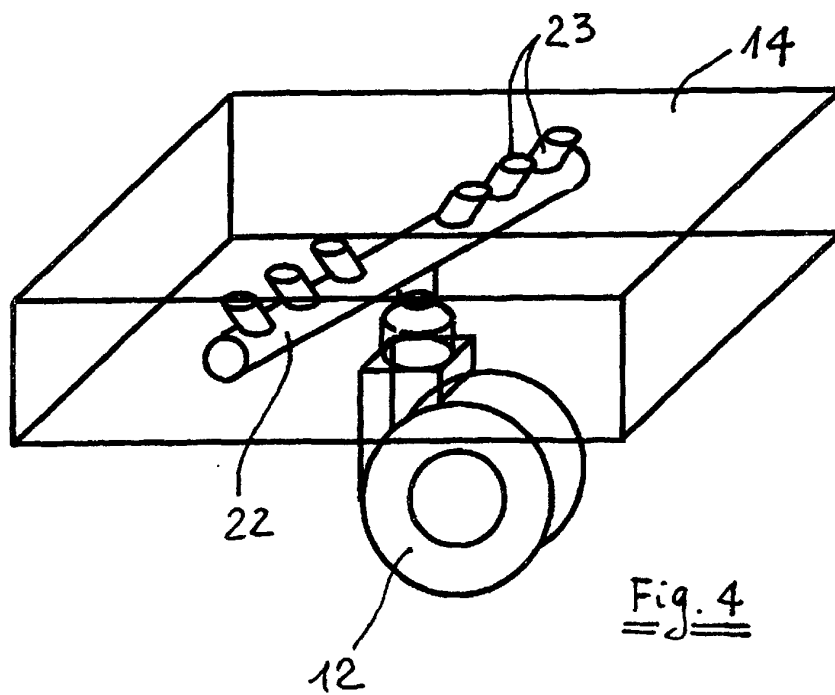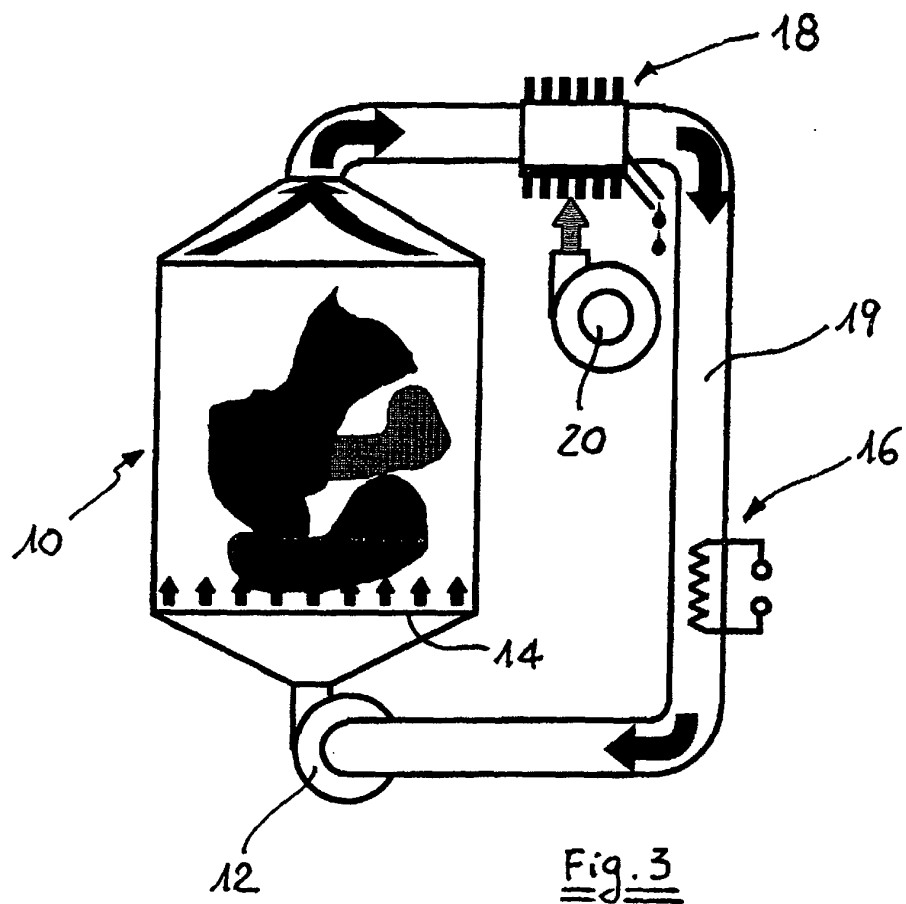

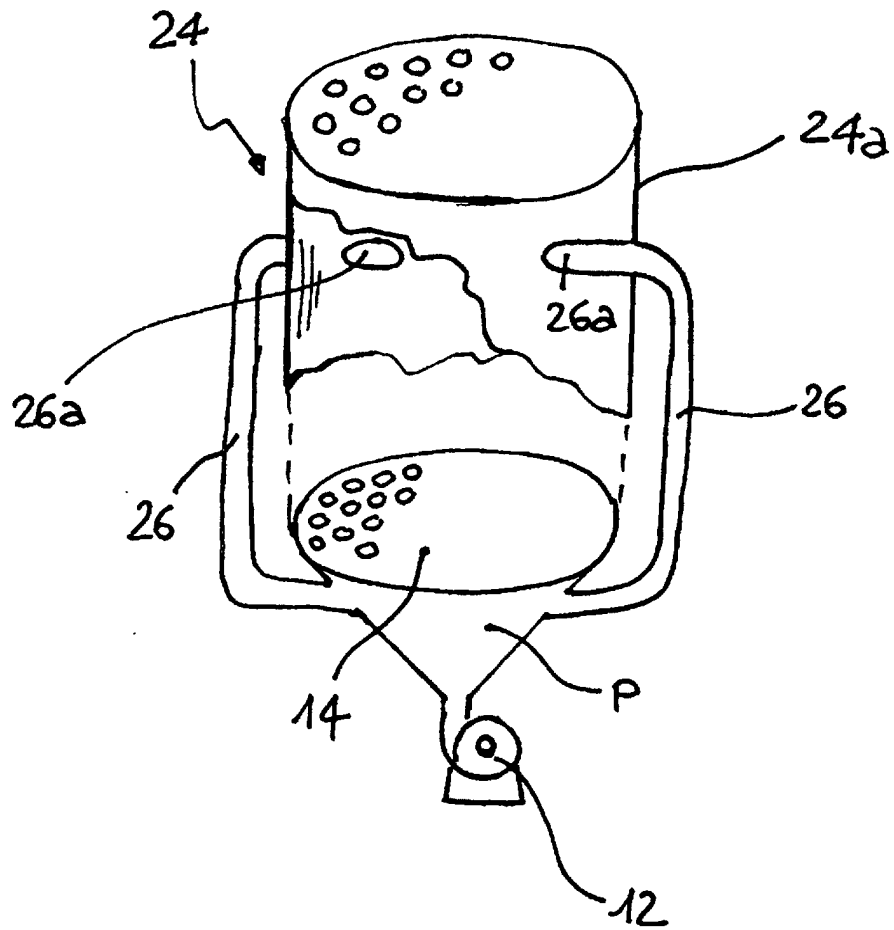


Fig. 5