



HU000032348T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 032 348**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: E 14 001968	(51) Int. Cl.: C10J 3/00	(2006.01)
(22) A bejelentés napja: 2014. 06. 06.	C10J 3/30	(2006.01)
	C10J 3/72	(2006.01)
(96) Az európai bejelentés bejelentési száma: EP 20140001968	F23G 5/027	(2006.01)
(97) Az európai bejelentés közzétételi adatai: EP 2952556 A1 2015. 12. 09.	F23G 5/10	(2006.01)
(97) Az európai szabadalom megadásának meghirdetési adatai: EP 2952556 B1 2016. 09. 28.	F23G 7/10	(2006.01)

(72) Feltaláló(k):
Jancok, L'ubor, 390 30 Rasun Anterselva (IT)

(73) Jogosult(ak):
S.I.L., a.s., 841 07 Bratislava (SK)

(74) Képviselő:
**Danubia Szabadalmi és Jogi Iroda Kft.,
Budapest**

(54) **Berendezés gáznemű tüzelőanyag szerves és/vagy szervetlen eredetű anyagokból történő előállítására**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 952 556 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
28.09.2016 Bulletin 2016/39

(51) Int Cl.:
C10J 3/00 (2006.01) **F23G 5/10** (2006.01)
C10J 3/30 (2006.01) **C10J 3/72** (2006.01)
F23G 5/027 (2006.01) **F23G 7/10** (2006.01)

(21) Application number: **14001968.8**

(22) Date of filing: **06.06.2014**

(54) **AN APPARATUS FOR PRODUCTION OF GASEOUS FUEL FROM MATERIALS OF ORGANIC AND/OR INORGANIC ORIGIN**

EINE VORRICHTUNG ZUR ERZEUGUNG VON GASFÖRMIGEN BRENNSTOFF VON MATERIALIEN VON ORGANISCHEN UND / ODER ANORGANISCHEN URSPRUNG

APPAREIL POUR LA PRODUCTION D'UN COMBUSTIBLE GAZEUX À PARTIR DE MATIÈRES D'ORIGINE ORGANIQUE ET / OU INORGANIQUE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
09.12.2015 Bulletin 2015/50

(73) Proprietor: **S.I.L., a.s.**
841 07 Bratislava (SK)

(72) Inventor: **Jancok, L'ubor**
390 30 Rasun Anterselva (IT)

(74) Representative: **Sedlák, Jiri**
Husova 5
P.O. Box 1
370 01 České Budejovice (CZ)

(56) References cited:
EP-A1- 0 067 139 WO-A1-2008/034263
US-A1- 2006 075 944

EP 2 952 556 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Background and summary of the invention

[0001] The invention relates to a device for the gasification of organic or inorganic materials such as bulk waste based on wood or other biomass, or even municipal waste, waste oil, coal, etc., which generates synthesis gas used as fuel for internal combustion engines and combustion turbines, for example those designed to drive electric generators in cogeneration units.

[0002] Hitherto known devices for the gasification of organic or predominantly organic materials such as wood waste, wood chips, straw, sludge, and various forms of biomass, including municipal and other wastes, predominantly utilize a gasification process based on combustion, partial combustion, or fluidized bed combustion of material. In these cases the material is filled from a filling hopper into auger conveyors, through which it is moved and is heated directly or indirectly during the passage through the auger conveyors, during which synthesis gas is developed from the ongoing thermochemical reaction. The synthesis gas is then used as a gaseous fuel for internal combustion engines of cogeneration units.

[0003] In these known devices, the major problem is maintaining the stability of the gasification process and achieving a standard high quality of the output synthesis gas, particularly in achieving a low tar and nitrogen content. Precise regulation of the combustion process is difficult, and a disadvantage also lies in the high emissions of ash and other pollutants. The output synthesis gas generally contains tars which are formed during the combustion of pre-dried material with a moisture content of up to 15%. Low moisture, which is a prerequisite of effective combustion, has the undesirable consequence of a high tar content which must subsequently be chemically removed by washing in order to achieve a sufficient quality of synthesis gas for its combustion in internal combustion engines.

[0004] In patent application JP 2001 28 94 22 A, the device for the gasification of material is described through its combustion. In order to prevent atmospheric air from entering the device and thus reducing the risk of ignition of the material in the hopper, part of the flue gas from the combustion chamber is filtered, cooled, and fed into the sealing mechanism which is positioned before the entry into the combustion chamber. Conversely, the combustion chamber is supplied with oxygen in order to improve the combustion of the unburnt particles. During the combustion of the material, which must have a low input relative moisture, undesirable tars are not formed but neither is a large percentage of nitrogen, so the output synthesis gas is not of a sufficient quality.

[0005] In patent EP 186 5045, biomass enters the device from the tray through a supply auger and then passes through two gasification augers. Below them is positioned a combustion auger, from which both gasification augers are heated. Small biomass particles pass through

a sieve from the gasification auger into the combustion auger where they are combusted during the supply of preheated combustion air. Larger particles are returned to the gasification process. The developed synthesis gas passes through the entire device back to the beginning, where it is removed. The device according to EP 186 5045 is designed to allow for a reduction of the nitrogen content in the developed synthesis gas. Given that the gasification augers are not hermetically separated from the combustion auger, the disadvantage of the device is that part of the flue gas continuously penetrates into the gasification augers, so the nitrogen content in the exhaust gas cannot achieve the zero or negligible value optimal for achieving a high quality of developed synthesis gas. The tar content in the synthesis gas is also high, since the material passing through the gasification augers cannot have a high relative moisture due to the subsequent combustion.

[0006] In US 2006/0075944 A1, a device for the production of gaseous fuel from solid materials is disclosed. The apparatus comprises a filling chamber and two heated gasification augers.

[0007] The task of the invention is to provide a gasification device which would remove the disadvantages of the known devices, allow for the processing of materials with a high relative moisture, and achieve a high quality of developed synthesis gas with a minimum tar and nitrogen content. A further task is to provide a device with lower emissions, with efficient regulation of the gasification process, and with improved stability of the entire system.

[0008] This task is solved by creating a device for the production of gaseous fuel from materials of organic and/or inorganic origin according to the present invention.

[0009] The device includes a filling chamber which is connected to at least one supply auger conveyor for supplying material from the filling chamber into the gasification reactor. The gasification reactor comprises at least two heated gasification augers arranged in rows above beneath each other for a serpentine flow of the material through the reactor. Gaseous fuel is formed as a synthesis gas from the thermochemical reaction in the gasification augers and is collected at the outlet which is arranged on the lowest gasification auger.

[0010] The subject-matter of the invention lies in each horizontal row of gasification augers being formed by a gasification body whose casing has a closed oval cross-section formed by an upper base, a bottom base, and convex side walls each with a circular arc profile, wherein each gasification body contains at least two gasification augers arranged side by side and mutually partially separated by longitudinal partitions that form half-grooves for the individual gasification augers. The gasification bodies are heated by electric heating, wherein at least one electric heating element is arranged parallel to the lower base and/or to the upper base of each gasification body. The filling chamber is hermetically sealed to pre-

vent the access of atmospheric air when the material is being filled. At least one neck leads into the filling chamber for supplying exhaust gases from the combustion of the synthesis gas in the internal combustion engine. The filling chamber is further provided with at least one neck for the removal of exhaust gases from the filling chamber. The device according to the invention allows for the production of synthesis gas with a lower tar content and almost zero nitrogen content, because the electric heater allows for the processing of materials with a higher relative moisture and with perfect regulated heating in the gasification bodies which, together with the elimination of combustion and with gas-tight closure of the filling chamber, results in an improved quality of the output gas used as fuel gas.

[0011] In a preferred embodiment of the invention, the filling auger conveyor is arranged above the uppermost gasification body and is fitted with at least one neck for the supply of water or steam, at least one neck for the supply of heat, and at least one neck for the removal of heat. The material fed into the reactor can thus be moisturized prior to its entry into the first gasification body and preheated to improve the parameters of the gasification process.

[0012] In another preferred embodiment of the invention, there is a spacer, positioned between the filling auger conveyor and the uppermost placed gasification body, that contains a moisture sensor for the material and an additional or alternative supply of water or steam for adjusting the moisture of the material. According to the measured moisture values, it is thus possible to make final adjustments to the moisture content of the material to the optimum value also in the spacer just before the material enters into the gasification body.

[0013] For ideal mixing and moisturizing of the input material, it is preferred that the filling chamber has a conical shape in its lower part, and leading into the filling chamber are the ends of two supply auger conveyors which are separated inside the filling chamber by a wedge-shaped partition. Towards the opposite ends of the filling conveyor auger are connected two spacers that lead to a joint outlet neck with a flange that is connected to the flange of the inlet neck of the uppermost gasification body.

[0014] For universal use for various kinds of organic and inorganic materials, it is preferred that the device comprises three gasification bodies arranged in horizontal rows one above the other, wherein inside each gasification body there are arranged, in parallel in a horizontal plane, four gasification augers separated by longitudinal partitions.

[0015] In a preferred constructional embodiment of the device according to the invention, the gasification bodies are horizontally separated from each other by vertical supporting partitions, wherein the electrical heaters are removably placed in gaps between the adjacent bodies and between the adjacent supporting partitions and the side partitions on the upper base of each gasification

body. This embodiment allows for easier installation, and repair and replacement of the heaters or their parts. The electric heater preferably comprises a set of heating elements in the form of tubes whose axes extend perpendicularly to the axes of the gasification augers. The device is housed in a cabinet with service holes that allow for the exchange of the heating elements without the need to remove the outer casing of the reactor.

[0016] In order to uniformly form an airtight seal of the material in the filling chamber, the filling chamber is preferably provided with two oppositely arranged necks for the supply of exhaust gases, wherein these necks are interconnected through distribution piping. The exhaust gases can thus penetrate into the filling chamber uniformly from both sides. The neck for the release of exhaust gas from the filling chamber is arranged above the two supply necks.

[0017] Finally, it is advantageous that the front wall of each gasification body is provided with a common connecting flange for connecting the drives to the axes of the gasification augers in the gasification body.

[0018] The advantages of the device according to the invention are that it allows for the generation of high-quality synthesis gas with a minimum content of tars and nitrogen from various kinds of organic and inorganic materials which may have a relative moisture content greater than 50%. An advantage is also the even and intense electric heating of moist material in the gasification bodies with common and uniform heating of several gasification augers at the same time. Another advantage is the simple prevention of the inlet of atmospheric air into the gasification process using exhaust gases that are formed as combustion products of synthesis gas, in an internal combustion engine. The device, in comparison to known reactors, is characterized by low emissions, efficient regulation of the gasification process, and improved stability of the entire reactor system associated with the cogeneration unit.

Description of the drawings

[0019] The invention is described in detail by means of the drawings as follows:

- Figure 1 is a block diagram of the device according to the invention showing the reactor connected to a cogeneration unit and other parts of the synthesis gas processing technology
- Figure 2 shows a perspective overall view of the device
- Figure 3 shows an exploded perspective view of the assembly of the filling auger conveyors and gasification bodies with electrical heaters
- Figure 4 shows a vertical sectional view of the device on the A-A plane of Figure 3
- Figure 5 shows a detailed perspective view of the filling chamber
- Figure 6 shows a partial sectional view of the filling

auger conveyors and filling chamber

Examples of the preferred embodiments of the invention

[0020] It should be understood that the further described and illustrated specific examples of the realized invention are presented for illustrative purposes and not as a limitation of the examples of the realization of the invention to the cases shown herein. Those skilled in the art shall find, or using routine experimentation will be able to determine, a greater or lesser number of equivalents to the specific realizations of the invention that are specifically described here. These equivalents shall also be included into the scope of the following claims.

[0021] The device 1 is, in the embodiment shown in Figure 1, part of a technological system used to produce electricity from biomass. Electrical energy is produced by a generator which is part of a cogeneration unit connected to a transformer 32. The generator is powered by a combustion engine 17, which is continuously supplied by gaseous fuel produced in the device 1 as synthesis gas formed as a thermochemical reaction by the gasification of biomass. The synthesis gas is removed at the outlet 8 of the device 1, passes through a cooling and cleaning unit 31, to which is connected an auxiliary media unit 33. Prior to entering the internal combustion engine 17 a torch 34 is mounted on the pipe supplying the synthesis gas for the emergency combustion of synthesis gas in the event of failure of the internal combustion engine 17. The exhaust gases 16 from the combustion engine 17 are led to the filling chamber 2 of the device 1, and hermetically fill it, thus preventing the inlet of atmospheric air contained in the biomass to the device 1.

[0022] As is seen from Figure 2, the device 1 has a cabinet 25 in which three gasification bodies 7, 7', 7'' are stored. The cabinet 25 has, on its sides, a set of service openings 26 for exchanging the heating elements 24 of the electrical heaters 14 arranged between the individual gasification bodies 7, 7', 7''. Above the cabinet 25 is a filling chamber 2 into which the biomass (not shown) falls into the hopper (not shown). The filling chamber 2 has a cubical shape, the bottom of which is conical. On the side of the filling chamber 2 is a neck 15 for the supply of exhaust gas 16. In the upper lid 30 of the filling chamber 2 is an opening for the supply of biomass and a neck 18 for releasing exhaust gases 16 from the filling chamber 2. Exhaust gases 16 are continuously supplied from the internal combustion engine 17 into the filling chamber 2, pass through the biomass in the filling chamber 2 and exit through the neck 18 and a chimney (not shown) into the atmosphere. From the bottom part of the filling chamber 2 there project two supply augers 3, 3' that transport the biomass from the filling chamber 2 further into the reactor through the spacers 4, 4' connected to the outlet neck 5 with a flange.

[0023] Figure 3 shows that the supply auger conveyors 3, 3' are each fitted with one neck 20 for supplying heat and one neck 21 for removing heat. The spacers 4, 4'

then have necks 36 for supplying water or steam and in addition are fitted internally with a sensor 29 for the moisture of the material. Figure 3 also shows the construction of the device 1 inside the cabinet 25, where three gasification bodies 7, 7', 7'' are horizontally arranged above each other and are mutually interconnected so that the material passes through them in a serpentine direction. The upper gasification body 7 has an inlet neck 6 with a flange which is connected to the flange of the outlet neck 5, through which material falls out from the spacers 4, 4' into the uppermost positioned gasification body 7. The gasification bodies 7, 7', 7'' form a floor supported by vertical bearing partitions 23 made of sheet metal. Each gasification body 7, 7', 7'' is a sheet metal weldment of elliptical cross-section having a flat upper base 10, a flat lower base 11, and two semi-circular side walls 12. Inside each gasification body 7, 7', 7'' are positioned, parallel to each other, four gasification augers 9, partially separated from each other by longitudinal partitions 13. The longitudinal partitions 13 are welded to the lower base 11 and are shaped like open semicircular half-grooves in which the gasification augers 9 are placed. The axles 28 of the gasifying augers 9 project from the front walls of the gasification bodies 7, 7', 7'', where there are flanges 27 for connecting the drives (not shown) for the gasification augers 9. On the upper bases 10 of the gasifying bodies 7, 7', 7'' are positioned electric heaters 14 comprised of sets of heating elements 24 in the form of tubes, the axes of which run perpendicular to the axles of the gasification augers 9. The heating elements 24 can thus be removed for replacement from the cabinet 25 through the service openings 26. Each electric heater 14 is bounded by longitudinal support partitions 23 and by side partitions 35 on the side, so it heats up the gasification body 7, 7', 7'' arranged above it in an enclosed space.

[0024] Figures 5 and 6 show in detail the filling chamber 2. In its lower part is a wedge-shaped partition 22 that separates the supply auger conveyors 3, 3' from each other. On the sides are two necks 15 for the supply of exhaust gases 16 which are interconnected by distribution pipes 19 for uniform distribution of exhaust gases 16 into the filling chamber 2.

[0025] The device according to the invention can be used to produce fuel gas by the gasification of organic or inorganic material.

Overview of the positions used in the drawings

[0026]

- | | |
|----|---|
| 1 | device for the production of gaseous fuel |
| 2 | filling chamber |
| 3 | supply auger conveyor into the reactor |
| 3' | supply auger conveyor into the reactor |
| 4 | spacer |
| 4' | spacer |
| 5 | outlet neck with flange |
| 6 | inlet neck with flange |

7 gasification body
 7' gasification body
 7" gasification body
 8 outlet of synthesis gas
 9 gasification auger
 10 upper base of gasification body
 11 lower base of gasification body
 12 side wall of gasification body
 13 longitudinal partition of gasification body
 14 electric heater
 15 neck for supply of exhaust gases
 16 exhaust gases
 17 internal combustion engine
 18 neck for the removal/release of exhaust gases
 19 distribution pipes for exhaust gases
 20 neck for supply of heat
 21 neck for removal/release of heat
 22 wedge-shaped partition
 23 support partition
 24 heating element
 25 cabinet
 26 service opening for heating element replacement
 27 connecting flange
 28 axle of gasification auger
 29 material humidity sensor
 30 lid of filling chamber
 31 gas cooling and cleaning unit
 32 transformer
 33 auxiliary media unit
 34 torch
 35 side partition
 36 neck for water or steam inlet

Claims

1. A device (1) for the production of gaseous fuel from materials of organic and/or inorganic origin, including a filling chamber (2) which is connected to at least one supply auger conveyor (3, 3') for supplying material from the filling chamber (2) into a reactor which comprises at least two heated gasification augers (9) arranged in at least two horizontal rows above each other for a serpentine passage of material from the filling chamber (2) to an outlet (8) of the fuel gas formed by synthesis gas from a thermochemical reaction in the gasification augers (9), wherein the outlet (8) is arranged on the lowest positioned gasification auger (9), **characterized in that** each horizontal row of the gasification augers (9) is formed by a gasification body (7, 7', 7''), the casing of which has a closed oval cross-section formed by an upper base (10), a lower base (11) and convex side walls (12) each having a circular arc profile, wherein each gasifying body (7, 7', 7'') contains at least two gasification augers (9) arranged side by side and mutually partially separated by longitudinal partitions (13) which form half-grooves for the individual gasification au-

gers (9), further, parallel to the upper base (10) and/or to the lower base (11) of each gasification body (7, 7', 7'') there is arranged at least one electrical heater (14), and the filling chamber (2) is hermetically sealed to prevent the inlet of atmospheric air during the filling of the material, and at least one neck (15) leads into the filling chamber (2) for supplying exhaust gases (16) from the combustion of the synthesis gas collected at the outlet (8) of the device (1) in an internal combustion engine (17), and the filling chamber (2) is fitted with at least one neck (18) for the release of exhaust gases (16) from the filling chamber (2).

2. A device according to claim 1, **characterized in that** the filler auger conveyor (3, 3') is positioned above the uppermost positioned gasification body (7) and is fitted with at least one neck (36) for supplying water or steam to adjust the moisture of the material, with at least one neck (20) for supplying heat, and at least one neck (21) for releasing heat.

3. A device according to claim 1 or 2, **characterized in that** between the filler auger conveyor (3, 3') and the uppermost positioned gasification body (7) is a spacer (4, 4') containing a sensor (29) for measuring the moisture of the material and a neck (36) for supplying water or steam to adjust the moisture of the material.

4. A device according to claims 2 and 3, **characterized in that** the filling chamber (2) has a conical shape in its bottom part, and leading into the filling chamber (2) are the ends of two supply auger conveyors (3, 3'), separated inside the filling chamber (2) by a wedge-shaped partition (22), wherein towards the opposite ends of the filler auger conveyors (3, 3') there are connected spacers (4, 4') that lead into a common outlet neck (5) with a flange which is connected to the flange of the inlet neck (6) of the uppermost positioned gasification body (7).

5. A device according to at least one of claims 1 to 4, **characterized in that** it includes three gasification bodies (7, 7', 7'') positioned in horizontal rows one above the other, wherein in each gasification body (7, 7', 7'') there are arranged, in parallel in a horizontal plane, four gasification augers (9) separated by longitudinal partitions (13).

6. A device according to at least one of claims 1 to 5, **characterized in that** the gasification bodies (7, 7', 7'') are separated from each other horizontally by vertical supporting partitions (23), wherein the electric heaters (14) are removably positioned in the gaps between adjacent bodies (7, 7', 7'') and between the adjacent supporting partitions (23) on the upper base (10) of each gasification body (7, 7', 7''), and are

bounded by the side partitions (35).

7. A device according to at least one of claims 1 to 6, **characterized in that** the electric heater (14) comprises a set of heating elements (24) shaped like tubes, the axes of which run perpendicular to the axles of the gasification augers (9).
8. A device according to at least one of claims 1 to 7, **characterized in that** it is housed in a cabinet (25) with service openings (26) for replacing the heating elements.
9. A device according to at least one of claims 1 to 8, **characterized in that** the filling chamber (2) is fitted with two oppositely arranged necks (15) for the supply of exhaust gas (16), wherein the necks (15) are interconnected by distribution pipes (19), and a neck (18) for releasing exhaust gases (16) from the filling chamber (2) is positioned above the necks (15).
10. A device according to at least one of claims 1 to 9, **characterized in that** the front wall of the gasification body (7, 7', 7'') is fitted with a common connecting flange (27) for connecting a drive to the axles (28) of the gasification augers (9).

Patentansprüche

1. Die Vorrichtung (1) zur Gewinnung von gasförmigem Brennstoff aus Stoffen organischen und/oder anorganischen Ursprungs, umfasst eine Füllkammer (2), an die wenigstens eine Förderschnecke (3, 3') angeschlossen ist zur Zuführung von Material aus der Füllkammer (2) in den Reaktor, der wenigstens durch zwei beheizte Vergasungsschnecken (9) ausgestattet ist, die in wenigstens zwei horizontalen untereinander befindenden Reihen vorgesehen sind für einen serpentinenförmigen Durchgang des Materials in die Füllkammer (2) zum Austritt (8) des gasförmigen Brennstoffes, das durch Synthesegas aus der thermochemischen Reaktion der Vergasungsschnecken (9) gebildet ist, wobei der Austritt (8) an der niedrigsten gelegenen Vergasungsschnecke (9) vorgesehen ist, **dadurch gekennzeichnet, dass** jede horizontale Reihe der Vergasungsschnecken (9) mit einem Vergaserkörper (7, 7', 7'') gebildet ist, dessen Gehäuse einen geschlossenen ovalen Querschnitt aufweist, gebildet durch eine obere Basis (10), untere Basis (11) und gewölbte Seitenwände (12) mit einem Profil eines Rundbogens, wobei jeder Vergaserkörper (7, 7', 7'') wenigstens je zwei Vergasungsschnecken (9) aufweist, die nebeneinander angeordnet sind und gegenseitig teilweise getrennte Scheidewände (13) haben, hierbei geht es um Falze für die einzelnen Vergasungsschnecken (9), weiter verläuft parallel zur oberen Basis (10) und/oder zur

unteren Basis (11) jedes Vergaserkörper (7, 7', 7'') wenigstens ein elektrischer Heizkörper (14), und die Füllkammer (2) ist luftdicht geschlossen zur Vermeidung des Zutrittes von atmosphärischer Luft innerhalb der Materialbeschickung in die Füllkammer (2) ist wenigstens ein Stutzen (15) für die Zufuhr von Abgasen (16) aus der Verbrennung des Synthesegases entnommen am Austritt (8) der Vorrichtung (1) im Verbrennungsmotor (17) eingemündet, und die Füllkammer (2) ist wenigstens durch einen Stutzen (18) zur Ableitung der Abgase (16) aus der Füllkammer (2) vorgesehen.

2. Die Vorrichtung nach dem Anspruch 1, **dadurch gekennzeichnet, dass** die füllende Förderschnecke (3, 3') über dem höchstgelegenen Vergaserkörper (7) angeordnet ist und mit wenigstens einem Stutzen (36) zur Zufuhr von Wasser oder Wasserdampf zur Regelung der Materialfeuchtigkeit, wenigstens durch einen Stutzen (20) zur Wärmezufuhr, und wenigstens einem Stutzen (21) zur Wärmeabfuhr versehen ist.
3. Die Vorrichtung nach dem Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** zwischen der füllenden Förderschnecke (3, 3') und dem höchstgelegenen Vergaserkörper (7) ein Zwischenstück ist (4, 4'), in dem sich ein Sensor (29) der Materialfeuchtigkeit und Stutzen (36) der Wasserezufuhr oder Wasserdampfzufuhr zur Regelung der Materialfeuchtigkeit befindet.
4. Die Vorrichtung nach den Ansprüchen 2 und 3, **dadurch gekennzeichnet, dass** die Füllkammer (2) in ihrem unteren Teil kegelförmig ist, und ins Innere der Füllkammer (2) münden mit ihren Enden zwei zuführende Förderschnecken (3, 3'), getrennt im Inneren der Füllkammer (2) durch eine keilförmige Trennwand (22), wobei zu den gegenüberliegenden Enden der füllenden Förderschnecken (3, 3') Zwischenstücke (4, 4') angeschlossen sind, welche in den gemeinsamen Austrittsstutzen (5) mit einer Flansche münden, welche an die Flansche des Eintrittsstutzen (6) durch den höchstgelegenen Vergaserkörper (7) angeschlossen ist.
5. Die Vorrichtung nach wenigstens einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** sie drei Vergaserkörper (7, 7', 7'') umfasst, vorgesehen in horizontalen Reihen übereinander, wobei in jedem Vergaserkörper (7, 7', 7'') parallel in einer Horizontalebene vier Vergasungsschnecken (9) getrennt mit senkrechten Trennwänden (13) vorgesehen sind.
6. Die Vorrichtung nach wenigstens einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** die Vergaserkörper (7, 7', 7'') voneinander horizontal gegenseitig durch vertikale Tragtrennwände (23) ge-

trennt sind, wobei die elektrischen Heizkörper (14) herausnehmbar in den Abständen zwischen den angrenzenden Vergaserkörpern (7, 7', 7'') und angrenzenden Tragtrennwänden (23) auf der oberen Basis (10) jedes Vergaserkörpers (7, 7', 7'') gelagert sind, und durch seitliche Trennwände (35) begrenzt sind.

7. Die Vorrichtung nach wenigstens einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** der elektrische Heizkörper (14) durch ein System von Heizgliedern (24) gebildet ist und zwar in Form von Rohren, deren Achsen senkrecht zu den Achsen der Vergasungsschnecken (9) verlaufen.
8. Die Vorrichtung nach wenigstens einem der Ansprüche 1 bis 7, **dadurch gekennzeichnet, dass** sie ummantelt ist durch einen Schrank (25) mit Montageöffnungen (26) zum Austausch der Heizglieder.
9. Die Vorrichtung nach wenigstens einem der Ansprüche 1 bis 8, **dadurch gekennzeichnet, dass** die Füllkammer (2) mit zwei gegenüberliegend gestalteten Stützen (15) zur Zufuhr von Abgasen (16) versehen ist, wobei die Stützen (15) miteinander mit einer Rohrleitung (19) verbunden sind, und die Stützen (18) zur Ableitung der Abgase (16) aus der Füllkammer (2) über den Stützen (15) geordnet sind.
10. Die Vorrichtung nach wenigstens einem der Ansprüche 1 bis 9, **dadurch gekennzeichnet, dass** die Frontseite der Vergaserkörper (7, 7', 7'') mit einer gemeinsamen Anschlussflansche (27) zum Anschluss der Antriebe zu den Achsen (28) der Vergasungsschnecke (9) versehen ist.

Revendications

1. Dispositif (1) pour la production de combustible gazeux à partir de matériaux d'origine organique et/ou inorganique, comprenant une chambre de remplissage (2) qui est reliée au moins à un transporteur à vis d'approvisionnement (3, 3') pour l'arrivée du matériau de la chambre de remplissage (2) dans un réacteur qui comporte au moins deux vis sans fin de gazéification chauffées (9) arrangées dans au moins deux rangées horizontales superposées, pour un passage serpentin du matériau depuis la chambre de remplissage (2) jusqu'à une sortie (8) du combustible gazeux constitué par le gaz de synthèse d'une réaction thermochimique dans les vis sans fin de gazéification (9), où la sortie (8) est arrangée sur la vis sans fin de gazéification la plus basse (9), **caractérisé par le fait que** chaque rangée horizontale des vis sans fin de gazéification (9) est constituée par un corps de gazéification (7, 7', 7''), dont l'enveloppe est formée d'une section transversale ovale fermée par une base supérieure (10), une base in-

férieure (11) et des côtés latéraux convexes (12) chacun ayant un profil circulaire, où chaque corps de gazéification (7, 7', 7'') contient au moins deux vis sans fin de gazéification (9), arrangées côte à côte et partiellement séparées par des cloisons longitudinales (13) qui forment des moitiés-cannelures de forme pour chaque vis sans fin de gazéification (9), ensuite, parallèlement à la base supérieure (10) et/ou la base inférieure (11) de chaque corps de gazéification (7, 7', 7'') est aménagé au moins un appareil de chauffage électrique (14), et la chambre de remplissage (2) est hermétiquement close pour empêcher l'accès d'air atmosphérique pendant le remplissage de la chambre de remplissage (2) par le matériau, et au moins un col (15) mène dans la chambre de remplissage (2) pour amener les gaz d'échappement (16) venant de la combustion du gaz de synthèse rassemblé à la sortie (8) du dispositif (1) dans un moteur à combustion interne (17), et la chambre de remplissage (2) est équipée au moins d'un col (18) pour la libération des gaz d'échappement (16) de la chambre de remplissage (2).

2. Dispositif selon la revendication 1, **caractérisé par le fait que** le transporteur à vis d'approvisionnement (3, 3') est placé au-dessus du corps de gazéification le plus élevé (7) et il est équipé au moins d'un col (36) pour l'alimentation en eau ou en vapeur qui conditionnent l'humidité du matériau, avec au moins un col (20) pour l'alimentation en chaleur, et au moins d'un col (21) pour évacuer la chaleur.
3. Dispositif selon la revendication 1 ou 2, **caractérisé par le fait qu'** entre le transporteur à vis d'approvisionnement (3, 3') et le corps de gazéification placé le plus élevé (7), se trouve une pièce intermédiaire (4, 4') contenant une sonde (29) pour mesurer l'humidité du matériel et d'un col (36) pour l'alimentation en eau ou en vapeur qui conditionnent l'humidité du matériau.
4. Dispositif selon la revendication 2 et 3, **caractérisé par le fait que** la chambre de remplissage (2) a une forme conique dans sa partie inférieure, et que deux transporteurs à vis d'approvisionnement (3, 3') sont connectés à la chambre de remplissage (2) étant séparés à l'intérieur de la chambre de remplissage (2) par une cloison cunéiforme (22), alors que les extrémités opposées des transporteurs à vis d'approvisionnement (3, 3') sont connectées à des pièces intermédiaires (4, 4') qui débouchent dans un col de sortie commun (5) avec une bride qui est reliée à la bride du col d'admission (6) du corps de gazéification placé le plus élevé (7).
5. Dispositif selon au moins l'une des revendications 1 à 4, **caractérisé par le fait qu'** il inclut trois corps de gazéification (7, 7', 7'') placés dans des rangées

horizontales superposées, alors que dans chaque corps de gazéification (7, 7', 7'') sont installées, en parallèle dans un plan horizontal, quatre vis sans fin de gazéification (9) séparées par des cloisons longitudinales (13).

5

6. Dispositif selon au moins l'une des revendications n° 1 à 5, **caractérisé par le fait que** les corps de gazéification (7, 7', 7'') sont séparés entre eux horizontalement par des cloisons de soutien verticales (23), où les radiateurs électriques (14) sont démontables et placés dans les intervalles entre les corps adjacents (7, 7', 7'') est entre les cloisons de soutien voisines (23), sur la base supérieure (10) de chaque corps de gazéification (7, 7', 7'') et sont liés par des cloisons latérales (35). 10 15
7. Dispositif selon au moins l'une des revendications 1 à 6, **caractérisé par le fait que** le radiateur électrique (14) comporte un ensemble d'éléments de chauffe (24) en forme de tubes, dont les axes sont perpendiculaires aux axes des vis sans fin de gazéification (9). 20
8. Dispositif selon au moins l'une des revendications 1 à 7, **caractérisé en ce que** elle est logée dans un coffret (25) avec les ouvertures de service (26) pour remplacer les éléments de chauffe. 25
9. Dispositif selon au moins l'une des revendications 1 à 8, **caractérisé par le fait que** la chambre de remplissage (2) est équipée de deux cols opposés (15) pour l'approvisionnement en gaz d'échappement (16), où les cols (15) sont reliés ensemble par des tuyaux de distribution (19), et un col (18) pour évacuer les gaz d'échappement (16) de la chambre de remplissage (2) est placé au-dessus des cols (15). 30 35
10. Dispositif selon au moins l'une des revendications 1 à 9, **caractérisé par le fait que** la paroi frontale du corps de gazéification (7, 7', 7'') est équipée d'une bride de raccordement commune (27) pour relier la traction aux axes (28) des vis sans fin de gazéification (9). 40 45

45

50

55

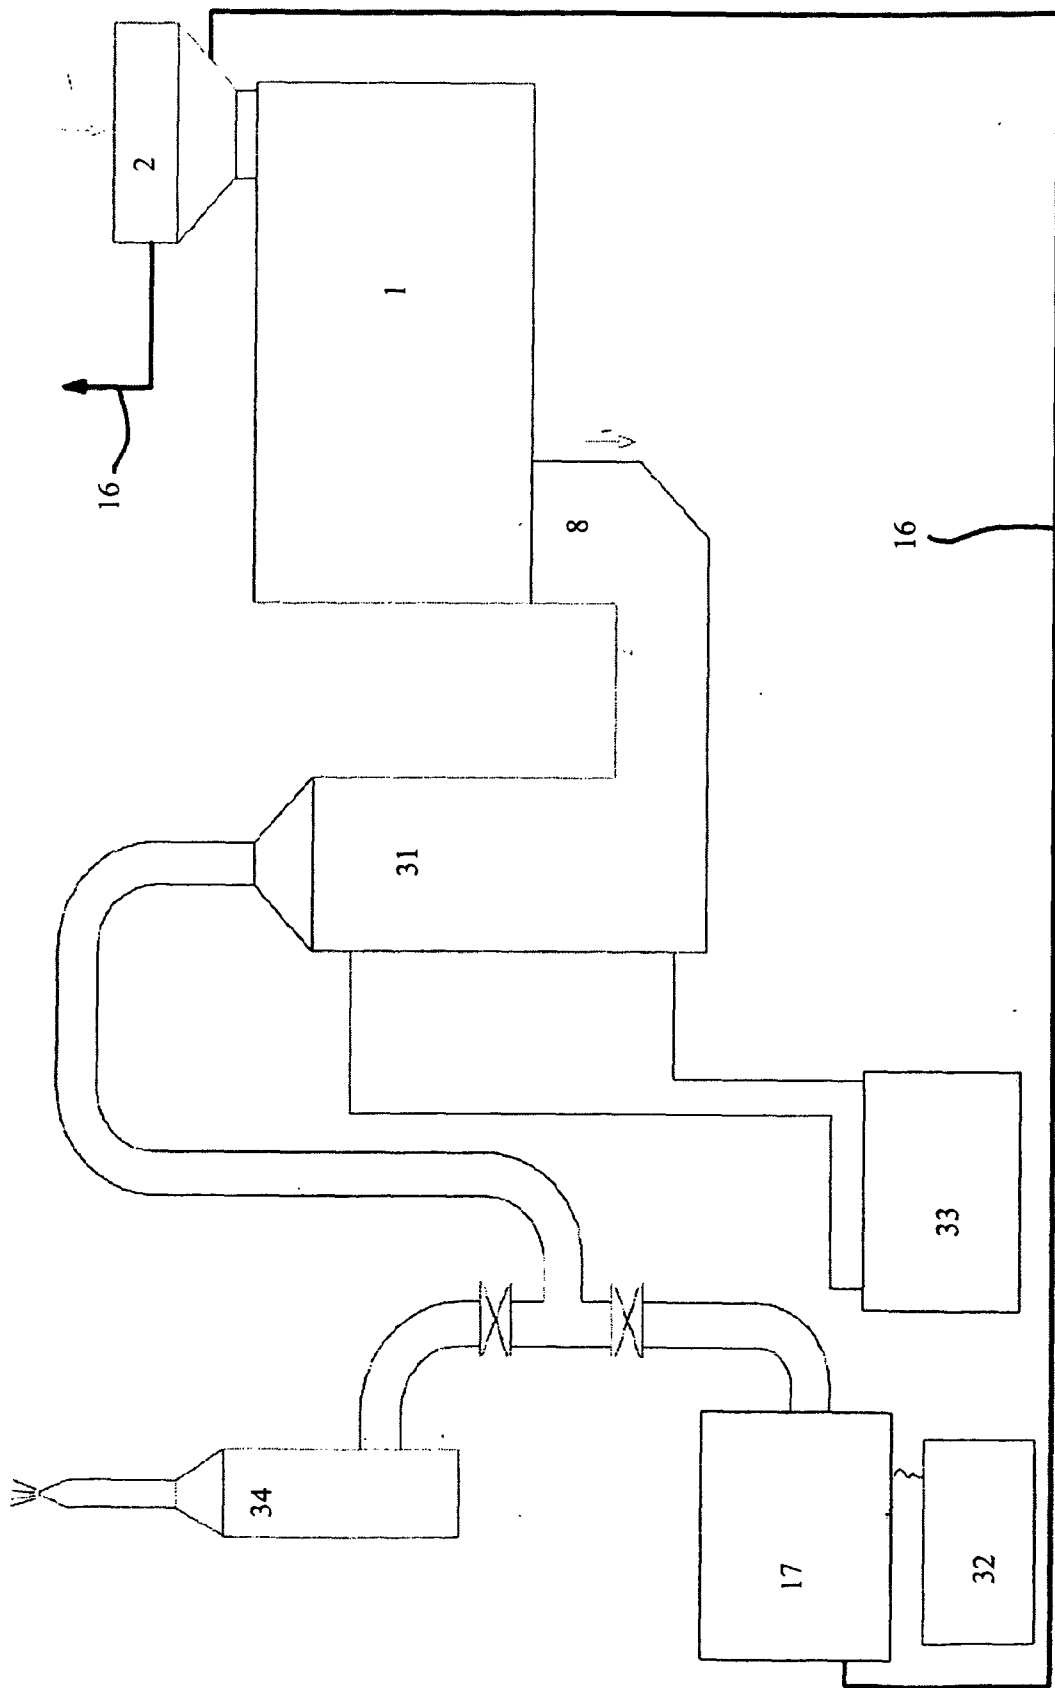


FIG. 1

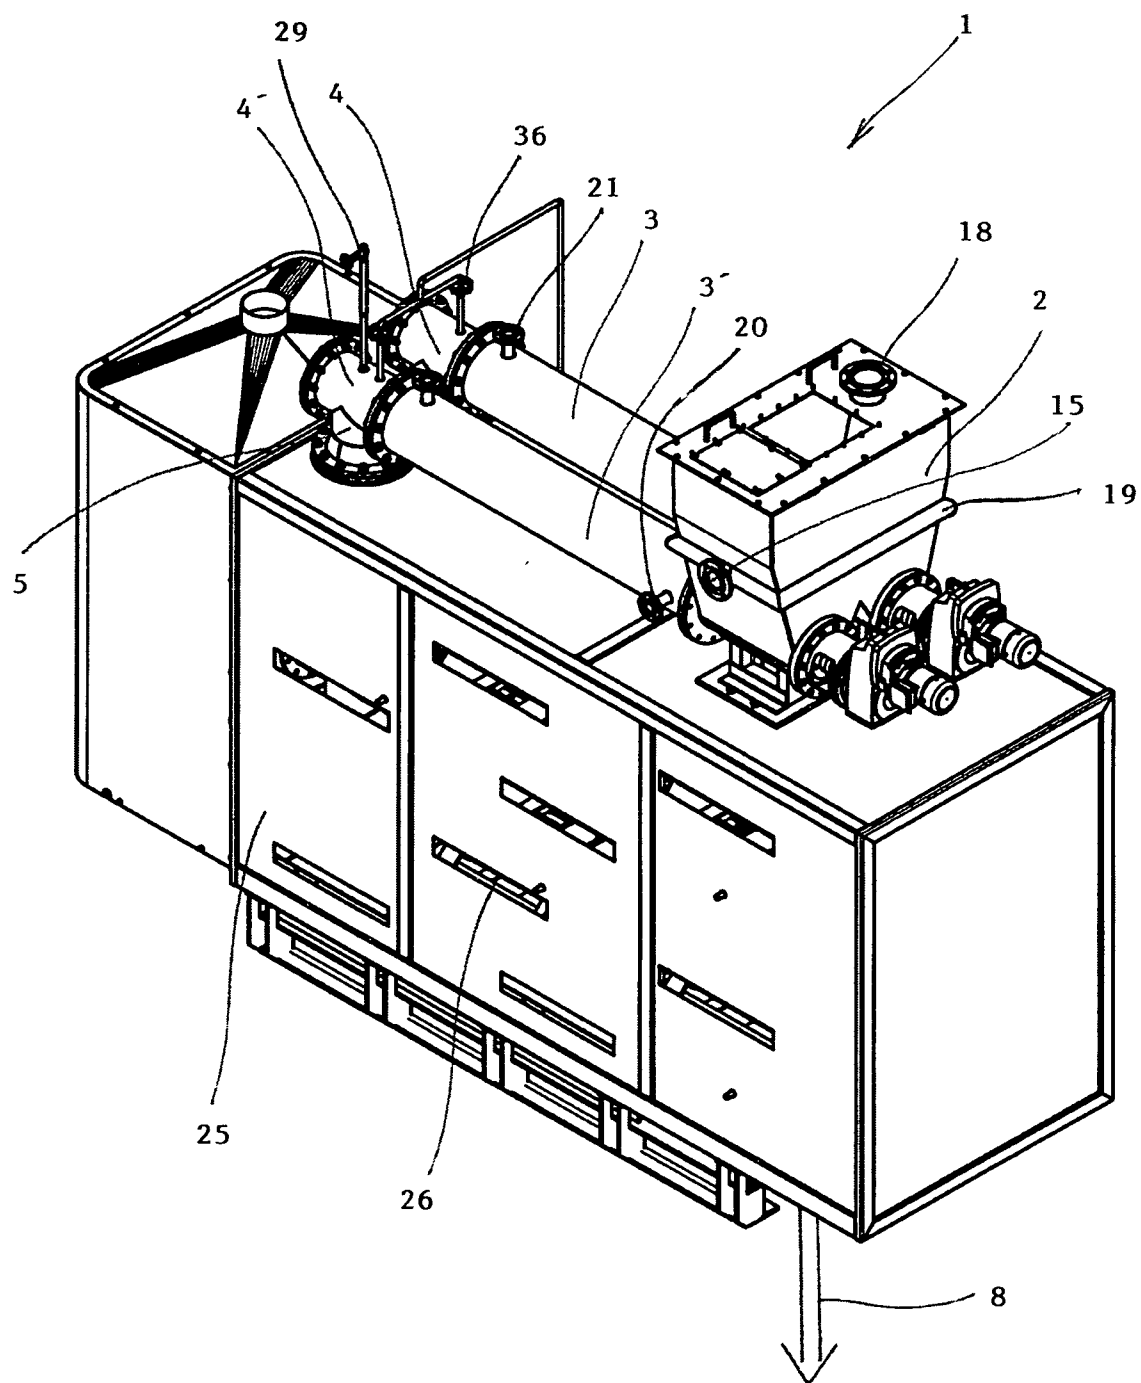


FIG. 2

FIG. 3

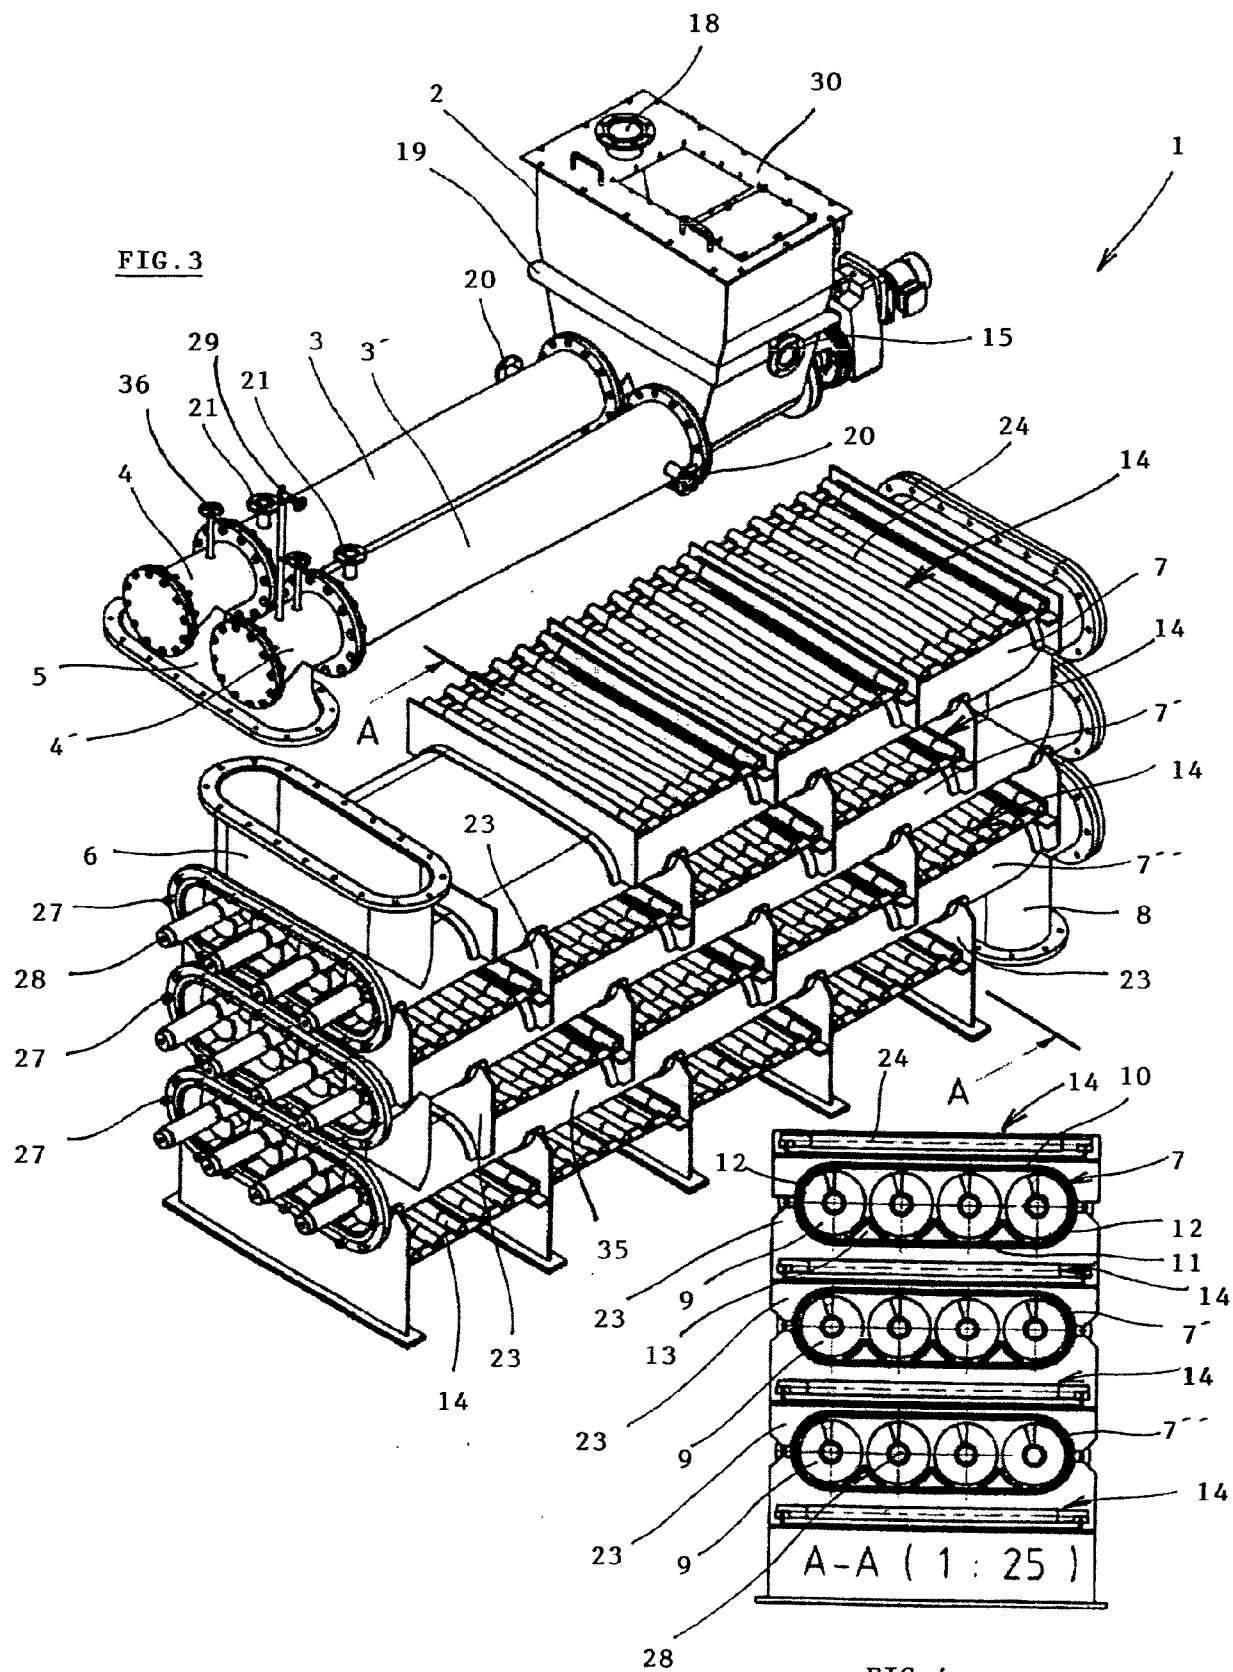


FIG. 4

FIG. 5


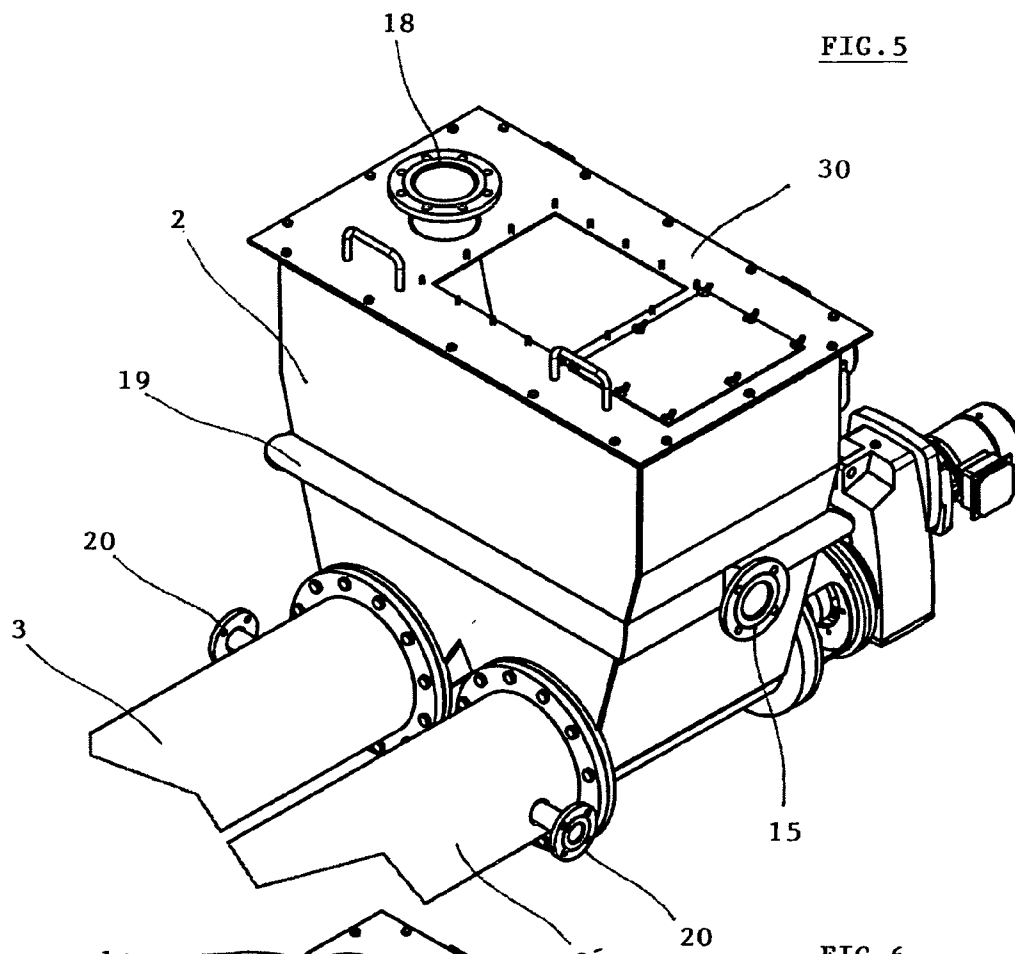


FIG. 6

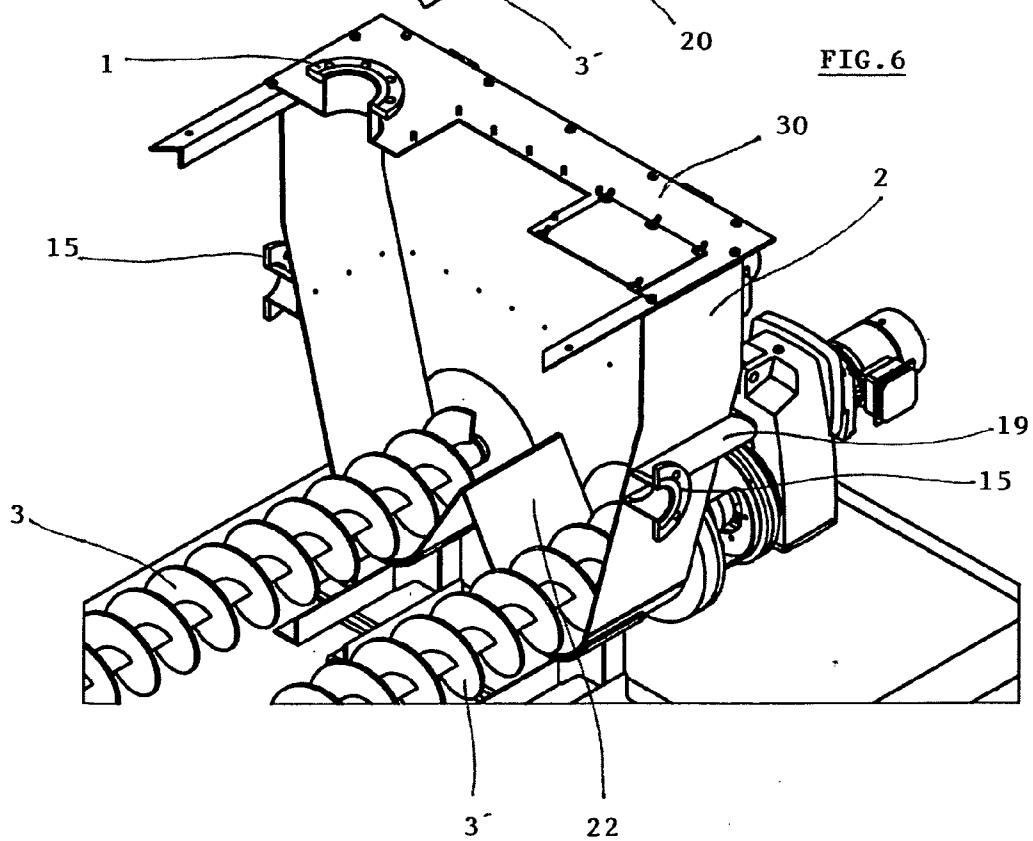

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2001289422 A [0004]
- EP 1865045 A [0005]
- US 20060075944 A1 [0006]

**BERENDEZÉS GÁZNEMŰ TÜZELŐANYAG SZERVES ÉS/VAGY SZERVETLEN EREDETŰ
ANYAGOKBÓL TÖRTÉNŐ ELŐÁLLÍTÁSÁRA**

Szabadalmi igénypontok

1. Eszköz (1) gáznemű tüzelőanyag szerves és/vagy szervetlen eredetű anyagokból történő
5 előállítására, amely tartalmaz töltőkamrát (2), mely anyagnak a töltőkamrából (2) reaktorba
táplálásához legalább egy betápláló szállítócsigával (3, 3') van összekapcsolva, amely reaktor
legalább két fűtött elgázosító csigát (9) tartalmaz, melyek anyagnak a töltőkamrából (2) az
elgázosító csigákban (9) termokémiai reakció révén keletkező szintézisgáz képezte tüzelő-
anyag-gáz kiömléséhez (8) való szerpentin járaton történő továbbításához egymás felett leg-
10 alább két vízszintes sorban vannak elrendezve, ahol a kiömlés (8) a legalacsonyabban elhe-
lyezett elgázosító csigán (9) van elhelyezve, **azzal jellemezve**, hogy az elgázosító csigák (9)
minden vízszintes sorát egy-egy elgázosító test (7, 7', 7'') képezi, melynek burkolata felső
alap (10), alsó alap (11) és köríves profilú konvex oldalfalak (12) képezte zárt ovális kereszt-
metszettel rendelkezik, ahol mindegyik elgázosító test (7, 7', 7'') legalább két elgázosító csi-
15 gát (9) tartalmaz, amelyek egymás mellett és az egyes elgázosító csigák (9) számára
félhornyokat képező hosszanti elválasztókkal (13) egymástól részben elválasztva vannak el-
rendezve, továbbá az egyes elgázosító testek (7, 7', 7'') felső alapjával (10) és/vagy alsó alap-
jával (11) párhuzamosan legalább egy villamos fűtőeszköz (14) van elrendezve, továbbá a
környezeti levegő beömlésének az anyag betöltése alatti megakadályozásához a töltőkamra
20 (2) hermetikusan le van zárva, továbbá az eszköz (1) kiömlésénél (8) gyűjtött szintézisgáz
belsőégésű motorbeli (17) égéséből származó füstgázok (16) betáplálásához a töltőkamrába
(2) legalább egy csőtorkolat (15) vezet, továbbá a töltőkamra (2) füstgázok (16) töltőkamrából
(2) való kivezetéséhez legalább egy csőtorkolattal (18) van felszerelve.

2. Az 1. igénypont szerinti eszköz, **azzal jellemezve**, hogy a töltő szállítócsiga (3, 3') a legfel-
25 ső elgázosító test (7) felett van elhelyezve, továbbá az anyag nedvességének szabályozásához
víz vagy gőz betáplálására szolgáló legalább egy csőtorkolattal (36), hő betáplálásához leg-
alább egy csőtorkolattal (20) és hő elvételéhez legalább egy csőtorkolattal (21) van felszerel-
ve.

3. Az 1. vagy a 2. igénypont szerinti eszköz, **azzal jellemezve**, hogy a töltő szállítócsiga (3,
30 3') és a legfelső elgázosító test (7) között az anyag nedvességének méréséhez szenzort (29),
valamint az anyag nedvességének állításához víz vagy gőz betáplálására szolgáló csőtorkola-
tot (36) tartalmazó távtartó (4, 4') van elrendezve.

4. A 2. és a 3. igénypont szerinti eszköz, **azzal jellemezve**, hogy a töltőkamra (2) az alsó részén kúpos, továbbá két betápláló szállítócsiga (3, 3') végei – a töltőkamrában (2) ék alakú elválasztóval (22) elválasztva – a töltőkamrába (2) vezetnek, ahol a töltő szállítócsigák (3, 3') átellenes végei felé összekapcsolt távtartók (4, 4') vannak, melyek karimával rendelkező közös kiömlő csőtorkolatba (5) vezetnek, ami a legfelül elhelyezett elgázosító test (7) beömlési csőtorkolata (6) karimájával van csatlakoztatva.
5. Az 1-4. igénypontok bármelyike szerinti eszköz, **azzal jellemezve**, hogy három elgázosító testet (7, 7', 7'') tartalmaz egymás felett vízszintes sorokban elhelyezve, ahol mindegyik elgázosító testben (7, 7', 7'') vízszintes síkban, egymással párhuzamosan, hosszanti elválasztókkal (13) elválasztott négy-négy elgázosító csiga (9) van elrendezve.
6. Az 1-5. igénypontok bármelyike szerinti eszköz, **azzal jellemezve**, hogy az elgázosító testeket (7, 7', 7'') függőleges támasztó elválasztók (23) választják el vízszintesen egymástól, ahol a villamos fűtőeszközök (14) a szomszédos testek (7, 7', 7'') közötti hézagokban és az egyes elgázosító testek (7, 7', 7'') felső alapján (10) lévő szomszédos támasztó elválasztók (23) között vannak eltávolíthatón elhelyezve, továbbá a villamos fűtőeszközöket (14) az oldalsó elválasztók (35) határolják.
7. Az 1-6. igénypontok bármelyike szerinti eszköz, **azzal jellemezve**, hogy a villamos fűtőeszköz (14) olyan cső alakú fűtőelemeket (24) tartalmaz, melyek tengelyei az elgázosító csigák (9) tengelyére merőlegesek.
8. Az 1-7. igénypontok bármelyike szerinti eszköz, **azzal jellemezve**, hogy a fűtőelemek cseréjéhez szerelőnyílásokkal (26) ellátott szekrényben (25) van elhelyezve.
9. Az 1-8. igénypontok bármelyike szerinti eszköz, **azzal jellemezve**, hogy a töltőkamra (2) füstgáz (16) betáplálására szolgáló két átellenesen elrendezett csőtorkolattal (15) van felszerelve, ahol a csőtorkolatok (15) elosztócsövekkel (19) vannak összekapcsolva, továbbá a csőtorkolatok (15) felett füstgázok (16) töltőkamrából (2) való kieresztésére szolgáló csőtorkolat (18) van elhelyezve.
10. Az 1-9. igénypontok bármelyike szerinti eszköz, **azzal jellemezve**, hogy az elgázosító test (7, 7', 7'') elülső fala meghajtás elgázosító csigák (9) tengelyeivel (28) való összekapcsolásához közös összekötő karimával (27) van felszerelve.