



(86) Date de dépôt PCT/PCT Filing Date: 2011/11/01  
(87) Date publication PCT/PCT Publication Date: 2012/06/21  
(85) Entrée phase nationale/National Entry: 2013/05/31  
(86) N° demande PCT/PCT Application No.: JP 2011/006116  
(87) N° publication PCT/PCT Publication No.: 2012/081162  
(30) Priorité/Priority: 2010/12/17 (JP2010-281743)

(51) Cl.Int./Int.Cl. *H04N 7/32* (2006.01)  
(71) Demandeur/Applicant:  
MITSUBISHI ELECTRIC CORPORATION, JP  
(72) Inventeurs/Inventors:  
SUGIMOTO, KAZUO, JP;  
SEKIGUCHI, SHUNICHI, JP  
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : DISPOSITIF DE CODAGE D'IMAGE, DISPOSITIF DE DECODAGE D'IMAGE, PROCEDE DE CODAGE D'IMAGE, PROCEDE DE DECODAGE D'IMAGE  
(54) Title: IMAGE CODING DEVICE, IMAGE DECODING DEVICE, IMAGE CODING METHOD, AND IMAGE DECODING METHOD

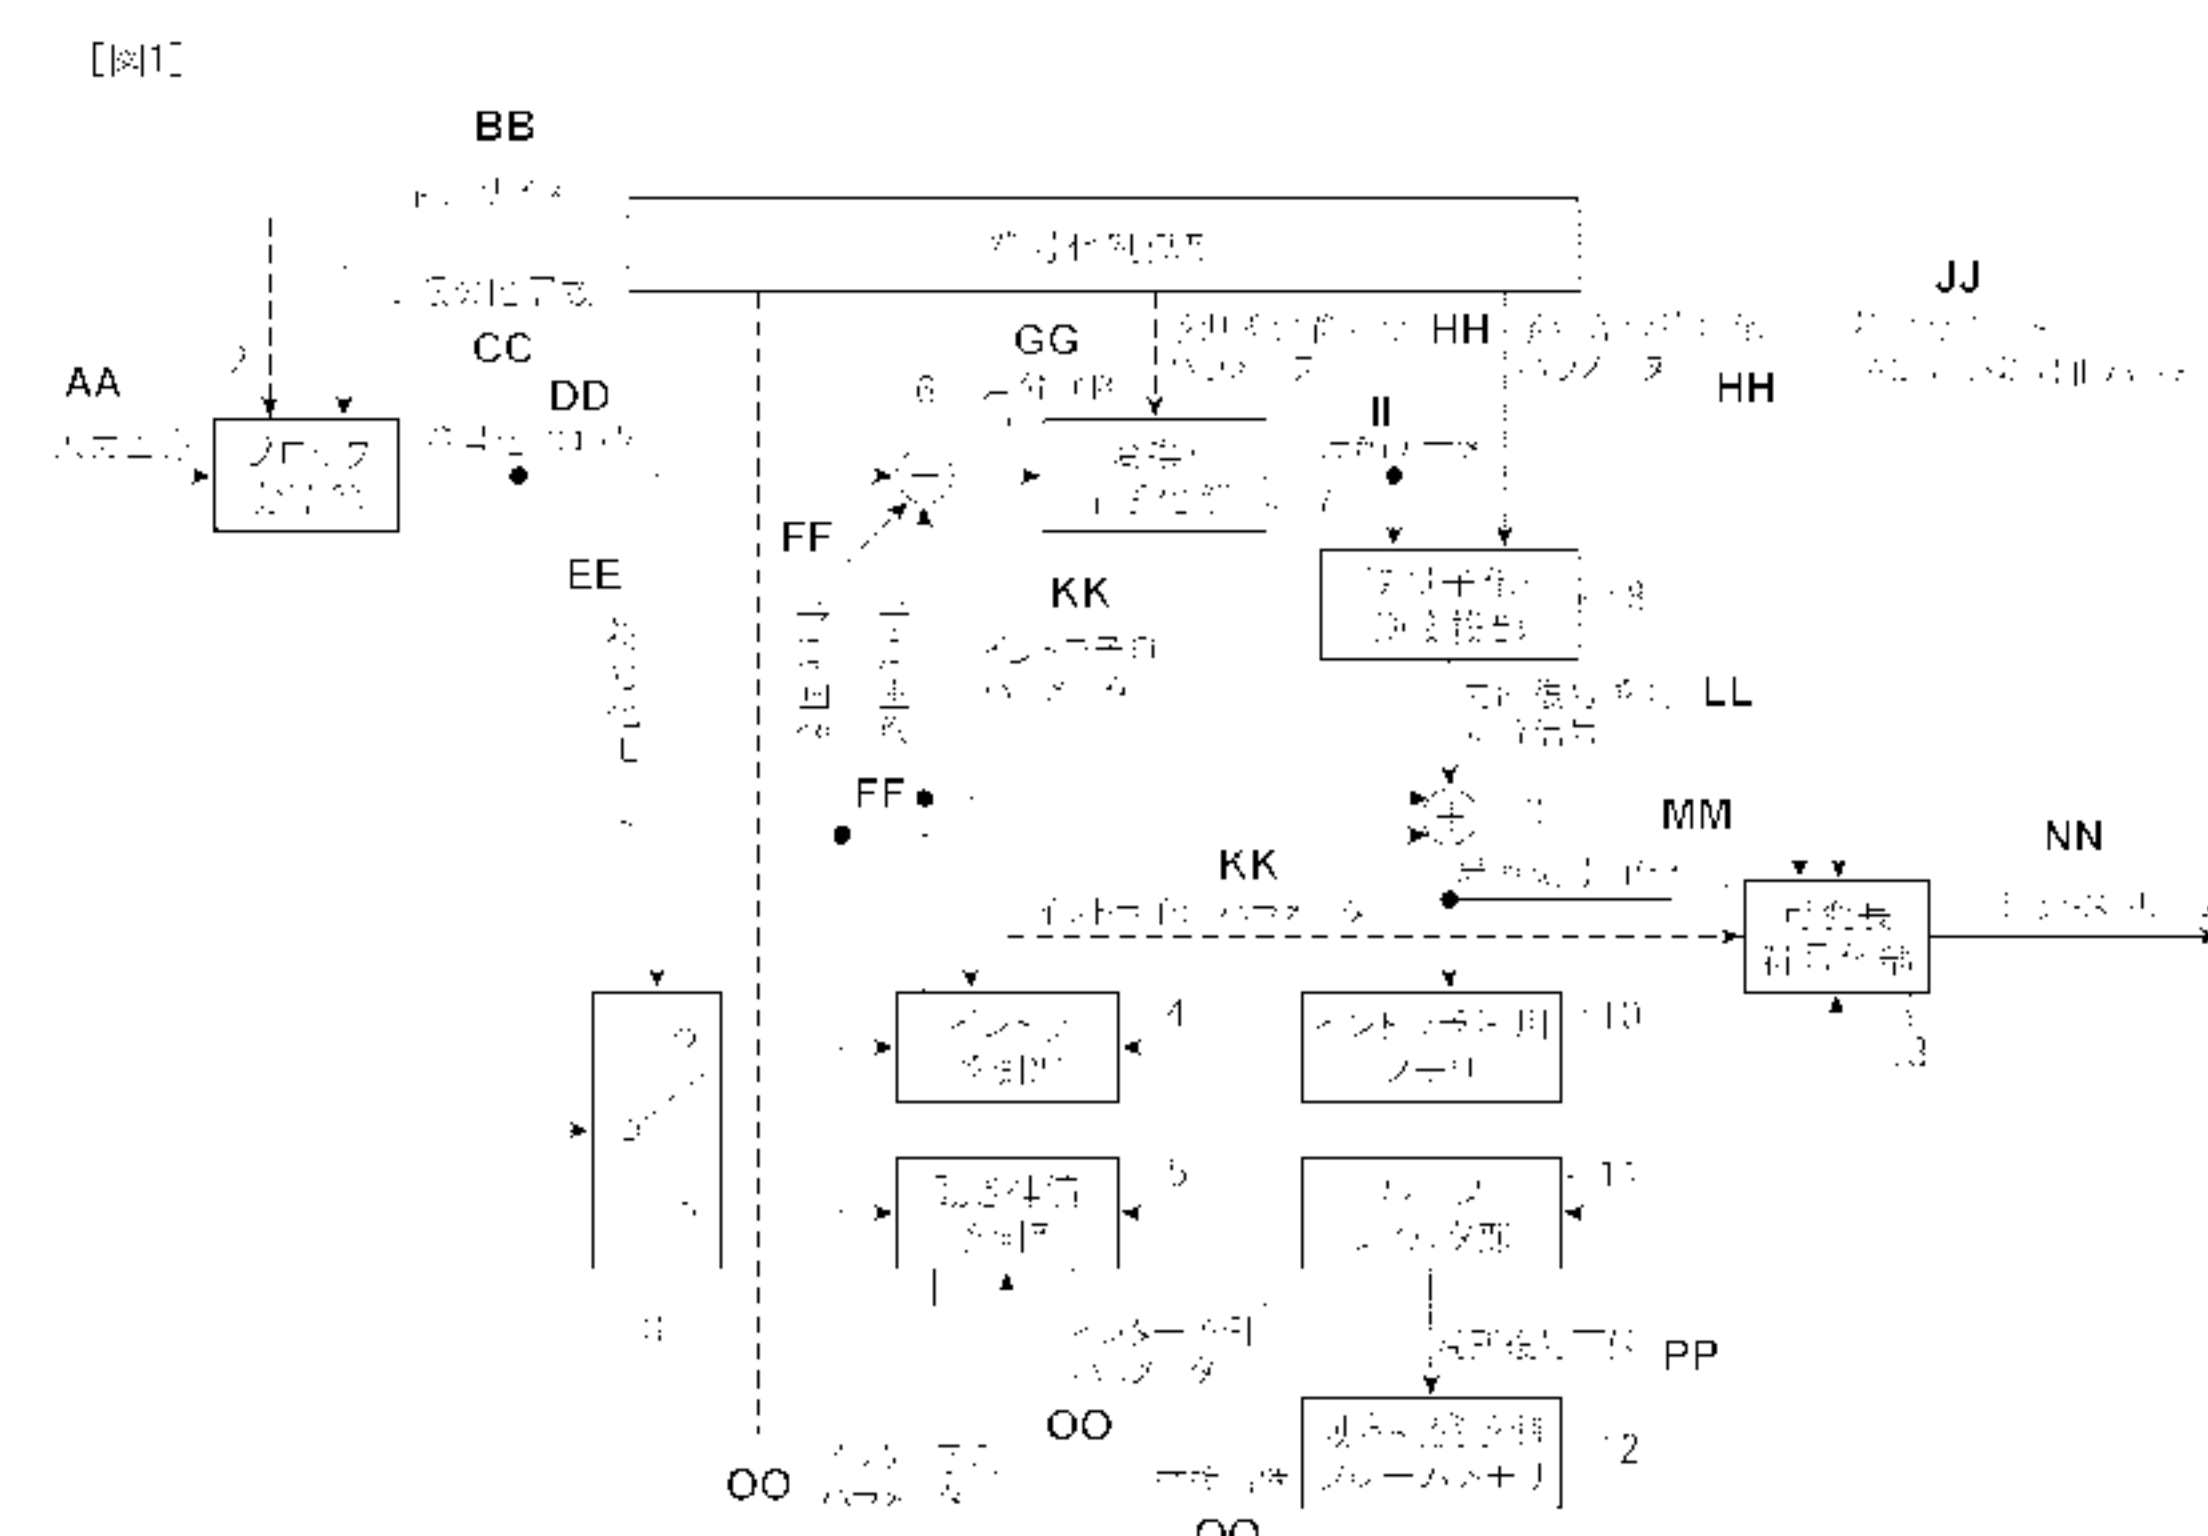


FIG. 1:  
1 Encoding control unit  
2 Block partitioning unit  
4 Intra-prediction unit  
5 Motion compensation prediction unit  
7 Transformation/quantization unit  
8 Inverse quantization/inverse transformation unit  
10 Memory for intra-prediction  
11 Loop filter unit  
12 Motion compensation prediction frame memory  
13 Variable-length encoding unit  
AA Input image  
BB Maximum Size  
CC Upper limit for number of levels  
DD Encoding block  
EE Encoding mode  
FF Predicted image  
GG Difference image  
HH Predicted difference encoding parameters  
II Compressed data  
JJ Encoding mode predicted difference encoding parameters  
KK Intra-prediction parameters  
LL Local decoded predicted difference signal  
MM Local decoded image signal  
NN Bit stream  
OO Inter-prediction parameters  
PP Local decoded image  
QQ Reference image

(57) **Abrégé/Abstract:**

An intra-prediction unit (4) of the present invention, if the encoding mode selected by an encoding control unit (1) is intra-prediction mode, generates a predicted image ( $P_i^n$ ) by performing intra-frame prediction processing using pixels adjacent to a partition  $P_i^n$  that has been partitioned by a block partitioning unit (2) or pixels adjacent to a partition  $P_i^{n-1}$  of an upper level of the partition  $P_i^n$ .



## ABSTRACT

When a coding mode selected by an encoding controlling  
part 1 is an intra prediction mode, an intra prediction part  
5 4 carries out an intra-frame prediction process using pixels  
adjacent to a partition  $P_i^n$  which is generated through a division  
by a block dividing part 2 or pixels adjacent to a higher layer  
partition  $P_i^{n-1}$  to which the partition  $P_i^n$  belongs to generate  
a prediction image ( $P_i^n$ ).

## SPECIFICATION

## TITLE OF THE INVENTION

MOVING IMAGE ENCODING DEVICE, MOVING IMAGE DECODING DEVICE,  
MOVING IMAGE CODING METHOD, AND MOVING IMAGE DECODING METHOD

## 5 FIELD OF THE INVENTION

[0001]

The present invention relates to a moving image encoding  
device for and a moving image encoding method of encoding a  
moving image with a high degree of efficiency, and a moving image  
10 decoding device for and a moving image decoding method of  
decoding an encoded moving image with a high degree of  
efficiency.

## BACKGROUND OF THE INVENTION

[0002]

15 For example, in an intra prediction mode for luminance  
in an AVC/H.264 (ISO/IEC 14496-10|ITU-T H.264) encoding method  
which is an international standard method, one prediction mode  
can be selected from among a plurality of prediction modes for  
each block (for example, refer to nonpatent reference 1). Fig.  
20 14 is an explanatory drawing showing intra prediction modes in  
the case of a 4×4 pixel block size for luminance. In the case  
of a 4×4 pixel block size for luminance, nine intra prediction  
modes (a mode 0, a mode 1, ..., and a mode 8) are defined.

[0003]

25 In the example shown in Fig. 14, each white circle shows  
a pixel in a block to be encoded. Each black circle shows a  
pixel that is used for prediction, and that exists in an  
already-encoded adjacent block. The mode 2 is the one in which  
an average prediction is carried out in such a way that each  
30 pixel in the block to be encoded is predicted by using the average

of adjacent pixels existing in the upper and left blocks. Each of the modes other than the mode 2 is the one in which a directional prediction is carried out. Particularly, the mode 0 is the one in which a vertical prediction is carried out in such a way that adjacent pixels in the upper block are repeatedly replicated to create plural rows of pixels along a vertical direction to generate a prediction image. For example, the mode 0 is selected when the block to be encoded is a vertically striped pattern. The mode 1 is the one in which a horizontal prediction is carried out in such a way that adjacent pixels in the left block are repeatedly replicated to create plural columns of pixels along a horizontal direction to generate a prediction image. Further, in each of the modes 3 to 8, interpolation pixels running in a predetermined direction (i.e., a direction shown by arrows) are generated by using the adjacent pixels in the upper block or the left block to generate a prediction image.

[0004]

The block size for luminance to which an intra prediction is applied can be selected from 4×4 pixels, 8×8 pixels, and 16×16 pixels. In the case in which the block size for luminance is 8×8 pixels, nine intra prediction modes are defined, like in the case in which the block size for luminance is 4×4 pixels. In contrast with this, in the case in which the block size for luminance is 16×16 pixels, four intra prediction modes which are called plane predictions are defined in addition to an average prediction mode, a vertical prediction mode, and a horizontal prediction mode. A plane prediction mode is a mode in which pixels created by carrying out an interpolation in a diagonal direction on the adjacent pixels in the upper block and the adjacent pixels in the left block are provided as

predicted values.

[0005]

Although in a directional prediction mode in the case in which the block size for luminance is 4×4 pixels or 8×8 pixels, because predicted values are generated along a direction predetermined according to the mode (e.g., a direction of 45 degrees), the prediction efficiency increases and the code amount can be reduced when the direction of a boundary (edge) of an object in the block matches the direction shown by the prediction mode, the prediction efficiency decreases when the direction of an edge of an object in the block does not match the direction shown by the prediction mode. In contrast with this, because an increase in the number of selectable directional prediction modes causes an increase in the probability that the direction of an edge matches the direction shown by a prediction mode, it can be assumed that the prediction efficiency increases.

Related art document

Nonpatent reference

20 [0006]

Nonpatent reference 1: MPEG-4 AVC (ISO/IEC 14496-10)/H.ITU-T 264 standards

SUMMARY OF THE INVENTION

PROBLEMS TO BE SOLVED BY THE INVENTION

25 [0007]

Because the conventional moving image encoding device is constructed as above, an increase in the number of selectable directional prediction modes increases the probability that the direction of an edge matches the direction shown by a prediction mode, and hence the prediction efficiency can be improved. A

problem is, however, that because the number of choices of similar prediction images increases even if the number of selectable directional predictions is increased, an improvement in the encoding efficiency commensurate with an increase in the amount of computation which is caused by the increase in the number of selectable directional predictions is not provided, and the increase in the number of selectable directional prediction has a limited contribution to improving the encoding efficiency.

10 [0008]

The present invention is made in order to solve the above-mentioned problem, and it is therefore an object of the present invention to provide a moving image encoding device and a moving image encoding method capable of increasing the degree of improvement in the encoding efficiency which is caused by an increase in the number of directional prediction modes with a small amount of computation and a small code amount. It is another object of the present invention to provide a moving image decoding device and a moving image decoding method capable of correctly decoding coded data in which an improvement in the encoding efficiency is provided to acquire a moving image.

20 MEANS FOR SOLVING THE PROBLEM

[0009]

In accordance with the present invention, there is provided a moving image encoding device in which when a coding mode selected by an encoding controlling unit is an intra prediction mode, a prediction image generating unit carries out an intra-frame prediction process using pixels adjacent to each coding block which is generated through a division by a block dividing unit or pixels adjacent to a higher layer coding block

25  
30

to which each coding block belongs to generate a prediction image. Further, when the coding mode selected by the encoding controlling unit is an intra prediction mode, a variable length encoding unit encodes a flag indicating whether an intra prediction direction of a coding block adjacent to the coding block which is a target to be processed and which is generated through the division by the block dividing unit matches that of the target coding block, and, when the flag indicates that the intra prediction direction of an adjacent coding block matches that of the coding block, also encodes information showing whether which one of adjacent coding blocks has an intra prediction direction matching that of the coding block.

#### ADVANTAGES OF THE INVENTION

[0010]

Because the moving image encoding device in accordance with the present invention is constructed in such a way that when the coding mode selected by the encoding controlling unit is an intra prediction mode, the prediction image generating unit carries out an intra-frame prediction process using pixels adjacent to each coding block which is generated through the division by the block dividing unit or pixels adjacent to a higher layer coding block to which each coding block belongs to generate a prediction image, there is provided an advantage of being able to increase the degree of improvement in the encoding efficiency which is caused by an increase in the number of directional predictions with a small amount of computation and a small code amount.

#### BRIEF DESCRIPTION OF THE FIGURES

[0011]

[Fig. 1] Fig. 1 is a block diagram showing a moving image encoding

device in accordance with Embodiment 1 of the present invention;  
[Fig. 2] Fig. 2 is a flow chart showing processing carried out  
by the moving image encoding device in accordance with  
Embodiment 1 of the present invention;

5 [Fig. 3] Fig. 3 is an explanatory drawing showing a state in  
which each coding block having a maximum size is hierarchically  
divided into a plurality of coding blocks;

[Fig. 4] Fig. 4(a) is an explanatory drawing showing a  
distribution of partitions into which a block to encoded is  
10 divided, and Fig. 4(b) is an explanatory drawing showing a state  
in which a coding mode  $m(B^n)$  is assigned to each of the partitions  
after a hierarchical layer division is performed by using a  
quadtree graph;

[Fig. 5] Fig. 5 is an explanatory drawing showing an example  
15 of an intra prediction parameter (intra prediction mode) which  
can be selected for each partition  $P_i^n$  belonging to a coding  
block  $B^n$ ;

[Fig. 6] Fig. 6 is an explanatory drawing showing an example  
of pixels which are used when generating a predicted value of  
20 each pixel in a partition  $P_i^n$  in the case of  $l_i^n=m_i^n=4$ ;

[Fig. 7] Fig. 7 is an explanatory drawing showing a relationship  
between a partition  $P_i^n$  and a higher layer partition  $P_i^{n-1}$ ;

[Fig. 8] Fig. 8 is an explanatory drawing showing a partition  
 $P_i^n$  belonging to a coding block  $B^n$ ;

25 [Fig. 9] Fig. 9 is an explanatory drawing showing an example  
of an intra prediction parameter (intra prediction mode) which  
can be selected for each partition  $P_i^n$  belonging to a coding  
block  $B^n$ ;

[Fig. 10] Fig. 10 is a block diagram showing a moving image  
30 decoding device in accordance with Embodiment 1 of the present

invention;

[Fig. 11] Fig. 11 is a flow chart showing processing carried out by the moving image decoding device in accordance with Embodiment 1 of the present invention;

5 [Fig. 12] Fig. 12 is an explanatory drawing showing coded data of each partition;

[Fig. 13] Fig. 13 is an explanatory drawing showing an adjacent partition; and

[Fig. 14] Fig. 14 is an explanatory drawing showing intra  
10 prediction modes in the case of a 4×4 pixel block size for luminance.

#### EMBODIMENTS OF THE INVENTION

[0012]

Hereafter, in order to explain this invention in greater  
15 detail, the preferred embodiments of the present invention will be described with reference to the accompanying drawings. Embodiment 1.

Fig. 1 is a block diagram showing a moving image encoding device in accordance with Embodiment 1 of the present invention.  
20 Referring to Fig. 1, an encoding controlling part 1 carries out a process of determining a maximum size of each of coding blocks which is a unit to be processed at a time when an intra prediction process (intra-frame prediction process) or a motion-compensated prediction process (inter-frame prediction  
25 process) is carried out, and also determining an upper limit on the number of hierarchical layers in a hierarchy in which each of the coding blocks having the maximum size is hierarchically divided into blocks. The encoding controlling part 1 also carries out a process of selecting a coding mode  
30 suitable for each of the coding blocks into which each coding

block having the maximum size is divided hierarchically from one or more available coding modes (one or more intra coding modes and one or more inter coding modes). The encoding controlling part 1 further carries out a process of determining  
5 a quantization parameter and a transformation block size which are used when a difference image is compressed for each coding block, and also determining an intra prediction parameter or an inter prediction parameter which is used when a prediction process is carried out for each coding block. The quantization  
10 parameter and the transformation block size are included in prediction difference encoding parameters, and these prediction error encoding parameters are outputted to a transformation/quantization part 7, an inverse quantization/inverse transformation part 8, a variable length  
15 encoding part 13, and so on. The encoding controlling part 1 constructs an encoding controlling unit.

[0013]

A block dividing part 2 carries out a process of, when receiving a video signal showing an inputted image (current  
20 picture), dividing the inputted image into coding blocks each having the maximum size determined by the encoding controlling part 1, and also dividing each of the coding blocks into blocks hierarchically until the number of hierarchical layers reaches the upper limit on the number of hierarchical layers which is  
25 determined by the encoding controlling part 1. The block dividing part 2 constructs a block dividing unit. A selection switch 3 carries out a process of, when the coding mode selected by the encoding controlling part 1 for a coding block, which is generated through the division by the block dividing part  
30 2, is an intra coding mode, outputting the coding block to an

intra prediction part 4, and, when the coding mode selected by the encoding controlling part 1 for the coding block, which is generated through the division by the block dividing part 2, is an inter coding mode, outputting the coding block to a motion-compensated prediction part 5.

[0014]

The intra prediction part 4 carries out a process of, when receiving the coding block, which is generated through the division by the block dividing part 2, from the selection switch 3, carrying out an intra prediction process based on the intra prediction parameter outputted thereto from the encoding controlling part on the coding block to generate a prediction image by using already-encoded pixels which are stored in a memory 10 for intra prediction and which are adjacent to the coding block or already-encoded pixels which are adjacent to a higher layer coding block to which the coding block belongs. The motion-compensated prediction part 5 carries out a process of, when an inter coding mode is selected by the encoding controlling part 1 as a coding mode corresponding to the coding block, which is generated through the division by the block dividing part 2, performing a motion-compensated prediction process on the coding block to generate a prediction image by using one or more frames of reference images stored in a motion-compensated prediction frame memory 12 on the basis of the inter prediction parameter outputted thereto from the encoding controlling part 1. A prediction image generating unit is comprised of the selection switch 3, the intra prediction part 4, and the motion-compensated prediction part 5.

[0015]

A subtracting part 6 carries out a process of subtracting the prediction image generated by the intra prediction part 4 or the motion-compensated prediction part 5 from the coding block, which is generated through the division by the block dividing part 2, to generate a difference image (= the coding block - the prediction image). The subtracting part 6 constructs a difference image generating unit. The transformation/quantization part 7 carries out a process of performing an orthogonal transformation process (e.g., a DCT (discrete cosine transform) or an orthogonal transformation process, such as a KL transform, in which bases are designed for a specific learning sequence in advance) on the difference image generated by the subtracting part 6 in units of a block having a transformation block size included in the prediction difference encoding parameters outputted from the encoding controlling part 1, and also quantizing the transform coefficients of the difference image by using a quantization parameter included in the prediction difference encoding parameters to output the transform coefficients quantized thereby as compressed data of the difference image. The transformation/quantization part 7 constructs an image compression unit.

[0016]

The inverse quantization/inverse transformation part 8 carries out a process of inverse-quantizing the compressed data outputted thereto from the transformation/quantization part 7 by using the quantization parameter included in the prediction difference encoding parameters outputted from the encoding controlling part 1, and performing an inverse transformation process (e.g., an inverse DCT (inverse discrete cosine

transform) or an inverse transformation process such as an inverse KL transform) on the compressed data inverse-quantized thereby to output the compressed data on which the inverse quantization/inverse transformation part has carried out the  
5 inverse transformation process as a local decoded prediction difference signal.

[0017]

An adding part 9 carries out a process of adding the local decoded prediction difference signal outputted thereto from the  
10 inverse quantization/inverse transformation part 8 and the prediction signal showing the prediction image generated by the intra prediction part 4 or the motion-compensated prediction part 5 to generate a local decoded image signal showing a local decoded image. The memory 10 for intra prediction is a  
15 recording medium, such as a RAM, for storing the local decoded image shown by the local decoded image signal generated by the adding part 9 as an image which the intra prediction part 4 will use when performing the intra prediction process the next time.

[0018]

20 A loop filter part 11 carries out a process of compensating for an encoding distortion included in the local decoded image signal generated by the adding part 9, and outputting the local decoded image shown by the local decoded image signal on which the loop filter part has carried out the encoding distortion  
25 compensation to the motion-compensated prediction frame memory 12 as a reference image. The motion-compensated prediction frame memory 12 is a recording medium, such as a RAM, for storing the local decoded image on which the loop filter part 11 has carried out the filtering process as a reference image which  
30 the motion-compensated prediction part 5 will use when

performing the motion-compensated prediction process the next time.

[0019]

The variable length encoding part 13 carries out a process  
5 of variable-length-encoding the compressed data outputted  
thereto from the transformation/quantization part 7, the coding  
mode and the prediction difference encoding parameters which  
are outputted thereto from the encoding controlling part 1, and  
the intra prediction parameter outputted thereto from the intra  
10 prediction part 4 or the inter prediction parameter outputted  
thereto from the motion-compensated prediction part 5 to  
generate a bitstream into which coded data of the compressed  
data, coded data of the coding mode, coded data of the prediction  
difference encoding parameters, and coded data of the intra  
15 prediction parameter or the inter prediction parameter are  
multiplexed. The variable length encoding part 13 constructs  
a variable length encoding unit.

[0020]

In the example of Fig. 1, the encoding controlling part  
20 1, the block dividing part 2, the selection switch 3, the intra  
prediction part 4, the motion-compensated prediction part 5,  
the subtracting part 6, the transformation/quantization part  
7, the inverse quantization/inverse transformation part 8, the  
adding part 9, the loop filter part 11, and the variable length  
25 encoding part 13, which are the components of the moving image  
encoding device, can consist of pieces of hardware for exclusive  
use (e.g., integrated circuits in each of which a CPU is mounted,  
one chip microcomputers, or the like), respectively. As an  
alternative, the moving image encoding device can consist of  
30 a computer, and part or all of a program in which the processes

carried out by the encoding controlling part 1, the block  
dividing part 2, the selection switch 3, the intra prediction  
part 4, the motion-compensated prediction part 5, the  
subtracting part 6, the transformation/quantization part 7, the  
5 inverse quantization/inverse transformation part 8, the adding  
part 9, the loop filter part 11, and the variable length encoding  
part 13 are described can be stored in a memory of the computer  
and the CPU of the computer can be made to execute the program  
stored in the memory. Fig. 2 is a flow chart showing the  
10 processing carried out by the moving image encoding device in  
accordance with Embodiment 1 of the present invention.

[0021]

Fig. 10 is a block diagram showing a moving image decoding  
device in accordance with Embodiment 1 of the present invention.  
15 Referring to Fig. 10, a variable length decoding part 21 carries  
out a process of specifying the maximum size of each coding block  
which is a unit to be processed at a time when an intra prediction  
process or a motion-compensated prediction process is carried  
out, and the number of hierarchical layers in the hierarchy in  
20 which each of the coding blocks having the maximum size is  
hierarchically divided into blocks to specify the coded data  
associated with each of the coding blocks having the maximum  
size and the coded data associated with each of the coding blocks  
into which each of the coding blocks having the maximum size  
25 is divided hierarchically from the coded data multiplexed into  
the bitstream, and variable-length-decoding the coded data  
associated with each of the coding blocks to acquire the  
compressed data, the coding mode, the prediction difference  
encoding parameters, and the intra prediction parameter or the  
30 inter prediction parameter, which are associated with each of

the coding blocks, and outputting the compressed data and the prediction difference encoding parameters to an inverse quantization/inverse transformation part 25, and also outputting the coding mode, and the intra prediction parameter  
5 or the inter prediction parameter to a selection switch 22. The variable length decoding part 21 constructs a variable length decoding unit.

[0022]

The selection switch 22 carries out a process of, when  
10 the coding mode associated with the coding block, which is outputted from the variable length decoding part 21, is an intra coding mode, outputting the intra prediction parameter outputted thereto from the variable length decoding part 21 to an intra prediction part 23, and, when the coding mode is an  
15 inter coding mode, outputting the inter prediction parameter outputted thereto from the variable length decoding part 21 to a motion compensation part 24.

[0023]

The intra prediction part 23 carries out a process of  
20 performing an intra-frame prediction process on the coding block to generate a prediction image by using either already-decoded pixels which are stored in a memory 27 for intra prediction and which are adjacent to the coding block or already-decoded pixels which are adjacent to a higher layer  
25 coding block to which the coding block belongs on the basis of the intra prediction parameter outputted thereto from the selection switch 22. The motion compensation part 24 carries out a process of performing a motion-compensated prediction process on the coding block to generate a prediction image by  
30 using one or more frames of reference images stored in a

motion-compensated prediction frame memory 29 on the basis of the inter prediction parameter outputted thereto from the selection switch 22. A prediction image generating unit is comprised of the selection switch 22, the intra prediction part 23, and the motion compensation part 24.

[0024]

The inverse quantization/inverse transformation part 25 carries out a process of inverse-quantizing the compressed data associated with the coding block, which are outputted thereto from the variable length decoding part 21, by using the quantization parameter included in the prediction difference encoding parameters outputted thereto from the variable length decoding part 21, and performing an inverse transformation process (e.g., an inverse DCT (inverse discrete cosine transform) or an inverse transformation process such as an inverse KL transform) on the compressed data inverse-quantized thereby in units of a block having the transformation block size included in the prediction difference encoding parameters, and outputting the compressed data on which the inverse quantization/inverse transformation part has carried out the inverse transformation process as a decoded prediction difference signal (signal showing a pre-compressed difference image). The inverse quantization/inverse transformation part 26 constructs a difference image generating unit.

[0025]

An adding part 26 carries out a process of adding the decoded prediction difference signal outputted thereto from the inverse quantization/inverse transformation part 25 and the prediction signal showing the prediction image generated by the intra prediction part 23 or the motion compensation part 24 to

generate a decoded image signal showing a decoded image. The adding part 26 constructs a decoded image generating unit. The memory 27 for intra prediction is a recording medium, such as a RAM, for storing the decoded image shown by the decoded image  
5 signal generated by the adding part 26 as an image which the intra prediction part 23 will use when performing the intra prediction process the next time.

[0026]

A loop filter part 58 carries out a process of compensating  
10 for an encoding distortion included in the decoded image signal generated by the adding part 26, and outputting the decoded image shown by the decoded image signal on which the loop filter part has carried out the encoding distortion compensation to the motion-compensated prediction frame memory 29 as a  
15 reference image and also outputting the decoded image to outside the moving image decoding device as a reproduced image. The motion-compensated prediction frame memory 29 is a recording medium, such as a RAM, for storing the decoded image on which the loop filter part 28 has carried out the filtering process  
20 as a reference image which the motion compensation part 24 will use when performing the motion-compensated prediction process the next time.

[0027]

In the example of Fig. 10, the variable length decoding  
25 part 21, the selection switch 22, the intra prediction part 23, the motion compensation part 24, the inverse quantization/inverse transformation part 25, the adding part 26, and the loop filter part 28, which are the components of the moving image decoding device, can consist of pieces of  
30 hardware for exclusive use (e.g., integrated circuits in each

of which a CPU is mounted, one chip microcomputers, or the like), respectively. As an alternative, the moving image decoding device can consist of a computer, and part or all of a program in which the processes carried out by the variable length  
5 decoding part 21, the selection switch 22, the intra prediction part 23, the motion compensation part 24, the inverse quantization/inverse transformation part 25, the adding part 26, and the loop filter part 28 are described can be stored in a memory of the computer and the CPU of the computer can be made  
10 to execute the program stored in the memory. Fig. 11 is a flow chart showing the processing carried out by the moving image decoding device in accordance with Embodiment 1 of the present invention.

[0028]

15 The moving image encoding device in accordance with this Embodiment 1 is characterized in that the moving image encoding device adapts itself to a local change of a video signal in space and time directions to divide the video signal into regions of various sizes, and carries out intra-frame and inter-frame  
20 adaptive encoding. In general, a video signal has a characteristic of its complexity varying locally in space and time. There can be a case in which a pattern having a uniform signal characteristic in a relatively large image area, such as a sky image or a wall image, or a pattern having a complicated  
25 texture pattern in a small image area, such as a person image or a picture including a fine texture, also coexists on a certain video frame from the viewpoint of space.

[0029]

Also from the viewpoint of time, a relatively large image  
30 area, such as a sky image or a wall image, has a small local

change in a time direction in its pattern, while an image of a moving person or object has a larger temporal change because its outline has a movement of a rigid body and a movement of a non-rigid body with respect to time. Although a process of  
5 generating a prediction difference signal having small signal power and small entropy by using temporal and spatial prediction, thereby reducing the whole code amount, is carried out in the encoding process, the code amount of parameters used for the prediction can be reduced as long as the parameters can  
10 be applied uniformly to as large an image signal region as possible. On the other hand, because the amount of errors occurring in the prediction increases when the same prediction parameter is applied to a large image area in an image signal pattern having a large change in time and space, the code amount  
15 of the prediction difference signal cannot be reduced. Therefore, it is desirable to reduce the size of a region which is subjected to the prediction process when performing the prediction process on an image area having a large change in time and space, thereby reducing the electric power and entropy  
20 of the prediction difference signal, even though the data volume of the prediction parameter which is used for the prediction process is increased. In order to carry out an encoding process which is adapted for such the typical characteristics of a video signal, the moving image encoding device in accordance with this  
25 Embodiment 1 adopts a structure of hierarchically dividing each region having a predetermined maximum block size of the video signal into blocks, and adapting the prediction process and the encoding process of encoding a prediction difference for each of the blocks into which each region is divided.

30 [0030]

A video signal which is to be processed by the moving image encoding device in accordance with this Embodiment 1 can be an arbitrary video signal in which each video frame consists of a series of digital samples (pixels) in two dimensions, horizontal and vertical, such as a YUV signal which consists of a luminance signal and two color difference signals, a color video image signal in arbitrary color space, such as an RGB signal, outputted from a digital image sensor, a monochrome image signal, or an infrared image signal. The gradation of each pixel can be an 8-bit, 10-bit, or 12-bit one. In the following explanation, the inputted video signal is a YUV signal unless otherwise specified. It is further assumed that the two color difference components U and V are signals having a 4:2:0 format which are subsampled with respect to the luminance component Y. A data unit to be processed which corresponds to each frame of the video signal is referred to as a "picture." In this Embodiment 1, a "picture" is explained as a video frame signal on which progressive scanning has been carried out. When the video signal is an interlaced signal, a "picture" can be alternatively a field image signal which is a unit which constructs a video frame.

[0031]

Next, the operation of the moving image encoding device and the operation of the moving image decoding device will be explained.

First, the processing carried out by the moving image encoding device shown in Fig. 1 will be explained. First, the encoding controlling part 1 determines a maximum size of each of coding blocks which is a unit to be processed at a time when an intra prediction process (intra-frame prediction process) or a

motion-compensated prediction process (inter-frame prediction process) is carried out, and also determines an upper limit on the number of hierarchical layers in a hierarchy in which each of the coding blocks having the maximum size is hierarchically  
5 divided into blocks (step ST1 of Fig. 2).

[0032]

As a method of determining the maximum size of each of coding blocks, for example, there is considered a method of determining a maximum size for all the pictures according to  
10 the resolution of the inputted image. Further, there can be considered a method of quantifying a variation in the complexity of a local movement of the inputted image as a parameter and then determining a small size for a picture having a large and vigorous movement while determining a large size for a picture  
15 having a small movement. As a method of determining the upper limit on the number of hierarchical layers, for example, there can be considered a method of increasing the depth of the hierarchy, i.e., the number of hierarchical layers to make it possible to detect a finer movement as the inputted image has  
20 a larger and more vigorous movement, or decreasing the depth of the hierarchy, i.e., the number of hierarchical layers as the inputted image has a smaller movement.

[0033]

The encoding controlling part 1 also selects a coding mode  
25 corresponding to each of the coding blocks into which each coding block having the maximum size is divided hierarchically from one or more available coding modes (M intra coding modes and N inter coding modes) (step ST2). The M intra coding modes which are prepared in advance will be mentioned below. When  
30 each of the coding block into which the inputted image is

hierarchically divided by the block dividing unit 2 which will be mentioned below is further divided into partitions, the encoding controlling part can select a coding mode corresponding to each of the partitions. Hereafter, an  
5 explanation will be made in this Embodiment 1 by assuming that each of the coding blocks is further divided into partitions. Although a detailed explanation of a selection method of selecting a coding mode for use in the encoding controlling part 1 will be omitted because the selection method is a known  
10 technique, there is a method of carrying out an encoding process on each coding block by using an arbitrary available coding mode to examine the encoding efficiency and select a coding mode having the highest level of encoding efficiency from among a plurality of available coding modes, for example.

15 [0034]

The encoding controlling part 1 further determines a quantization parameter and a transformation block size which are used when a difference image is compressed for each partition belonging to each coding block, and also determines  
20 an intra prediction parameter or an inter prediction parameter which is used when a prediction process is carried out. The encoding controlling part 1 outputs prediction difference encoding parameters including the quantization parameter and the transformation block size to the  
25 transformation/quantization part 7, the inverse quantization/inverse transformation part 8, and the variable length encoding part 13. The encoding controlling part also outputs the prediction difference encoding parameters to the intra prediction part 4 as needed.

30 [0035]

When receiving the video signal showing the inputted image, the block dividing part 2 divides the inputted image into coding blocks each having the maximum size determined by the encoding controlling part 1, and also divides each of the coding  
5 blocks into blocks hierarchically until the number of hierarchical layers reaches the upper limit on the number of hierarchical layers which is determined by the encoding controlling part 1. The block dividing part further divides each of the coding blocks into partitions (step ST3). Fig. 3  
10 is an explanatory drawing showing a state in which each coding block having the maximum size is hierarchically divided into a plurality of coding blocks. In the example of Fig. 3, each coding block having the maximum size is a coding block  $B^0$  in the 0th hierarchical layer, and its luminance component has a  
15 size of  $(L^0, M^0)$ . Further, in the example of Fig. 3, by carrying out the hierarchical division with this coding block  $B^0$  having the maximum size being set as a starting point until the depth of the hierarchy reaches a predetermined depth which is set separately according to a quadtree structure, coding blocks  $B^n$   
20 can be acquired.

[0036]

At the depth of  $n$ , each coding block  $B^n$  is an image area having a size of  $(L^n, M^n)$ . Although  $L^n$  can be the same as or differ from  $M^n$ , the case of  $L^n=M^n$  is shown in the example of Fig.  
25 3. Hereafter, the size of each coding block  $B^n$  is defined as the size of  $(L^n, M^n)$  in the luminance component of the coding block  $B^n$ .

[0037]

Because the block dividing part 2 carries out a quadtree  
30 division,  $(L^{n+1}, M^{n+1})=(L^n/2, M^n/2)$  is always established. In the

case of a color video image signal (4:4:4 format) in which all the color components have the same sample number, such as an RGB signal, all the color components have a size of  $(L^n, M^n)$ , while in the case of handling a 4:2:0 format, a corresponding color difference component has an encoding block size of  $(L^n/2, M^n/2)$ . Hereafter, a coding mode selectable for each coding block  $B^n$  in the  $n$ th hierarchical layer is expressed as  $m(B^n)$ .  
[0038]

In the case of a color video signal which consists of a plurality of color components, the coding mode  $m(B^n)$  can be formed in such a way that an individual mode is used for each color component. Hereafter, an explanation will be made by assuming that the coding mode  $m(B^n)$  indicates the one for the luminance component of each coding block having a 4:2:0 format in a YUV signal unless otherwise specified. The coding mode  $m(B^n)$  can be one of one or more intra coding modes (generically referred to as "INTRA") or one or more inter coding modes (generically referred to as "INTER"), and the encoding controlling part 1 selects, as the coding mode  $m(B^n)$ , a coding mode with the highest degree of encoding efficiency for each coding block  $B^n$  from among all the coding modes available in the picture currently being processed or a subset of these coding modes, as mentioned above.

[0039]

Each coding block  $B^n$  is further divided into one or more prediction units (partitions) by the block dividing part, as shown in Fig. 3. Hereafter, each partition belonging to each coding block  $B^n$  is expressed as  $P_i^n$  ( $i$  shows a partition number in the  $n$ th hierarchical layer). Fig. 8 is an explanatory drawing showing a partition  $P_i^n$  belonging to a coding block  $B^n$ .

How the division of each coding block  $B^n$  into partitions  $P_i^n$  belonging to the coding block  $B^n$  is carried out is included as information in the coding mode  $m(B^n)$ . While the prediction process is carried out on each of all the partitions  $P_i^n$  according to the coding mode  $m(B^n)$ , an individual prediction parameter can be selected for each partition  $P_i^n$ .

[0040]

The encoding controlling part 1 produces such a block division state as shown in, for example, Fig. 4 for a coding block having the maximum size, and then determines coding blocks  $B^n$ . Hatched shown in Fig. 4(a) show a distribution of partitions into which the coding block having the maximum size is divided, and Fig. 4(b) shows a situation in which coding modes  $m(B^n)$  are respectively assigned to the partitions generated through the hierarchical layer division by using a quadtree graph. Each node enclosed by  $\square$  shown in Fig. 4(b) is a node (coding block  $B^n$ ) to which a coding mode  $m(B^n)$  is assigned.

[0041]

When the encoding controlling part 1 selects an intra coding mode ( $m(B^n) \in \text{INTRA}$ ), the selection switch 3 outputs each partition  $P_i^n$  belonging to the coding block  $B^n$  which is generated through the division by the block dividing unit 2 to the intra prediction part 4, whereas when the encoding controlling part 1 selects an inter coding mode ( $m(B^n) \in \text{INTER}$ ), the selection switch 3 outputs each partition  $P_i^n$  belonging to the coding block  $B^n$  to the motion-compensated prediction part 5.

[0042]

When receiving each partition  $P_i^n$  belonging to the coding block  $B^n$  from the selection switch 3 (step ST4), the intra prediction part 4 carries out an intra prediction process on

each partition  $P_i^n$  to generate an intra prediction image ( $P_i^n$ ) on the basis of the intra prediction parameter determined by the encoding controlling part 1 (step ST5), as will be concretely described below. Hereafter, in this specification,  
5  $P_i^n$  denotes a partition and ( $P_i^n$ ) denotes a prediction image of the partition  $P_i^n$ .

[0043]

Because the moving image decoding device also needs to generate an intra prediction image ( $P_i^n$ ) which is completely  
10 the same as the intra prediction image, the intra prediction parameter used for the generation of the intra prediction image ( $P_i^n$ ) are multiplexed into the bitstream by the variable length encoding part 13. The number of intra prediction directions each of which can be selected as an intra prediction parameter  
15 can be configured in such a way as to differ according to the size of the target block to be processed. The number of intra prediction directions selectable for a large-size partition can be decreased because the efficiency of intra prediction decreases, while the number of intra prediction directions  
20 selectable for a small-size partition can be increased. For example, 34 intra prediction directions can be provided for a 4×4-pixel partition and an 8×8-pixel partition, 17 intra prediction directions can be provided for a 16×16-pixel partition, and 9 intra prediction directions can be provided  
25 for a 32×32-pixel partition.

[0044]

When receiving each partition  $P_i^n$  belonging to the coding block  $B^n$  from the selection switch 3 (step ST4), the motion-compensated prediction part 5 carries out an inter  
30 prediction process on each partition  $P_i^n$  to generate an inter

prediction image ( $P_i^n$ ) on the basis of the inter prediction parameter determined by the encoding controlling part 1 (step ST6). More specifically, the motion-compensated prediction part 5 carries out a motion-compensated prediction process on each partition  $P_i^n$  to generate an inter prediction image ( $P_i^n$ ) by using one or more frames of reference images stored in the motion-compensated prediction frame memory 12 on the basis of the inter prediction parameter outputted thereto from the encoding controlling part 1. Because the moving image decoding device also needs to generate an inter prediction image ( $P_i^n$ ) which is completely the same as the inter prediction image, the inter prediction parameter used for the generation of the inter prediction image ( $P_i^n$ ) are multiplexed into the bitstream by the variable length encoding part 13.

15 [0045]

When receiving the prediction image ( $P_i^n$ ) from the intra prediction part 4 or the motion-compensated prediction part 5, the subtracting part 6 subtracts the prediction image ( $P_i^n$ ) from the partition  $P_i^n$  belonging to the coding block  $B^n$  which is generated through the division by the block dividing unit 2 to generate a prediction difference signal  $e_i^n$  showing a difference image (step ST7). When the subtracting part 6 generates the prediction difference signal  $e_i^n$ , the transformation/quantization part 7 carries out a transformation process (e.g., a DCT (discrete cosine transform) or an orthogonal transformation process, such as a KL transform, in which bases are designed for a specific learning sequence in advance) on the prediction difference signal  $e_i^n$  in units of a block having the transformation block size included in the prediction difference encoding parameters outputted thereto

20  
25  
30

from the encoding controlling part 1, and also quantizes the transform coefficients of the prediction difference signal  $e_i^n$  by using the quantization parameter included in the prediction difference encoding parameters and outputs compressed data of the difference image which are the transform coefficients quantized thereby to the inverse quantization/inverse transformation part 8 and the variable length encoding part 13 (step ST8).

[0046]

10        When receiving the compressed data of the difference image from the transformation/quantization part 7, the inverse quantization/inverse transformation part 8 inverse-quantizes the compressed data of the difference image by using the quantization parameter included in the prediction difference encoding parameters outputted thereto from the encoding controlling part 1, performs an inverse transformation process (e.g., an inverse DCT (inverse discrete cosine transform) or an inverse transformation process such as an inverse KL transform) on the compressed data inverse-quantized thereby in units of a block having the transformation block size included in the prediction difference encoding parameters, and outputs the compressed data on which the inverse quantization/inverse transformation part has carried out the inverse transformation process to the adding part 9 as a local decoded prediction difference signal (step ST9).

25        [0047]

      When receiving the local decoded prediction difference signal from the inverse quantization/inverse transformation part 8, the adding part 9 adds the local decoded prediction difference signal and the prediction signal showing the

30

prediction image ( $P_i^n$ ) generated by the intra prediction part 4 or the motion-compensated prediction part 5 to generate a local decoded image signal showing a local decoded partition image or a local decoded coding block image (referred to as a local decoded image from here on) which is a group of local decoded partition images, and outputs the local decoded image signal to the loop filter unit 11 (step ST10). Further, this local decoded image is stored in the memory 10 for intra prediction in order that it can be used for intra prediction.

10 [0048]

When receiving the local decoded image signal from the adding part 9, the loop filter part 11 compensates for an encoding distortion included in the local decoded image signal, and stores the local decoded image shown by the local decoded image signal on which the loop filter part has carried out the encoding distortion compensation in the motion-compensated prediction frame memory 12 as a reference image (step ST11). The loop filter part 11 can carry out the filtering process for each coding block having the maximum size of the local decoded image signal inputted thereto or for each coding block of the local decoded image signal. As an alternative, after the local decoded image signals corresponding to all the macroblocks of one screen are inputted thereto, the loop filter part can carry out the filtering process on all the macroblocks of the one screen at a time.

25 [0049]

The moving image encoding device repeatedly carries out the processes of steps ST4 to ST10 until the moving image encoding device completes the processing on each partition  $P_i^n$  belonging to each of all the coding blocks  $B^n$  into which the

30

inputted image is divided by the block dividing part 2 (step ST12). The variable length encoding part 13 carries out a process of variable-length-encoding the compressed data outputted thereto from the transformation/quantization part 7, the coding mode and the prediction difference encoding parameters which are outputted thereto from the encoding controlling part 1, and the intra prediction parameter outputted thereto from the intra prediction part 4 or the inter prediction parameter outputted thereto from the motion-compensated prediction part 5 to generate a bitstream into which coded data of the compressed data, coded data of the coding mode, coded data of the prediction difference encoding parameters, and coded data of the intra prediction parameter or the inter prediction parameter are multiplexed (step ST13).

15 [0050]

Next, the process carried out by the intra prediction part 4 will be explained concretely. Fig. 5 is an explanatory drawing showing an example of the intra prediction parameter (intra prediction mode) which can be selected for each partition  $P_i^n$  belonging to the coding block  $B^n$ . In the example of Fig. 5, prediction direction vectors corresponding to intra prediction modes are shown, and it is designed that a relative angle between prediction direction vectors becomes small with increase in the number of selectable intra prediction modes.

25 [0051]

Hereafter, an intra process of generating an intra prediction signal of the luminance signal of a partition  $P_i^n$  on the basis of the intra prediction parameter (intra prediction mode) for the luminance signal will be explained. It is assumed that the size of the partition  $P_i^n$  is  $l_i^n \times m_i^n$  pixels. Fig. 6

30

is an explanatory drawing showing an example of pixels which are used when generating a predicted value of each pixel in the partition  $P_i^n$  in the case of  $l_i^n=m_i^n=4$ . Although the  $(2 \times l_i^n + 1)$  pixels in an already-encoded upper partition which is adjacent to the partition  $P_i^n$  and the  $(2 \times m_i^n)$  pixels in an already-encoded left partition which is adjacent to the partition  $P_i^n$  are defined as the pixels used for prediction in the example of Fig. 6, a smaller number of pixels than the pixels shown in Fig. 6 can be alternatively used for prediction. Although one row or column of pixels which are adjacent to the partition  $P_i^n$  are used for prediction in the example of Fig. 6, two rows or columns of pixels or three or more rows or columns of pixels can be alternatively used for prediction.

[0052]

When an index value indicating the intra prediction mode for the partition  $P_i^n$  is 2 (average prediction), the intra prediction part 4 generates a prediction image by using the average of the adjacent pixels in the upper partition and the adjacent pixels in the left partition as the predicted value of each pixel in the partition  $P_i^n$ . When the index value indicating the intra prediction mode is other than 2 (average prediction), the intra prediction part generates the predicted value of each pixel in the partition  $P_i^n$  on the basis of a prediction direction vector  $v_p=(dx, dy)$  shown by the index value. When relative coordinates in the partition  $P_i^n$  (the upper left pixel of the partition is defined as the point of origin) of each pixel (prediction target pixel) for which the predicted value is generated are expressed as  $(x, y)$ , the position of a reference pixel which is used for prediction is the point of intersection where the following L and one of the

lines of adjacent pixels intersect each other.

$$L = \begin{pmatrix} x \\ y \end{pmatrix} + kv_p$$

where  $k$  is a positive scalar value.

[0053]

When a reference pixel is located at an integer pixel  
5 position, the integer pixel is defined as the predicted value  
of the target pixel for prediction. In contrast, when a  
reference pixel is not located at an integer pixel position,  
an interpolation pixel which is generated from an integer pixel  
adjacent to the reference pixel is defined as the predicted  
10 value of the target pixel for prediction. In the example of  
Fig. 6, because the reference pixel is not at an integer pixel  
position, the average of the values of the two pixels which are  
adjacent to the reference pixel is determined as the predicted  
value of the target pixel for prediction. The intra prediction  
15 part can use not only the adjacent two pixels but also two or  
more adjacent pixels to generate an interpolation pixel and  
determine the value of this interpolation pixel as the predicted  
value.

[0054]

20 According to the same procedure, the intra prediction  
part 4 generates prediction pixels for all the pixels of the  
luminance signal in the partition  $P_i^n$  and outputs an intra  
prediction image ( $P_i^n$ ) generated thereby. The intra prediction  
parameter used for the generation of the intra prediction image  
25 ( $P_i^n$ ) are outputted to the variable length encoding part 13 in  
order to multiplex the intra prediction parameter into the  
bitstream, as mentioned above. While the intra prediction  
image ( $P_i^n$ ) for the luminance signal in the partition  $P_i^n$  is

generated in the above-mentioned way, an intra prediction image ( $P_j^{n-1}$ ) is generated for the luminance signal in a partition  $P_j^{n-1}$  ( $j$ : the partition number of the higher layer partition in the  $(n-1)$ th hierarchical layer to which the partition  $P_i^n$  belongs) in a similar manner, as shown in Fig. 7.

[0055]

In this embodiment, as shown in Fig. 6, the intra prediction part is constructed in such a way as to be able to select a portion corresponding to the partition  $P_i^n$ , which is extracted from the intra prediction image ( $P_j^{n-1}$ ) for the higher layer partition  $P_j^{n-1}$ , as a candidate for the intra prediction image ( $P_i^n$ ) for the luminance signal in the partition  $P_i^n$ , in addition to the one that is generated from adjacent pixels of reference pixels adjacent to the partition  $P_i^n$ . More specifically, in a case in which nine directions of intra prediction mode including an average prediction are provided as the intra prediction modes, as shown in Fig. 9, nine prediction modes are further added when a higher layer partition exists.

[0056]

Although an intra prediction is a means of predicting an unknown area in the screen from a known area, the prediction efficiency can be improved by selecting a candidate for the intra prediction image from prediction images having different properties because the image signal has a large local change in a space direction. Therefore, in the case in which the intra prediction part is constructed as above in such a way that the number of directions in the intra prediction modes is increased, the degree of similarity among prediction images generated is reduced as compared with the case in which the number of intra

prediction modes is simply increased, and hence a candidate for the intra prediction image can be selected from prediction images having many variations. Therefore, an increase in the number of directions in the intra prediction modes can increase  
5 the degree of improvement in the encoding efficiency as compared with an increase in the number of intra prediction modes. Further, because a prediction image for a lower layer partition can be generated by extracting a part of a prediction image for a higher layer partition using the method in accordance with  
10 the present invention, an increase in the number of prediction directions provides an advantage of being able to reduce the amount of computation as compared with the case of an increase in the number of prediction modes.

[0057]

15 The intra prediction part also carries out an intra prediction process based on the intra prediction parameter (intra prediction mode) on each of the color difference signals of the partition  $P_i^n$  according to the same procedure as that according to which the intra prediction part carries out the  
20 intra prediction process on the luminance signal, and outputs the intra prediction parameter used for the generation of the intra prediction image to the variable length encoding part 13.

[0058]

The variable length encoding part 13  
25 variable-length-encodes the intra prediction parameter outputted thereto from the intra prediction part 4 and multiplexes the codeword of the intra prediction parameter into the bitstream, as mentioned above. When encoding the intra prediction parameter, the variable length encoding unit 13 can  
30 select a representative prediction direction vector

(prediction direction representative vector) from among the prediction direction vectors of a plurality of directional predictions, express the intra prediction parameter by using an index indicating the prediction direction representative vector (prediction direction representative index) and an index indicating the difference between the prediction direction vector and the prediction direction representative vector (prediction direction differential index), and carry out Huffman encoding, such as arithmetic encoding according to a probability model, for each of the indexes, thereby being able to reduce the code amount.

[0059]

Next, the processing carried out by the moving image encoding device shown in Fig. 10 will be explained. When receiving the bitstream generated by the moving image encoding device shown in Fig. 1, the variable length decoding part 21 carries out a variable length decoding process on the bitstream to decode a frame size in units of a sequence which consists of one or more frames of pictures or in units of a picture (step ST21 of Fig. 11). After decoding the frame size, the variable length decoding part 21 determines the maximum encoding block size determined by the moving image encoding device shown in Fig. 1 (the maximum size of each of the coding blocks which is a unit to be processed at a time when an intra prediction process or a motion-compensated prediction process is carried out), and the upper limit on the hierarchy number (the number of hierarchical layers in the hierarchy in which each coding block having the maximum size is hierarchically divided into blocks) according to the same procedure as that which the moving image encoding device uses (step ST22).

[0060]

For example, when the maximum size of each of the coding blocks is determined for all the pictures according to the resolution of the inputted image in the moving image encoding device, the variable length decoding part determines the maximum size of each of the coding blocks on the basis of the frame size which the variable length decoding part has decoded previously according to the same procedure as that which the moving image encoding device shown in Fig. 1 uses. When both the maximum size of each of the coding blocks and the number of hierarchical layers of the coding blocks are multiplexed into the bitstream by the moving image encoding device, the variable length decoding part decodes the bitstream to acquire both the maximum size of each of the coding blocks and the number of hierarchical layers of the coding blocks.

[0061]

After determining both the maximum size of each of the coding blocks and the number of hierarchical layers of the coding blocks, the variable length decoding part 21 specifies the coded data associated with each coding block from the coded data multiplexed into the bitstream by grasping the state of the hierarchical division of the inputted image into the coding blocks with each coding block having the maximum size being set as a starting point, and decodes the coded data to acquire the coding mode assigned to each of the coding blocks. The variable length decoding part 21 then refers to the division information about the division into partitions  $P_i^n$  belonging to the coding block  $B^n$  included in the coding mode to specify the coded data associated with each of the partitions  $P_i^n$  from the coded data multiplexed into the bitstream (step ST23). The variable

length decoding part 21 variable-length-decodes the coded data associated with each of the partitions  $P_i^n$  to acquire the compressed data, the prediction difference encoding parameters, and the intra prediction parameter or the inter prediction parameter, and outputs the compressed data and the prediction difference encoding parameters to the inverse quantization/inverse transformation part 25 and also outputs the coding mode and the intra prediction parameter or the inter prediction parameter to the selection switch 22 (step ST24).

10 [0062]

For example, when the prediction direction representative index and the prediction direction differential index are multiplexed into the bitstream, the variable length decoding part entropy-decodes the prediction direction representative index and the prediction direction differential index by using, for example, arithmetic decoding methods according to their respective probability models, respectively, to specify the intra prediction parameter from the prediction direction representative index and the prediction direction differential index. As a result, even when the code amount of the intra prediction parameter is reduced in the moving image encoding device, the moving image decoding device can decode the intra prediction parameter correctly.

25 [0063]

When the coding mode of each partition  $P_i^n$  belonging to the coding block  $B^n$  outputted thereto from the variable length decoding part 21 is an intra coding mode, the selection switch 22 outputs the intra prediction parameter outputted thereto from the variable length decoding part 21 to the intra

prediction part 23, whereas when the coding mode is an inter coding mode, the selection switch outputs the inter prediction parameter outputted thereto from the variable length decoding part 21 to the motion compensation part 24.

5 [0064]

When receiving the intra prediction parameter from the selection switch 22 (step ST25), the intra prediction part 23 carries out an intra prediction process on each partition  $P_i^n$  to generate an intra prediction image ( $P_i^n$ ) on the basis of the  
10 intra prediction parameter (step ST26), like the intra prediction part 4 shown in Fig. 1. More specifically, the intra prediction part 23 carries out an intra-frame prediction process on each partition  $P_i^n$  to generate a prediction image ( $P_i^n$ ) by using already-decoded pixels which are stored in the  
15 memory 27 for intra prediction and which are adjacent to the partition  $P_i^n$  or already-decoded pixels which are adjacent to a higher layer partition  $P_j^{n-1}$  to which the partition  $P_i^n$  belongs on the basis of the intra prediction parameter.

[0065]

20 When receiving the inter prediction parameter from the selection switch 22 (step ST25), the motion compensation part 24 carries out an inter prediction process on each partition  $P_i^n$  to generate an inter prediction image ( $P_i^n$ ) on the basis of the inter prediction parameter, like the motion-compensated  
25 prediction part 5 shown in Fig. 1 (step ST27). More specifically, the motion compensation part 24 carries out a motion-compensated prediction process on each partition  $P_i^n$  to generate an inter prediction image ( $P_i^n$ ) by using one or more frames of reference images stored in the motion-compensated  
30 prediction frame memory 29 on the basis of the inter prediction

parameter.

[0066]

When receiving the prediction difference encoding parameters from the variable length decoding part 21, the  
5 inverse quantization/inverse transformation part 25 inverse-quantizes the compressed data associated with the coding block, which are outputted thereto from the variable length decoding part 21, by using the quantization parameter included in the prediction difference encoding parameters, and  
10 carries out an inverse transformation process (e.g., an inverse DCT (inverse discrete cosine transform) or an inverse transformation process such as an inverse KL transform) on the compressed data inverse-quantized thereby in units of a block having the transformation block size included in the prediction  
15 difference encoding parameters, and outputs the compressed data on which the inverse quantization/inverse transformation part has carried out the inverse transformation process to the adding part 26 as a decoded prediction difference signal (signal showing a pre-compressed difference image) (step ST28).

20 [0067]

The adding part 26 generates a decoded image signal showing a decoded partition image or a decoded image which is a group of decoded partition images by adding the decoded prediction difference signal and the prediction signal showing  
25 the prediction image ( $P_i^n$ ) generated by the intra prediction part 23 or the motion-compensated prediction part 24, and outputs the decoded image signal to the loop filter part 28 (step ST29). Further, this decoded image is stored in the memory 27 for intra prediction in order that the decoded image can be used  
30 for intra prediction.

[0068]

When receiving the decoded image signal from the adding part 26, the loop filter part 28 compensates for an encoding distortion included in the decoded image signal, and stores the decoded image shown by the decoded image signal on which the loop filter part has carried out the encoding distortion compensation in the motion-compensated prediction frame memory 29 as a reference image and also outputs the decoded image as a reproduced image (step ST30). The loop filter part 28 can carry out the filtering process for each coding block having the maximum size of the decoded image signal inputted thereto or each coding block of the decoded image signal. As an alternative, after the decoded image signals corresponding to all the macroblocks of one screen are inputted, the loop filter part can carry out the filtering process on all the macroblocks of the one screen at a time. The processes of steps ST23 to ST29 are repeatedly carried out until the processing on each partition  $P_i^n$  belonging to each of all the coding blocks  $B^n$  is completed (step ST31).

[0069]

As can be seen from the above description, because the intra prediction part 4 of the moving image encoding device in accordance with this Embodiment 1 is constructed in such a way as to, when the coding mode selected by the encoding controlling unit 1 is an intra prediction mode, carry out an intra-frame prediction process using pixels adjacent to a partition  $P_i^n$  which is generated through the division by the block dividing unit 2 or pixels adjacent to a higher layer partition  $P_j^{n-1}$  to which the partition  $P_i^n$  belongs to generate a prediction image ( $P_i^n$ ), there is provided an advantage of being able to increase

the degree of improvement in the encoding efficiency with a small amount of computation.

[0070]

Further, because the intra prediction part 23 of the moving image decoding device in accordance with this Embodiment 1 is constructed in such a way as to, when the coding mode variable-length-decoded by the variable length decoding part 21 is an intra prediction mode, carry out an intra-frame prediction process using already-decoded pixels which are stored in the memory 27 for intra prediction and which are adjacent to a partition  $P_i^n$  or already-decoded pixels adjacent to a higher layer partition  $P_j^{n-1}$  to which the partition  $P_i^n$  belongs to generate a prediction image ( $P_i^n$ ), there is provided an advantage of being able to correctly decode the coded data in which an improvement in the encoding efficiency is provided to acquire the moving image.

[0071]

Embodiment 2.

Although the example in which the variable length encoding part 13 of the moving image encoding device variable-length-encodes the intra prediction parameter for a partition to be encoded is shown in above-mentioned Embodiment 1, the variable length encoding part can variable-length-encode an intra merge flag indicating whether or not the intra prediction parameter for the partition to be encoded is identical to that for a partition adjacent to the partition, and can also variable-length-encode an intra merge direction for specifying the adjacent partition when the intra prediction parameter for the partition to be encoded is identical to that for the adjacent partition, otherwise variable-length-encode

the intra prediction parameter for the partition to be encoded.  
[0072]

Further, although the example in which the variable length decoding part 21 of the moving image decoding device  
5 variable-length-decodes the coded data associated with a partition to be decoded to acquire the intra prediction parameter for the partition is shown in above-mentioned Embodiment 1, the variable length decoding part can  
10 variable-length-decode the coded data associated with the partition to be decoded to acquire the intra merge flag indicating whether or not the intra prediction parameter for the partition to be decoded is identical to that for a partition adjacent to the partition, and can also variable-length-decode the coded data to acquire the intra merge direction for  
15 specifying the adjacent partition when the intra prediction parameter for the partition to be decoded is identical to that for the adjacent partition, otherwise variable-length-decode the coded data to acquire the intra prediction parameter for the partition to be encoded.

20 [0073]

Because a moving image encoding device and a moving image decoding device in accordance with this embodiment have the same structures as those according to above-mentioned Embodiment 1 except for components corresponding to encoding and decoding  
25 of an intra prediction parameter, only the encoding and decoding of the intra prediction parameter will be explained in this Embodiment 2.

[0074]

When variable-length-encoding the intra prediction  
30 parameter for a partition  $P_i^n$  to be encoded (target to be

processed), a variable length encoding part 13 of the moving  
image encoding device in accordance with this Embodiment 2  
variable-length-encodes an intra merge flag indicating whether  
the intra prediction parameter is identical to that for a  
5 partition adjacent to the partition  $P_i^n$ , as shown in Fig. 12(A).  
When the intra merge flag indicates that the intra prediction  
parameter is identical to that for an adjacent partition, the  
variable length encoding part 13 also variable-length-encodes  
an intra merge direction showing which one of adjacent  
10 partitions has the same intra prediction parameter as the  
partition to be encoded. In contrast, when the intra merge flag  
indicates that the intra prediction parameter is not identical  
to that for any adjacent partition, the variable length encoding  
part variable-length-encodes the intra prediction parameter  
15 for the partition  $P_i^n$  to be encoded (in this case, the variable  
length encoding part carries out the same encoding as that shown  
in above-mentioned Embodiment 1), as shown in Fig. 12(B).  
[0075]

For example, when a partition adjacent to the left of the  
20 partition to be encoded and a partition adjacent to the top of  
the partition to be encoded are listed as adjacent partition  
candidates, as shown in Fig. 13(A), a flag indicating whether  
the intra prediction parameter for the partition to be encoded  
is identical to that for the partition adjacent to the left of  
25 the partition to be encoded or those for the partition adjacent  
to the top of the partition to be encoded is provided as the  
intra merge direction. As an alternative, a partition adjacent  
to the left of the partition to be encoded, a partition adjacent  
to the top left of the partition to be encoded, and a partition  
30 adjacent to the top of the partition to be encoded are listed

can be listed as adjacent partition candidates, and a flag indicating which one of the three candidates has the same intra prediction parameter as the partition to be encoded can be provided as the intra merge direction, as shown in Fig. 13(B).

5 In a case in which all adjacent partitions each of which can be the target for flag encoding have the same intra prediction parameter, it is not necessary to encode the intra merge direction as a matter of course. Therefore, the variable length encoding part can be constructed in such a way as not to encode  
10 the intra merge direction in this case, as shown in Fig. 12(D). Further, the variable length encoding part can be constructed in such a way as to, when there are two or more partitions adjacent to the top or left of the partition to be encoded, scan the partitions in a direction away from a top left side of the  
15 partition to be encoded, for example, and select the first partition which has been encoded in an intra prediction mode as the adjacent partition to the top or left of the partition to be encoded.

[0076]

20 Further, when the number NumN of selectable intra prediction directions in the adjacent partition is not equal to the number NumC of selectable intra prediction directions in the partition to be encoded, the variable length encoding part can be constructed in the following way. More  
25 specifically, when  $\text{NumN} < \text{NumC}$ , the variable length encoding part brings a representative prediction direction vector, among the prediction direction vectors of a plurality of directional predictions in the partition  $P_i^n$  to be encoded, into  
30 correspondence with one of the selectable intra prediction directions in the adjacent partition to determine whether the

intra prediction parameter for the partition  $P_i^n$  to be encoded matches that for the adjacent partition. In this case, when determining that the intra prediction parameter for the partition  $P_i^n$  to be encoded match those for the adjacent partition, the variable length encoding part encodes an intra prediction direction residual parameter showing which one of the plurality of corresponding intra prediction directions has been selected for the partition  $P_i^n$  to be encoded, as shown in Fig. 12(C).

10 [0077]

In contrast, when  $\text{NumN} > \text{NumC}$ , the variable length encoding part brings a representative prediction direction vector, among the prediction direction vectors of a plurality of directional predictions in the adjacent partition, into correspondence with one of the selectable intra prediction directions in the partition  $P_i^n$  to be encoded to determine whether the intra prediction parameter for the partition  $P_i^n$  to be encoded matches that for the adjacent partition. In this case, the variable length encoding part does not have to encode the intra prediction direction residual parameter. Because it can be considered that an intra prediction mode has a direction depending on the texture of the image to be encoded, a similar prediction mode easily occurs locally. Therefore, the variable length encoding part can encode the intra prediction parameter with a smaller amount of information by encoding the intra prediction parameter by using the intra merge flag and the intra merge direction.

[0078]

When variable-length-decoding the intra prediction parameter in a partition  $P_i^n$  to be decoded (target to be

30

processed), a variable length decoding part 21 of the moving image decoding device in accordance with this Embodiment 2 variable-length-decodes the intra merge flag indicating whether or not the intra prediction parameter is identical to that for a partition adjacent to the partition  $P_i^n$ , as shown in Fig. 12(A). Further, when the intra merge flag indicates that the intra prediction parameter is identical to that for an adjacent partition, the variable length decoding part 21 variable-length-decodes the intra merge direction showing which one of adjacent partitions has the same intra prediction parameter as the partition to be decoded. In contrast, when the intra merge flag indicates that the intra prediction parameter is not identical to that for an adjacent partition, the variable length decoding part variable-length-decodes the intra prediction parameter in the partition  $P_i^n$  to be decoded (in this case, the variable length decoding part carries out the same decoding as that shown in above-mentioned Embodiment 1), as shown in Fig. 12(B).

[0079]

For example, when a partition adjacent to the left of the partition to be decoded and a partition adjacent to the top of the partition to be decoded are listed as adjacent partition candidates, as shown in Fig. 13(A), a flag indicating whether the intra prediction parameter for the partition to be decoded is identical to that for the partition adjacent to the left of the partition to be decoded or those for the partition adjacent to the top of the partition to be decoded is provided as the intra merge direction. As an alternative, a partition adjacent to the left of the partition to be decoded, a partition adjacent to the top left of the partition to be decoded, and a partition

adjacent to the top of the partition to be decoded can be listed as adjacent partition candidates, and a flag indicating which one of the three candidates has the same intra prediction parameter as the partition to be decoded can be provided as the  
5 intra merge direction, as shown in Fig. 13(B). In a case in which all adjacent partitions each of which can be the target for flag encoding have the same intra prediction parameter, it is not necessary to encode the intra merge direction as a matter of course. Therefore, the variable length decoding part can  
10 be constructed in such a way as not to decode the intra merge direction in this case, as shown in Fig. 12(D). Further, the variable length decoding part can be constructed in such a way as to, when there are two or more partitions adjacent to the top or left of the partition to be decoded, scan the partitions  
15 in a direction away from a top left side of the partition to be decoded, for example, and select the first partition which has been encoded in an intra prediction mode as the adjacent partition to the top or left of the partition to be decoded.  
[0080]

20 Further, when the number NumN of selectable intra prediction directions in the adjacent partition is not equal to the number NumC of selectable intra prediction directions in the partition to be decoded, the variable length decoding part can be constructed in the following way. More  
25 specifically, when NumN<NumC, the variable length decoding part brings a representative prediction direction vector, among the prediction direction vectors of a plurality of directional predictions in the partition  $P_i^n$  to be decoded, into  
correspondence with one of the selectable intra prediction  
30 directions in the adjacent partition to determine whether the

intra prediction parameter for the partition  $P_i^n$  to be decoded matches that for the adjacent partition. In this case, when determining that the intra prediction parameter for the partition  $P_i^n$  to be decoded matches that for the adjacent partition, the variable length decoding part encodes an intra prediction direction residual parameter showing which one of the plurality of corresponding intra prediction directions has been selected for the partition  $P_i^n$  to be decoded, as shown in Fig. 12(C).

10 [0081]

In contrast, when  $\text{NumN} > \text{NumC}$ , the variable length decoding part brings a representative prediction direction vector, among the prediction direction vectors of a plurality of directional predictions in the adjacent partition, into correspondence with one of the selectable intra prediction directions in the partition  $P_i^n$  to be decoded to determine whether the intra prediction parameter for the partition  $P_i^n$  to be decoded matches that for the adjacent partition. In this case, the variable length decoding part does not have to decode the intra prediction direction residual parameter. Because the variable length decoding part is constructed in this way, the variable length decoding part can properly decode the intra prediction parameter which is encoded by the moving image encoding device in accordance with this Embodiment 2. As a matter of course, the variable length encoding unit and the variable length decoding unit in accordance with this Embodiment 2 can also be applied to a case in which the partition to be processed and the adjacent partition are not placed in a prediction mode, as explained in this Embodiment 1, in which part of an intra prediction image in a higher hierarchical layer is extracted.

15  
20  
25  
30

[0082]

While the invention has been described in its preferred embodiments, it is to be understood that an arbitrary combination of two or more of the above-mentioned embodiments  
5 can be made, various changes can be made in an arbitrary component according to any one of the above-mentioned embodiments, and an arbitrary component according to any one of the above-mentioned embodiments can be omitted within the scope of the invention.

10 INDUSTRIAL APPLICABILITY

[0083]

As mentioned above, because the moving image encoding device, the moving image decoding device, the moving image encoding method, and the moving image decoding method in  
15 accordance with the present invention are capable of increasing the degree of improvement in the encoding efficiency which is caused by an increase in the number of directional predictions with a small amount of computation and a small code amount, the moving image encoding device and the moving image encoding  
20 method are suitable for use as a moving image encoding device for and a moving image encoding method of encoding a moving image with a high degree of efficiency, and so on, and the moving image decoding device and the moving image decoding method are suitable for use as a moving image decoding device for and a  
25 moving image decoding method of decoding an encoded moving image with a high degree of efficiency, and so on.

[0084]

1 encoding controlling part (encoding controlling unit),  
2 block dividing part (block dividing unit), 3 select switch  
30 (prediction image generating unit), 4 intra prediction part

(prediction image generating unit), 5 motion-compensated prediction part (prediction image generating unit), 6 subtracting part (difference image generating unit), 7 transformation/quantization part (image compression unit), 8  
5 inverse quantization/inverse transformation part, 9 adding part, 10 memory for intra prediction, 11 loop filter part, 12 motion-compensated prediction frame memory, 13 variable length encoding part (variable length encoding unit), 21 variable length decoding part (variable length decoding unit), 22 select  
10 switch (prediction image generating unit), 23 intra prediction part (prediction image generating unit), 24 motion compensation part (prediction image generating unit), 25 inverse quantization/inverse transformation part (difference image generating unit), 26 adding part (decoded image generating  
15 unit), 27 memory for intra prediction, 28 loop filter part, 29 motion-compensated prediction frame memory.

## CLAIMS

[1] (amended) ~~A moving image encoding device comprising:~~

~~an encoding controlling unit for determining a maximum size of a block to be encoded which is a unit to be processed at a time when a prediction process is carried out, and also determining a hierarchy number upper limit at a time when a block to be encoded having the maximum size is divided hierarchically, and for selecting an encoding mode corresponding to each of blocks to be encoded into which the block to be encoded having the maximum size is divided hierarchically from one or more available encoding modes;~~

~~a block dividing unit for dividing an inputted image into blocks to be encoded each having the maximum size determined by said encoding controlling unit, and also dividing each of said blocks to be encoded hierarchically until its hierarchy number reaches the hierarchy number upper limit determined by said encoding controlling unit;~~

~~a prediction image generating unit for carrying out a prediction process corresponding to the encoding mode selected by said encoding controlling unit on said each of blocks to be encoded into which each of said blocks to be encoded having the maximum size is divided by said block dividing unit to generate a prediction image;~~

~~a difference image generating unit for generating a difference image between said each of the blocks to be encoded into which each of said blocks to be encoded having the maximum size is divided by said block dividing unit, and the prediction image generated by said prediction image generating unit;~~

~~an image compression unit for compressing the difference image generated by said difference image generating unit, and~~

~~outputting compressed data of said difference image; and~~  
~~a variable length encoding unit for~~  
~~variable length encoding the compressed data outputted from~~  
~~said image compression unit and the encoding mode selected by~~  
5 ~~said encoding controlling unit to generate a bitstream into~~  
~~which encoded data of said compressed data and encoded data of~~  
~~said encoding mode are multiplexed, wherein~~  
~~when variable length encoding intra prediction~~  
~~parameters which are used when a prediction image is generated~~  
10 ~~by said prediction image generating unit, in addition to the~~  
~~compressed data and the encoding mode, to multiplex encoded data~~  
~~of said intra prediction parameters into said bitstream, said~~  
~~variable length encoding unit variable length encodes an intra~~  
~~merge flag showing whether intra prediction parameters for each~~  
15 ~~of partitions generated through the division by said block~~  
~~dividing unit are same as those for a partition adjacent to said~~  
~~each of the partitions, and, when said intra prediction~~  
~~parameters for said each of partitions are the same as those~~  
~~for an adjacent partition, variable length encodes an intra~~  
20 ~~merge direction for specifying said adjacent partition,~~  
~~otherwise variable length encodes the intra prediction~~  
~~parameters for said each of the partitions generated through~~  
~~the division by said block dividing unit.~~

A moving image decoding device comprising:

25 a variable length decoding unit for specifying coded data  
associated with each of coding blocks into which an image is  
divided hierarchically from coded data multiplexed into a  
bitstream, and for variable-length-decoding the coded data to  
acquire a coding mode associated with said each of the coding  
30 blocks;

a prediction image generating unit for carrying out a prediction process corresponding to said coding mode on the coding block specified by said variable length decoding unit to generate a prediction image; and

5 a decoded image generating unit for adding a pre-compressed difference image which is generated from data which are acquired by decoding the coded data associated with said each of the coding blocks which is specified by said variable length decoding unit and the prediction image  
10 generated by said prediction image generating unit to generate a decoded image, wherein

when there are two or more partitions adjacent to top or left of a partition currently being processed, said variable length decoding unit defines a first one of partitions running  
15 in a direction away from a top left side of said partition as each of partitions adjacent to top and left of said partition, and variable-length-decodes coded data associated with said partition to acquire an intra merge flag indicating whether or not an intra prediction parameter for said partition is  
20 identical to that for the partition adjacent to top or left of said partition, and, when said intra merge flag indicates that the intra prediction parameter for said partition is identical to that for said adjacent partition, variable-length-decodes said coded data to acquire an intra merge direction for  
25 specifying said adjacent partition, otherwise variable-length-decodes said coded data to acquire the intra prediction parameter for said partition.

[2] (amended) ~~The moving image encoding device according to claim 1, wherein when the encoding mode selected by the encoding  
30 controlling unit is an intra prediction mode, the prediction~~

~~image generating unit carries out an intra-frame prediction process using pixels adjacent to said each of the blocks to be encoded which is generated through the division by the block dividing unit or pixels adjacent to a higher layer block to be encoded to which said each of the blocks to be encoded belongs to generate a prediction image.~~

A moving image decoding device comprising:

a variable length decoding unit for specifying coded data associated with each of coding blocks into which an image is divided hierarchically from coded data multiplexed into a bitstream, and for variable-length-decoding the coded data to acquire a coding mode associated with said each of the coding blocks;

a prediction image generating unit for carrying out a prediction process corresponding to said coding mode on the coding block specified by said variable length decoding unit to generate a prediction image; and

a decoded image generating unit for adding a pre-compressed difference image which is generated from data which are acquired by decoding the coded data associated with said each of the coding blocks which is specified by said variable length decoding unit and the prediction image generated by said prediction image generating unit to generate a decoded image, wherein

said variable length decoding unit includes a unit for variable-length-decoding coded data associated with a partition currently being processed to acquire an intra merge flag indicating whether or not an intra prediction parameter for said partition is identical to either of two or three intra prediction parameter candidates including an intra prediction

parameter for a partition adjacent to said partition, and for,  
when said intra merge flag indicates that the intra prediction  
parameter for said partition is identical to either of said  
intra prediction parameter candidates,  
5 variable-length-decoding said coded data to acquire an intra  
merge direction for specifying which one of said intra  
prediction parameter candidates is identical to the intra  
prediction parameter for said partition, otherwise  
variable-length-decoding said coded data to acquire the intra  
10 prediction parameter for said partition, and, when a number of  
said intra prediction parameter candidates is two, defines an  
intra prediction parameter for a partition adjacent to top of  
said partition and an intra prediction parameter for a partition  
adjacent to left of said partition as said intra prediction  
15 parameter candidates.

[3] ~~(amended) The moving image encoding device according to  
claim 2, wherein when a block to be encoded which is generated  
through the division by the block dividing unit is further  
divided into partitions, the encoding controlling unit selects  
20 an encoding mode corresponding to the block to be encoded to  
which each of the partitions belongs or an encoding mode  
corresponding to each of the partitions, and, when the encoding  
mode selected by said encoding controlling unit is an intra  
prediction mode, the prediction image generating unit carries  
25 out an intra-frame prediction process using pixels adjacent to  
said each of the partitions which is generated through the  
division by said block dividing unit or pixels adjacent to a  
higher layer partition to which said each of the partitions  
belongs to generate a prediction image.~~

30 A moving image encoding device comprising:

a variable length encoding unit for variable-length-encoding a coding mode corresponding to each of coding blocks into which an image is divided hierarchically to generate a bitstream into which coded data of said coding  
5 mode is multiplexed, wherein

when variable-length-encoding an intra prediction parameter which is used when said moving image encoding device carries out a prediction process corresponding to said coding mode to generate a prediction image, in addition to said coding  
10 mode, to multiplex coded data of said intra prediction parameter into said bitstream, and there are two or more partitions adjacent to top or left of a partition which is generated through said division, said variable length encoding unit defines a first one of partitions running in a direction away from a top  
15 left side of said partition as each of partitions adjacent to top and left of said partition, and variable-length-encodes an intra merge flag indicating whether or not an intra prediction parameter for said partition is identical to that for the partition adjacent to top or left of said partition, and, when  
20 said intra merge flag indicates that the intra prediction parameter for said partition is identical to that for the partition adjacent to top or left of said partition, variable-length-encodes an intra merge direction for specifying which intra prediction parameter of those for the  
25 partition adjacent to top of said partition and those for the partition adjacent to left of said partition is identical to that for said partition, otherwise variable-length-encodes the intra prediction parameter for said partition.

[4] (amended) ~~The moving image encoding device according to  
30 claim 3, wherein when a higher layer block to be encoded or a~~

~~higher layer partition exists, an intra encoding mode using pixels adjacent to a higher layer block to be encoded or a higher layer partition is prepared in the one or more available encoding modes, and, when an intra prediction mode is selected~~  
5 ~~by said encoding controlling unit, the prediction image generating unit carries out an intra-frame prediction process using pixels adjacent to a higher layer block to be encoded or a higher layer partition to which said each of the blocks to be encoded or the partitions, which is generated through the~~  
10 ~~division by the block dividing unit, belongs to generate a prediction image.~~

A moving image encoding device comprising: a variable length encoding unit for variable-length-encoding a coding mode corresponding to each of coding blocks into which an image is  
15 divided hierarchically to generate a bitstream into which coded data of said coding mode is multiplexed, wherein

said variable length encoding unit includes a unit for, when variable-length-encoding an intra prediction parameter which are used when said moving image encoding device carries  
20 out a prediction process corresponding to said coding mode to generate a prediction image, in addition to said coding mode, to multiplex coded data of said intra prediction parameter into said bitstream, variable-length-encoding an intra merge flag indicating whether or not an intra prediction parameter for a  
25 partition which is generated through said division is identical to either of two or three intra prediction parameter candidates including an intra prediction parameter for a partition adjacent to said partition, and for, when said intra merge flag indicates that the intra prediction parameter for said  
30 partition is identical to either of said intra prediction

parameter candidates, variable-length-encoding an intra merge direction for specifying which one of said intra prediction parameter candidates is identical to the intra prediction parameter for said partition, otherwise  
5 variable-length-encoding the intra prediction parameter for said partition, and, when a number of said intra prediction parameter candidates is two, defines an intra prediction parameter for a partition adjacent to top of said partition and an intra prediction parameter for a partition adjacent to left  
10 of said partition as said intra prediction parameter candidates.

[5] (amended) ~~A moving image decoding device comprising:~~

~~a variable length decoding unit for specifying a maximum size of a block to be encoded which is a unit to be processed at a time when a prediction process is carried out, and also determining a number of hierarchical layers of blocks to be encoded into which a block to be encoded having the maximum size is divided hierarchically to specify encoded data associated with each of blocks to be encoded having the maximum size and encoded data associated with each of blocks to be encoded into which each of the blocks to be encoded having the maximum size is divided hierarchically from encoded data multiplexed into a bitstream, and for variable length decoding the encoded data associated with said each of the blocks to be encoded to acquire compressed data and an encoding mode which are associated with said each of the blocks to be encoded;~~  
15  
20  
25

~~a prediction image generating unit for carrying out a prediction process corresponding to said encoding mode on a block to be encoded specified by said variable length decoding unit to generate a prediction image;~~  
30

~~a difference image generating unit for generating a pre-compressed difference image from the compressed data associated with the block to be encoded variable-length-decoded by said variable-length-decoding unit; and~~

- 5       ~~a decoded image generating unit for adding the difference image generated by said difference image generating unit and the prediction image generated by said prediction image generating unit to generate a decoded image, wherein~~
- ~~said variable-length-decoding unit~~
- 10   ~~variable-length-decodes encoded data associated with a partition to acquire an intra merge flag showing whether or not intra prediction parameters for a partition adjacent to said partition are same as those for said partition, and, when said intra merge flag shows that the intra prediction parameters for~~
- 15   ~~a partition adjacent to said partition are same as those for said partition, variable-length-decodes said encoded data to acquire an intra merge direction for specifying said adjacent partition, otherwise variable-length-decodes said encoded data to acquire the intra prediction parameters for said~~
- 20   ~~partition.~~

A moving image encoding device comprising: a variable length encoding unit for variable-length-encoding a coding mode corresponding to each of coding blocks into which an image is divided hierarchically to generate a bitstream into which coded

25   data of said coding mode is multiplexed, wherein

      when variable-length-encoding an intra prediction parameter which is used when said moving image encoding device carries out a prediction process corresponding to said coding mode to generate a prediction image, in addition to said coding

30   mode, to multiplex coded data of said intra prediction parameter

into said bitstream, said variable length encoding unit variable-length-encodes an intra merge flag indicating whether an intra prediction parameter for a partition generated through said division is identical to that for a partition adjacent to  
5 said partition, and, when said intra prediction parameter for said partition is identical to that for an adjacent partition, variable-length-encodes an intra merge direction for specifying said adjacent partition, otherwise variable-length-encodes the intra prediction parameter for  
10 said partition generated through said division.

[6] (amended) ~~The moving image decoding device according to claim 5, wherein when the encoding mode selected by the encoding controlling unit is an intra prediction mode, the prediction image generating unit carries out an intra frame prediction process using pixels adjacent to the block to be encoded which is specified by said variable length decoding unit or pixels adjacent to a higher layer block to be encoded to which said block to be encoded belongs to generate a prediction image.~~

The moving image encoding device according to claim 5,  
20 wherein the moving image encoding device includes: an encoding controlling unit for determining a maximum size of a coding block which is a unit to be processed at a time when a prediction process is carried out, and also determining a hierarchy number upper limit for hierarchical partitioning of the coding block,  
25 and for selecting a coding mode corresponding to each of coding blocks into which the coding block having the maximum size is divided hierarchically from one or more available coding modes; a block dividing unit for dividing an inputted image into coding blocks each having the maximum size determined by said encoding  
30 controlling unit, and also dividing each of said coding blocks

hierarchically until its hierarchy number reaches the hierarchy number upper limit determined by said encoding controlling unit; a prediction image generating unit for carrying out a prediction process corresponding to the coding mode selected  
5 by said encoding controlling unit on said each of coding blocks into which each of said coding blocks having the maximum size is divided by said block dividing unit to generate a prediction image; a difference image generating unit for generating a difference image between said each of the coding blocks into  
10 which each of said coding blocks having the maximum size is divided by said block dividing unit, and the prediction image generated by said prediction image generating unit; an image compression unit for compressing the difference image generated by said difference image generating unit, and outputting  
15 compressed data of said difference image; and a variable length encoding unit for variable-length-encoding the compressed data outputted from said image compression unit and the coding mode selected by said encoding controlling unit to generate a bitstream into which coded data of said compressed data and  
20 coded data of said coding mode are multiplexed.

[7] (amended) ~~The moving image decoding device according to claim 6, wherein when a block to be encoded which is generated through the hierarchical division is further divided into partitions, the variable length decoding unit specifies encoded  
25 data associated with each of said partitions from the encoded data multiplexed into the bitstream and variable length decodes said encoded data to acquire compressed data and an encoding mode associated with said each of the partitions, and, when the encoding mode  
30 variable length decoded by said variable length decoding unit~~

~~is intra prediction mode, the prediction image generating unit carries out an intra-frame prediction process using pixels adjacent to said each of the partitions or pixels adjacent to a higher layer partition to which said each of the partitions belongs to generate a prediction image.~~

The moving image encoding device according to claim 6, wherein when the coding mode selected by the encoding controlling unit is an intra prediction mode, the prediction image generating unit carries out an intra-frame prediction process using pixels adjacent to said each of the coding blocks which is generated through the division by the block dividing unit or pixels adjacent to a higher layer coding block to which said each of the coding blocks belongs to generate a prediction image.

[8] (amended) ~~A moving image encoding method comprising:~~

~~an encoding control processing step of an encoding controlling unit determining a maximum size of a block to be encoded which is a unit to be processed at a time when a prediction process is carried out, and also determining a hierarchy number upper limit at a time when a block to be encoded having the maximum size is divided hierarchically, and selecting an encoding mode corresponding to each of blocks to be encoded into which the block to be encoded having the maximum size is divided hierarchically from one or more available encoding modes;~~

~~a block division processing step of a block dividing unit dividing an inputted image into blocks to be encoded each having the maximum size determined in said encoding control processing step, and also dividing each of said blocks to be encoded hierarchically until its hierarchy number reaches the hierarchy~~

~~number upper limit determined in said encoding control processing step;~~

~~a prediction image generation processing step of a prediction image generating unit carrying out a prediction process corresponding to the encoding mode selected in said encoding control processing step on each of blocks to be encoded into which each of said blocks to be encoded having the maximum size is divided in said block division processing step to generate a prediction image;~~

~~a difference image generation processing step of a difference image generating unit generating a difference image between said each of the blocks to be encoded into which the inputted image is divided in said block division processing step, and the prediction image generated in said prediction image generation processing step;~~

~~an image compression processing step of an image compression unit compressing the difference image generated in said difference image generation processing step, and outputting compressed data of said difference image; and~~

~~a variable length encode processing step of a variable length encoding unit variable length encoding the compressed data outputted in said image compression processing step and the encoding mode selected in said encoding control processing step to generate a bitstream into which encoded data of said compressed data and encoded data of said encoding mode are multiplexed, wherein~~

~~said variable length encoding processing step includes a step of, when variable length encoding intra prediction parameters which are used when a prediction image is generated by said prediction image generating unit, in addition to the~~

~~compressed data and the encoding mode, to multiplex encoded data~~  
~~of said intra prediction parameters into said bitstream,~~  
~~variable length encoding an intra merge flag showing whether~~  
~~intra prediction parameters for each of partitions generated~~  
5 ~~through the division in said block division processing step are~~  
~~same as those for a partition adjacent to said partition, and,~~  
~~when said intra prediction parameters for said each of~~  
~~partitions are the same as those for an adjacent partition,~~  
~~variable length encoding an intra merge direction for~~  
10 ~~specifying said adjacent partition, otherwise~~  
~~variable length encoding the intra prediction parameters for~~  
~~said each of partitions generated through the division by said~~  
~~block division processing step.~~

The moving image encoding device according to claim 7,  
15 wherein when the coding block which is generated through the  
 division by the block dividing unit is further divided into  
 partitions, the encoding controlling unit selects a coding mode  
 corresponding to the coding block to which each of the  
 partitions belongs or a coding mode corresponding to each of  
20 the partitions, and, when the coding mode selected by said  
 encoding controlling unit is an intra prediction mode, the  
 prediction image generating unit carries out an intra-frame  
 prediction process using pixels adjacent to said each of the  
 partitions which is generated through the division by said block  
25 dividing unit or pixels adjacent to a higher layer partition  
 to which said each of the partitions belongs to generate a  
 prediction image.

[9] (amended) ~~A moving image decoding method comprising:~~  
~~a variable length decode processing step of a variable~~  
30 ~~length decoding unit specifying a maximum size of a block to~~

~~be encoded which is a unit to be processed at a time when a prediction process is carried out, and also determining a number of hierarchical layers of blocks to be encoded into which a block to be encoded having the maximum size is divided hierarchically to specify encoded data associated with each of blocks to be encoded having the maximum size and encoded data associated with each of blocks to be encoded into which each of the blocks to be encoded having the maximum size is divided hierarchically from encoded data multiplexed into a bitstream, and variable length decoding the encoded data associated with said each of the blocks to be encoded to acquire compressed data and an encoding mode which are associated with said each of the blocks to be encoded;~~

~~a prediction image generation processing step of a prediction image generating unit carrying out a prediction process corresponding to said encoding mode on a block to be encoded specified in said variable length decode processing step to generate a prediction image;~~

~~a difference image generation processing step of a difference image generating unit generating a pre-compressed difference image from the compressed data associated with the block to be encoded variable length decoded in said variable length decode processing step; and~~

~~a decoded image generation processing step of a decoded image generating unit adding the difference image generated in said difference image generation processing step and the prediction image generated in said prediction image generation processing step to generate a decoded image, wherein~~

~~said variable length decode processing step includes a step of variable length decoding encoded data associated with~~

~~a partition to acquire an intra merge flag showing whether or  
not intra prediction parameters for a partition adjacent to said  
partition are same as those for said partition, and, when said  
intra merge flag shows that the intra prediction parameters for  
5 a partition adjacent to said partition are same as those for  
said partition, variable-length-decoding said encoded data to  
acquire an intra merge direction for specifying said adjacent  
partition, otherwise variable-length-decoding said encoded  
data to acquire the intra prediction parameters for said  
10 partition.~~

The moving image encoding device according to claim 8,  
wherein when a higher layer coding block or a higher layer  
partition exists, an intra coding mode using pixels adjacent  
to a higher layer coding block or a higher layer partition is  
15 prepared in the one or more available coding modes, and, when  
an intra prediction mode is selected by said encoding  
controlling unit, the prediction image generating unit carries  
out an intra-frame prediction process using pixels adjacent to  
a higher layer coding block or a higher layer partition to which  
20 said each of the coding blocks or the partitions, which is  
generated through the division by the block dividing unit,  
belongs to generate a prediction image.

[10] (added) A moving image decoding device comprising:

a variable length decoding unit for specifying coded data  
25 associated with each of coding blocks into which an image is  
divided hierarchically from coded data multiplexed into a  
bitstream, and for variable-length-decoding the coded data to  
acquire a coding mode associated with said each of the coding  
blocks;

30 a prediction image generating unit for carrying out a

prediction process corresponding to said coding mode on the coding block specified by said variable length decoding unit to generate a prediction image; and

5 a decoded image generating unit for adding a pre-compressed difference image which is generated from data which are acquired by decoding the coded data associated with said each of the coding blocks which is specified by said variable length decoding unit and the prediction image generated by said prediction image generating unit to generate  
10 a decoded image, wherein

said variable length decoding unit variable-length-decodes coded data associated with a partition to acquire an intra merge flag indicating whether or not an intra prediction parameter for said partition is identical to that  
15 for a partition adjacent to said partition, and, when said intra merge flag indicates that the intra prediction parameter for said partition is identical to that for a partition adjacent to said partition, variable-length-decodes said coded data to acquire an intra merge direction for specifying said adjacent  
20 partition, otherwise variable-length-decodes said coded data to acquire the intra prediction parameter for said partition.

[11] (added) The moving image decoding device according to claim 10, said moving image decoding device includes a difference image generating unit for generating a pre-compressed  
25 difference image from the compressed data associated with the coding block variable-length-decoded by said variable length decoding unit.

[12] (added) The moving image decoding device according to claim 10, wherein when the coding mode selected by the encoding  
30 controlling unit is an intra prediction mode, the prediction

image generating unit carries out an intra-frame prediction process using pixels adjacent to the coding block which is specified by said variable length decoding unit or pixels adjacent to a higher layer coding block to which said coding  
5 block belongs to generate a prediction image.

[13] (added) The moving image decoding device according to claim 12, wherein when the coding block which is generated through the hierarchical division is further divided into partitions, the variable length decoding unit specifies coded data  
10 associated with each of said partitions from the coded data multiplexed into the bitstream and variable-length-decodes said coded data to acquire compressed data and a coding mode associated with said each of the partitions, and, when the coding mode variable-length-decoded by said variable length  
15 decoding unit is an intra prediction mode, the prediction image generating unit carries out an intra-frame prediction process using pixels adjacent to said each of the partitions or pixels adjacent to a higher layer partition to which said each of the partitions belongs to generate a prediction image.

[14] (added) A moving image encoding method comprising: a  
20 variable length encode processing step of a variable length encoding unit variable-length-encoding a coding mode corresponding to each of coding blocks into which an image is divided hierarchically to generate a bitstream into which coded  
25 data of said coding mode is multiplexed, wherein

said variable length encode processing step includes a step of, when variable-length-encoding an intra prediction parameter which is used when carrying out a prediction process corresponding to said coding mode to generate a prediction image,  
30 in addition to said coding mode, to multiplex coded data of said

intra prediction parameter into said bitstream,  
variable-length-encoding an intra merge flag indicating  
whether an intra prediction parameter for a partition generated  
through said division is identical to that for a partition  
5 adjacent to said partition, and, when said intra prediction  
parameter for said partition is identical to that for an  
adjacent partition, variable-length-encodes an intra merge  
direction for specifying said adjacent partition, otherwise  
variable-length-encoding the intra prediction parameter for  
10 said partition generated through said division.

[15] (added) A moving image decoding method comprising:

a variable length decode processing step of a variable  
length decoding unit specifying coded data associated with each  
of coding blocks into which an image is divided hierarchically  
15 from coded data multiplexed into a bitstream, and  
variable-length-decoding the coded data to acquire a coding  
mode associated with said each of the coding blocks;

a prediction image generation processing step of a  
prediction image generating unit carrying out a prediction  
20 process corresponding to said coding mode on the coding block  
specified in said variable length decode processing step to  
generate a prediction image; and

a decoded image generation processing step of a decoded  
image generating unit adding a pre-compressed difference image  
25 which is generated from data which are acquired by decoding the  
coded data associated with said each of the coding blocks which  
is specified in said variable length decode processing step and  
the prediction image generated in said prediction image  
generation processing step to generate a decoded image, wherein

30 said variable length decode processing step includes a

step of variable-length-decoding coded data associated with a partition to acquire an intra merge flag indicating whether or not an intra prediction parameter for said partition is identical to that for a partition adjacent to said partition, and, when said intra merge flag indicates that the intra prediction parameter for said partition is identical to that for a partition adjacent to said partition, variable-length-decoding said coded data to acquire an intra merge direction for specifying said adjacent partition, otherwise variable-length-decoding said coded data to acquire the intra prediction parameter for said partition.


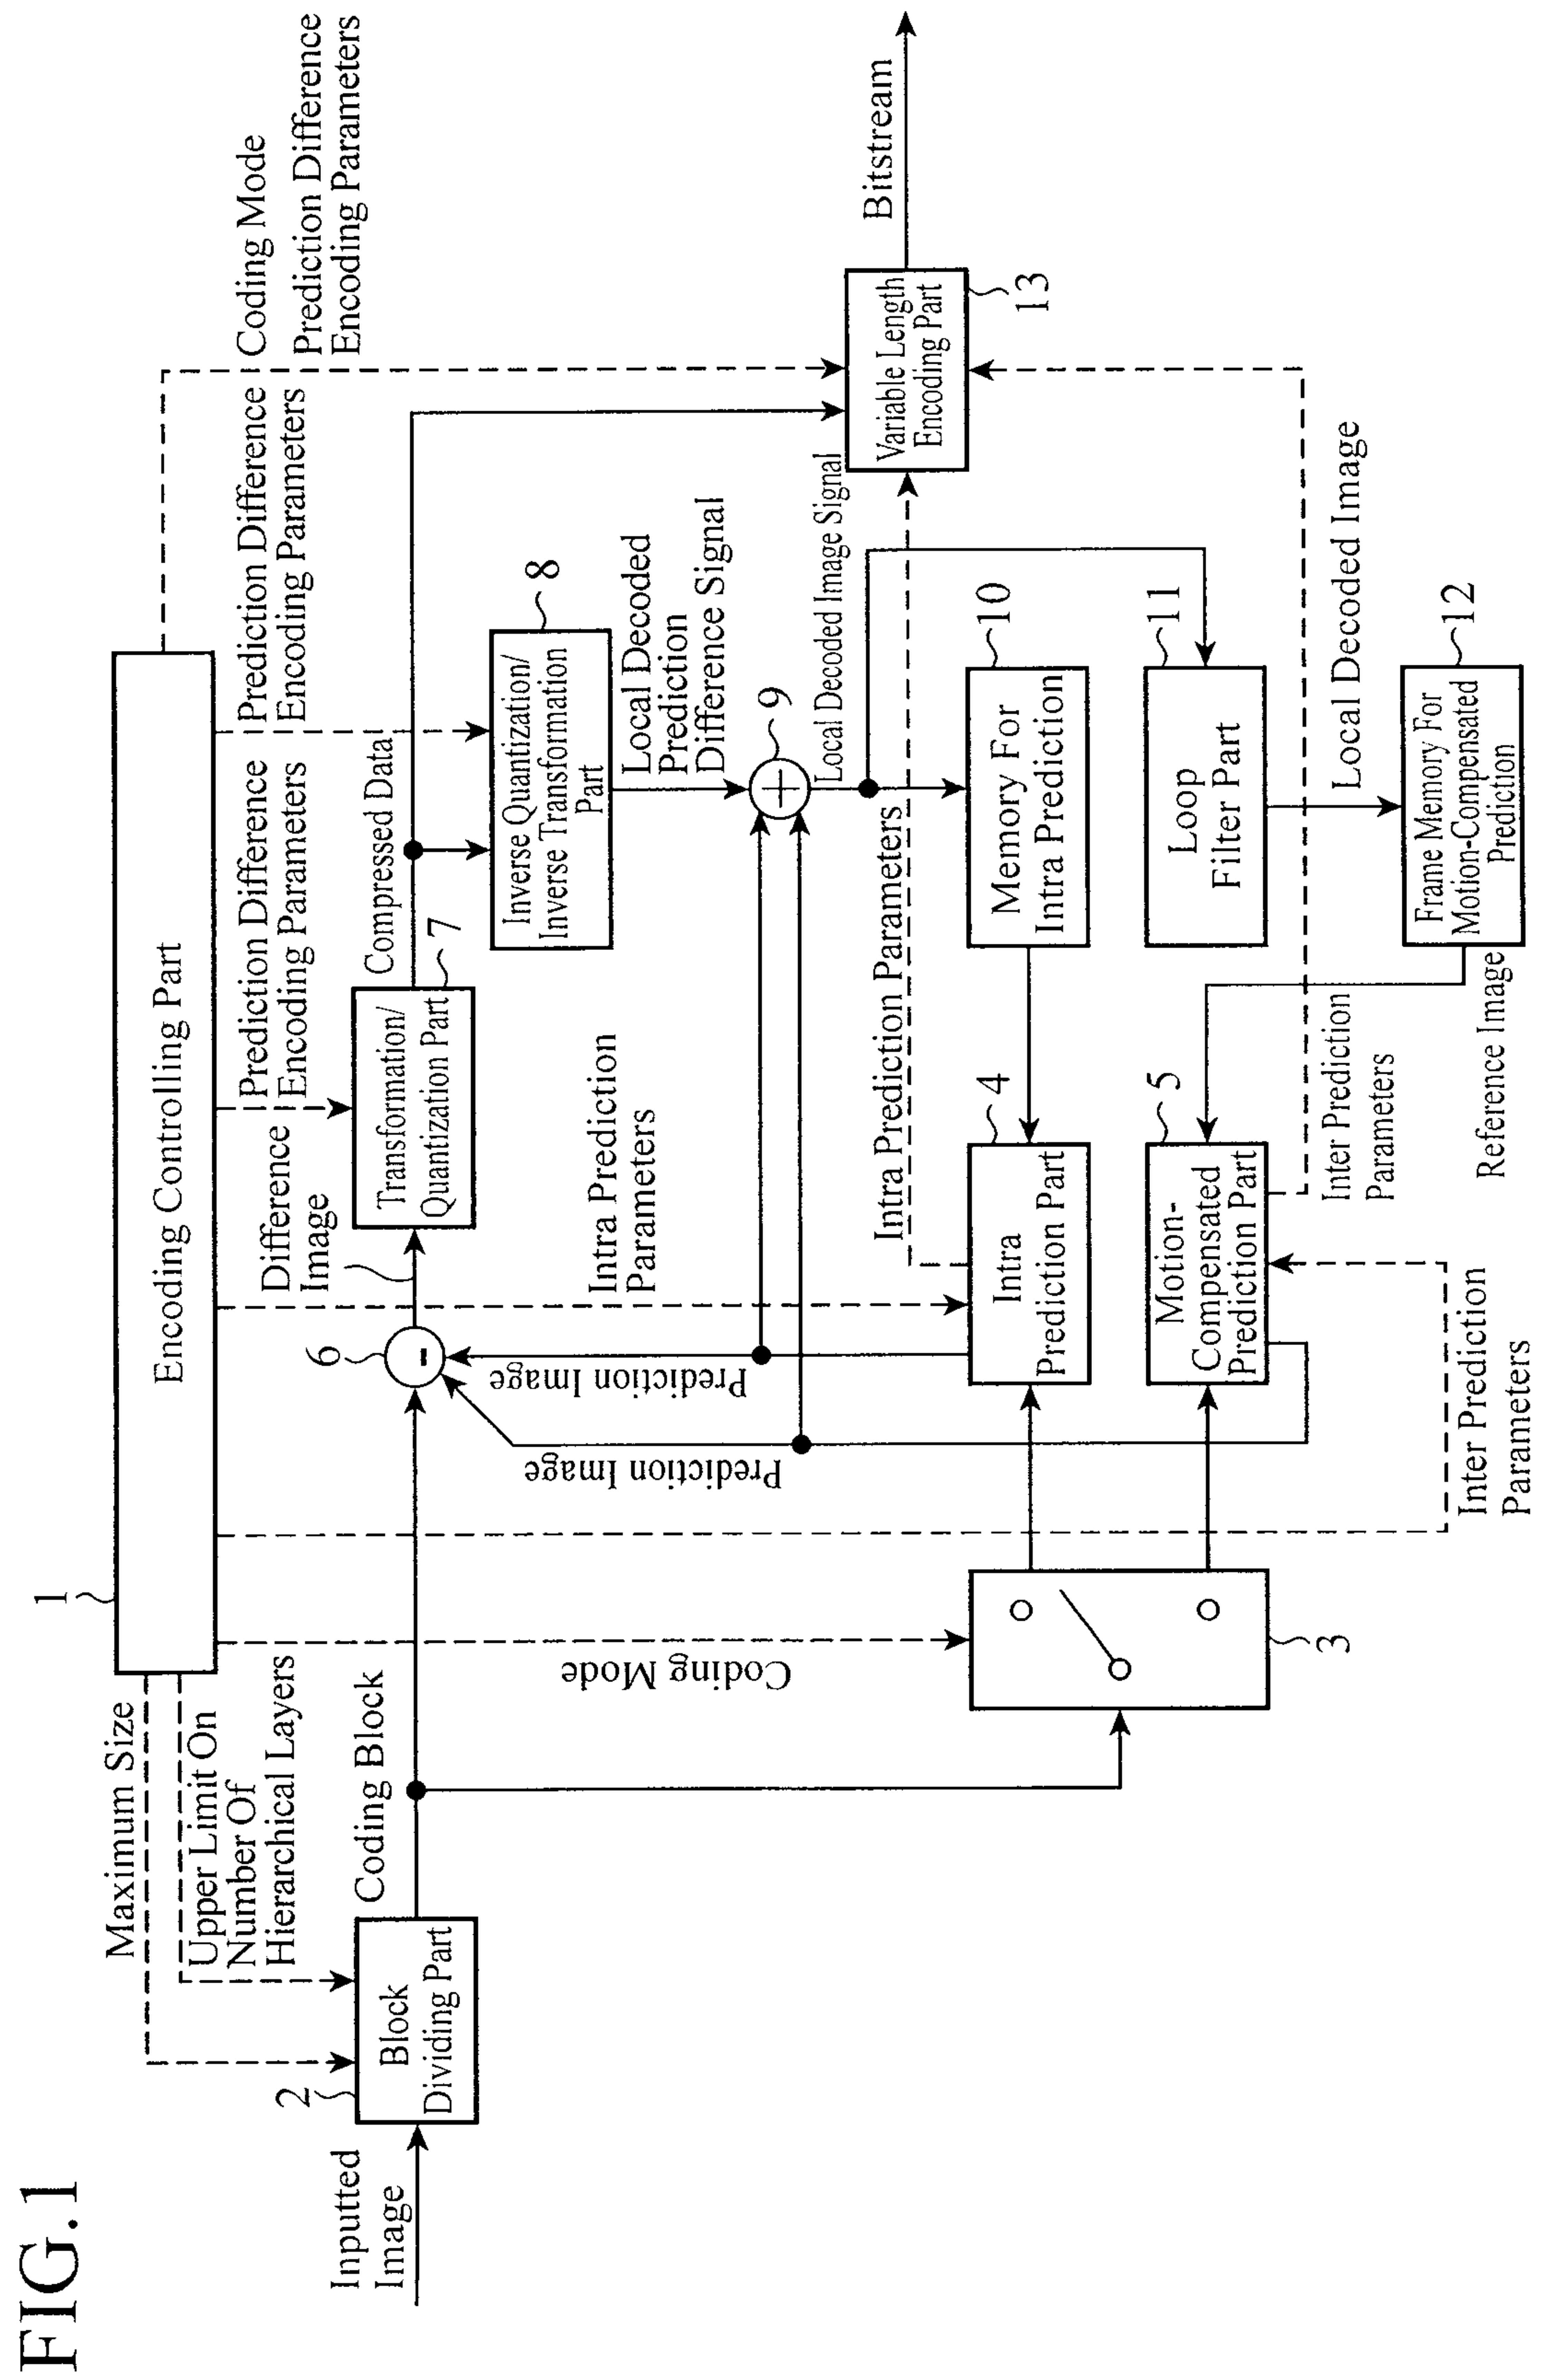


FIG.2

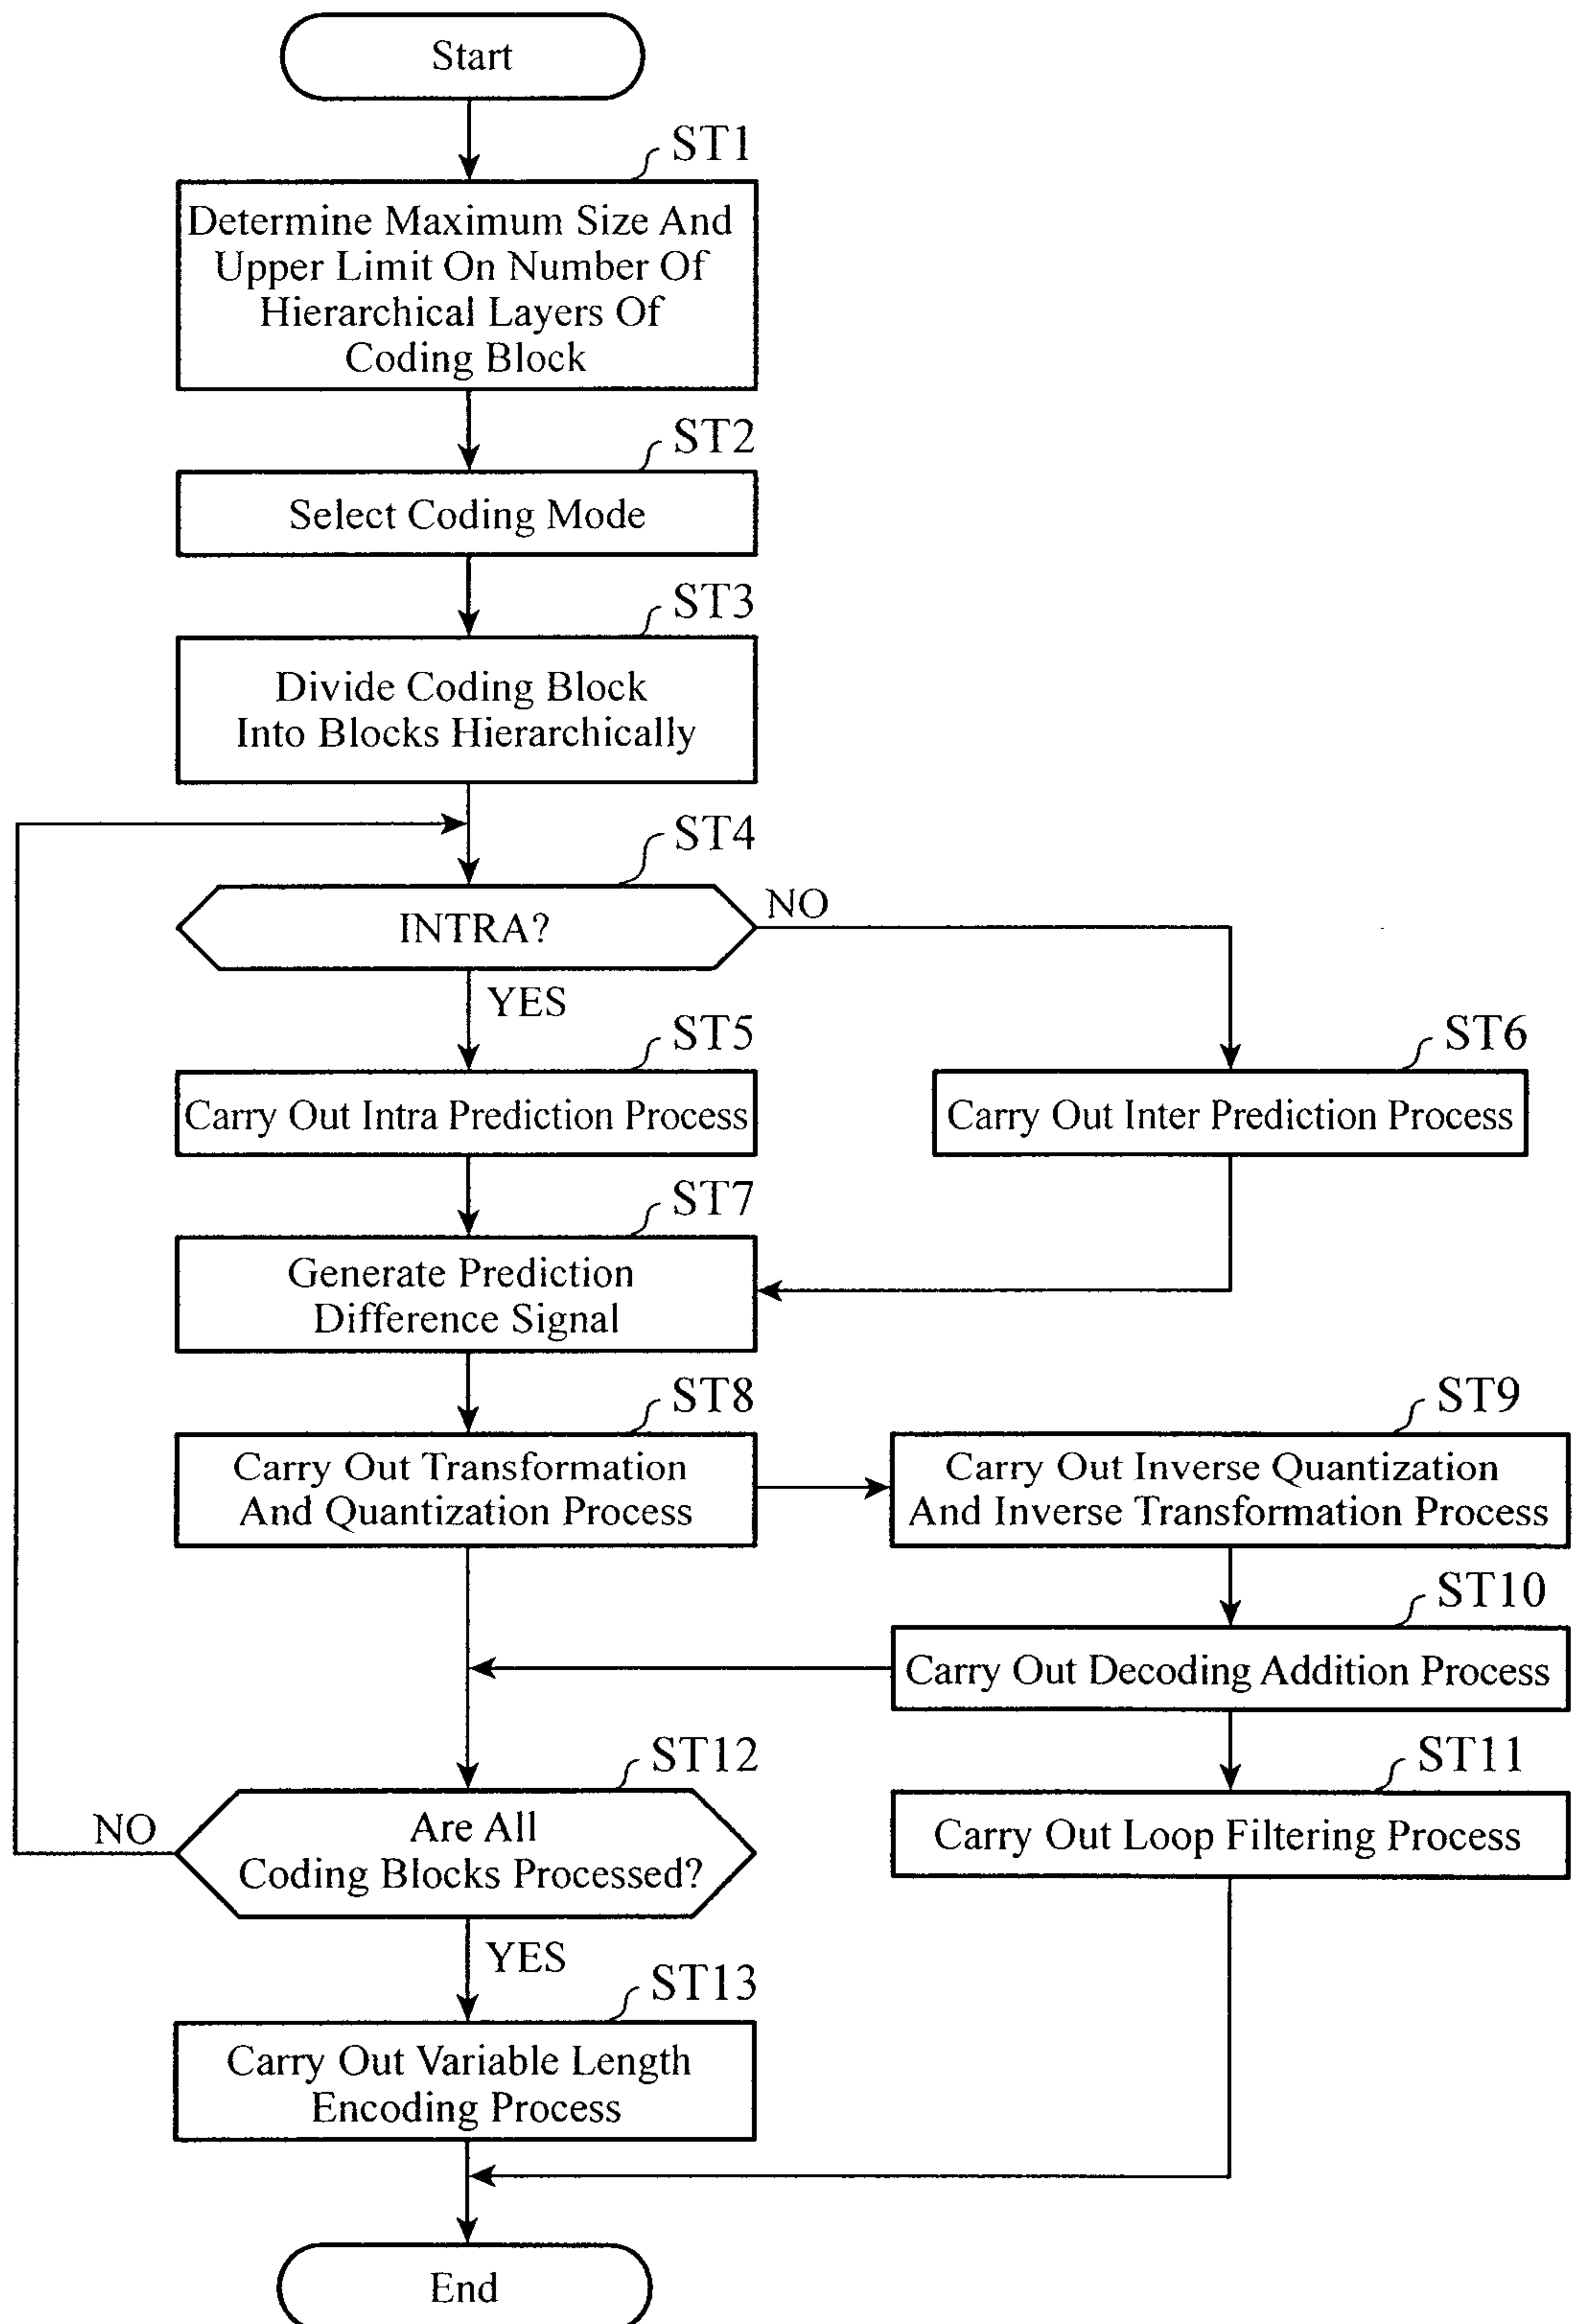

3/14

FIG.3


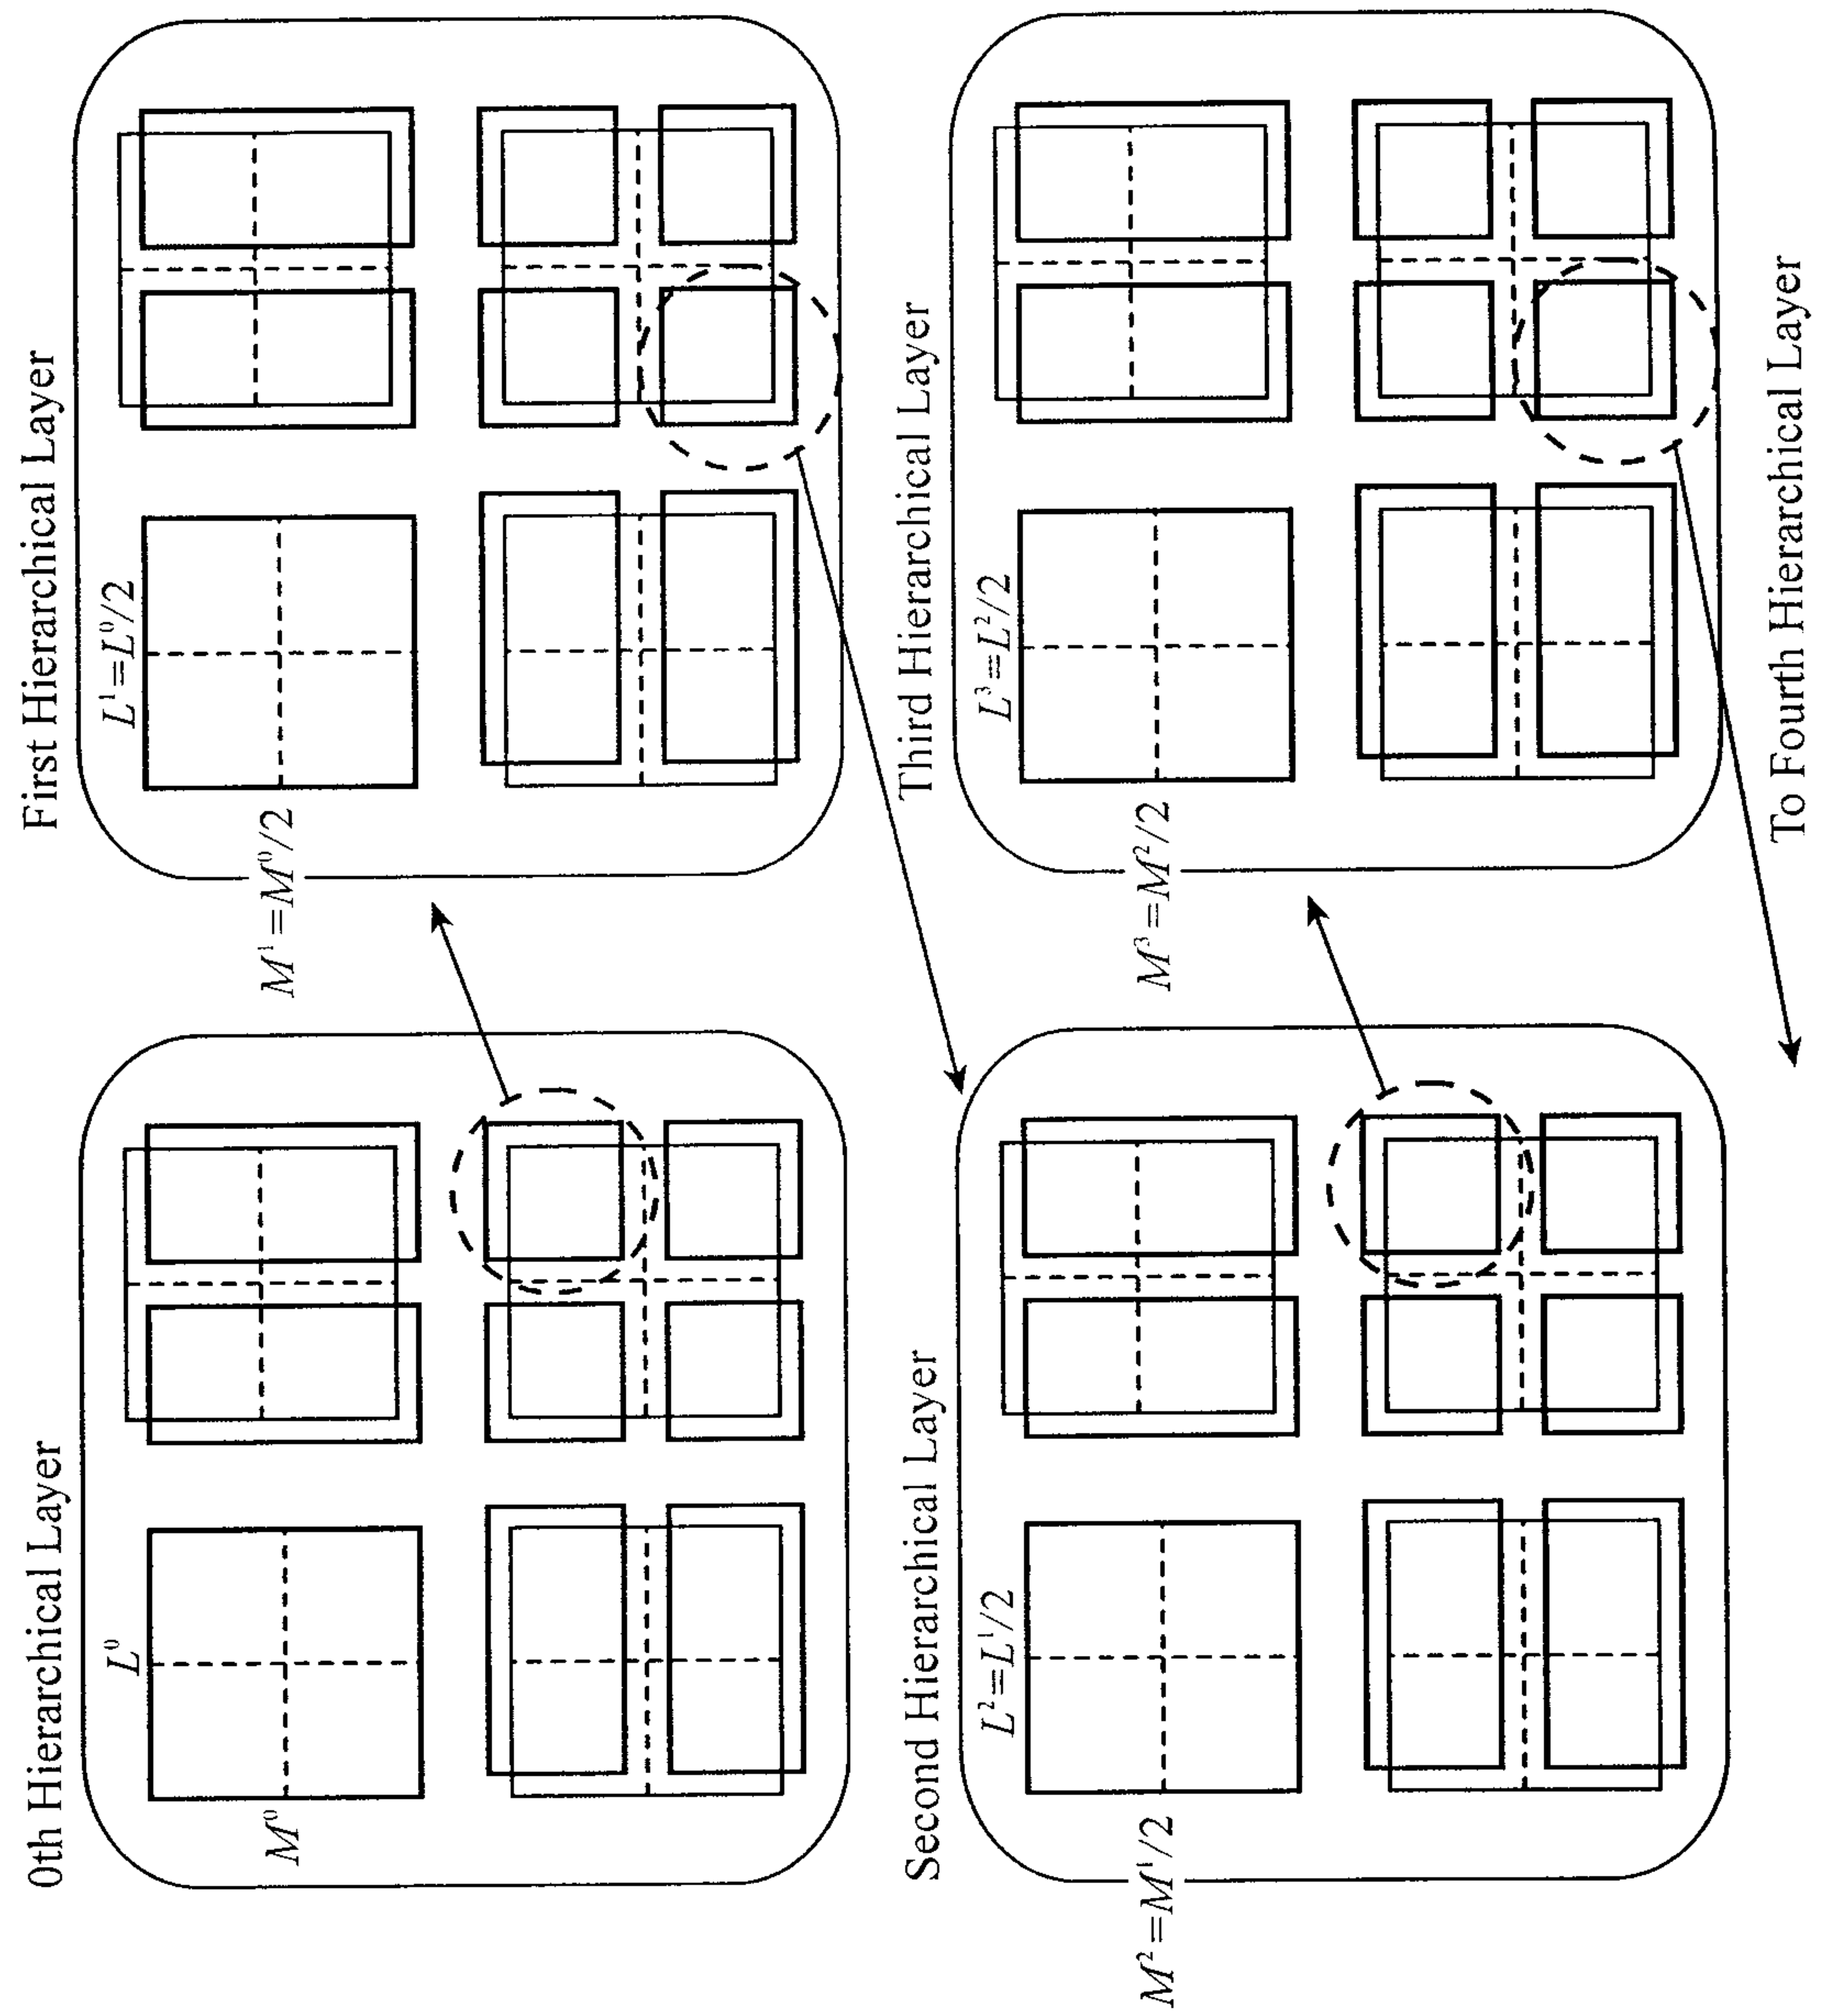


FIG.4

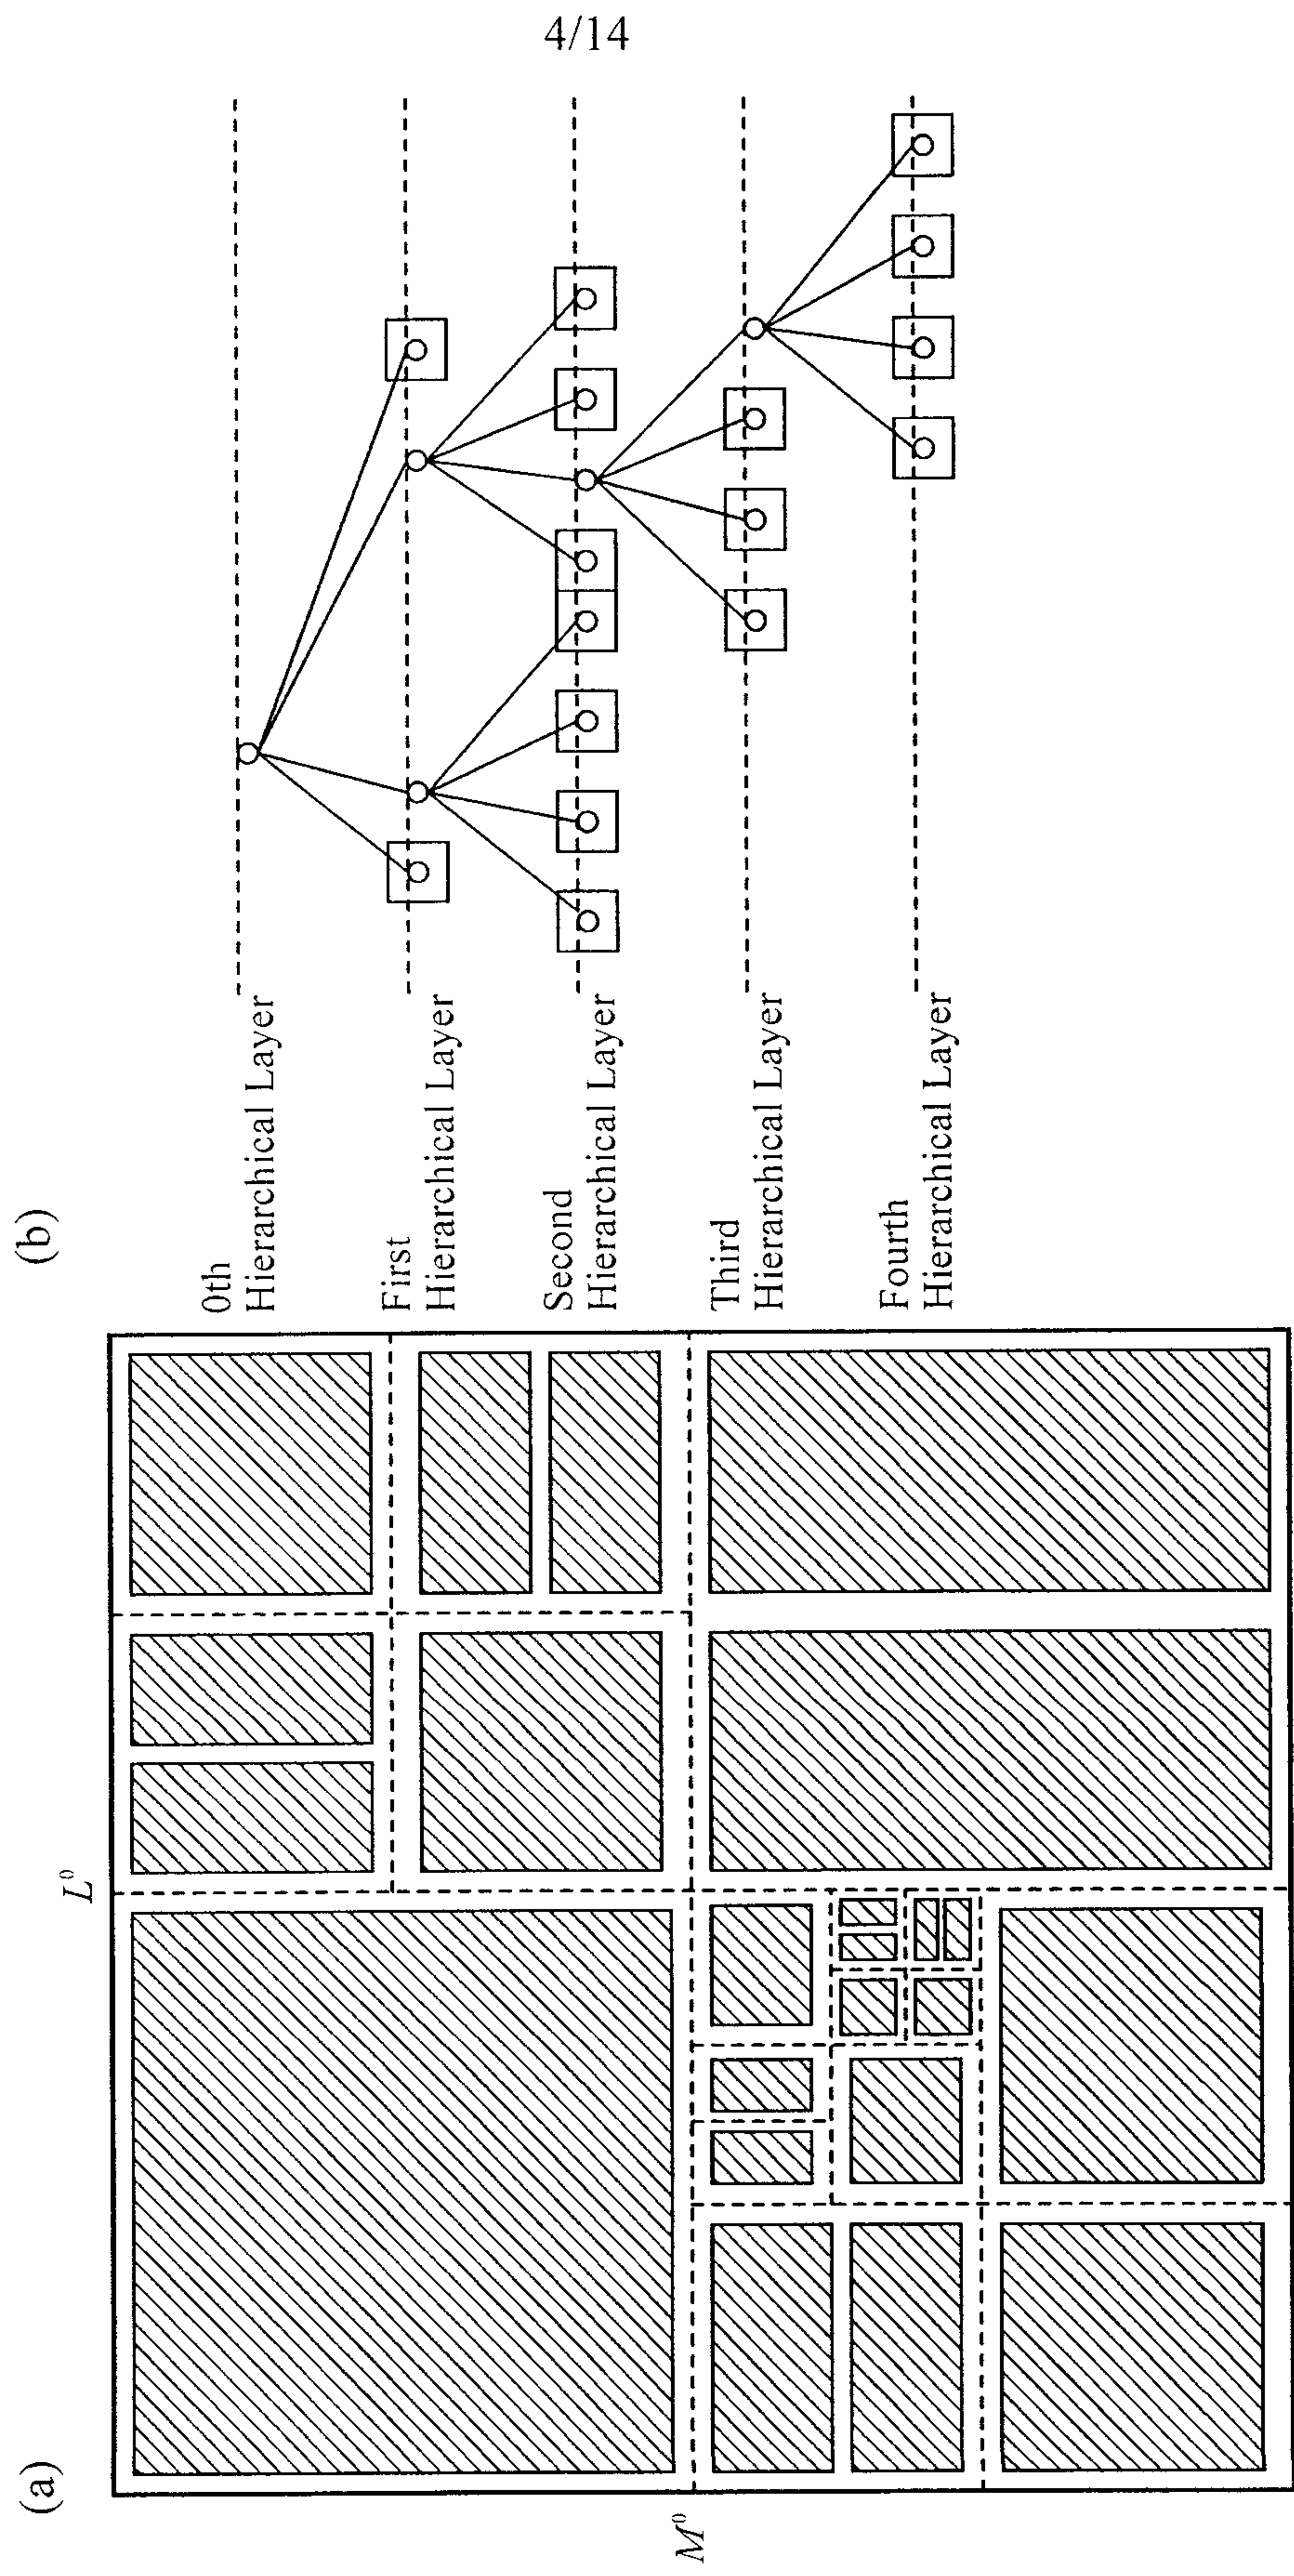

5/14

FIG.5

| Intra Prediction Mode Index | Intra Prediction Mode |
|-----------------------------|-----------------------|
| 0                           | Vertical Prediction   |
| 1                           | Horizontal Prediction |
| 2                           | Average Prediction    |
| 3~N-1                       | Diagonal Prediction   |

N: Number Of Intra Prediction Modes


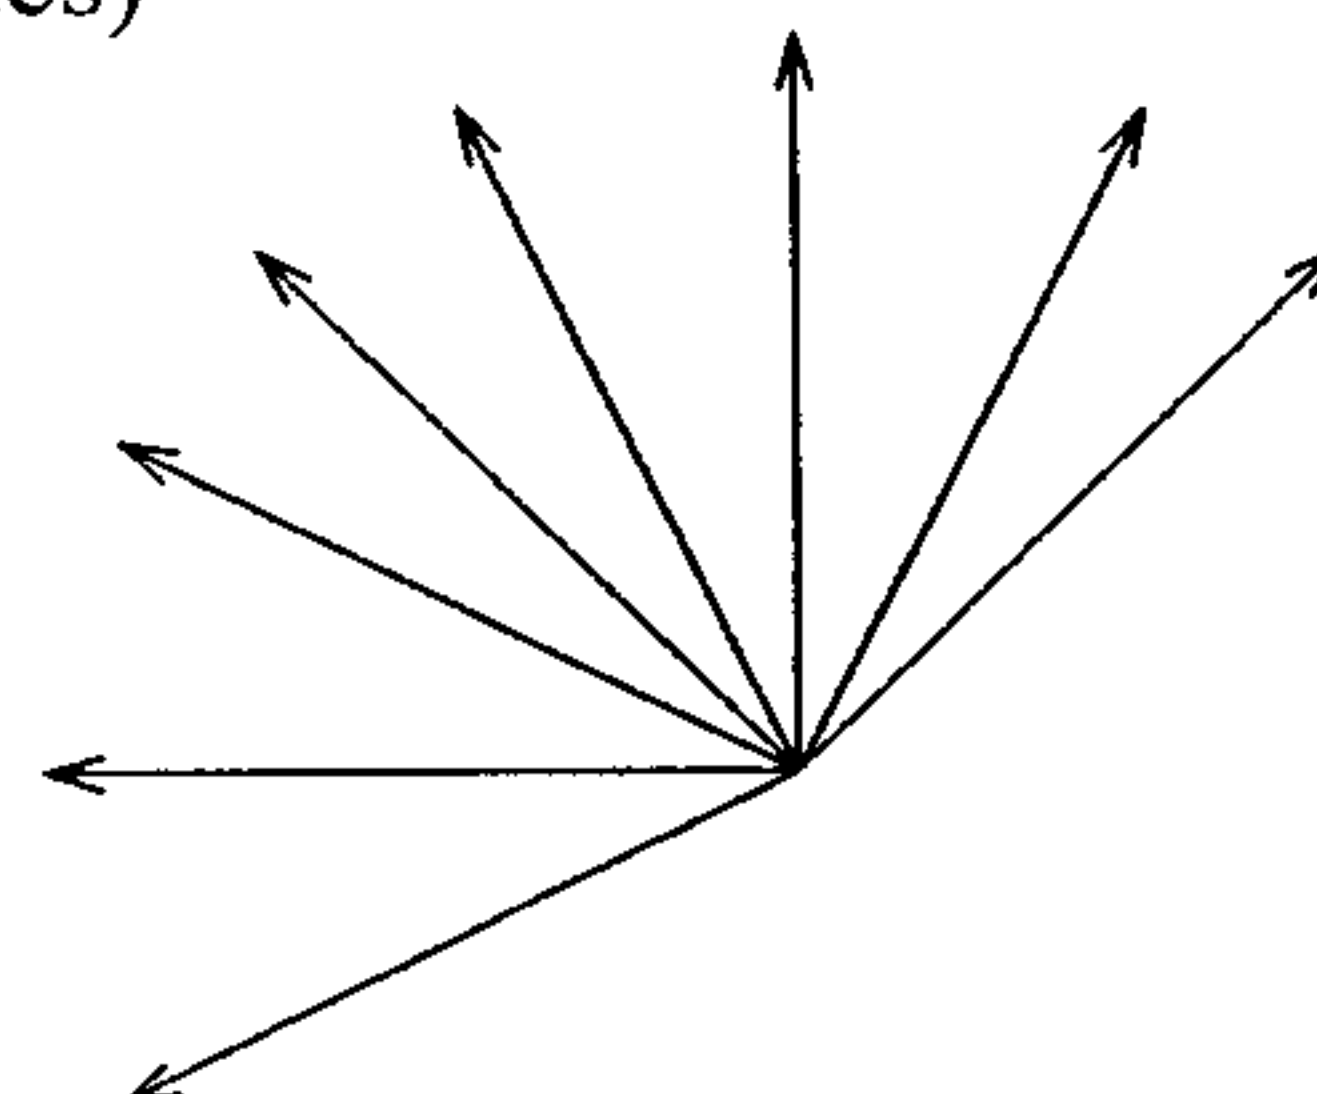
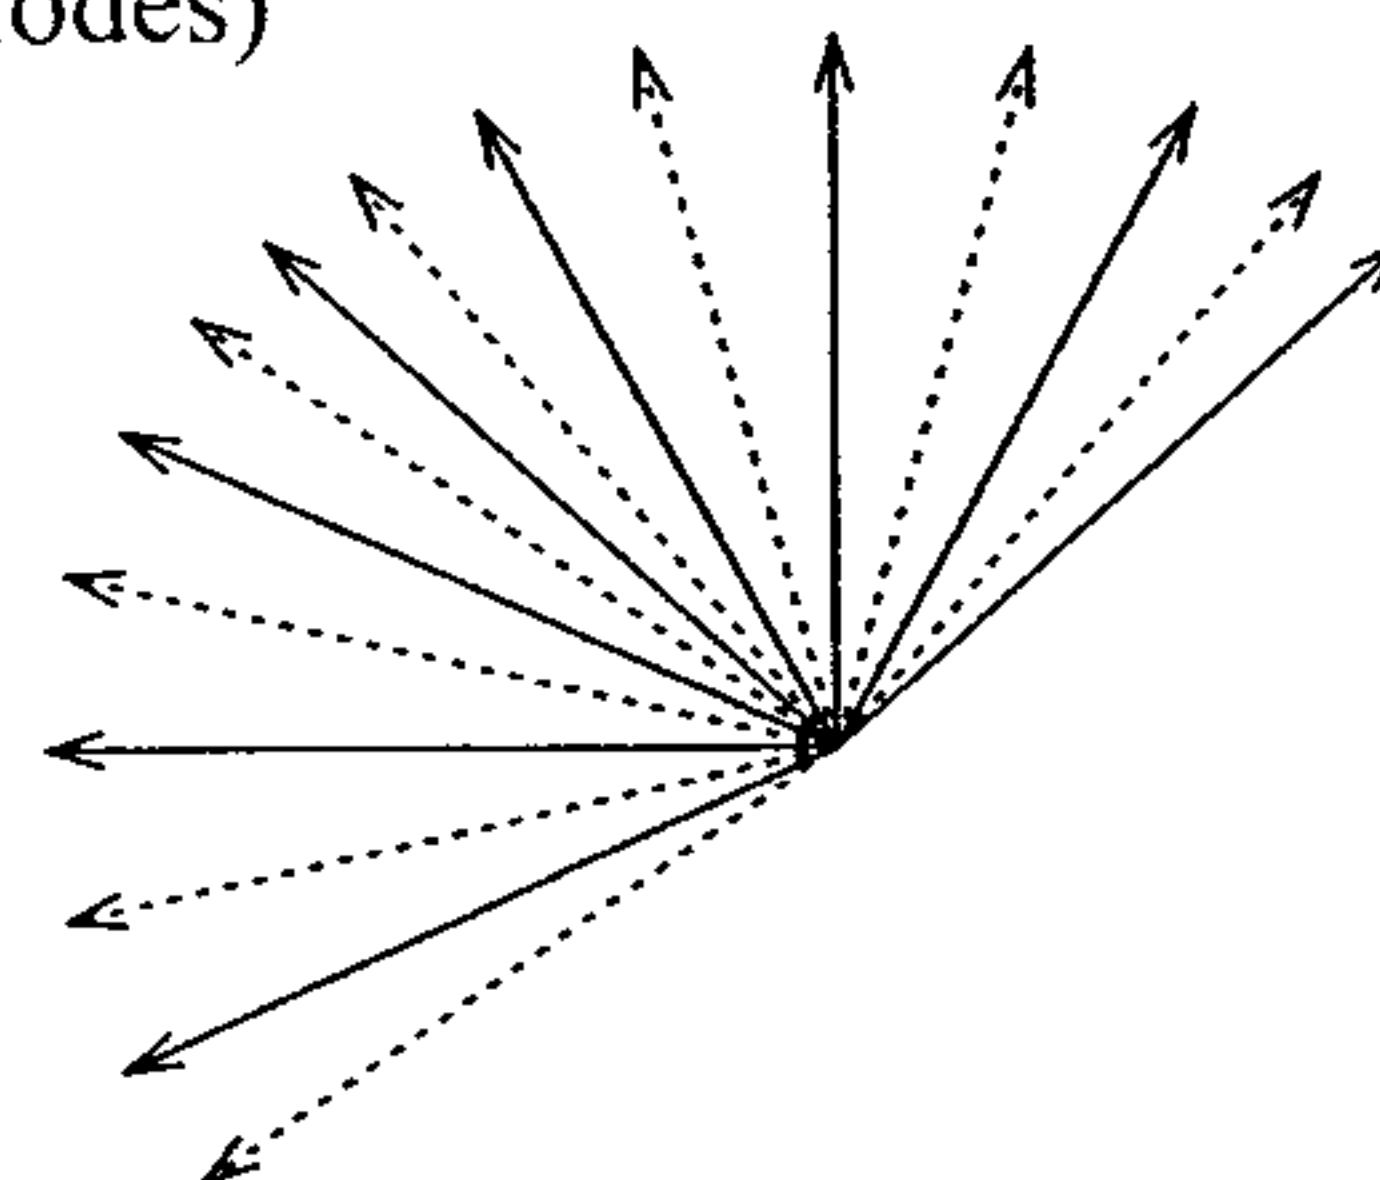
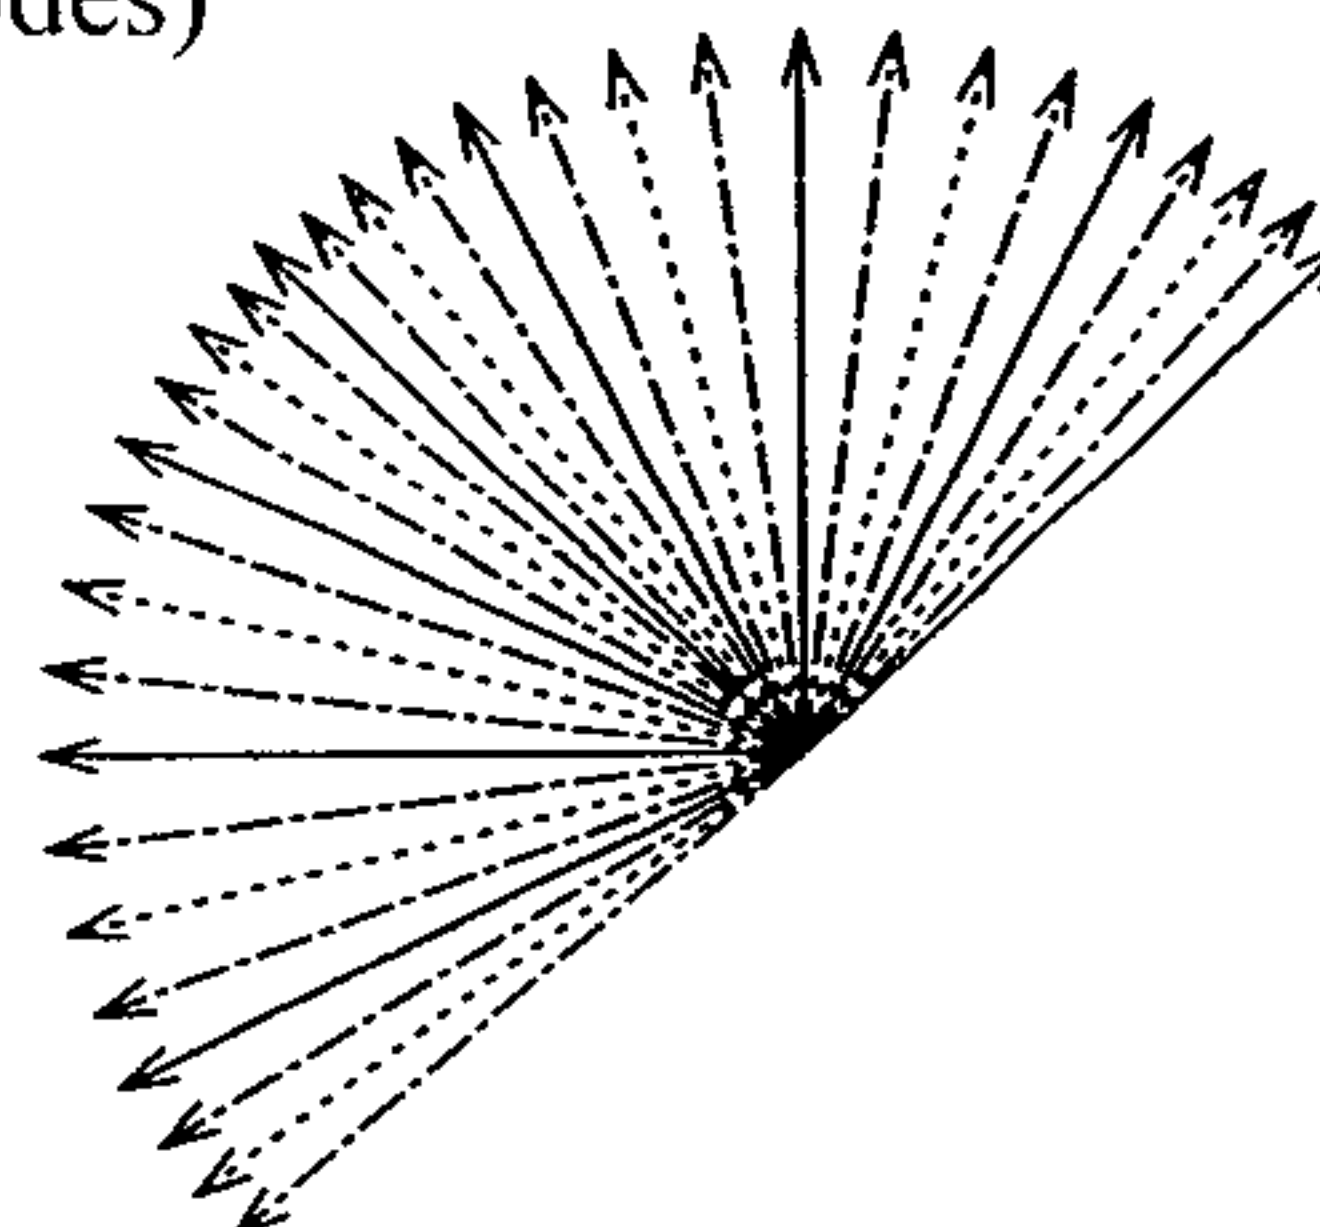
Directional Predictions in Case of N=9  
(8 Modes)Directional Predictions in Case of N=17  
(16 Modes)Directional Prediction in Case of N=33  
(32 Modes)

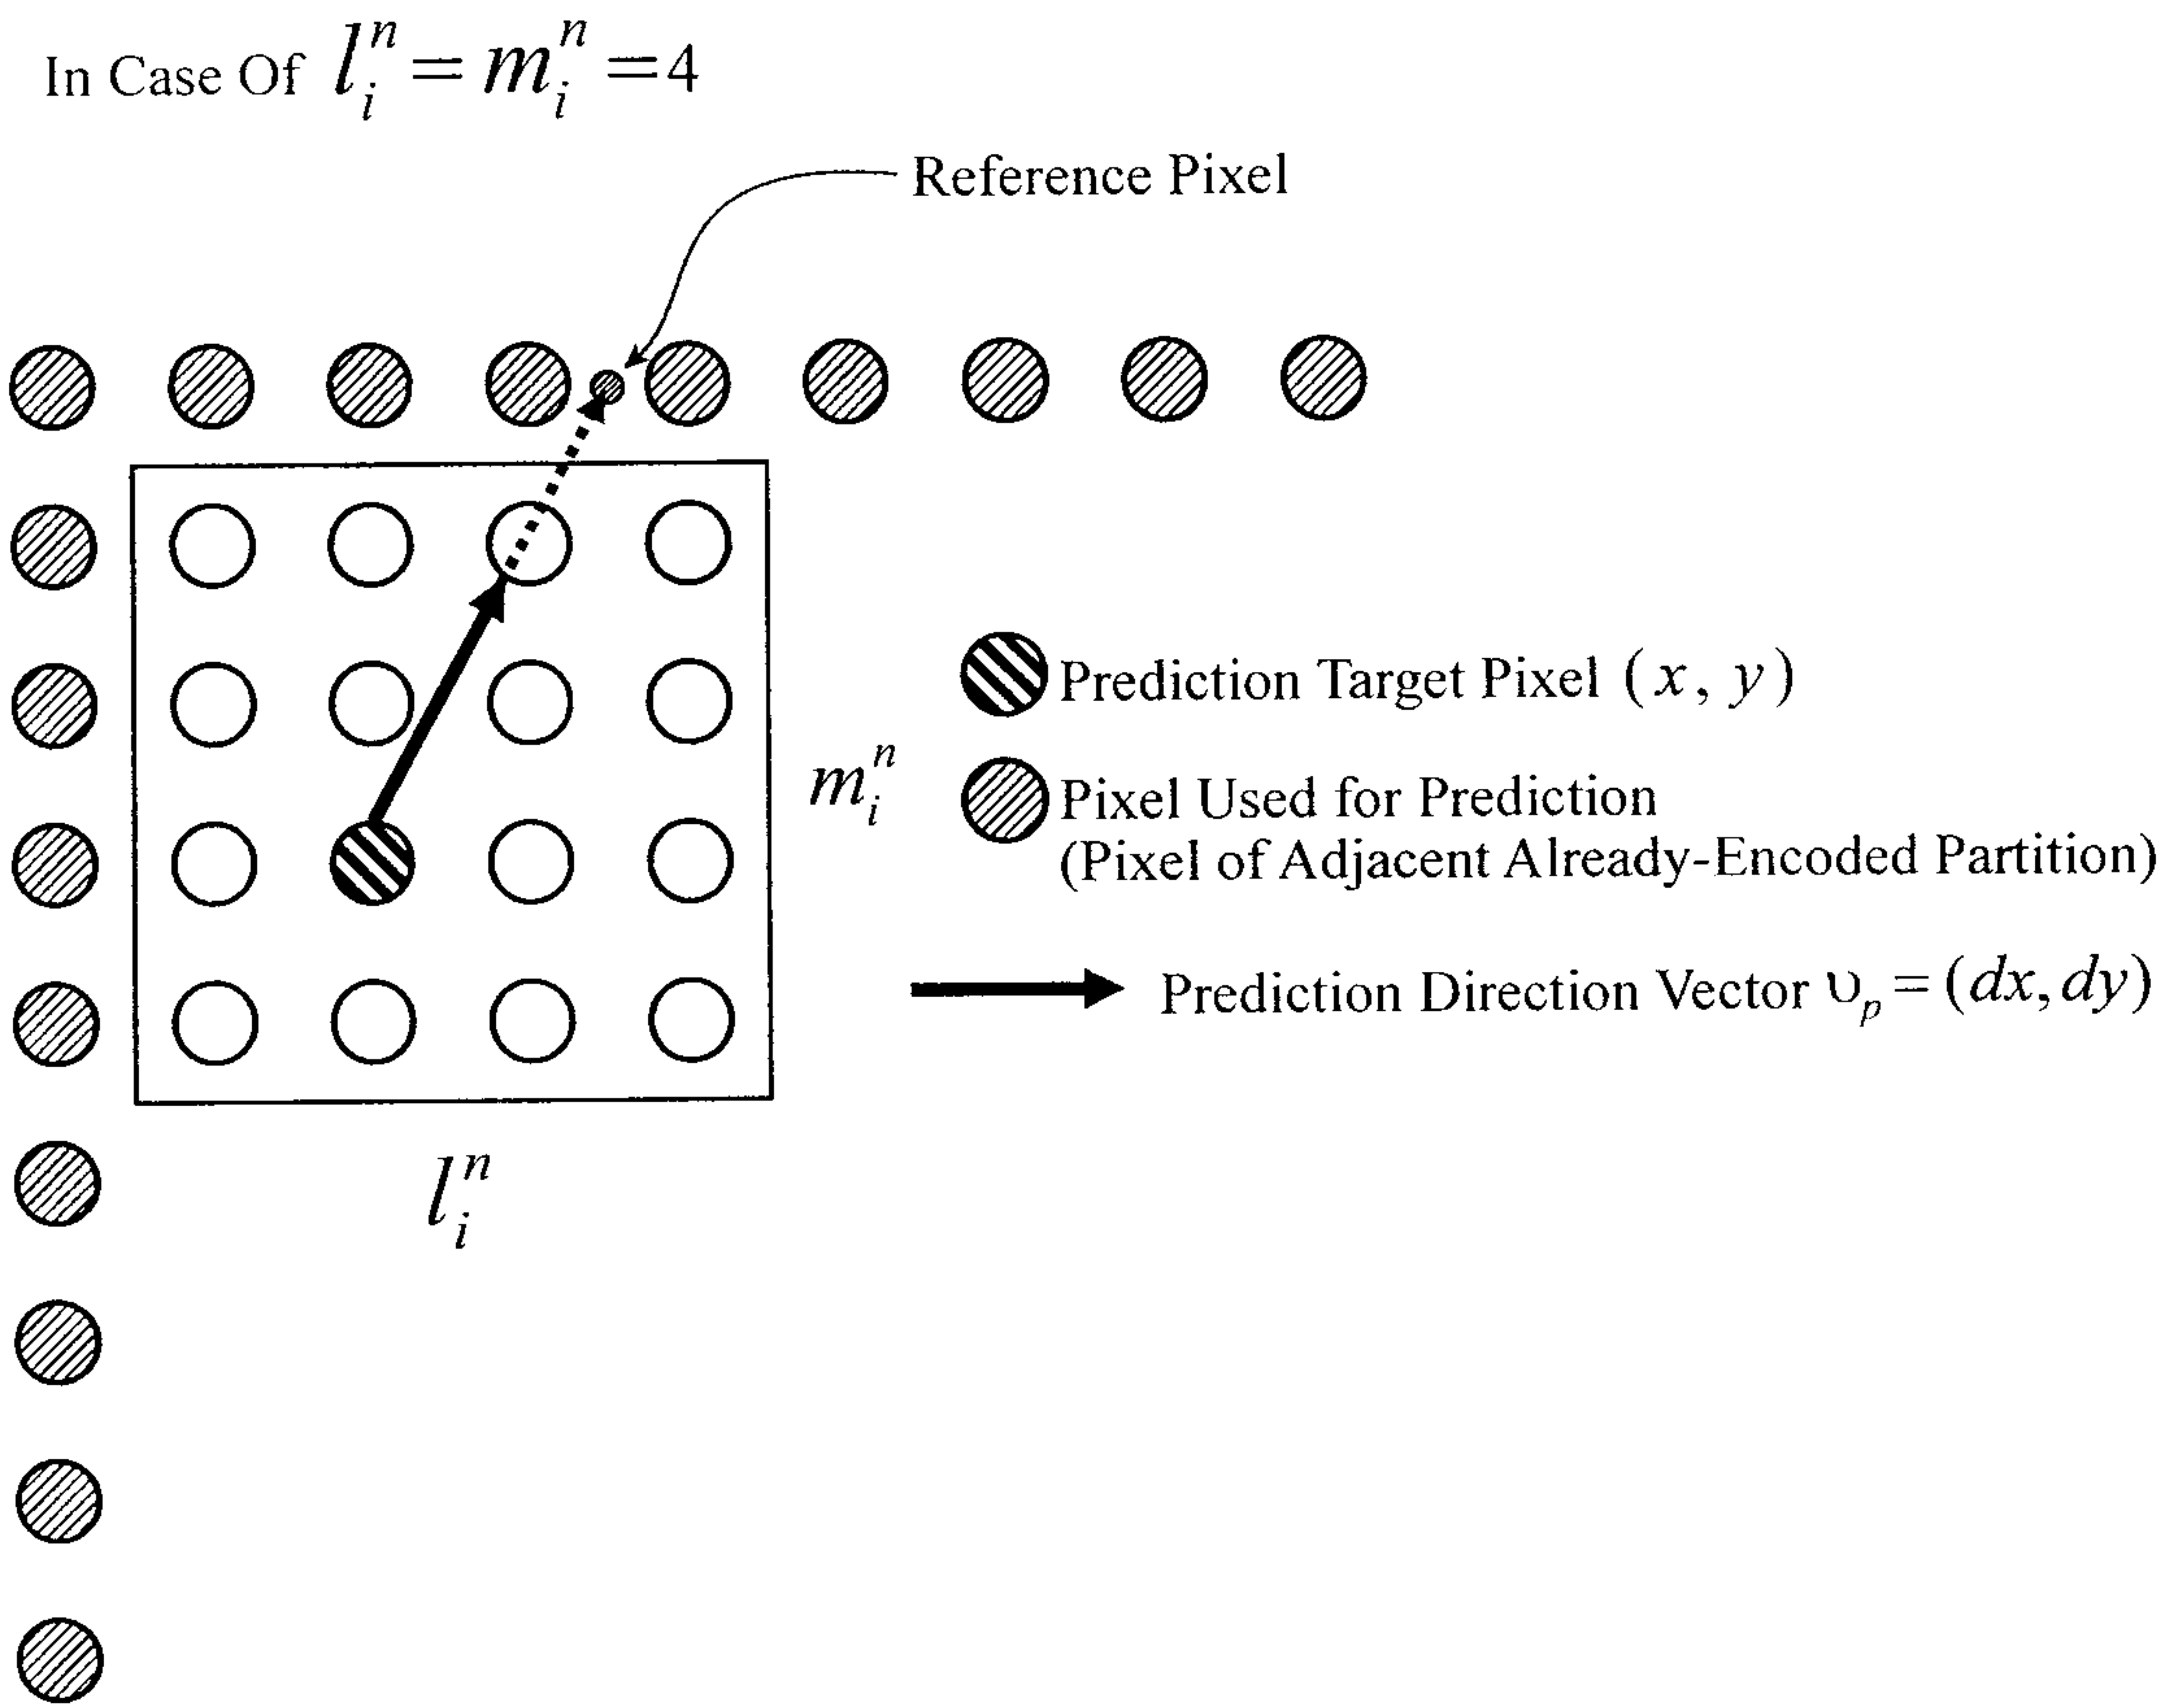FIG.6



7/14

FIG.7

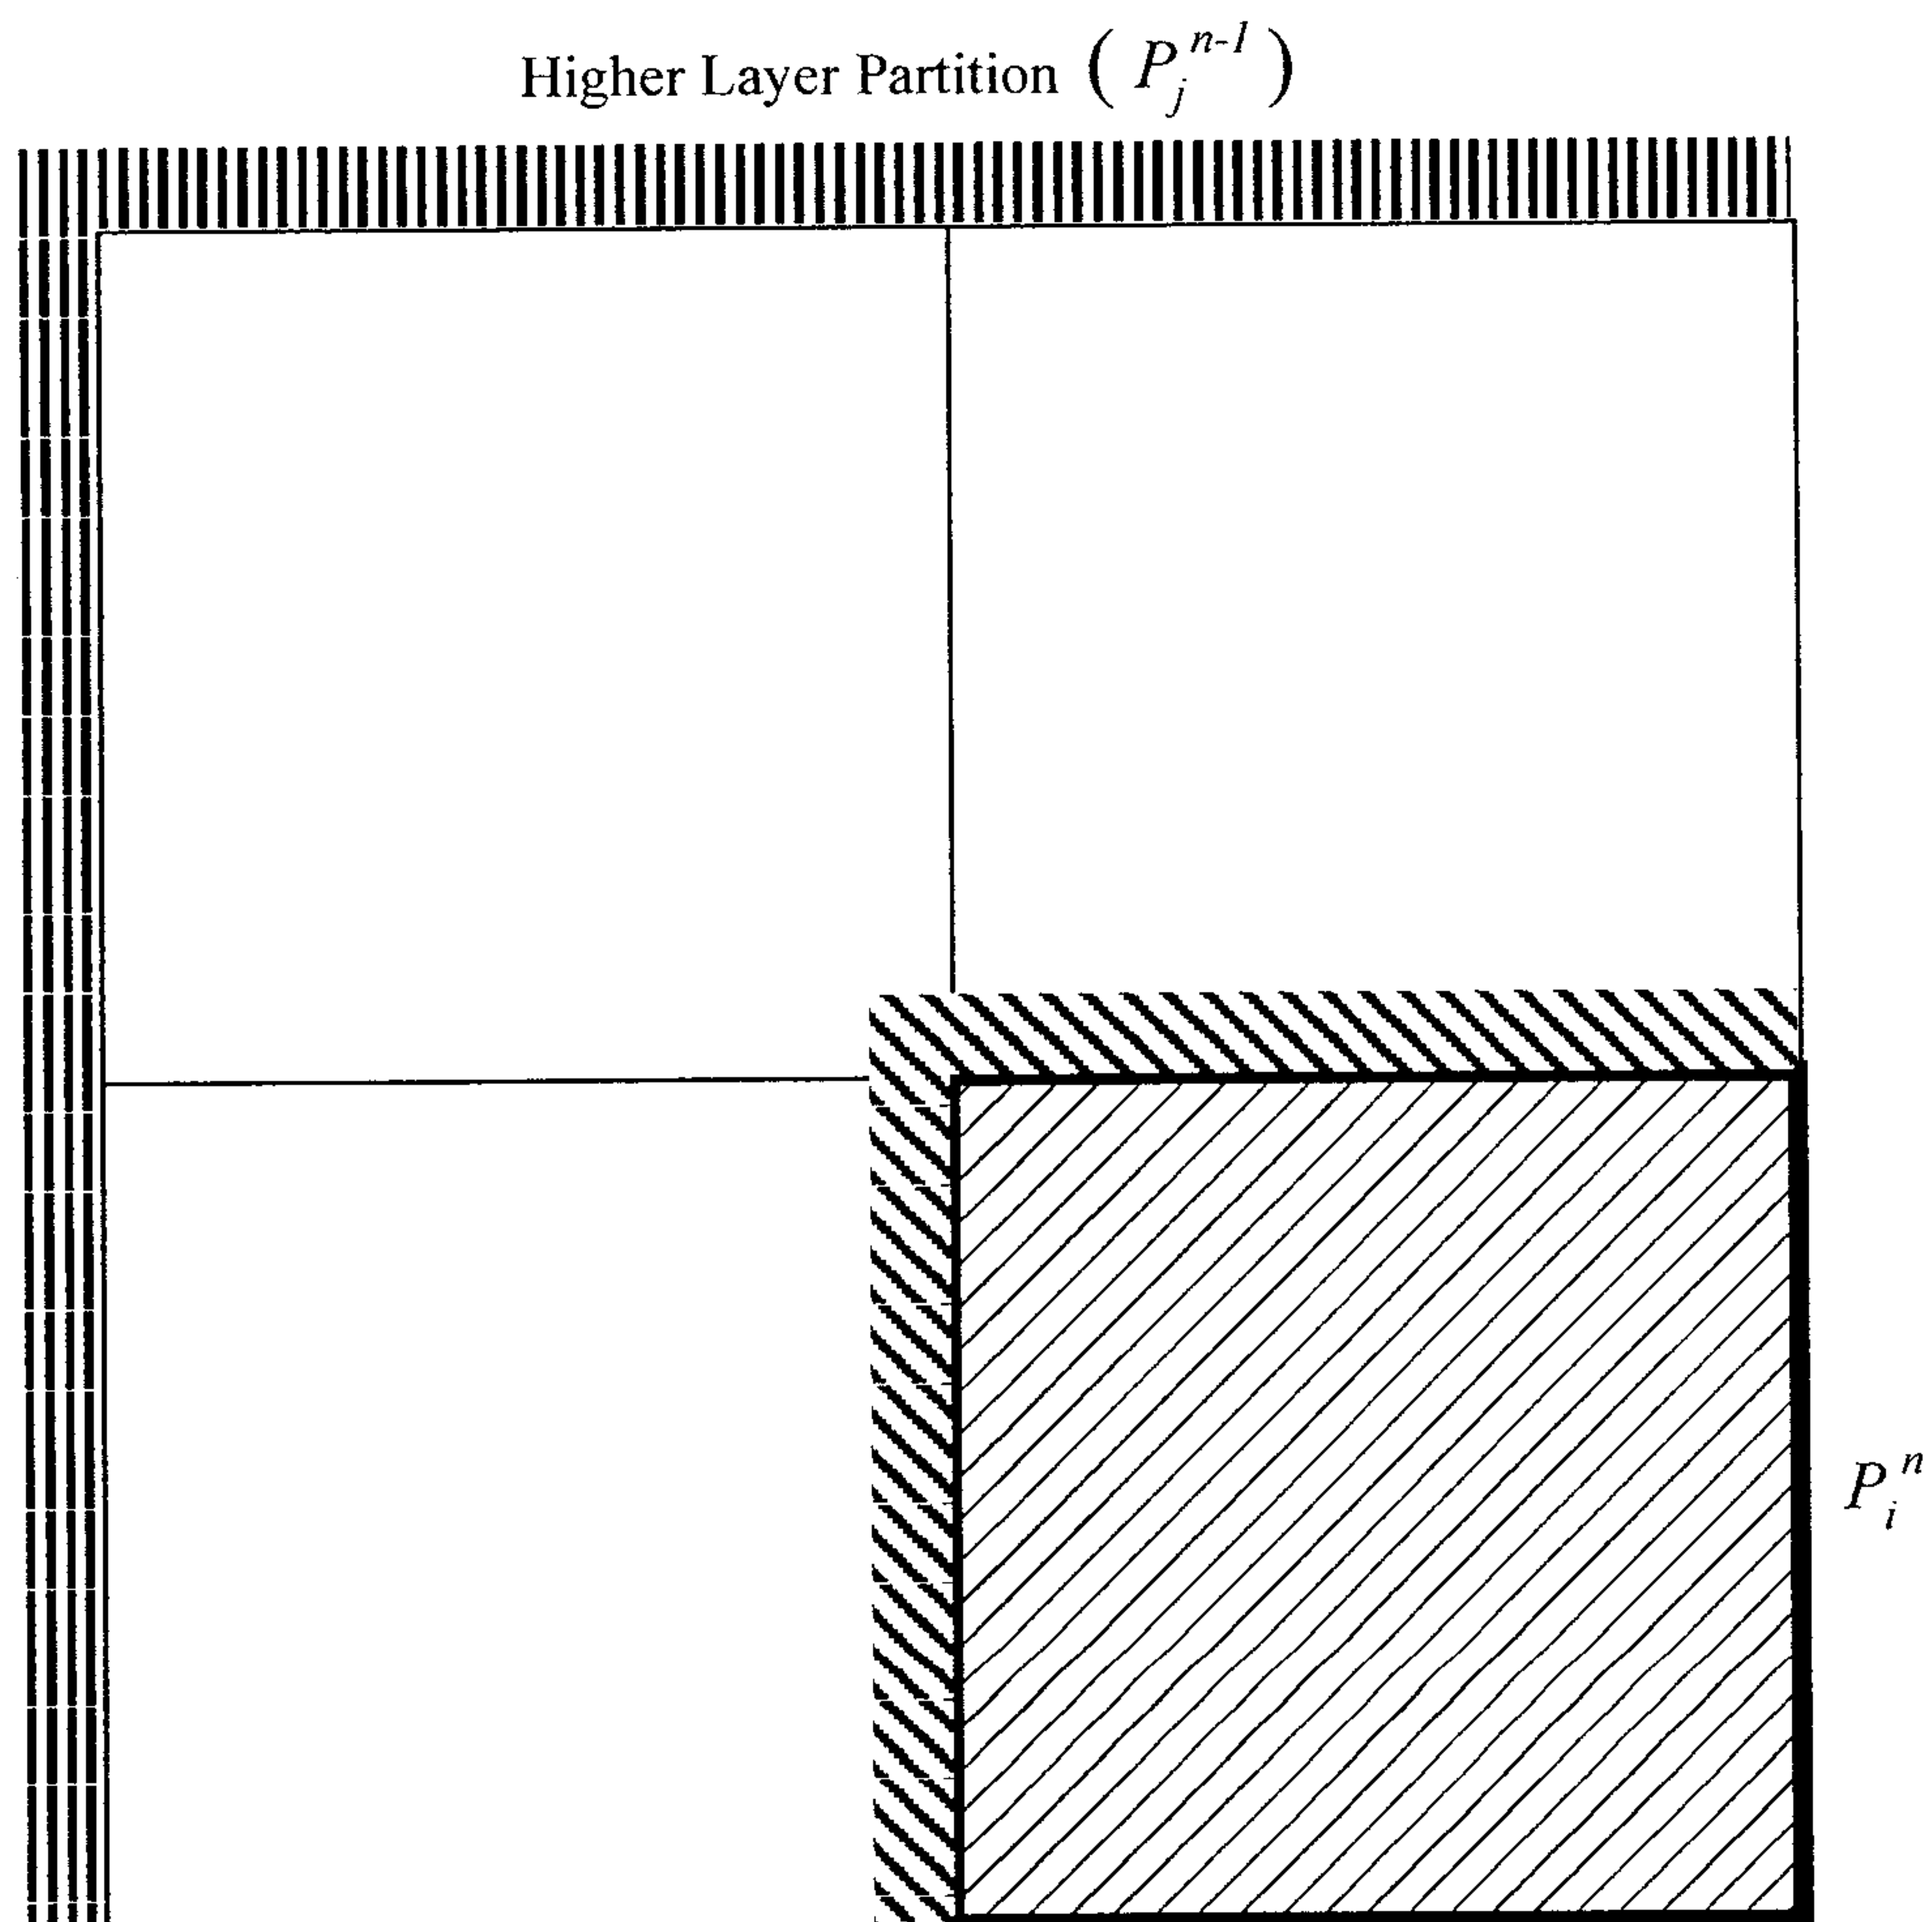


FIG.8


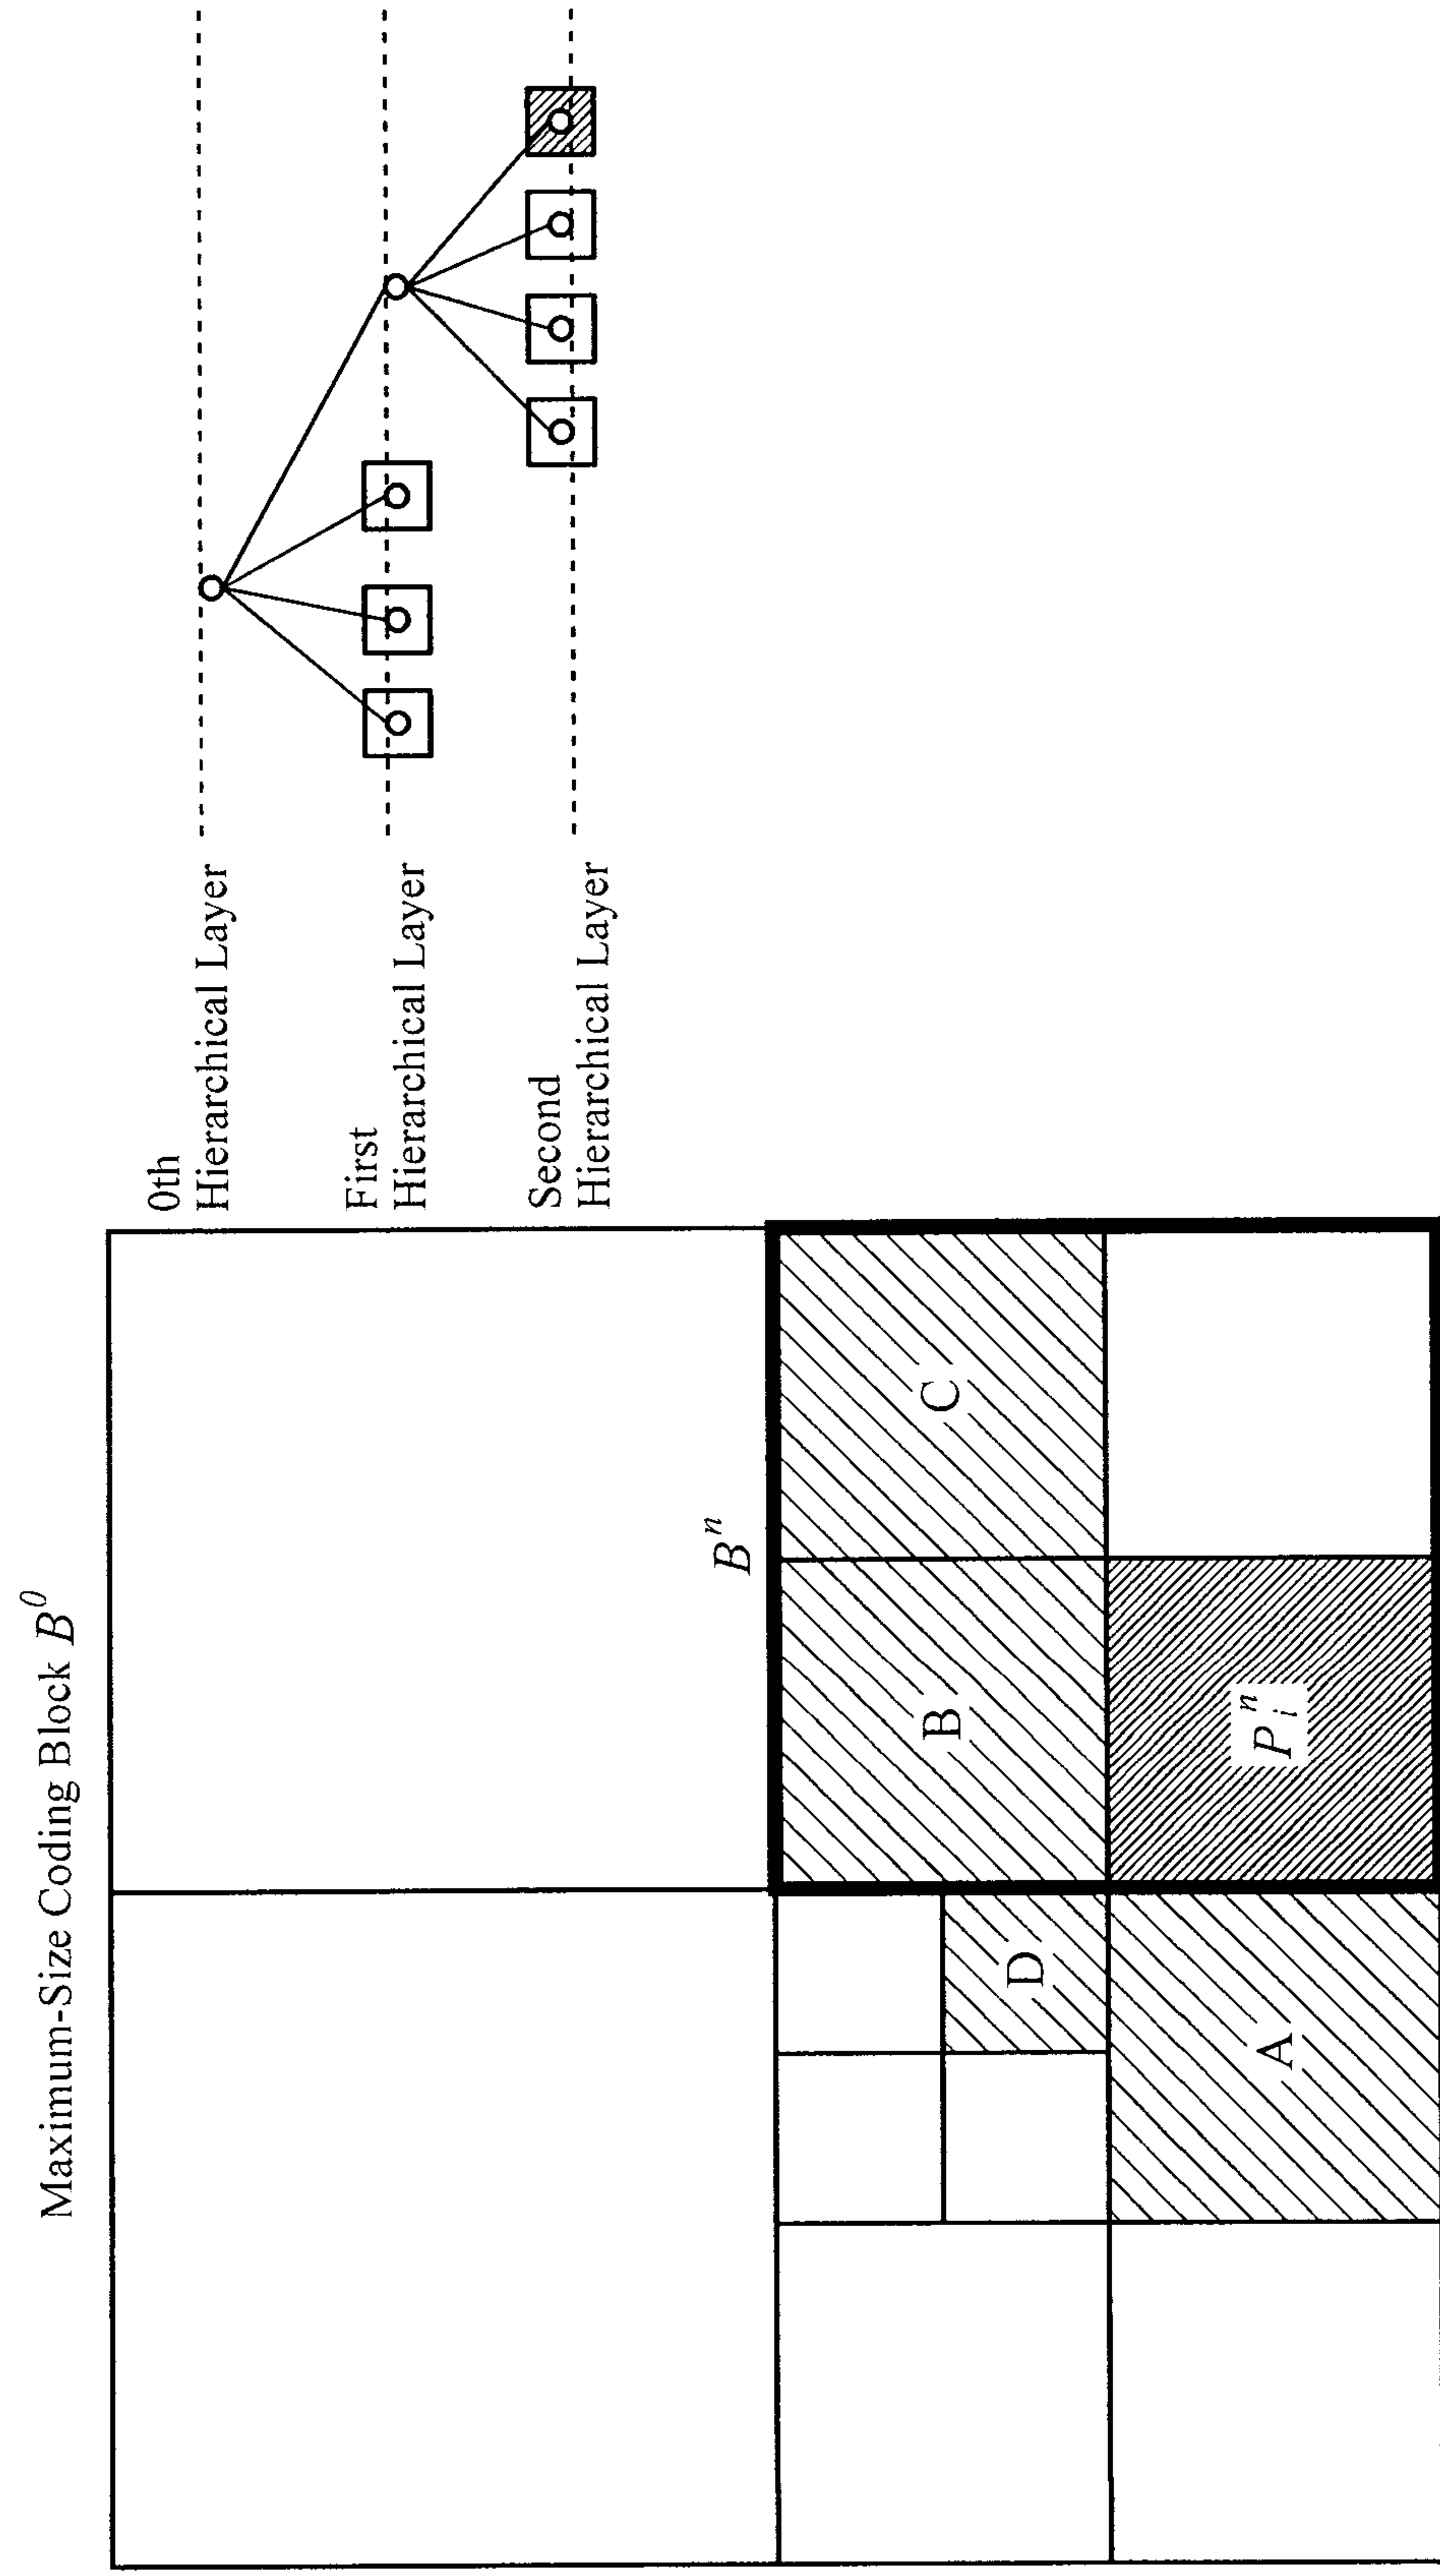


FIG.9

In Case Of 17


| Intra Prediction Mode Index | Intra Prediction Mode | Intra Prediction Mode Index | Intra Prediction Mode                 |
|-----------------------------|-----------------------|-----------------------------|---------------------------------------|
| 0                           | Vertical Prediction   | 9                           | Vertical Prediction In Higher Layer   |
| 1                           | Horizontal Prediction | 10                          | Horizontal Prediction In Higher Layer |
| 2                           | Average Prediction    | 11                          | Average Prediction In Higher Layer    |
| 3                           | Diagonal Prediction 1 | 12                          | Diagonal Prediction 1 In Higher Layer |
| 4                           | Diagonal Prediction 2 | 13                          | Diagonal Prediction 2 In Higher Layer |
| 5                           | Diagonal Prediction 3 | 14                          | Diagonal Prediction 3 In Higher Layer |
| 6                           | Diagonal Prediction 4 | 15                          | Diagonal Prediction 4 In Higher Layer |
| 7                           | Diagonal Prediction 5 | 16                          | Diagonal Prediction 5 In Higher Layer |
| 8                           | Diagonal Prediction 6 | 17                          | Diagonal Prediction 6 In Higher Layer |

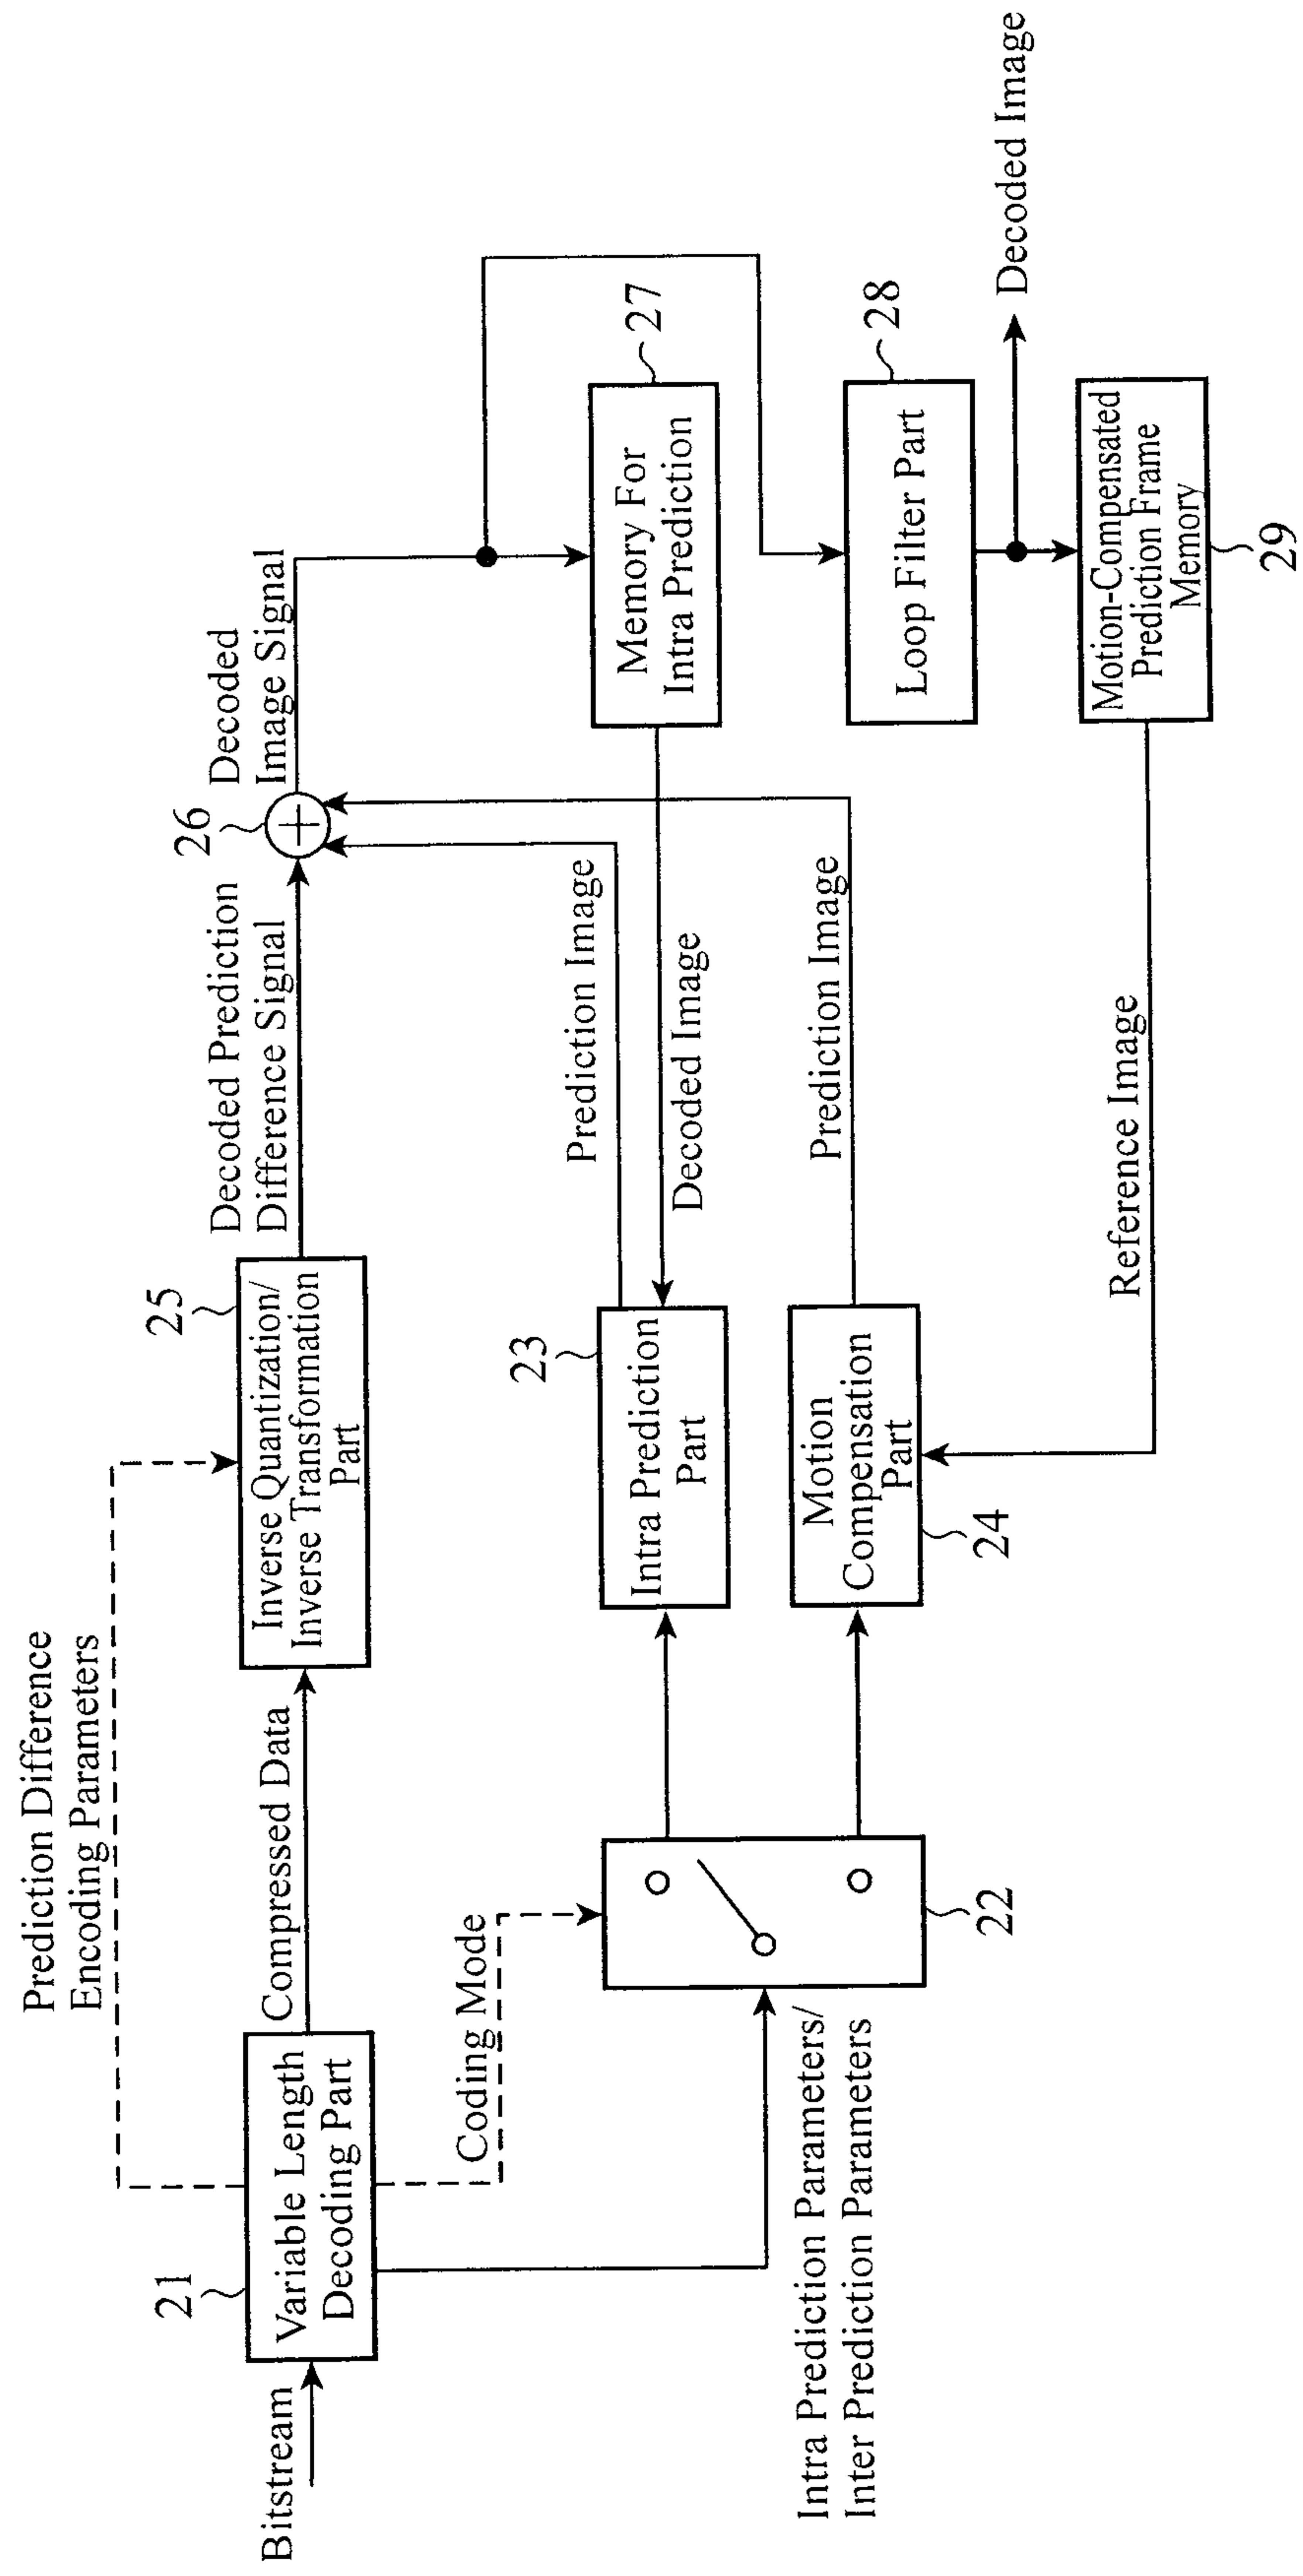
FIG.10



11/14

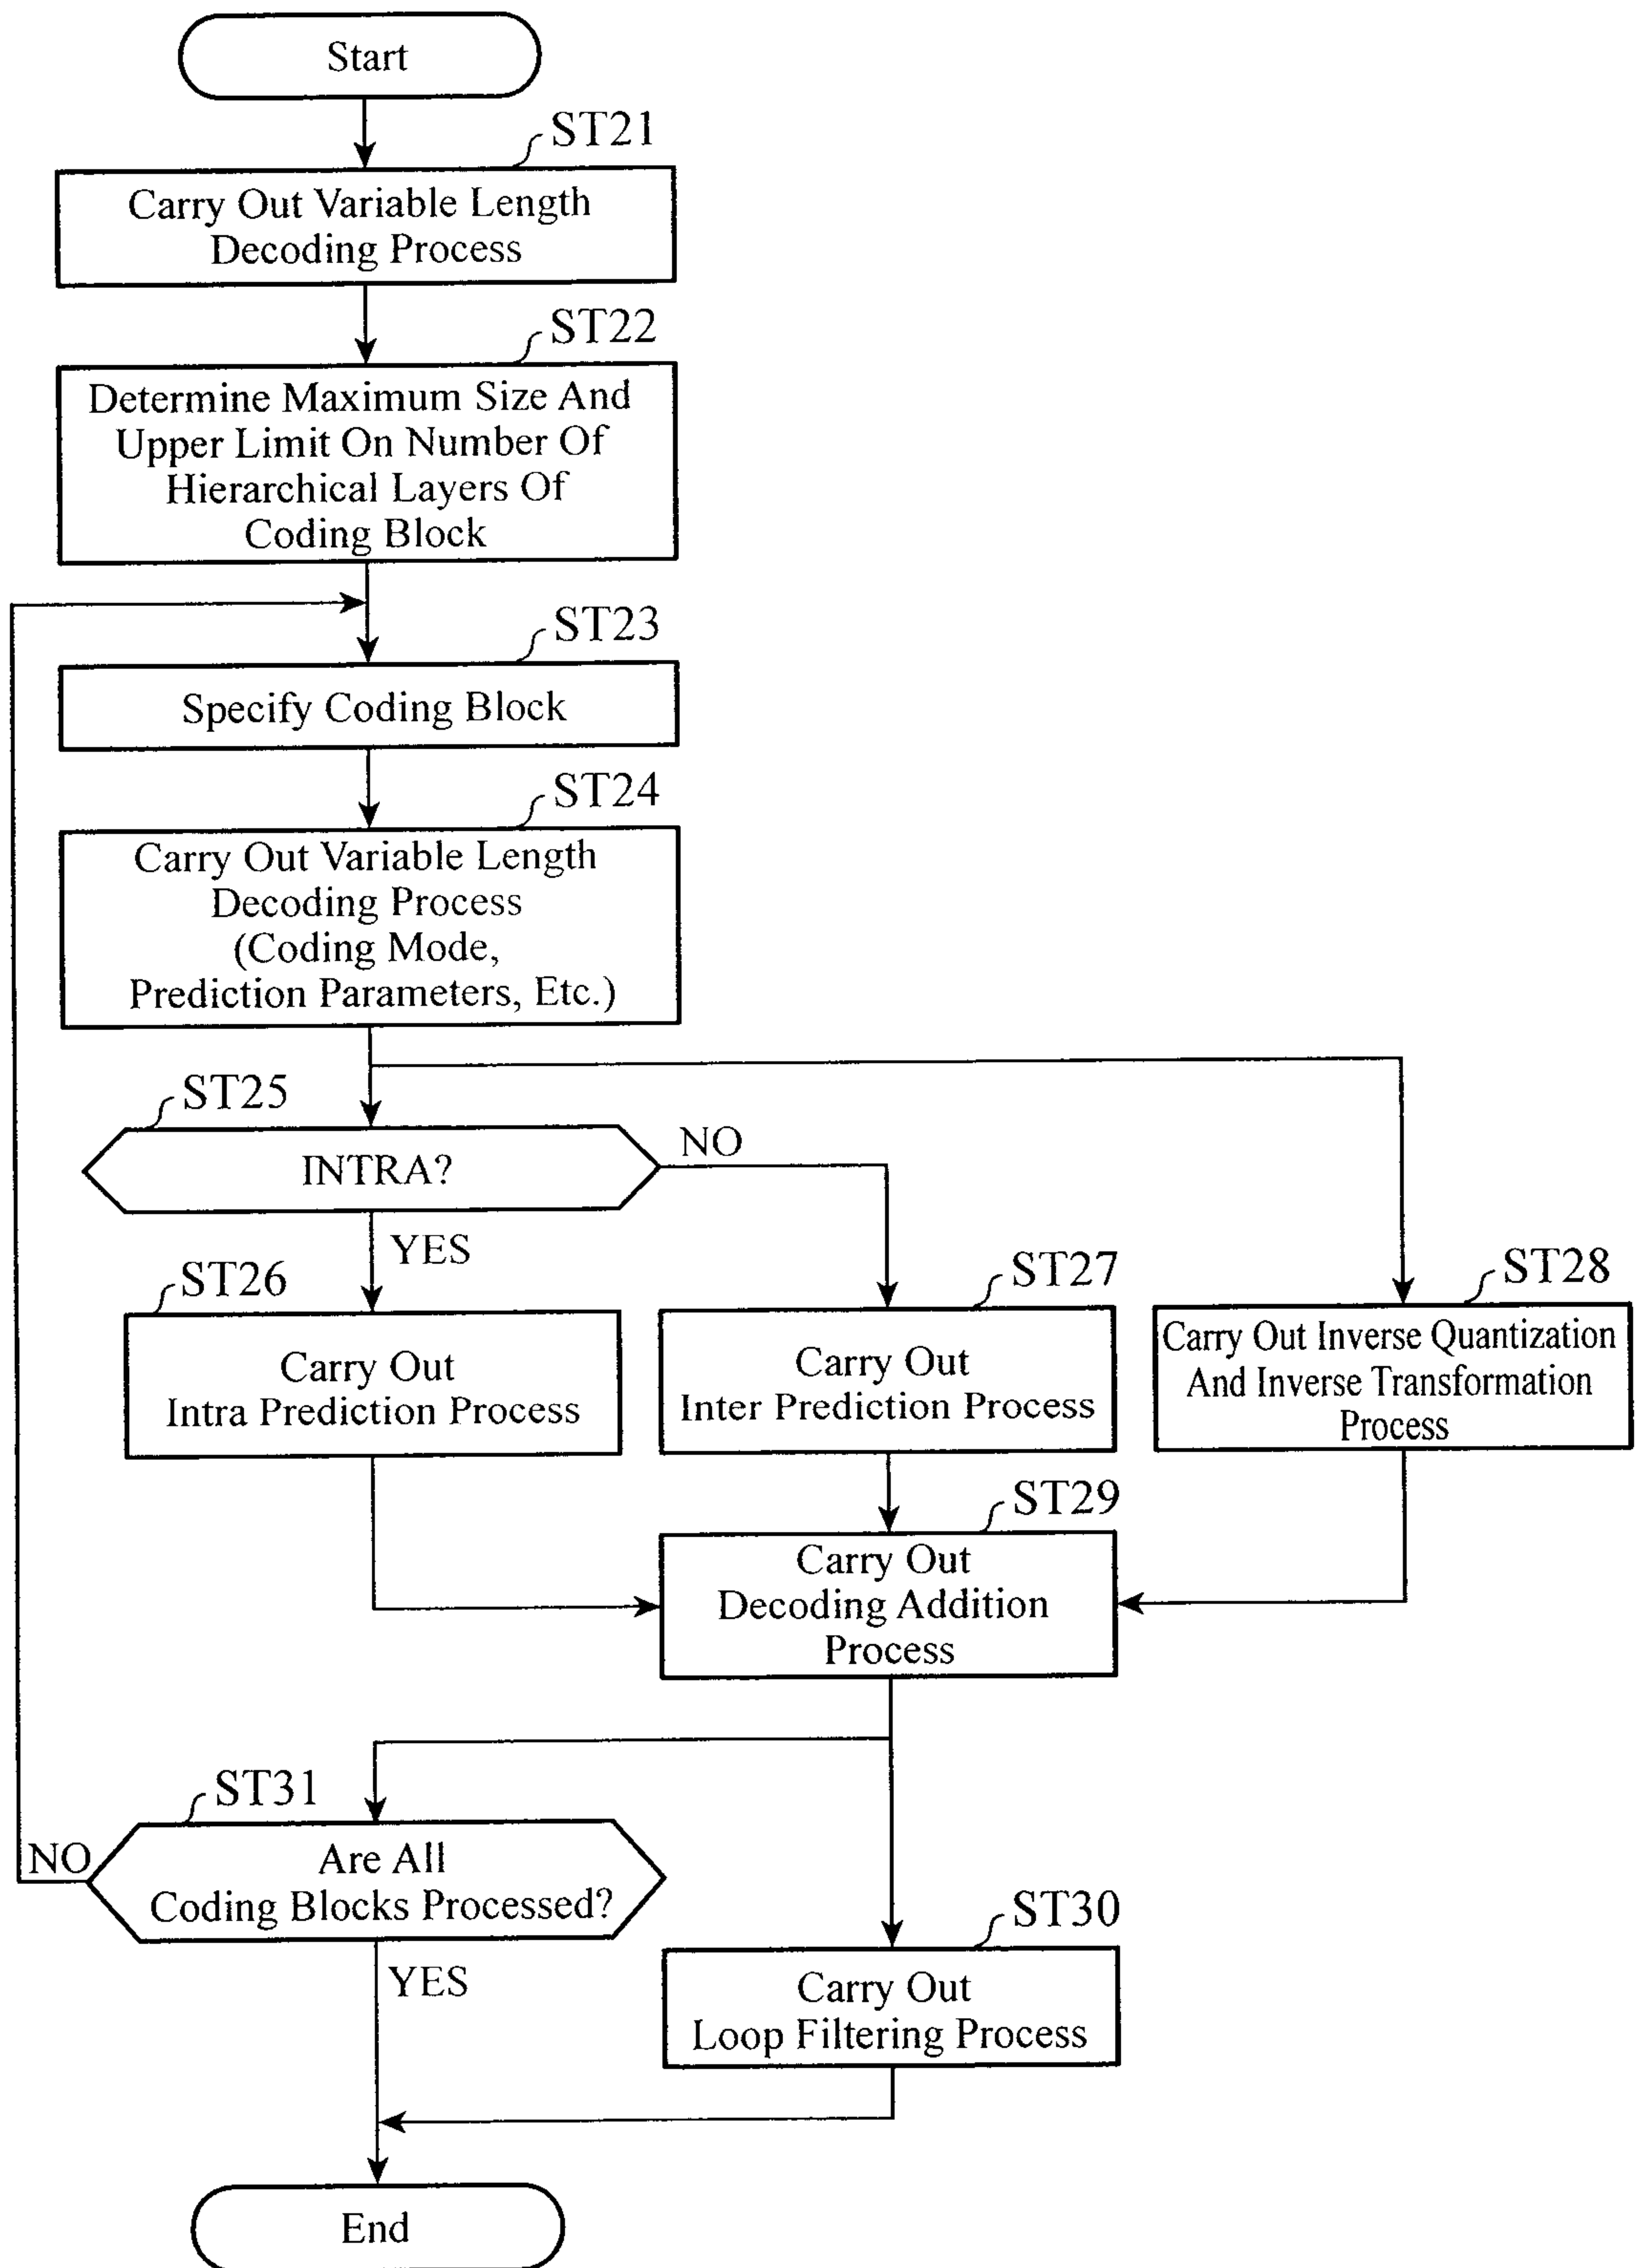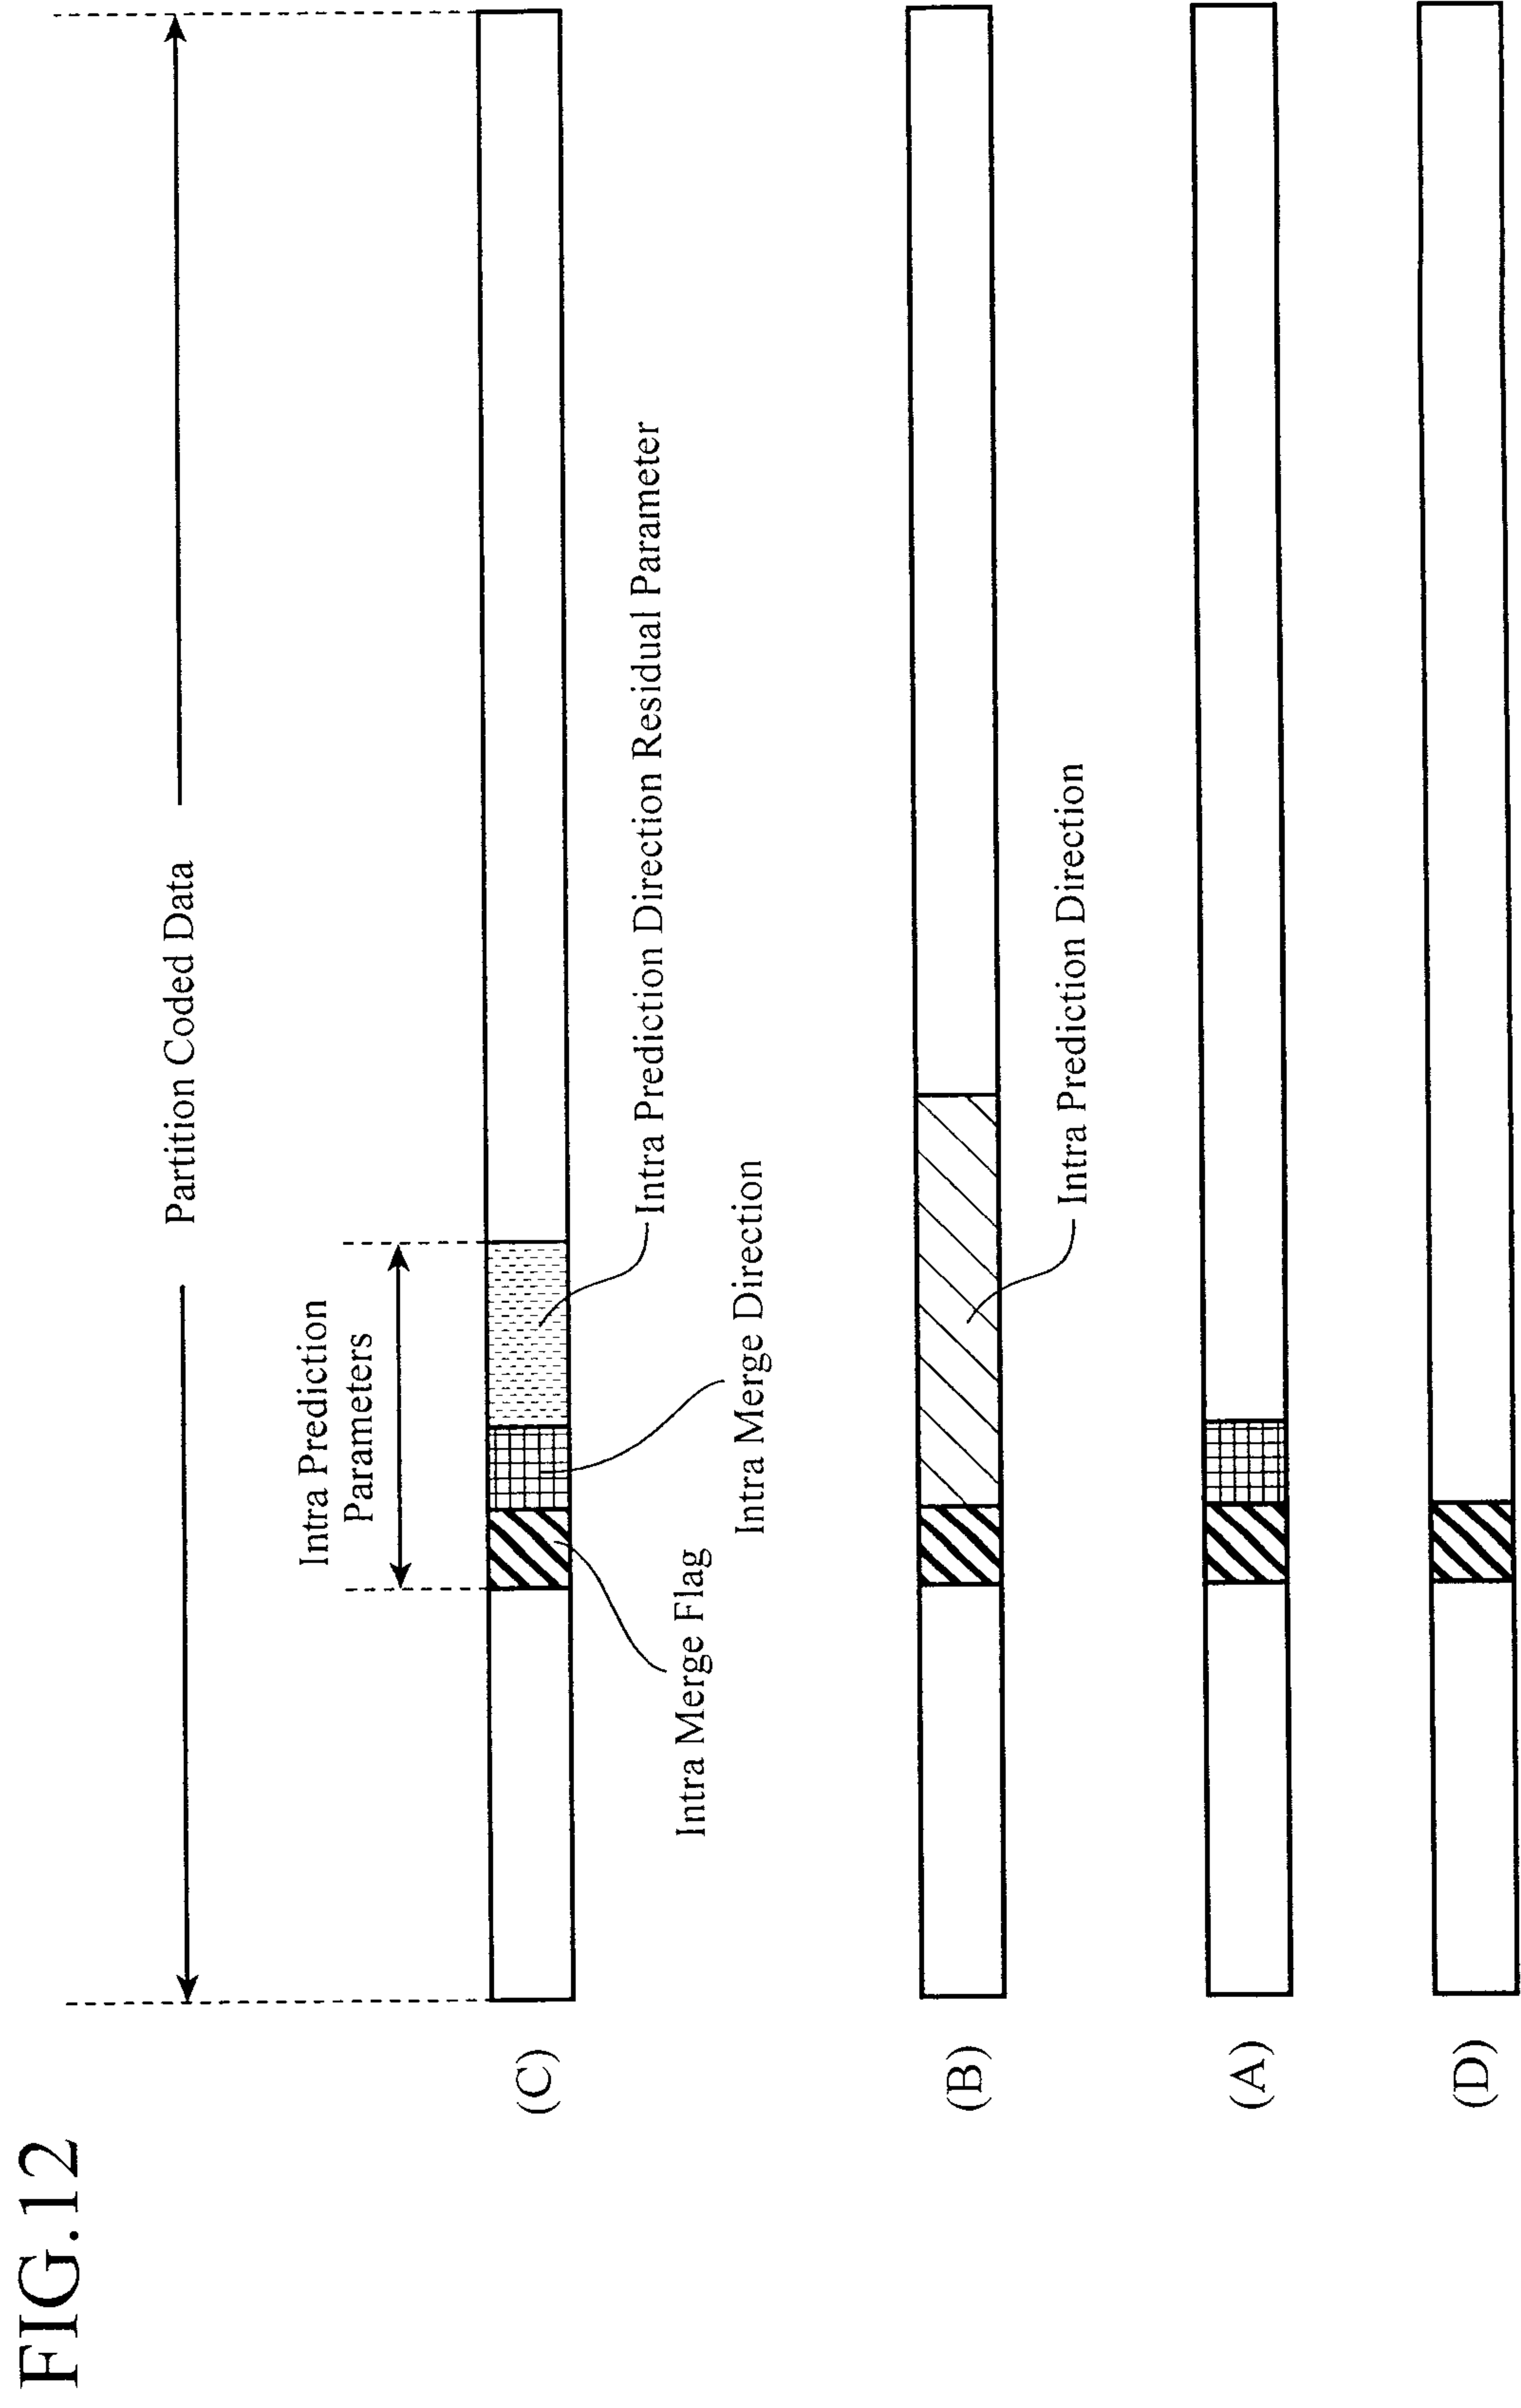FIG.11






13/14

FIG.13

(A)

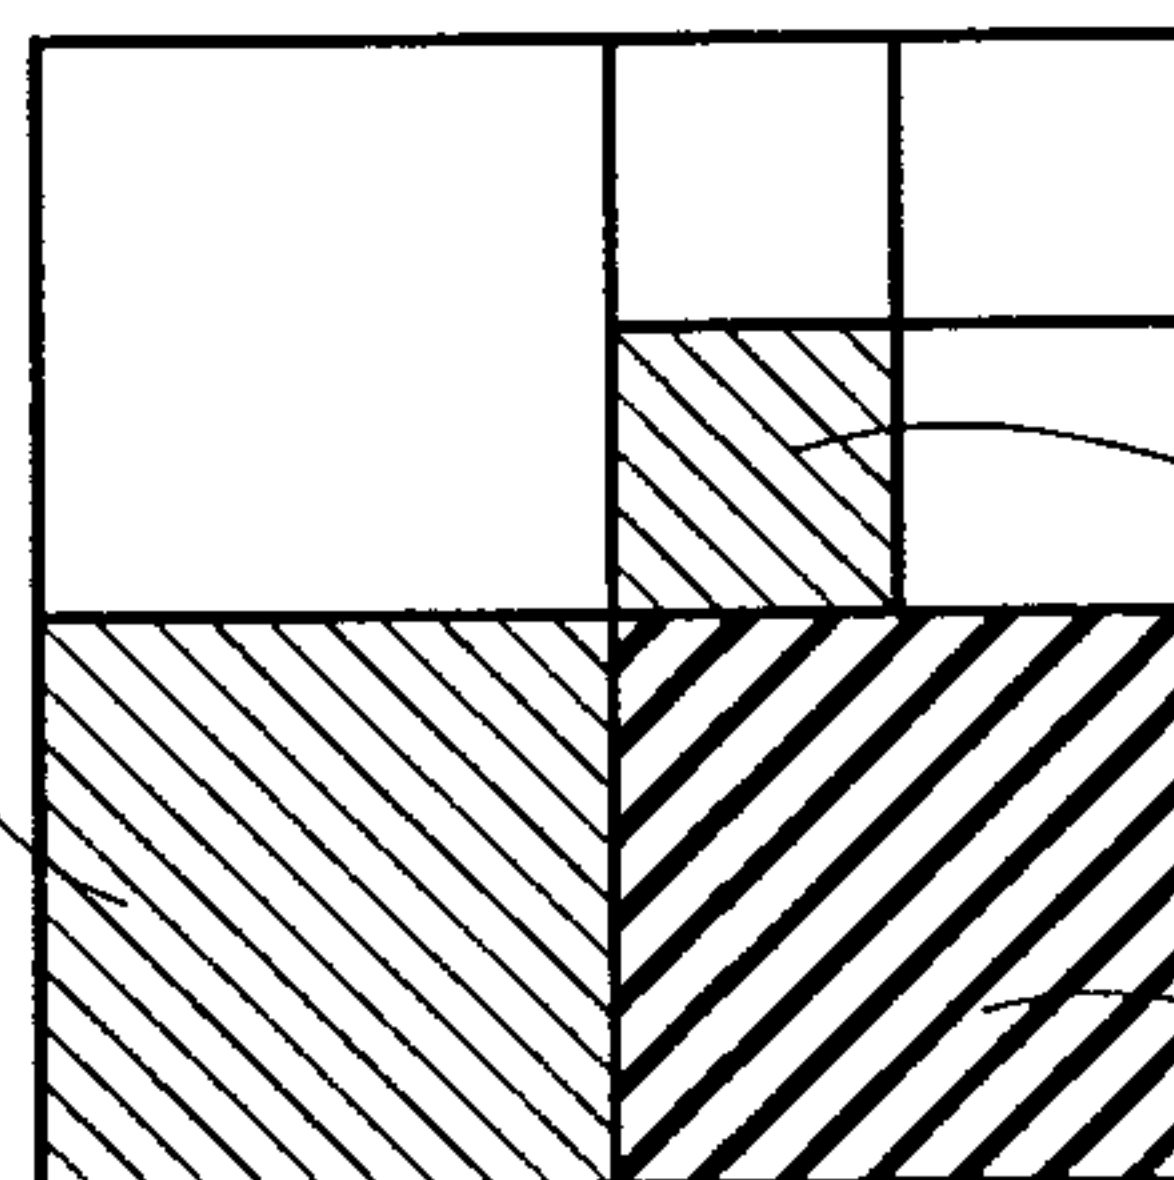Left Adjacent Partition




Upper Adjacent Partition

Partition Currently Being Processed

(B)

Left Adjacent Partition

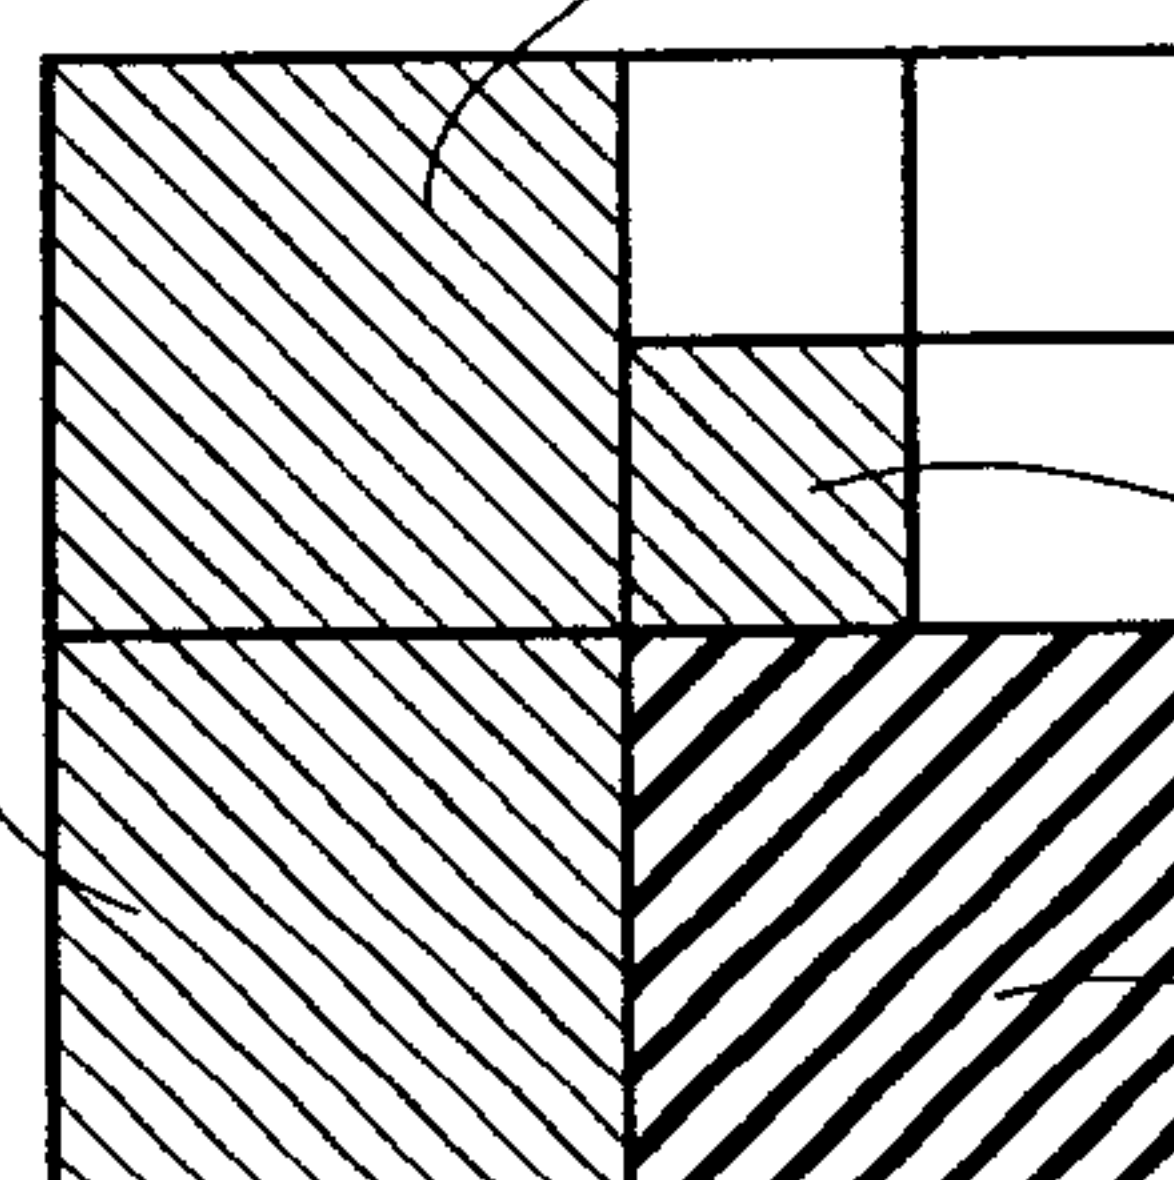
Upper Left Adjacent Partition



Upper Adjacent Partition

Partition Currently Being Processed

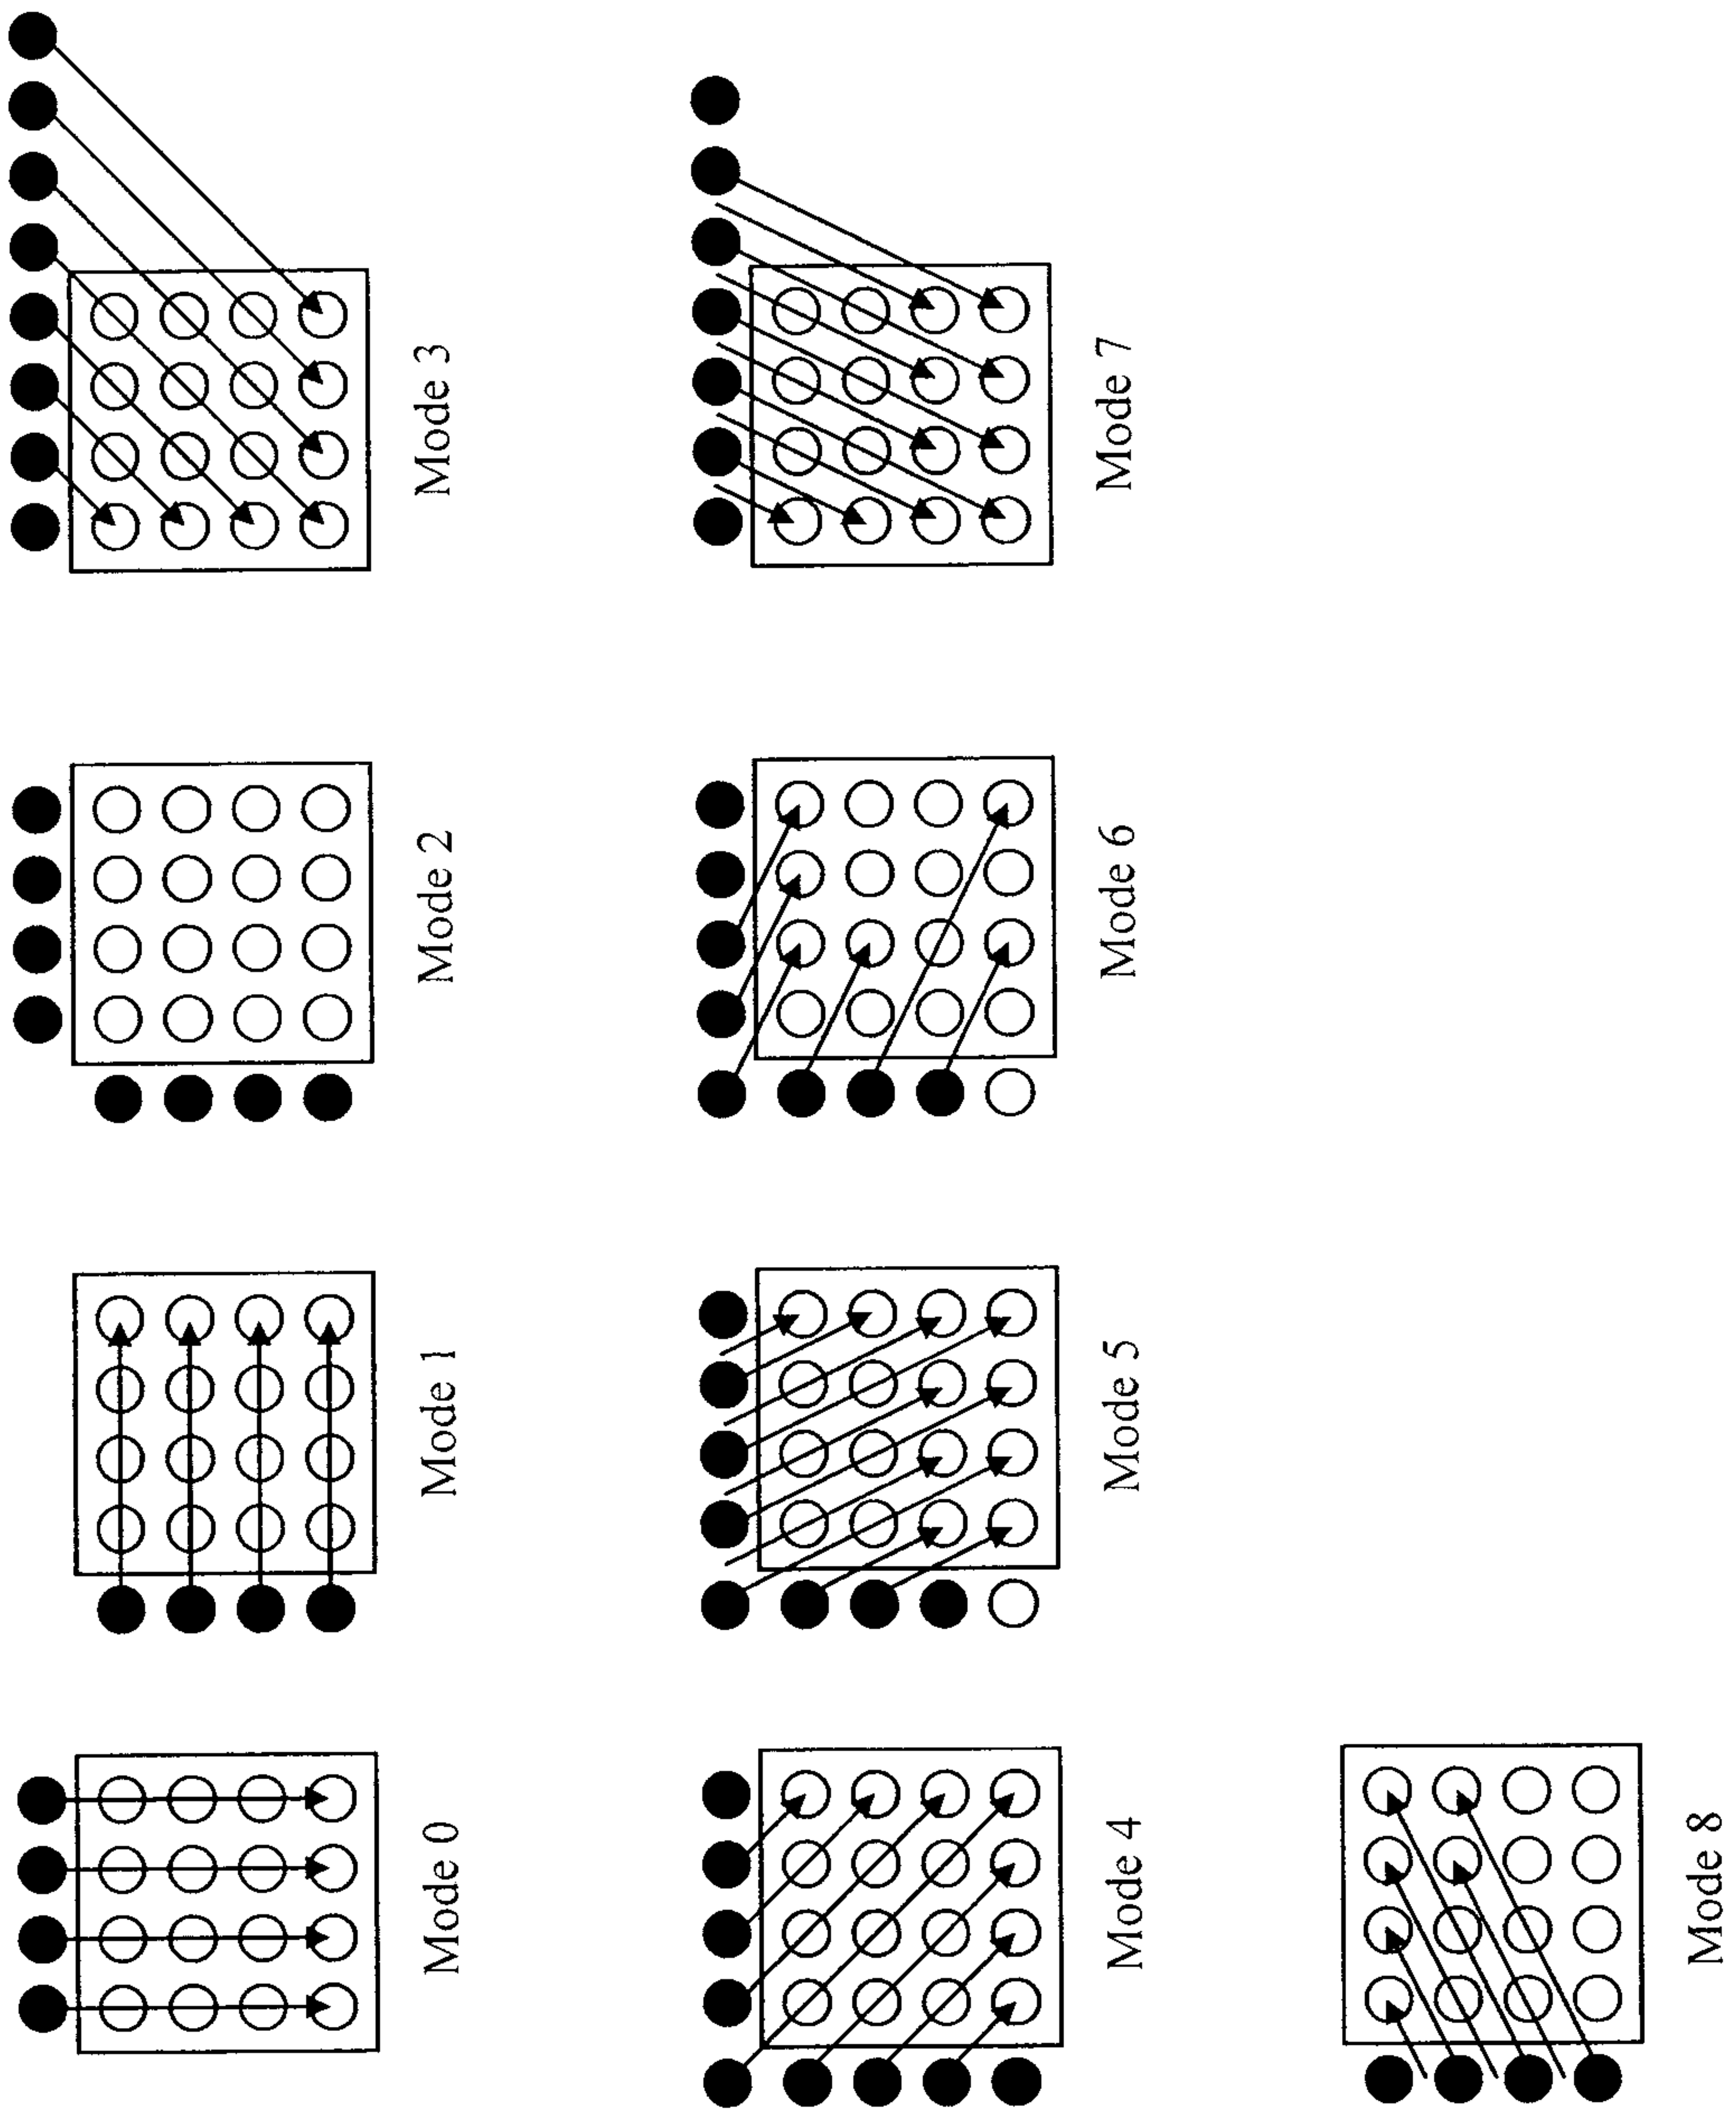FIG.14



〔図1〕

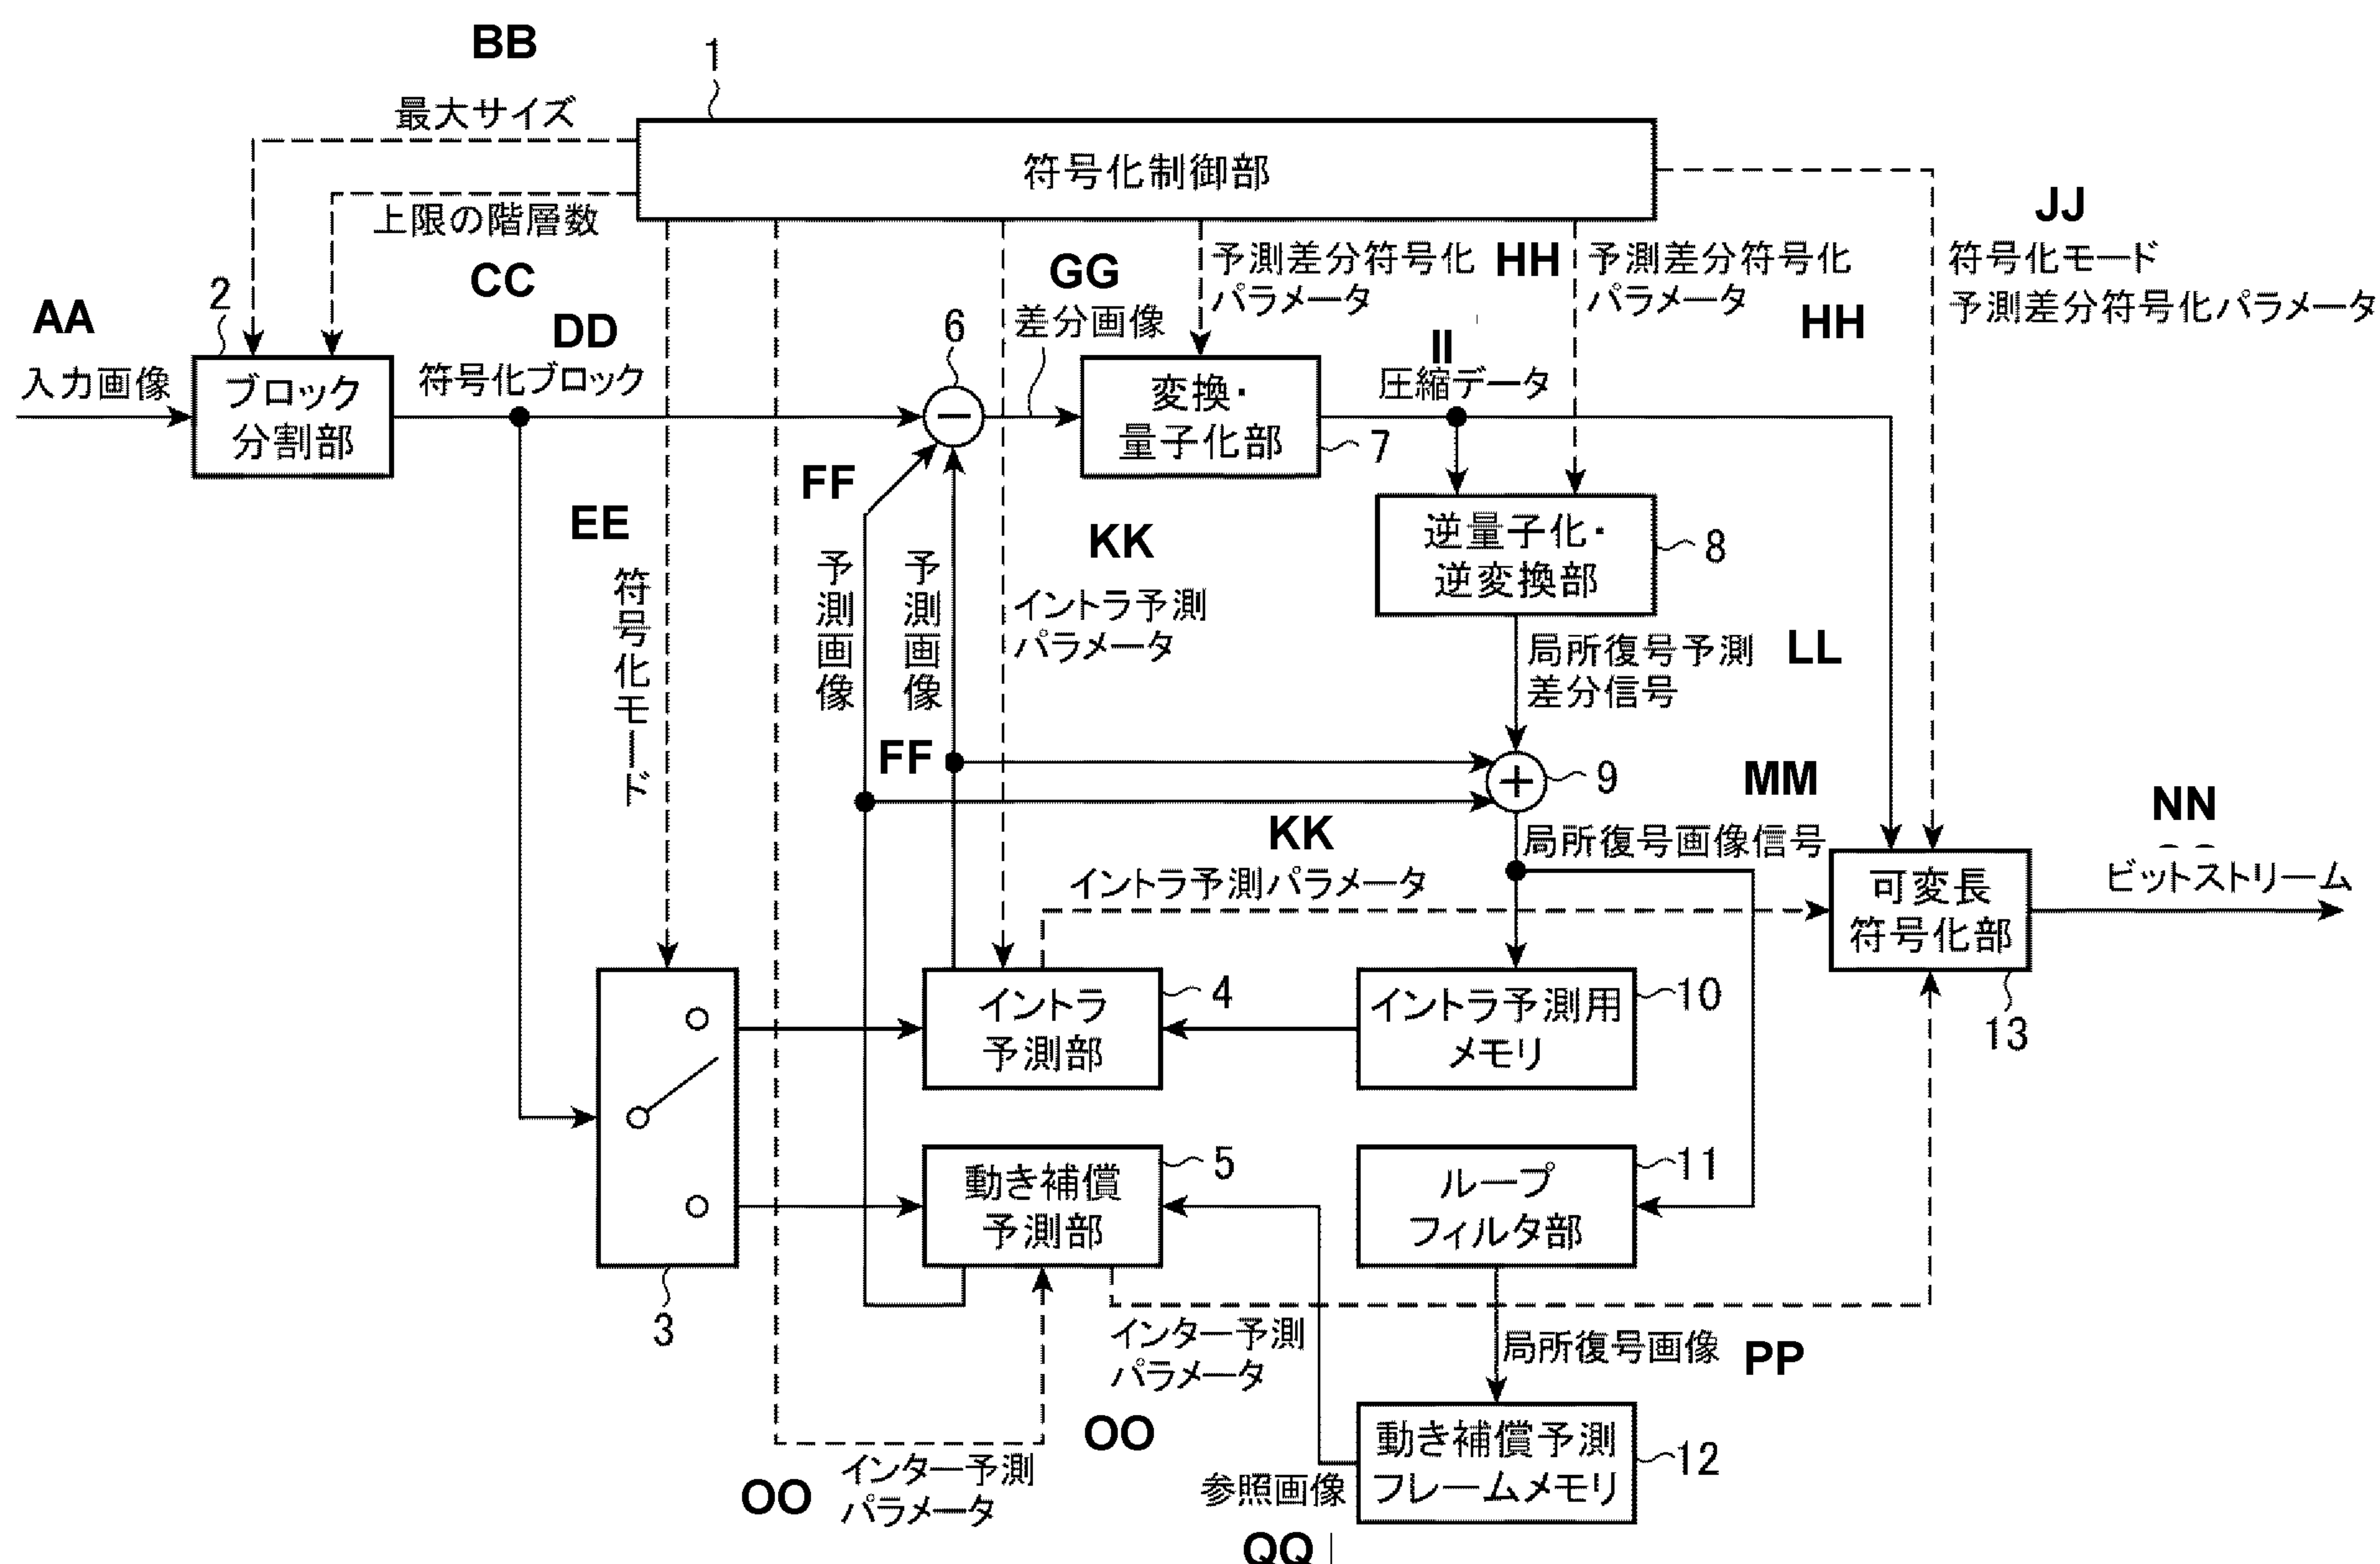


FIG. 1:

- 1 Encoding control unit
- 2 Block partitioning unit
- 4 Intra-prediction unit
- 5 Motion compensation prediction unit
- 7 Transformation/quantization unit
- 8 Inverse quantization/inverse transformation unit
- 10 Memory for intra-prediction
- 11 Loop filter unit
- 12 Motion compensation prediction frame memory
- 13 Variable-length encoding unit
- AA Input image
- BB Maximum size
- CC Upper limit for number of levels
- DD Encoding block
- EE Encoding mode
- FF Predicted image
- GG Difference image
- HH Predicted difference encoding parameters
- II Compressed data
- JJ Encoding mode predicted difference encoding parameters
- KK Intra-prediction parameters
- LL Local decoded predicted difference signal
- MM Local decoded image signal
- NN Bit stream
- OO Inter-prediction parameters
- PP Local decoded image
- QQ Reference image