



(51) International Patent Classification:

C25D 3/46 (2006.01)

C25D 15/02 (2006.01)

C25D 7/00 (2006.01)

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(21) International Application Number:

PCT/EP2019/077292

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

(22) International Filing Date:

09 October 2019 (09.10.2019)

Published:

— with international search report (Art. 21(3))

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

18199860.0

11 October 2018 (11.10.2018)

EP

(71) Applicant: ABB SCHWEIZ AG [CH/CH]; Brown Boveri Strasse 6, 5400 Baden (CH).

(72) Inventor: ANDERSSON, Anna; Pistolgatan 9, 724 65 Västerås (SE).

(74) Agent: KRANSELL & WENNBORG KB; P.O. Box 27834, 115 93 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: SILVER-GRAPHENE COMPOSITE COATING FOR SLIDING CONTACT AND ELECTROPLATING METHOD THEREOF




Fig. 1b

(57) Abstract: The present disclosure relates to a method of electroplating of a silver- graphene composite onto a substrate (1). The method comprises preparing a plating bath (6) comprising: a dissolved water soluble silver salt, dispersed graphene flakes (3), and an aqueous electrolyte (2) comprising a silver complexing agent, a cationic surfactant, and a pH adjusting compound. The zeta potential of the graphene-electrolyte interface in the plating bath is adjusted to be positive and within the range of 10-30 mV by means of the cationic surfactant and the pH adjusting compound. The method also comprises applying a negative electric potential on the substrate surface (4) such that electrophoresis of the graphene flakes occurs and said flakes are co-deposited with the silver during electroplating thereof to form a silver-graphene composite coating on the substrate surface.



SILVER-GRAPHENE COMPOSITE COATING FOR SLIDING CONTACT AND ELECTROPLATING METHOD THEREOF

TECHNICAL FIELD

- 5 The present disclosure relates to a method of electroplating of a silver-graphene composite onto a substrate.

BACKGROUND

Silver (Ag)-based contact materials are commonly used in various electrical power switching devices, where low losses and stable contact performance
10 over life are of key importance. Ag is used as base material in both arcing and sliding contact systems, owing to its electrical properties. However, the mechanical and tribological properties of Ag are not impressive. It is soft and prone to cladding onto counter surfaces. For sliding contacts this usually means high wear rate and high friction.

- 15 When Ag is used in sliding contact configurations vs a copper (Cu) or Ag counter surface, a substantial amount of silver must be added to the contact to account for wear losses. The cladding of Ag onto a counter surface creates, in essence, an Ag-Ag contact. The coefficient of friction (COF) of such a contact in a lubricant-free environment is as high as 1.5 or higher. In a
20 mechanical system, this friction needs to be overcome by the mechanical drive system of the device, which, in turn, costs drive energy and size in terms of the mechanical system dimensioning.

Nevertheless, Ag is still used in many applications, e.g. in on-load tap
25 changers (OLTC's) and various breakers and switches, owing to its electrical properties.

One common method to decrease friction in Ag-based contacts is to apply a lubricating contact grease. However, with high switching demands, such as several hundreds of thousands or even millions of operations during the device lifetime, a grease is not a sustainable solution without regular

additions of more grease. In addition, thermal load on the device may lead to grease evaporation, oxidation or decomposition, which can cause increased resistance and unstable contact properties. In applications like OLTC's, where switching components are submerged in electrically insulating transformer oil, which is poorly lubricating, application of a liquid lubricant oil or grease is not even possible.

Apart from lubricating oils and greases, there have been reports on alternative routes to improve tribological performance of Ag-based contacts. Adding graphite (at a concentration of a few percent by weight, wt%) to metallic silver gives a reduction of the COF down to ca. 0.3 vs. Ag or Cu counter surface. The hardness and density of such a composite is however limited owing to a low adhesion of the graphite particle surface to the Ag-matrix. This gives a high wear rate and substantial particle generation of Ag-graphite components. In addition, a thick carbon-based tribofilm builds up on wear which causes contact resistance to increase with time. The resistance-increase also applies when adding other friction- and wear-reducing additives into the Ag matrix e.g. MoS₂ or WS₂.

So called 'hard silver' (e.g. Argalux®64), an Ag alloy containing Ag, Cu and a small amount of antimony (Sb) is used in some commercial applications. Sb increases hardness significantly for this alloy, conductivity is fairly good, but COF is still in the region of 0.3-0.4 vs. Cu.

US 6,565,983 discloses the use of silver iodide (AgI) as a dry lubricant top coat on Ag contacts in tap changers and to avoid the need for grease. AgI is however prone to decomposition in sunlight and at elevated temperature.

Graphene (G) and graphene oxide (GO) is known to have lubricating effects as a top coat in metal-to-metal contacts [F. Mao *et al.*, J. Mater. Sci., 2015, 50, 6518; and D. Berman *et al.*, Materials Today, 2014, 17(1),31]. There are also studies of graphene having a lubricating effect in structural composites of aluminium (Al) [M. Tabandeh-Khorshid *et al.*, J. Engineering Sci. and

Techn., 2016, 19, 463]. Friction coefficients down to circa 0.2 in dry metal-to-metal contacts have been reported in literature.

Uysal *et al.*, "Structural and sliding wear properties of Ag/Graphene/WC hybrid nanocomposites produced by electroless co-deposition", Journal of Alloys and Compounds 654 (2016), pages 185-195, discloses an electroless co-deposition technique for obtaining an Ag-graphene nanocomposite.

SUMMARY

It is an objective of the present invention to provide an improved silver-graphene composite coating by means of a novel electroplating method. The coating may advantageously be used for reducing friction and wear in sliding electrical contacts.

According to an aspect of the present invention, there is provided a method of electroplating of a silver-graphene composite onto a substrate. The method comprises preparing a plating bath comprising: a dissolved water soluble silver salt, dispersed graphene flakes, and an aqueous electrolyte comprising a silver complexing agent, a cationic surfactant, and a pH adjusting compound. The zeta potential of the graphene-electrolyte interface in the plating bath is adjusted to be positive and within the range of 10-30 mV by means of the cationic surfactant and the pH adjusting compound. The method also comprises applying a negative electric potential on a surface of the substrate such that electrophoresis of the graphene flakes occurs and said flakes are co-deposited with the silver during electroplating thereof to form a silver-graphene composite coating on the substrate surface.

According to another aspect of the present invention, there is provided a silver-graphene composite coating on a substrate surface. The composite coating comprises graphene in the form of graphene flakes having an average longest axis within the range of from 100 nm to 50 μ m. The composite coating has a graphene content within the range of 0.05-1% by weight of the composite. The graphene flakes are aligned parallel to the substrate surface.

According to another aspect of the present invention, there is provided a sliding contact of an electric power device, the sliding contact comprising an embodiment of the composite coating of the present disclosure.

According to another aspect of the present invention, there is provided an
5 electric power device, e.g. a high-voltage breaker or a generator circuit breaker, wherein the electric power device comprises an embodiment of the sliding contact of the present disclosure.

By means of the electrolyte, the zeta potential can be set such that the graphene flakes are co-deposited in a controlled manner aligned with the
10 substrate surface to give a composite in which the graphene flakes are well dispersed in the silver matrix and substantially flat and aligned with the substrate surface. An electrical field across the electrolyte bath is obtained by applying negative potential on the substrate. The dispersion is preferably stable until the electrical field is applied, after which the graphene flakes are
15 moving electrophoretically towards the substrate surface together with the silver ions. The Ag ions are deposited (nucleation + coating growth) onto the substrate and the graphene sheets are simultaneously adsorbed and incorporated in the coating. The graphene adsorption and incorporation is achieved by means of the suitable zeta potential between the sheets and
20 electrolyte.

The zeta potential is the potential difference between the electrolyte (dispersion medium) and the stationary layer of fluid attached to the graphene flakes (dispersed particle), and is thus a measure of the surface tension of the graphene-electrolyte interface.

25 A too high zeta potential favours the dispersed graphene flakes in the electrolyte and, although the graphene sheets may diffuse towards the substrate surface under the influence of the electric field, the incorporation of the flakes within the coating will not be favoured, and they may remain in the bath.

With a too low zeta potential, the graphene flakes may aggregate and thus not result in the flakes being well dispersed in the silver matrix of the composite or simply aggregate as particles on the beaker floor.

5 The desired zeta potential is obtained by means of the cationic surfactant at a specific pH which is set with the pH adjusting compound. In accordance with the present invention, the zeta potential should be positive and within the range of 10-30 mV. At this state, ultrasonication may be used to hinder dissolved graphene to agglomerate.

10 The silver complexing agent is used to stabilize the silver ions in the solution, hence to prevent the dissolved silver ions from transforming to metallic silver before the negative potential is applied to the substrate surface.

15 It is to be noted that any feature of any of the aspects may be applied to any other aspect, wherever appropriate. Likewise, any advantage of any of the aspects may apply to any of the other aspects. Other objectives, features and advantages of the enclosed embodiments will be apparent from the following detailed disclosure, from the attached dependent claims as well as from the drawings.

20 Generally, all terms used in the claims are to be interpreted according to their ordinary meaning in the technical field, unless explicitly defined otherwise herein. All references to "a/an/the element, apparatus, component, means, step, etc." are to be interpreted openly as referring to at least one instance of the element, apparatus, component, means, step, etc., unless explicitly stated otherwise. The steps of any method disclosed herein do not have to be performed in the exact order disclosed, unless explicitly stated. The use of
25 "first", "second" etc. for different features/components of the present disclosure are only intended to distinguish the features/components from other similar features/components and not to impart any order or hierarchy to the features/components.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments will be described, by way of example, with reference to the accompanying drawings, in which:

Fig 1a is a schematic sectional illustration of a substrate submerged in a plating bath before an electrical field is applied, in accordance with
5 embodiments of the present invention.

Fig 1b is a schematic sectional illustration of a substrate submerged in a plating bath while an electrical field is applied, whereby graphene flakes are aligned and travelling towards the substrate surface, in accordance with
10 embodiments of the present invention.

Fig 1c is a schematic sectional illustration of a substrate submerged in a plating bath after an electrical field has been applied, whereby a silver-graphene composite coating has been formed on the substrate surface, in accordance with embodiments of the present invention.

15 Fig 2 is a schematic block diagram of an electrical power device comprising a sliding electrical contact, in accordance with embodiments of the present invention.

Fig 3 is a schematic flow chart of an embodiment of the method of the present invention.

20 **DETAILED DESCRIPTION**

Embodiments will now be described more fully hereinafter with reference to the accompanying drawings, in which certain embodiments are shown.

However, other embodiments in many different forms are possible within the scope of the present disclosure. Rather, the following embodiments are
25 provided by way of example so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those skilled in the art. Like numbers refer to like elements throughout the description.

Embodiments of the present disclosure provides a self-lubricating electrical contact film, containing Ag and a small amount of graphene, that has low friction and high wear-resistance and enables grease-free operation in a sliding contact system, as well as a method of providing such a film which is
5 herein called a silver-graphene composite coating.

Embodiments of the invention relates to a self-lubricating contact coating to be used as replacement for greased-lubricated Ag plated sliding contacts in power switching and interruption devices. The lubricating effect is stemming from a small amount of graphene flakes embedded in the Ag matrix, where
10 the graphene flakes are aligned parallel to the substrate surface and distributed in such a way that a thin layer (e.g. in the range a few monolayers of graphene sheets) is formed on the contact surface during sliding. The sliding against a counter surface (e.g. Cu or Ag or same Ag-graphene coating) promotes a continuous removal of graphene sheets, but the small amount of
15 graphene incorporated within the composite layer is continuously supplied to the surface since the flakes are dispersed throughout the whole thickness of the coating, maintaining an efficient tribological film on the coating throughout the lifetime of the sliding contact. The graphene also promotes a dispersion hardening of the composite coating, which reduces the wear rate.

20 Grease-lubricated electroplated Ag coatings (5-20 μm thick) in electrical sliding contacts exist in numerous devices today. Such contacts may beneficially be substituted for ones with the silver-graphene composite of the present disclosure. Examples of such contact-containing devices include: low voltage (LV) breakers and disconnectors, various plug-in sockets, rack-
25 mounted cabinets, medium voltage (MV) breaking switches and disconnectors (e.g. gas/air), MV and high voltage (HV) gas-insulated switchgear (GIS), HV breakers and gas circuit breakers (GCB) etc. As there is a demand for higher ratings, increased number of operations, decreased losses and less service intervals, grease-lubricated systems become difficult to
30 use. A specific example is for HV breakers and GCB's where the temperature rise requirement for Ag-plated nominal contacts is currently max 105°C during operation, but the standard will soon change the limit to 115°C (e.g.

implying a need to withstand 10% higher currents). Today's contacts may not manage this due to grease degradation/evaporation, and they may become unstable and contact resistance may increase with time. To qualify a new grease in e.g. a sulfur hexafluoride (SF_6) environment may be costly and
5 challenging. There are several other product examples like this where grease is becoming an issue, and consequently there is a need for new and more robust, preferably dry, contact system, as in accordance with the present disclosure.

Today, there are only few commercial alternatives to grease. One reason is
10 the general compromise between good electrical and good tribological (low friction and wear) properties, often counteracting each other. For instance, AgI is one example of a dry lubricant top coat used on Ag contacts. Silver iodide (AgI) is however prone to decomposition in sunlight and at elevated temperatures (e.g. above 100°C). Plated Ag-graphite films are also available
15 but with other characteristics than the Ag-graphene composite proposed herein.

According to some embodiments of the present disclosure, a proposed solution is based on a thin coating of Ag mixed with aligned layers of graphene (i.e. single or few layers of hexagonal carbon) distributed
20 throughout the coating. The microstructure and alignment, which may be important to the functionality of the coating, may be accomplished via an electrochemical co-deposition process as proposed herein.

It is known that graphene (G) sheets slide against each other with low friction due to very weak Van der Waals interactions between the pi-orbitals
25 perpendicular to the sheet plane. In addition, carbon and silver do not form strong bonds with each other. Therefore, adding G to an Ag matrix introduces a friction-reducing component that, when the surface rubs against another surface, G gathers on the surface and promotes low friction as the graphene sheets slide on top of each other and on top of the Ag metal. A beneficial
30 microstructure to minimize friction and to enable easy supply of new G

sheets to the coating surface as G (eventually) wears off, is when the G sheets are:

1. Completely dispersed and separated in the Ag-matrix.
2. Completely flat with no wrinkles or folds.
- 5 3. Completely aligned (parallel) with the contact surface.

By applying a carefully designed electroplating process as proposed herein, it may be possible to achieve a composite coating such as listed above, or at least close enough to have properties, e.g. tribological properties and wear resistance, superior to the current state of the art. This coating, in the
10 thickness range 1-20 μm , may be regarded as having self-lubricating properties, typically with friction coefficient values of at most 0.2 when sliding against a dry Cu or Ag counter contact surface. This can be compared a pure Ag contact sliding against another Ag or Cu surface, which gives a friction coefficient of >1 . In addition, G flakes, e.g. nanoflakes, induce
15 hardening of the Ag which substantially increases wear resistance. Also, the amount G needed for the improved properties is small (0.5 wt% graphene or less in the coating), and the graphene film formed on the coating surface is thin, which makes it possible to maintain the electrical properties of the Ag which is the main constituent of the coating. For these reasons, such a plating
20 can readily be used as replacement for greased Ag plating as a sliding contact material in a wide range of power switching products, e.g. those mentioned above.

Thus, embodiments of the invention relate to a self-lubricating contact coating to be used as replacement for grease-lubricated Ag plated sliding
25 contacts in power switching and interruption devices. The improved lubricating effect is stemming from the small amount of graphene flakes embedded in the Ag matrix, where the graphene flakes may preferably be aligned parallel to the substrate surface and distributed in such a way that a thin layer (e.g. in the range a few monolayers of carbon sheets) may be
30 formed on the composite surface during sliding. The graphene dispersion and alignment may be accomplished via an electroplating route, in which an

electrolyte, preferably aqueous, may in some embodiments be designed in such a way that:

- 1) An Ag salt is easily dissolved.
- 2) Graphene is dissolved but in a meta-stable state, such that the zeta (ζ)-
5 potential between sheets and electrolyte is positive and between 10 and 40 mV, and such that electrophoresis of the graphene flakes occurs when an electric negative potential is applied on the substrate surface.

The above may be achieved by selecting the electrolyte solvent and Ag-salt as well as attaching a suitable surfactant/metal (e.g. Ag⁺) ion onto the graphene
10 flakes giving it a slight positive charge. The graphene flux towards the surface can be adjusted by means of the pH (and hence the zeta-potential) of the solution. Ultrasonication may in some embodiments be used to maintain separation of the graphene flakes in the electrolyte. Nucleation of Ag around the flakes is promoted by the attached surfactant/metal ion on the graphene
15 and by the use of sub-micron lateral size of the flakes.

Figure 1a is a schematic sectional illustration of a substrate 1, e.g. of copper, submerged in a plating bath 6 before an electrical field is applied. In the plating bath, the graphene flakes 3 are dispersed substantially evenly, preferably forming a stable dispersion. It can be noted that the flakes are not
20 aligned at this stage, but have random orientations. A cationic surfactant, in combination with the pH set in bath 6 by means of a pH adjusting compound, provides a suitable zeta potential of the graphene-electrolyte interface to prevent the flakes from aggregating while at the same time facilitating electrophoresis when an electrical field is provided in the bath. The bath 6
25 also comprises dissolved silver ions (Ag⁺) which are prevented from spontaneously depositing on the substrate surface 4 before the electrical field is applied by means of a silver complexing agent. A solution of Ag ions without a silver complexing agent could potentially reduce spontaneously to Ag (electroless plating), but this is undesirable since then the graphene flakes
30 will not move together with the Ag ions towards the substrate surface when the electrical field is applied.

The electrolyte 2 is preferably water-based, since an electroplating process in ethanol is currently not industrially feasible.

The zeta potential of the graphene-electrolyte interface in the plating bath is adjusted to be positive and within the range of 10 to 40 or 30 mV by means of
5 the cationic surfactant and by setting the pH of the plating bath with the pH adjusting compound. In some embodiments, the zeta potential is adjusted to within the range of 15-25 mV, preferably 18-22 mV or 19-21 mV, such as to 20 mV.

In some embodiments of the present invention, the pH adjusting compound
10 is or comprises potassium hydroxide (KOH) and/or sodium hydroxide (NaOH). In some embodiments KOH may be preferred, but it should be noted that any suitable pH adjusting compound may be used.

In some embodiments of the present invention, the cationic surfactant is or comprises cetyltrimethylammonium bromide (CTAB), dodecyltrimethyl-
15 ammonium bromide (DTAB), tetrabutylammonium bromide (TBAB), and/or octyltrimethylammonium bromide (OTAB). In some embodiments CTAB may be preferred, but it should be noted that any suitable cationic surfactant may be used. Additionally or alternatively, the surfactant polyethyleneimine (PEI) may be used.

20 For instance, if the cationic surfactant is CTAB, the pH of the plating bath 6 may be set to within the range of 10-13, preferably 11-12, by means of the pH adjusting compound in order to obtain the desired zeta potential. In contrast, if PEI is used, the pH of the plating bath 6 may be set to within the range of 6-9, preferably 7-8, by means of the pH adjusting compound in order to
25 obtain the desired zeta potential.

In some embodiments of the present invention, the surfactant may be present in the plating bath 6 in a concentration within the range of 0.5-2 mmol/L, e.g. within the range of 0.8-1.5 mmol/L or 0.8-1.2 mmol/L, such as 0.9-1.1 mmol/L, in order to obtain the desired zeta potential.

In some embodiments of the present invention, the silver salt is or comprises silver nitrate (AgNO_3) and/or silver oxide (Ag_2O). AgNO_3 may be preferred in some embodiments, but any suitable water-soluble silver salt may be used.

In some embodiments of the present invention, the silver salt is present in the plating bath 6 in a concentration within the range of 0.1-0.5 mol/L, e.g. within the range of 0.2-0.4 mol/L, such as 0.3 mol/L, which are suitable concentrations for achieving the electroplating and obtaining the coat 5.

In some embodiments of the present invention, the silver complexing agent is or comprises 5,5-dimethylhydantion, thiosulfate, ammonia, and/or thiourea. In some embodiments 5,5-dimethylhydantion may be preferred, but any suitable silver complexing agent may be used.

In some embodiments of the present invention, the silver complexing agent is present in the plating bath 6 in a concentration within the range of 0.5-2 mol/L, e.g. within the range of 1-1.5 mol/L or 1.1-1.3 mol/L, such as 1.2 mol/L, which may be suitable concentrations for stabilizing the Ag ions in the bath before the electrical field is applied.

In some embodiments of the present invention, the silver-graphene composite 5 has a graphene content within the range of 0.05-1% by weight of the composite, e.g. within the range of 0.2-0.5% or 0.2-0.4% by weight of the composite. These are regarded as suitable graphene concentrations for providing the improved tribological and wear properties while still not substantially altering the electrical properties compared with a pure silver coating.

In some embodiments of the present invention, wherein the coating 5 has a thickness within the range of 1-20 μm , e.g. within the range of 5-15 μm , such as 10 μm . These thicknesses may generally be suitable for a sliding contact, considering the number of sliding repetitions during a lifetime of a contact weighed against the material and production cost of the coating.

In some embodiments of the present invention, wherein the graphene flakes (3) have an average longest axis within the range of from 100 nm to 50 μm , e.g. within the range of 300 nm to 20 or 10 μm , preferably within the range of 500 nm to 1 μm .

- 5 In some embodiments of the present invention, the graphene flakes 3 have up to 150 graphene layers, e.g. up to 100 layers or up to 50 layers, preferably at most 10 layers such as 1-5 layers. For instance, graphene nanoplatelets of 11-150 graphene sheets may be used. The flakes are preferably thin enough to not substantially alter the electrical properties of the coating compared to
10 pure silver coatings, but preferably contains at least two graphene sheets (i.e. monolayers) which can slide relative to each other with low friction.

Figure 1b is a schematic sectional illustration of the substrate 1 submerged in the plating bath 6 while an electrical field is applied, whereby graphene flakes 3 are aligned and travelling towards the substrate surface 4. By applying the
15 electrical field, a negative potential is applied to the surface 4 of the substrate 1, as illustrated by the “-” signs in the figure. The flakes 3 aligns such that the planes of the respective flakes are substantially parallel with the plane of the surface 4, and the flakes move by electrophoresis towards the surface 4 with a speed which corresponds with the speed with which the Ag ions are
20 transformed to silver on the surface by electroplating, thus co-depositing the graphene with the silver to form the composite coating 5 with graphene flakes dispersed throughout the thickness of the coating.

Figure 1c is a schematic sectional illustration of the substrate 3 submerged in the plating bath after the electrical field has been applied, whereby the silver-
25 graphene composite coating 5 has been formed on the substrate surface 4.

Figure 2 is a schematic block diagram of an electrical power device 11 comprising a sliding electrical contact 10 in which the substrate 1 with the composite coating 5 is comprised. The contact 10 may be any type of sliding contact used in electrical applications and which is desired to be operated
30 grease-free, e.g. in circuit breakers or any other switch for LV, MV or HV

applications, typically in applications where silver plated sliding contacts are already used. The device 11 may similarly be any device in such applications, e.g. LV breakers and disconnectors, various plug-in sockets, rack-mounted cabinets, MV breaking switches and disconnectors (e.g. gas/air), MV and HV GIS, HV breakers and GCB etc., preferably, in some embodiments, nominal contact system in HV breakers, generator circuit breakers, interrupters or disconnecting circuit breakers (DCB). Specifically, the device may be an OLTC, since grease may not be used when the OLTC operates in an oil-filled environment.

10 The electrical contact 10 is herein described as a sliding contact, which is often preferred, e.g. for an interrupter, but also other types of electrical contacts may benefit from comprising the composite coating 5. For instance, the electrical contact 10 may be a knife contact (also called a knife switch), e.g. an earthing knife contact, for instance comprised in a DCB. However, in 15 other DCB embodiments, the contact 10 may be a sliding contact.

Figure 3 is a schematic flow chart of an embodiment of the method of the present invention. In a first step, the plating bath 6 is prepared M1. As mentioned above, the plating bath comprises a dissolved water soluble silver salt, dispersed graphene flakes 3, and an aqueous electrolyte 2. The 20 electrolyte 2 comprises a silver complexing agent, a cationic surfactant, and a pH adjusting compound. The zeta potential of the graphene-electrolyte interface in the plating bath is adjusted to be positive and within the range of 10-30 mV by means of the cationic surfactant and the pH adjusting compound. In a second step, a negative electric potential is applied M2 on a 25 surface 4 of the substrate such that electrophoresis of the graphene flakes occurs and said flakes are co-deposited with the silver during electroplating thereof to form a silver-graphene composite coating 5 on the substrate surface. The negative electric potential may be applied by applying an electric field across the plating bath 6 such that the substrate surface 4 obtains a 30 negative potential. The electric field may be obtained e.g. by applying a constant Direct Current (DC) or a constant DC potential or by using a periodic or pulsed source.

Example

By applying a designed electroplating process, one can achieve an Ag-graphene composite coating 5 with the following properties:

1. A small amount (0.05-0.5 wt%) G flakes 3 are dispersed and separated
5 in the Ag matrix.
 2. The G flakes are flat with substantially no wrinkles or folds within the Ag matrix.
 3. The G flakes within the Ag matrix are aligned (preferably parallel) with the contact surface 4.
- 10 This coating 5, in the thickness range of 1-20 μm , has self-lubricating properties with a friction coefficient values of 0.2 or less vs. a dry Ag surface. In addition, the nanoplatelets of G induce hardening of the Ag which substantially increases wear resistance.

The graphene dispersion and alignment are accomplished via an
15 electroplating route, in which an electrolyte of the plating bath, preferably aqueous, is designed in such a way that:

1. An Ag salt is easily dissolved in the plating electrolyte (without the presence of cyanide-based complexing agents).
2. Graphene is dissolved but in a meta-stable state, such that the zeta
20 potential between flakes 3 and electrolyte is positive and between 10 and 30 mV, and such that electrophoresis of the flakes occurs when an electric negative potential is applied on the substrate surface 4.

An example of such a plating bath is the following:

Component	Range
AgNO ₃ (soluble Ag salt)	0,3 mol/l (ca. 50 g/l)
5,5-Dimethylhydantion (Ag complexing agent)	1,2 mol/l (ca. 155 g/l)
Graphene	0,1 g/l
CTAB (cationic surfactant to create positive zeta potential of the graphene-surfactant complex)	1 mmol/l (ca. 0,35 g/l)
KOH (pH adjust to 11-12 to set zeta potential to values around 20 mV)	ca. 1 mmol/l (ca. 0,05 g/l)

The present disclosure has mainly been described above with reference to a few embodiments. However, as is readily appreciated by a person skilled in the art, other embodiments than the ones disclosed above are equally possible within the scope of the present disclosure, as defined by the appended claims.

CLAIMS

1. A method of electroplating of a silver-graphene composite (5) onto a substrate (1), the method comprising:

preparing (M1) a plating bath (6) comprising:

5 a dissolved water soluble silver salt,

dispersed graphene flakes (3), and

an aqueous electrolyte (2), the electrolyte comprising:

a silver complexing agent,

a cationic surfactant, and

10 a pH adjusting compound,

wherein the zeta potential of the graphene-electrolyte interface in the plating bath is adjusted to be positive and within the range of 10-30 mV by means of the cationic surfactant and the pH adjusting compound; and

applying (M2) a negative electric potential on a surface (4) of the substrate

15 such that electrophoresis of the graphene flakes occurs and said flakes are co-deposited with the silver during electroplating thereof to form a silver-graphene composite coating (5) on the substrate surface.

2. The method of any preceding claim, wherein the pH adjusting compound is or comprises potassium hydroxide, KOH, or sodium hydroxide, 20 NaOH, preferably KOH.

3. The method of any preceding claim, wherein the cationic surfactant is or comprises cetyltrimethylammonium bromide, CTAB; dodecyltrimethylammonium bromide, DTAB; tetrabutylammonium bromide, TBAB; and/or octyltrimethylammonium bromide, OTAB.

4. The method of any preceding claim, wherein the cationic surfactant is present in the plating bath (6) in a concentration within the range of 0.5-2 mmol/L, e.g. within the range of 0.8-1.5 mmol/L or 0.8-1.2 mmol/L, such as 0.9-1.1 mmol/L.
5. The method of any preceding claim, wherein the zeta potential is adjusted to within the range of 15-25 mV, preferably 18-22 mV or 19-21 mV.
6. The method of any preceding claim, wherein the silver salt is or comprises silver nitrate, AgNO_3 , or silver oxide, Ag_2O , preferably AgNO_3 .
7. The method of any preceding claim, wherein the silver salt is present in the plating bath (6) in a concentration within the range of 0.1-0.5 mol/L, e.g. within the range of 0.2-0.4 mol/L, such as 0.3 mol/L.
8. The method of any preceding claim, wherein the silver complexing agent is or comprises 5,5-dimethylhydantion, thiosulfate, ammonia, or thiourea, preferably 5,5-dimethylhydantion.
9. The method of any preceding claim, wherein the silver complexing agent is present in the plating bath (6) in a concentration within the range of 0.5-2 mol/L, e.g. within the range of 1-1.5 mol/L, such as 1.1-1.3 mol/L.
10. The method of any preceding claim, wherein the silver-graphene composite (5) has a graphene content within the range of 0.05-1% by weight of the composite, e.g. within the range of 0.2-0.5% or 0.2-0.4% by weight of the composite.
11. The method of any preceding claim, wherein the graphene flakes (3) have an average longest axis within the range of from 100 nm to 50 μm , e.g. within the range of 300 nm to 20 μm , preferably 500 nm to 1 μm .
12. The method of any preceding claim, wherein the graphene flakes (3) have up to 150 graphene layers, e.g. up to 100 layers or up to 50 layers, preferably at most 10 layers such as 1-5 layers.

13. A silver-graphene composite coating (5) on a substrate (1) surface (4), comprising graphene in the form of graphene flakes (3) having an average longest axis within the range of from 100 nm to 50 μm ;

wherein the silver-graphene composite (5) has a graphene content within the
5 range of 0.05-1% by weight of the composite; and

wherein the graphene flakes are aligned parallel to the substrate surface.

14. An electrical contact (10) of an electric power device (11) comprising the coating (5) of claim 13, e.g. a sliding contact or earthing knife contact.

15. An electric power device (11), e.g. a high-voltage breaker, a generator
10 circuit breaker, an interrupter or a disconnecting circuit breaker, comprising the contact (10) of claim 14.

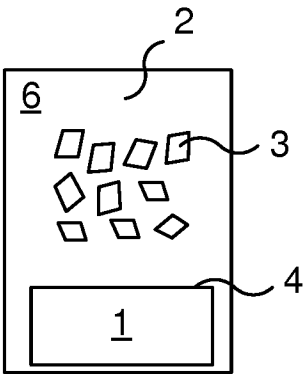


Fig. 1a




Fig. 1b

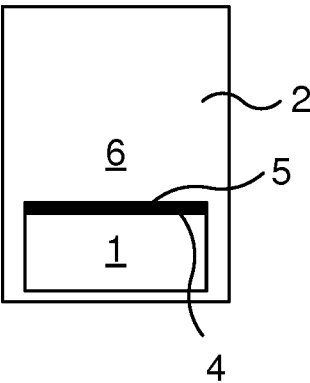


Fig. 1c

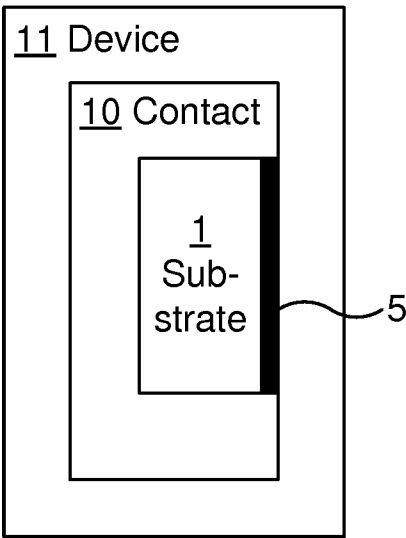


Fig. 2

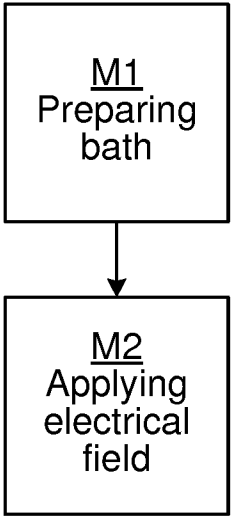


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/077292

A. CLASSIFICATION OF SUBJECT MATTER
INV. C25D3/46 C25D7/00 C25D15/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C25D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	MEHMET UYSAL ET AL: "Structural and sliding wear properties of Ag/Graphene/WC hybrid nanocomposites produced by electroless co-deposition", JOURNAL OF ALLOYS AND COMPOUNDS., vol. 654, 1 January 2016 (2016-01-01), pages 185-195, XP055573923, CH ISSN: 0925-8388, DOI: 10.1016/j.jallcom.2015.08.264 cited in the application abstract page 185 paragraphs [02.1], [02.2]; table 1 page 187, right-hand column paragraph [03.3] ----- -/-	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 December 2019

Date of mailing of the international search report

10/12/2019

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Picard, Sybille

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/077292

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2014/374267 A1 (MONTEIRO OTHON [US] ET AL) 25 December 2014 (2014-12-25) abstract figures 2,3 paragraph [0009] paragraphs [0014], [0015] paragraphs [0052] - [0054] paragraphs [0060] - [0061] paragraph [0071] claims 1,3,8,9,12 -----	1-15
A	CN 105 821 465 A (UNIV NANCHANG HANGKONG) 3 August 2016 (2016-08-03) claim 1 -----	1-15
A	CN 107 345 307 A (ELECTRIC POWER RES INST GUANGDONG POWER GRID CORP) 14 November 2017 (2017-11-14) abstract embodiments 1, 9 -----	1-15
A	CN 107 217 292 A (ELECTRIC POWER RES INST GUANGDONG POWER GRID CORP) 29 September 2017 (2017-09-29) abstract -----	1-15
A	EP 1 939 331 A1 (DOWA MINING CO [JP]) 2 July 2008 (2008-07-02) abstract paragraph [0001] paragraph [0022] paragraphs [0022] - [0025] paragraph [0029]; example 1 table 2 -----	1-15
A	MAO FANG ET AL: "Graphene as a lubricant on Ag for electrical contact applications", JOURNAL OF MATERIALS SCIENCE, KLUWER ACADEMIC PUBLISHERS, DORDRECHT, vol. 50, no. 19, 3 July 2015 (2015-07-03), pages 6518-6525, XP035511489, ISSN: 0022-2461, DOI: 10.1007/S10853-015-9212-9 [retrieved on 2015-07-03] abstract Materials and methods Conclusion -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/077292

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014374267 A1	25-12-2014	EP 3011079 A1	27-04-2016
		US 2014374267 A1	25-12-2014
		US 2018340267 A1	29-11-2018
		WO 2014205330 A1	24-12-2014

CN 105821465 A	03-08-2016	NONE	

CN 107345307 A	14-11-2017	NONE	

CN 107217292 A	29-09-2017	NONE	

EP 1939331 A1	02-07-2008	CN 101287862 A	15-10-2008
		EP 1939331 A1	02-07-2008
		JP 4862192 B2	25-01-2012
		JP 2007092141 A	12-04-2007
		US 2009229987 A1	17-09-2009
		WO 2007037144 A1	05-04-2007
