




(86) Date de dépôt PCT/PCT Filing Date: 2003/02/07
(87) Date publication PCT/PCT Publication Date: 2003/08/14
(85) Entrée phase nationale/National Entry: 2004/07/27
(86) N° demande PCT/PCT Application No.: CA 2003/000174
(87) N° publication PCT/PCT Publication No.: 2003/067624
(30) Priorité/Priority: 2002/02/08 (60/354,711) US

(51) Cl.Int.⁷/Int.Cl.⁷ H01J 49/04
(71) Demandeur/Applicant:
IONALYTICS CORPORATION, CA
(72) Inventeurs/Inventors:
GUEVREMONT, ROGER, CA;
PURVES, RANDY, CA;
BARNETT, DAVID, CA
(74) Agent: FREEDMAN, GORDON

(54) Titre : APPAREIL DE SPECTROMETRIE FAIMS POSSEDANT PLUSIEURS ORIFICES D'ENTREE D'IONS ET
PROCEDE ASSOCIE

(54) Title: FAIMS APPARATUS HAVING PLURAL ION INLETS AND METHOD THEREFORE

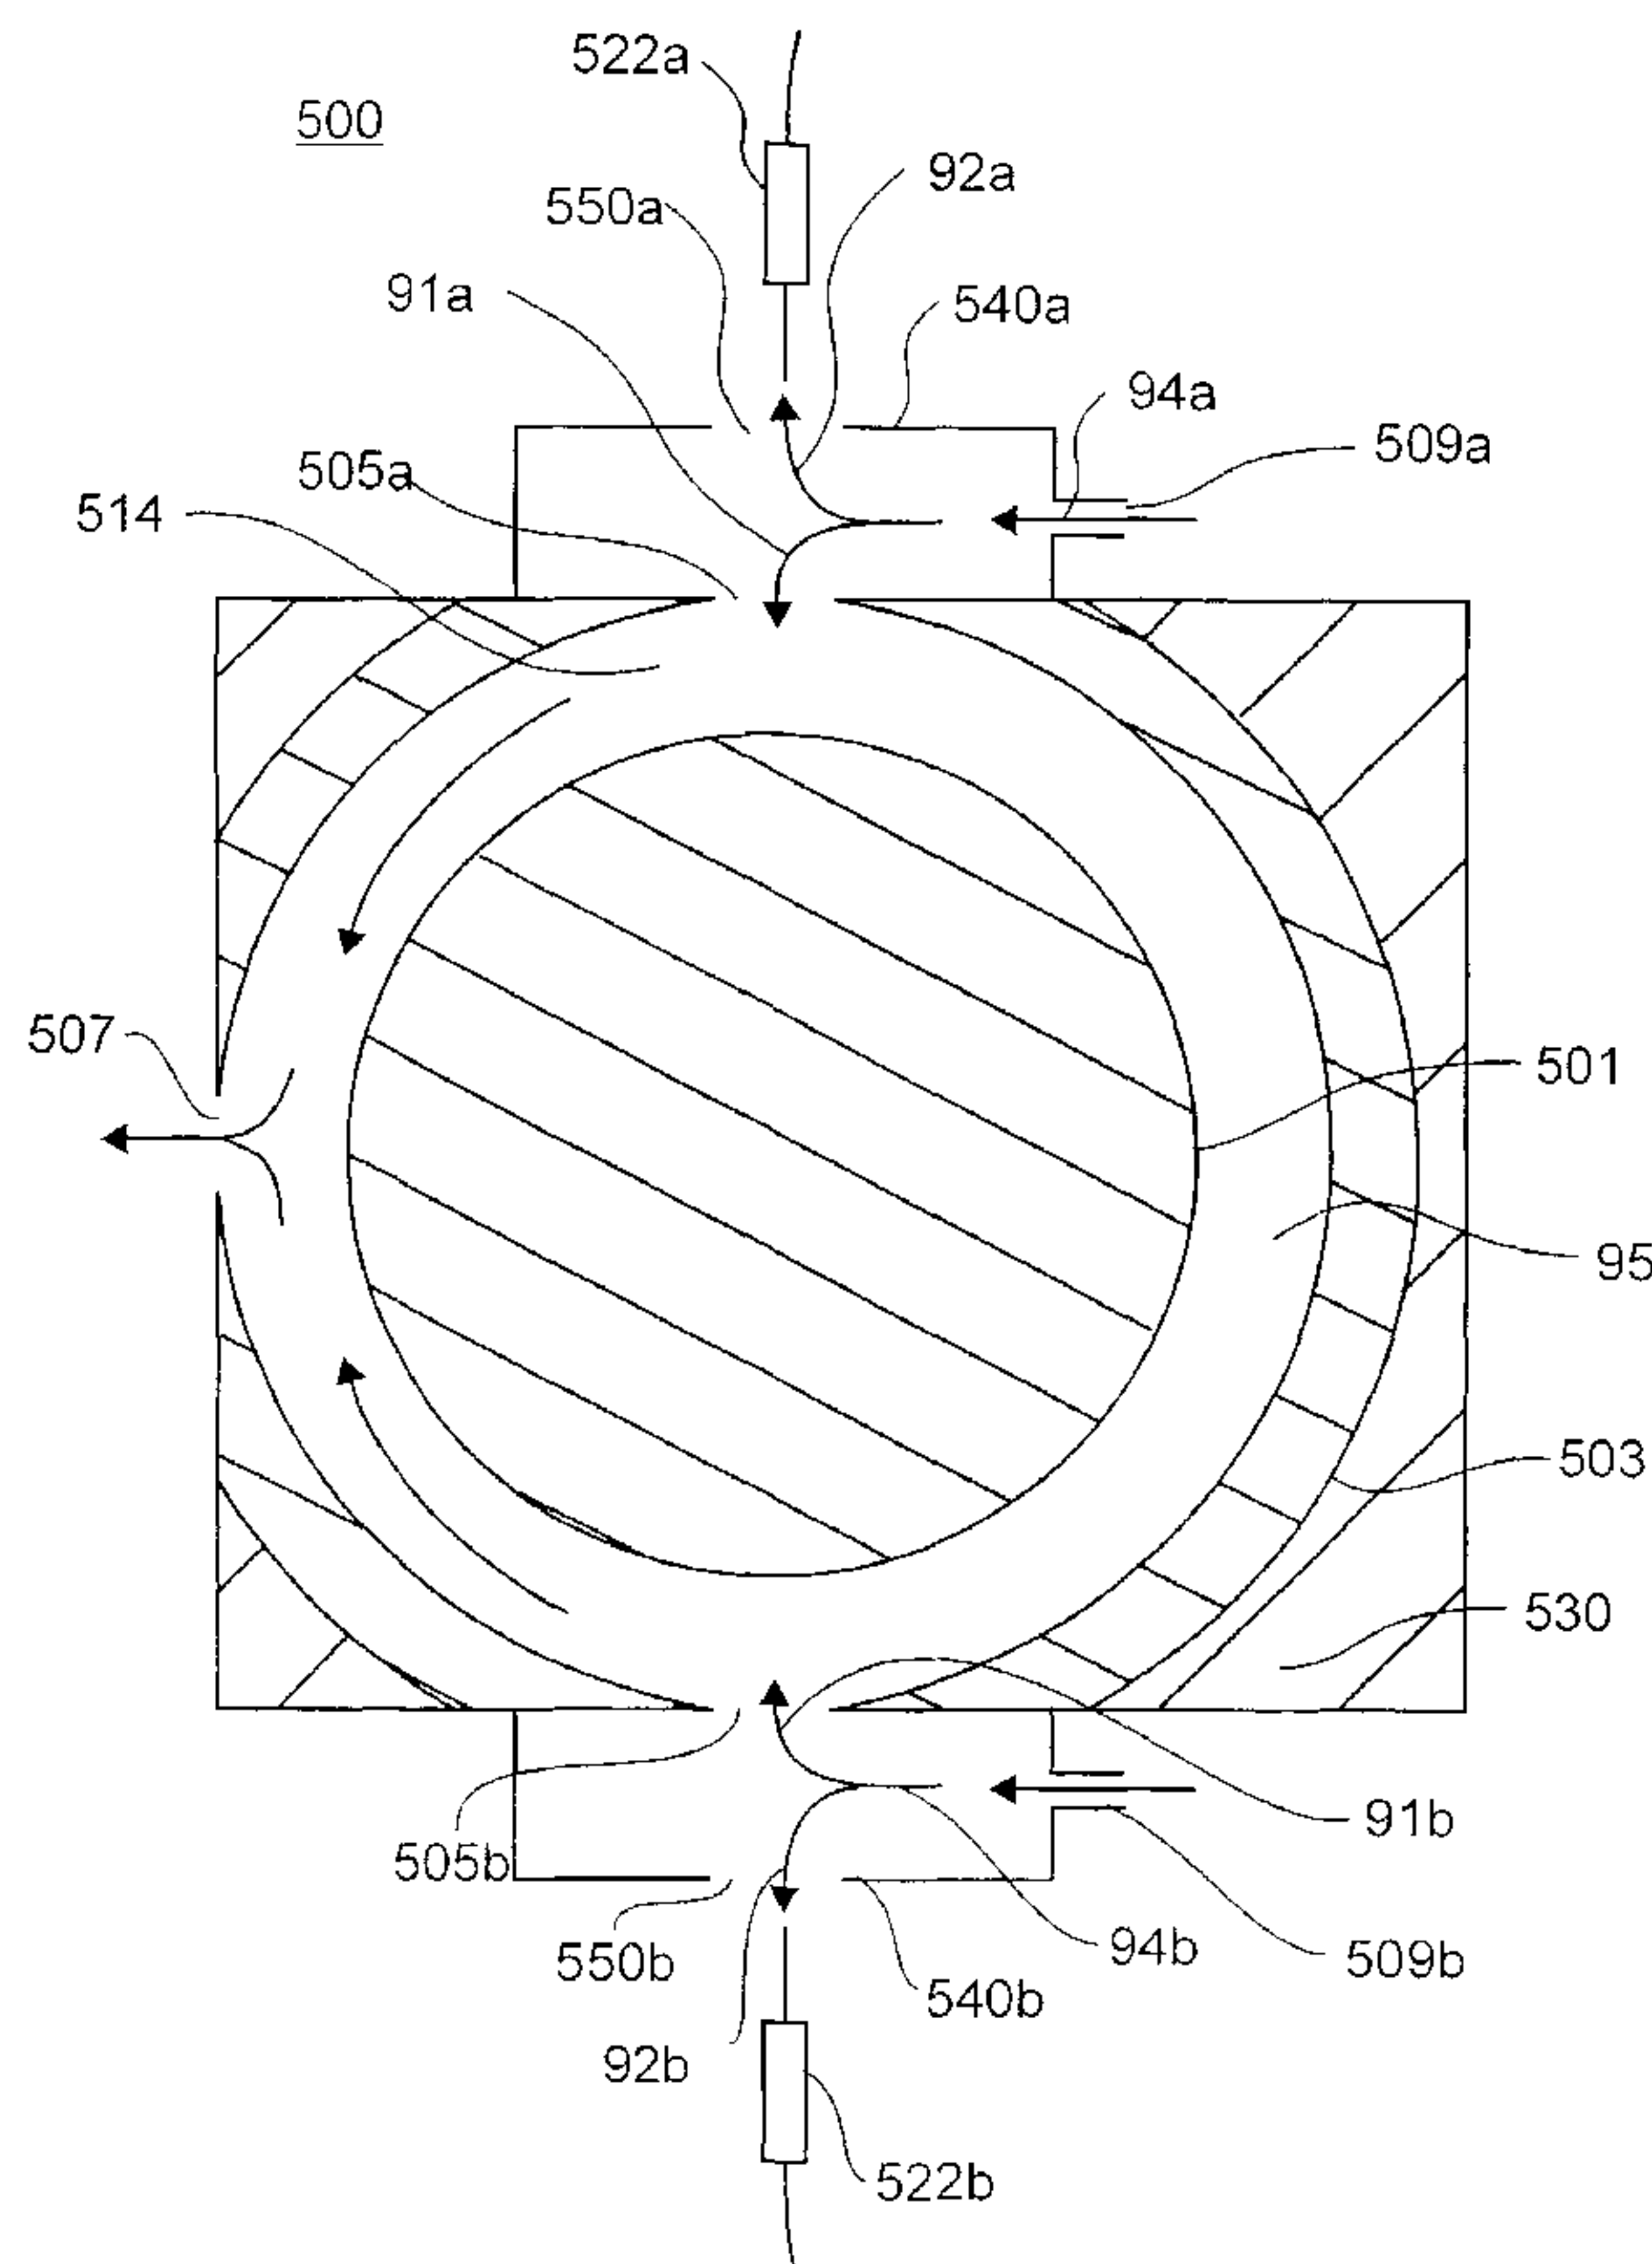

(57) **Abrégé/Abstract:**

An apparatus according to the instant invention includes a high field asymmetric waveform ion mobility spectrometer including an inner electrode (501) having an outer surface and a length. The apparatus further includes an outer electrode (503) having an inner surface and a length and surrounding the inner electrode over at least a portion of the length of the inner electrode, the inner



(57) **Abrégé(suite)/Abstract(continued):**

electrode and the outer electrode defining an analyzer region therebetween and being disposed in a spaced apart arrangement for allowing ions to propagate therebetween. The outer electrode also includes an outlet from the analyzer region and at least a first ion inlet (505a) and a second distinct ion inlet (505b) into the analyzer region. The first ion inlet and the second distinct ion inlet are each for communicating with at least one ionization source. The inner electrode and the outer electrode are for providing an electric field within the analyzer region resulting from application of an asymmetric waveform voltage to at least one of the inner electrode and the outer electrode and from application of a compensation voltage to at least one of the inner electrode and outer electrode, the electric field for selectively transmitting ions within the analyzer region between at least one of the first ion inlet and the second distinct ion inlet and the outlet.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 August 2003 (14.08.2003)

PCT

(10) International Publication Number
WO 03/067624 A1

(51) International Patent Classification⁷: **H01J 49/04**

(21) International Application Number: PCT/CA03/00174

(22) International Filing Date: 7 February 2003 (07.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/354,711 8 February 2002 (08.02.2002) US

(71) Applicant (for all designated States except US): **IONA-
LYTICS CORPORATION** [CA/CA]; Building M-50,
IPF, 1200 Montreal Road, Ottawa, Ontario K1A 0R6 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GUEVREMONT,
Roger** [CA/CA]; 2059 Gatineau View Crescent, Ottawa,
Ontario K1J 7W9 (CA). **PURVES, Randy** [CA/CA];

59-6247 Sundown Crescent, Gloucester, Ontario K1C
2M1 (CA). **BARNETT, David** [CA/CA]; 1934 Longman
Crescent, Orleans, Ontario K1C 5G6 (CA).


(74) Agent: **FREEDMAN, Gordon**; Freedman & Associates,
117 Centrepointhe Drive, Suite 350, Nepean, Ontario K2G
5X3 (CA).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: FAIMS APPARATUS HAVING PLURAL ION INLETS AND METHOD THEREFORE

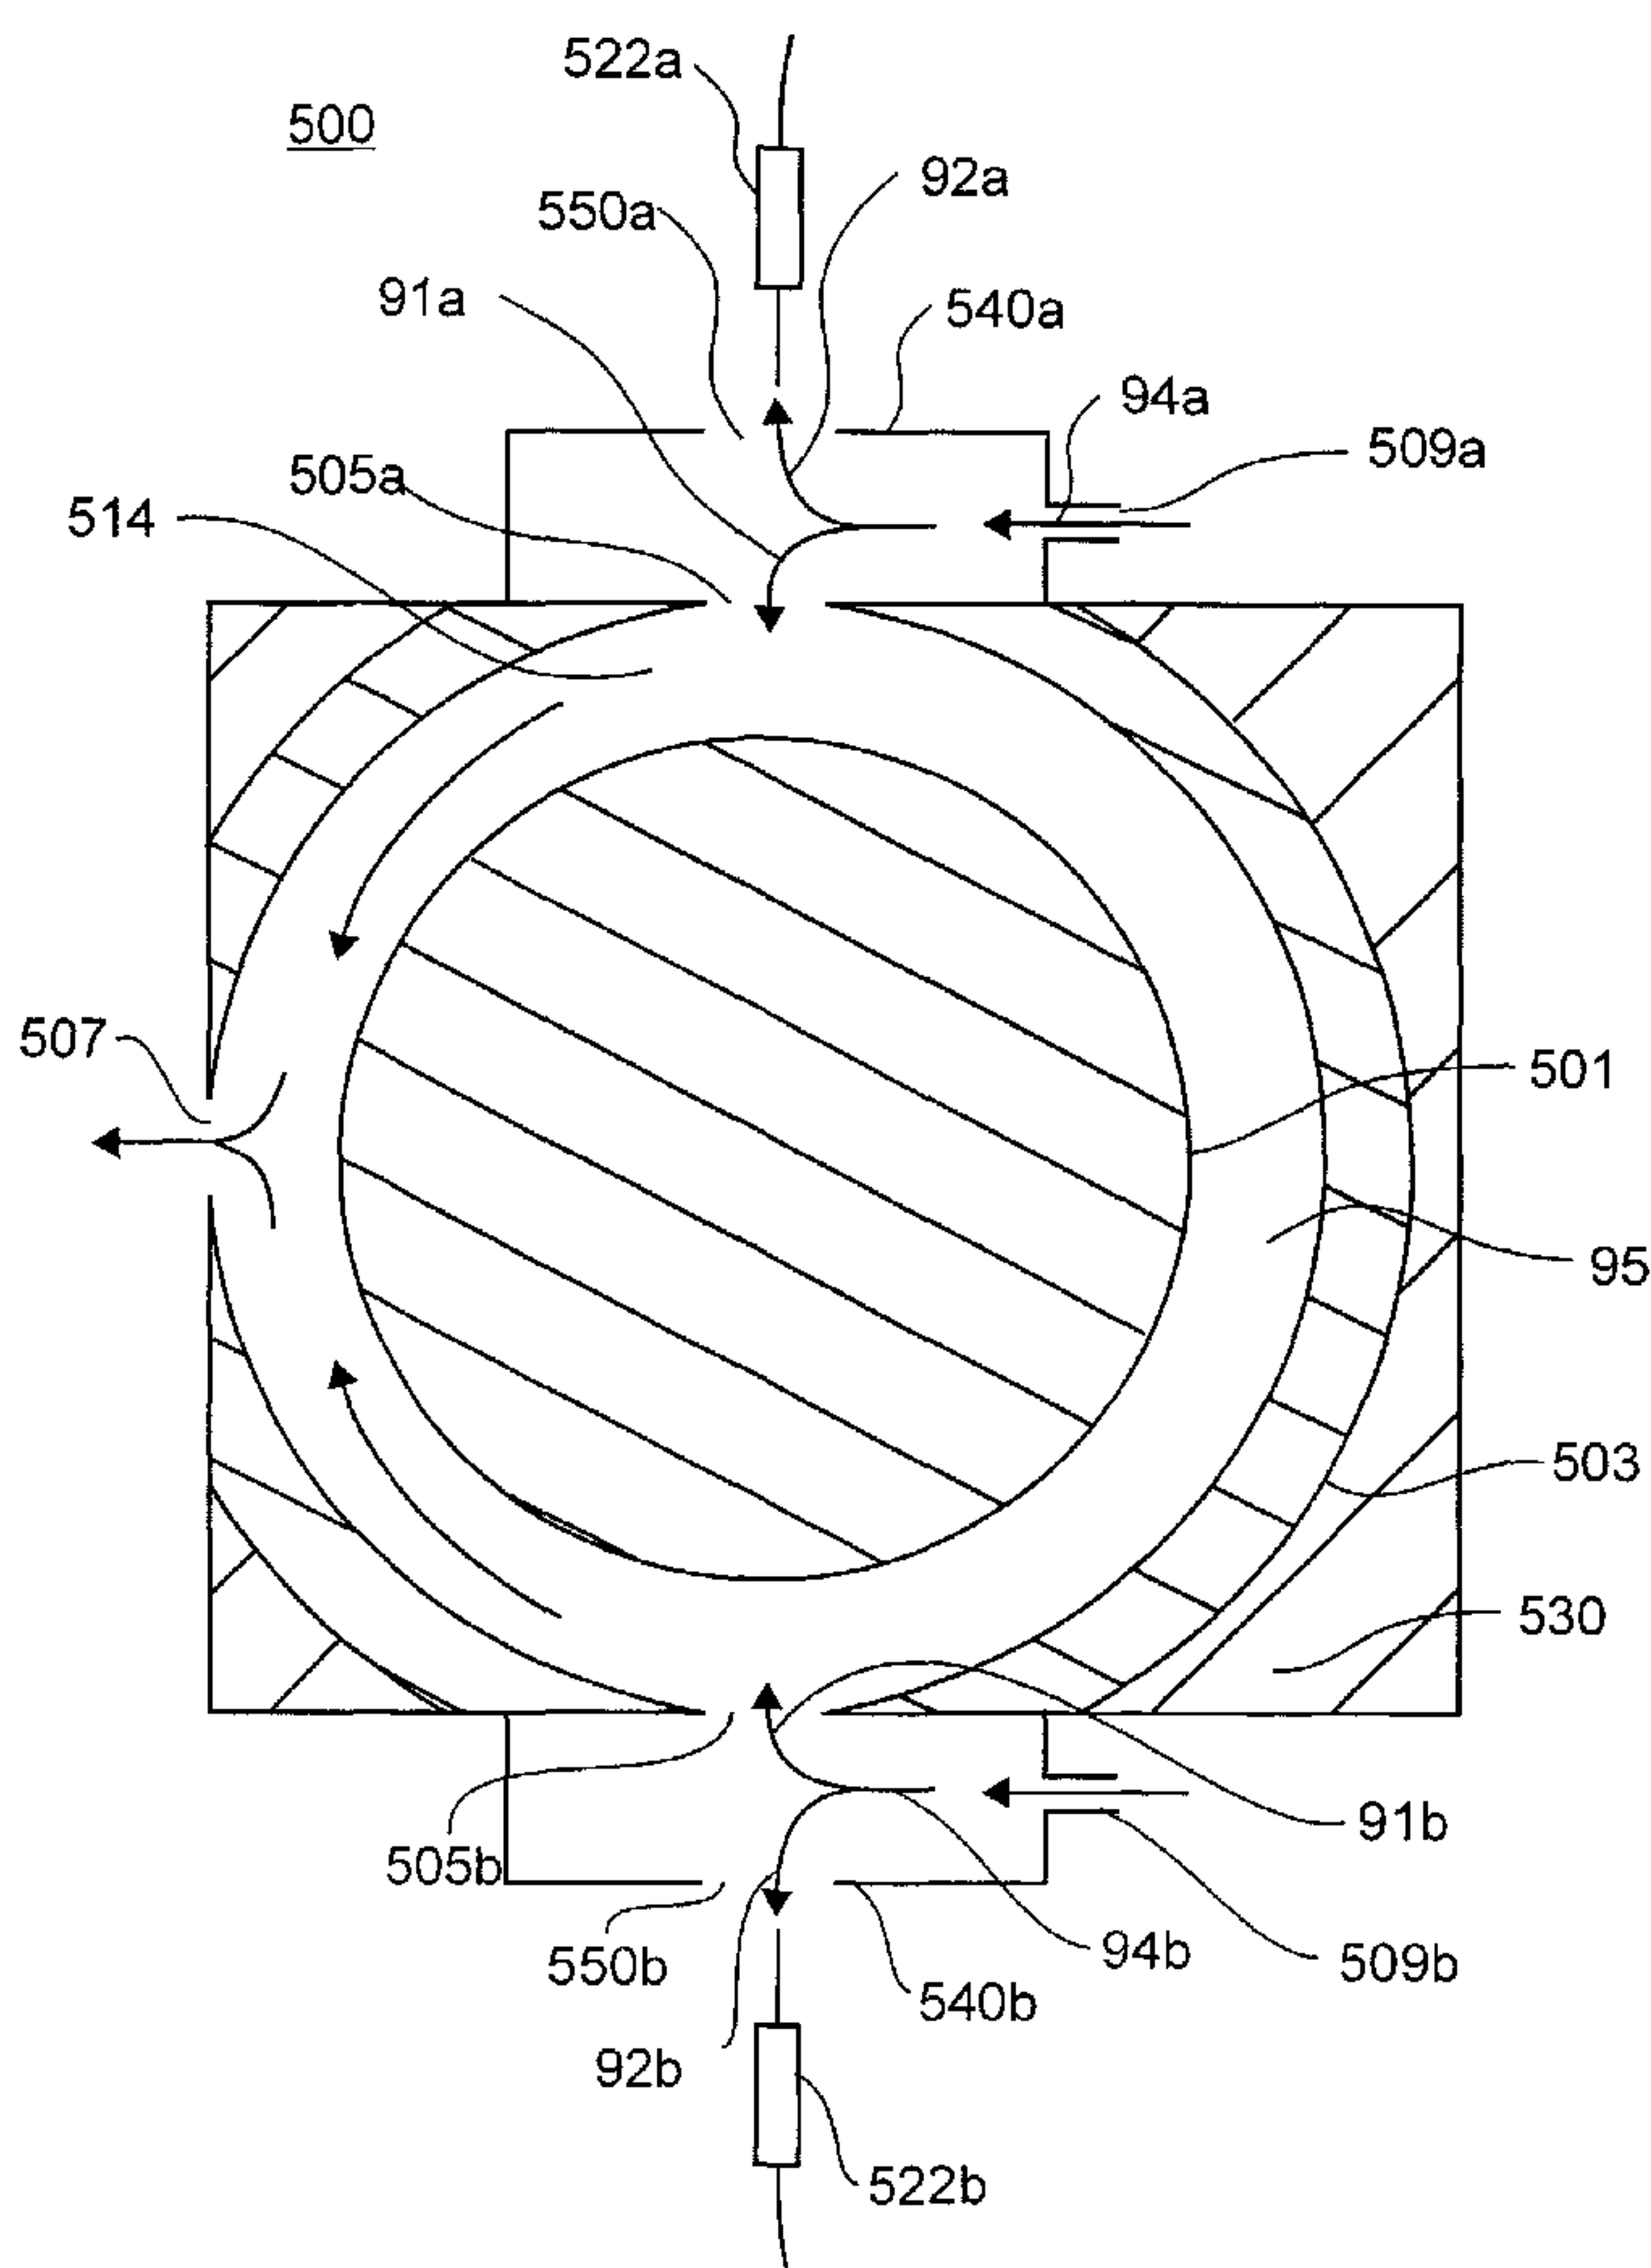

(57) Abstract: An apparatus according to the instant in-
vention includes a high field asymmetric waveform ion
mobility spectrometer including an inner electrode (501)
having an outer surface and a length. The apparatus fur-
ther includes an outer electrode (503) having an inner
surface and a length and surrounding the inner elec-
trode over at least a portion of the length of the inner elec-
trode, the inner electrode and the outer electrode defin-
ing an analyzer region therebetween and being disposed
in a spaced apart arrangement for allowing ions to prop-
agate therebetween. The outer electrode also includes an
outlet from the analyzer region and at least a first ion in-
let (505a) and a second distinct ion inlet (505b) into the
analyzer region. The first ion inlet and the second dis-
tinct ion inlet are each for communicating with at least
one ionization source. The inner electrode and the outer
electrode are for providing an electric field within the an-
alyzer region resulting from application of an asymmet-
ric waveform voltage to at least one of the inner elec-
trode and the outer electrode and from application of a
compensation voltage to at least one of the inner elec-
trode and outer electrode, the electric field for selectively
transmitting ions within the analyzer region between at
least one of the first ion inlet and the second distinct ion
inlet and the outlet.

WO 03/067624 A1

WO 03/067624 A1

European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY,*

BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *of inventorship (Rule 4.17(iv)) for US only*

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

FAIMS Apparatus Having Plural Ion Inlets and Method Therefore

Field of the Invention

[001] The instant invention relates generally to high field asymmetric waveform ion mobility spectrometry (FAIMS), more particularly the instant invention relates to FAIMS device having an inner electrode and an outer electrode, in which are disposed multiple inlets for gases and ion streams.

Background of the Invention

[002] High sensitivity and amenability to miniaturization for field-portable applications have helped to make ion mobility spectrometry (IMS) an important technique for the detection of many compounds, including narcotics, explosives, and chemical warfare agents as described, for example, by G. Eiceman and Z. Karpas in their book entitled "Ion Mobility Spectrometry" (CRC, Boca Raton, 1994). In IMS, gas-phase ion mobilities are determined using a drift tube with a constant electric field. Ions are separated in the drift tube on the basis of differences in their drift velocities. At low electric field strength, for example 200 V/cm, the drift velocity of an ion is proportional to the applied electric field strength, and the mobility, K , which is determined from experimentation, is independent of the applied electric field. Additionally, in IMS the ions travel through a bath gas that is at sufficiently high pressure that the ions rapidly reach constant velocity when driven by the force of an electric field that is constant both in time and location. This is to be clearly distinguished from those techniques, most of which are related to mass spectrometry, in which the gas pressure is sufficiently low that, if under the influence of a constant electric field, the ions continue to accelerate.

[003] E.A. Mason and E.W. McDaniel in their book entitled "Transport Properties of Ions in Gases" (Wiley, New York, 1988) teach that at high electric field strength, for instance fields stronger than approximately 5,000 V/cm, the ion drift velocity is no longer directly proportional to the applied electric field, and K is better represented by K_H , a non-constant high field mobility term. The dependence of K_H on the applied electric field has been the basis for the development of high field asymmetric waveform ion mobility spectrometry (FAIMS). Ions are separated in a FAIMS

analyzer on the basis of a difference in the mobility of an ion at high field strength, K_H , relative to the mobility of the ion at low field strength, K . In other words, the ions are separated due to the compound dependent behavior of K_H as a function of the applied electric field strength.

[004] In general, a device for separating ions according to the FAIMS principle has an analyzer region that is defined by a space between first and second spaced-apart electrodes. The first electrode is maintained at a selected dc voltage, often at ground potential, while the second electrode has an asymmetric waveform $V(t)$ applied to it. The asymmetric waveform $V(t)$ is composed of a repeating pattern including a high voltage component, V_H , lasting for a short period of time t_H and a lower voltage component, V_L , of opposite polarity, lasting a longer period of time t_L . The waveform is synthesized such that the integrated voltage-time product, and thus the field-time product, applied to the second electrode during each complete cycle of the waveform is zero, for instance $V_H t_H + V_L t_L = 0$; for example +2000 V for 10 μ s followed by -1000 V for 20 μ s. The peak voltage during the shorter, high voltage portion of the waveform is called the “dispersion voltage” or DV, which is identically referred to as the applied asymmetric waveform voltage.

[005] Generally, the ions that are to be separated are entrained in a stream of gas flowing through the FAIMS analyzer region, for example between a pair of horizontally oriented, spaced-apart electrodes. Accordingly, the net motion of an ion within the analyzer region is the sum of a horizontal x-axis component due to the stream of gas and a transverse y-axis component due to the applied electric field. During the high voltage portion of the waveform an ion moves with a y-axis velocity component given by $v_H = K_H E_H$, where E_H is the applied field, and K_H is the high field ion mobility under operating electric field, pressure and temperature conditions. The distance traveled by the ion during the high voltage portion of the waveform is given by $d_H = v_H t_H = K_H E_H t_H$, where t_H is the time period of the applied high voltage. During the longer duration, opposite polarity, low voltage portion of the asymmetric waveform, the y-axis velocity component of the ion is $v_L = K E_L$, where K is the low field ion mobility under operating pressure and temperature conditions. The distance traveled is $d_L = v_L t_L = K E_L t_L$. Since the asymmetric waveform ensures that $(V_H t_H) + (V_L t_L) = 0$, the field-time products $E_H t_H$ and $E_L t_L$ are equal in magnitude. Thus, if K_H

and K are identical, d_H and d_L are equal, and the ion is returned to its original position along the y-axis during the negative cycle of the waveform. If at E_H the mobility $K_H > K$, the ion experiences a net displacement from its original position relative to the y-axis. For example, if a positive ion travels farther during the positive portion of the waveform, for instance $d_H > d_L$, then the ion migrates away from the second electrode and eventually will be neutralized at the first electrode.

[006] In order to reverse the transverse drift of the positive ion in the above example, a constant negative dc voltage is applied to the second electrode. The difference between the dc voltage that is applied to the first electrode and the dc voltage that is applied to the second electrode is called the “compensation voltage” (CV). The CV voltage prevents the ion from migrating toward either the second or the first electrode. If ions derived from two compounds respond differently to the applied high strength electric fields, the ratio of K_H to K may be different for each compound. Consequently, the magnitude of the CV that is necessary to prevent the drift of the ion toward either electrode is also different for each compound. Thus, when a mixture including several species of ions, each with a unique K_H/K ratio, is being analyzed by FAIMS, only one species of ion is selectively transmitted to a detector for a given combination of CV and DV. In one type of FAIMS experiment, the applied CV is scanned with time, for instance the CV is slowly ramped or optionally the CV is stepped from one voltage to a next voltage, and a resulting intensity of transmitted ions is measured. In this way a CV spectrum showing the total ion current as a function of CV, is obtained.

[007] Guevremont et al. have described the use of curved electrode bodies, for instance inner and outer cylindrical electrodes, for producing a two-dimensional atmospheric pressure ion focusing effect that results in higher ion transmission efficiencies than can be obtained using, for example, a FAIMS device having parallel plate electrodes. In particular, with the application of an appropriate combination of DV and CV an ion of interest is focused into a band-like region in the annular gap between the cylindrical electrodes as a result of the electric fields, which change with radial distance. Focusing the ions of interest has the effect of reducing the number of ions of interest that are lost as a result of the ion suffering a collision with one of the inner and outer electrodes. FAIMS devices with cylindrical electrode geometry have

been described in the prior art, as for example in U.S. Patent No. 5,420,424, the contents of which are incorporated herein by reference.

[008] In WO 00/08455, the contents of which are incorporated herein by reference, Guevremont and Purves describe a domed-FAIMS analyzer. In particular, the domed-FAIMS analyzer includes a cylindrical inner electrode having a curved surface terminus proximate an ion outlet orifice of the FAIMS analyzer region. The curved surface terminus is substantially continuous with the cylindrical shape of the inner electrode and is aligned co-axially with the ion outlet orifice. During use, the application of an asymmetric waveform to the inner electrode results in the normal ion-focusing behavior as described above, and in addition the ion-focusing action extends around the generally spherically shaped terminus of the inner electrode. This causes the selectively transmitted ions to be directed generally radially inwardly within the region that is proximate the terminus of the inner electrode. Several contradictory forces are acting on the ions in this region near the terminus of the inner electrode. The force of the carrier gas flow tends to influence the ions to travel towards the ion-outlet orifice, which advantageously also prevents the ions from migrating in a reverse direction, back towards the ion source. Additionally, the ions that get too close to the inner electrode are pushed back away from the inner electrode, and those near the outer electrode migrate back towards the inner electrode, due to the focusing action of the applied electric fields. When all forces acting upon the ions are balanced, the ions are effectively captured in every direction, either by forces of the flowing gas, or by the focusing effect of the electric fields of the FAIMS mechanism. This is an example of a three-dimensional atmospheric pressure ion trap, as described in greater detail by Guevremont and Purves in WO 00/08457, the contents of which are incorporated herein by reference.

[009] Guevremont and Purves further disclose a near-trapping mode of operation for the above-mentioned domed-FAIMS analyzer, which achieves ion transmission from the domed-FAIMS to a mass spectrometer with high efficiency. Under near-trapping conditions, the ions that accumulate in the three-dimensional region of space near the spherical terminus of the inner electrode are caused to leak from this region, being pulled by a flow of gas towards the ion-outlet orifice. The ions that are extracted from this region do so as a narrow, approximately collimated beam, which

is pulled by the gas flow through the ion-outlet orifice and into a small orifice leading into the vacuum system of the mass spectrometer. Accordingly, a tandem domed-FAIMS/MS device is a highly sensitive instrument that is capable of detecting and identifying ions of interest at part-per-billion levels.

[0010] More recently, in WO 01/69216 the contents of which is incorporated herein by reference, Guevremont and Purves describe a so-called “perpendicular-gas-flow-FAIMS”, which is identically referred to as a side-to-side FAIMS. The analyzer region of the side-to-side FAIMS is defined by an annular space between inner and outer cylindrical electrodes. In particular, ions that are introduced into the analyzer region of the side-to-side FAIMS are selectively transmitted in a direction that is generally around the circumference of the inner electrode. For instance, the ion inlet and the ion outlet of a side-to-side FAIMS device are disposed, one opposing the other, within a surface of the outer electrode such that ions are selectively transmitted through the curved analyzer region between the ion inlet and the ion outlet along a continuously curving ion flow path absent a portion having a substantially linear component. In particular, the ions travel from the ion inlet to the ion outlet by flowing around the inner electrode in one of a “clock-wise” and a “counter clock-wise” direction. This is in contrast to the above-mentioned FAIMS devices in which the ions are selectively transmitted along the length of the inner electrode.

[0011] Advantageously, the side-to-side FAIMS device reduces the minimum distance that must be traveled by the ions within the analyzer region to approximately fifty per cent of the circumference of the inner electrode. Since the ions split into two streams traveling in opposite directions around the inner electrode after they are introduced through the ion inlet, the effective ion density within the analyzer region is reduced, and so too is the ion-ion repulsion space charge effect reduced. Furthermore, the reduction of the minimum ion travel distance has the added benefit of improving the ion transmission efficiency. For example, by keeping the time for travel short, the effect of diffusion and ion-ion repulsion forces are minimized. In keeping distances short, the transit time of the ions through the analyzer region is also short, which supports more rapid analysis of ion mixtures.

[0012] Of course, there are various drawbacks associated with state of the art side-to-side FAIMS devices, particularly relating to an efficient utilization of a FAIMS analyzer. The down time of a FAIMS analyzer is often determined not by limitations of the FAIMS device itself, but by specifics of an ion source, or by requirements due to sample preparation. It would be highly advantageous to provide an apparatus which overcomes this problem of the prior art. A FAIMS device in communication with a plurality of ion sources, allows for a more efficient utilization of the FAIMS analyzer. Also, each ion source of the plurality of ion sources could be an embodiment of a different ionization technique. This would provide for an advanced method for optimizing ionization conditions for an unknown sample. Also, Tandem-FAIMS devices comprising two FAIMS analyzers are known in the prior art; however, while ions are accumulated in one trapping FAIMS analyzer before being released to the second one, the second continuous FAIMS analyzer is idling, and is not used. Advantageously, in a Tandem FAIMS application, the continuous FAIMS analyzer is in communication with a plurality of trapping FAIMS analyzers, and is utilized to its fullest extent.

[0013] It would be advantageous to provide a simple concept, which allows for the construction of a FAIMS device that overcomes the drawbacks of the prior art.

Summary of the Invention

[0014] In accordance with an aspect of the instant invention there is provided an apparatus for separating ions in the gas phase, comprising: a high field asymmetric waveform ion mobility spectrometer including an inner electrode having an outer surface and a length; and, an outer electrode having an inner surface and a length and surrounding the inner electrode over at least a portion of the length of the inner electrode, the inner electrode and the outer electrode defining an analyzer region therebetween and being disposed in a spaced apart arrangement for allowing ions to propagate therebetween, the outer electrode comprising an outlet from the analyzer region and at least a first ion inlet and a second distinct ion inlet into the analyzer region, the first ion inlet and the second distinct ion inlet each for communicating with at least one ionization source, the inner electrode and the outer electrode for providing an electric field within the analyzer region resulting from application of an

asymmetric waveform voltage to at least one of the inner electrode and the outer electrode and from application of a compensation voltage to at least one of the inner electrode and outer electrode, the electric field for selectively transmitting ions within the analyzer region between at least one of the first ion inlet and the second distinct ion inlet and the outlet.

[0015] In accordance with another aspect of the instant invention there is provided method for separating ions originating from different ion sources, the method comprising the steps of: providing a high field asymmetric waveform ion mobility spectrometer having at least a first ion inlet and a second distinct ion inlet into an analyzer region thereof, the at least a first ion inlet and a second distinct ion inlet being separately in fluid communication with a first ionization source and a second ionization source, respectively; directing ions from at least one of the first ionization source and the second ionization source toward the first ion inlet and the second distinct ion inlet, respectively; receiving ions including ions of interest into the analyzer region via at least one of the first ion inlet and the second ion inlet; and, transmitting the ions of interest through the analyzer region between the at least one of the first ion inlet and the second distinct ion inlet and an outlet of the analyzer region.

Brief Description of the Drawings

[0016] Exemplary embodiments of the invention will now be described in conjunction with the following drawings, in which similar reference numerals designate similar items:

[0017] Figure 1a is a simplified cross sectional end view of a cylindrical side-to-side FAIMS device according to the prior art;

[0018] Figure 1b is a side elevational view of the cylindrical side-to-side FAIMS device shown in Figure 1a;

[0019] Figure 2a shows a simplified cross sectional end view of a FAIMS device without a separate desolvation chamber and having a gas inlet positioned in close proximity to an ion inlet;

[0020] Figure 2b shows a side elevational view of a side-to-side FAIMS device without separate desolvation region having a gas inlet and an ion inlet both positioned opposite to an ion outlet;

[0021] Figure 2c shows a side elevational view of a side-to-side FAIMS device indicating different positions of an ion inlet relative to a gas inlet and an ion outlet;

[0022] Figure 3 shows a simplified cross sectional end view of a side-to-side FAIMS device having a protruding gas barrier;

[0023] Figure 4 shows a simplified cross sectional end view of a side-to-side FAIMS device without a separate desolvation chamber and having a gas inlet positioned in close vicinity to two ion inlets;

[0024] Figure 5a shows a simplified cross sectional end view of a side-to-side FAIMS device having two ion inlets and two ion sources;

[0025] Figure 5b shows a simplified cross sectional end view of side-to-side FAIMS device having a segmented outer electrode;

[0026] Figure 5c shows a simplified cross sectional end view of side-to-side FAIMS device having a segmented inner electrode;

[0027] Figure 6a shows a simplified cross sectional end view of a side-to-side FAIMS device having two ion inlets and two ion sources, and having a protruding gas barrier;

[0028] Figure 6b shows the FAIMS device of Figure 6a when operating in a different mode;

[0029] Figure 7a shows a cross sectional side view of a FAIMS device including an ionization source selecting electrode;

[0030] Figure 7b shows a side view of the ionization source selecting electrode in the form of a rotating ring having an opening;

[0031] Figure 7c shows an end view of the rotating ring having an opening;

[0032] Figure 7d shows a cross sectional end view of the FAIMS device of Figure 7a;

[0033] Figure 7e shows a cross sectional end view of the FAIMS device of Figure 7a with the opening in the rotating ring in alignment with a first ionization source;

[0034] Figure 7f shows a cross sectional end view of the FAIMS device of Figure 7a with the opening in the rotating ring in alignment with a second ionization source;

[0035] Figure 7g shows a cross sectional end view of the FAIMS device of Figure 7a with the opening in the rotating ring in alignment with a third ionization source;

[0036] Figure 7h shows a cross sectional end view of the FAIMS device of Figure 7a with the opening in the rotating ring in alignment with a fourth ionization source;

[0037] Figure 8a shows a cross sectional side view of a multiple FAIMS device, including two trapping FAIMS devices that are aligned one each with ion inlets into another FAIMS device;

[0038] Figure 8b shows a cross section of the multiple FAIMS device of Figure 8a taken in isolation at a point where the trapping FAIMS devices align with the ion inlets of the other FAIMS device;

[0039] Figure 8c shows is a simplified cross sectional view of the multiple FAIMS device of Figure 8a, and illustrating the manner in which the two trapping FAIMS devices are mounted relative to the other FAIMS device;

[0040] Figure 9a shows a time-profile of the V_{IF1} voltage applied to the inner electrode of one of the trapping FAIMS devices of the multiple FAIMS device of Figure 8a;

[0041] Figure 9b shows a time-profile of the V_{IF2} voltage applied to the inner electrode the other one of the trapping FAIMS devices of the multiple FAIMS device of Figure 8a;

[0042] Figure 9c shows a time-profile for the CV applied to the inner electrode of the other FAIMS device of the multiple FAIMS device of Figure 8a;

[0043] Figure 10a shows a simplified cross sectional view of another multiple FAIMS device, including two trapping FAIMS devices that are aligned one each with ion inlets into another FAIMS device, each trapping FAIMS device including a modified outer electrode and an electrically isolated disk electrode;

[0044] Figure 10b shows an enlarged partial view of the multiple FAIMS device of Figure 10a about a region proximate the disk electrode;

[0045] Figure 11 shows a simplified block diagram of another multiple FAIMS device having four tFAIMS devices;

[0046] Figure 12 shows a simplified block diagram of a multiple FAIMS device having eight tFAIMS devices;

[0047] Figure 13 shows a cross sectional side view of yet another multiple FAIMS device;

[0048] Figure 14a shows a schematic view of a FAIMS outer electrode having a first ion inlet grouping;

[0049] Figure 14b shows a schematic view of a FAIMS outer electrode having a second ion inlet grouping; and,

[0050] Figure 14c shows a schematic view of a FAIMS outer electrode having a third ion inlet grouping.

Detailed Description of the Invention

[0051] The following description is presented to enable a person skilled in the art to make and use the invention, and is provided in the context of particular applications thereof. Various modifications of the disclosed embodiments will be apparent to those of skill in the art, and the general principles defined herein are readily applied to other embodiments and applications without departing from the spirit and scope of the invention. Thus, the present invention is not intended to be limited to the embodiments disclosed, but is to be accorded the widest scope consistent with the principles and features disclosed herein.

[0052] The underlying principle that the disclosed embodiments have in common is the presence of a plurality of ion inlets provided through a FAIMS electrode into an analyzer region of a FAIMS device, the ion inlets for communicating with one or more ionization source. The term ionization source is intended to include any device that produces ions of a temporary nature in a dynamic fashion. Some non-limiting examples of ionization sources that are envisaged for use with the instant invention include: an electrospray ionization source, a corona discharge ionization source, a radioactive foil ionization source, a photoionization source, a laser source, etc. In the detailed description and in the claims that follow, an ion inlet is considered to be communicating with an ionization source when there is a reasonable probability that an ion of interest, which is flowing along an ion flow route from the ionization source to the ion inlet, will pass through the ion inlet and enter into the analyzer region. Optionally, a portion of the ion flow route is through an analyzer region of another FAIMS device, which other FAIMS device is disposed intermediate the ionization source and the ion inlet. Accordingly, communicating is not intended to include remote communication with an ionization source, in which there is a statistically low probability of ions propagating from the ionization source, through the ion inlet, and into the analyzer region. The reader will appreciate the instant invention, when viewed in the context of prior art.

[0053] Referring to Figure 1a, shown is a simplified cross sectional end view of a cylindrical side-to-side FAIMS according to the prior art. The cylindrical side-to-side FAIMS device, shown generally at **10**, includes inner and outer cylindrical electrodes **12** and **14**, respectively, which are supported by an electrically insulating material (not shown) in an overlapping, spaced-apart arrangement. The generally annular space between the inner electrode **12** and the outer electrode **14** defines a FAIMS analyzer region **16**. The analyzer region **16** is of approximately uniform width and extends around the circumference of the inner electrode **12**. An ion inlet **18** is provided through the outer electrode **14** for introducing ions from an ion source into the analyzer region **16**. For example, the ion source is in the form of an electrospray ionization ion source including a liquid delivery capillary **24**, a fine-tipped electrospray needle **22** that is held at high voltage (power supply not shown) and a curtain plate **26** serving as a counter-electrode for the electrospray needle **22**. Of

course, any other suitable ionization source is optionally used in place of the electrospray ionization ion source. A flow of a carrier gas, which is represented in the figure by a series of closed-headed arrows, is provided within the analyzer region 16 to carry the ions around the inner electrode 12 and toward an ion outlet 20. An orifice 25 within the curtain plate electrode 26 allows for a portion of the carrier gas introduced at gas inlet 28 to flow in a direction that is counter-current to the direction in which the ions are traveling near the ion inlet 18, so as to desolvate the ions before they are introduced into the analyzer region 16. The inner electrode 12 is in electrical communication with a power supply 28 that during use is capable of applying a high voltage asymmetric waveform (DV) and a low voltage dc compensation voltage (CV) to the inner FAIMS electrode 12.

[0054] Still referring to Figure 1a, ions are produced in the gas phase at the fine-tipped electrospray needle 22 from a suitable sample containing a species of interest. Typically, a mixture including a plurality of different ion types is produced when the sample is ionized. The potential gradient pushes the ions of the mixture away from the electrospray needle 22, toward the curtain plate electrode 26. A portion of the ions pass through the orifice 25 in the curtain plate electrode 26, become entrained in the carrier gas flow and are carried into the FAIMS analyzer region 16. Once inside the FAIMS analyzer region 16, the ions are carried through an electric field that is formed within the FAIMS analyzer region 16 by the application of the DV and the CV to the inner FAIMS electrode 12. Ion separation occurs within the FAIMS analyzer region 16 on the basis of the high field mobility properties of the ions. Those ions of the mixture that have a stable trajectory for a particular combination of DV and CV are selectively transmitted through the FAIMS analyzer region 16, whilst other ions of the mixture collide with an electrode surface and are lost. The selectively transmitted ions are extracted from the analyzer region 16 via ion outlet 20 and are typically subjected to one of detection and further analysis.

[0055] Referring now to Figure 1b, shown is a simplified side elevational view of the cylindrical side-to-side FAIMS of Figure 1a. Elements labeled with the same numerals have the same function as those illustrated in Figure 1a. The dotted line extending between ion inlet 18 and ion outlet 20 represents one possible average ion flow path around the inner electrode 12. An average ion flow path is defined as the

net trajectory of an ion as a result of a carrier gas flow through the analyzer region, although the individual ion also experiences an oscillatory motion between the electrodes as a result of the applied asymmetric waveform voltage. In particular, the dotted line represents one of two shortest average ion flow paths through the analyzer region **16**, one shortest average ion flow path extending in each direction around the inner electrode **12**. Of course, when many like-charged ions are present within the analyzer region, ion-ion repulsion forces tend to cause the ions to spread out slightly along the length of the inner electrode **12**. Accordingly, some selectively transmitted ions migrate into portions of the analyzer region where the gas flow rate is low or stagnant, making their extraction from the analyzer region difficult.

[0056] Referring now to Figure 2a, shown is a simplified cross sectional end view of FAIMS device without a separate desolvation chamber and having a gas inlet positioned in close proximity to an ion inlet. A FAIMS device **200** includes an inner electrode **201**, and outer electrode **203**, an ion inlet **205** as well as an ion outlet **207**. The inner and outer electrodes are for example provided as solid cylinder and cylindrical pipe, respectively. In general, the inner electrode has a length and an outer circumference, whereas the outer electrode has a length and an inner circumference. The inlet and outlet are for example provided in the form of one of an orifice and a slit. The components of the FAIMS device are embedded in an insulating material **230** such as polyetheretherketone (PEEK), which is used for maintaining the relative position of the electrodes one to the other. Typically, the FAIMS device **200** is in fluid communication with another device, for instance one of a pump and a not illustrated mass spectrometer detector, so that a gas flow is pulled through the FAIMS device **200** and out of the outlet **207**.

[0057] Referring still to Figure 2a, the FAIMS device **200** comprises a second inlet, that is a port for a gas inlet **209** through the wall of outer electrode **203** in the vicinity of the ion inlet **205**. Arrows illustrate the gas flows in this first embodiment of the instant invention, the lengths of which are indicative of the difference in the velocity of gas flow rates around the inner electrode **201**. A fine-tipped electrospray needle **222** that is held at high voltage (power supply not shown), is one component of the ionization source shown at Figure 2a. Of course, any other suitable ionization source is used optionally in place of the electrospray ionization source. The gas introduced

via the gas inlet **209** into the FAIMS device splits into two flows. One of the flows, the extra gas flow **93** travels around one side of the inner electrode toward the ion outlet **207**. The other gas flow, comprising both the desolvation gas flow **92** and the carrier gas flow **91**, travels in a direction around the other side of the inner electrode toward the ion inlet **205**. In a region near the ion inlet **205** the other gas flow further splits into two flows, the desolvation gas flow **92** and the carrier gas flow **91**. The desolvation gas flow **92** functions to desolvate the electrosprayed ions as they travel through the ion inlet **205** toward the analyzer region **214**. This desolvation process reduces the amount of solvent and other contaminants that enter the FAIMS analyzer region and eliminates the need for a curtain plate assembly.

[0058] Ions are able to pass through the counter-current flow of desolvation gas **92** and into the FAIMS analyzer region **214** because of the electric field produced by the high voltage that is applied to the ionization source. The high voltage applied to the electrospray needle **222**, in addition to producing an intensely strong electric field that creates conditions necessary to ionize the components of a liquid sample, also results in a strong electric field that directs electrosprayed ions of the appropriate charge polarity away from the electrospray needle **222** and toward the outer electrode **203** that serves as the counter electrode for the electrospray needle **222**. Some of the ions pass through the ion inlet **205** of the FAIMS device. The carrier gas flow **91** transports ions around the inner electrode **201** and toward the ion outlet **207**. Those ions which are selectively transmitted through the analyzer region **214**, for the particular combination of DV and CV that is applied to the FAIMS electrodes, are extracted from the analyzer region **214** via the ion outlet **207**.

[0059] In the FAIMS device **200** shown at Figure 2a, ions passing through the ion inlet **205** and entering the analyzer region **214** travel around only one side of the inner electrode **201**. The gas flow entering the FAIMS device through the gas inlet **209** and flowing in a direction toward the ion inlet **205** substantially prevents a flow of ions from traveling in a direction from the ion inlet **205** toward the gas inlet **209**. In addition, the total volume of gas flow through the ion outlet **207** is equal to the sum of carrier gas flow **91** and extra gas flow **93**. The distance between the gas inlet **209**, and the ion outlet **207** is shorter in one direction (counter clockwise in the example of Figure 2a) than in the other (clockwise in the example of Figure 2a). That is the

distance that the extra gas flow **93** travels from the gas inlet **209** to the ion outlet **207** is shorter than the distance that the carrier gas flow **91** travels from the gas inlet **209** to the ion outlet **207**. Thus, a velocity of the extra gas flow **93** is higher than a velocity of the carrier gas flow **91**. A low carrier gas flow rate translates into a longer transmission time of ions through the analyzer region **214**. This in turn leads to an increase in ion loss due to processes such as diffusion and space charge repulsion, both of which are time dependent and therefore, possibly lower ion transmission through the FAIMS device **200**.

[0060] Referring now to Figure 2b, shown is a side elevational view of a side-to-side FAIMS device without separate desolvation region and having a gas inlet and an ion inlet both positioned opposite to an ion outlet. In the FAIMS device shown generally at **250**, the gas inlet **209** and the ion inlet **205** are positioned at 180° from the ion outlet (not shown). The ion inlet **205** and the gas inlet **209** are adjacent to each other, but rather than being adjacent along a circumference of a cylindrical outer electrode **203** as in Figure 2a, the ion inlet **205** and the gas inlet **209** are adjacent to each other along a longitudinal length of the outer electrode **203**. This positioning of the inlets supports a carrier gas flow **91** around both sides of an inner electrode **201**, with an approximately same carrier gas flow rate in both directions around the inner electrode **201** in a direction toward the not illustrated ion outlet. In Figure 2c, shown are three possible locations **205a**, **205b**, and **205c** for an ion inlet **205**. Since the gas inlet **209** is not placed at the same location along the length of the outer electrode **203** as the ion outlet **207**, gas exiting the FAIMS device **250** at the ion outlet **207** will travel around the inner electrode **201** as is shown schematically in Figure 2c. The preferred gas flow path depends on variables such as gas flow rates exiting the analyzer region via the ion inlet and the ion outlet. When the ion inlet **205** is not positioned between the ion outlet **207** and the gas inlet **209** with reference to the main axis, for example at ion inlet position **205b**, ions that have entered the FAIMS device **250** experience only a counter-flow of gas which prevents the ions from traveling around the inner electrode to the ion outlet. When the ion inlet **205** is placed between the ion outlet **207** and the gas inlet **209** with reference to the main axis, i.e. at ion inlet position **205c**, ions that enter the FAIMS device become entrained in the carrier gas flow and are transported by the carrier gas around the inner electrode **201** and through

the ion outlet **207**. Optionally, the gas inlet **209** and the ion inlet **205** are of different size and or shape.

[0061] Of course, the figures that are referred to throughout the detailed description are greatly simplified so as to facilitate an understanding of the instant invention. A reader skilled in the art will appreciate that the gas enters and exits the space between the inner and outer electrodes mostly through the ion and gas inlets and outlets.

[0062] Referring now to Figure 3, shown is an end view of another FAIMS device without a separate desolvation chamber and having a gas inlet positioned in close proximity to an ion inlet. A FAIMS device **300** includes an inner electrode **301**, and outer electrode **303** having an ion inlet **305** and an ion outlet **307**. The inner electrode **301** and the outer electrode **303** are supported by an electrically insulating material **330** in an overlapping spaced-apart configuration. Each of the ion inlet and the ion outlet are for example provided in the form of one of an orifice and a slit. Typically, the FAIMS device **300** is coupled to another device, for instance one of a pump and a not illustrated mass spectrometer detector, so that a gas flow is pulled through the FAIMS device **300** and out of the ion outlet **307**.

[0063] In addition, the FAIMS device **300** comprises a second inlet, that is a port for a gas inlet **309** through the wall of the outer electrode **303** in the vicinity of the ion inlet **305**. Further, part of the outer electrode **303** has been cut away to enable a protruding part **311** of the inner electrode **301** to extend into the insulating material **330**. Enough of the outer electrode **303** is cut away to leave a wide enough physical space between the electrodes so as to prevent electrical discharge between the inner electrode **301** and the outer electrode **303**. The shape of the protruding part **311** is optionally varied. Further optionally, the inner electrode is provided as cylindrical electrode, and the protruding part is provided by a protruding segment of the electrically insulating material **330**.

[0064] The protruding part **311** of the inner electrode **301** forms an approximately gas tight seal with the electrically insulating material **330** to form a physical barrier which forces the gas flow, which is represented in the figure by a series of closed headed arrows, around one side of the inner electrode **301**. Gas entering the FAIMS device **300** through the gas inlet **309** is forced to flow in one direction, the direction

toward the ion inlet **305**. Unlike the FAIMS device **200** described with reference to Figure 2a, no extra gas flow is produced in the instant embodiment. Accordingly, the total gas flow exiting at the ion outlet **307** is equal to the carrier gas flow **91**. Near the ion inlet **305**, the gas flow splits with a portion of the gas going out toward the electrospray needle **322** and constituting the desolvation gas flow **92**. The other portion, the carrier gas flow **91**, continues through the FAIMS analyzer region **314**, around the inner electrode **301**, and transports entrained ions to the ion outlet **307**.

[0065] Optionally the protruding part provides a small gas channel that results in a small controlled extra gas flow traveling towards the ion outlet around the portion of the inner electrode that is not in communication with the ion inlet.

[0066] The blockage of flow by the modification of the inner and outer electrodes **301** and **303**, respectively, results in changes in the electric fields near the modified region, causing suboptimal conditions for transmission of ions. Therefore, the blockage is advantageously located in a region away from the ion path through the FAIMS device **300** so that the changes in the electric fields caused by the protruding part **311** induce a minimal effect upon the electric fields that ions experience during their transit from the ion inlet **305** to the ion outlet **307**.

[0067] The presence of the protruding part **311** not only increases carrier gas flow velocities, but also increases an intensity of an ion stream exiting the FAIMS device at the outlet **307**. Ion loss due to diffusion of ions into a region of the FAIMS device, which is essentially occupied with extra gas, is approximately minimized.

Advantageously, FAIMS device **300**, although more elaborate and intricate in its construction than the FAIMS device **200** shown at Figure 2a, supports analysis of an ion beam having initially a low ion concentration.

[0068] The concepts for the design of a FAIMS device with a plurality of inlets as outlined above are now applied to FAIMS devices having a plurality of ion inlets. Referring now to Figure 4, shown is an end view of a first embodiment of the instant invention. A FAIMS device **400** comprises a plurality of ion inlets, each ion inlet of the plurality of ion inlets for being disposed adjacent to a different ion source. More particularly, the FAIMS device **400** includes an inner electrode **401**, an outer electrode **403**, two ion inlets **405a** and **405b**, as well as an ion outlet **407**. The inner

and outer electrodes are for example provided as solid cylinder and cylindrical pipe, respectively. In general, the inner electrode **401** has a length and an outer circumference, whereas the outer electrode **403** has a length and an inner circumference. The inner electrode **401** and the outer electrode **403** are supported by an electrically insulating material **430** in an overlapping spaced-apart configuration. Each of the ion inlet and the ion outlet are for example provided in the form of one of an orifice and a slit. Typically, the FAIMS device **400** is coupled to another device, such as for instance one of a pump and a not illustrated mass spectrometer detector, so that a gas flow is pulled through the FAIMS device **400** and out of the ion outlet **407**.

[0069] In addition, the FAIMS device **400** comprises a third inlet, namely a port for a gas inlet **409**. The gas inlet **409** is positioned such that a flow of gas is introduced at 180° from the ion outlet **407**. Gas flows are substantially equal around the two sides of the inner electrode **401**. The gas inlet **409**, the two ion inlets **405a** and **405b**, and the ion outlet **407** are all located on the circumference of the outer electrode **403** at one location along the length of the outer electrode **403**. The fine-tipped electrospray needles **422a** and **422b** that are held at high voltage (power supply not shown), each comprise one component of the separate ion sources shown at Figure 4. The fine-tipped electrospray needles **422a** and **422b** are positioned in close vicinity to the inlets **405a** and **405b**, respectively. The ion inlets **405a** and **405b** are positioned in a way that the gas inlet **409** is located at an approximately intermediate position between the two ion inlets.

[0070] Ions produced by an electrospray ionization source are directed toward the corresponding ion inlet by a strong electric field that exists between the electrospray needle tip and the outer electrode. A gas flow entering the gas inlet **409** splits approximately equally into two flows, since the distances to the ion outlet **407** along the two directions around the inner electrode **401** are approximately equal. When the total volume of the gas flow entering the gas inlet **409** exceeds the volume of gas flow out of the ion outlet **407**, then a first portion of the excess flow exits outwardly through ion inlet **405a** to provide a desolvation gas flow **92a**, and a second portion of the excess glow exits outwardly through ion inlet **405b** to provide a desolvation gas flow **92b**. Provided that the areas of the two ion inlets **405a** and **405b** are approximately equal, then the volumes of the desolvation gas flow **92a** and the

desolvation gas flow **92b** are approximately equal. The ions that are entering the FAIMS analyzer **414** through ion inlet **405a** and **405b** therefore pass through a counter-current flow of gas, and are desolvated. Ions that have successfully entered the analyzer region **414** are carried by the carrier gas flows **91a** and **91b** around the circumference of the inner electrode **401**.

[0071] The following non-limiting example illustrates a balanced gas flow mode of operation of FAIMS device **400**. It is assumed in the instant example that the FAIMS device **400** is coupled to another device causing a flow of gas through the analyzer region **414** and out of the ion outlet **407**. If the gas flow out of the outlet **407** is 400 mL/minute, and a flow of approximately 600 mL/minute is pushed into the gas inlet **409**, then it is expected that a desolvation gas flow **92a** of approximately 100 mL/minute flows out of ion inlet **405a** and a desolvation gas flow **92b** of approximately 100 mL/minute flows out of ion inlet **405b**. In addition, a carrier gas flow **91a** of approximately 200 mL/minute flows in the direction from ion inlet **405a** towards the ion outlet **407**, and a carrier gas flow **91b** of approximately equal volume flows between ion inlet **405b** and the ion outlet **407**. The two flows of 200 mL/minute combine near the ion outlet **407**, and a gas flow of 400 mL/minute exits through the ion outlet **407**. The flow rates used in this example are illustrative of the operation of the FAIMS device **400**. Optimum gas flow rates are possibly determined by experimentation.

[0072] The presence of two ion inlets allows for a more efficient use of the FAIMS device **400**. When only one ion inlet is used, for example ion inlet **405b**, and the other ion inlet **405a** is blocked, probe preparation for feeding the electrospray needle **422a** can take place, while electrospray needle **422b** is producing ions. Once an experiment involving electrospray needle **422b** is finished, the functionality of the ion inlets is switched, that is ion inlet **405b** is blocked and ion inlet **405a** is opened, such that the ions produced at electrospray needle **422a** are analyzed. In this way, a continuous utilization of the FAIMS device is achieved, independent of delays relating to probe preparation, sample changes, and the like.

[0073] Referring now to Figure 5a shown is an end view of a second embodiment of the instant invention. FAIMS device **500** comprises a plurality of ion inlets, each

ion inlet of the plurality of ion inlets for being disposed adjacent to a different ion source. Some advantages indicated in connection with FAIMS device **400**, such as the effective use of multiple ion inlets, are also fully realized in FAIMS device **500**. More particularly, the FAIMS device **500** includes an inner electrode **501**, an outer electrode **503**, two ion inlets **505a** and **505b**, as well as an ion outlet **507**. Preferably, the two ion inlets are positioned approximately at an angle of 180° relative to each other. The ion outlet **507** is preferably positioned in an intermediate position between the two ion inlets **505a** and **505b**. The inner and outer electrodes are for example provided as solid cylinder and cylindrical pipe, respectively. In general, the inner electrode **501** has a length and an outer circumference, whereas the outer electrode **503** has a length and an inner circumference. The inner electrode **501** and the outer electrode **503** are supported by an electrically insulating material **530** in an overlapping spaced-apart configuration. Each of the ion inlet and the ion outlet are for example provided in the form of one of an orifice and a slit. Typically, the FAIMS device **500** is coupled to another device, such as for instance one of a pump and a not illustrated mass spectrometer detector, so that a gas flow is pulled through the FAIMS device **500** and out of the outlet **507**.

[0074] In front of ion inlets **505a** and **505b** are positioned curtain plate assemblies including curtain plates **540a** and **540b**, respectively. The curtain plate assemblies include gas inlets **509a** and **509b** for the introduction of curtain gas flows **94a** and **94b**, respectively, and for the introduction of ion streams produced by fine-tipped electrospray needles **522a** and **522b** through curtain plate orifices **550a** and **550b**, respectively. The curtain plates **540a** and **540b** serve as counter-electrodes for the fine-tipped electrospray needles **522a** and **522b**, respectively. Curtain gas flows **94a** and **94b** introduced into the curtain plate assemblies split into carrier gas flows **91a** and **91b** flowing through ion inlets **505a** and **505b** into an analyzer region **514** of FAIMS device **500**, and into desolvation gas flows **92a** and **92b** flowing towards electrospray needles **522a** and **522b**, respectively, and desolvating ions produced by said electrospray needles. The region between the two ion inlets **505a** and **505b** that is substantially opposite to the ion outlet **507** comprises a region of stagnant gas **95**. In a balanced gas flow mode of operation, very little gas flow takes place in the area occupied by stagnant gas.

[0075] If the flow rates of each one of the curtain gas flows **94a** and **94b** are approximately equal, and assuming that the two ion inlets are of approximately equal area, then gas flows through each ion inlet will also be approximately equal. These operating conditions are appropriate for simultaneous analysis of ions that are produced separately at the two ionization sources. If the rate of curtain gas flow **94a** is higher than the rate of curtain gas flow **94b**, then the carrier gas flow **91a** entering through the ion inlet **505a** into the analyzer region **514** will split into a gas flow exiting through the ion outlet **507** and into a gas flow being swept around the analyzer region and exiting through ion inlet **505b**, thereby reducing a volume of the carrier gas flow **91b** that enters the analyzer region. Consequently, when the rate of curtain gas flow **94a** is significantly higher than the rate of curtain gas flow **94b**, the FAIMS device **500** acts to analyze ions produced by electrospray needle **522a**. On the other hand, when the rate of curtain gas flow **94a** is less than the rate of curtain gas flow **94b**, the FAIMS device **500** acts to analyze ions produced by electrospray needle **522b**. Thus, an appropriate adjustment of the flow rates of the curtain gas flows supports a selective switching between different ion sources, or different combinations of ion sources, of a plurality of ion sources. Of course, the ions from both electrospray sources must have appropriate ion mobility properties for being transmitted through the analyzer region **514** with a same applied CV and DV. Optionally, the applied CV and DV are rapidly switched during a period of time approximately coinciding with the switching between one source and the other, so as to provide appropriate conditions for selectively transmitting an ion of interest produced at the selected source. Further optionally, one of the ionization sources is other than an electrospray source, such as for instance corona discharge, radioactive foil, photoionization source, laser source, and the like.

[0076] Referring to Figure 5b, shown is a FAIMS device **550**, in which the outer electrode is divided into two separate electrically isolated semi-electrodes **503a** and **503b**. Accordingly, different operating conditions may be imposed, for example by applying different voltages to the different semi-electrodes **503a** and **503b**, upon the ions traveling from the ion inlets **505a** and **505b**, respectively, to the ion outlet **507**.

[0077] Referring now to Figure 5c, shown is a FAIMS device **580**, in which the inner electrode is divided into two separate electrically isolated semi-electrodes **501a**

and **501b**. As was described with reference to Figure 5b, different operating conditions may be imposed, for example by applying different voltages to the different semi-electrodes **501a** and **501b**, upon the ions traveling from the ion inlets **505a** and **505b**, respectively, to the ion outlet **507**. Similar considerations apply to FAIMS device **400**, shown at Figure 4.

[0078] Referring now to Figure 6a shown is an end view of another FAIMS device according to the instant invention. FAIMS device **600** comprises multiple inlets for ions and/or gases. More particularly, the FAIMS device **600** includes an inner electrode **601**, an outer electrode **603**, two ion inlets **605a** and **605b**, as well as an ion outlet **607**. Preferably, the two ion inlets are positioned approximately at an angle of 180° relative to each other. The ion outlet **607** is preferably positioned in an intermediate position between the two ion inlets **605a** and **605b**. The inner and outer electrodes are for example provided as solid cylinder and cylindrical pipe. In general, the inner electrode **601** has a length and an outer circumference, whereas the outer electrode **603** has a length and an inner circumference. The inner electrode **601** and the outer electrode **603** are supported by an electrically insulating material **630** in an overlapping spaced-apart configuration. Each of the ion inlet and the ion outlet are for example provided in the form of one of an orifice and a slit. Typically, the FAIMS device **600** is coupled to another device, such as for instance one of a pump and a not illustrated mass spectrometer detector, so that a gas flow is pulled through the FAIMS device **600** and out of the outlet **607**.

[0079] In front of ion inlets **605a** and **605b** are positioned curtain plate assemblies including curtain plates **640a** and **640b**, respectively. The curtain plate assemblies include gas inlets **609a** and **609b** for the introduction of curtain gas flows **94a** and **94b**, respectively, and for the introduction of ion streams produced by fine-tipped electrospray needles **622a** and **622b** through curtain plate orifices **650a** and **650b**, respectively. The curtain plates **640a** and **640b** serve as counter-electrodes for the fine-tipped electrospray needles **622a** and **622b**, respectively. Curtain gas flows **94a** and **94b** introduced into the curtain plate assemblies split into carrier gas flows **91a** and **91b** flowing through ion inlets **605a** and **605b** into an analyzer region **614** of FAIMS device **600**, and into desolvation gas flows **92a** and **92b** flowing towards

electrospray needles **622a** and **622b**, respectively, and desolvating ions produced by said electrospray needles.

[0080] Further, part of the outer electrode **603** has been cut away to enable a protruding part **611** of the inner electrode **601** to extend into the insulating material **630** at a position opposite the ion outlet **607**. Enough of the outer electrode is cut away to leave a wide enough physical space between the electrodes so as to prevent electrical discharge between the inner and outer electrodes. Optionally, the inner electrode is provided as a cylindrical electrode, and the protruding part is provided as a protruding segment of the electrically insulating material.

[0081] Referring now to Figure 6b, it is shown that the FAIMS device **600** also supports a selective switching between different ion sources, in a manner similar to that of the FAIMS device **500**. In the mode of operation that is illustrated at Figure 6b, curtain gas flow **94b** significantly exceeds curtain gas flow **94a**. As a result, the direction of gas flow through the ion inlet **605a** is reversed compared to that of the balanced flow mode of operation, which is illustrated at Figure 6a. Hence, ions produced at electrospray needle **622b** are carried into the analyzer region **614**, whereas ions produced at electrospray needle **622a** that are able to enter the analyzer region **614** immediately encounter a gas flow in a direction from the ion outlet **607** toward the ion inlet **605a**, which prevents the ions from being transmitted through the analyzer region **614** toward the ion outlet **607**.

[0082] Of course, the ions from both electrospray sources, which have appropriate ion mobility properties, are transmitted through the analyzer region **614** with a same applied CV and DV. Optionally, the applied CV and DV are rapidly switched during a period of time approximately coinciding with the switching between one source and the other, so as to provide appropriate conditions for selectively transmitting an ion of interest produced at the selected source. Further optionally, one of the ionization sources is other than an electrospray source, such as for instance corona discharge, radioactive foil, photoionization source, laser source, and the like.

[0083] Optionally, at least one of the inner and outer electrodes is provided as two electrically isolated halves, such that different operating conditions may be provided for ions traveling from the ion source **622a** to the ion outlet **607**, and for ions traveling

from the ion source **622b** to the ion outlet **607**. This optional embodiment supports a use of different gases within each half during a same period of operation, since significant mixing would only likely occur near the outlet.

[0084] In general, multiple ion inlets may support a mode of operation in which different gases are provided for transmitting ions through different portions of an analyzer region. In the above-mentioned examples, ions from a first ionization source are transmitted around a portion of a first side of the inner electrode by a first type of gas, whilst ions from a second ionization source are transmitted around a portion of a second side of the inner electrode by a second type of gas. Likely, a different combination of CV and DV is required to transmit ions produced at each ionization source, depending upon the mobility properties of the ions, the composition of the gas provided for transmitting the ions, the temperature of the gas, etc. Accordingly, the CV and DV that is applied between the inner electrode and the outer electrode is switched between at least two combinations, so as to analyze ions produced at the two ionization sources during different, non-overlapping periods of time. Optionally, segmented electrodes are provided so as to support the application of different combinations of CV and DV within different portions of the analyzer region during a same overlapping period of time.

[0085] The ideas that have been described *supra* in conjunction with the disclosed embodiments of the instant invention may also be applied to other type of FAIMS geometries, for example to a domed-FAIMS analyzer. Referring now to Figure 7a, shown is cross sectional side view of a domed-FAIMS device **700** according to the instant invention. The domed FAIMS device **700** comprises an outer electrode **703**, which generally has the shape of a cylindrical pipe open at one end and closed on the other end by means of a curved surface closure, in which there is disposed an ion outlet **707**. Further, there are disposed four ion inlets **705a**, **705c**, **705b** and **705d** (the latter two not shown in Figure 7a) in the outer electrode **703**. In the preferred embodiment, the four ion inlets **705a**, **705c**, **705b** and **705d** are spaced at approximately 90° increments around the circumference of the outer electrode **703**. Each ion inlet is separately in communication with one of four electrospray ionization sources **722a**, **722b**, **722c**, and **722d** (**722b** and **722d** not shown in Figure 7a). Furthermore, the domed-FAIMS device **700** includes a cylindrical inner electrode **701**

having a curved surface terminus **736** proximate the ion outlet **707** of the outer electrode **703**. The curved surface terminus **736** is substantially continuous with the cylindrical shape of the inner electrode and is aligned co-axially with the ion outlet **707**. Two separate supporting sleeves **730** and **731**, which are fabricated using an electrically insulating material, surround the outer electrode **703**; each sleeve being fixed in place relative to the outer electrode. As shown in Figure 7a, the two supporting sleeves **730** and **731** are mounted so as to leave a longitudinal gap **732** therebetween. The gap **732** is aligned with a region of the outer electrode **703** which includes the ion inlets **705a**, **705c**, **705b** and **705d**. Preferably, the gap **732** is of approximately uniform width around the circumference of the outer electrode **703**.

[0086] An ion source selector comprising a conductive cover cylinder of thin metal, herein referred to as a “rotating ring” **777**, covers the gap **732** between the supporting sleeves **730** and **731**. The rotating ring **777** has an orifice shown as aperture **779**, optionally located, by rotation of the rotating ring, adjacent to an ion inlet. The location of the aperture **779** in the rotating ring **777** is not restricted and therefore is placed for optimal sampling efficiency of ions into an ion inlet. The rotating ring **777** is made in a way that it fits snugly across the gap **732** between the two supporting sleeves **730** and **731**. The fit is not so snug, however, as to prevent a motor (not shown) from being able to rotate the ring **777**. A curtain gas inlet **717** is provided through the supporting sleeve **730** for providing fluid communication with the gap **732**.

[0087] Optionally, at least a portion of the rotating ring **777** engages a groove that is formed within one of the supporting sleeves **730** and **731**, so as to prevent movement of the rotating ring **777** along the length of the outer electrode **703**. Optionally, the rotating ring **777** is fabricated from an insulating material with a conductive surface. In Figure 7b, a side view of the rotating ring **777** is shown, displaying the aperture **779**, and in Figure 7c, an end view of the rotating ring is shown.

[0088] Referring now to Figure 7d, a cross sectional view of FAIMS device **700** shows the inner electrode **701**, the outer electrode **703**, the rotating ring **777**, the four ion inlets **705a**, **705b**, **705c**, and **705d**, as well as the four electrospray ionization sources **722a**, **722b**, **722c**, and **722d**. When in operation, all four electrospray

ionization sources can spray continuously without interruption since the rotating ring provides a conductive counter electrode necessary for a stable spray. By having only one aperture 779, the rotating ring 777 selectively allows ions from one of the four electrospray ionization sources to pass into the FAIMS device. For example, still referring to Figure 7d, the aperture 779 is aligned with ion inlet 705a and allows ions produced by electrospray ionization source 722a to enter the analyzer region 714.

[0089] Referring to Figures 7e, 7f, 7g, and 7h shown is the rotating ring 777 in positions to select ions from each of the various electrospray ionization sources 722a, 722b, 722c, and 722d, respectively. When the aperture 779 in the rotating ring 777 is adjacent to a particular electrospray ionization source, curtain gas that is pumped into the curtain gas inlet 717 as shown in Figure 7a, exits in part through the aperture 779 in the rotating ring 777 to assist in desolvating ions being produced by the selected electrospray ionization source. Since the other electrospray needles are adjacent to a part of the rotating ring that does not have an aperture therethrough, no desolvation gas is available nor is any desolvation gas needed.

[0090] Referring again to Figure 7a, the curtain gas introduced into curtain gas inlet 717, and thus into the gap 732 between supporting sleeves 730 and 731, is able to flow freely in a circumferential direction within the annular channel that is defined between the gap 732 and the rotating ring 777. This curtain gas flow splits so that a portion of the gas flows toward an electrospray ionization source (not shown) through the aperture 779 and the remaining portion of the gas flows through the four ion inlets 705a, 705b, 705c, and 705d into the analyzer region 714. Gas flowing through ion inlet 705a transports ions from the electrospray ionization source 722a (not shown) into the FAIMS device and toward the ion outlet 707.

[0091] Still referring to Figure 7a, optionally the other three ion inlets 705b, 705c, and 705d through the outer wall of the outer electrode 703 are plugged so as to prevent gas from entering the analyzer region therethrough. For example, the rotating ring 777 comprises plugs that are attached to the inner surface of the rotating ring 777, and located appropriately for covering three ion inlets in the outer electrode 703, when the aperture 779 is positioned adjacent to the fourth ion inlet. In operation, the plugs move together with the rotating ring 777. The plugs are preferably made from

an electrically insulating material so as to isolate the conductive surface of the rotating ring 777 from the outer electrode.

[0092] To analyze samples from four ionization sources with the FAIMS device 700, the aperture 779 of the rotating ring 777 is rotated in increments of approximately 90° each, stopping for a predetermined period of time in front of each one of the four ionization sources. Referring again to Figures 7e, 7f, 7g, and 7h, one specific and non-limiting example is described for analyzing four samples. At time $t = 0$ ms, ions from electrospray ionization source 722a are analyzed (Figure 7e). After a period of time for analysis, for example 300 ms, the rotating ring 777 is rotated to align aperture 779 with ion inlet 705b, and ions from electrospray ionization source 722b are analyzed (Figure 7f). There is a delay between the time the ring starts to rotate and the time when ions from electrospray ionization source 722b are extracted through ion outlet 707 (not shown). This delay time consists of the time required for the ring to rotate, the time required for the gas flow to equilibrate, and the time required for the ions to transmit through the FAIMS device. A typical delay time is approximately 200 ms. It follows that in the given example ions from electrospray ionization source 522b are analyzed starting at $t = 500$ ms. After another 300 ms of analysis time and another 200 ms of delay time, ions from electrospray ionization source 522c are analyzed starting at $t = 1000$ ms. Similarly, ions from electrospray ionization source 522d are analyzed starting at $t = 1500$ ms. The process of sampling from each of the ionization sources starts over at $t = 2000$ ms. In this example, data from a given electrospray source is collected each 2000 ms. Although the present example uses four electrospray ionization sources, the process of analyzing ion beams stemming from a plurality of electrospray ionization sources works equally as well for an embodiment including more than, or less than four electrospray ionization sources. Furthermore, different ionization source technologies are optionally used at different ion inlets. Other suitable ionization source technologies include but are not limited to: corona discharge; radioactive foil; photoionization; and, laser ionization. Further still, a flow of a different gas, or mixtures of gases, is optionally provided at each inlet. A person of skill in the art will easily envision additional variations and applications for such a FAIMS device having multiple ion inlets.

[0093] Optionally, an outer electrode is provided having a single ion inlet, and at least a portion of the outer electrode including the single ion inlet is rotatable for selectively aligning the single ion inlet with one of a plurality of different ion sources disposed at intervals around the outer electrode. In the instant embodiment, the at least a portion of the outer electrode functions as an ion source selector.

[0094] A FAIMS device including multiple ion inlets optionally supports multiple tandem FAIMS analysis of ions. For example, a first FAIMS device is optionally used as an ion trap, in which ions are stored and subsequently extracted into a second FAIMS device. Conditions for operating a trapping FAIMS device, or tFAIMS, are described. Referring now to Figure 8a, shown is a cross-sectional view of a multiple FAIMS device according to the instant invention. A multiple FAIMS analyzer **800** comprises two domed tFAIMS **820** and **840**, coupled to a third FAIMS **880**. The domed tFAIMS **820** and **840** comprise inner electrodes **821** and **841**, respectively. Ion outlets **827** and **847** of tFAIMS **820** and **840**, respectively, are in communication with ion inlets **805a** and **805b** of FAIMS **880**. An outlet **807** of FAIMS **880** is optionally coupled to a detector or an ion-analyzing device, such as a mass spectrometer. Two ionization sources **822a** and **822b** provide ions to the tFAIMS **820** and **840**, respectively. The functionality of FAIMS **880** is similar to that of other FAIMS devices including multiple ion inlets, herein described previously.

[0095] A mode of selectively analyzing ions from the two ionization sources feeding the multiple FAIMS device **800** is described by way of the following non-limiting example. By changing conditions in each trapping tFAIMS device **820** and **840**, the respective device is set either to accumulate trapped ions, or to extract trapped ions, the extracted ions being provided into FAIMS device **880**. The ionization sources **822a** and **822b** are operated continuously so that ions produced by ionization source **822a** continually enter tFAIMS **820** and ions produced by ionization source **822b** continually enter tFAIMS **840**. Initially, FAIMS operating parameters of gas flows and voltages are selected in tFAIMS **820** and tFAIMS **840** so that the ions of interest from ionization sources **822a** and **822b** are accumulated near the hemispherical tips of inner electrodes of tFAIMS **820** and tFAIMS **840**, respectively. After a predetermined period of time, referred to as the accumulation time, ions are extracted from a trapping region **814c** of tFAIMS **820** into FAIMS **880** by changing

the conditions from trapping to extraction conditions. For example, the application of a pulsed DC offset voltage to the inner electrode **821** of tFAIMS **820** pushes ions that have been trapped in the vicinity of the tip of hemispherical inner electrode **821** of tFAIMS **820** towards the ion outlet **827**. During the extraction of ions from tFAIMS **820**, ions from electrospray ionization source **822b** are still accumulating in the trapping region **814d** of tFAIMS **840**. Ions are extracted from tFAIMS **820** through ion outlet **827** into FAIMS **880** via ion inlet **805a**, and are transported along the analyzer region of FAIMS **880**. Conditions in FAIMS **880** are set so that ions of interest produced at ionization source **822a** are selectively transmitted. The ions are transported toward the ion outlet **807**, which is optionally coupled to one of a detector and an analyzing device. For example, ion outlet **807** is adjacent to an orifice leading to a vacuum chamber of a mass spectrometer (not shown). After ions have been extracted from tFAIMS **820**, trapping conditions are restored for tFAIMS **820** and the process of accumulating ions, which are generated by electrospray ionization source **822a**, in the trapping region of tFAIMS **820** starts again. At a predetermined time, ions from electrospray ionization source **822b** are extracted from tFAIMS **840** in a similar manner as described above for tFAIMS **820**, while ions from electrospray ionization source **822a** are allowed to accumulate in the trapping region **814c** of tFAIMS **820**. During this extraction process, conditions in FAIMS **880** are such that ions of interest produced at ionization source **822b** are selectively transmitted.

[0096] Still referring to Figure 8a, the conductive outer electrodes **823**, **843**, and **803** of tFAIMS **820**, tFAIMS **840**, and FAIMS **880** are shown to be in direct mechanical and electrical contact. Optionally, a narrow insulator separates the three FAIMS devices; however, a gas-tight seal is maintained between the devices to efficiently transmit ions from each of the tFAIMS **820** and **840** into the analyzer region of FAIMS **880**. Optionally, transfer between the tFAIMS **820** and **840**, and FAIMS **880** is optimized by minimizing a mechanical depth of the ion outlets **827** and **847** to produce a very narrow sharp edged orifice between the devices.

[0097] Figure 8b shows a cross section of FAIMS **880** taken in isolation at a point where tFAIMS **820** and **840** align with ion inlets **805a** and **805b** of the FAIMS **880**. A supporting sleeve **830** made of an electrically insulating material is modified so that the tFAIMS devices **820** and **840** can be fitted into the supporting sleeve. The wall of

the outer electrode **803** near the ion inlets **805a** and **805b** is very thin. Two cylindrical cavity wells **819a** and **819b** are drilled into the supporting sleeve **830**. The cylindrical cavity wells **819a** and **819b** are drilled sufficiently deeply that a cut is made into the material of the outer electrode **803**, thereby forming a pair of sharp edged openings in the outer electrode **803** that serve as the ion inlets **805a** and **805b**.

[0098] Referring to Figure 8c, shown is a simplified cross sectional view of multiple FAIMS device **800**, illustrating how the tFAIMS **820** and tFAIMS **840** are inserted into the supporting sleeve **830**. By placing a small O-ring in an O-ring groove on the outer surface of the outer electrode of each tFAIMS device, a gas tight connection between each tFAIMS and the FAIMS **880** is established while maintaining electrical isolation. If an inlet into FAIMS **880** is in the form of a slit, the O-ring groove is located in position **890**. In this case, separate means (not shown) for insulating the FAIMS devices **820** and **840** from FAIMS **880** may be required.

[0099] Referring now to Figures 9a through 9c, shown are time-potential profiles used in the operation of the multiple FAIMS device **800**. Relevant times are ion injection time t_{tr} during which ions are trapped in a tFAIMS, and ion extraction time t_{ex} , during which ions are extracted from a tFAIMS. Referring to Figure 9a, shown is a time-profile of the V_{IF1} voltage applied to the inner electrode **821** of tFAIMS **820**. A short period in time t_{ex} , during which an extraction voltage V_{ex} is applied to the inner electrode **821**, is followed by a longer period in time t_{tr} , during which a trapping voltage V_{tr} is applied to the inner electrode **821**. Referring to Figure 9b, shown is a time-profile of the V_{IF2} voltage applied to the inner electrode **841** of tFAIMS **840**. The extraction pulses applied to tFAIMS **840** are offset in time compared to the extraction pulses applied to tFAIMS **820**. Referring to Figure 9c, shown is a time-profile for the CV applied to the inner electrode **801** of FAIMS **880**. A different voltage is applied for transmission of ions from FAIMS **820** than is applied for transmission of ions from FAIMS **840**, referred to as CV1 and CV2, respectively. Optionally, if a same ion of interest from tFAIMS **820** and tFAIMS **840** is desired, the CV of FAIMS **880** is not changed. Not shown in Figures 9a through 9c are the asymmetric waveform voltages (DV) applied to the inner electrodes of the three FAIMS. The polarity and the magnitude of pulses shown in Figures 9a through 9c are only illustrative of the timing, and the voltage and polarity of the pulses will depend on the experimental

parameters including, but not limited to, the polarity of the charge on the ion of interest, the electrode to which the voltage is applied, the type of ion response to strong electric fields, gas temperature, gas pressure, and other appropriate parameters. The asymmetric waveforms applied to tFAIMS **820** and **840**, and to FAIMS **880**, are not necessarily identical, but it is understood that electrical parameters are selected that are suitable for the transmission of ions of interest. Optionally, the outer electrodes of tFAIMS **820** and **840**, and of FAIMS **880** are held at a same applied dc voltage.

[00100] The multiple FAIMS device **800** is capable of collecting data from two independent ion streams flowing from ionization sources tFAIMS **820** and tFAIMS **840** into ion inlets **805a** and **805b**, respectively, of FAIMS **880**. During the portion of the cycle, in which ions are extracted from ionization source tFAIMS **820** and are passing through FAIMS **880**, a second stream of ions is being readied by trapping within ionization source tFAIMS **840**. During the second portion of a cycle, ions are extracted from tFAIMS **840** and are passing through FAIMS **880** while a new stream of ions is being readied by trapping in tFAIMS **820**. In this mode of operation the analyzing device coupled to the ion outlet **807**, such as a mass spectrometer, is being used effectively. A person of skill in the art will recognize that the principles illustrated for two ionization sources are readily extended to apply to more than two ionization sources.

[00101] The embodiment disclosed in Figure 8a is optionally modified to decrease ion loss for some applications. For example, when either the inner electrode **841** or the outer electrode **843** of tFAIMS **840** is pulsed to extract ions into FAIMS **880**, the ions collected in a trapping region **814d** at the tip of the inner electrode **841** are pushed by the newly modified electric fields towards the ion outlet **847**. The change of the applied voltage also disturbs equilibrium conditions that existed in the analyzer region **814b** of FAIMS device **840**, and the ions that were stable in the analyzer region **814b** are lost to the walls. Depending on variables such as gas flow rate through tFAIMS **840** and length of the analyzer region, there will be a finite amount of time, for example, 50 to 100 ms, during which ions make their way from ion inlet **845**, along the analyzer region **814b**, and to the trapping region **814d** of tFAIMS **840**. A short path length from the ion inlet **845** to the trapping region of tFAIMS **840** will

reduce ion loss and the “dead time” before ions begin to accumulate under the equilibrium conditions.

[00102] One option for further improving the efficiency of a multiple FAIMS device through the elimination of the “dead time” is to provide a disc electrode intermediate the ion outlet of a first FAIMS analyzer and the ion inlet of a second FAIMS analyzer. Referring now to Figure 10a, shown is a simplified cross sectional view of a multiple FAIMS device according to the instant invention, in which the outer electrode **823** of FAIMS **820** is segmented into two electrically isolated segments, modified outer electrode **823m** and a disk electrode **899**. The analyzer region of the tFAIMS **820m** is formed by the segmented outer electrode that has been divided into separate mechanically and electrically isolated components. If the two segments **823m** and **899** of the outer electrode are connected electrically, or if a same voltage is applied to each segment, then the two segments **823m** and **899** behave substantially as a single, non-segmented outer electrode. Referring now to Figure 10b, which is an enlarged view of the segmented outer electrode of tFAIMS **820m**, disc electrode **899** has a smaller opening than outer electrode **823m**. Thus, when voltages are applied to the disc electrode **899**, that differ from voltages applied to the outer electrode **823m**, the disc electrode **899** modifies trapping fields in tFAIMS **820m**. The ions are ejected from the trapping region **814c** of tFAIMS **820m** by stepwise changing the voltage applied to disc electrode **899**. The advantage of this approach is that the portion of the analyzer region of FAIMS **820m** that is disturbed by changes in electric fields is limited to the immediate vicinity of disc electrode **899**. Electric fields present elsewhere in the analyzer region **814a** are not substantially disturbed so that ions being carried by a gas flow along through the analyzer region **814a** are not lost during application of an extraction pulse to the disc electrode **899**. The extraction pulse removes only the ions in the trapping region, thereby causing minimal dead time between the extraction of one set of trapped ions and the onset of trapping of newly arriving ions.

[00103] Of course, at the time during which ions are being extracted from the trapping region **814c** of FAIMS **820m**, ions transmitted through the analyzer region **814b** of FAIMS **840m** are optionally being accumulated in the trapping region **814d**. This is the operating condition illustrated at Figure 10a. The alternating

accumulation, or trapping, and extraction of ions from FAIMS **820m** and FAIMS **840m** is a very efficient operating mode for delivering ions from two independent ionization sources to a single detector or analyzer, for example a not shown mass spectrometer coupled to the ion outlet of FAIMS **880**.

[00104] Further advantages associated with multiple FAIMS device **800** include the use of different carrier gases in tFAIMS **820** and **840**, as well as different operating temperatures. Also, irradiation sources possibly introduced at the interface between tFAIMS **820** or **840** and FAIMS **880** hold a potential to further manipulate the ion characteristics of ions introduced into FAIMS **880**.

[00105] The embodiments for a multiple FAIMS are not restricted to include two tFAIMS only. Referring now to Figure 11, shown is a schematic view of a multiple FAIMS device, combining a FAIMS analyzer **1000** having multiple ion inlets coupled with four tFAIMS devices **1001**, **1002**, **1003**, and **1004**. In Figure 12, shown is a schematic view of a multiple FAIMS device, combining a FAIMS analyzer **1000** having multiple ion inlets coupled with eight tFAIMS devices **1001-1008**.

[00106] The number of tFAIMS devices combined with a single FAIMS operating in continuous mode is limited. Besides size constraints that physically restrict the number of tFAIMS devices mounted to the exterior of a multiple inlet FAIMS analyzer, there is also the issue of the time required for the ions to travel from a tFAIMS, through a continuous flow FAIMS wherein the multiple FAIMS device is coupled to an analyzer such as a mass spectrometer. Since the gas flow rate through the continuous flow FAIMS is controlled by the flow rate R_m into the mass spectrometer, the gas flow rate through each of n tFAIMS devices is approximately R_m/n . At non-optimal flow rates, ion losses in each of the n tFAIMS devices increase. The problem is circumvented by allowing a portion of the carrier gas or gases to exit the continuous flow FAIMS or any of the tFAIMS other than through an ion outlet in communication with the analyzing device.

[00107] Referring now to Figure 13, shown is a cross sectional side view of a multiple FAIMS device according to the instant invention. The multiple FAIMS device **1300** includes two trapping tFAIMS devices **1320** and **1340** attached to one side-to-side FAIMS device sFAIMS **1333**. sFAIMS **1333** comprises a barrier in the

form of a protrusion **1311** so that gas flows only in one direction through sFAIMS **1333**, illustrated in Figure 13 by a series of closed-headed arrows. A gas outlet **1308** is disposed near an ion outlet **1307**, so that gas near the ion outlet **1307** splits into a flow exiting through the ion outlet **1307** and a flow exiting through the gas outlet **1308**. Rates of curtain gas flows **94a** and **94b** into each of the tFAIMS devices **1320** and **1340** are important variables, since ions extracted into sFAIMS **1333** have different path lengths to the ion outlet **1307**, depending on whether the ions enter at ion inlet **1305a** or ion inlet **1305b**. For example, if curtain gas flow **94a** is significantly higher than curtain gas flow **94b**, then all of a gas flow through the ion outlet **1307** originates from the gas flow through ion inlet **1305a**. In this instance, the gas flow between ion inlet **1305a** and ion inlet **1305b**, as well as through ion inlet **1305b**, is possibly reversed in direction, making it other than possible to transport ions from ion inlet **1305b** to the ion outlet **1307**.

[00108] The embodiments previously discussed using tandem FAIMS devices provide a means for efficiently sampling ions of interest, making improved detection possible. In the embodiments which follow, multiple ion inlets are advantageously provided for introducing ions produced at a single ion source into a FAIMS analyzer region. For instance, several types of atmospheric pressure ionization sources produce a wide ion dispersion plume. Accordingly, when using an electrospray ionization source, for example, ions and charged droplets travel along an electric field gradient in a direction away from a tip of a needle and towards a counter electrode. Unfortunately, a diverging cloud of ions is not efficiently sampled by a single small opening of the type that is commonly provided within the counter electrode of a prior art FAIMS device. A simple solution to this problem would seem to include providing a larger opening for sampling the ion plume from the ionization source. In fact, as the opening size is increased, some improvement is observed. However, in an experiment with singly charged ions of leucine enkephalin, when a 2 mm opening is compared to a 1 mm opening, only a 35% increase in absolute signal intensity is observed, compared to a 300% increase in the area of the opening. It is likely that the signal intensity does not increase in proportion to the increase to the area of the opening because the resulting changes to gas flows and electric fields in the region near an ion inlet affect the efficiency of transfer of ions into a FAIMS analyzer region.

For example, a strong electric field between the inner and outer electrode of a FAIMS device that is necessary for its operation decreases significantly if there is a discontinuity in either the inner or outer electrodes, such as a hole in the outer electrode. If the hole is small, and if its diameter is less than a spacing between inner and outer electrodes, electric fields in the region between the hole and the inner electrode remain similar to fields elsewhere between the inner and outer electrode. However, if the hole is large, its diameter being for example twice the spacing between the inner and outer electrodes, electric fields decrease in strength between the hole and the inner electrode. Ions, which would otherwise have been focused under the operating conditions of CV and DV, will hit one of the inner and outer electrodes and be lost. Therefore, further increases in size of an ion inlet are not expected to give significantly improved results.

[00109] Increased sample introduction is achieved by providing several openings in the outer electrode of a FAIMS device, such as is illustrated at Figures 14a-c. The multiple ion inlet groupings that are shown at Figures 14a-c result in a significant improvement in the observed signal intensity relative to a device with a single small opening. In FAIMS devices having a separate desolvation chamber, a counter electrode or curtain plate is located in front of the ion inlet. Therefore, provision is made for the curtain plate to have openings of at least the same size, and in the same position, as the openings in the ion inlet groupings of the outer electrode. Preferably, the openings in the curtain plate are somewhat larger to allow for maximal ion transmission through the curtain plate, while at the same time satisfying the condition of an area of holes that does not become so large as to prevent efficient desolvation. If the holes are large, the gas flow velocity is not constant across the diameter of the hole. If there are several such holes, flow through one hole may exceed flow through other holes, and if flow velocity or flow volume is decreased, an inefficient desolvation of ions may result. Poor desolvation reduces an effectiveness of ion separation in the analyzer region of a FAIMS device, and if neutral solvent vapours contaminate gas flowing into a FAIMS analyzer, the FAIMS device is likely to fail. For the use of several ion inlets, a reduction in the size of each ion inlet is advisable to allow for efficient desolvation. In FAIMS devices not having a separate desolvation chamber, the ion inlets are of a suitable size for maintaining sufficient velocity of gas

flowing out of the analyzer region through the ion inlets for desolvation to occur. Numerous configurations of multiple ion inlet groupings are possible and the ion inlet groupings shown at Figure 14 should not be considered an exclusive list of possible configurations. In addition, as long as the total area of the ion inlet does not become too large for ion desolvation, the ion inlet size is not restricted to a particular dimension, nor does the size of each ion inlet need to be kept equal. The location of an ion inlet grouping or of multiple ion inlet groupings on an outer electrode is variable. With a domed FAIMS device, ion inlets are to be placed at any location around the circumference of the outer electrode at a same distance from an ion outlet. A location of an ion inlet is also adjustable along a length of an outer electrode. Moving the ion inlet farther away from the an ion outlet increases ion transit time, possibly causing a reduction in signal intensity due to loss mechanisms such as diffusion and space charge repulsion. Moving the ion inlet closer toward an ion outlet possibly improves sensitivity due to reduced ion transit time. However, if the ion inlet is placed too close to the ion outlet, insufficient time for ion separation results in a reduction of peak separation capabilities of a FAIMS device.

[00110] Referring specifically to Figure 14a, shown is a schematic view of a FAIMS outer electrode having a first ion inlet grouping according to the instant invention. A FAIMS device comprises an outer electrode **1403** having a length. In the outer electrode **1403**, disposed are three circular ion inlets **1405a-c**, the ion inlets **1405a-c** positioned on a line substantially perpendicular to the length of the outer electrode.

[00111] Referring specifically to Figure 14b, shown is a schematic view of a FAIMS outer electrode having a second ion inlet grouping according to the instant invention. A FAIMS device comprises an outer electrode **1503** having a length. In the outer electrode **1503**, disposed are three circular ion inlets **1505a-c**, the ion inlets **1505a-c** positioned on a line substantially parallel to the length of the outer electrode.

[00112] Referring specifically to Figure 14c, shown is a schematic view of a FAIMS outer electrode having a third ion inlet grouping according to the instant invention. A FAIMS device comprises an outer electrode **1603** having a length. In the outer electrode **1603**, disposed is a plurality of essentially circular ion inlets, shown

generally at **1605x**, the plurality of ion inlets **1605x** positioned so as to adopt a two-dimensional closest packing of circles.

[00113] Numerous other embodiments may be envisaged without departing from the spirit and scope of the invention.

Claims

What is claimed is:

1. An apparatus for separating ions in the gas phase, comprising:
a high field asymmetric waveform ion mobility spectrometer including an inner electrode having an outer surface and a length; and,
an outer electrode having an inner surface and a length and surrounding the inner electrode over at least a portion of the length of the inner electrode, the inner electrode and the outer electrode defining an analyzer region therebetween and being disposed in a spaced apart arrangement for allowing ions to propagate therebetween, the outer electrode comprising an outlet from the analyzer region and at least a first ion inlet and a second distinct ion inlet into the analyzer region, the first ion inlet and the second distinct ion inlet each for communicating with at least one ionization source, the inner electrode and the outer electrode for providing an electric field within the analyzer region resulting from application of an asymmetric waveform voltage to at least one of the inner electrode and the outer electrode and from application of a compensation voltage to at least one of the inner electrode and outer electrode, the electric field for selectively transmitting ions within the analyzer region between at least one of the first ion inlet and the second distinct ion inlet and the outlet.
2. An apparatus according to claim 1, comprising at least one ionization source in communication with the first ion inlet and with the second distinct ion inlet.
3. An apparatus according to claim 2, wherein the at least one ionization source comprises a first ionization source in communication with the first ion inlet and a second ionization source in communication with the second distinct ion inlet, the second ionization source separate from the first ionization source.
4. An apparatus according to any one of claims 1, 2, and 3, wherein the first ion inlet is disposed within a portion along the inner circumference of the outer electrode and the second distinct ion inlet is disposed approximately opposite to the portion, and

wherein the outlet is positioned approximately intermediate the first ion inlet and the second distinct ion inlet.

5. An apparatus according to any one of claims 1 and 3, comprising a gas inlet disposed within the outer electrode and positioned such that a portion of a flow of gas through the analyzer region between the gas inlet and the outlet flows adjacent to the first ion inlet and the second distinct ion inlet.

6. An apparatus according to claim 3, comprising a gas inlet disposed in the outer electrode at a position that is approximately intermediate the first ion inlet and the second distinct ion inlet.

7. An apparatus according to claim 6, wherein the first ion inlet, the second distinct ion inlet, and the gas inlet are positioned adjacent one to another along the inner circumference of the outer electrode.

8. An apparatus according to claim 6, wherein the first ion inlet, the second distinct ion inlet, and the gas inlet are positioned adjacent one to another along the length of the outer electrode.

9. An apparatus according to any one of claims 1, 2, 3, and 4, comprising a barrier extending between the inner electrode and the outer electrode, the barrier disposed intermediate the first ion inlet and the second distinct ion inlet, the barrier for directing a flow of a gas entering the analyzer region through one of the first ion inlet and the second distinct ion inlet in one direction around the outer circumference of the inner electrode and toward the outlet.

10. An apparatus according to claim 1, comprising an ionization source selecting electrode having an inner circumference and a length and being generally coaxially aligned adjacent to an outer circumference of the outer electrode, the ionization source selecting electrode having an inlet therethrough and being moveable between first and second positions, the inlet for being aligned with the first ion inlet for supporting ion flow therethrough and for substantially preventing ion flow through

the second distinct ion inlet when the ionization source selecting electrode is in the first position and for being aligned with the second distinct ion inlet for supporting ion flow therethrough and for substantially preventing ion flow through the first ion inlet when the ionization source selecting electrode is in the second position.

11. An apparatus according to claim 10, wherein the ionization source selecting electrode is rotatably coupled to the outer electrode.
12. An apparatus according to any one of claims 10 and 11, comprising a guide member disposed along a surface of at least one of the ionization source selecting electrode and the outer electrode, for minimizing movement of the ionization source selecting electrode in a direction along the length of the outer electrode.
13. An apparatus according to any one of claims 10, 11, and 12, wherein the ionization source selecting electrode comprises at least a plug disposed along the inner circumference of the ionization source selecting electrode at a point relative to the inlet such that when the inlet is aligned with one of the first ion inlet and the second distinct ion inlet, the at least a plug forms approximately a seal against the other one of the first ion inlet and the second distinct ion inlet.
14. An apparatus according to any one of claims 10, 11, 12, and 13, wherein the ionization source selecting electrode includes an outer surface that is fabricated from an electrically conductive material.
15. An apparatus according to any one of claims 10, 11, 12, 13, and 14, wherein the ionization source selecting electrode is made from an electrically conductive material.
16. An apparatus according to claim 3, wherein at least one of the first ionization source and the second ionization source comprises a second high field asymmetric waveform ion mobility spectrometer having an outlet from an analyzer region thereof that is generally aligned with a corresponding one of the first ion inlet and the second distinct ion inlet.

17. An apparatus according to claim 16, comprising a device for producing ions from a sample medium, the device for producing ions being in fluid communication with the second high field asymmetric waveform ion mobility spectrometer for providing ions thereto, at least some of the ions for being transmitted through the second high field asymmetric waveform ion mobility spectrometer for introduction through the corresponding one of the first ion inlet and the second distinct ion inlet.
18. An apparatus according to any one of claims 16 and 17, comprising a disk electrode disposed between the outlet of the second high field asymmetric waveform ion mobility spectrometer and the corresponding one of the first ion inlet and the second distinct ion inlet, for modifying an electric field within the analyzer region of the second high field asymmetric waveform ion mobility spectrometer.
19. An apparatus according to any one of claims 16, 17, and 18, wherein the second high field asymmetric waveform ion mobility spectrometer is a trapping FAIMS.
20. An apparatus according to claim 1, comprising a first other high field asymmetric waveform ion mobility spectrometer in fluid communication with the first ion inlet for providing ions therethrough and a second other high field asymmetric waveform ion mobility spectrometer in fluid communication with the second distinct ion inlet for providing ions therethrough, each one of the first other high field asymmetric waveform ion mobility spectrometer and the second other high field asymmetric waveform ion mobility spectrometer comprising first and second spaced apart electrodes defining an analyzer region therebetween.
21. An apparatus according to claim 20, comprising a disk electrode disposed between at least one of an outlet of the first other high field asymmetric waveform ion mobility spectrometer and the first ion inlet and an outlet of the second other high field asymmetric waveform ion mobility spectrometer and the second distinct ion inlet, for modifying an electric field within the analyzer region of the at least one of

the first other high field asymmetric waveform ion mobility spectrometer and the second other high field asymmetric waveform ion mobility spectrometer.

22. An apparatus according to claim 21, wherein the disk electrode is a solid disk of an electrically conductive material comprising an orifice for allowing ions to propagate therethrough.

23. An apparatus according to claim 20, comprising a barrier extending between the inner electrode and the outer electrode, the barrier disposed intermediate the second distinct ion inlet and the outlet, the barrier for directing a flow of a gas entering the analyzer region through the distinct second ion inlet in one direction around the outer circumference of the inner electrode and toward the outlet.

24. An apparatus according to claim 20, comprising a barrier extending between the inner electrode and the outer electrode, the barrier disposed intermediate the first ion inlet and the second distinct ion inlet, the barrier for directing a flow of a gas entering the analyzer region through one of the first ion inlet and the second distinct ion inlet in one direction around the outer circumference of the inner electrode and toward the outlet.

25. An apparatus according to claim 20, comprising:
disposed in the outer electrode, an additional gas outlet in vicinity to the ion outlet for allowing gas entering the analyzer region through an ion inlet and traveling toward the ion outlet to exit the analyzer region.



26. An apparatus according to claim 1, wherein the first ion inlet and the second distinct ion inlet are disposed adjacent to a same ionization source, such that the first ion inlet and the second distinct ion inlet are in fluid communication with the same ionization source.

27. An apparatus according to claim 26, comprising a plurality of ion inlets within the outer electrode, the plurality of ion inlets including the first ion inlet and the second distinct ion inlet.

28. An apparatus according to any one of claims 26 and 27, wherein the first ion inlet and the second distinct ion inlet define a line substantially perpendicular to the length of the outer electrode.
29. An apparatus according to any one of claims 26 and 27, wherein the first ion inlet and the second distinct ion inlet define a line substantially parallel to the length of the outer electrode.
30. An apparatus according to claim 27, wherein the plurality of ion inlets is arranged in a pattern resembling a two-dimensional closest packing.
31. A method for separating ions originating from different ionization sources, the method comprising the steps of:
- providing a high field asymmetric waveform ion mobility spectrometer having at least a first ion inlet and a second distinct ion inlet into an analyzer region thereof, the at least a first ion inlet and a second distinct ion inlet being separately in fluid communication with a first ionization source and a second ionization source, respectively;
 - directing ions from at least one of the first ionization source and the second ionization source toward the first ion inlet and the second distinct ion inlet, respectively;
 - receiving ions including ions of interest into the analyzer region via at least one of the first ion inlet and the second ion inlet; and,
 - transmitting the ions of interest through the analyzer region between the at least one of the first ion inlet and the second distinct ion inlet and an outlet of the analyzer region.
32. A method according to claim 31, wherein at a given time ions are selectively introduced into the analyzer region through one of the first ion inlet and the second distinct ion inlet.

33. A method according to claim 31, comprising a step of selectively switching between receiving ions into the analyzer region via the first ion inlet and receiving ions into the analyzer region via the second distinct ion inlet.
34. A method according to any of claims 31 and 32, wherein over a period of time different ion inlets are selected as ion inlets for introducing ions into the analyzer region.
35. A method according to any of claims 32 and 34, wherein a selection of an ion inlet is performed by a step of adjusting an ionization source selecting electrode.
36. A method according to any of claims 31, 32, 34, and 35, wherein an ionization source is used in an ion trapping mode of operation.
37. A method according to any of claims 32, 34, 35, and 36, comprising the step of:
approximately preventing ions originating at one of the first ionization source and the second ionization source from entering the analyzer region during a same overlapping period of time that ions originating at the other one of the first ionization source and the second ionization source are being introduced into the analyzer region.
38. A method according to any of claims 31 and 36, comprising the step of:
introducing ions produced at the first ionization source and ions produced at the second ionization source into the analyzer region via the first ion inlet and the second distinct ion inlet, respectively, during a same overlapping period of time.

1/20

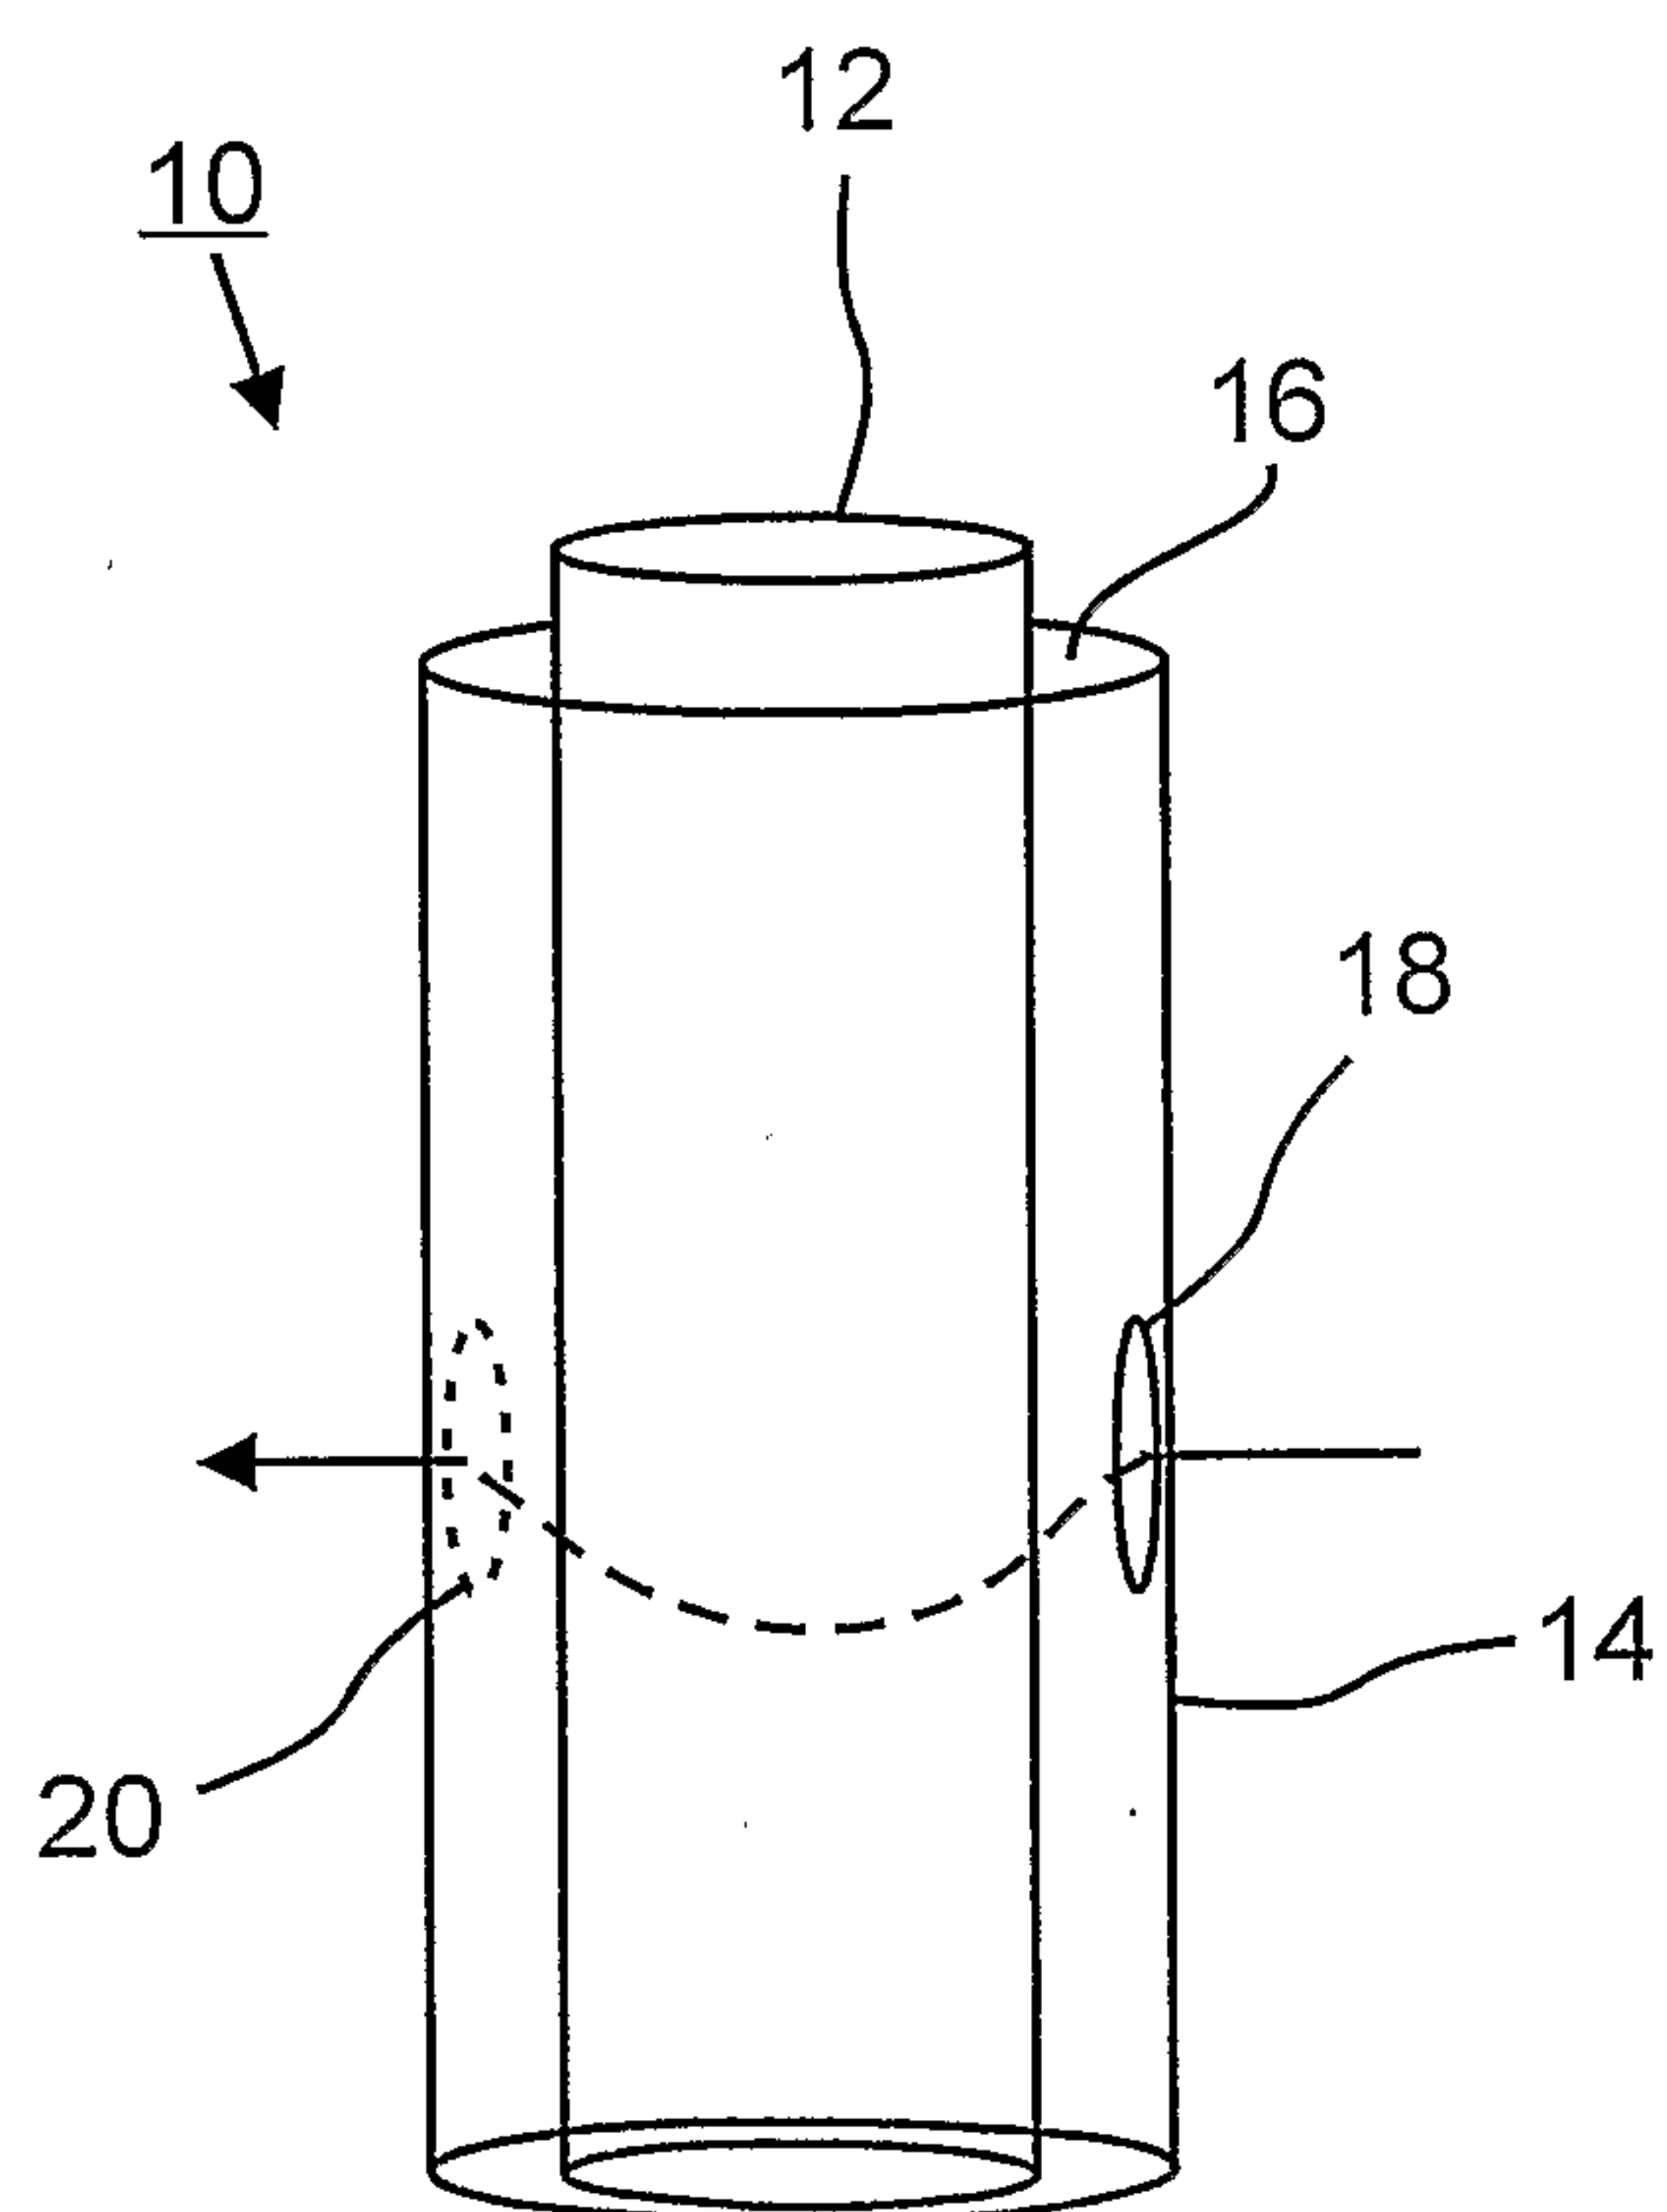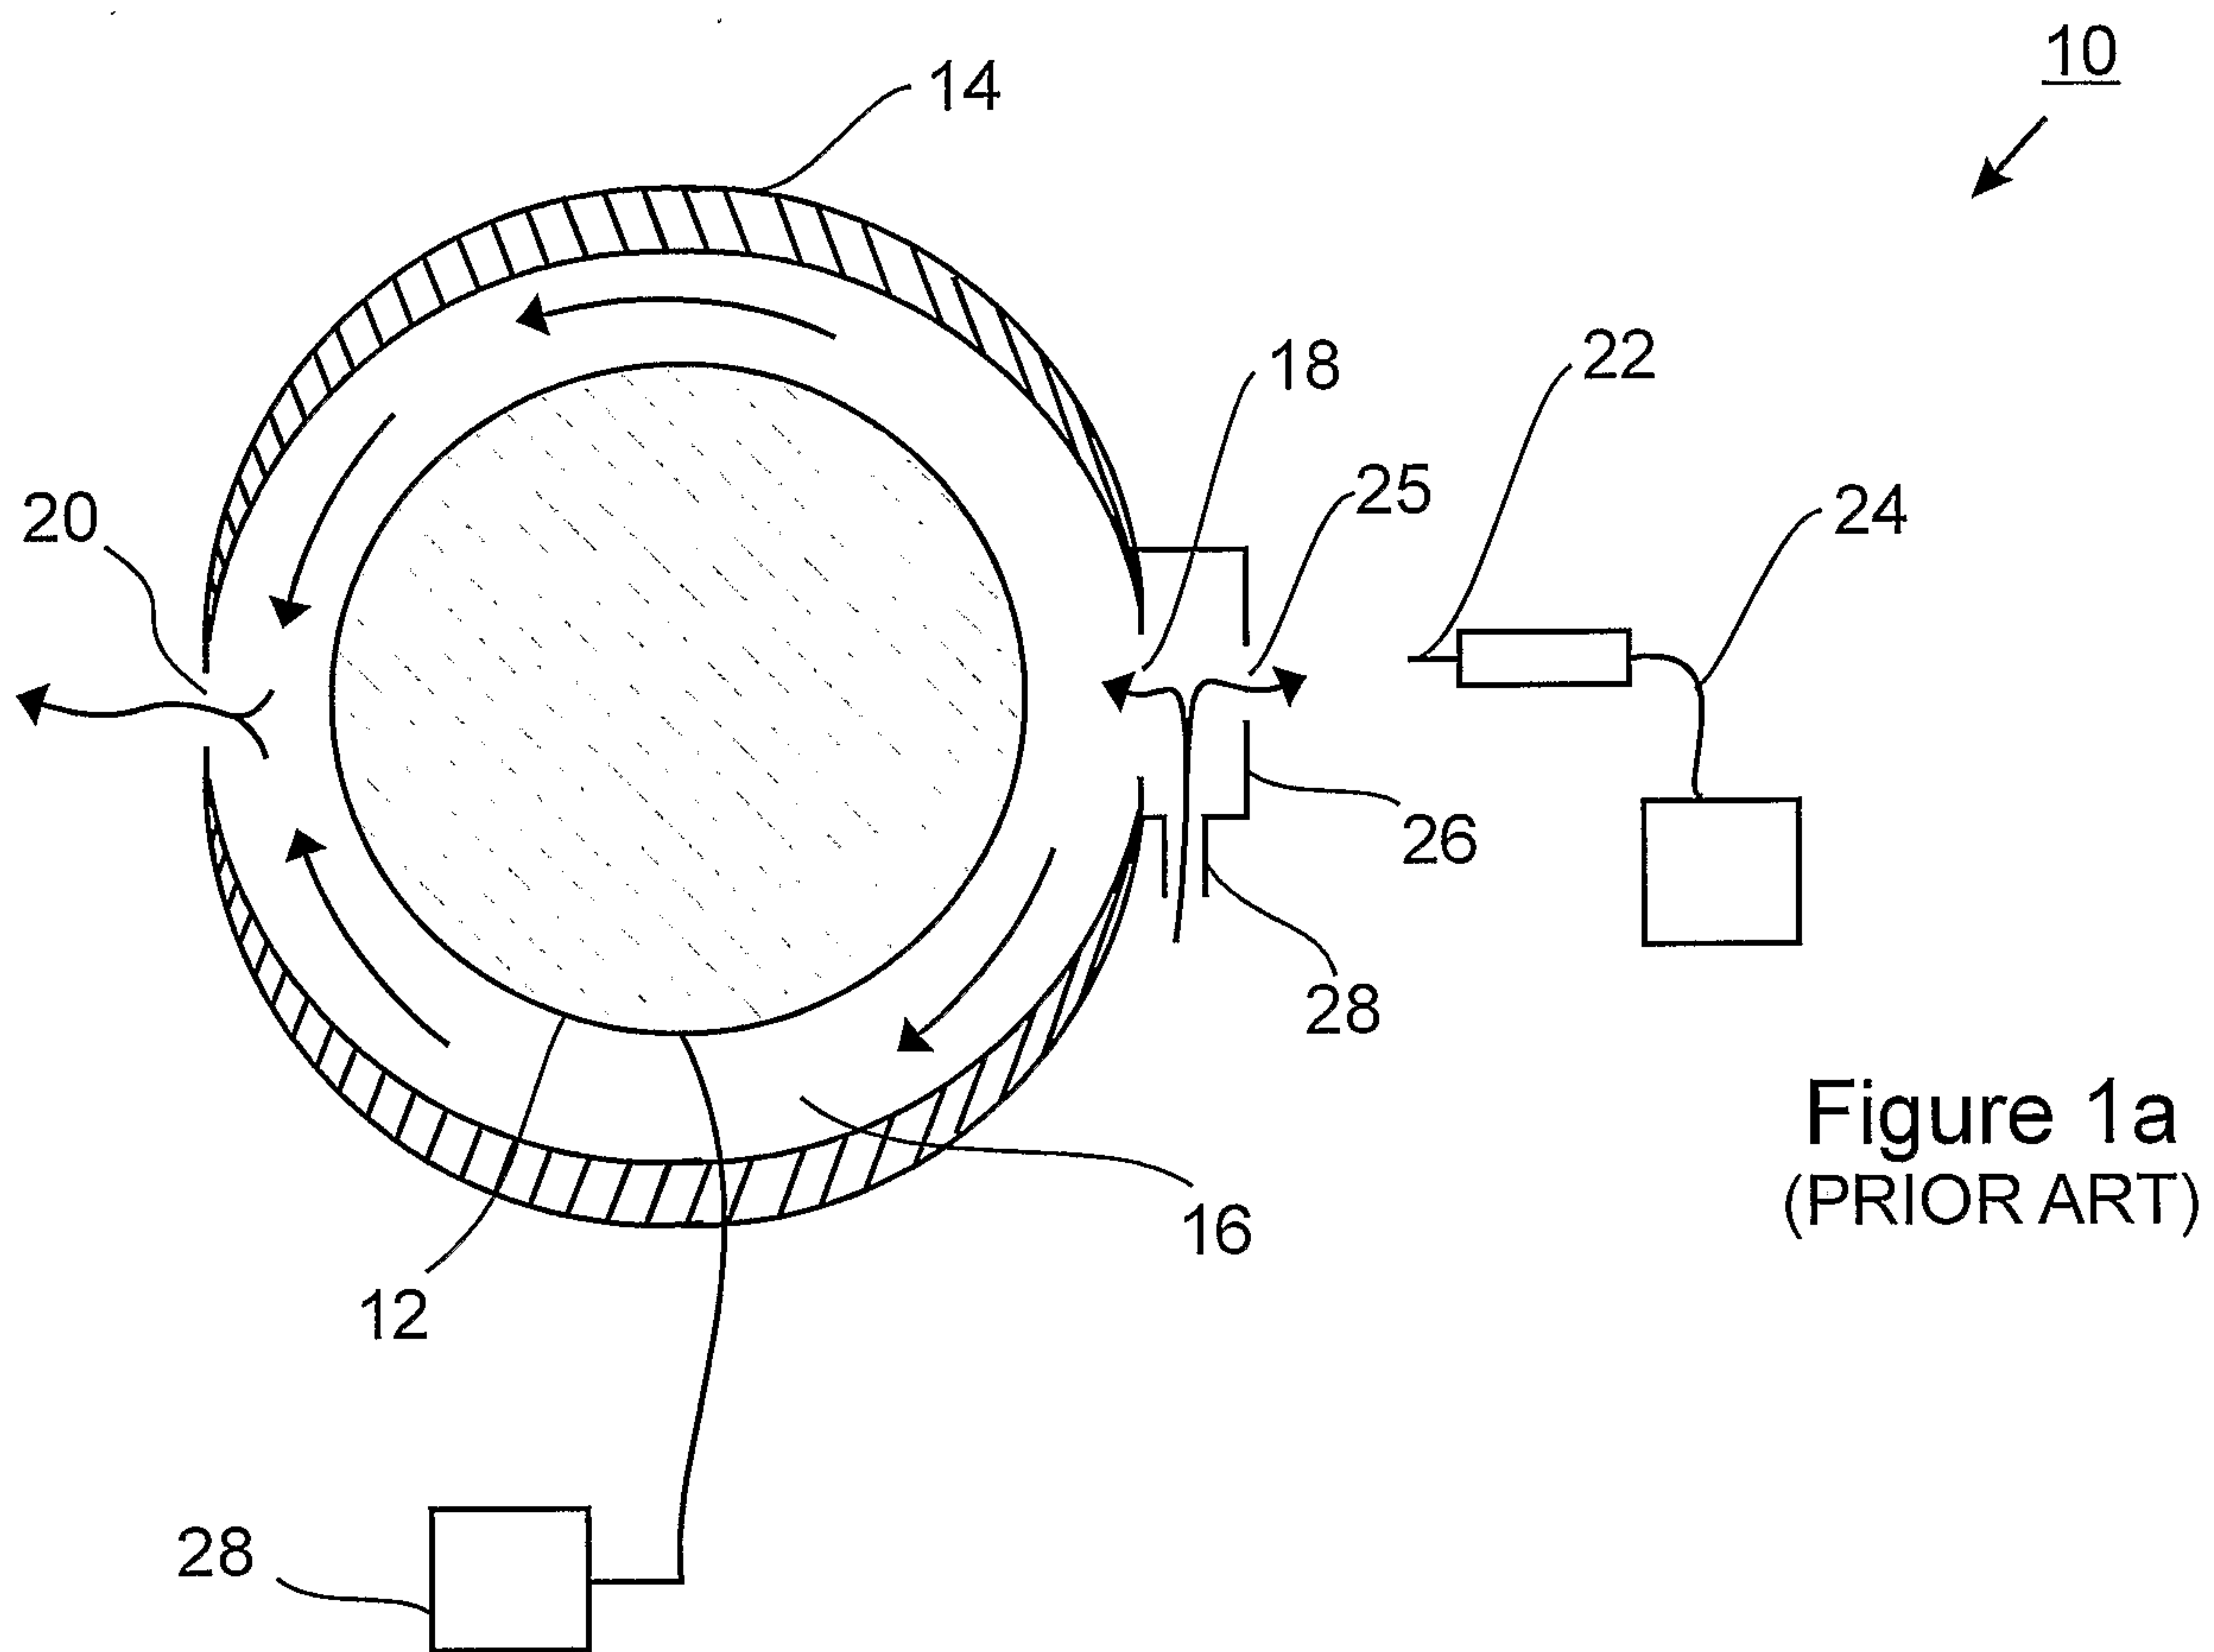

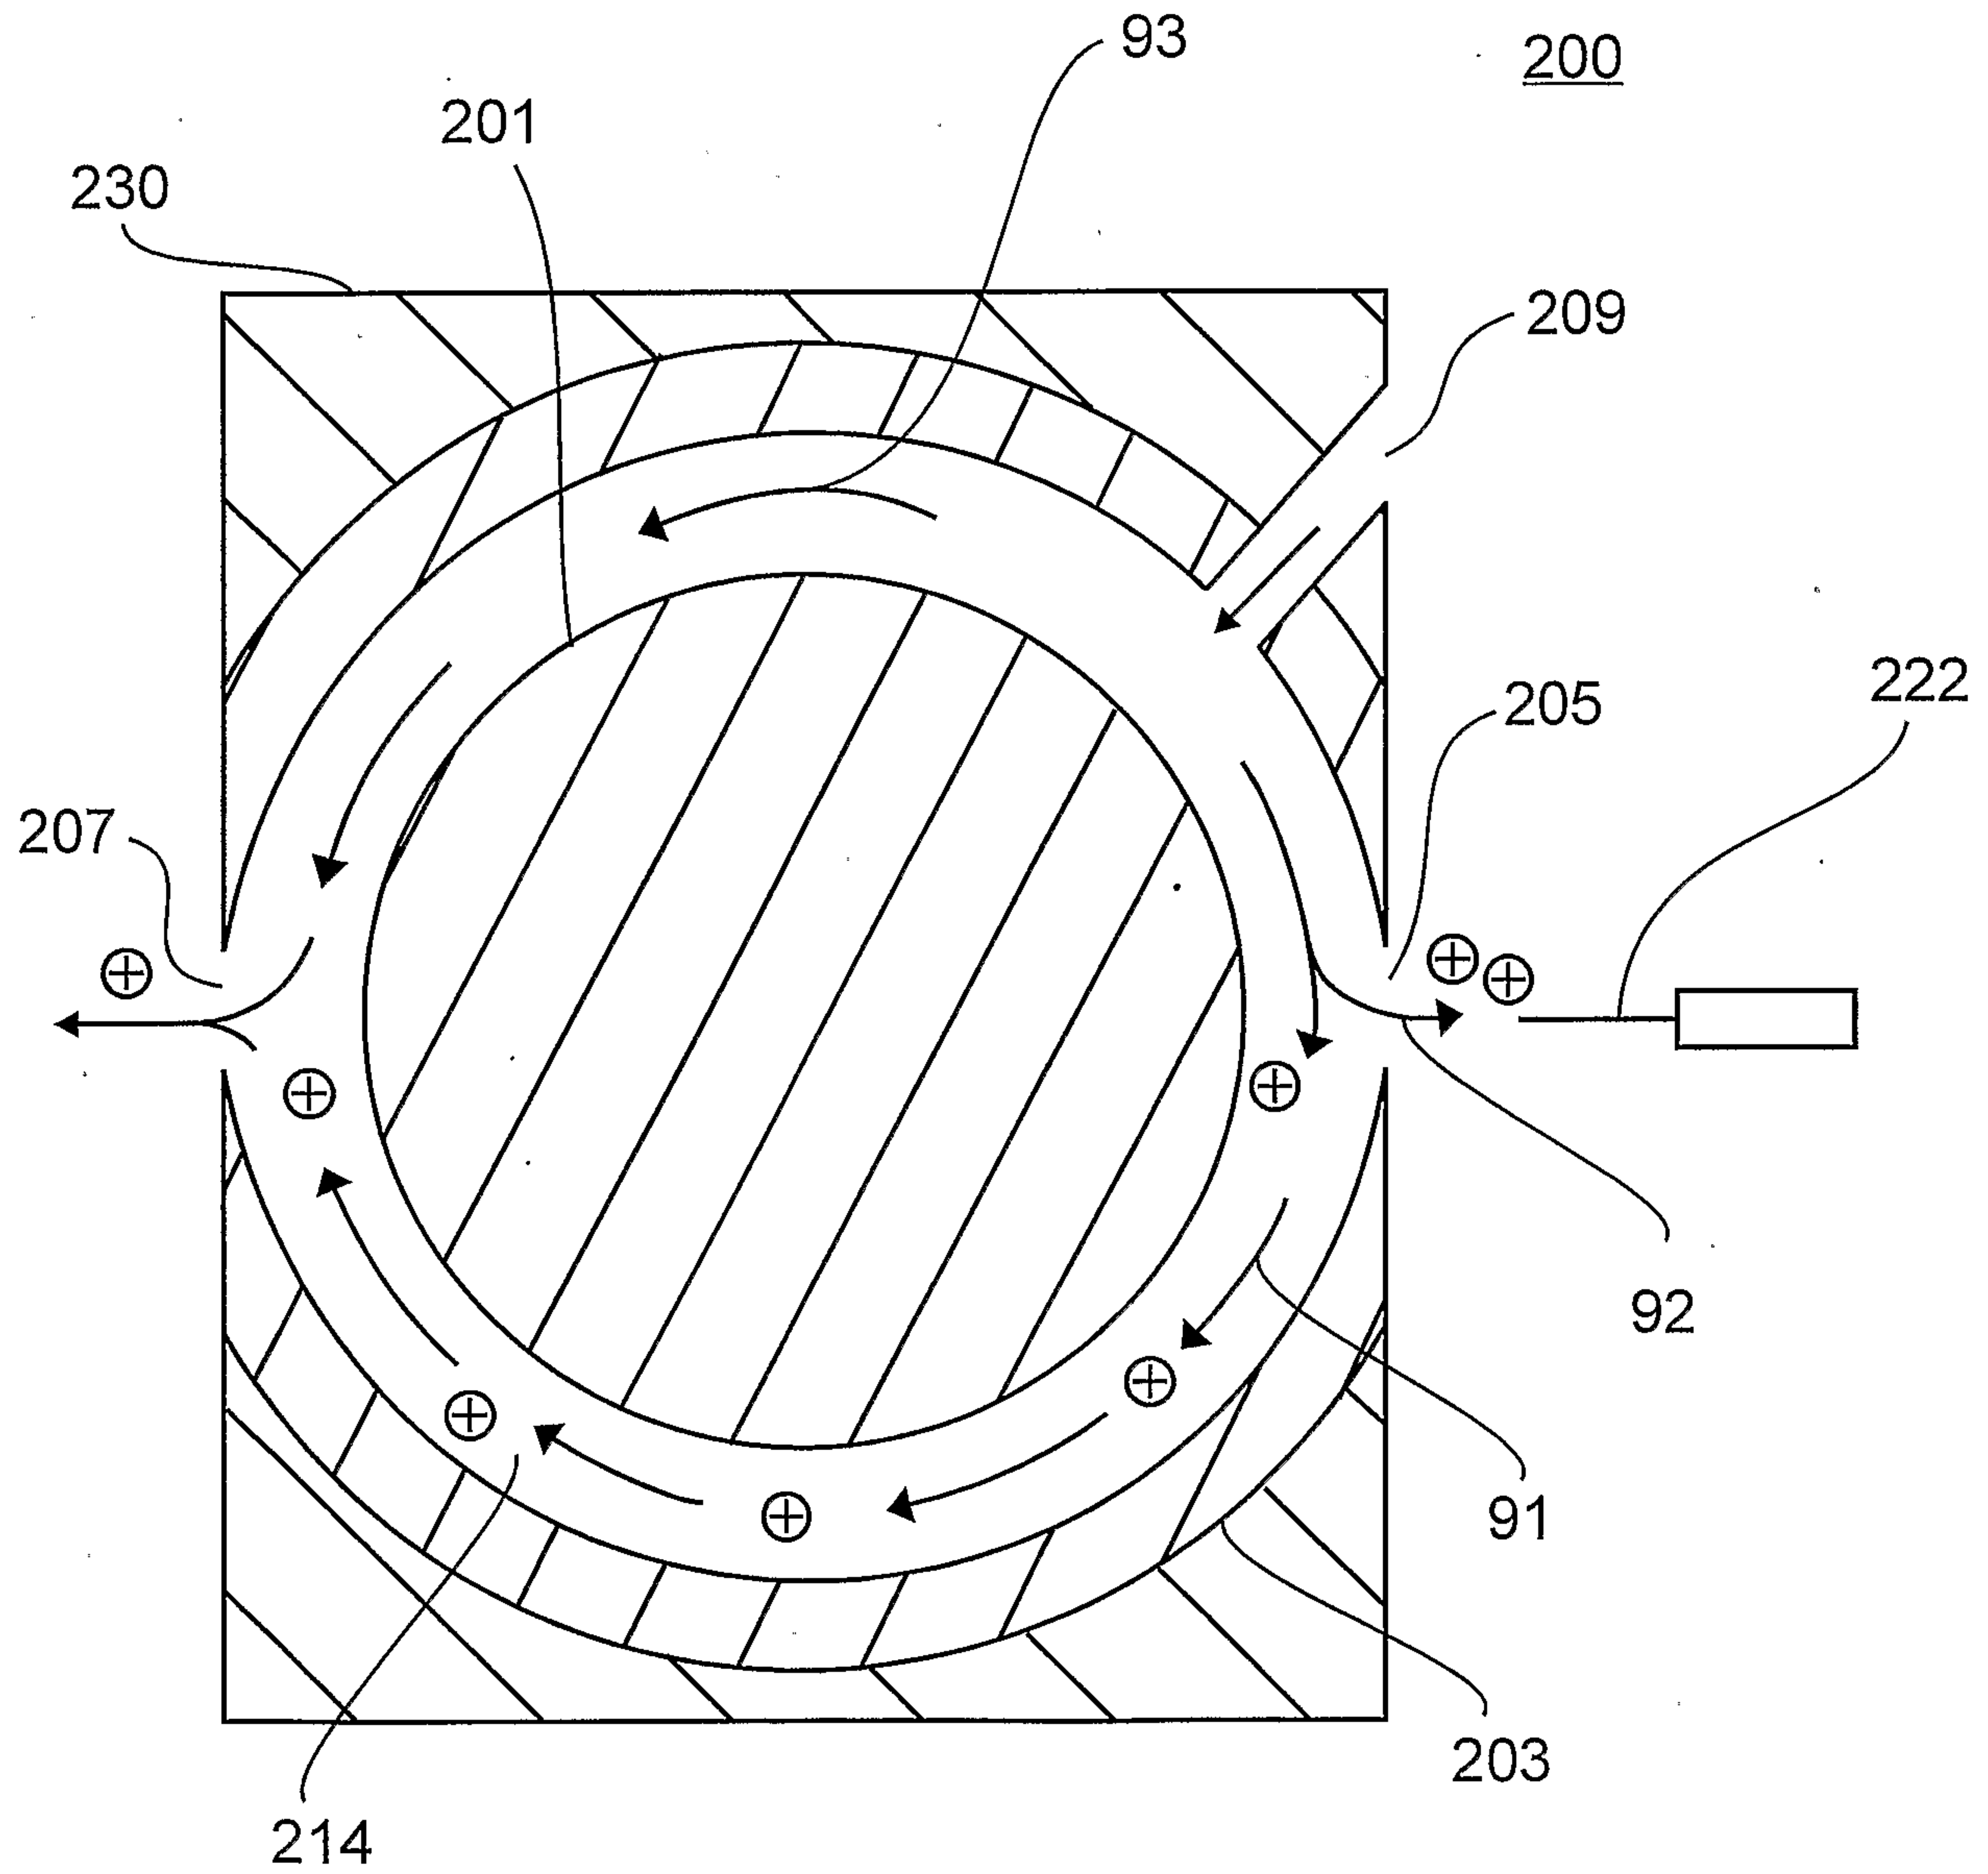


Figure 2a

3/20

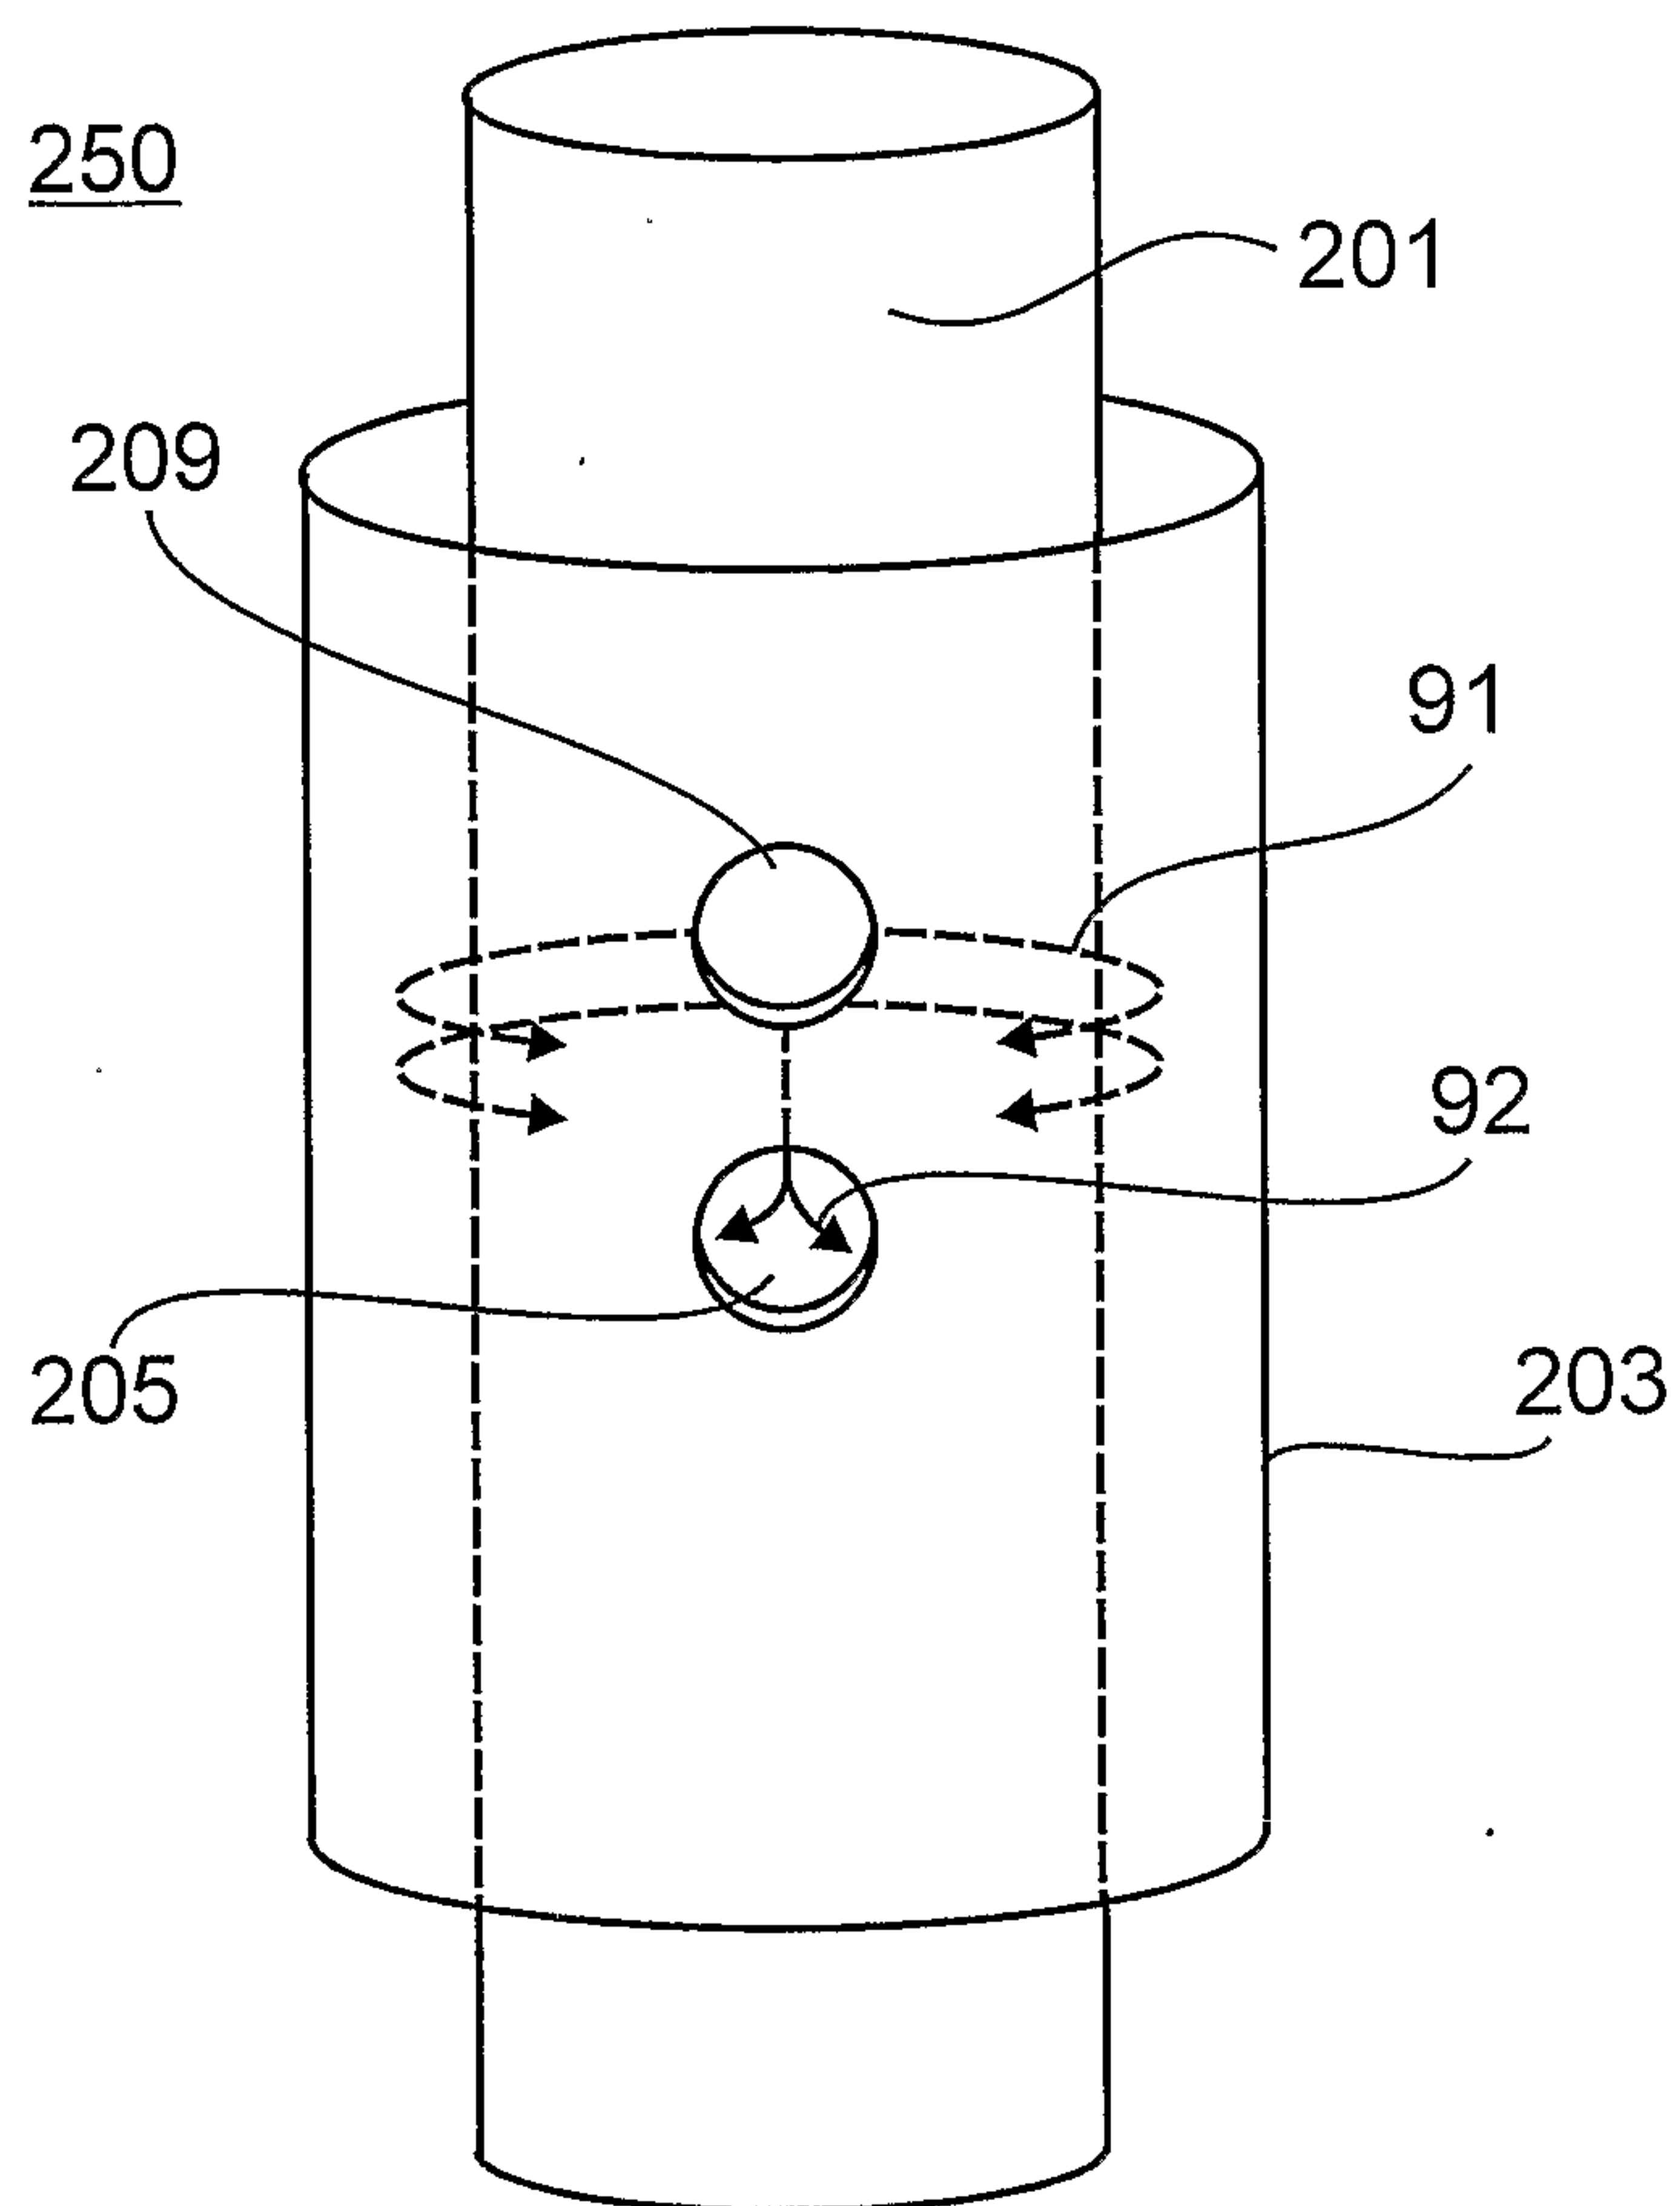


Figure 2b

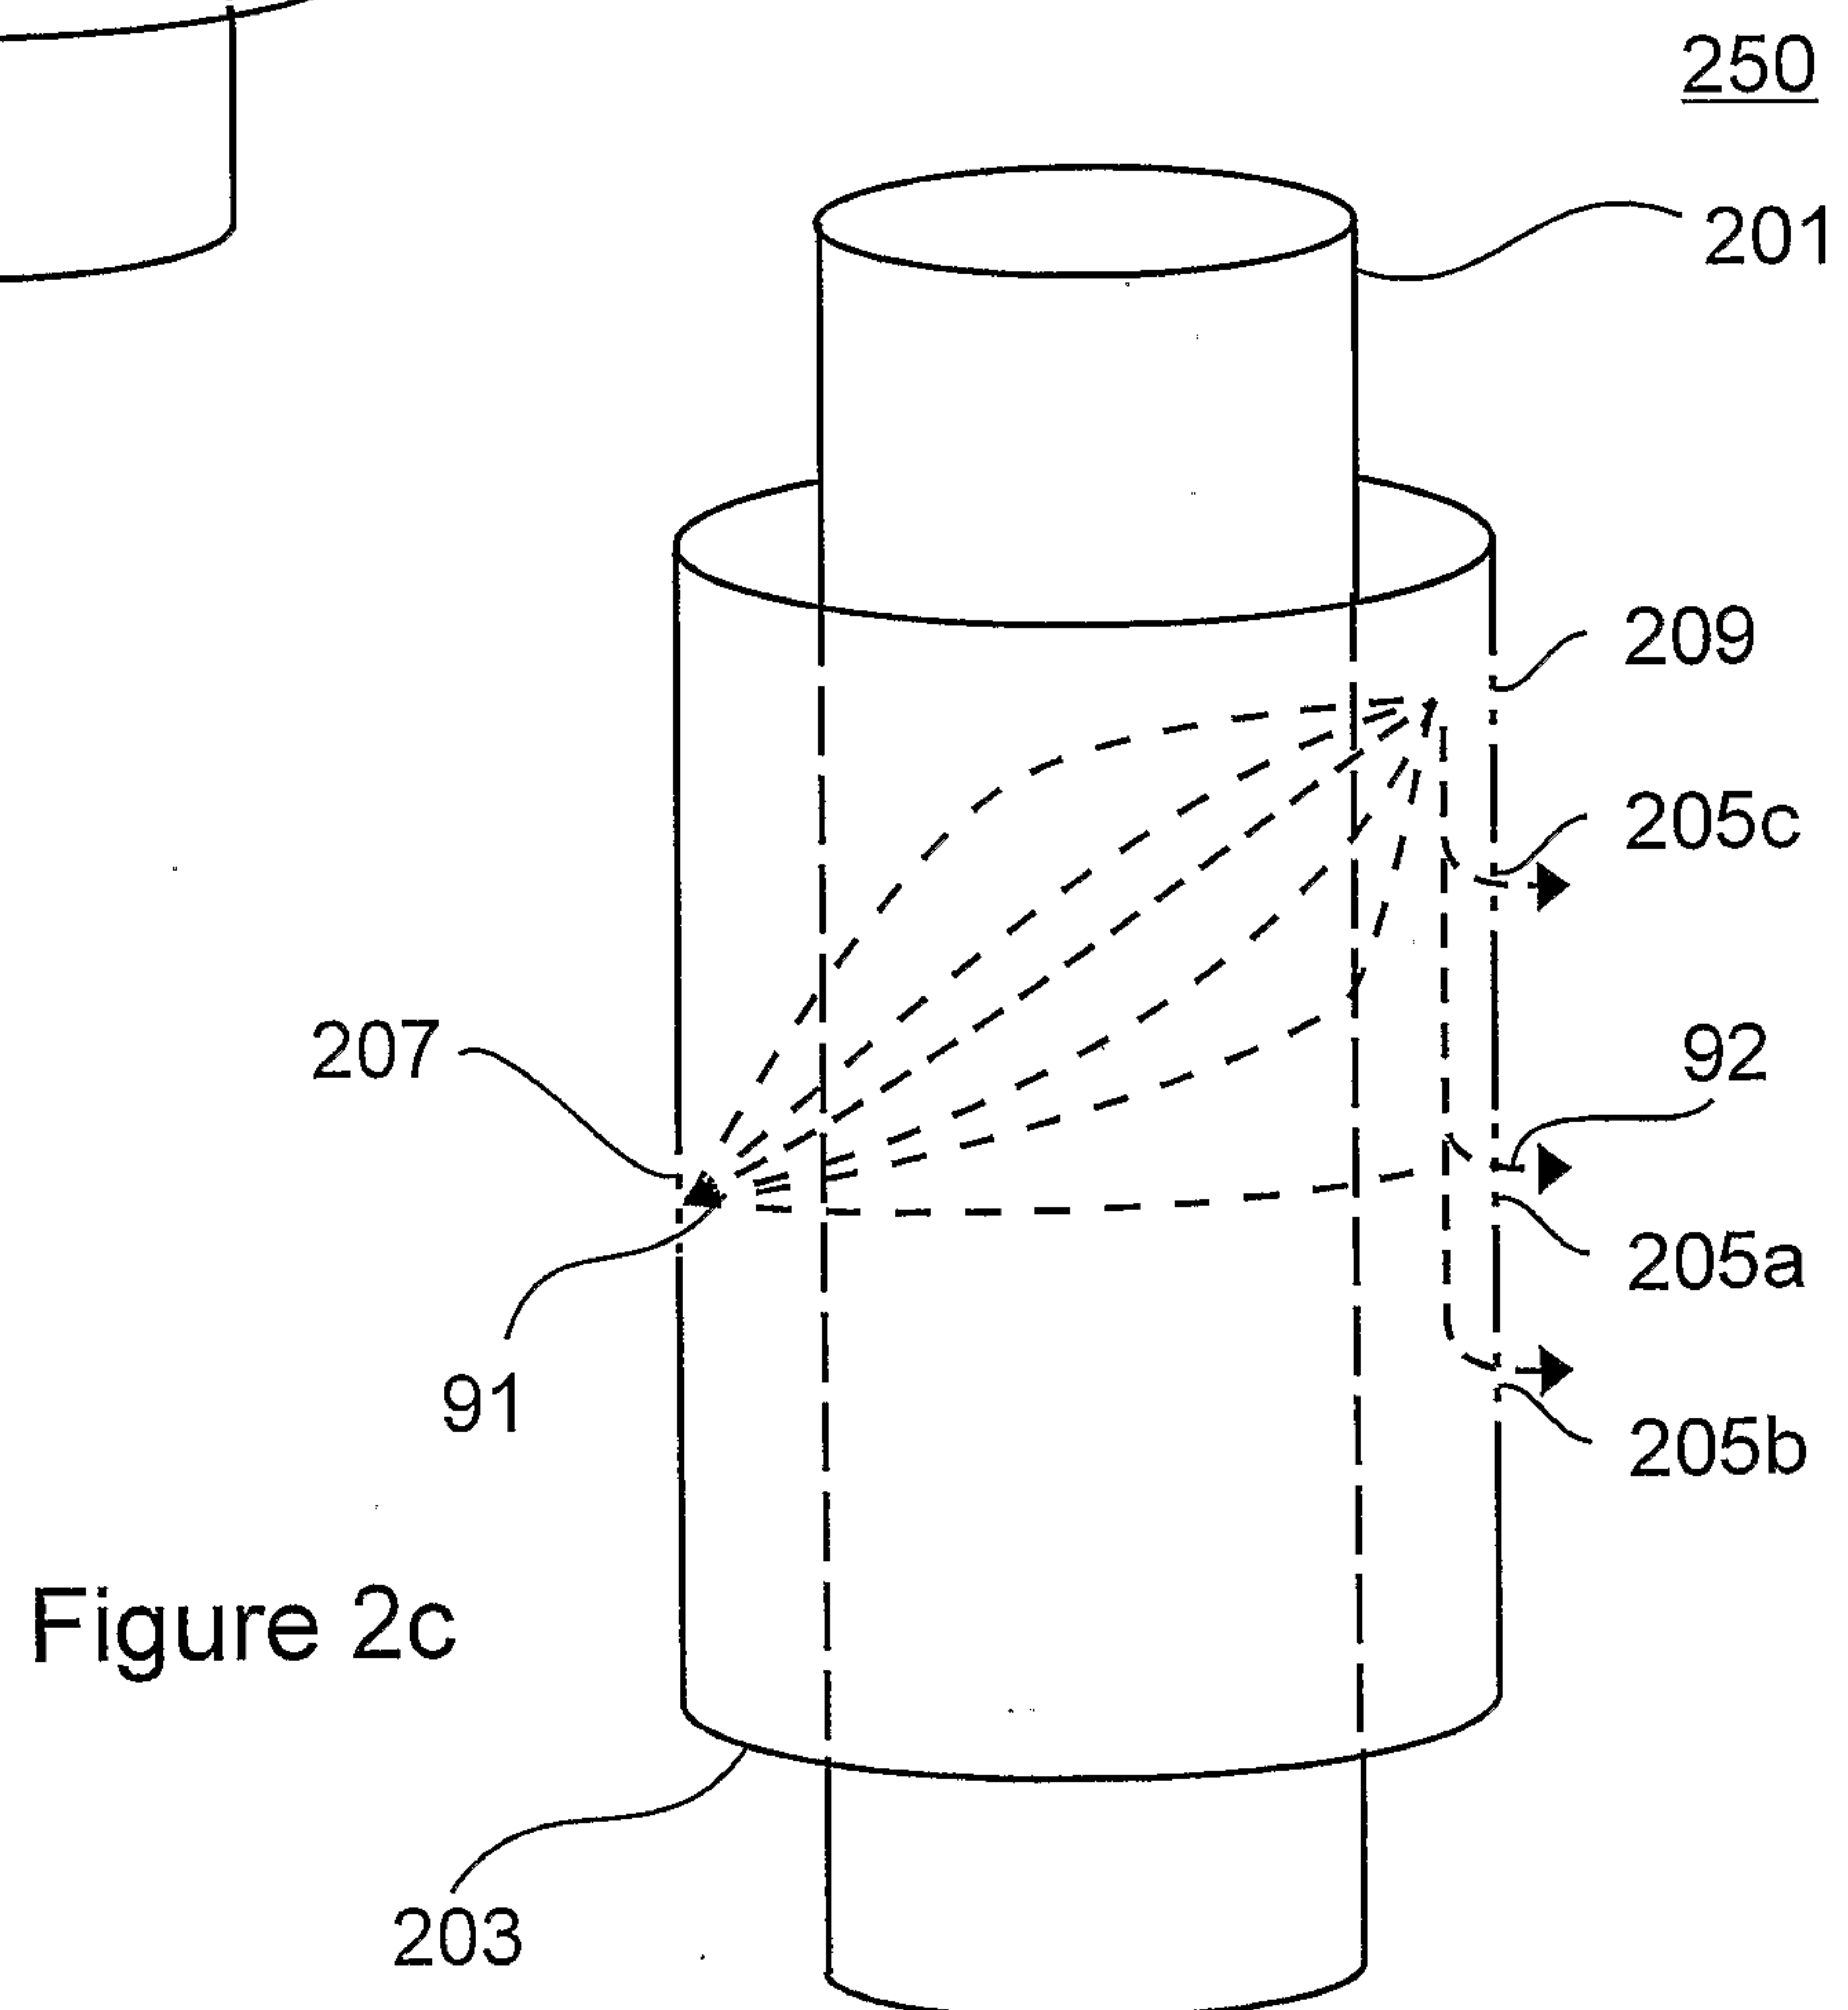


Figure 2c

4/20

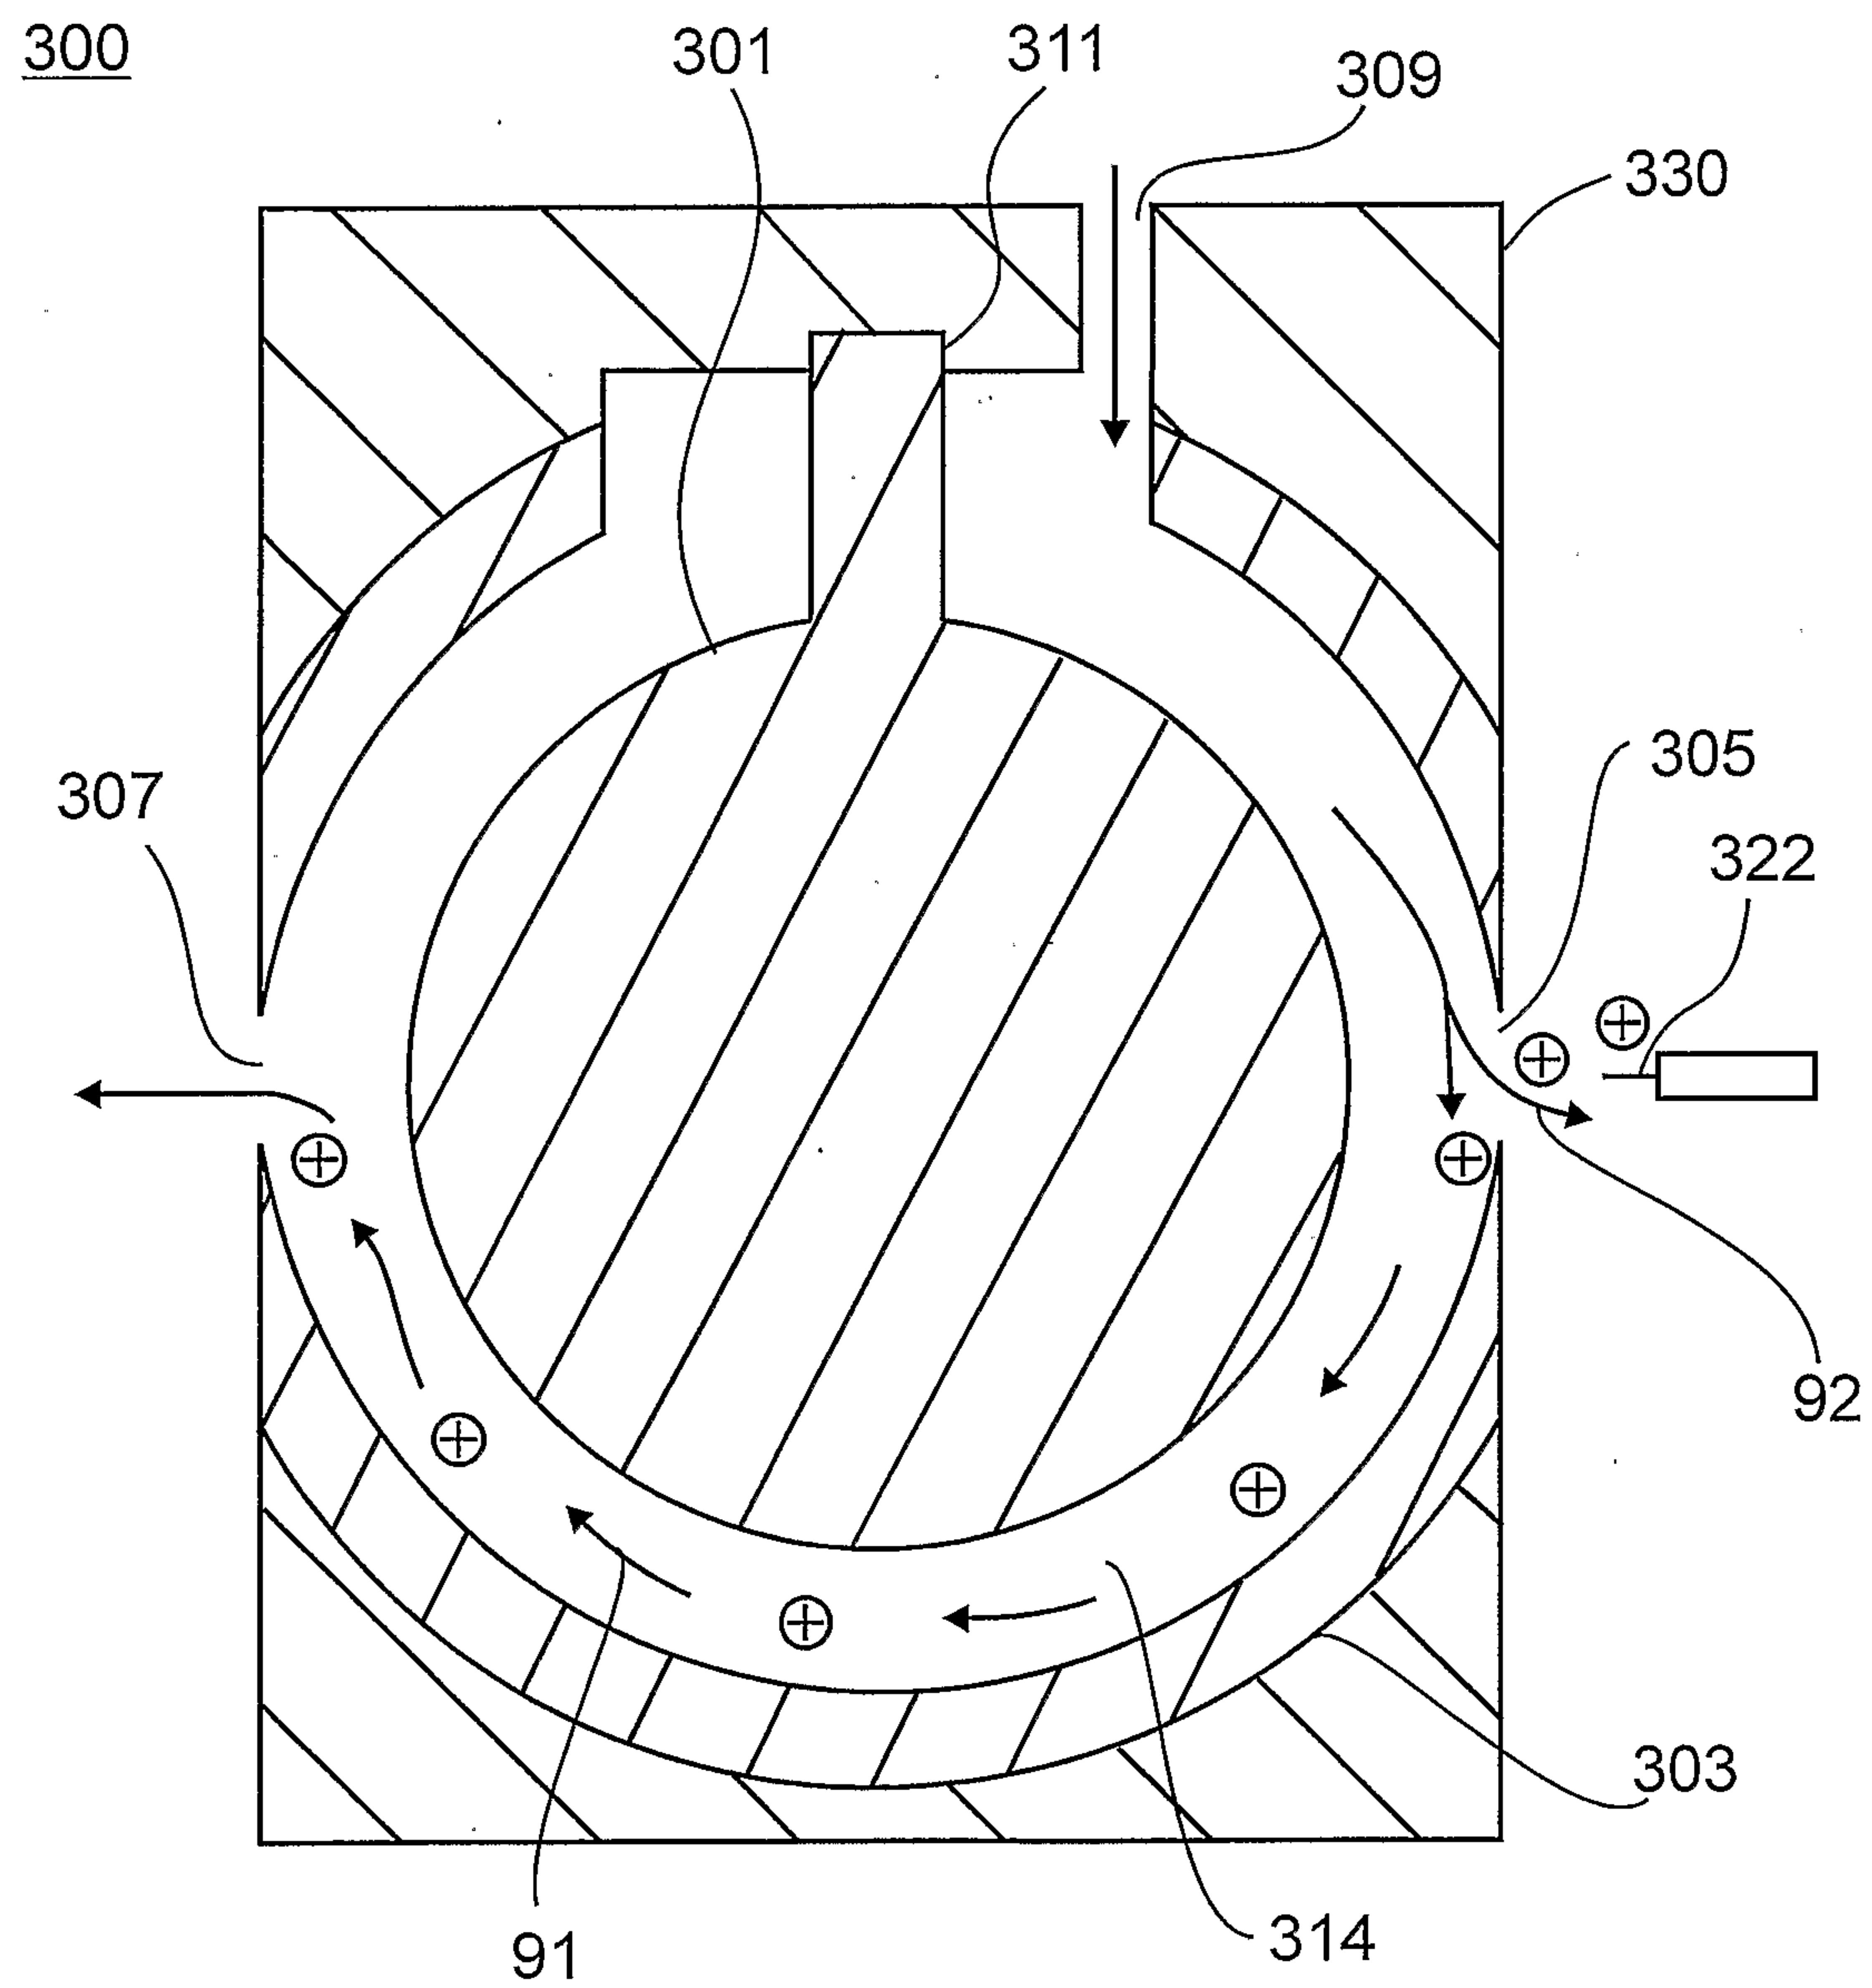


Figure 3

5/20

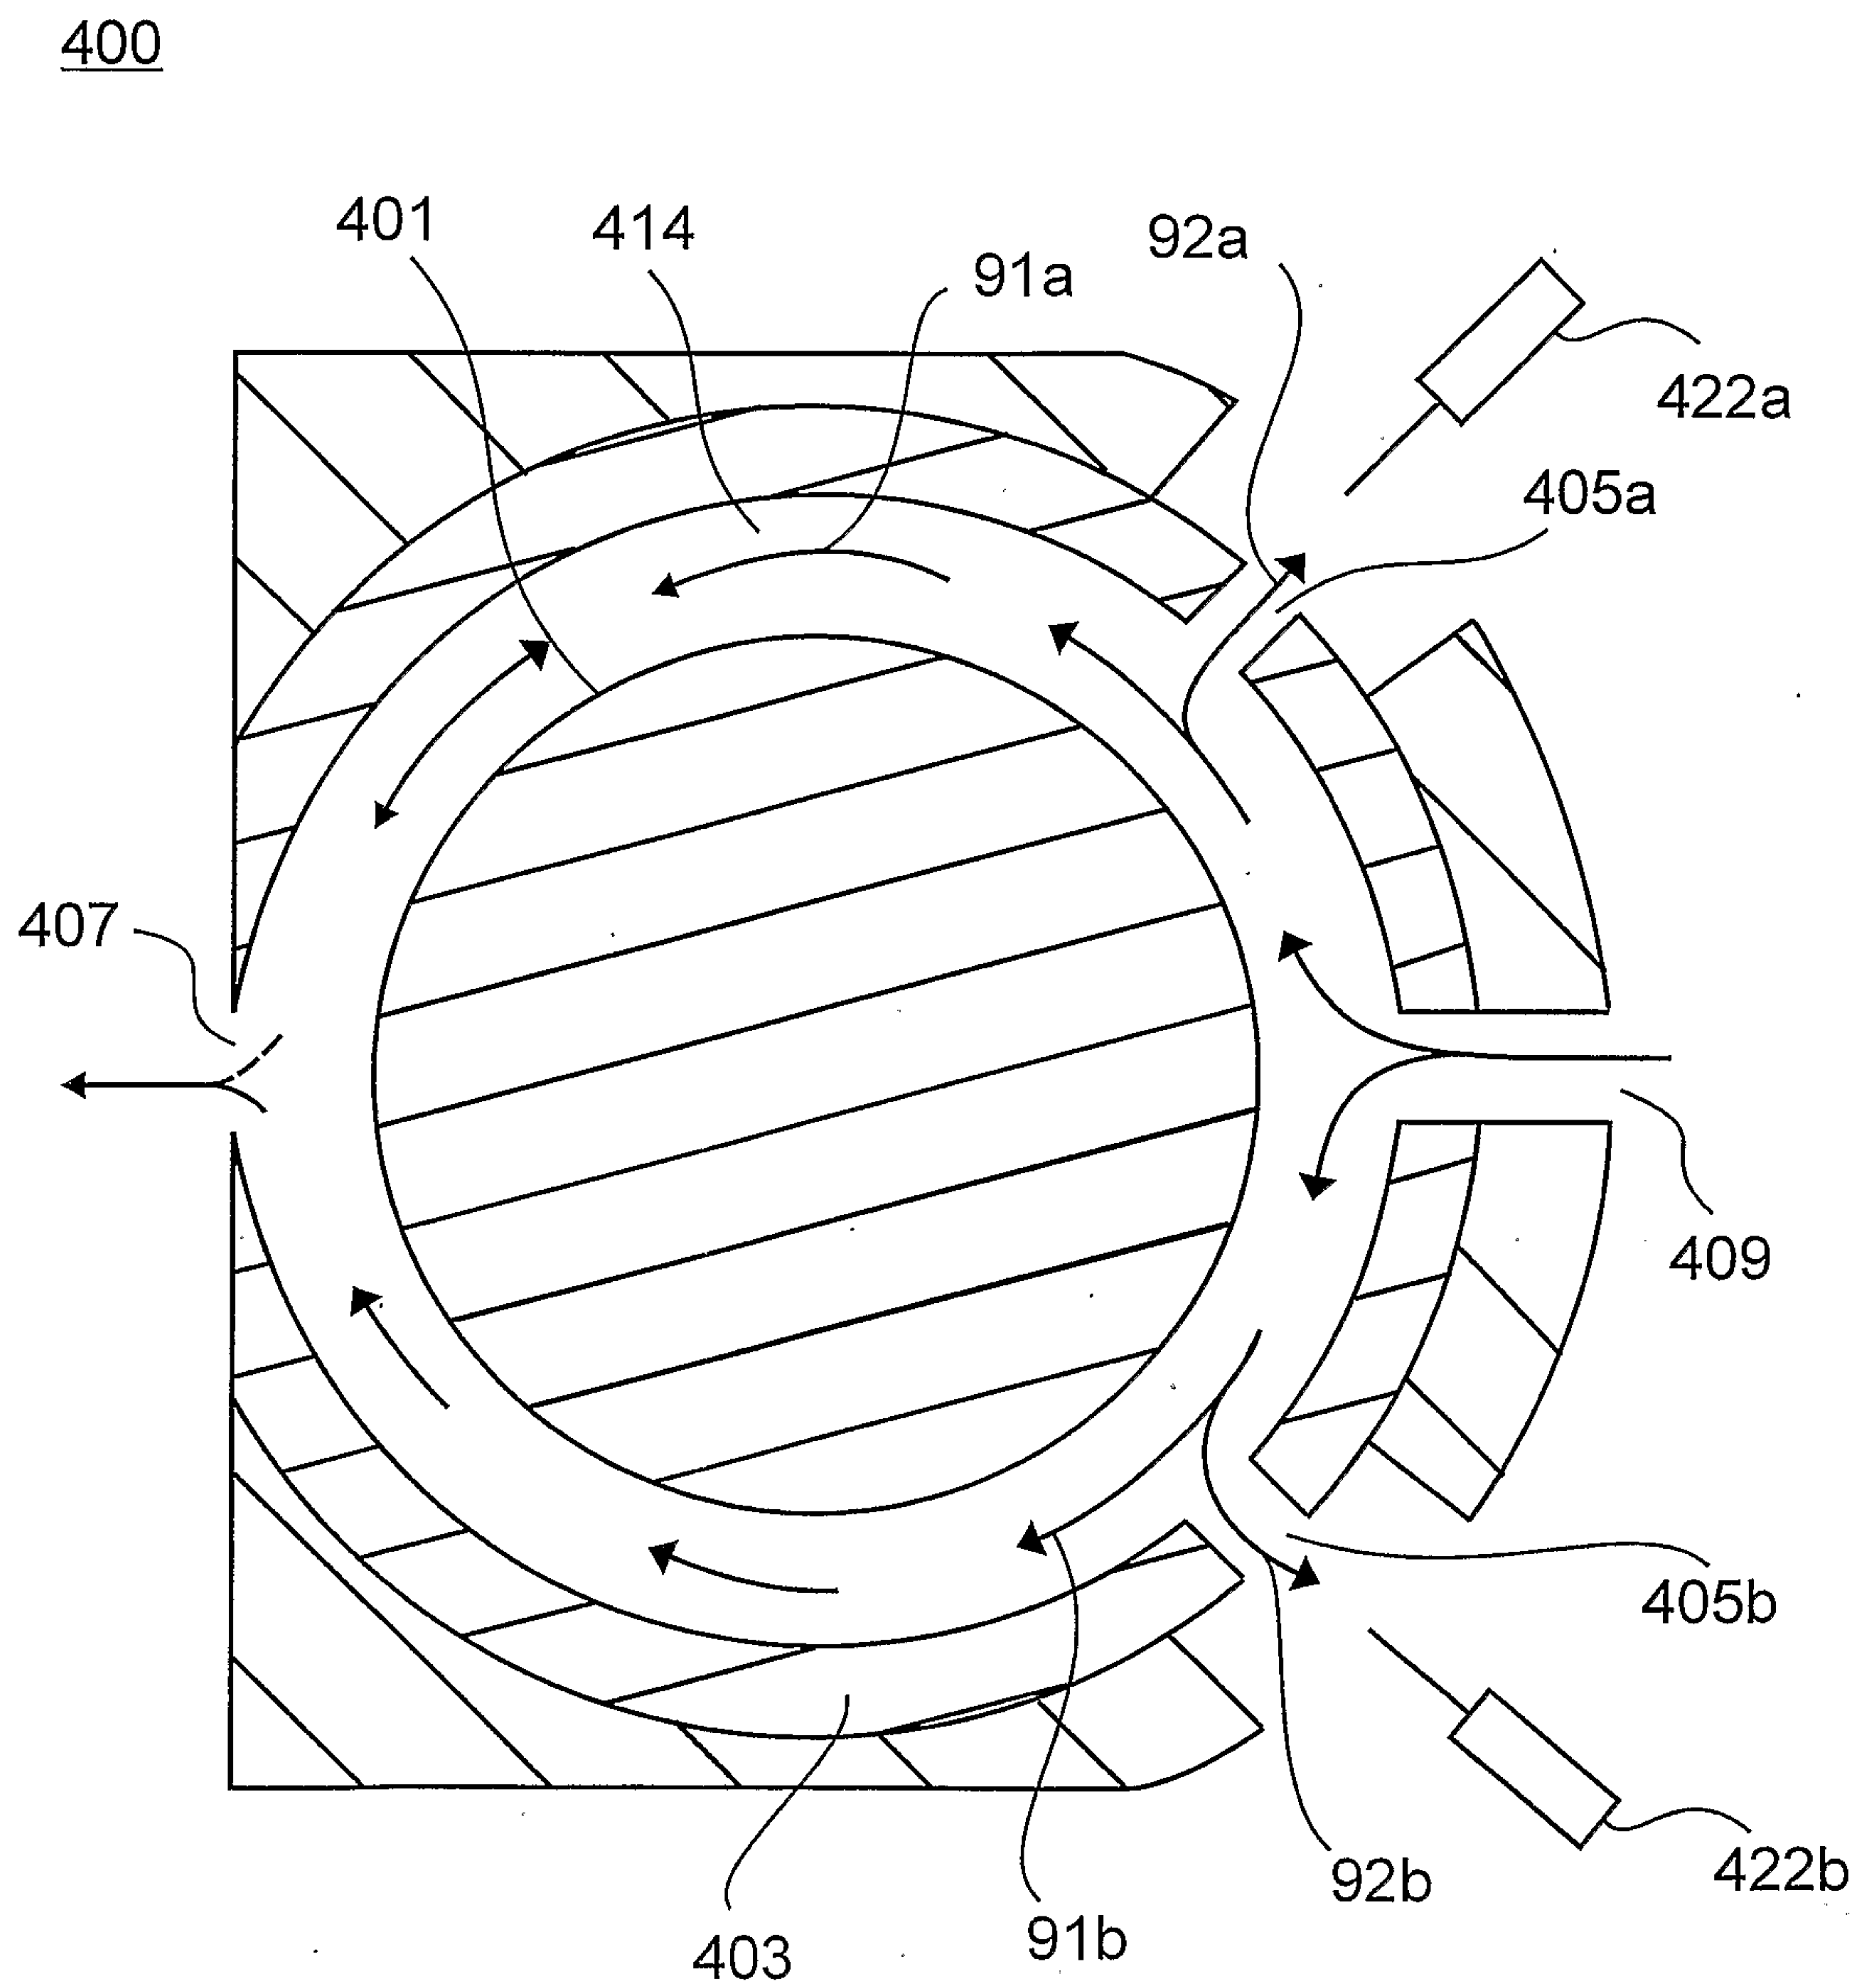


Figure 4

6/20



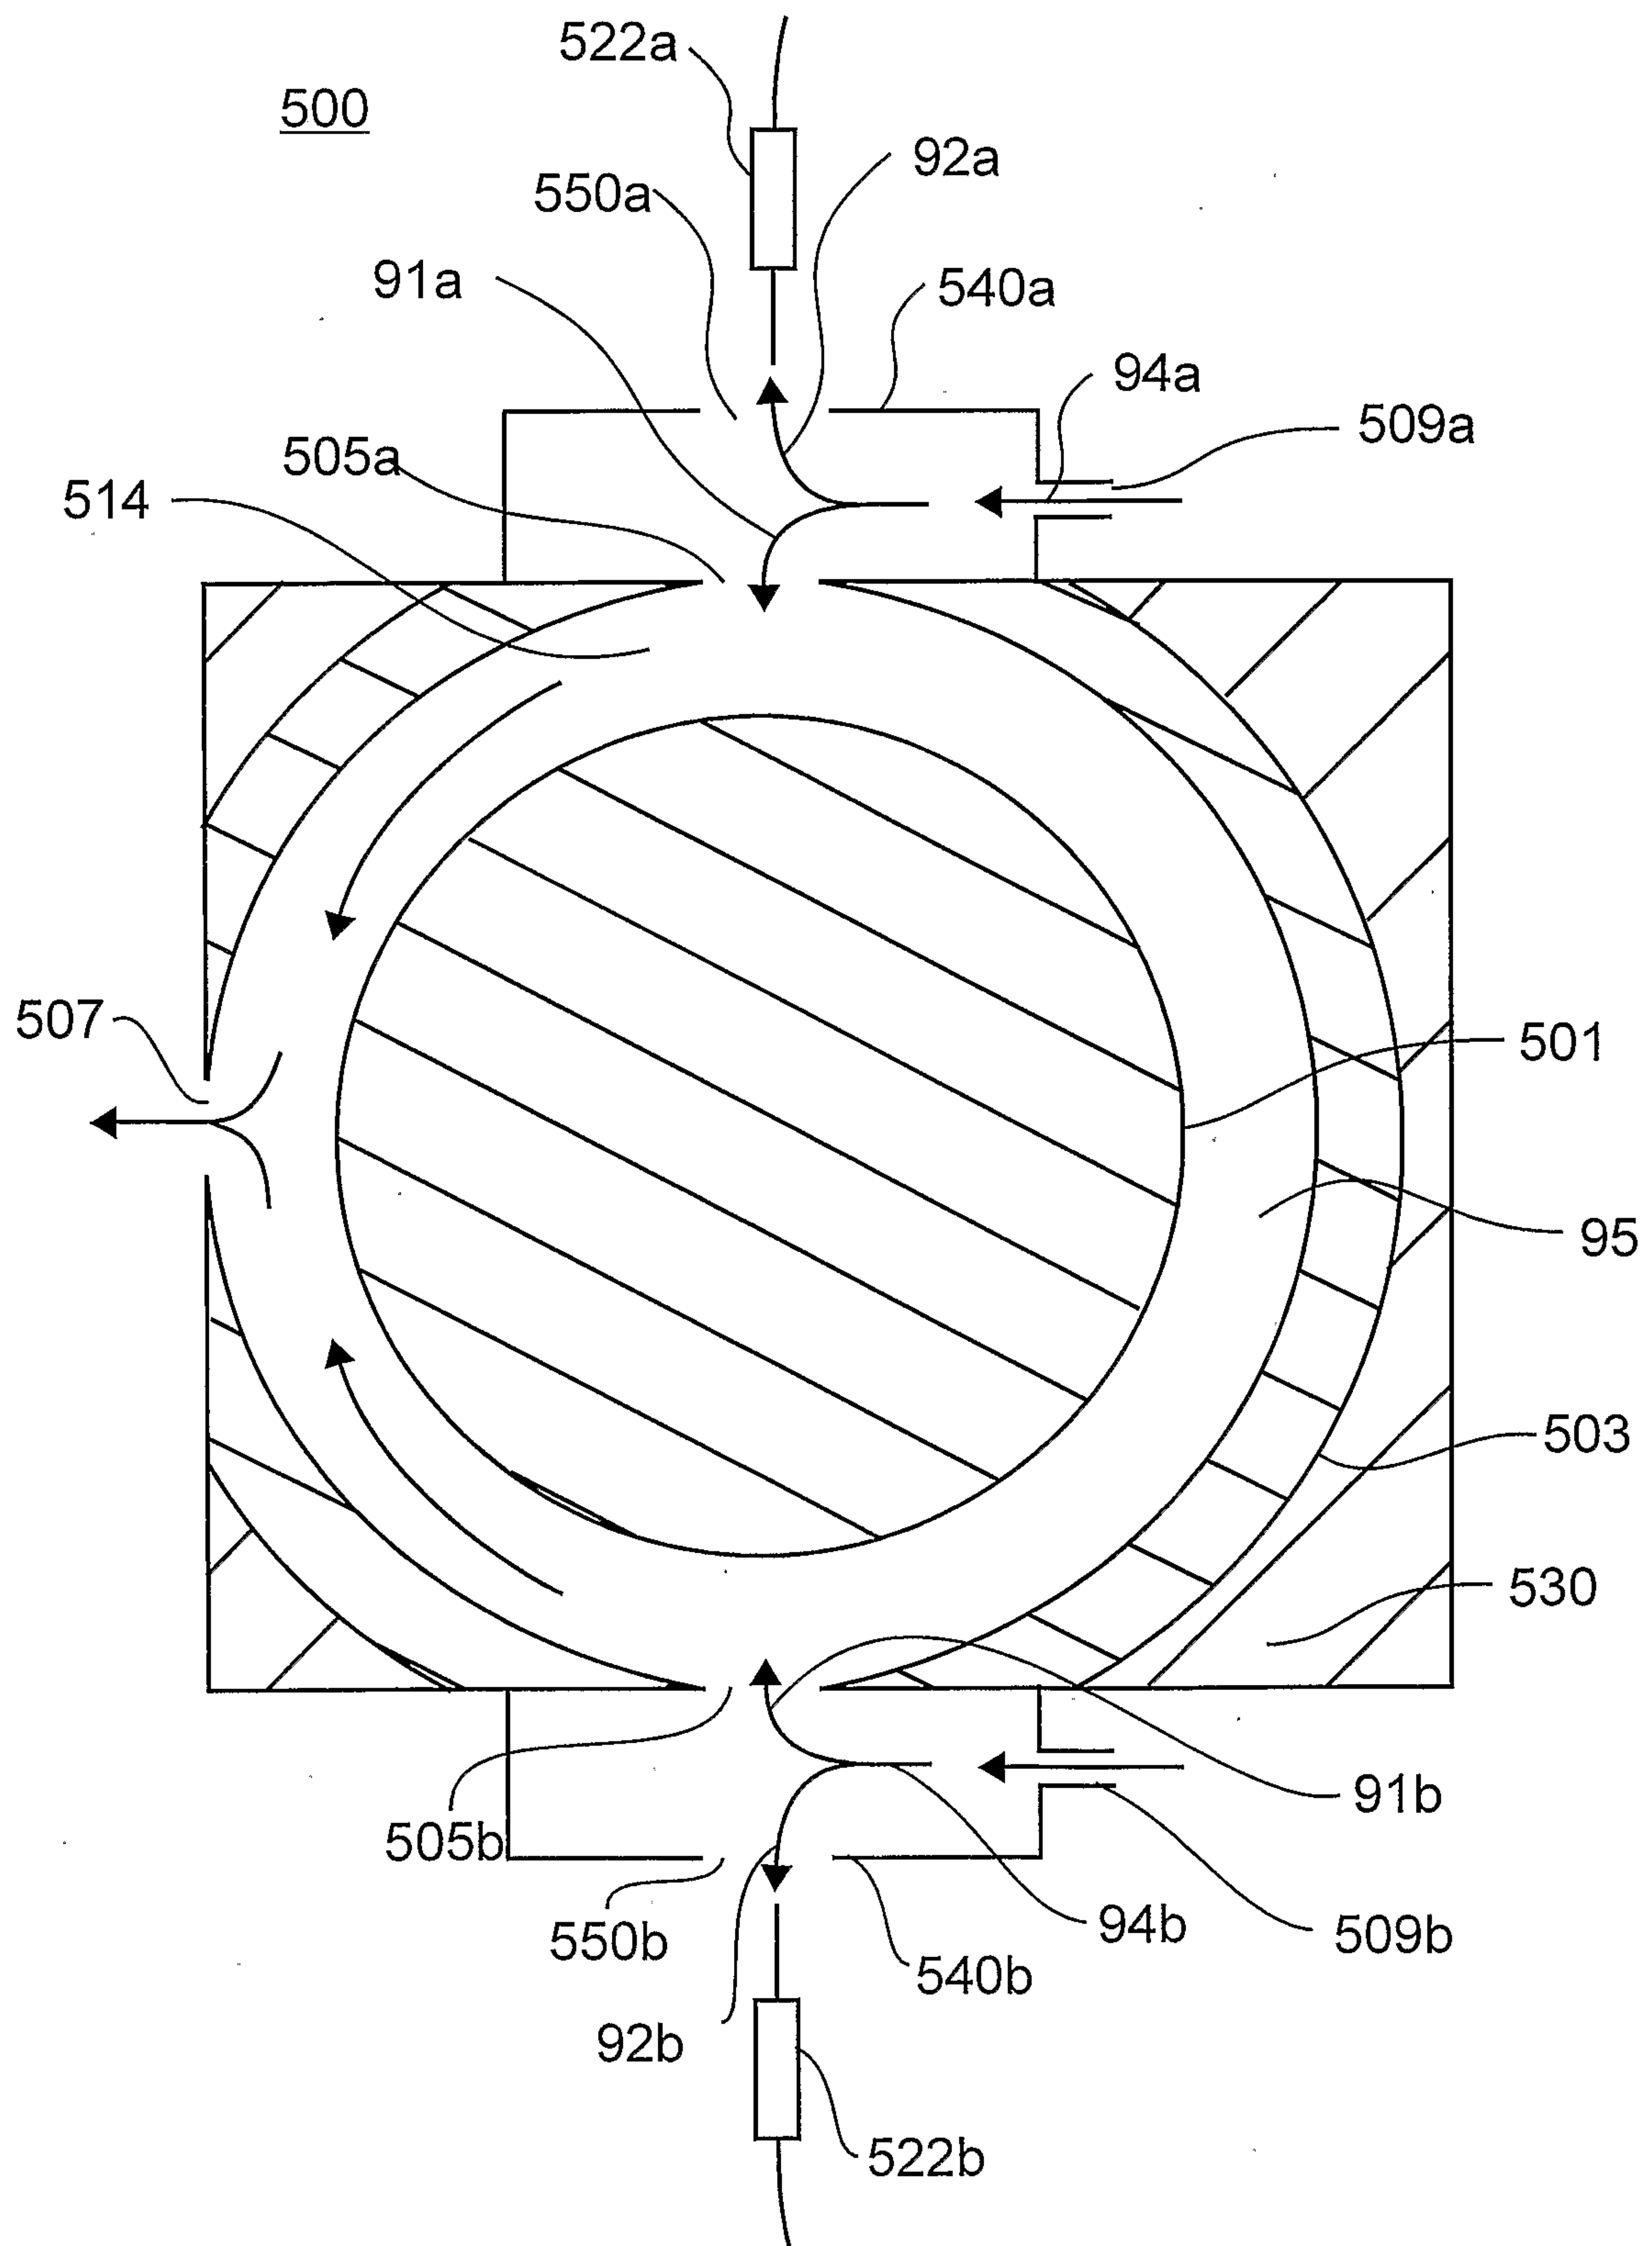


Figure 5a

7/20

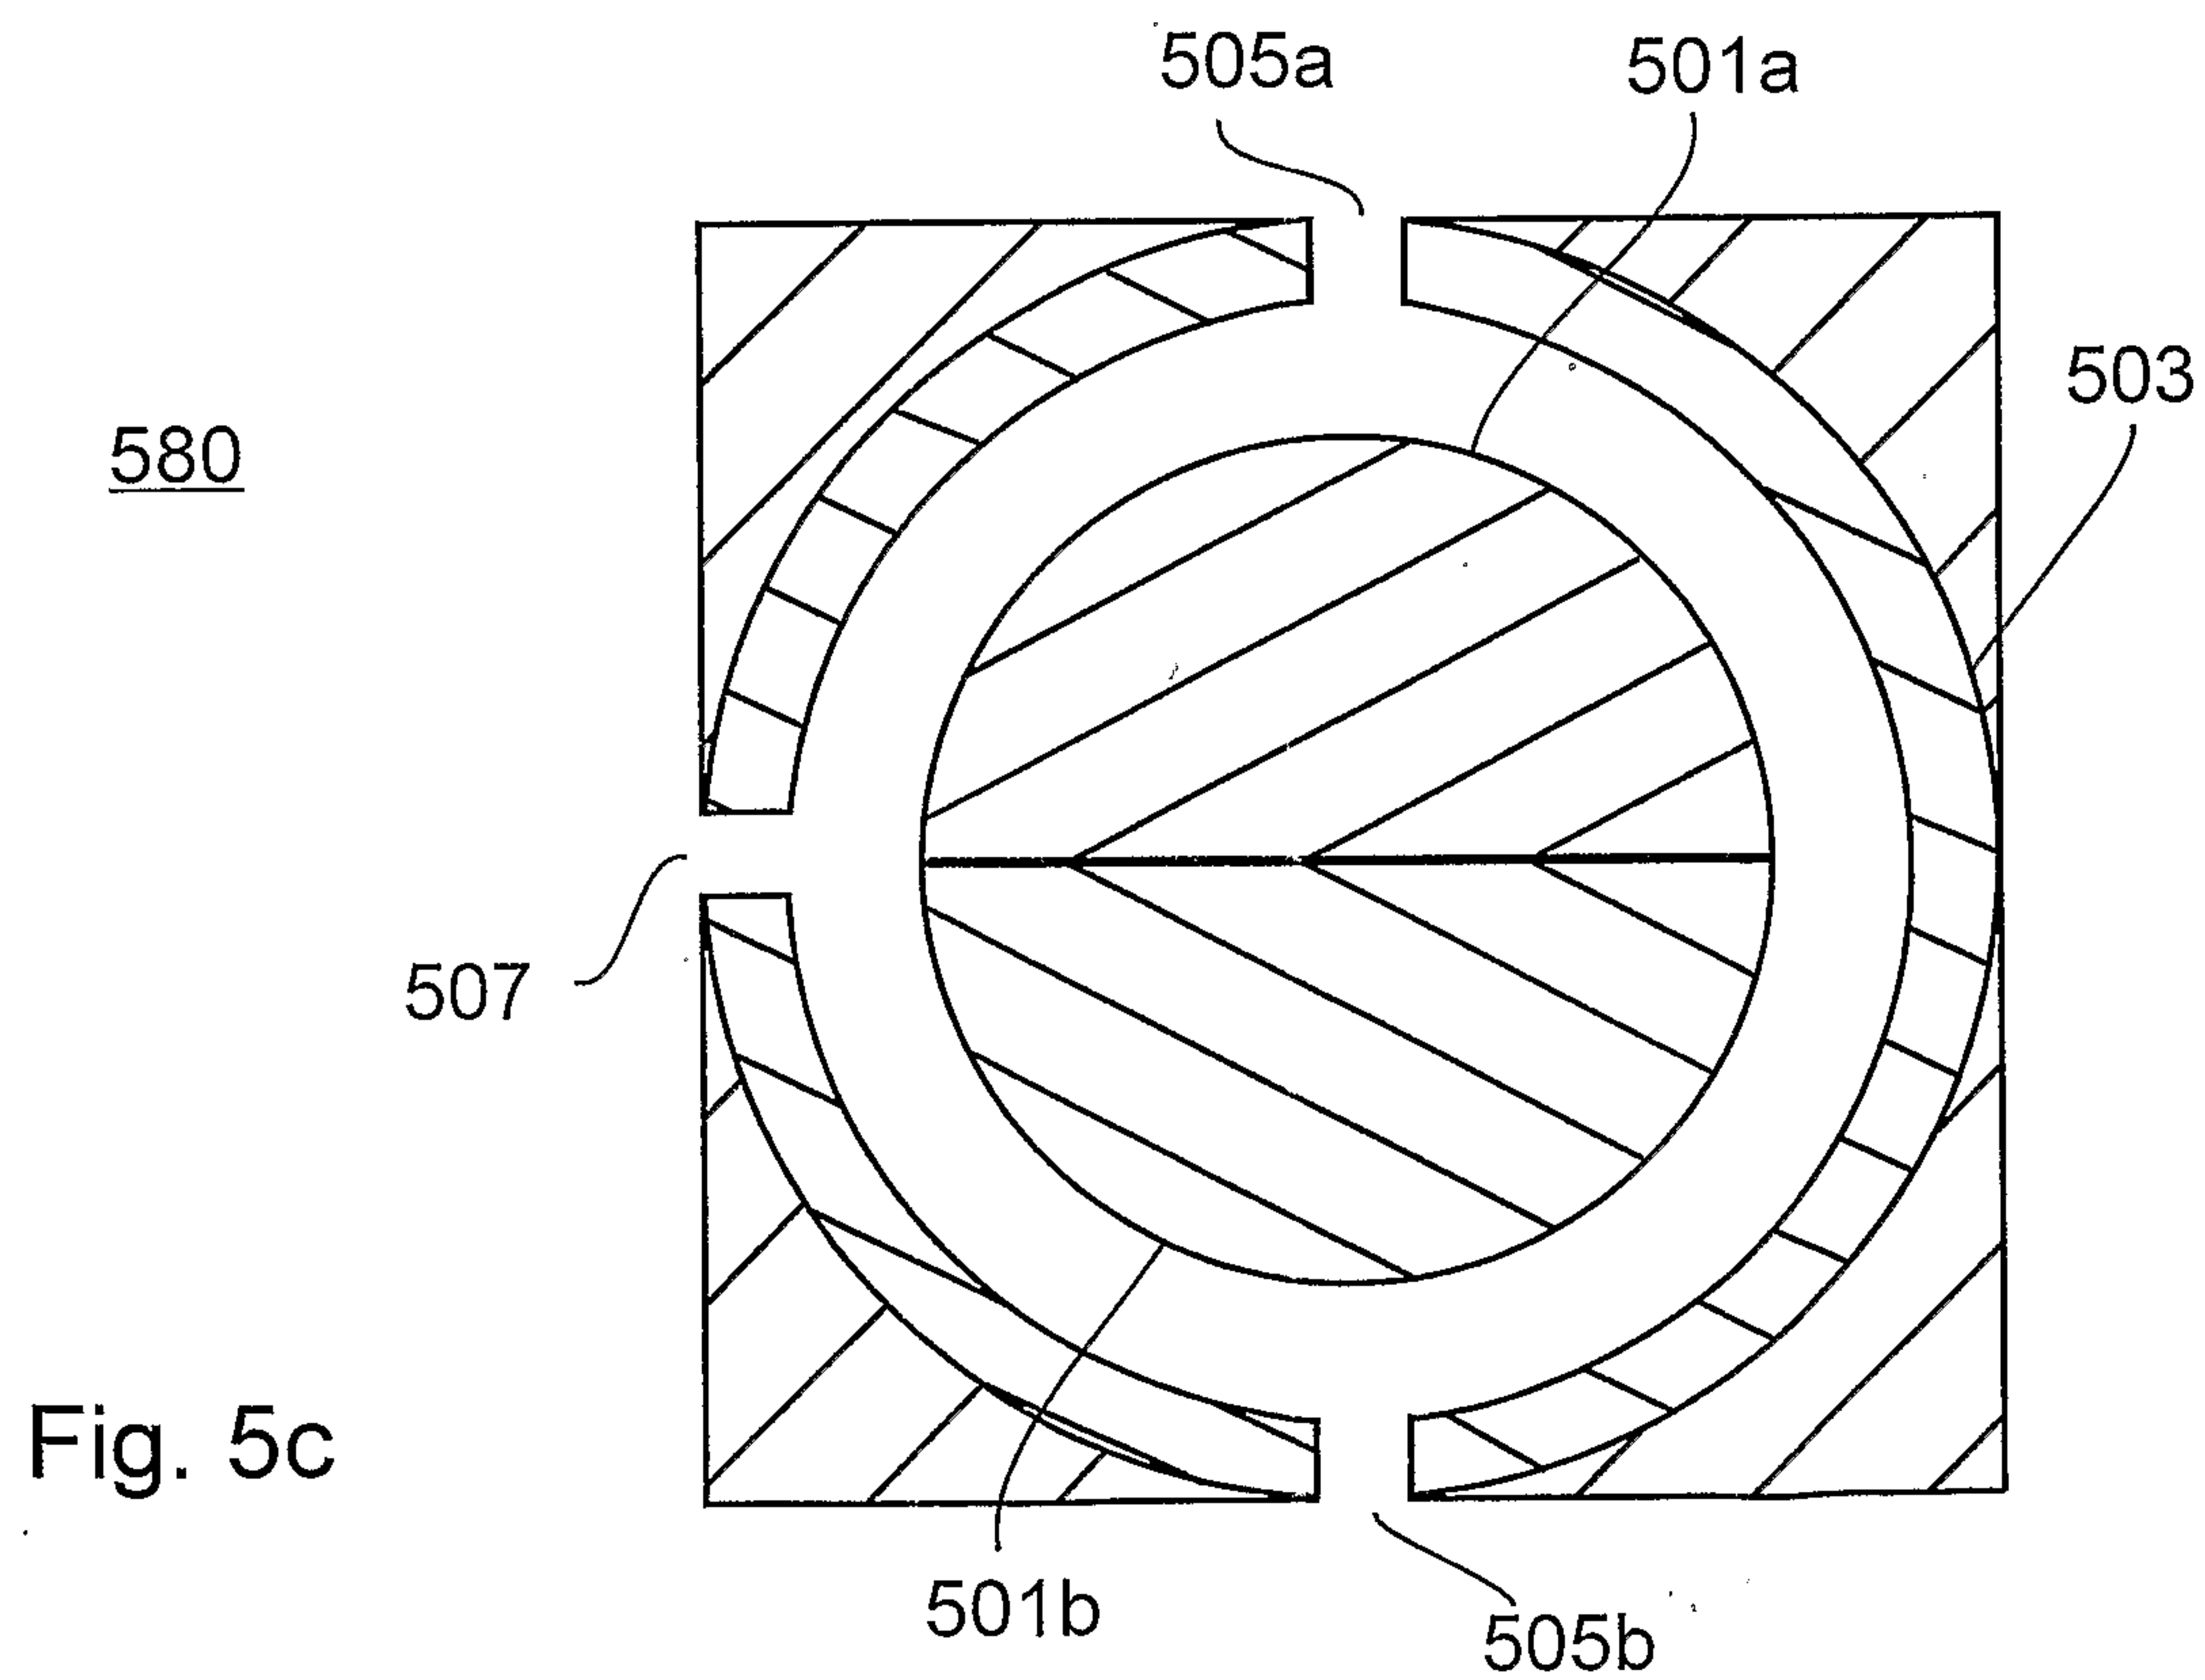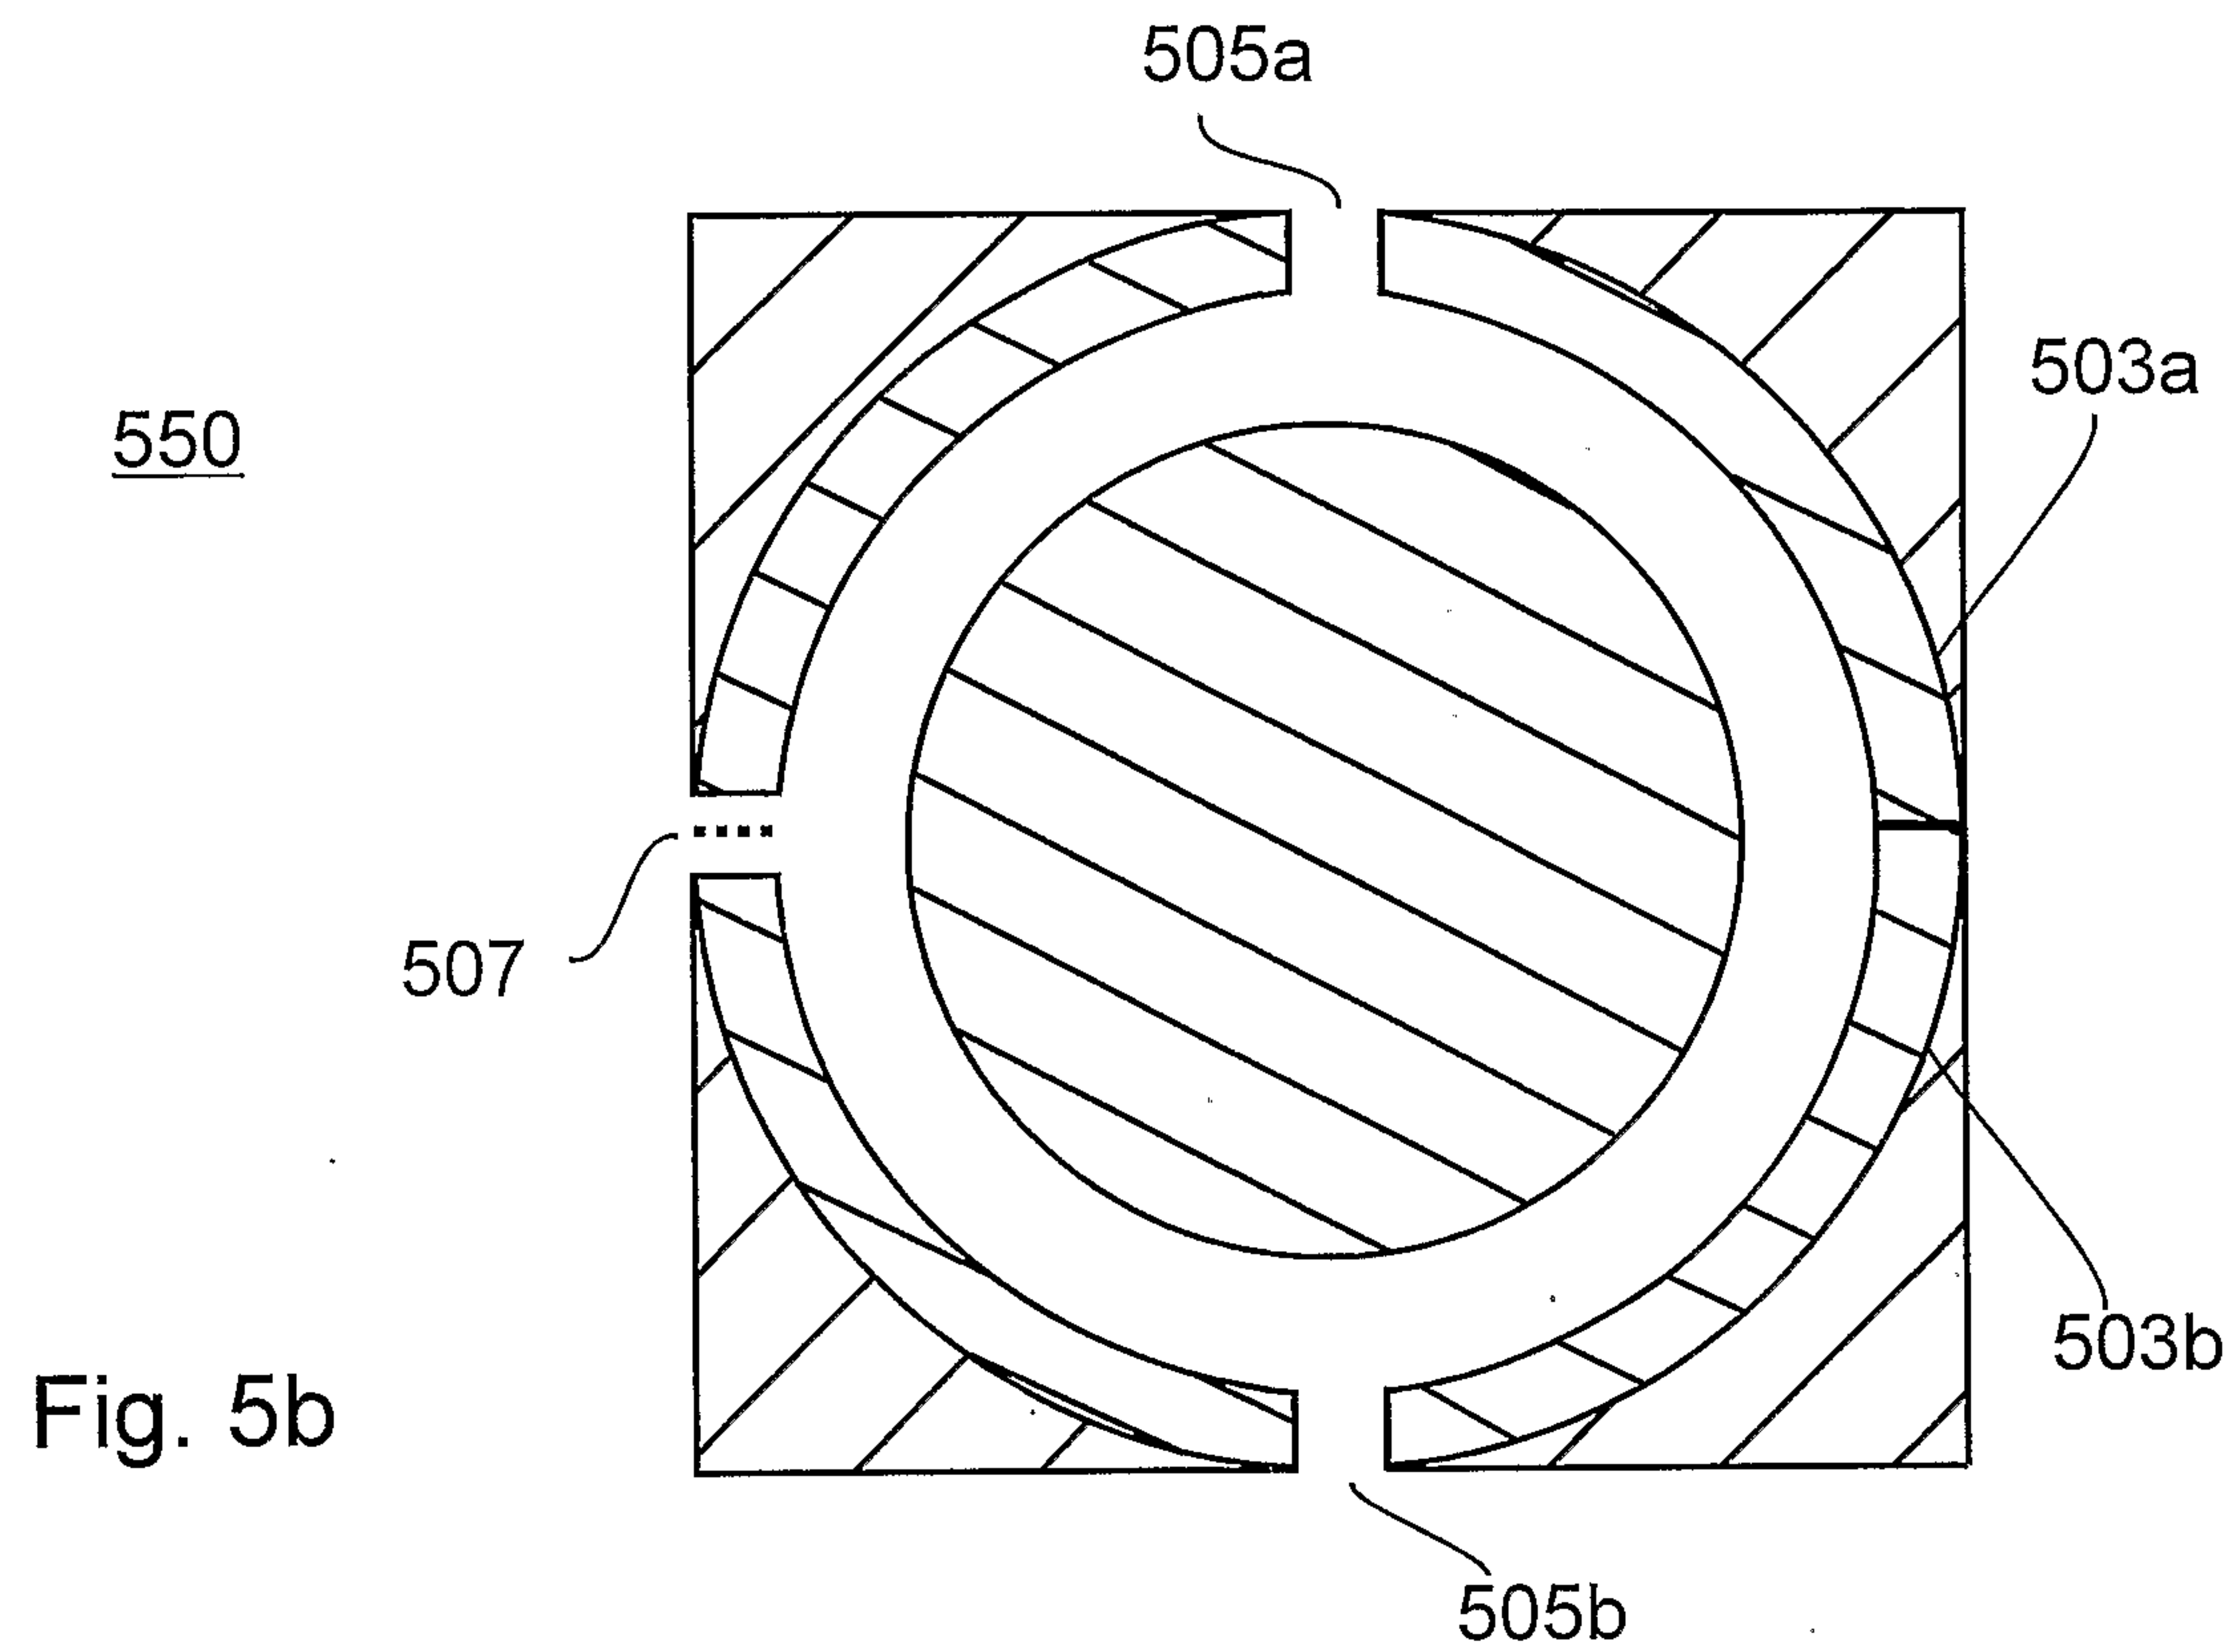

8/20

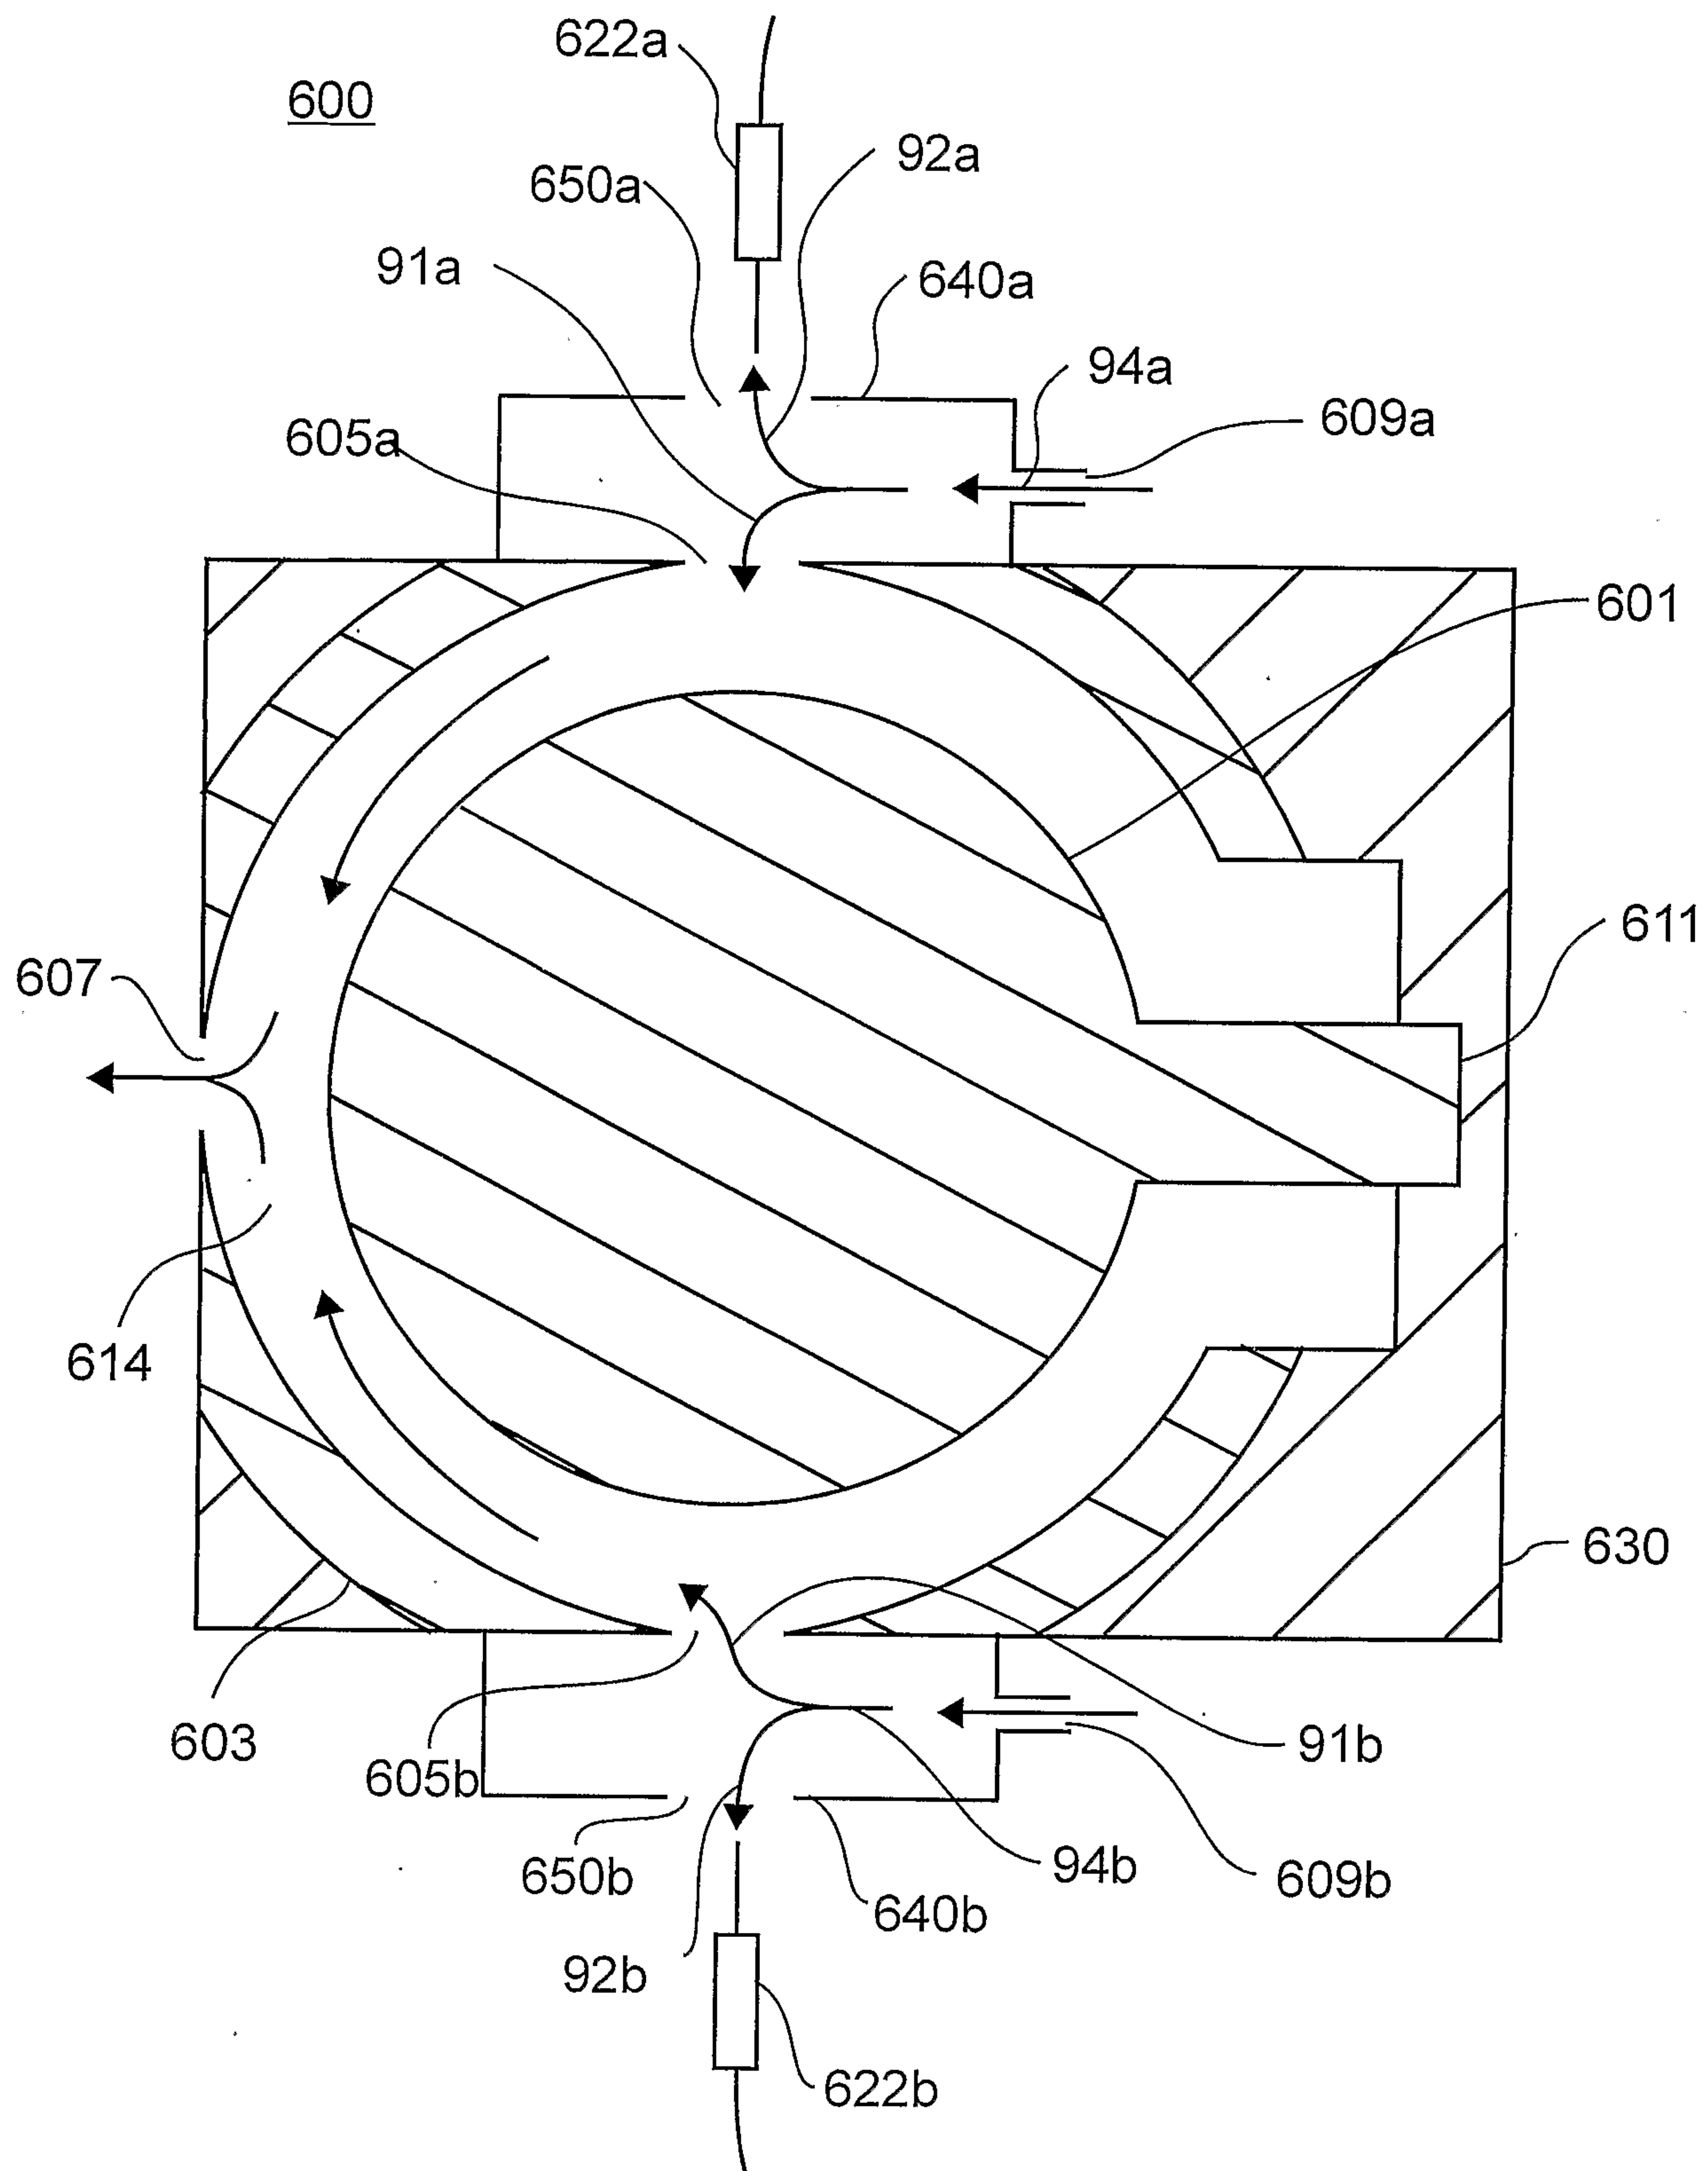


Figure 6a

9/20

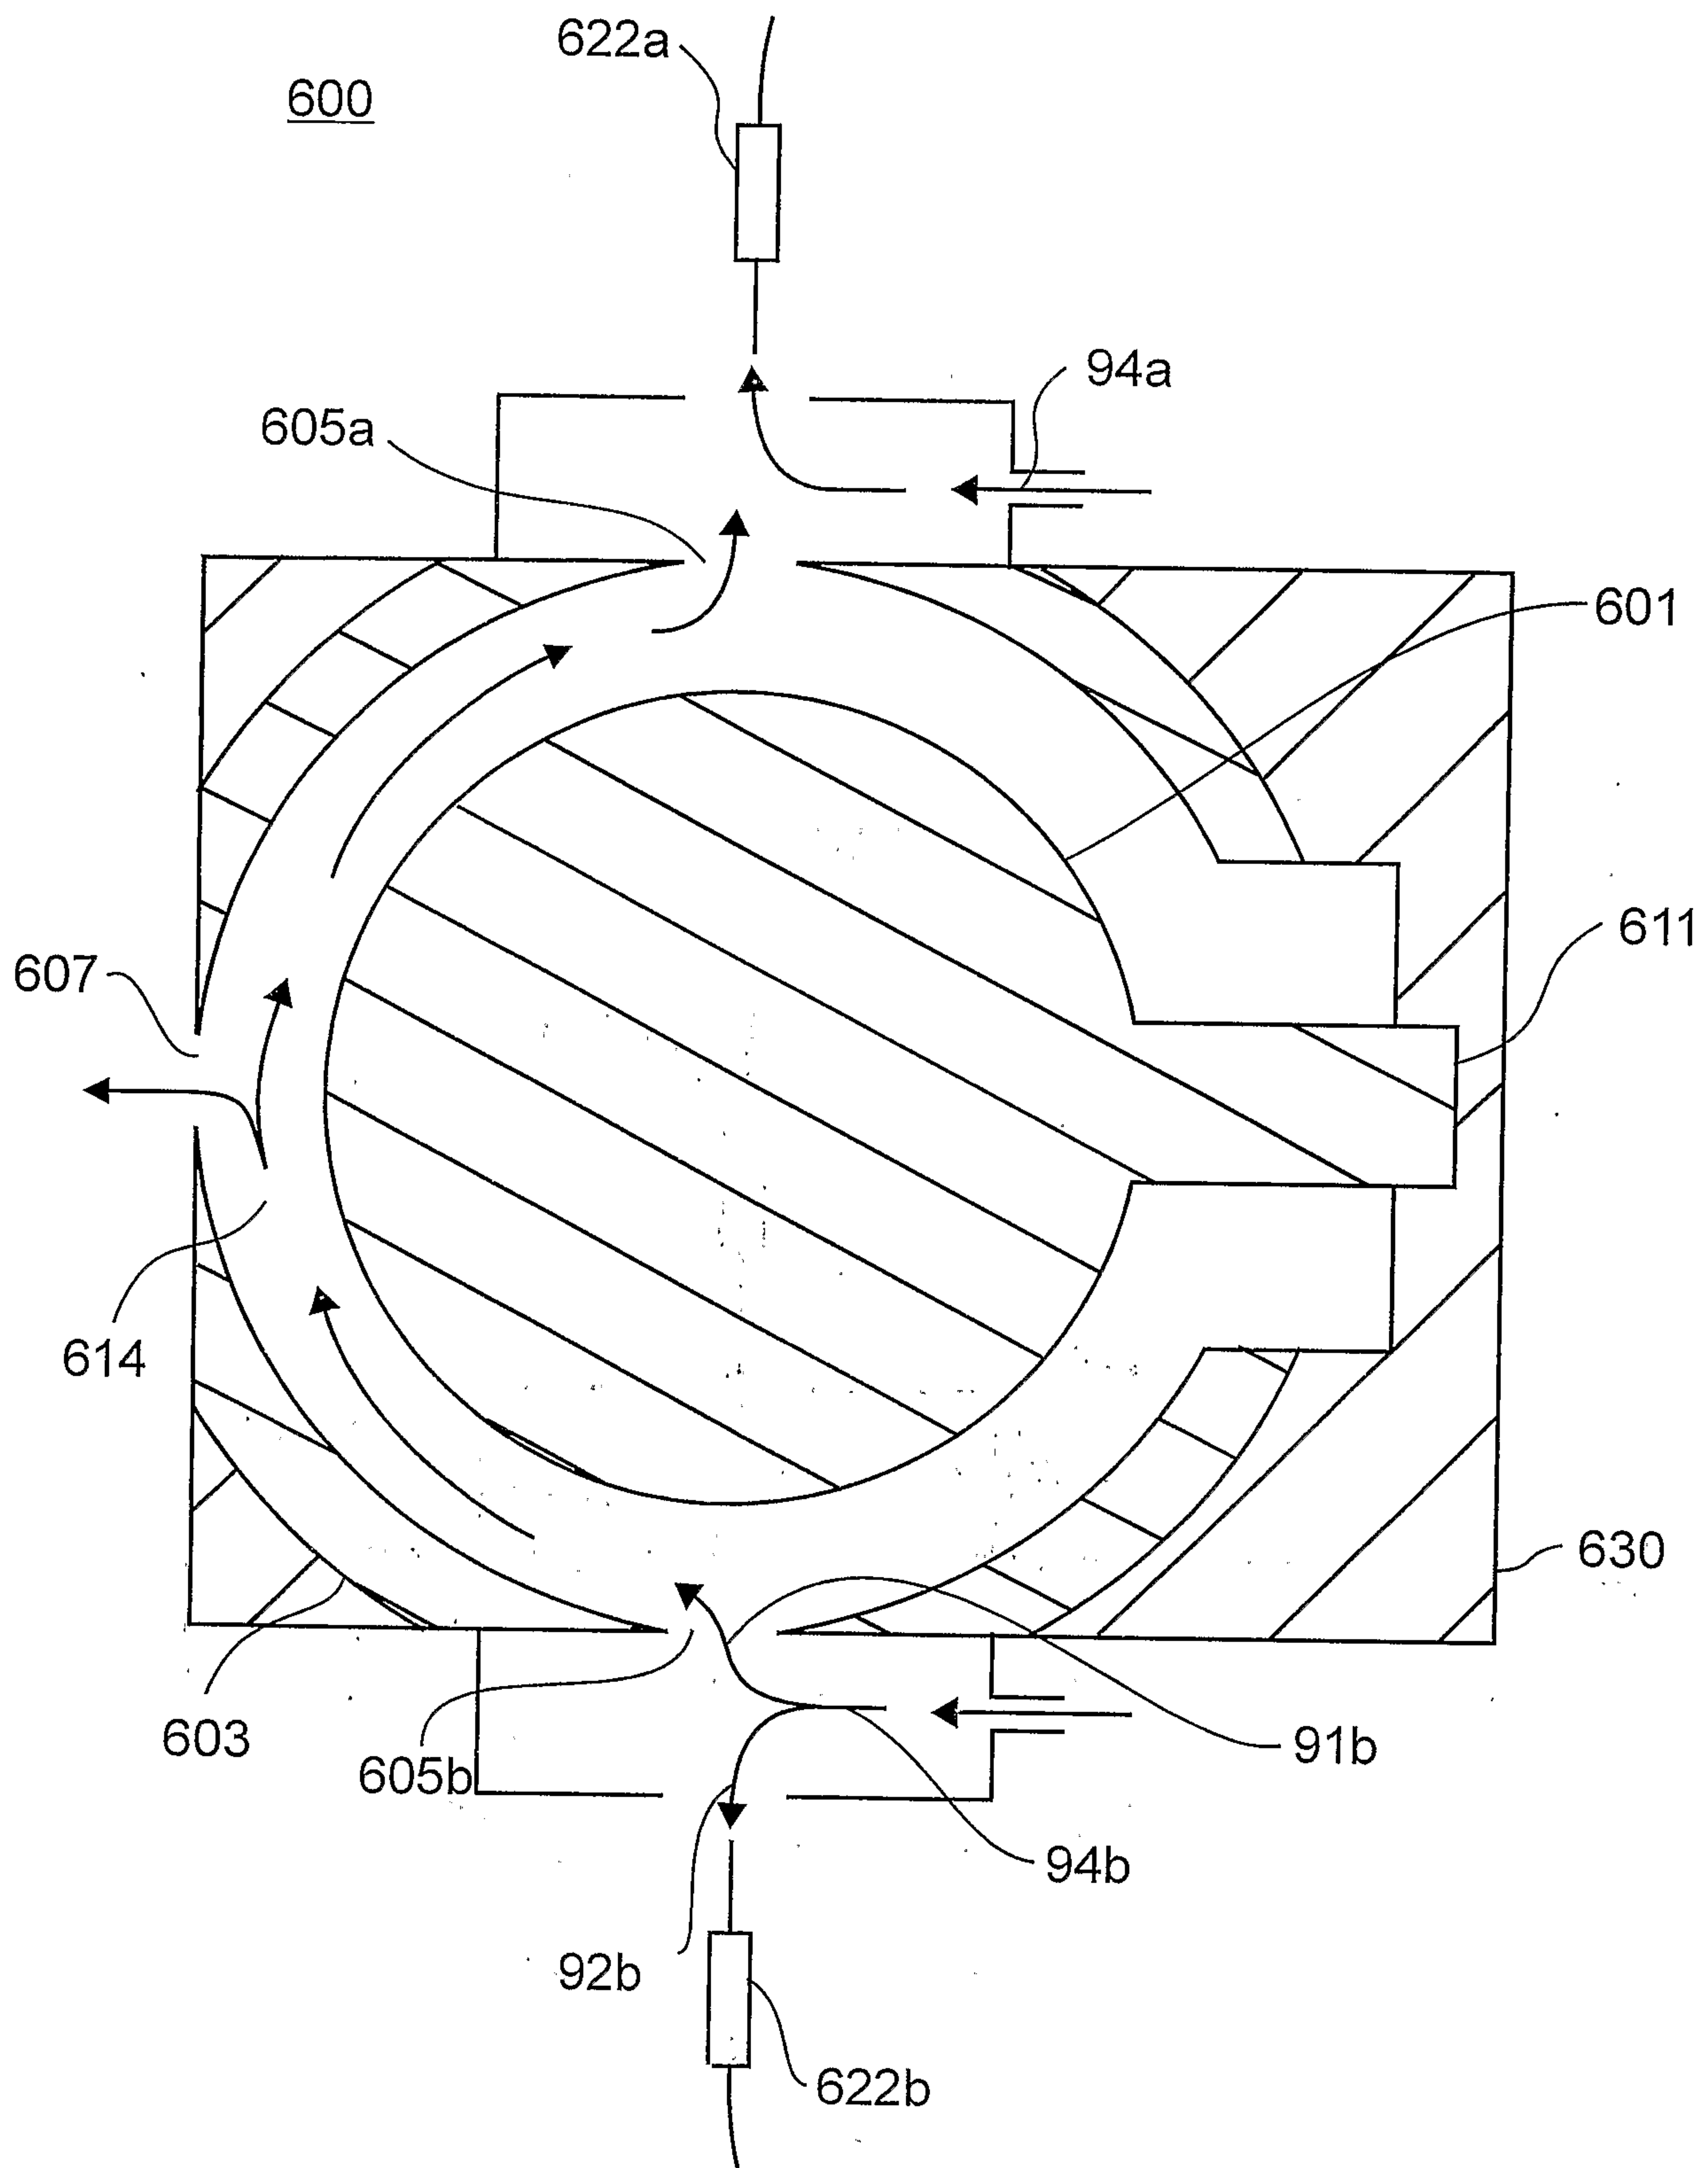


Figure 6b

10/20

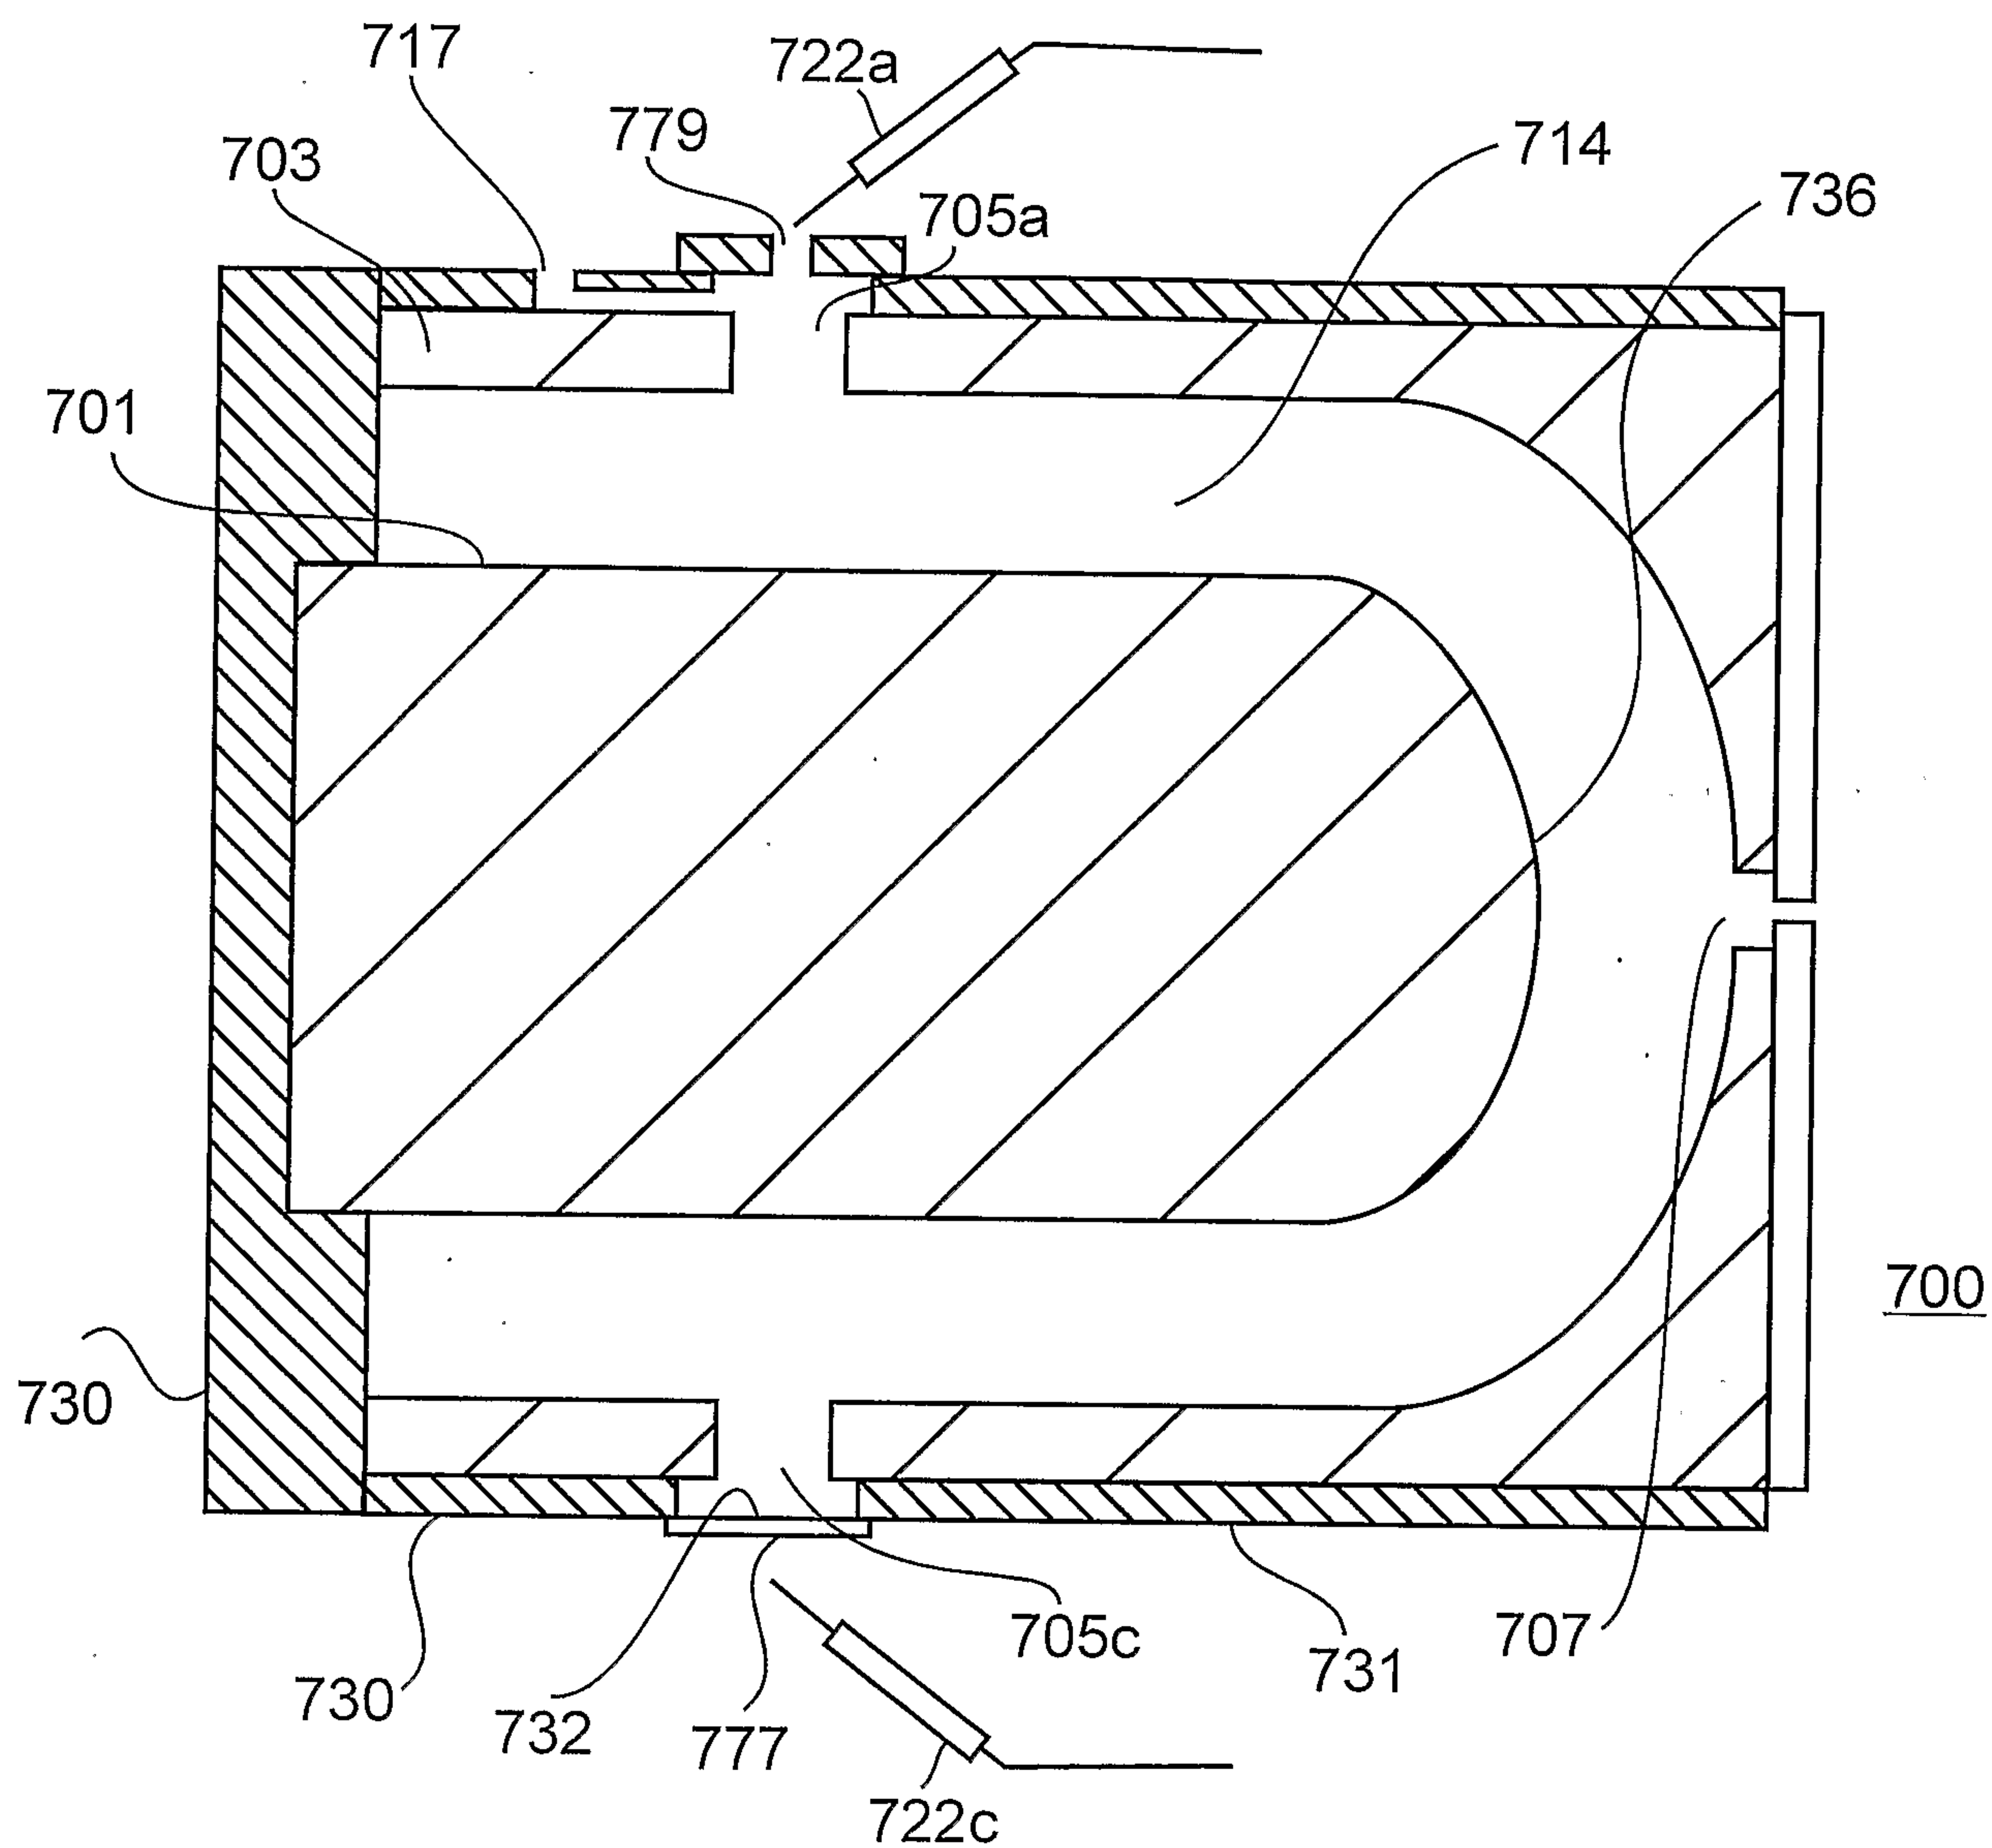


Figure 7a

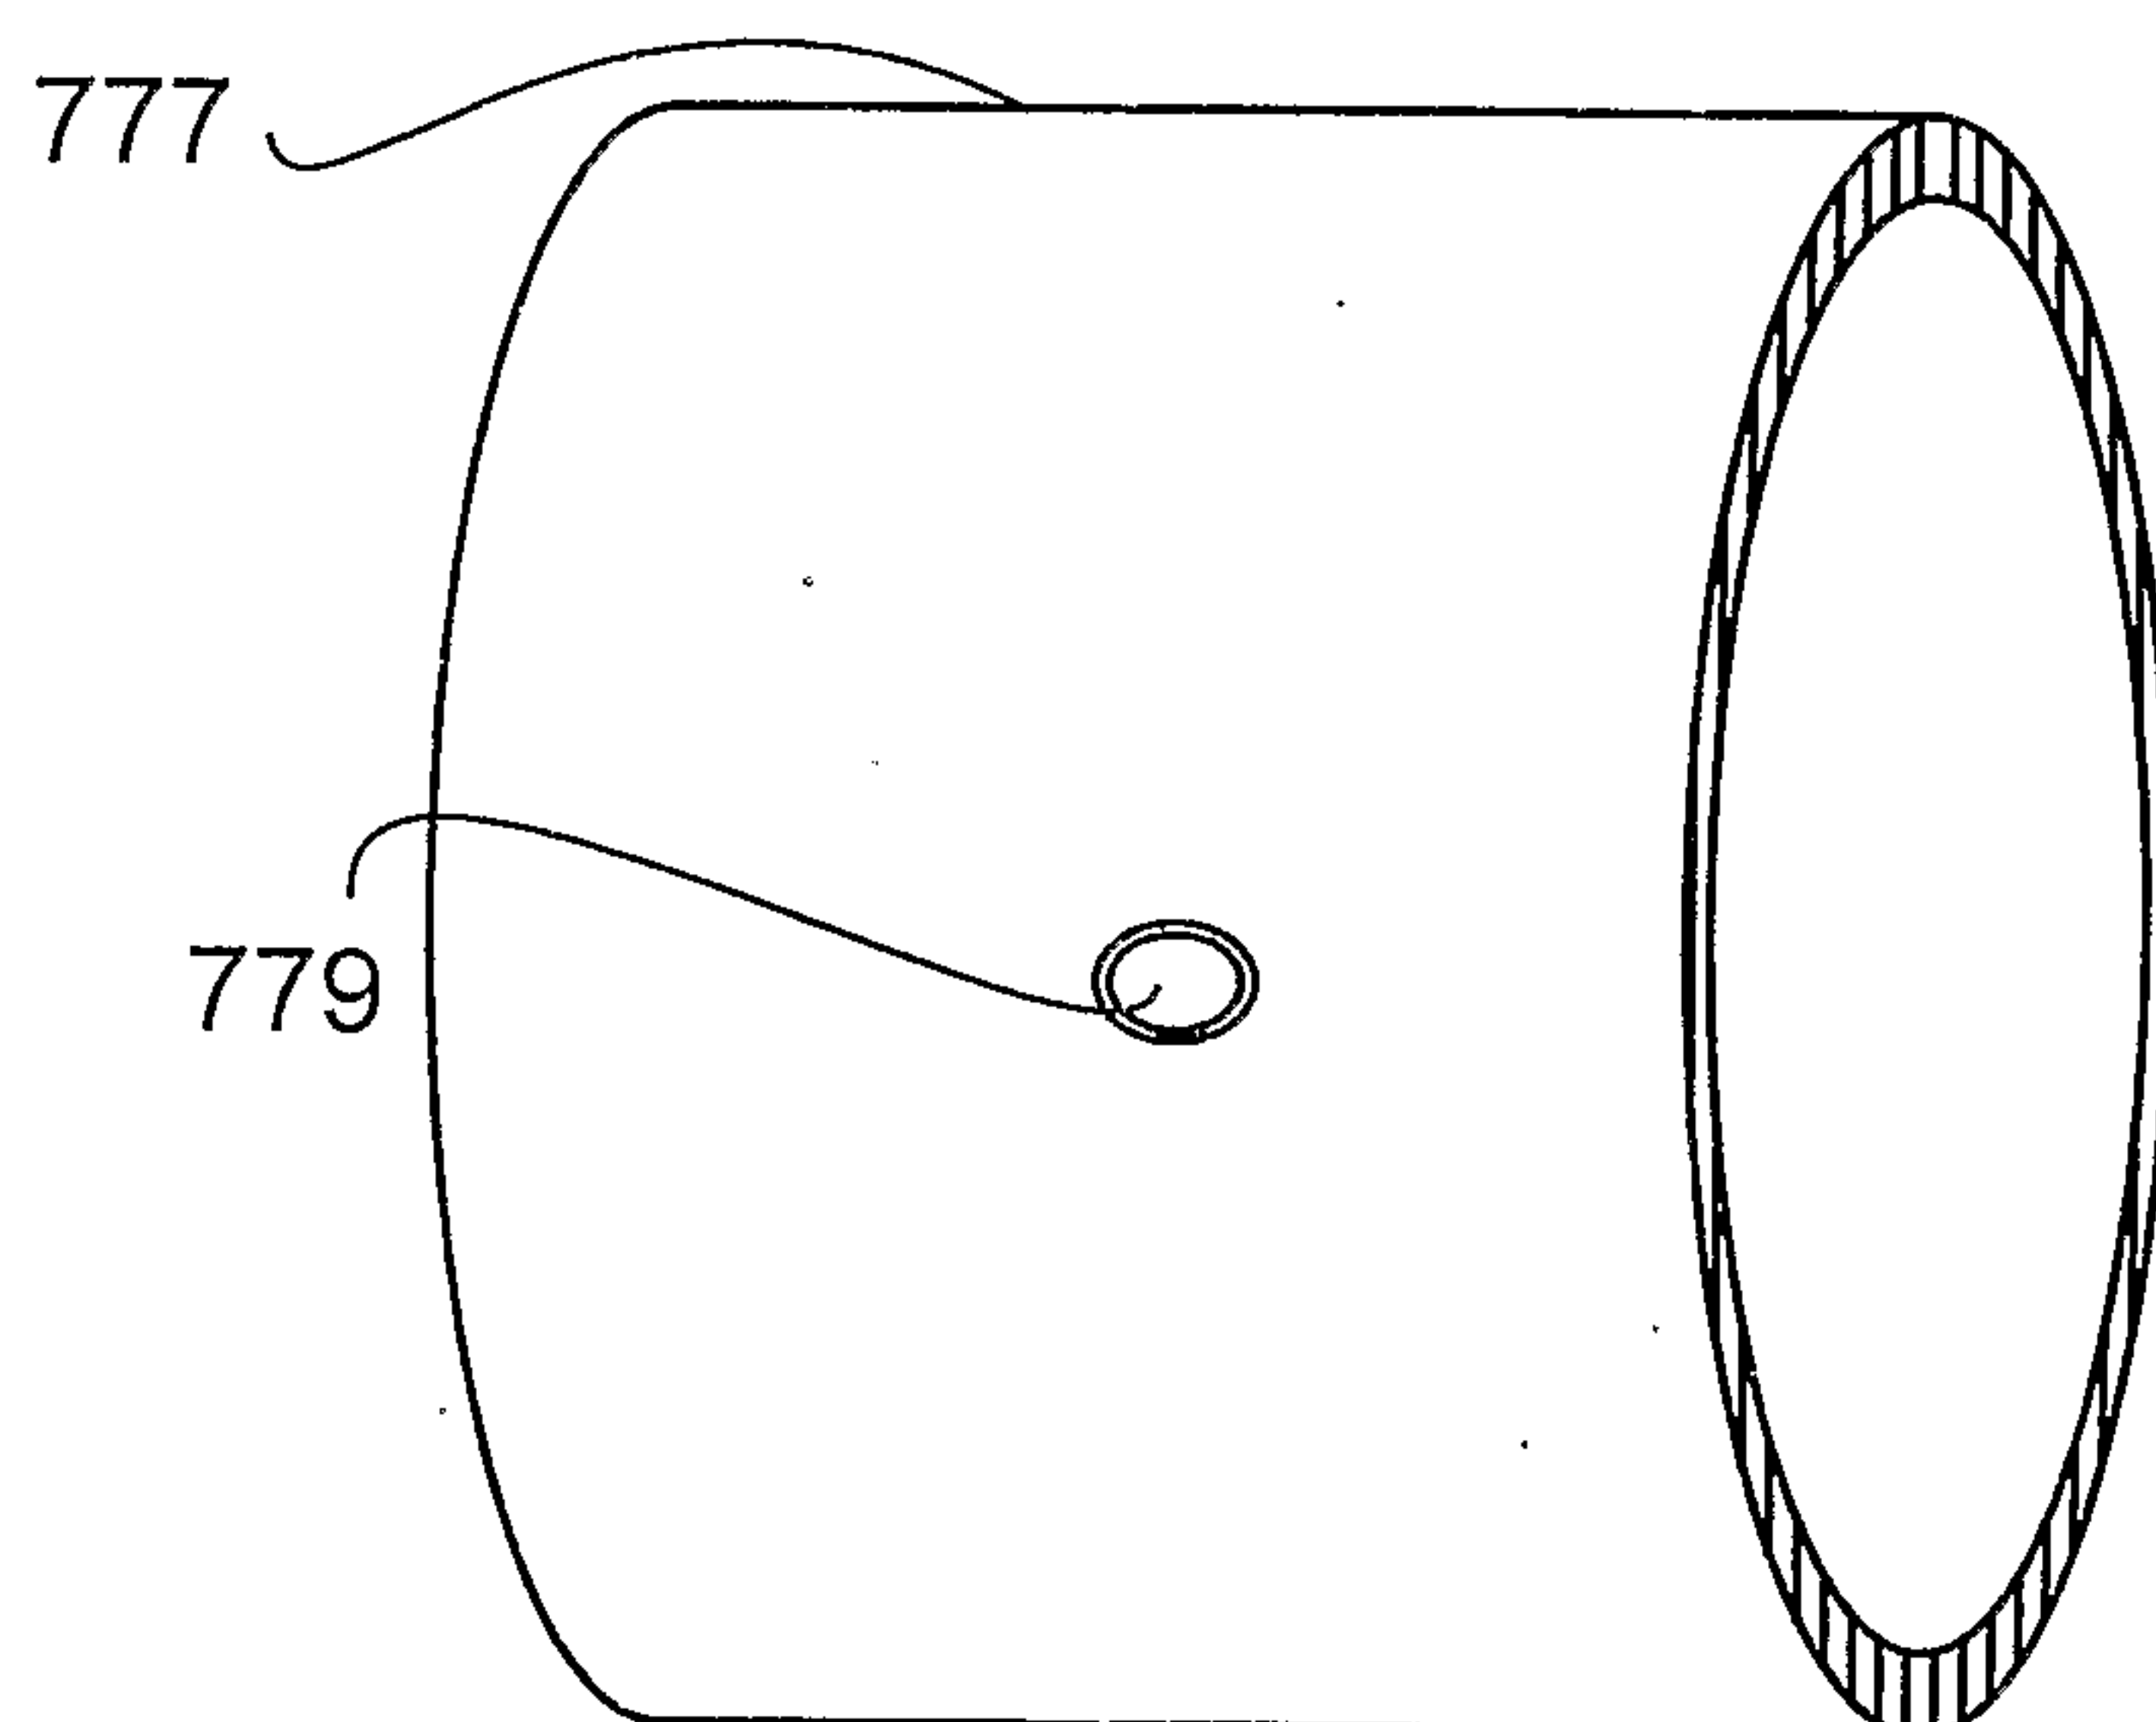


Figure 7b

11/20

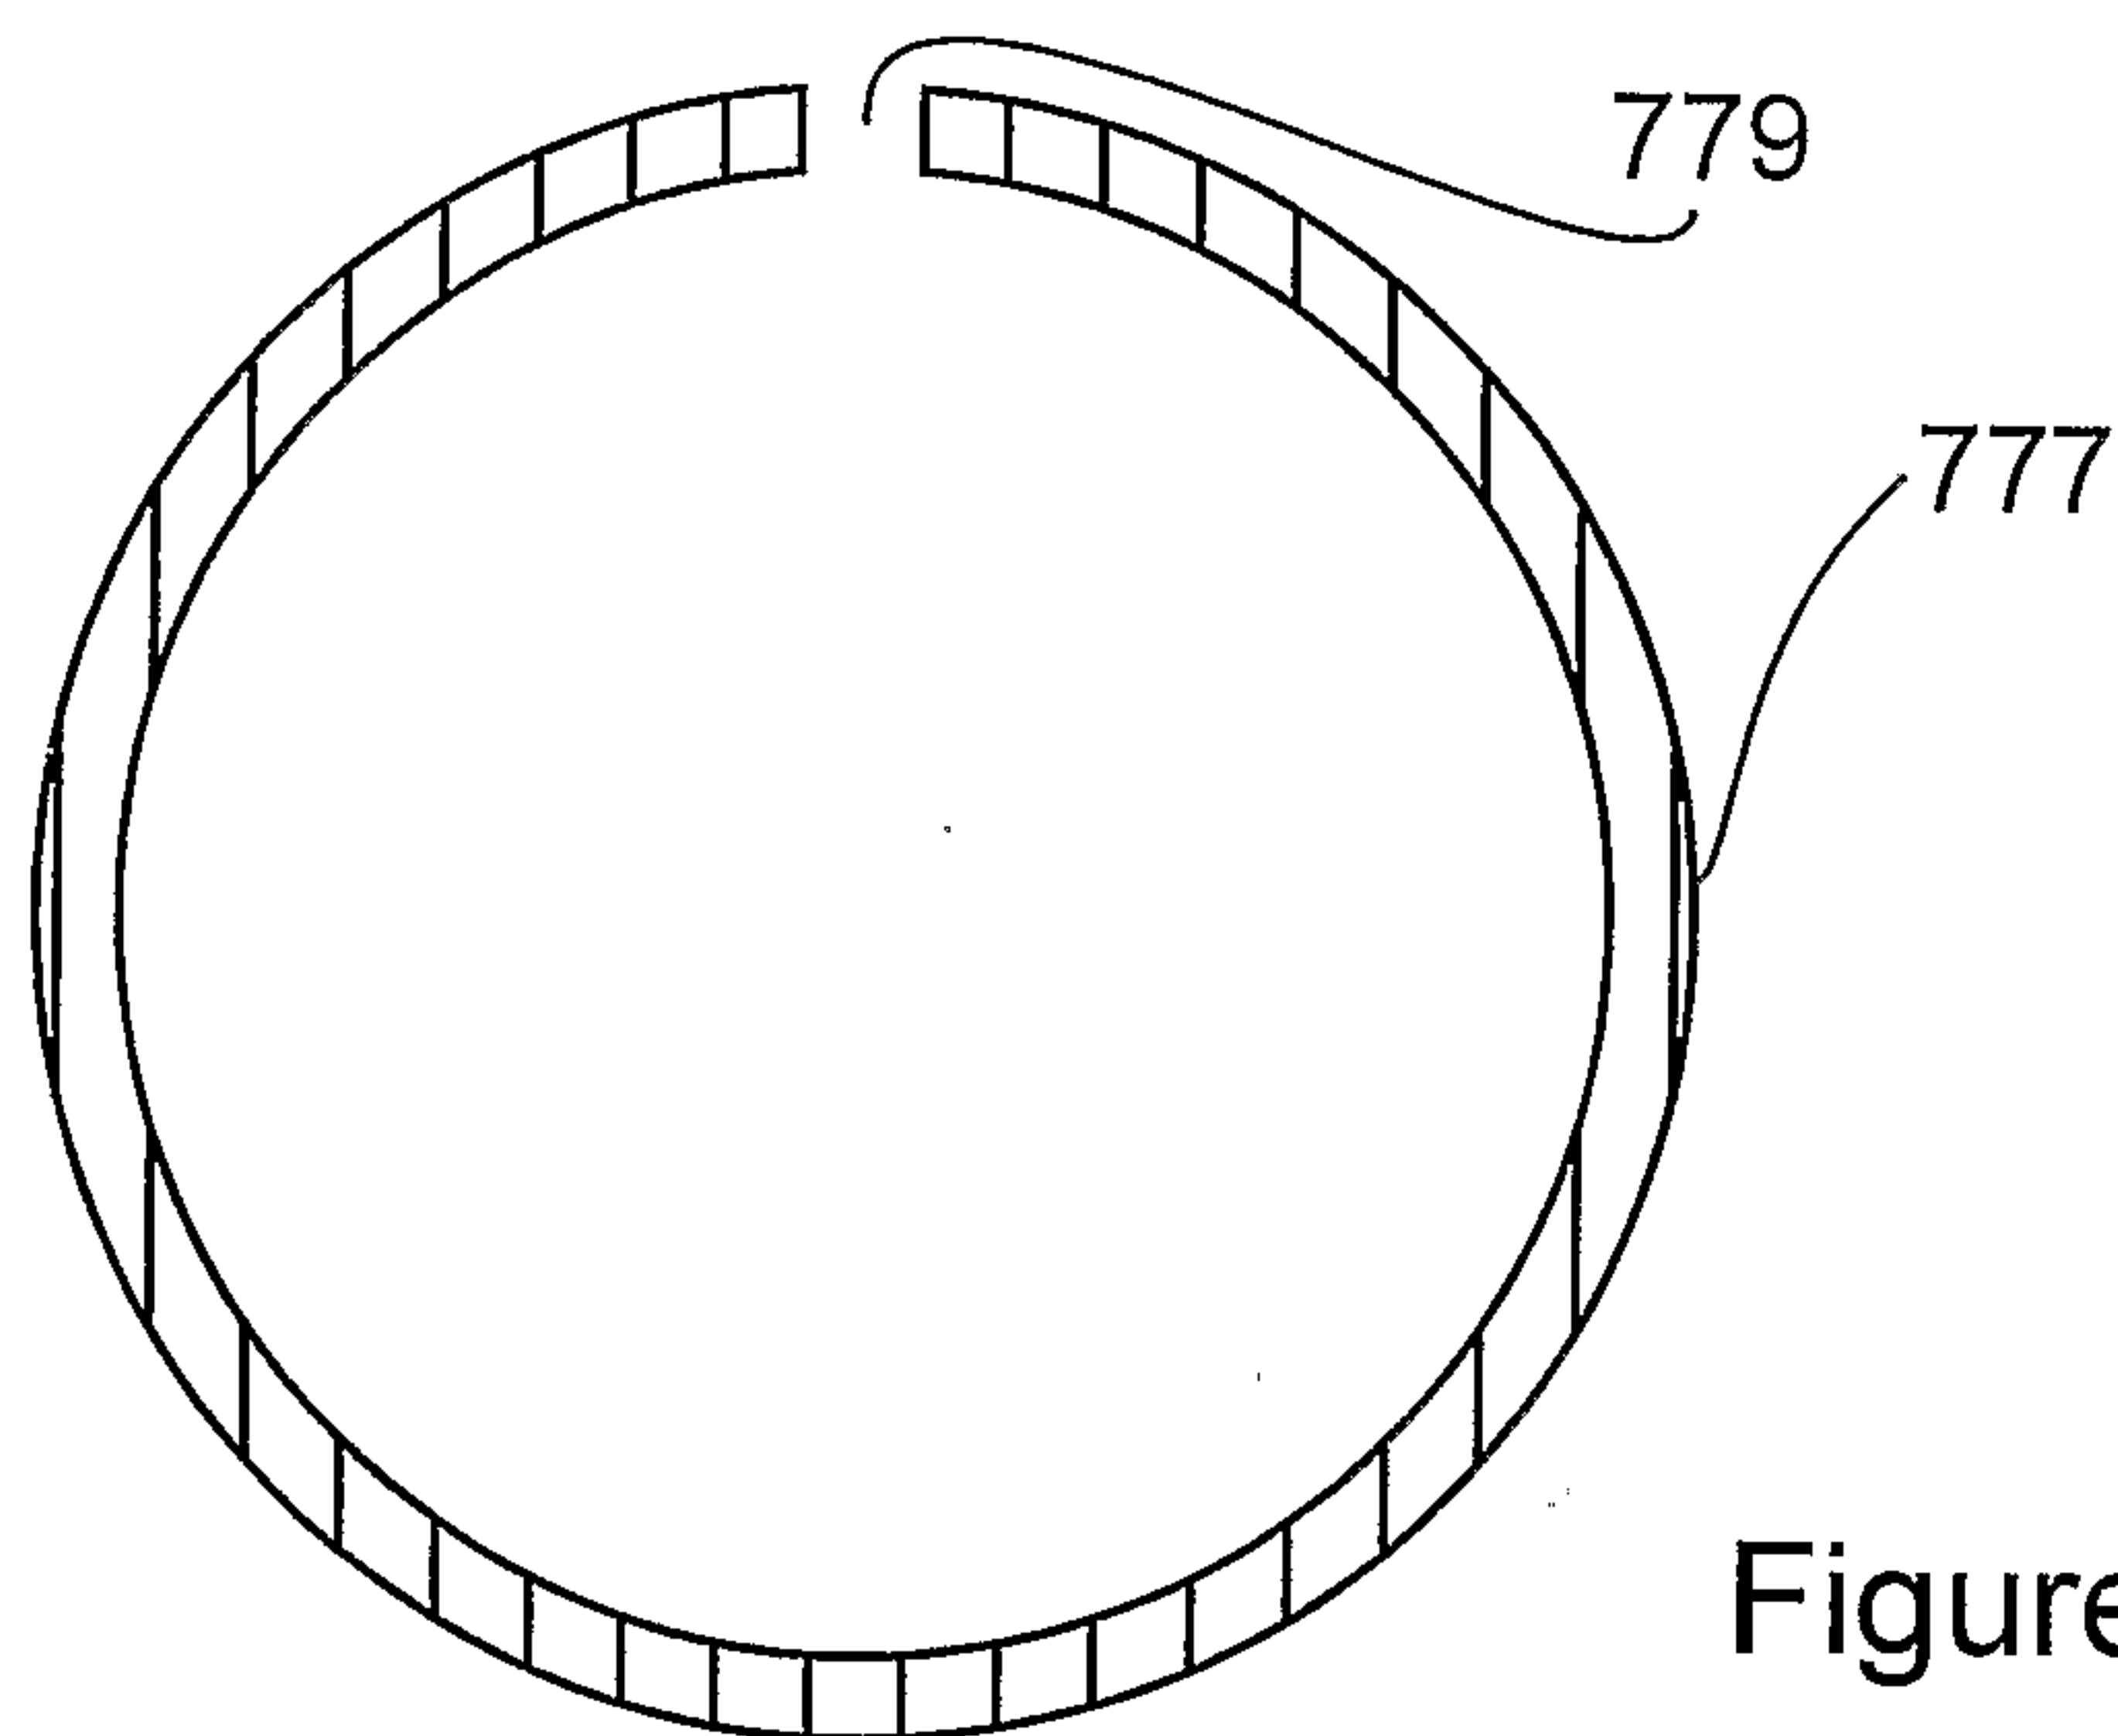


Figure 7c





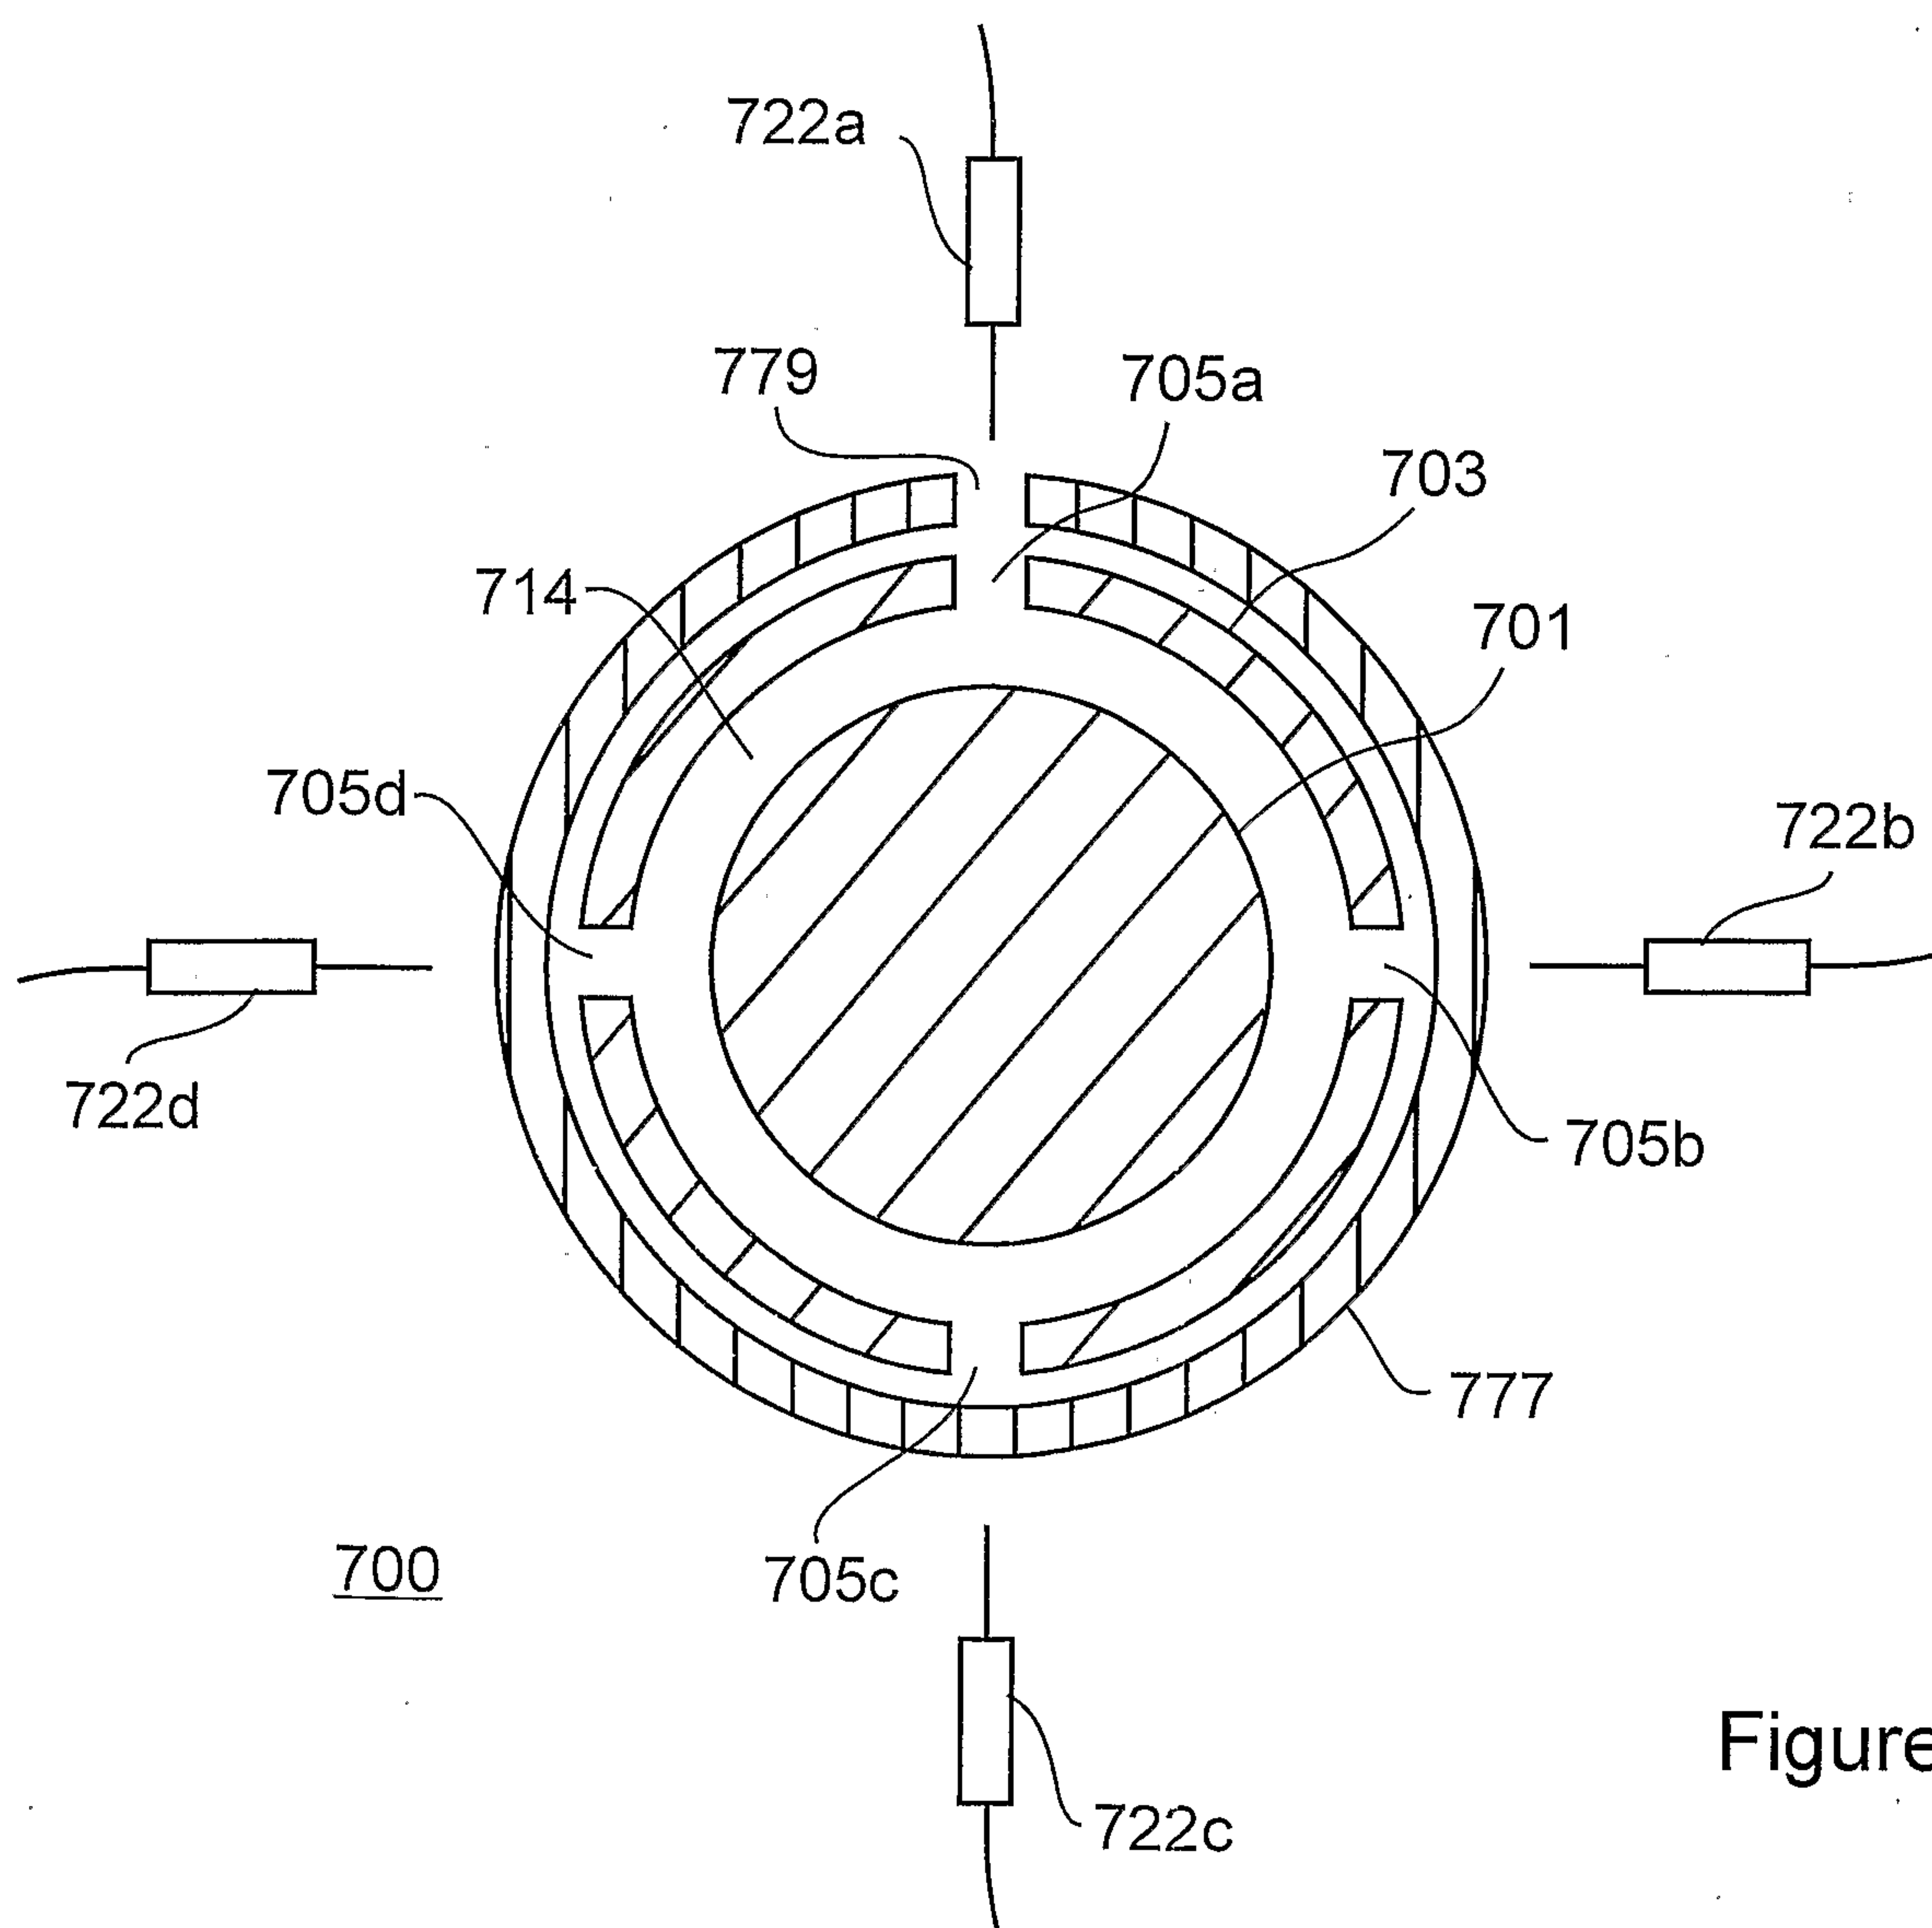


Figure 7d

12/20

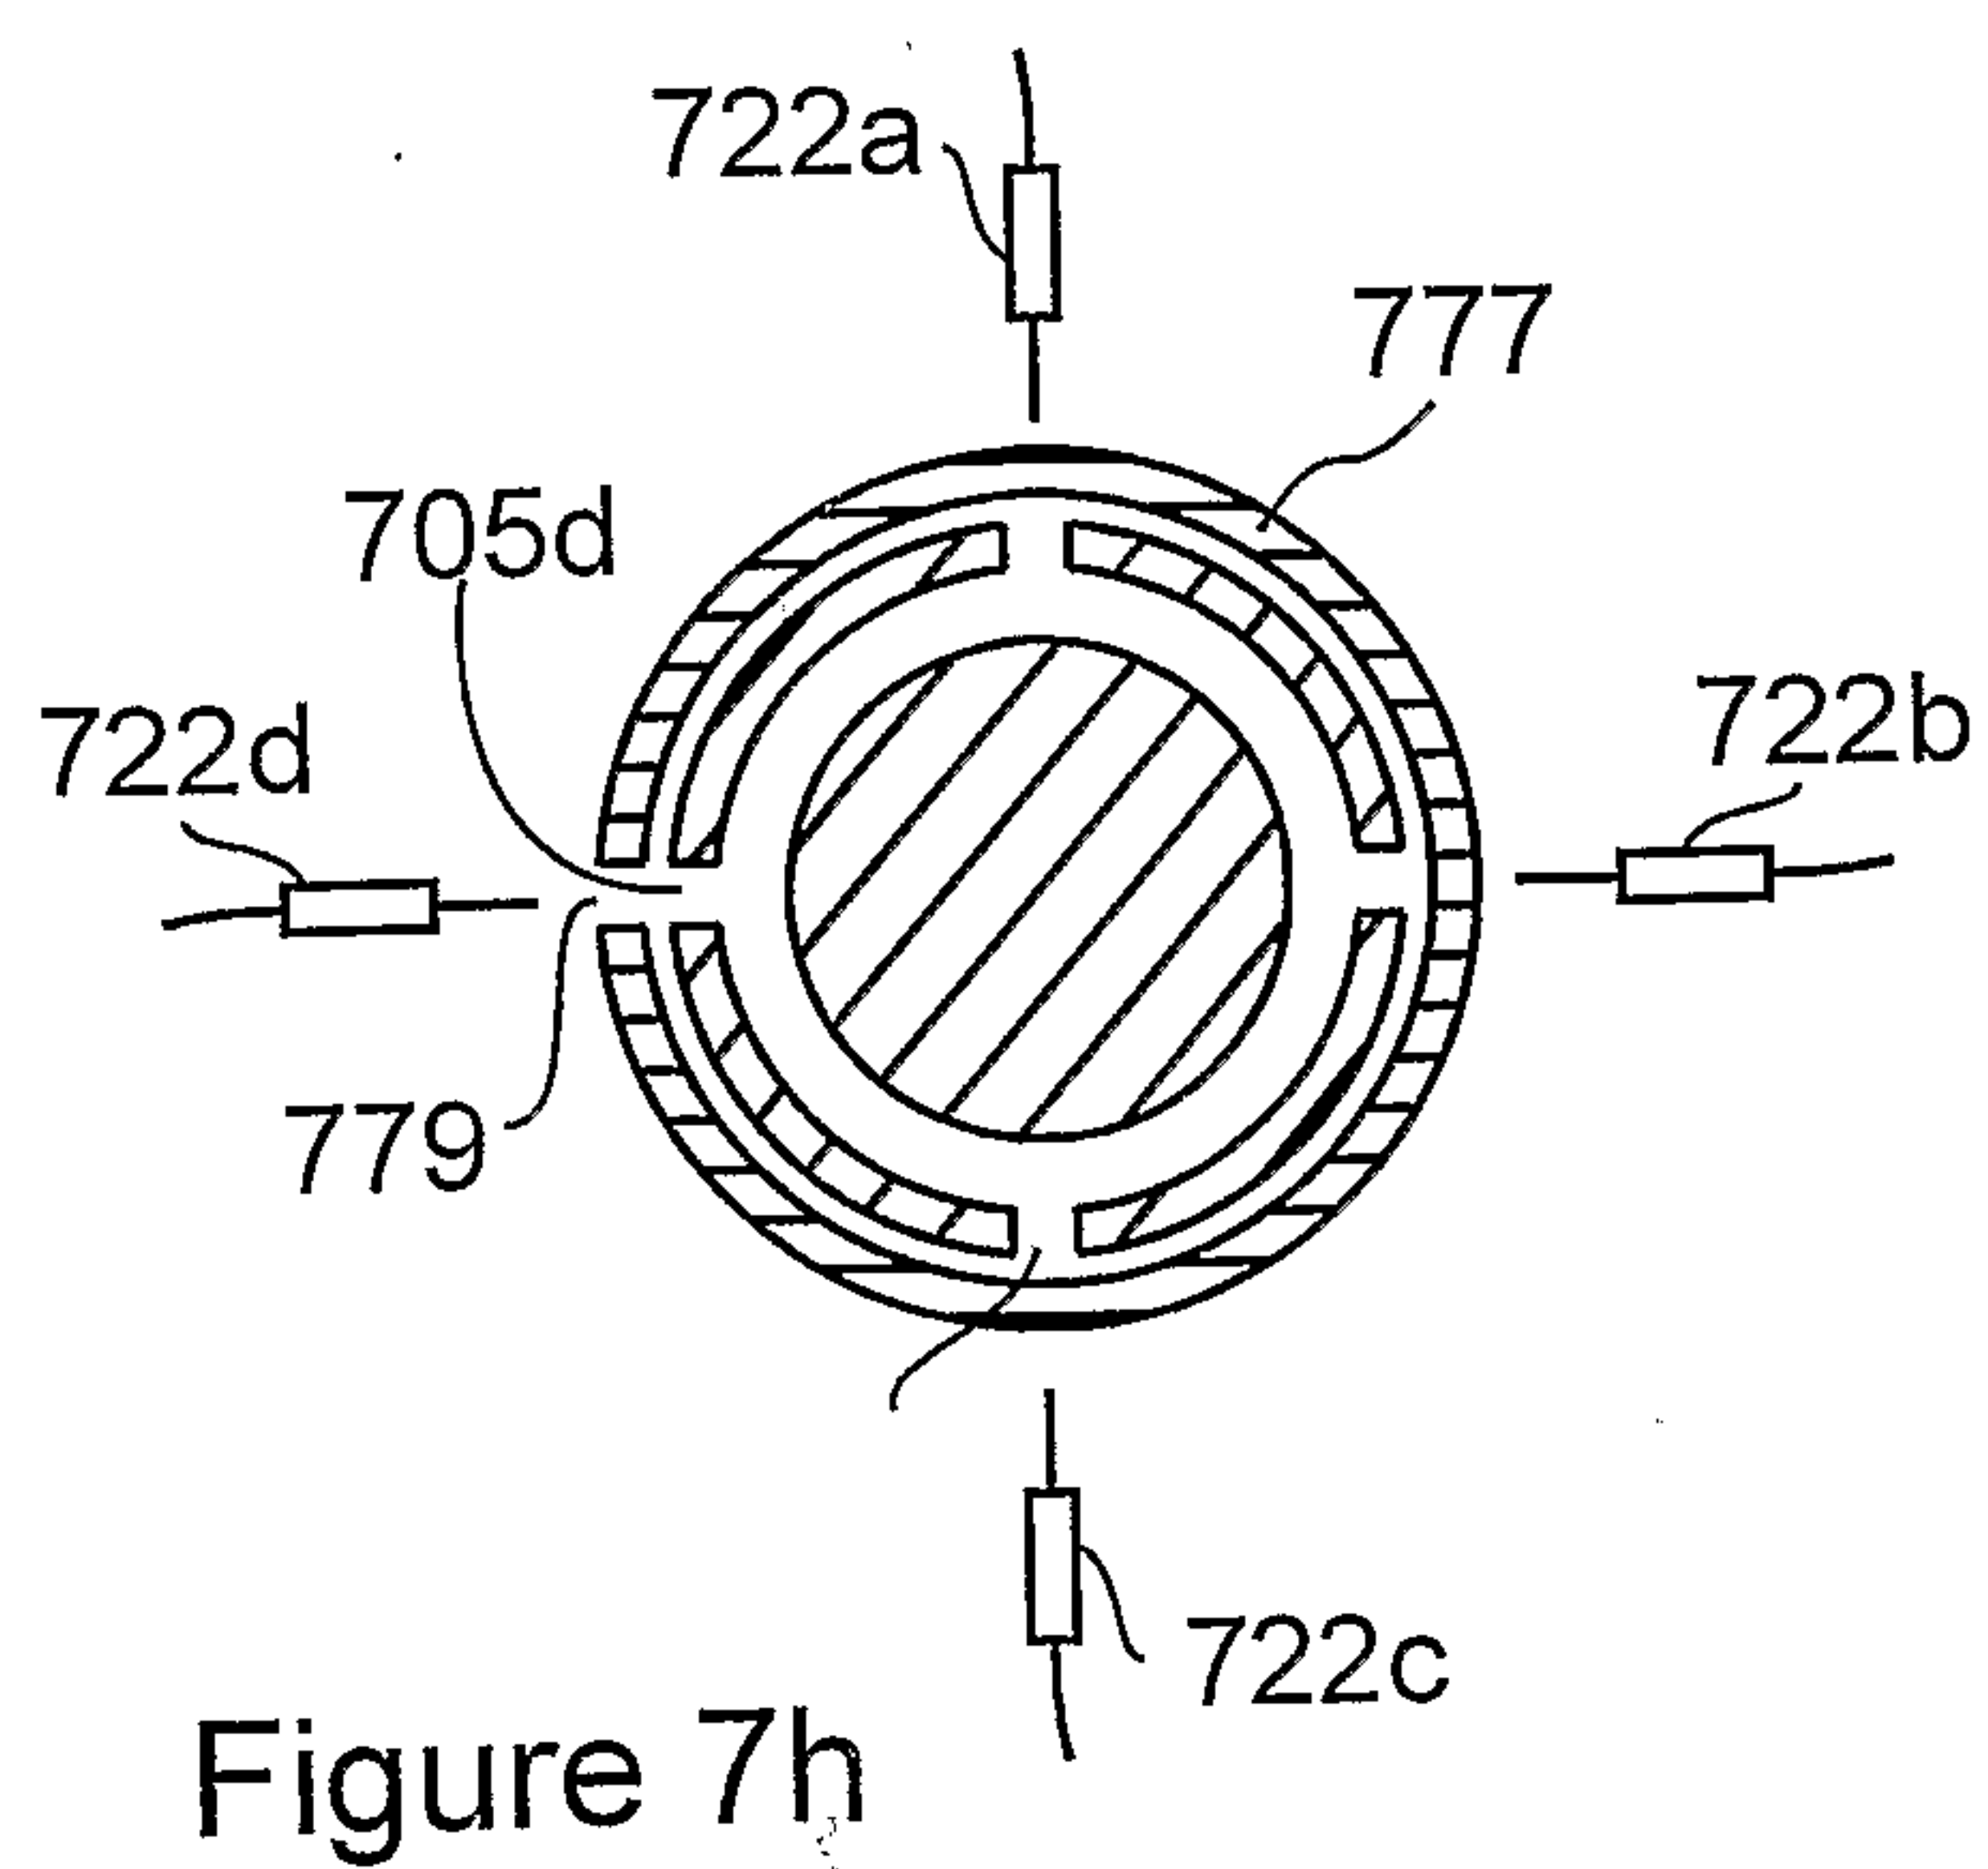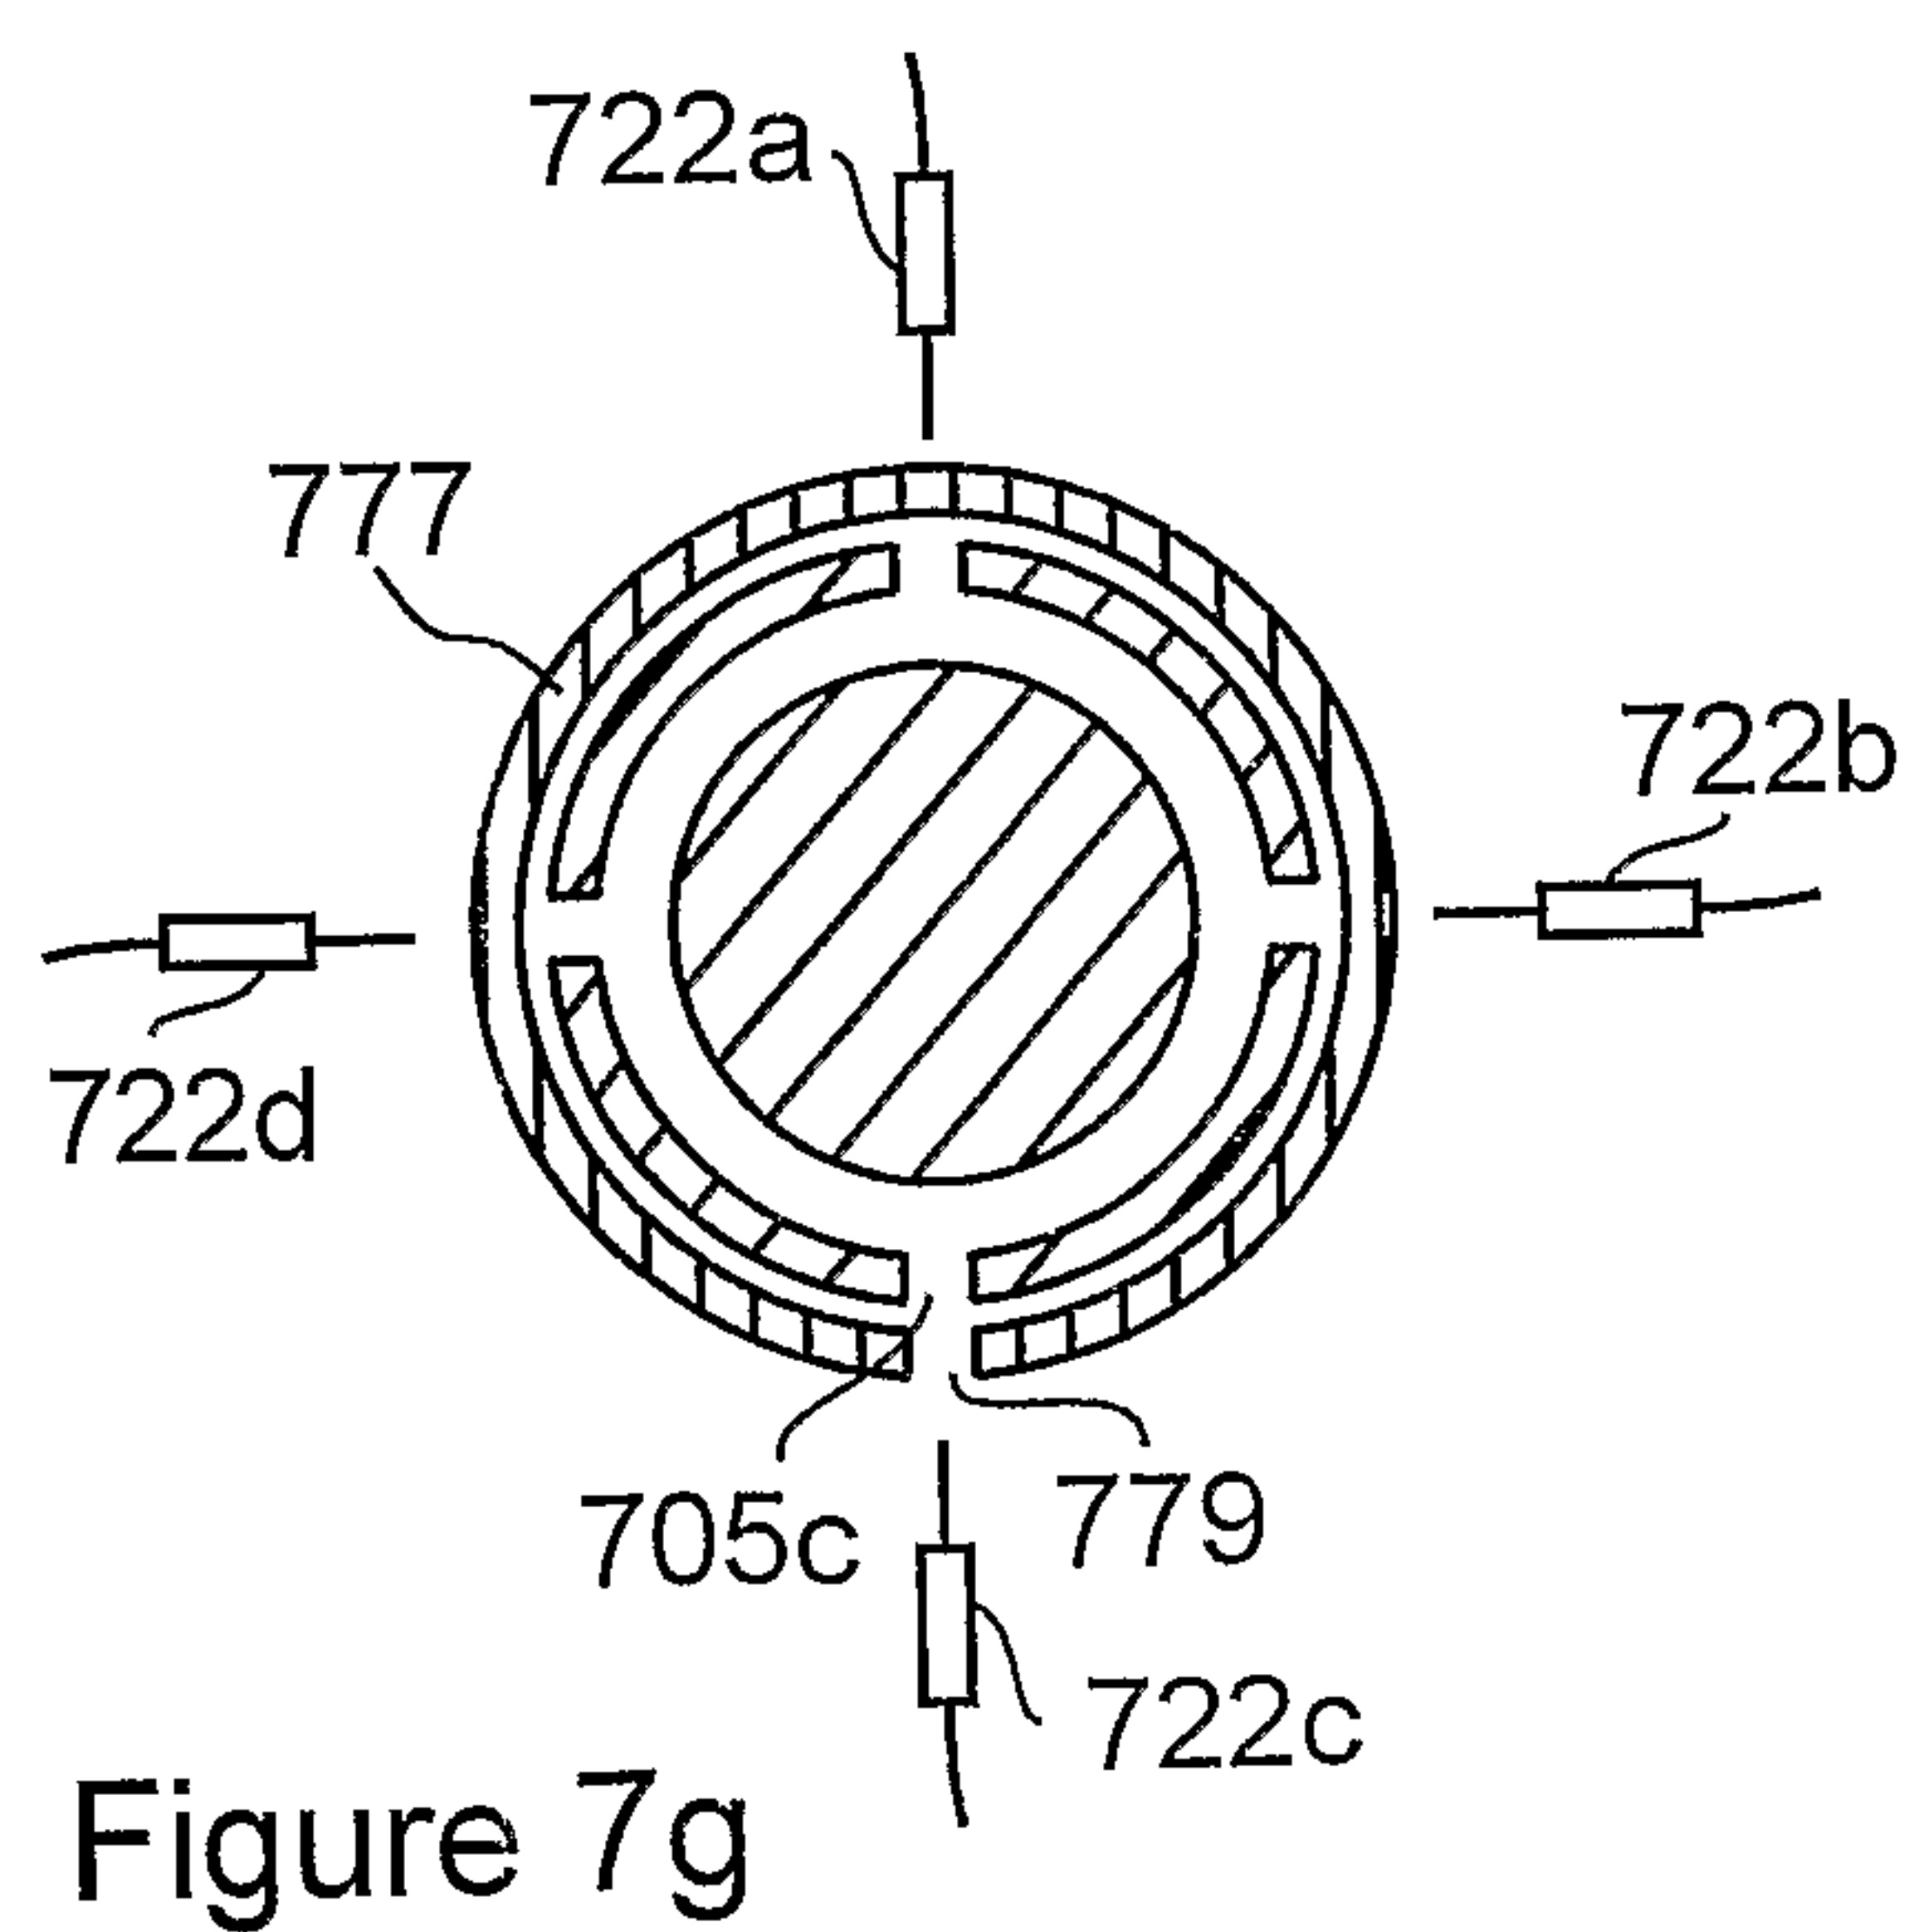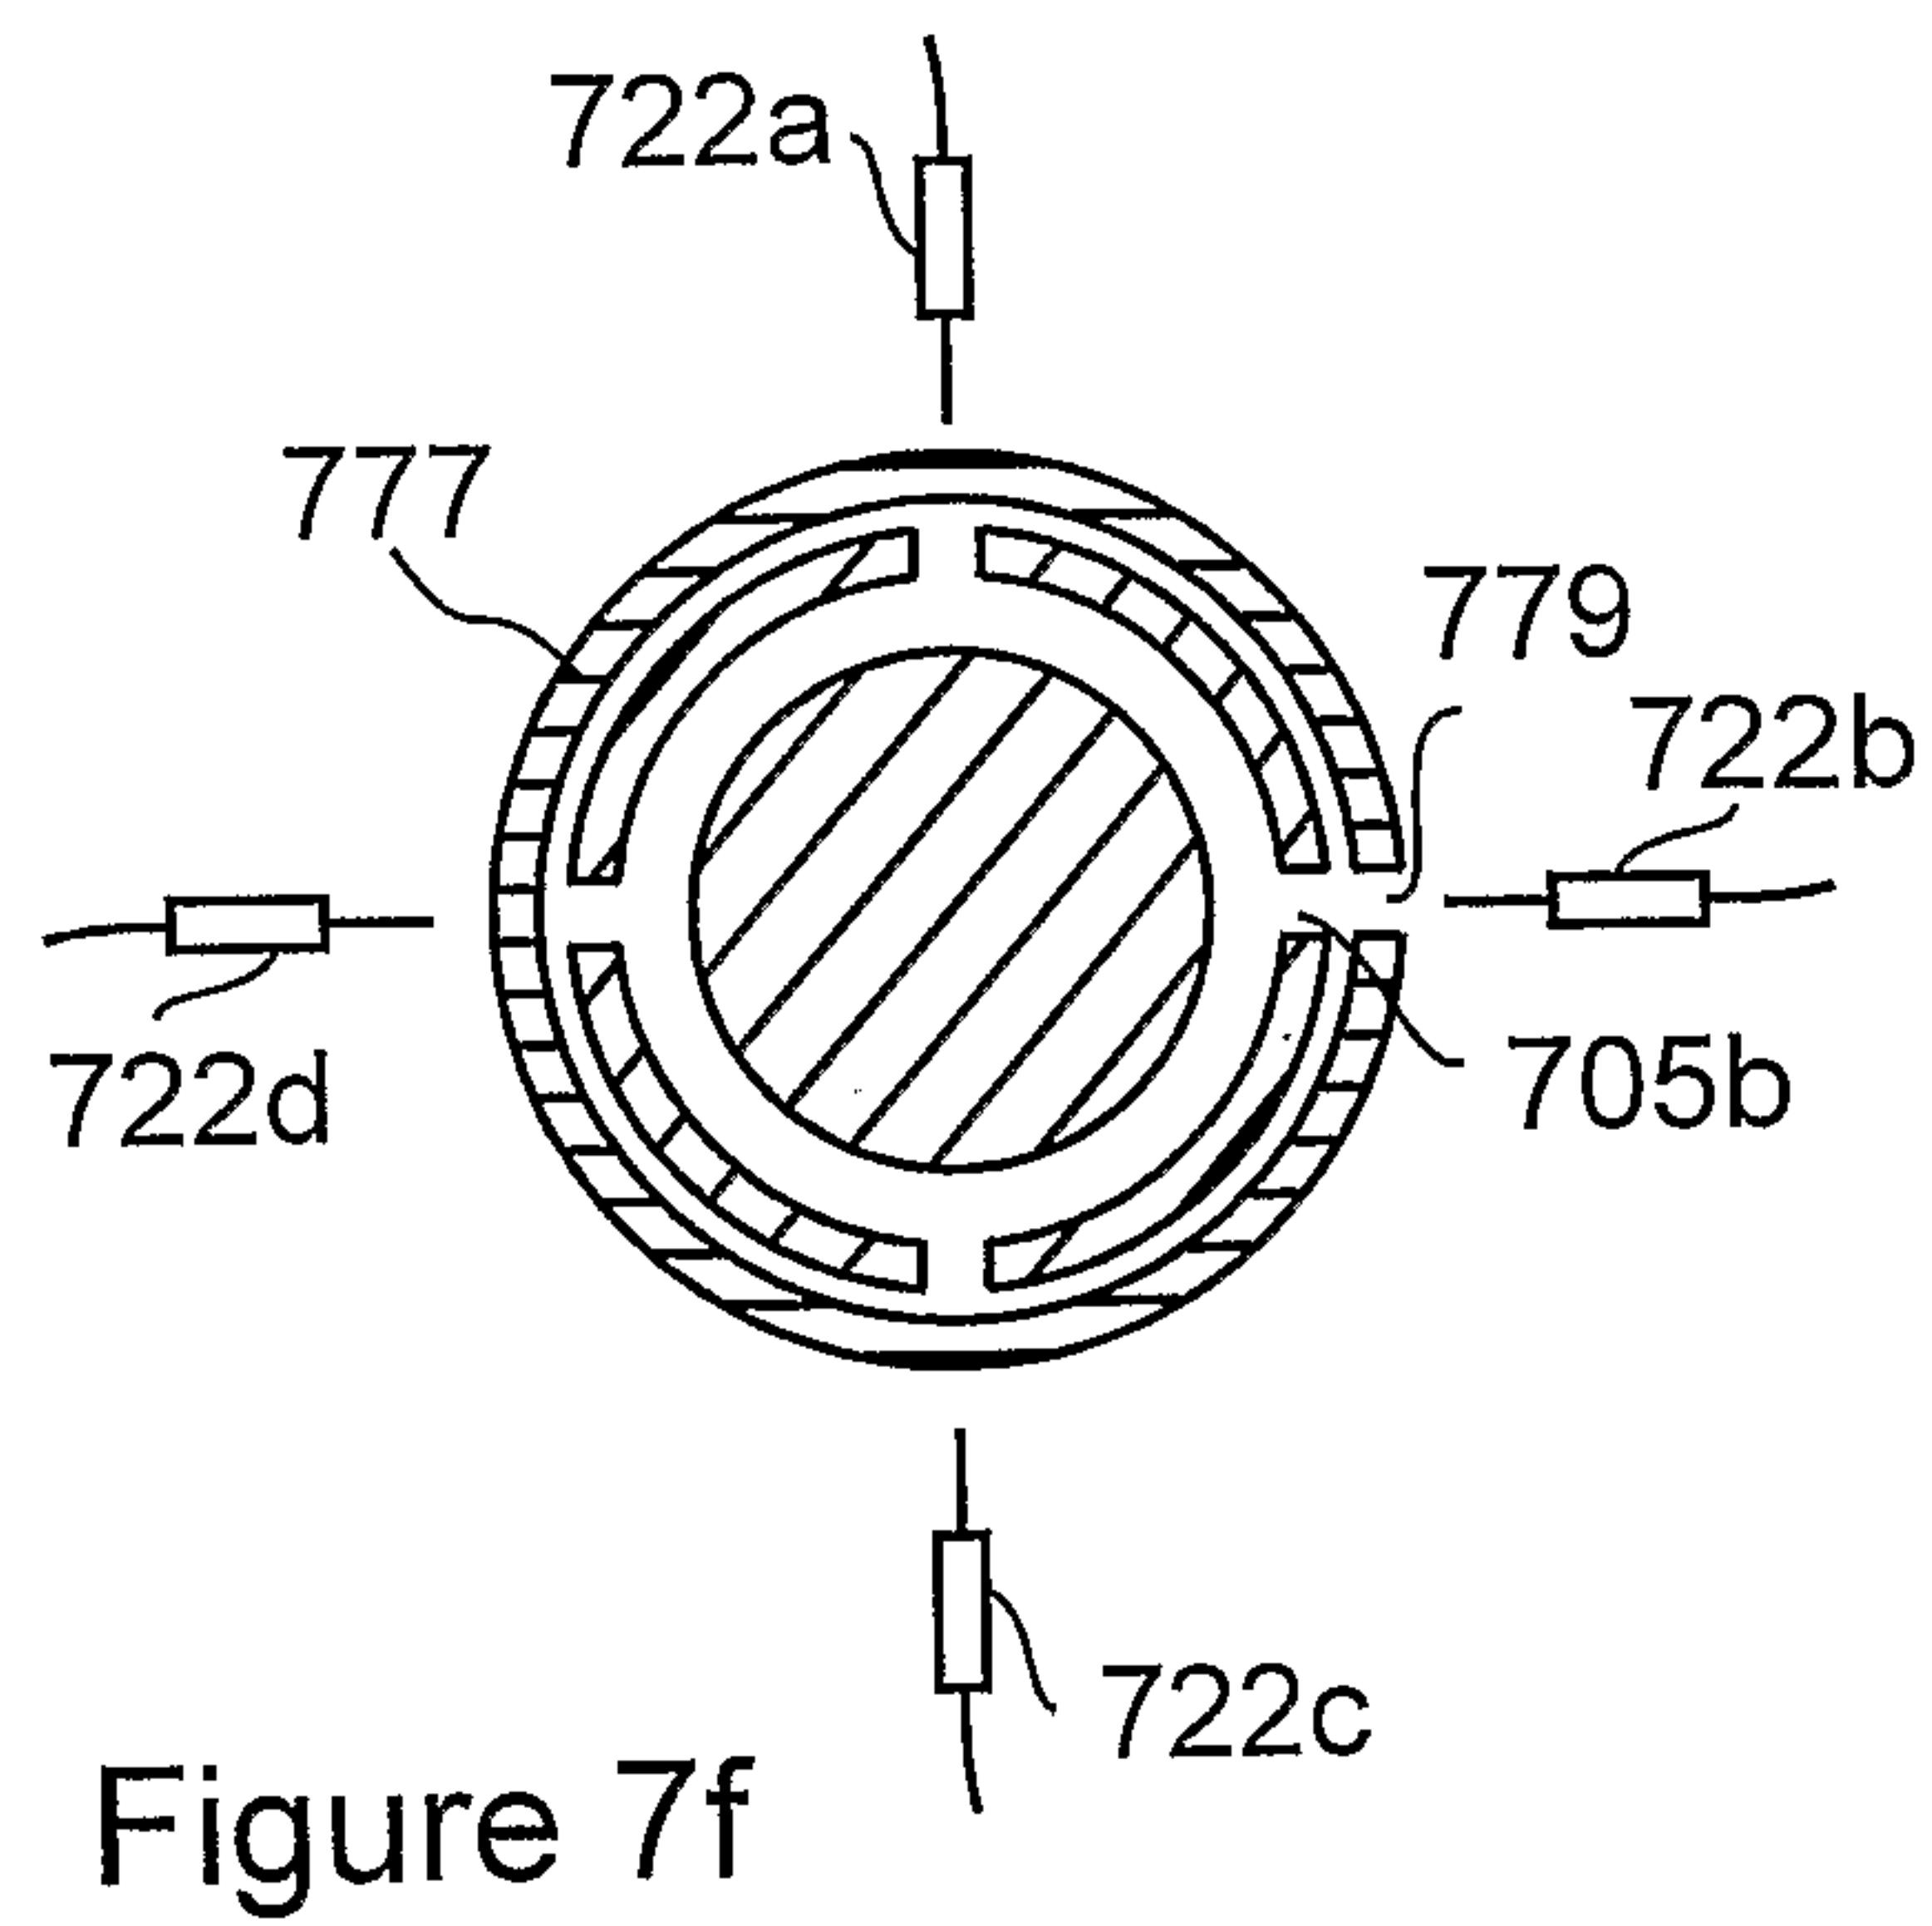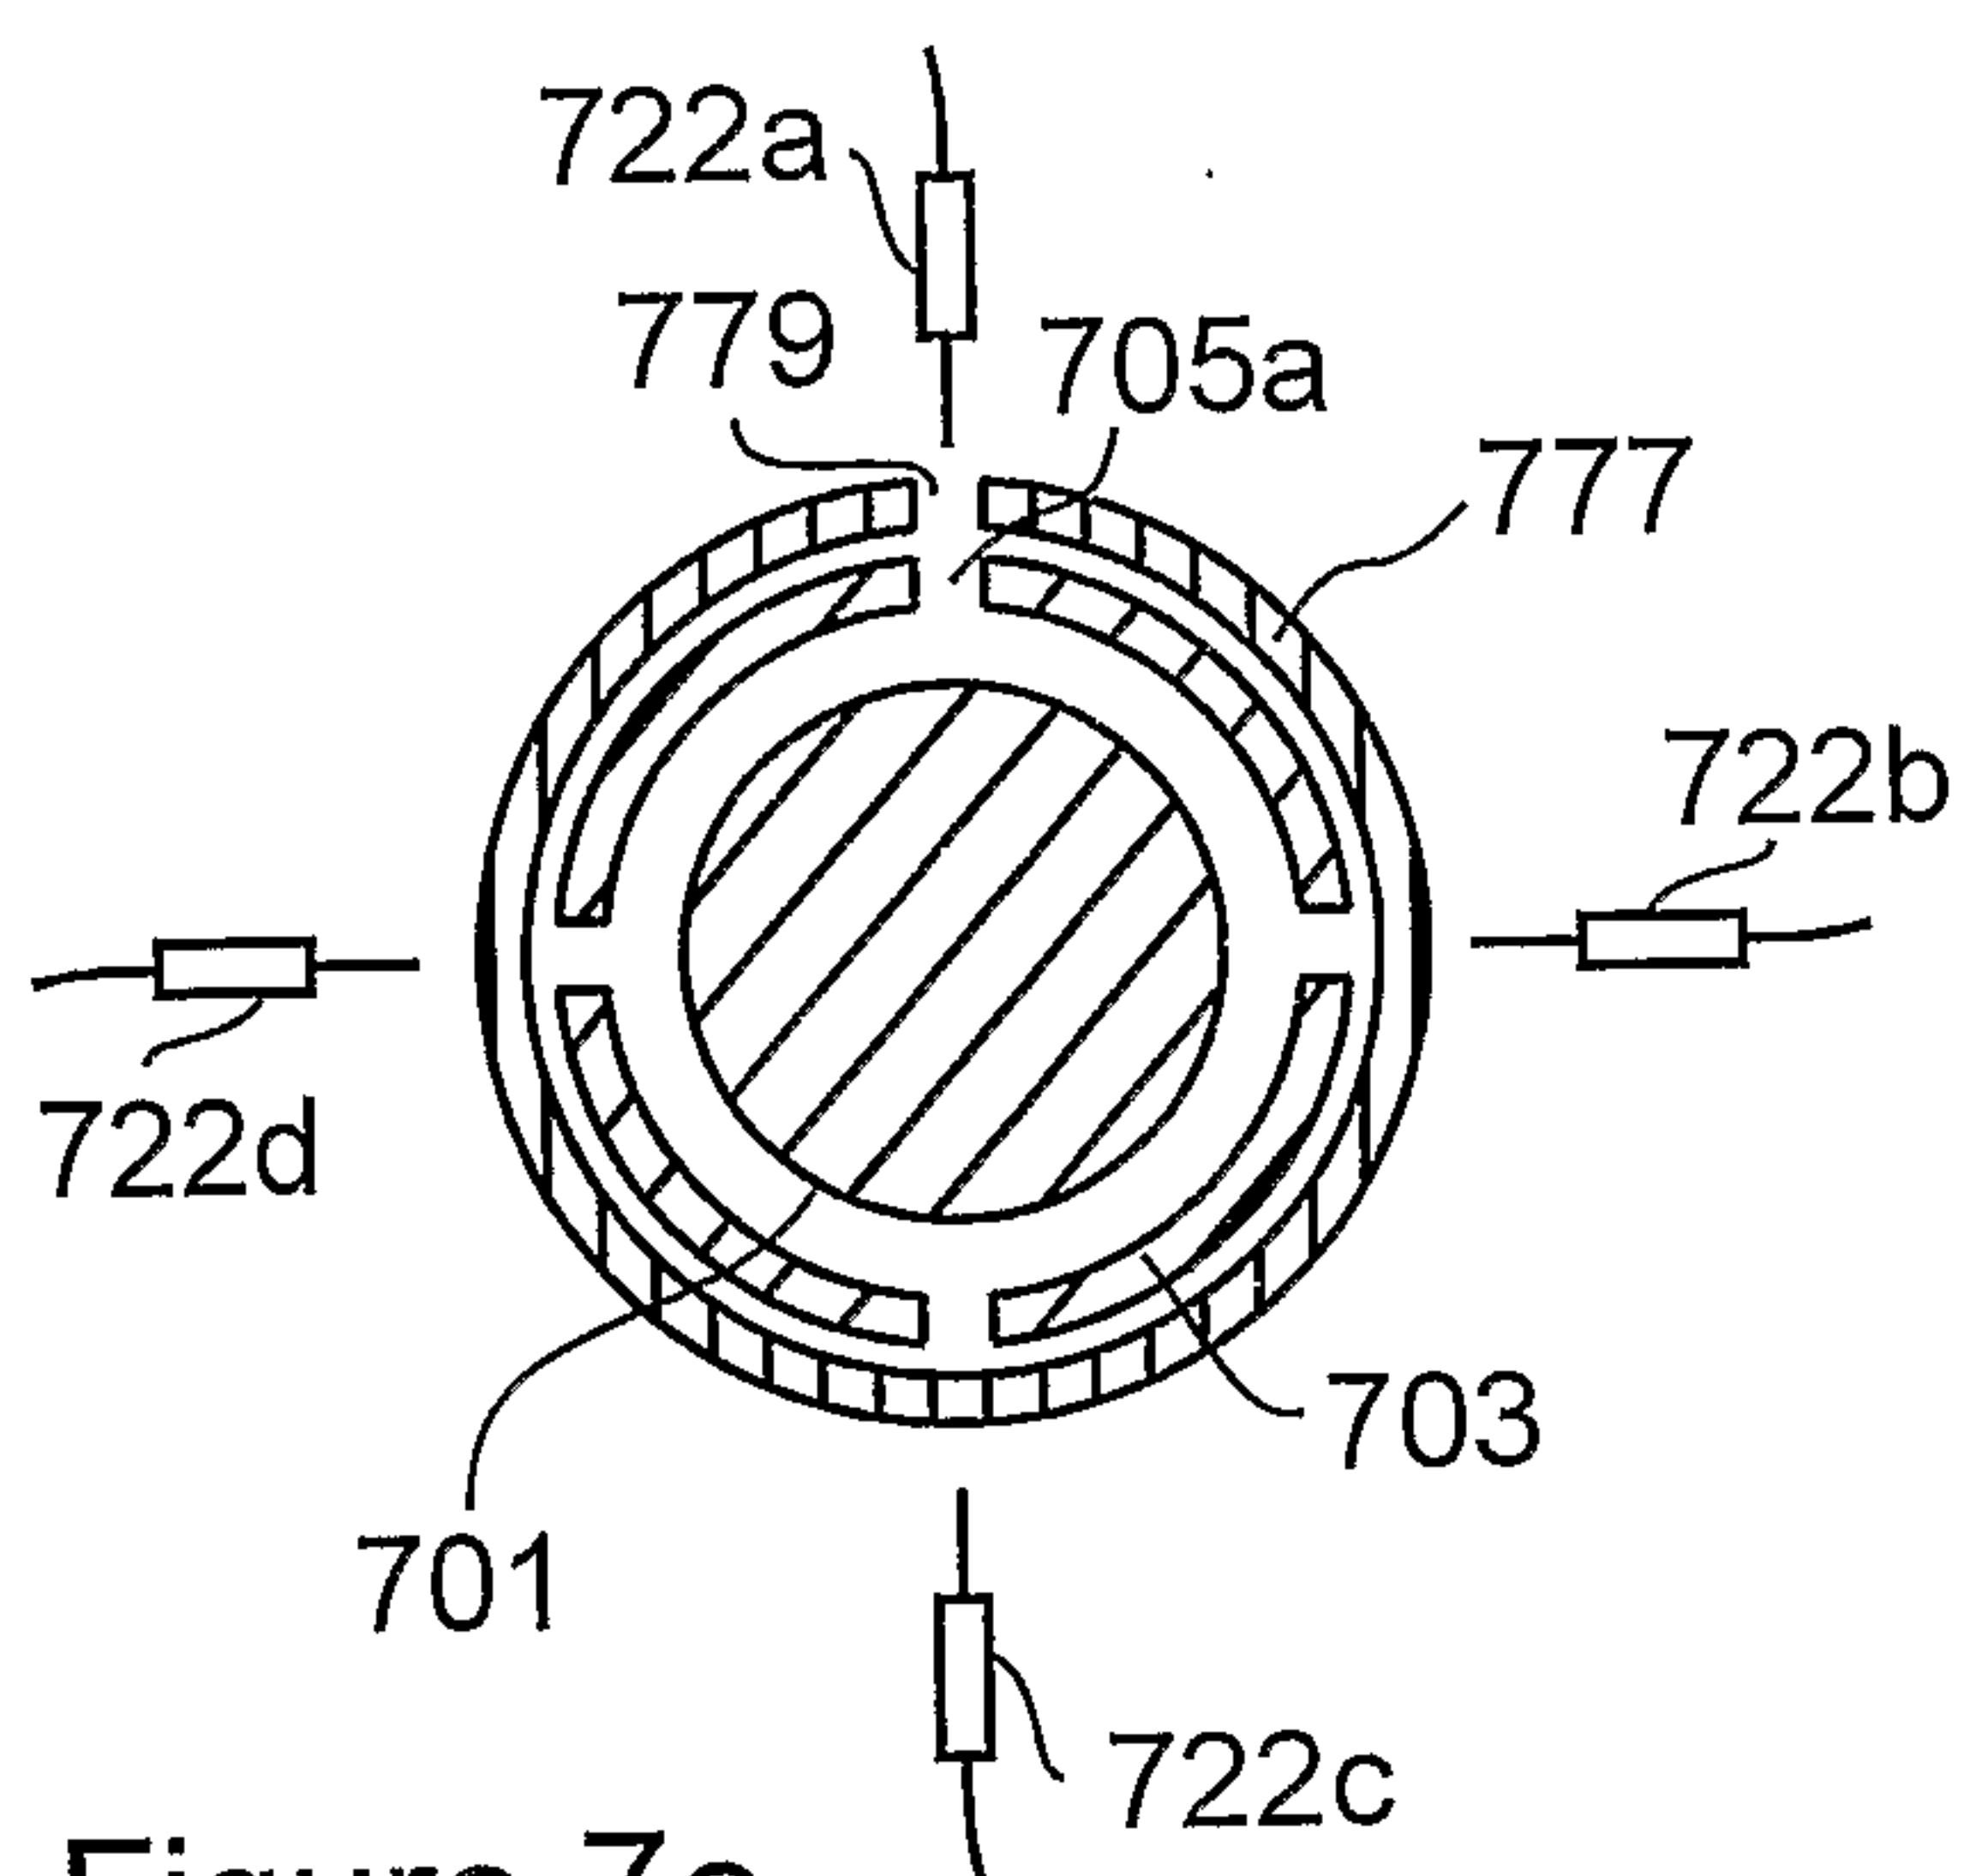

13/20

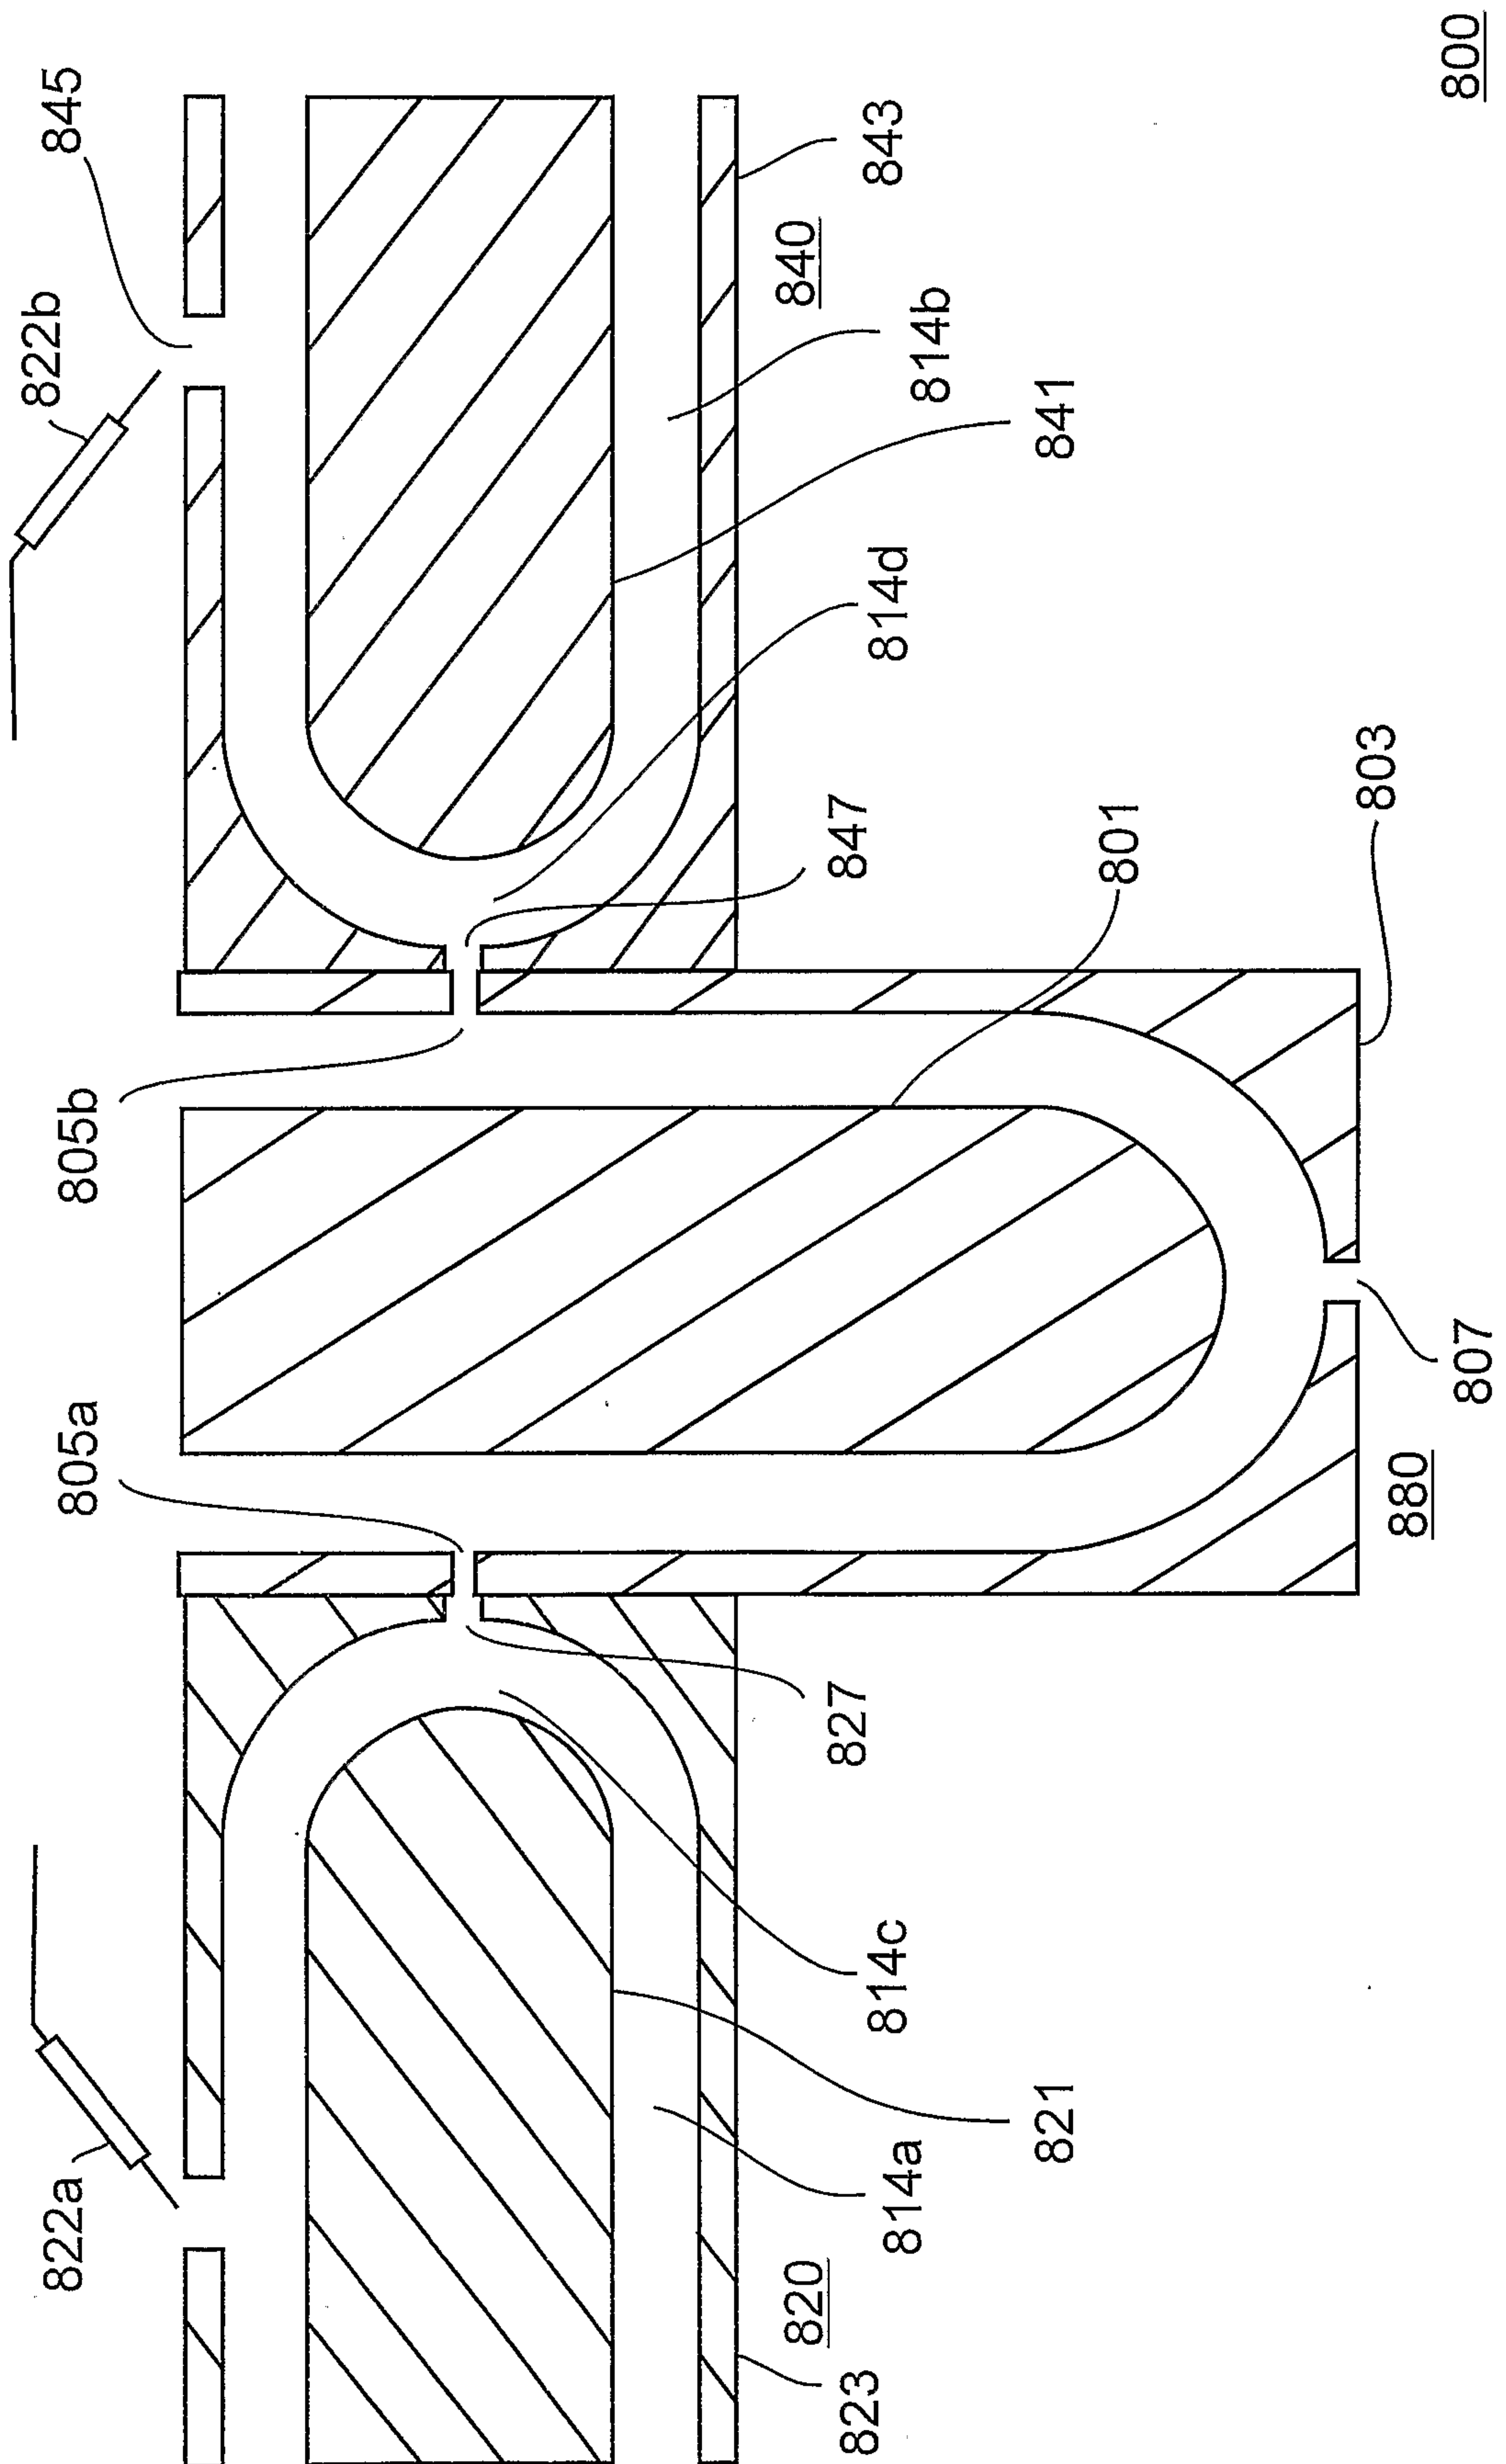


Figure 8a

14/20

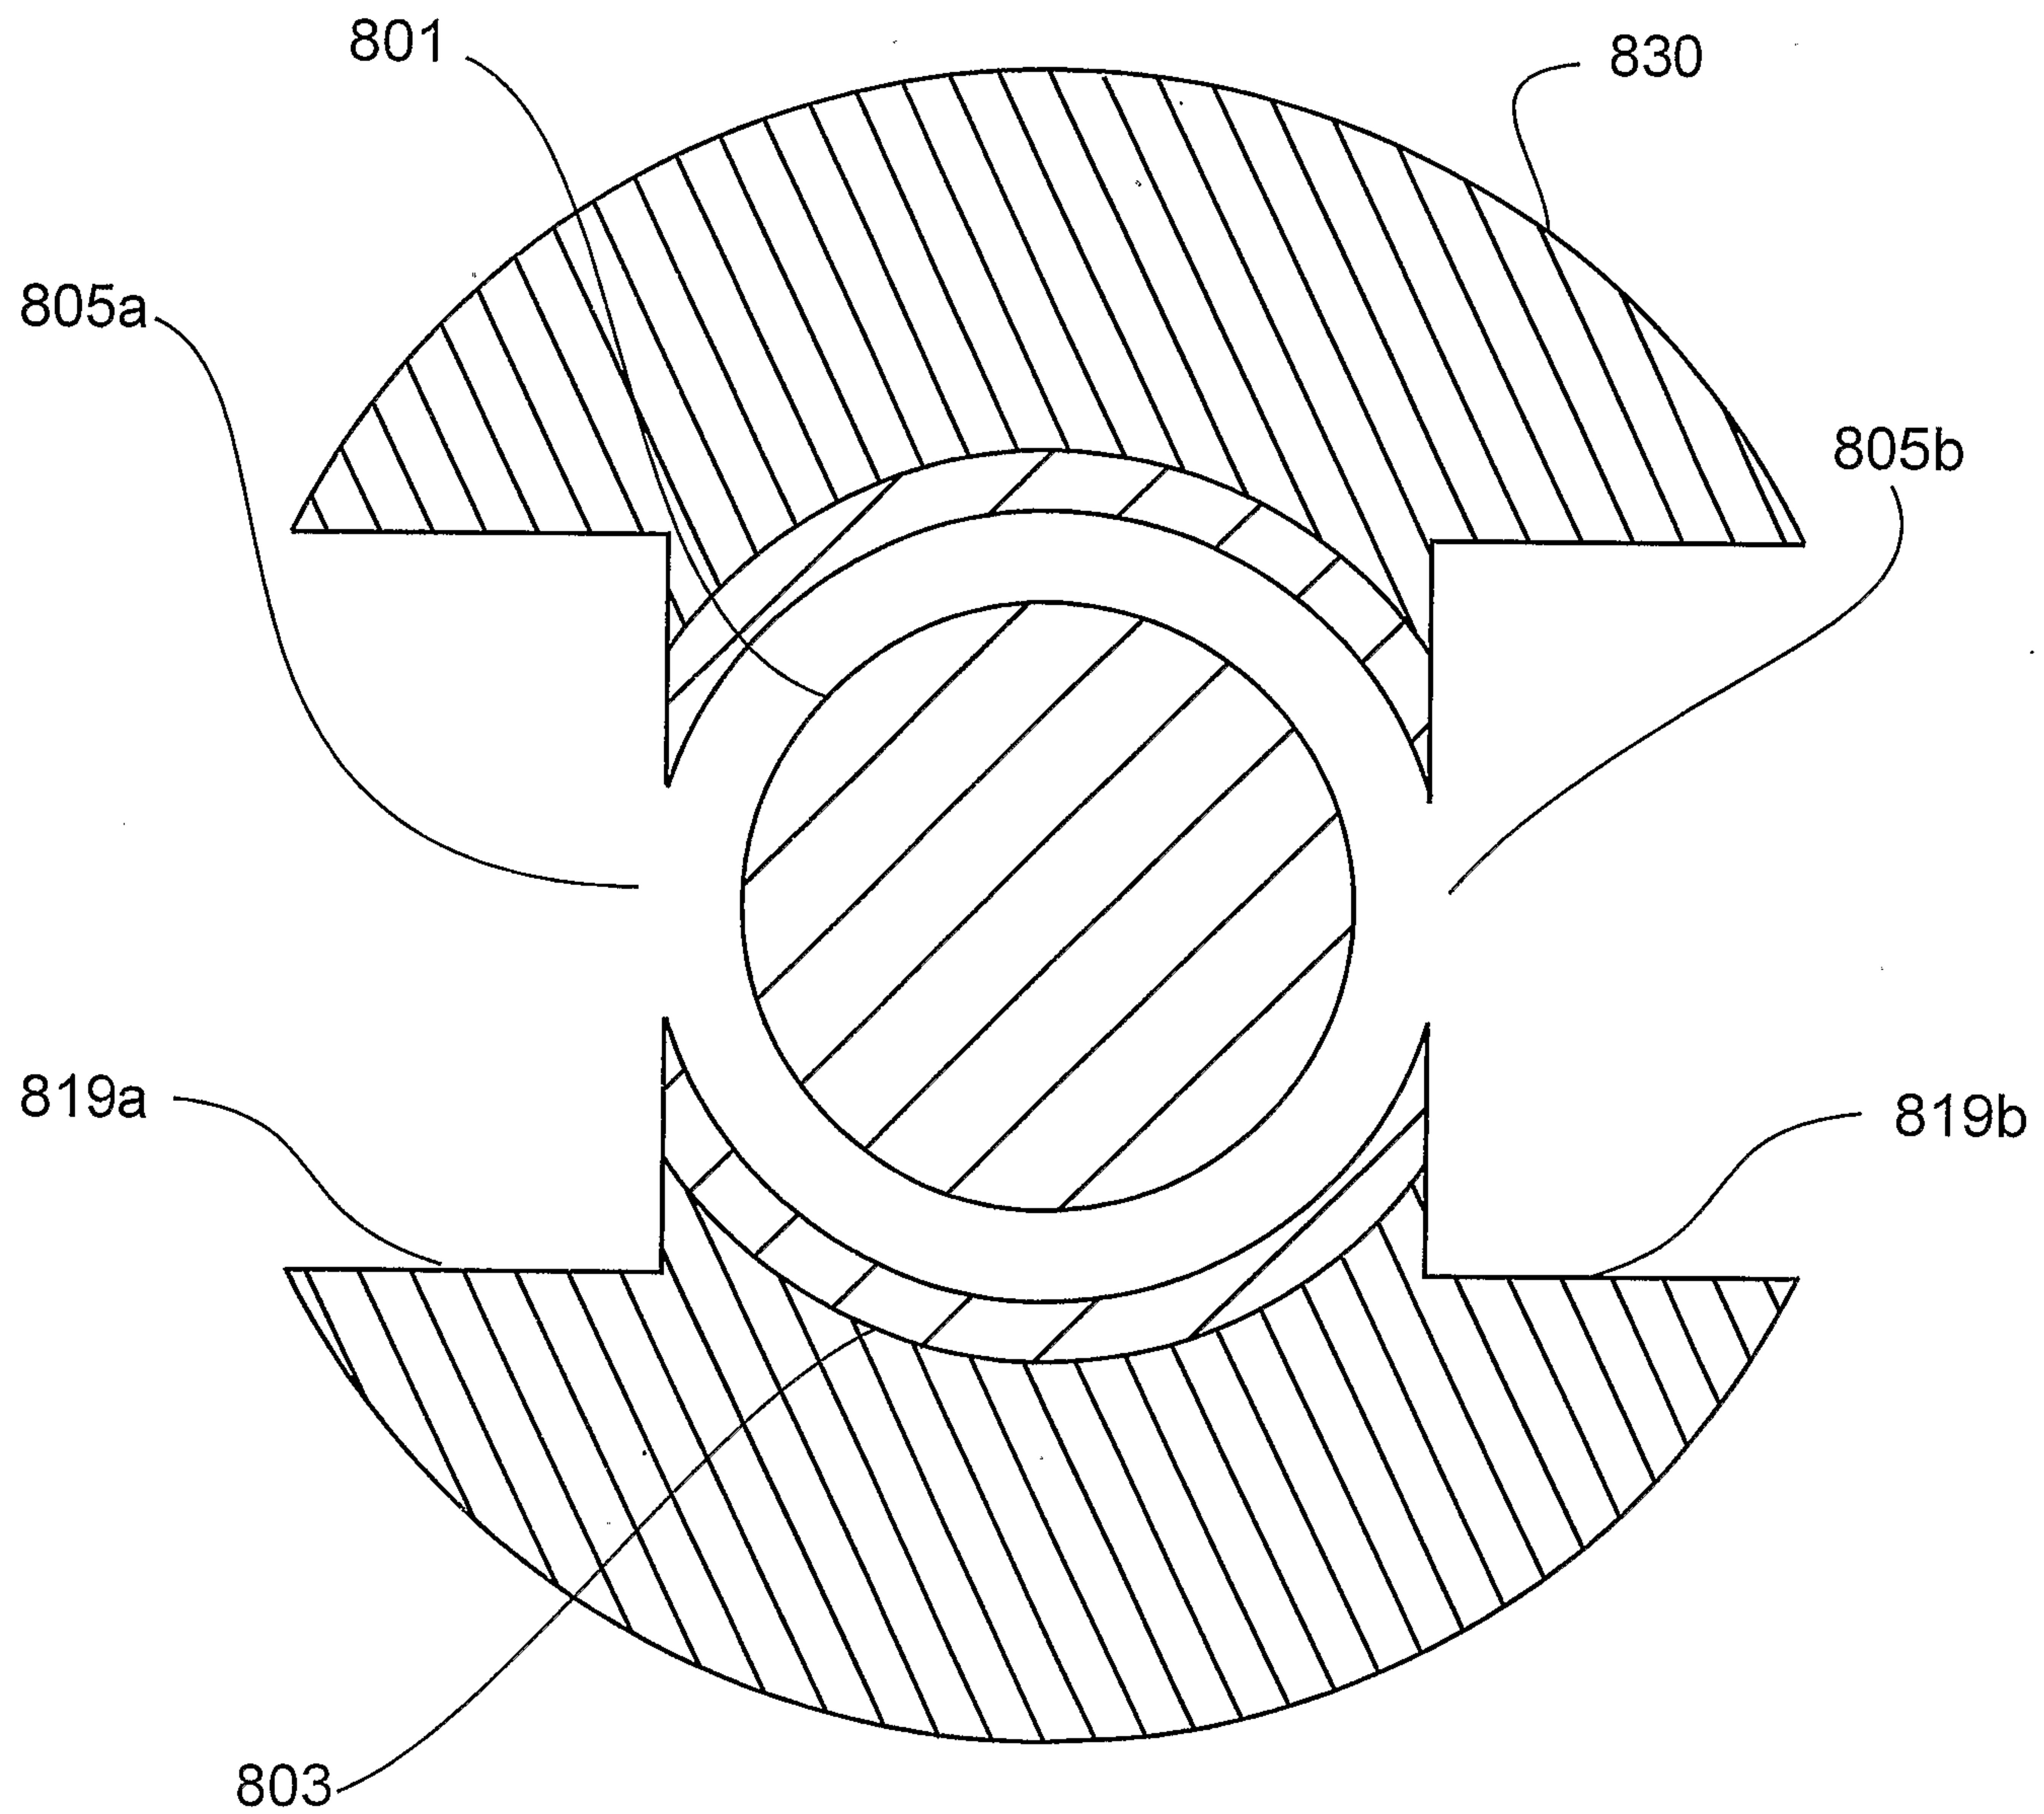


Figure 8b

15/20

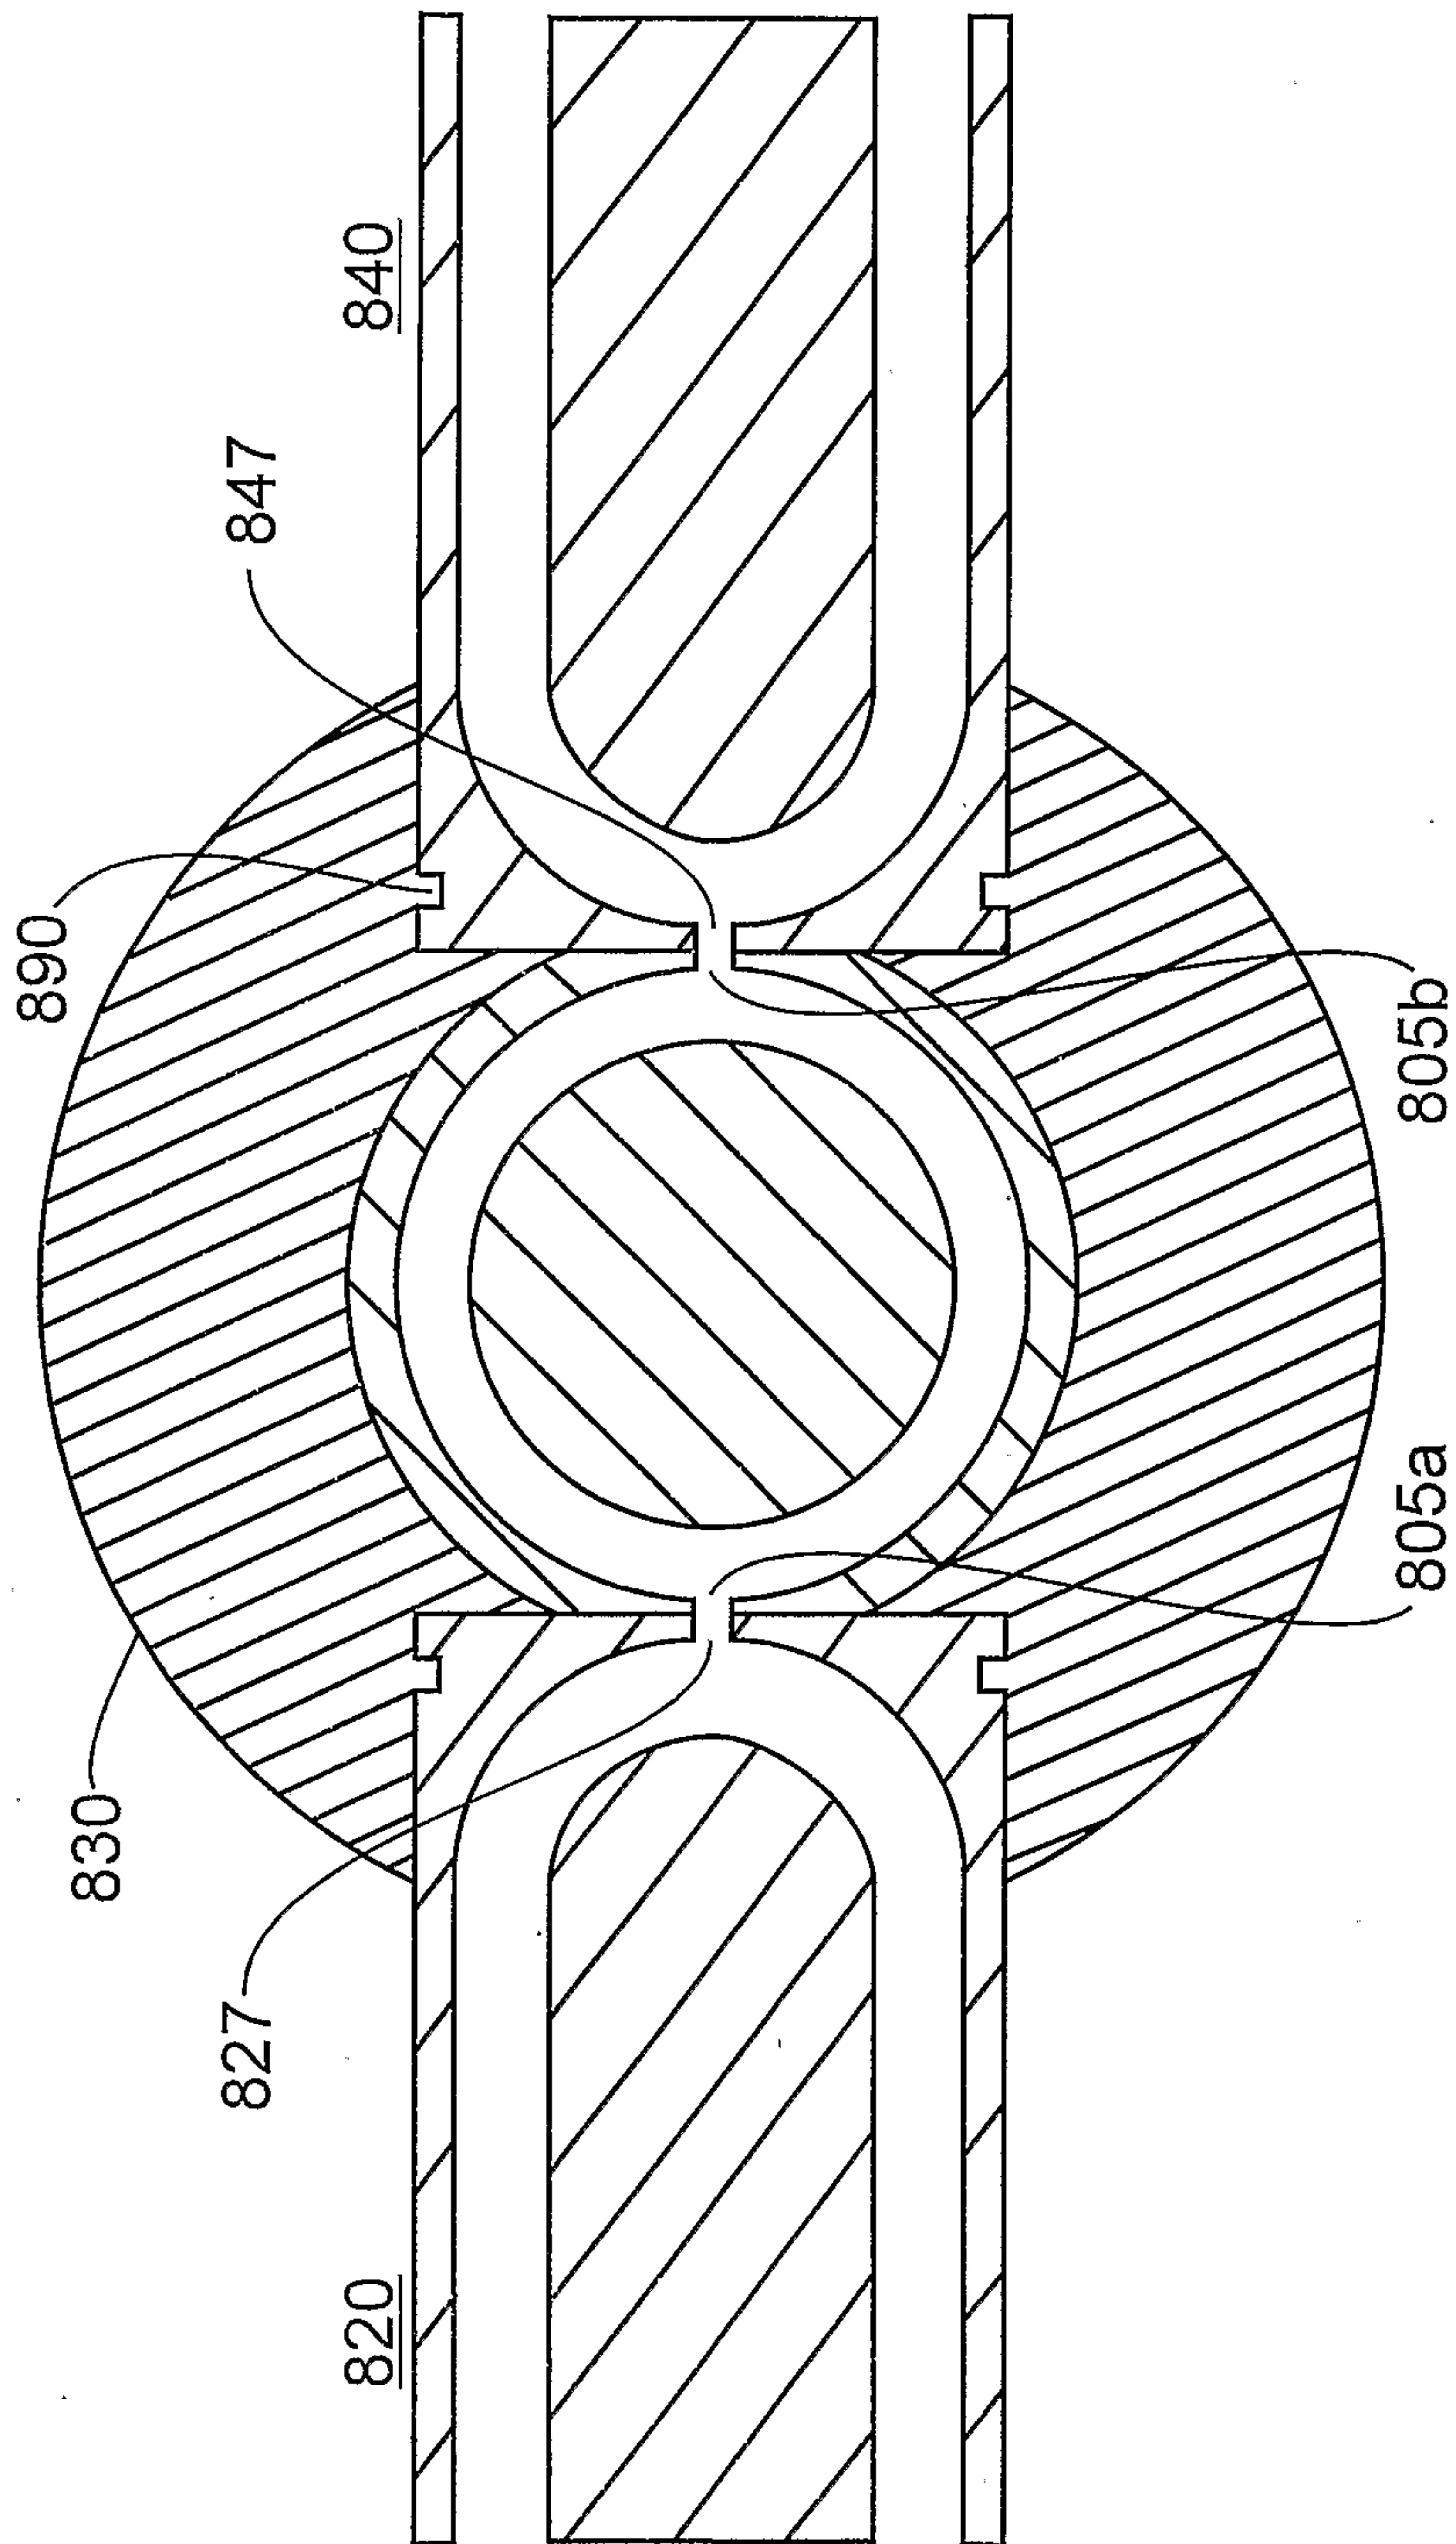


Figure 8c

16/20

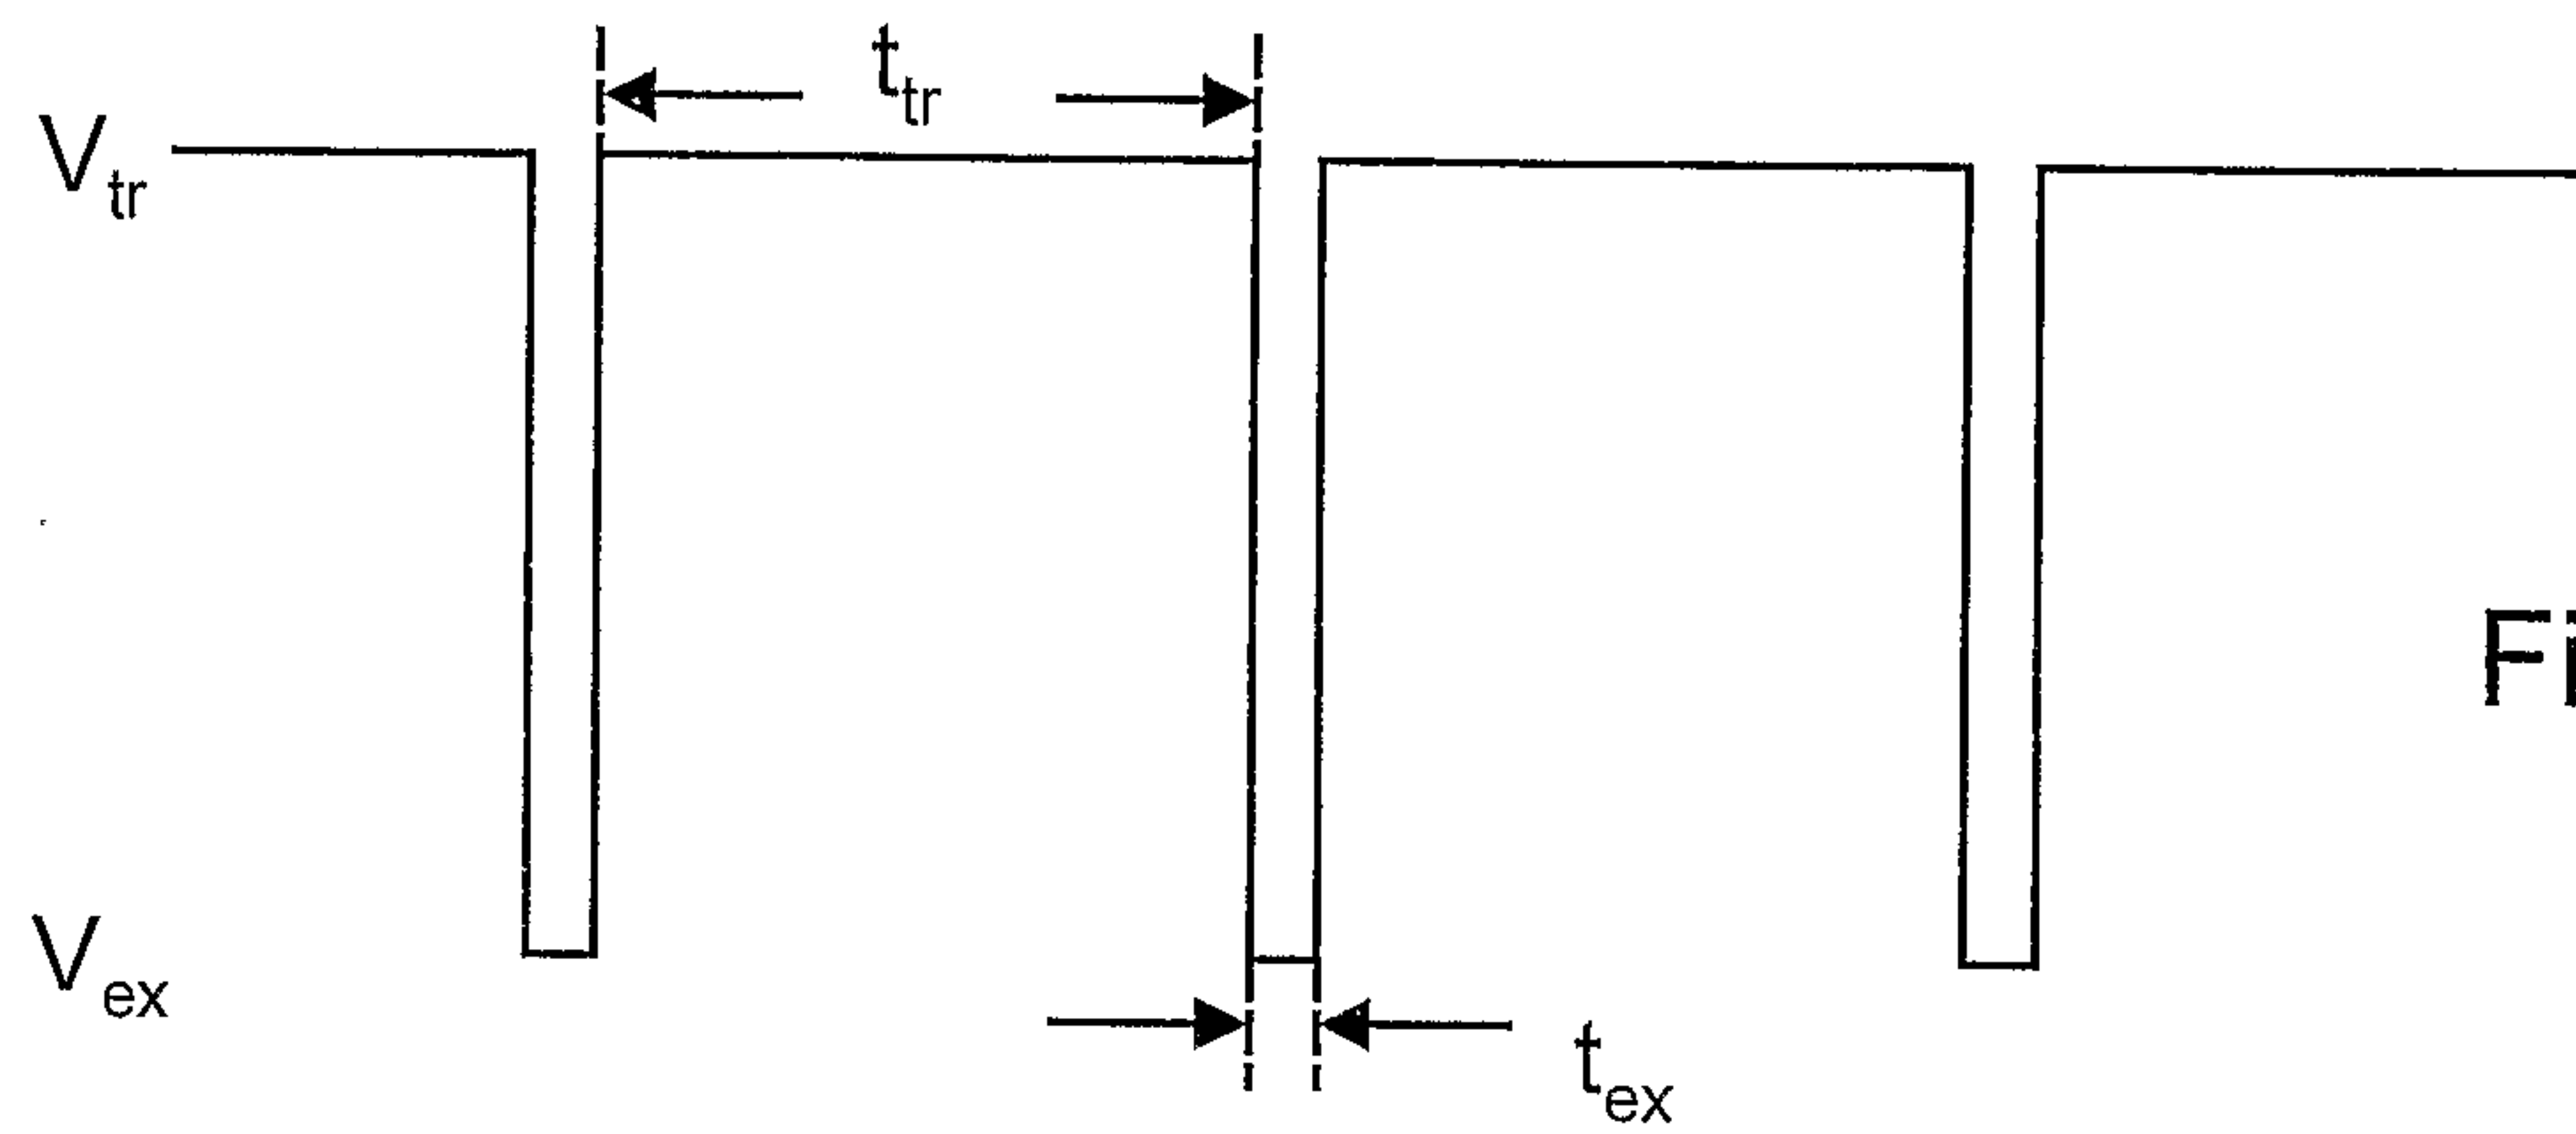


Figure 9a

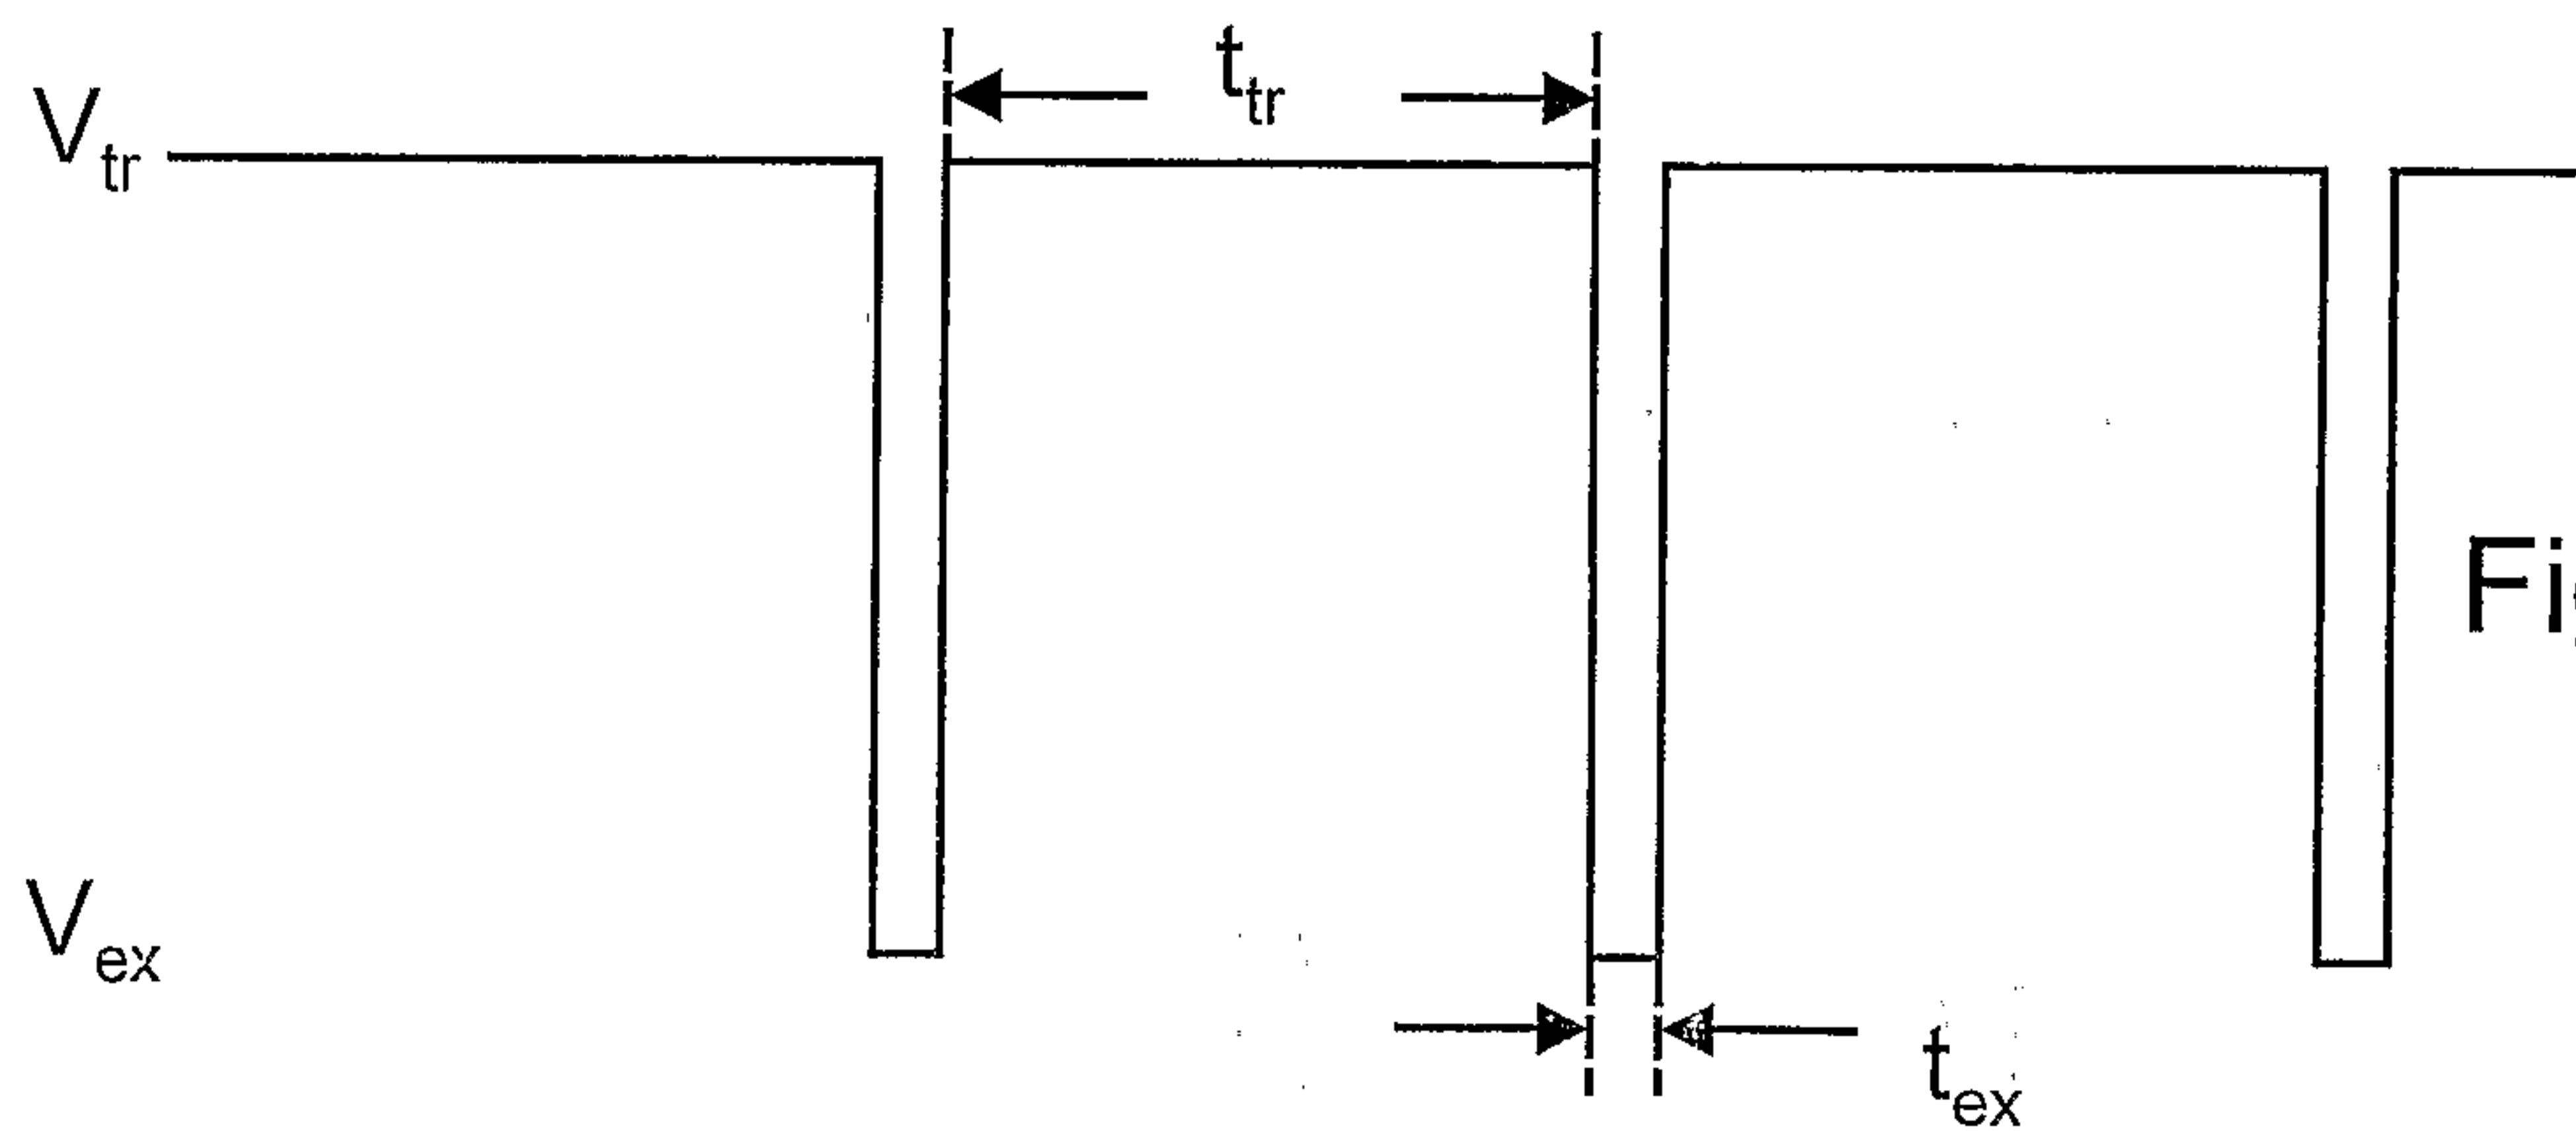


Figure 9b

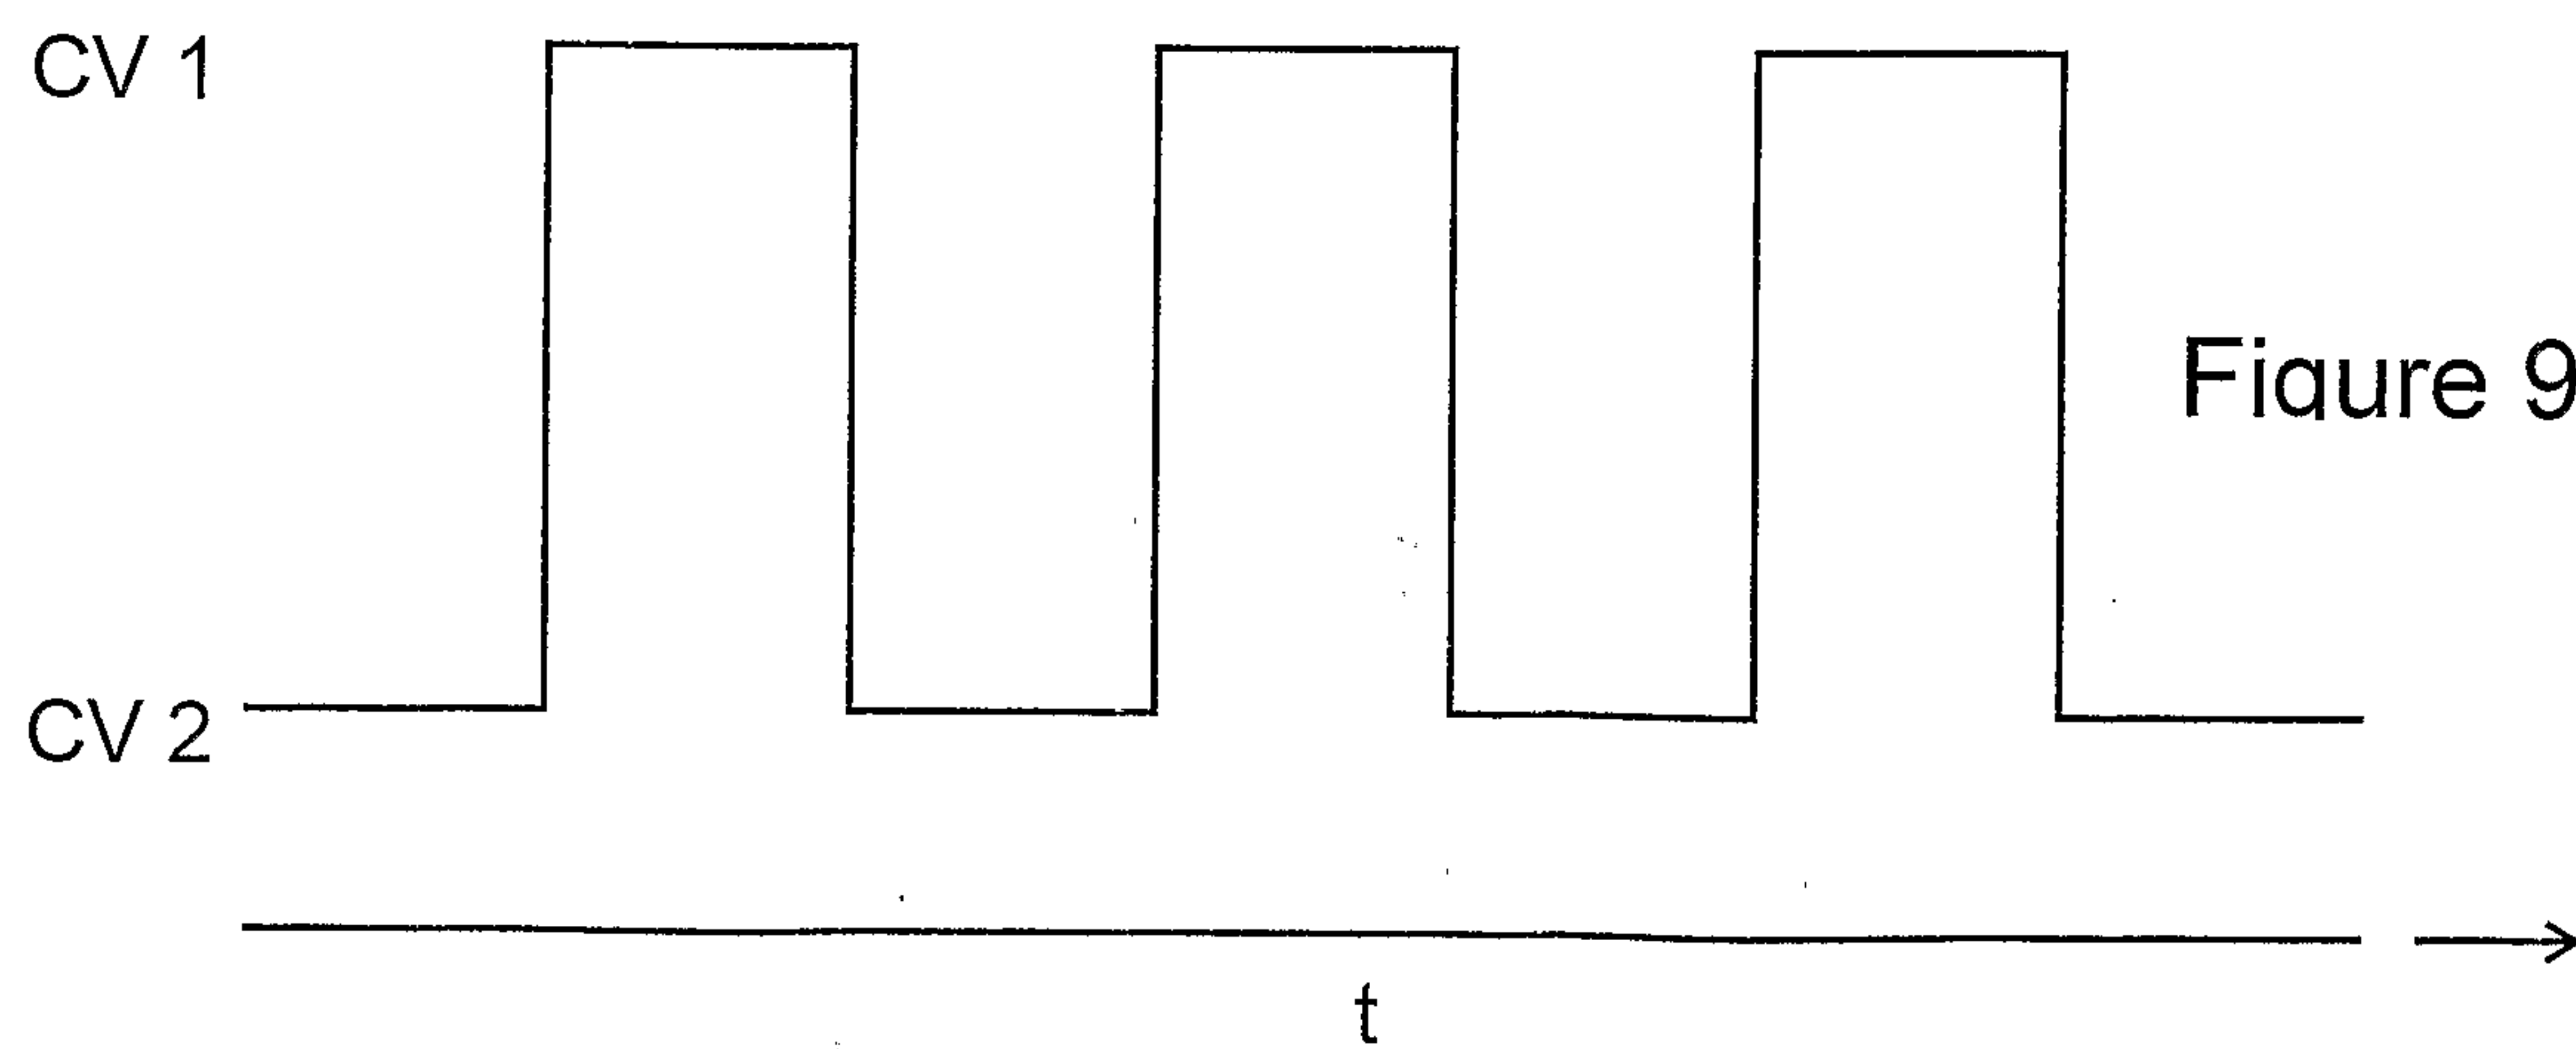


Figure 9c

17/20

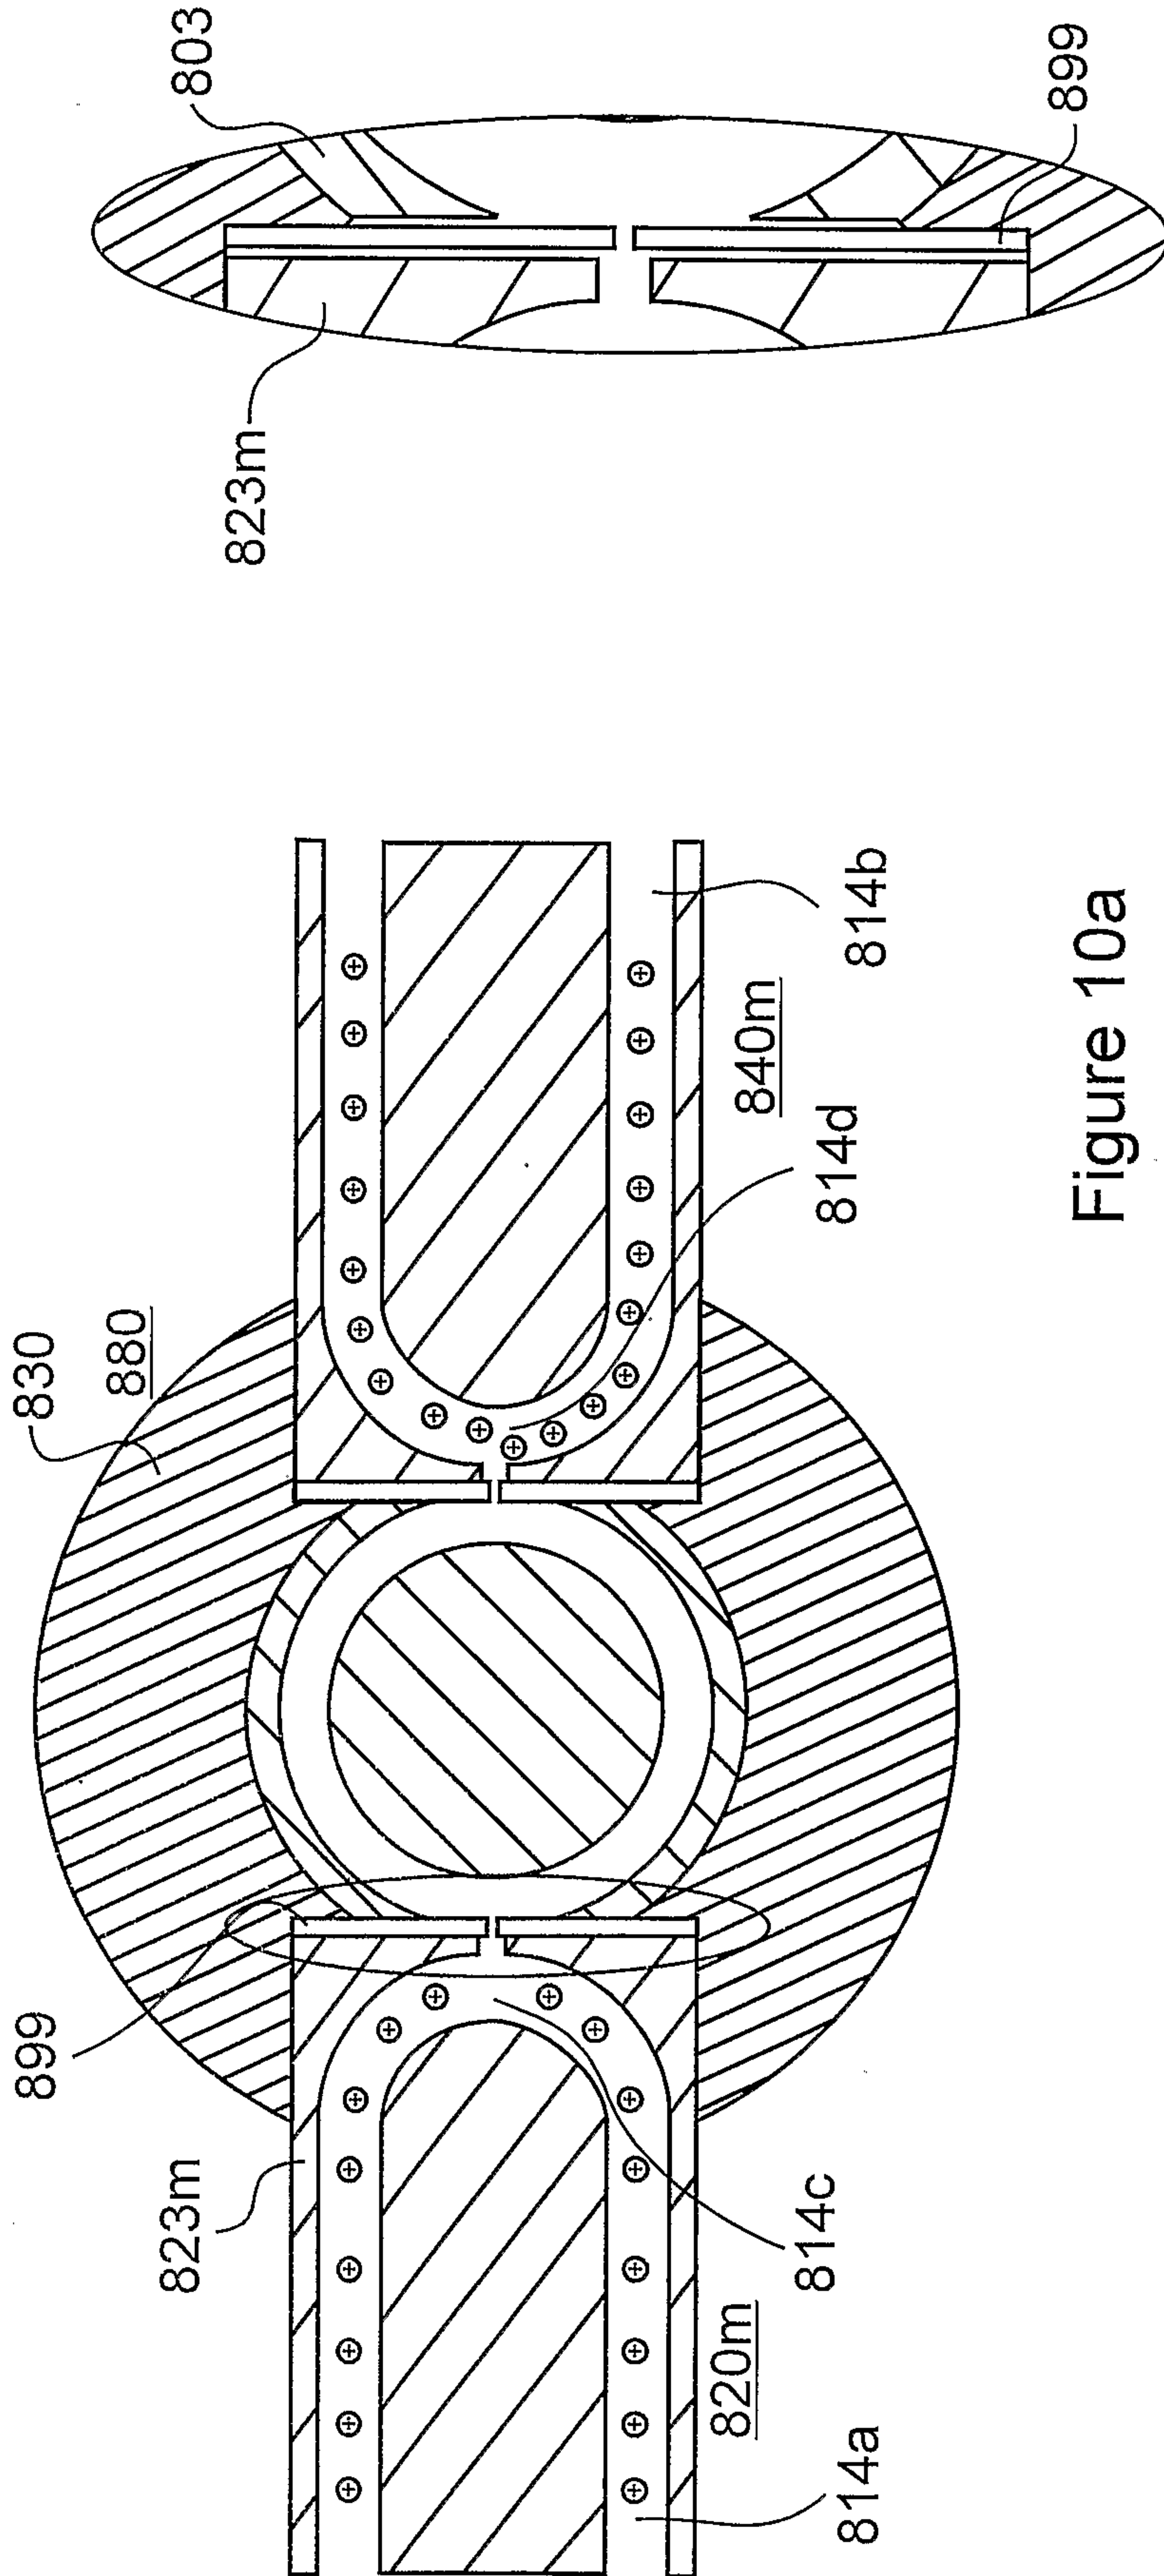


Figure 10b

Figure 10a

800

18/20

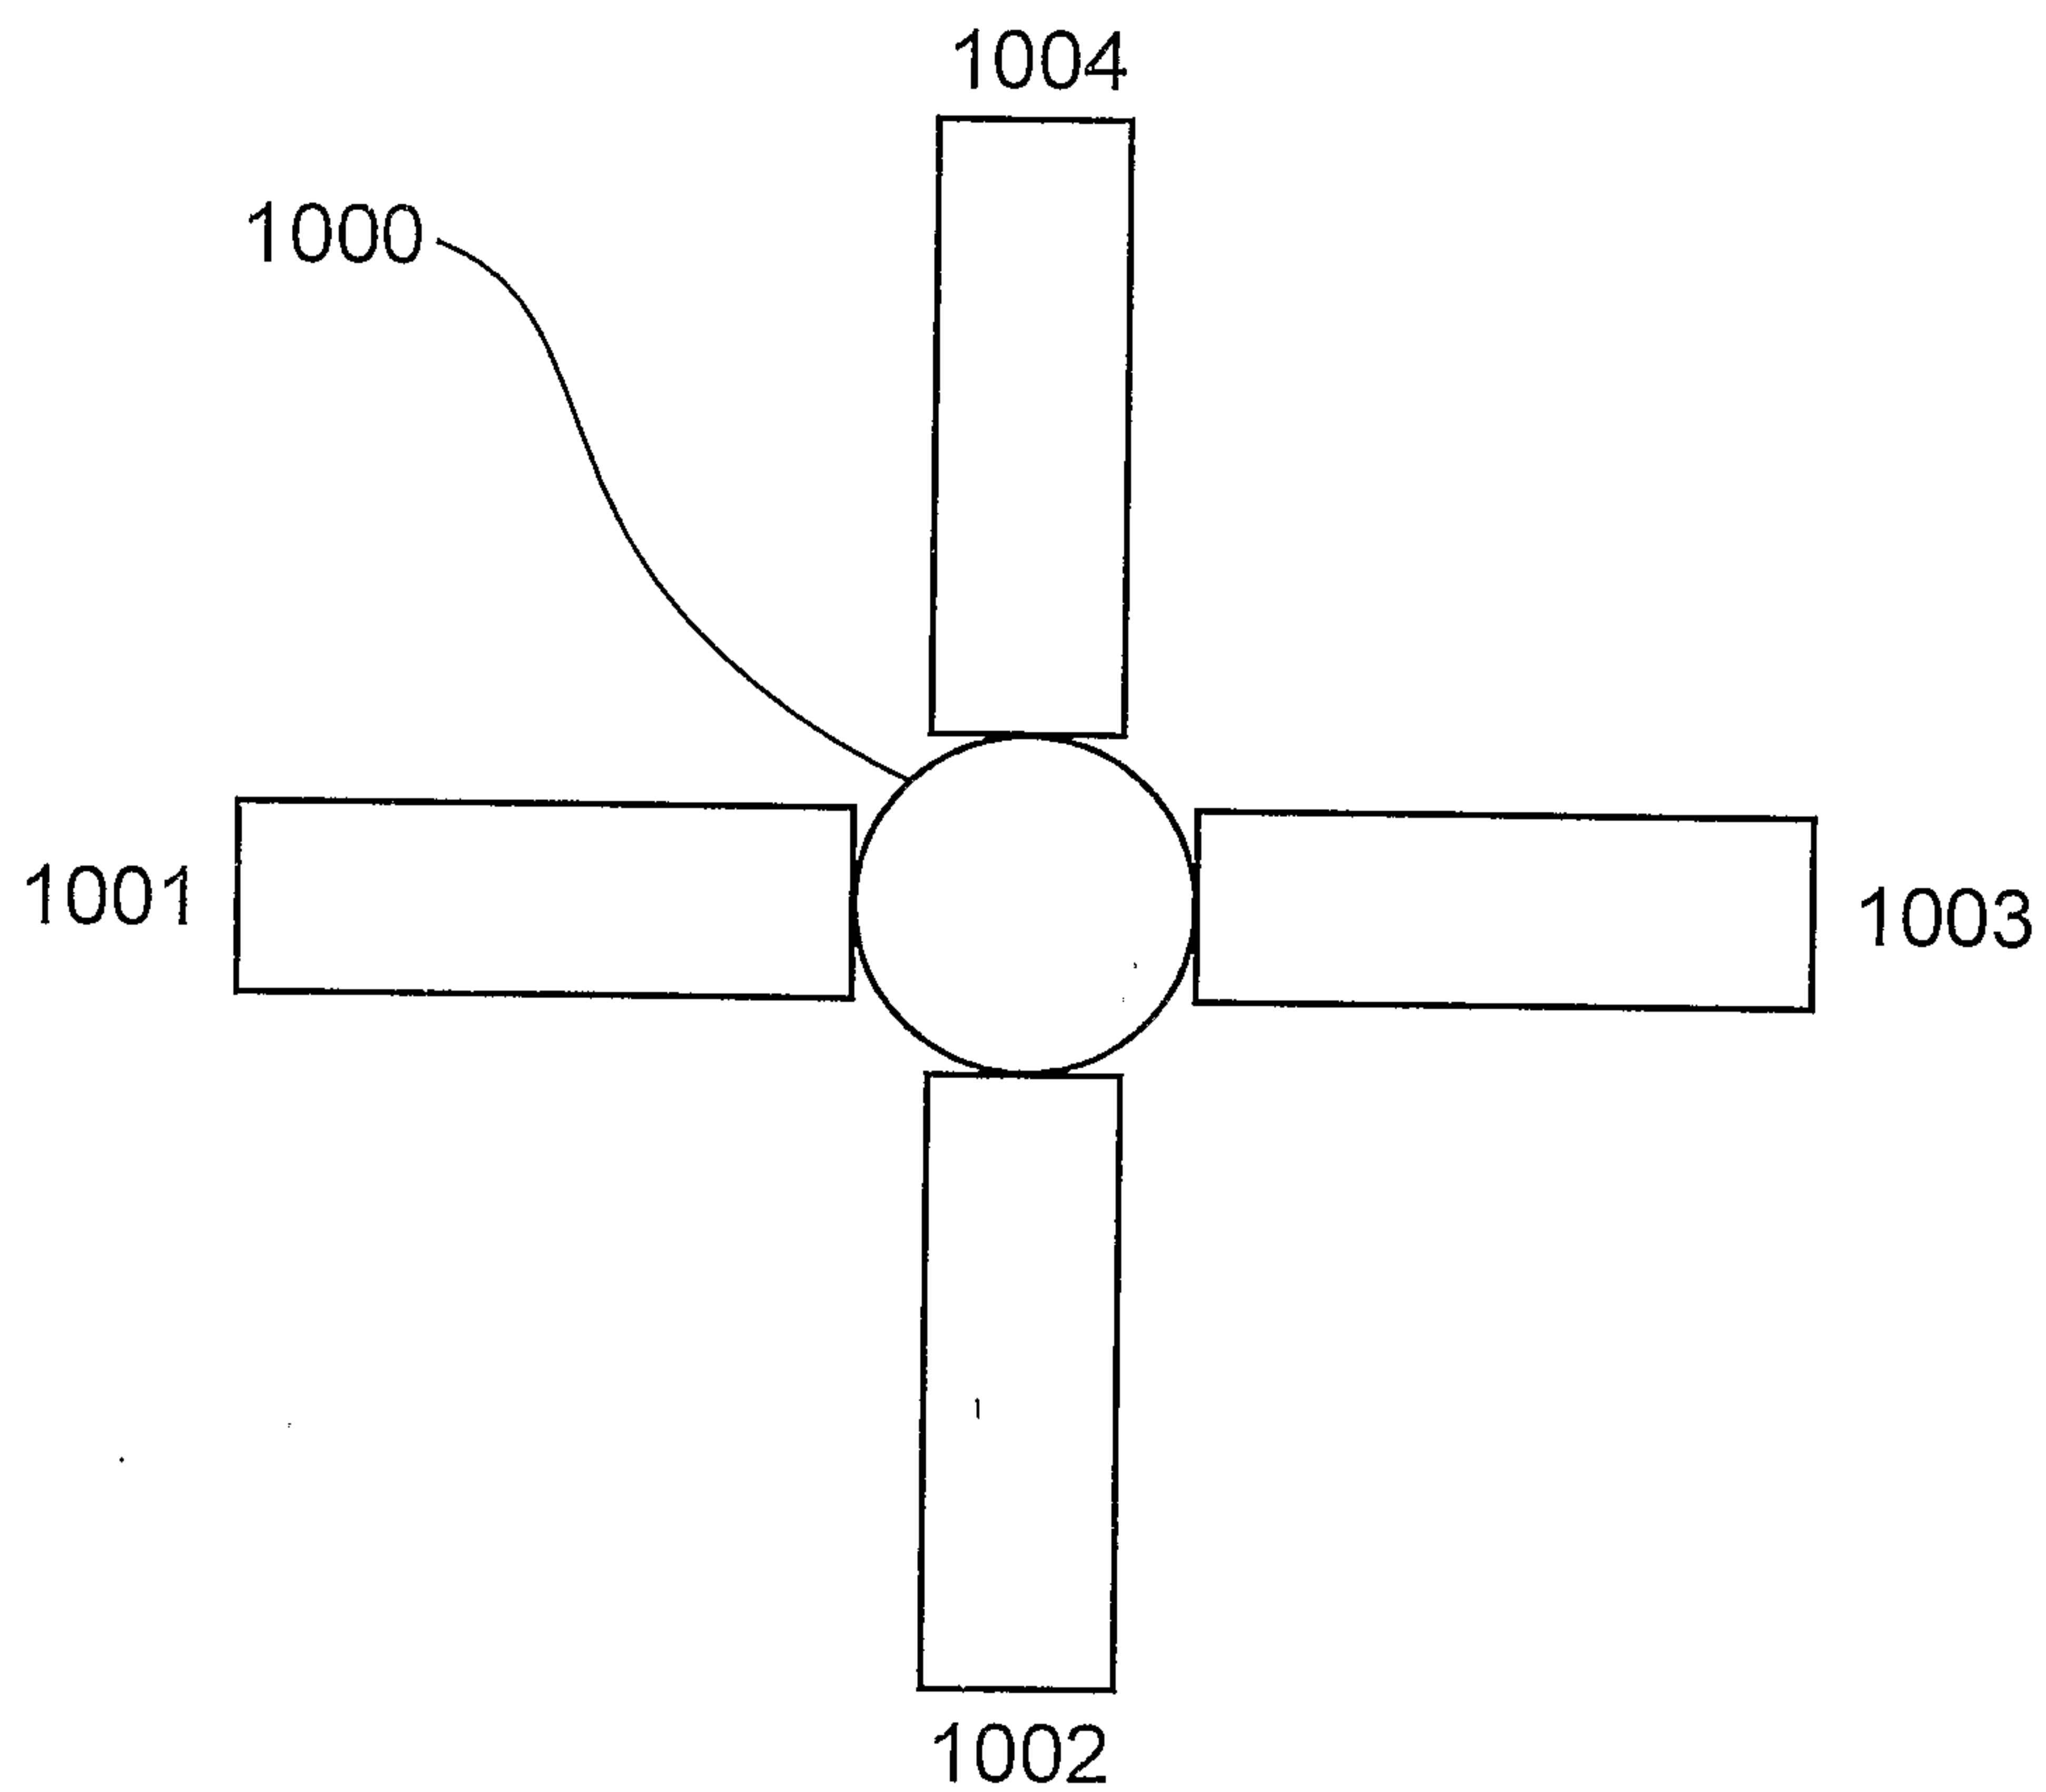


Figure 11

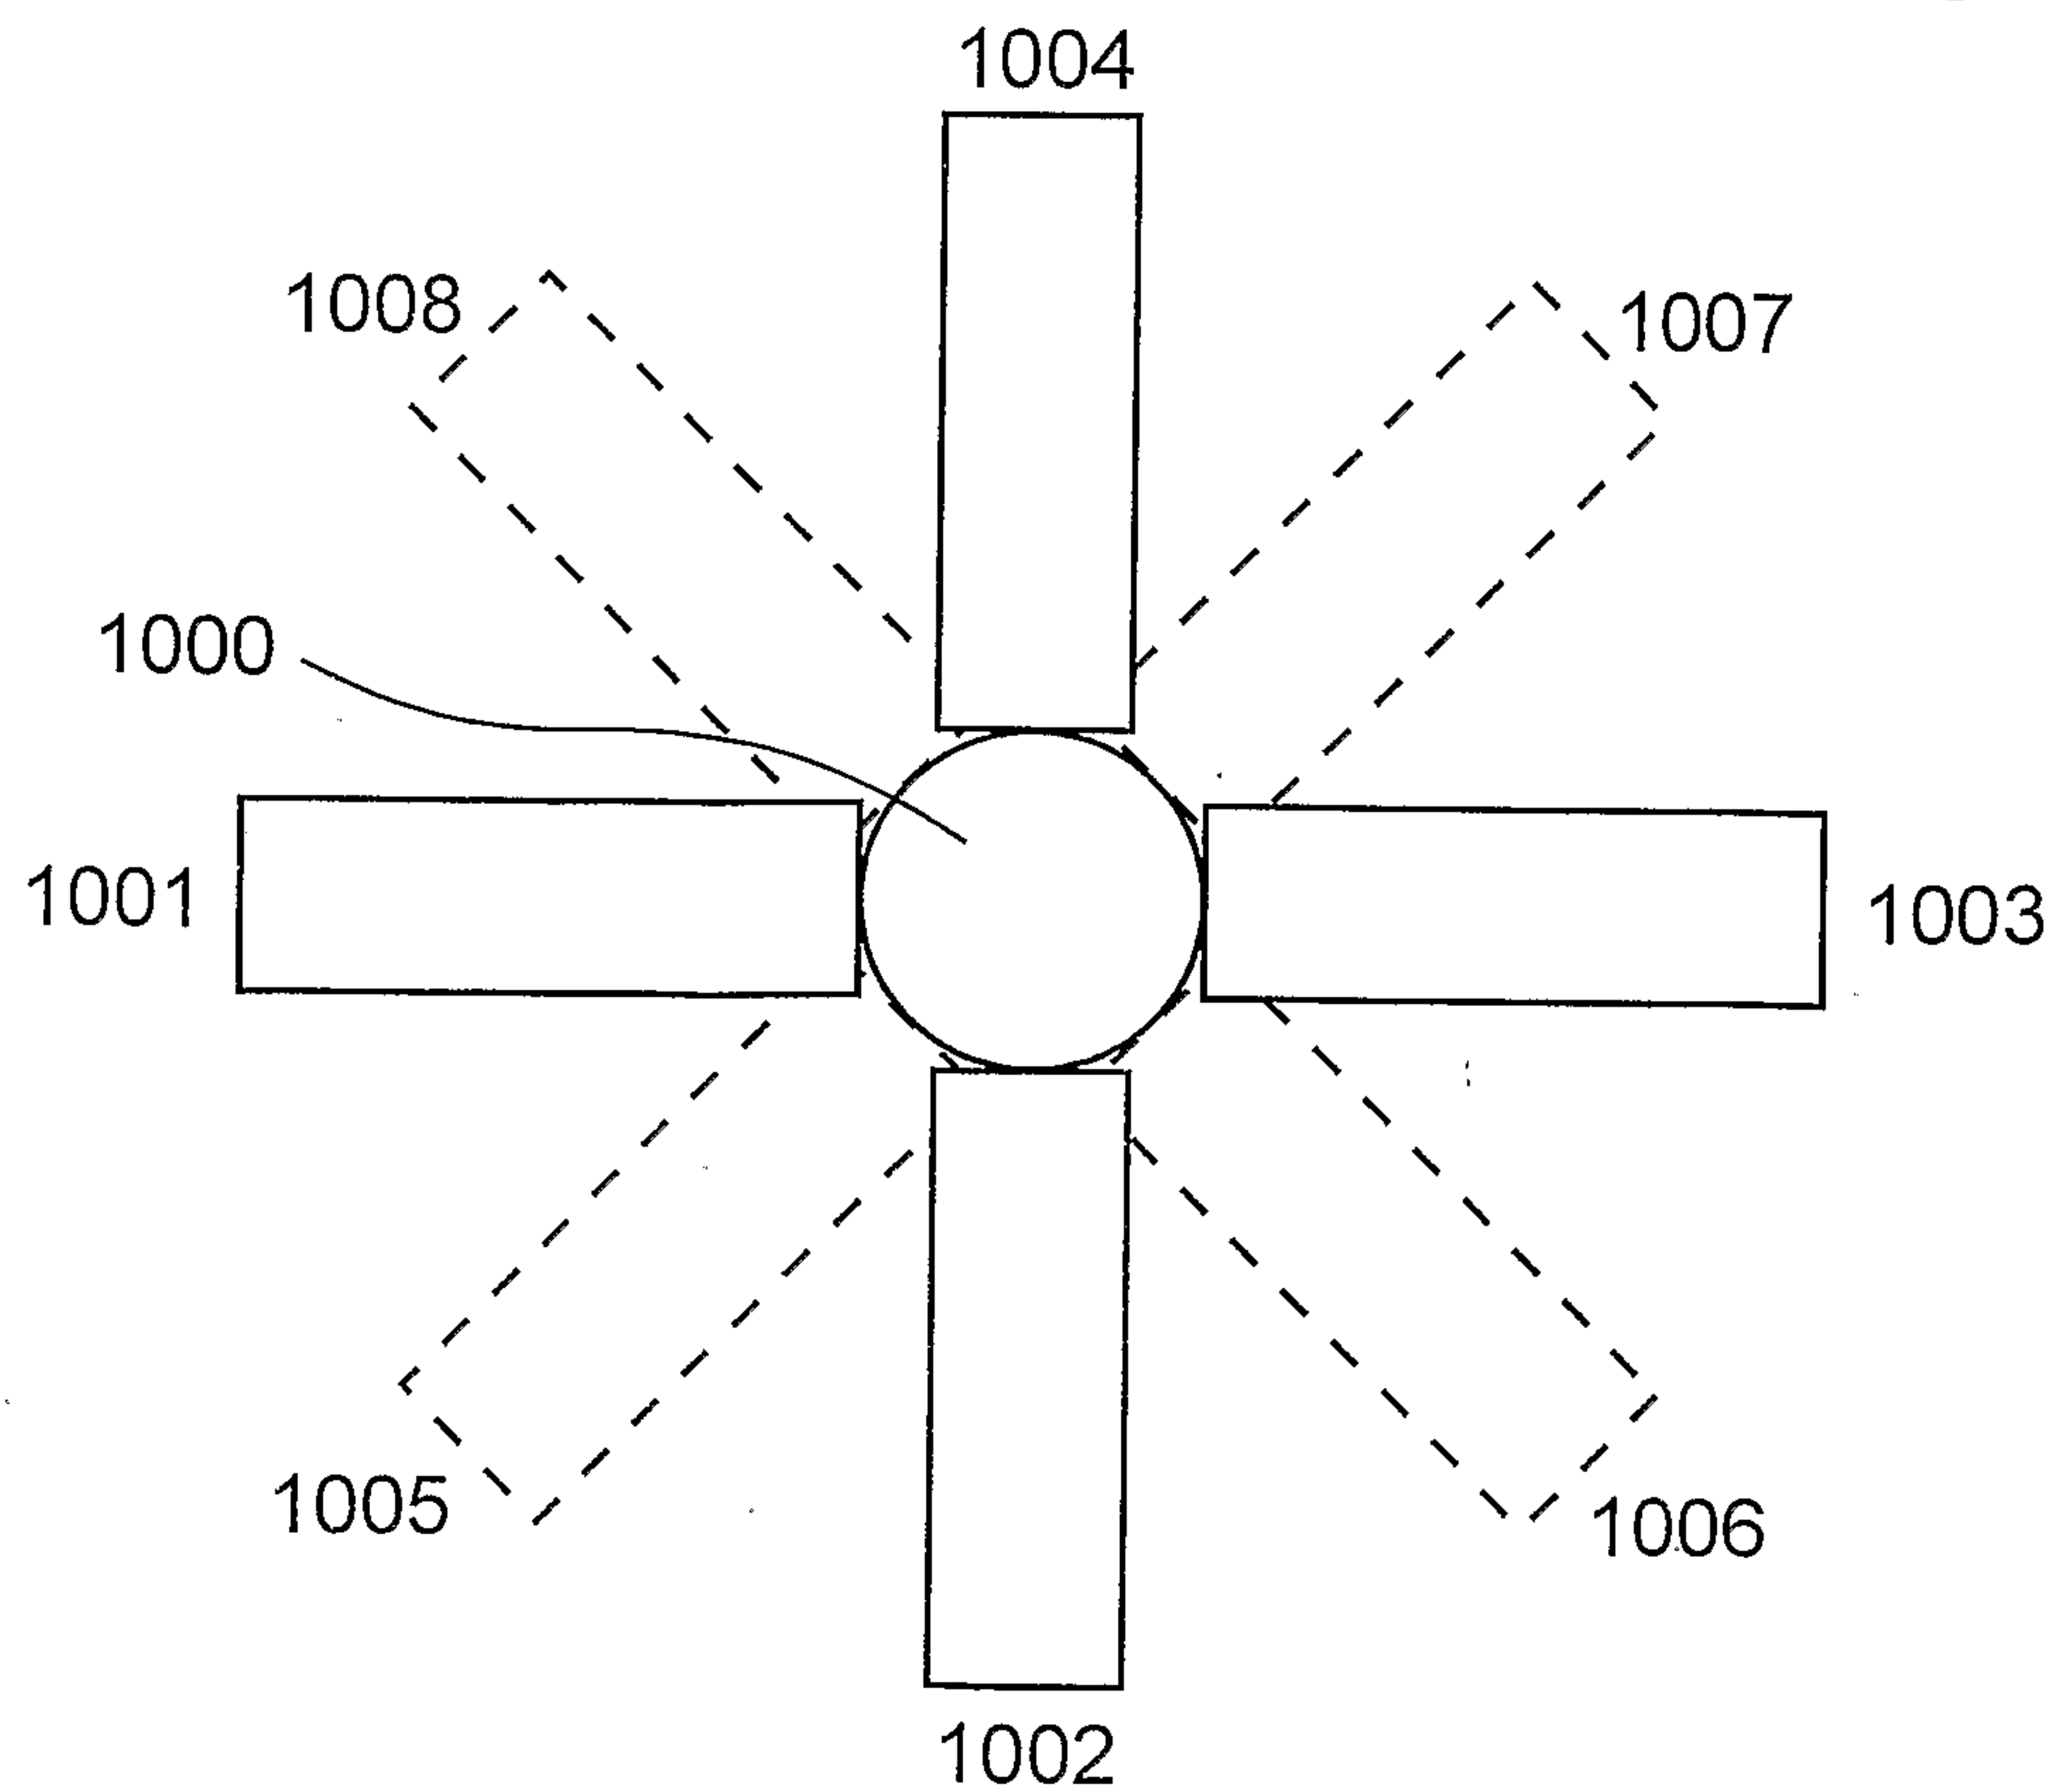


Figure 12

19/20

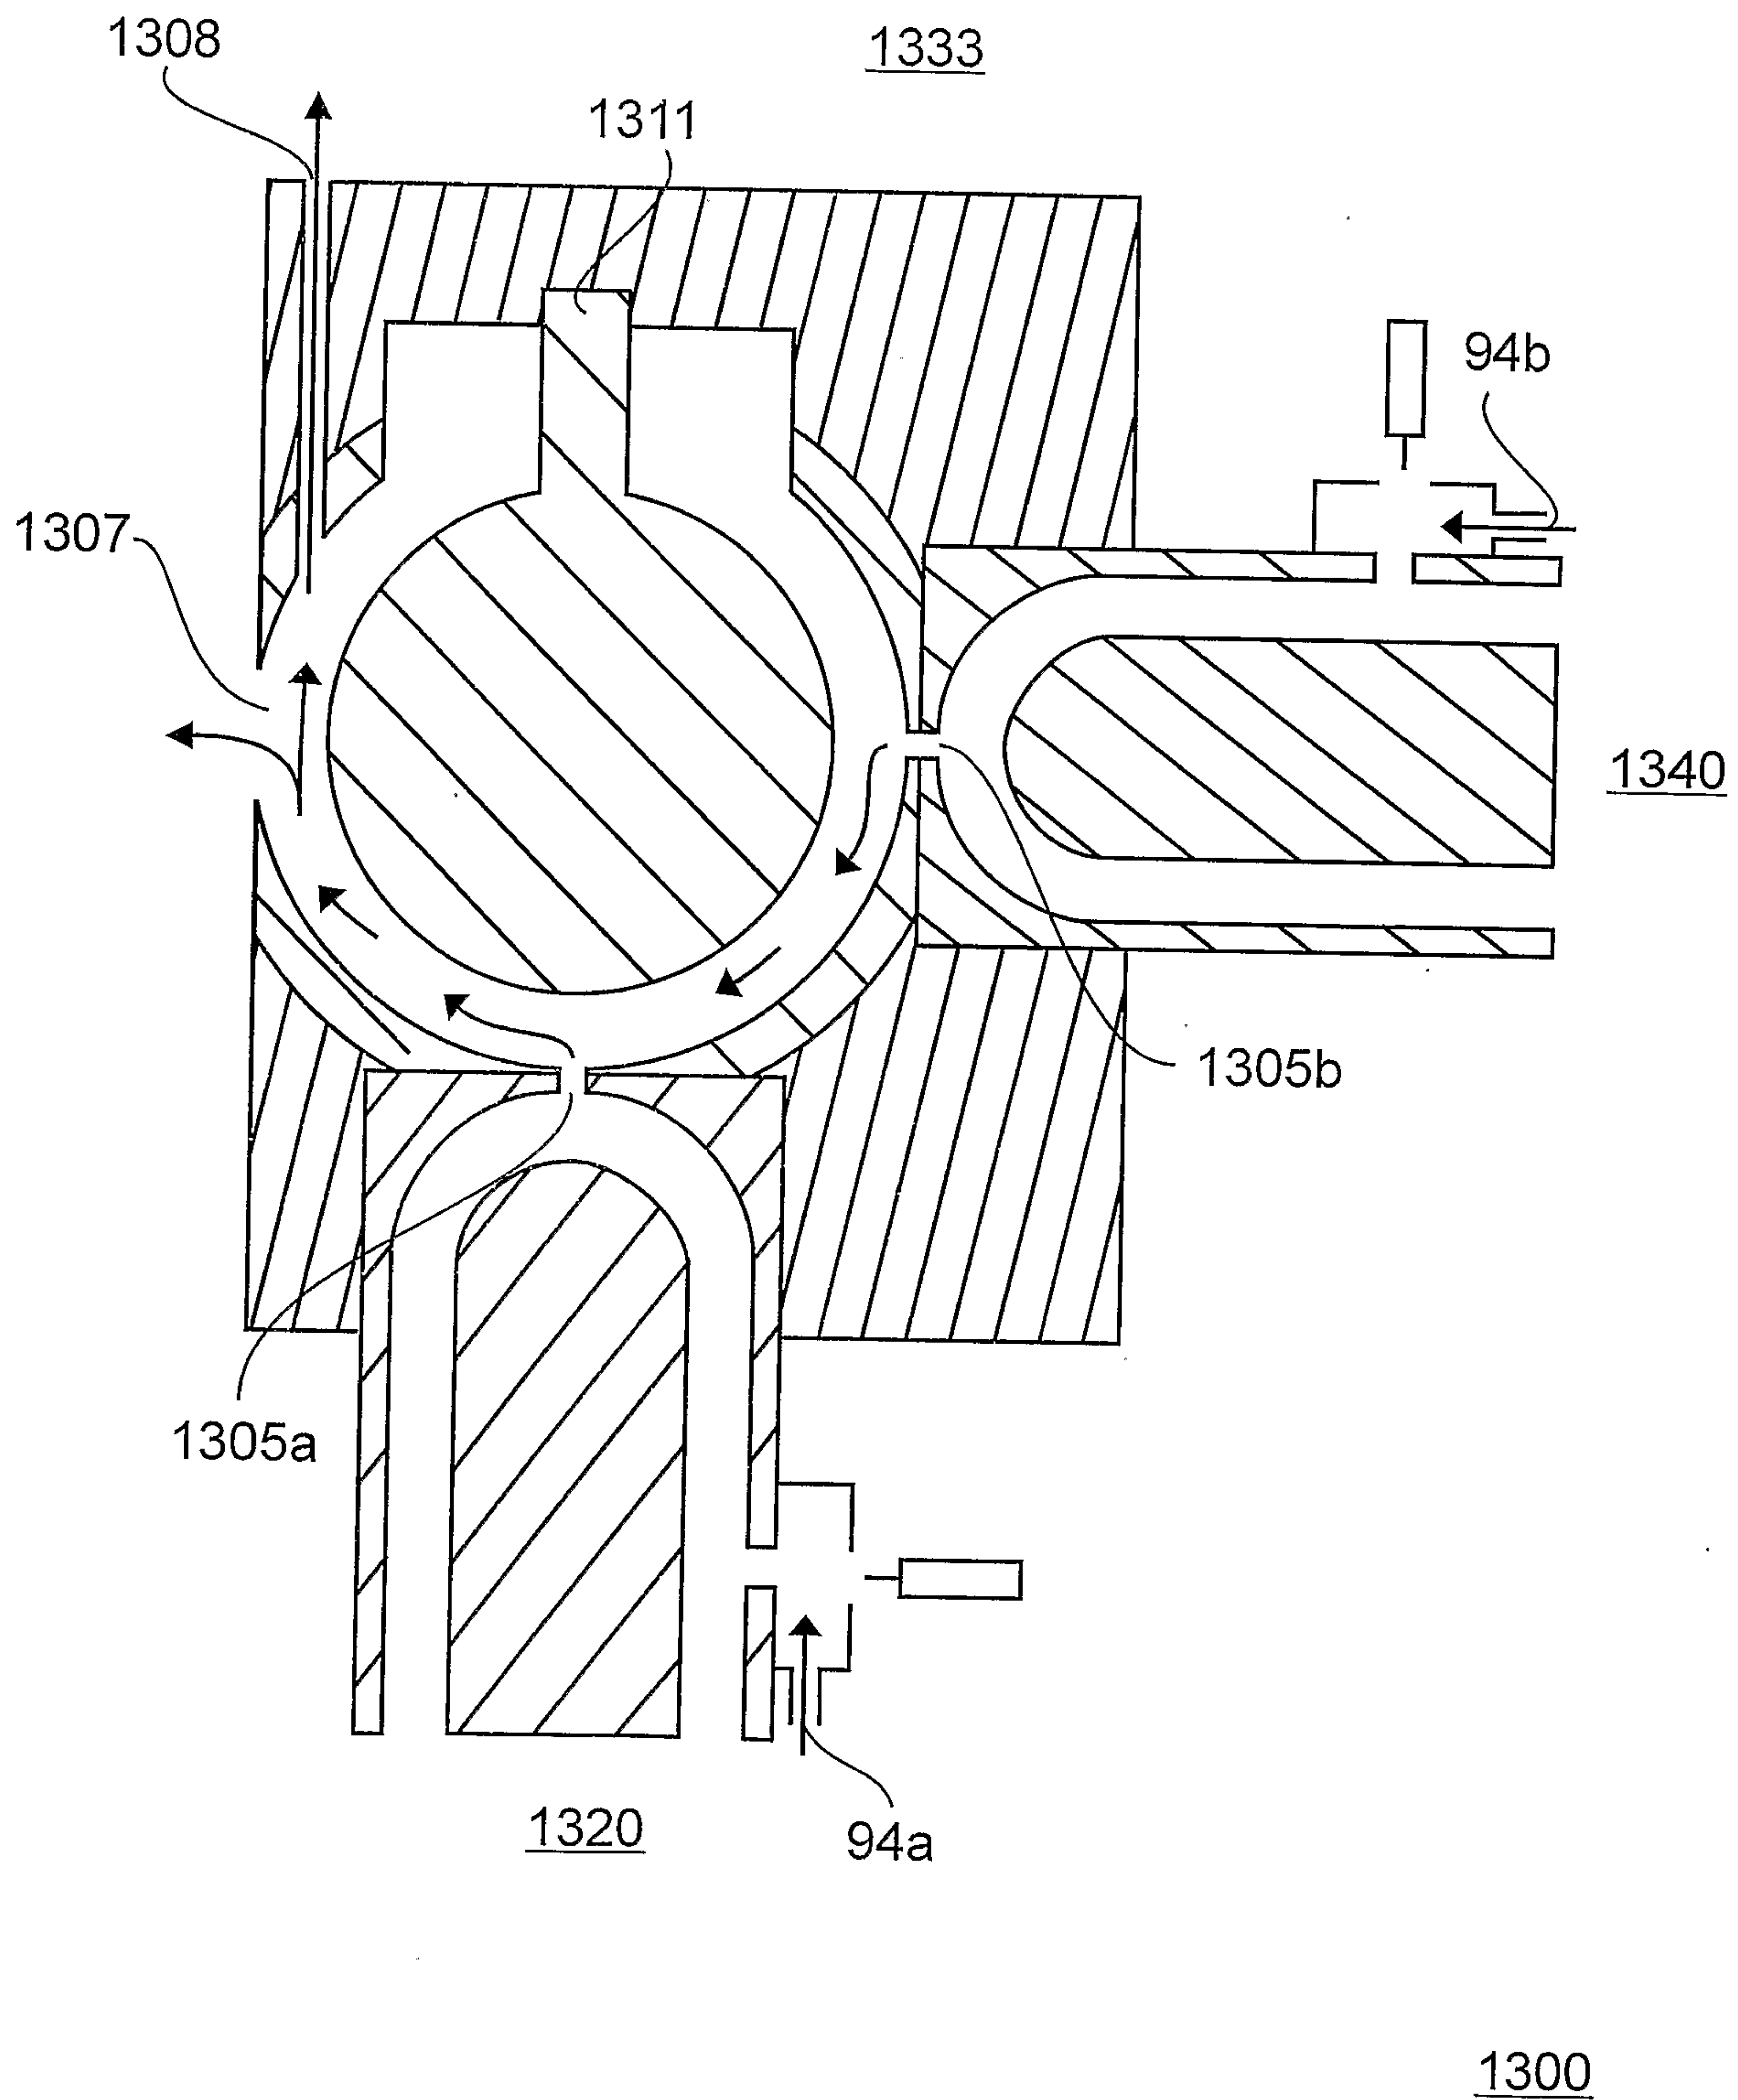


Figure 13

20/20

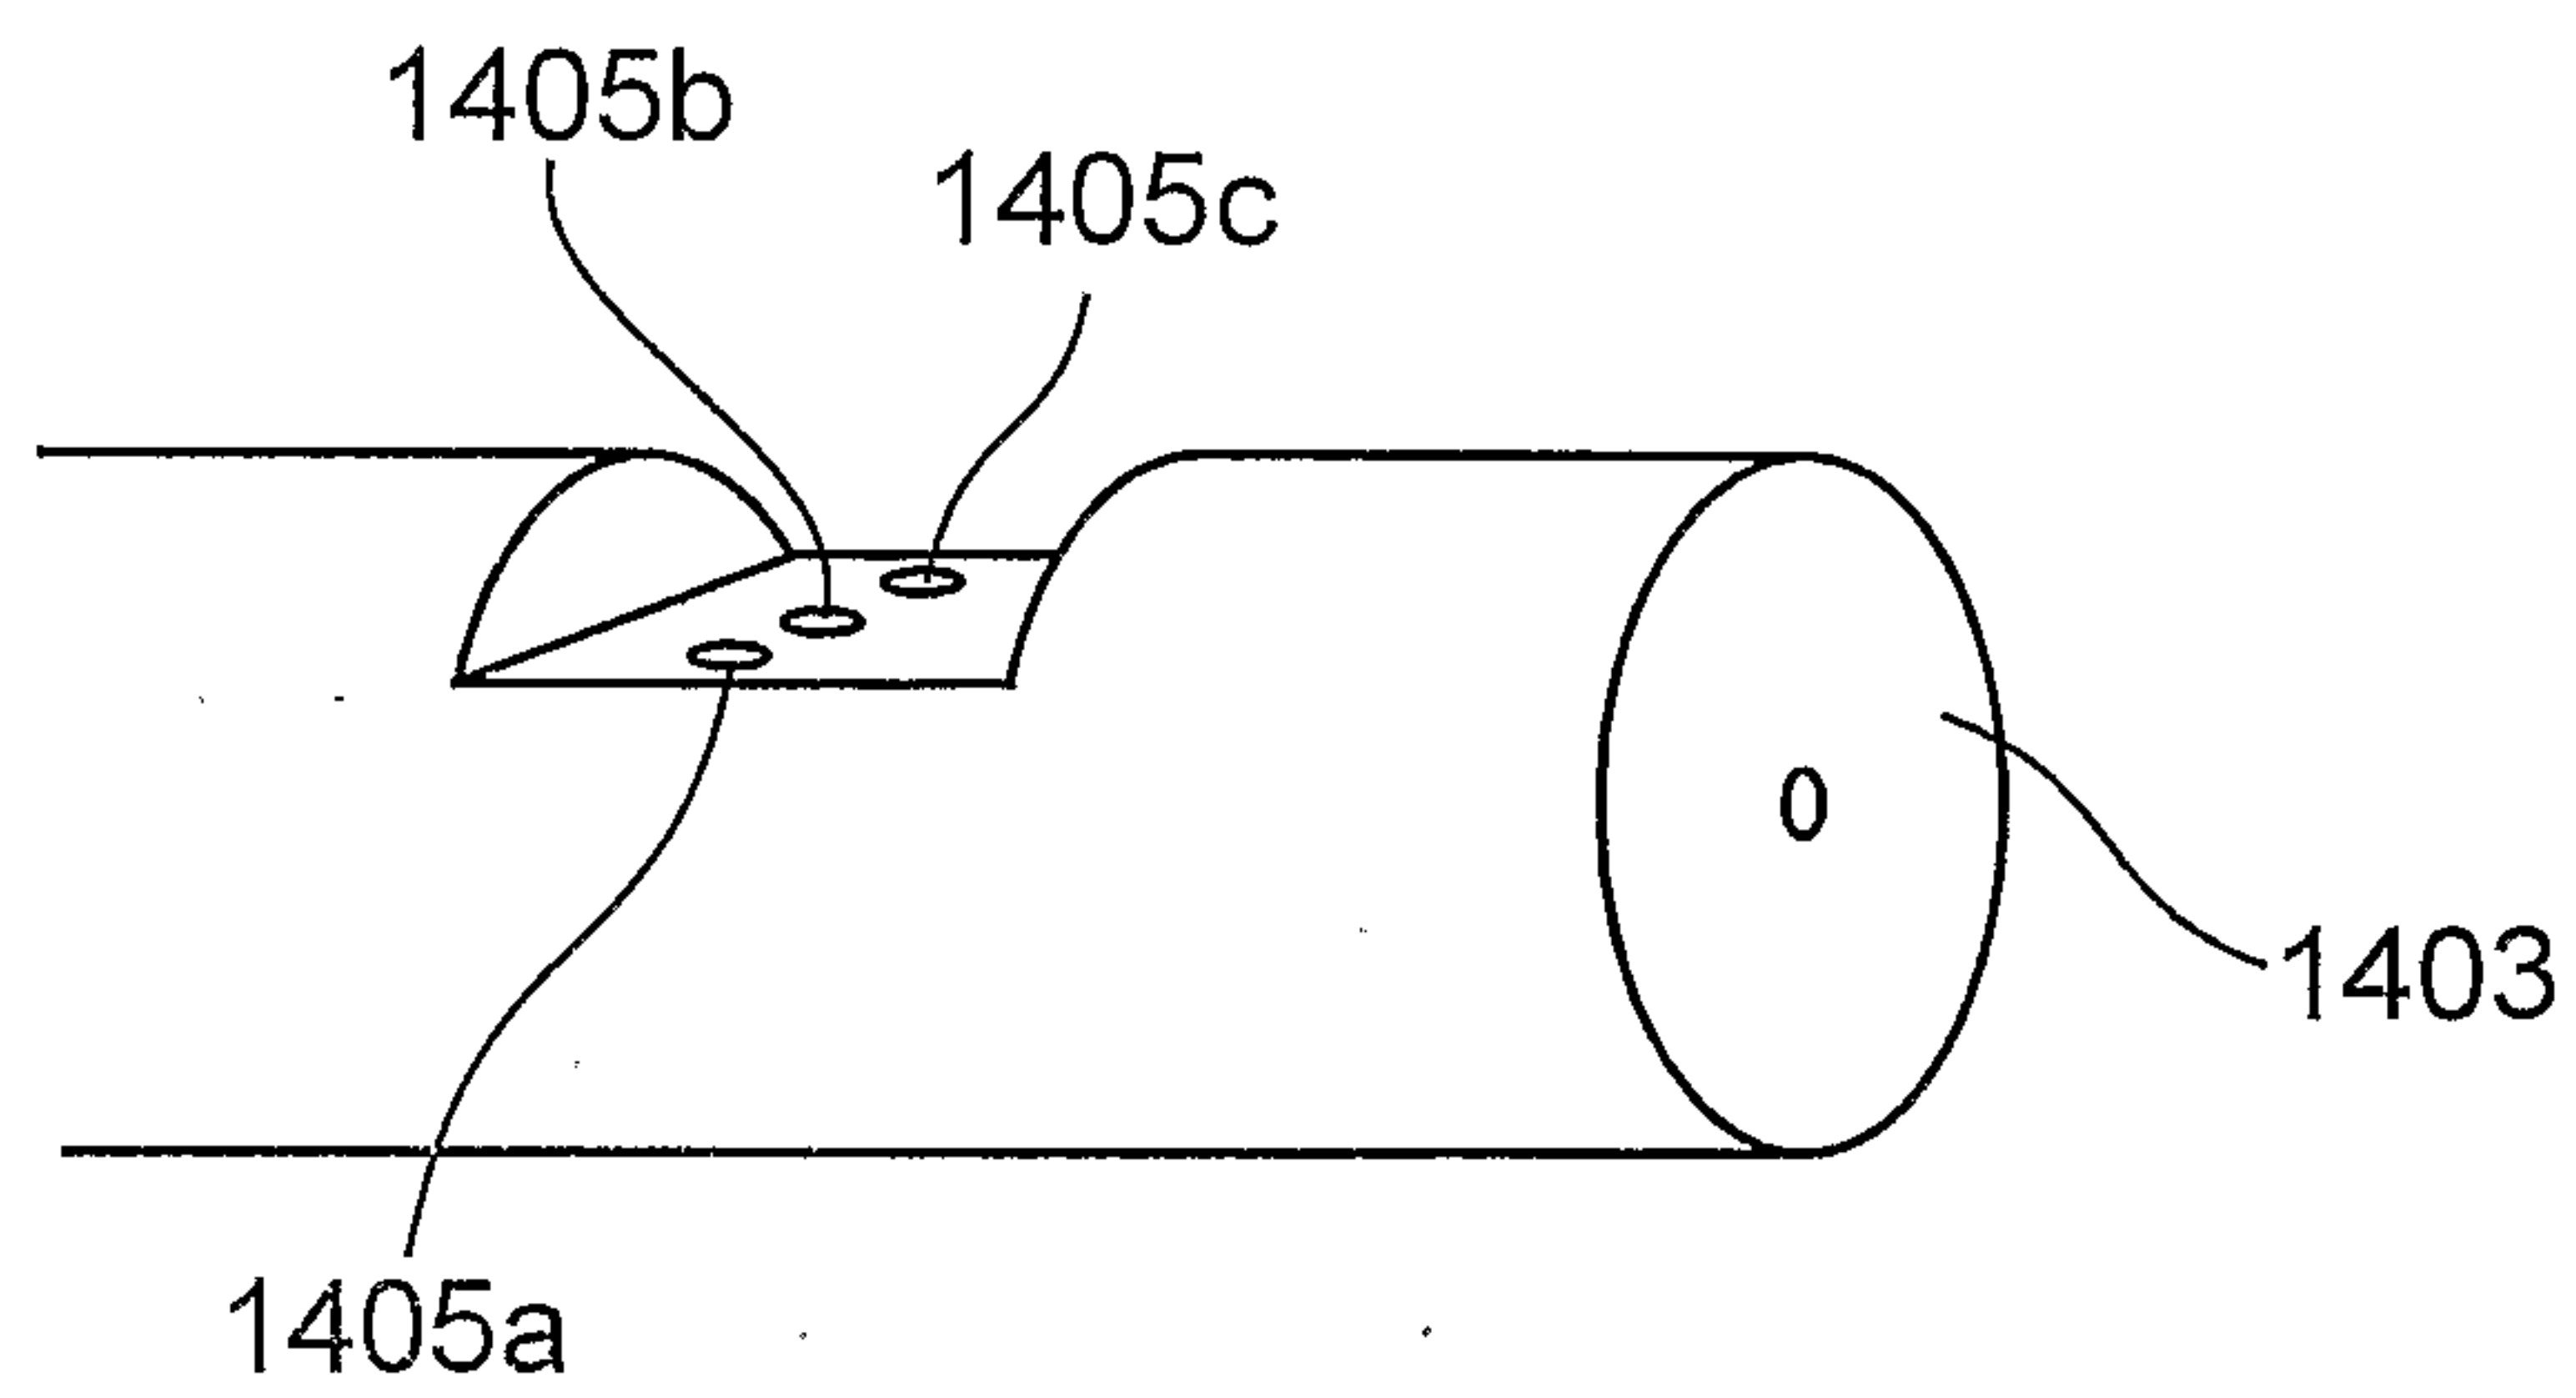


Figure 14a

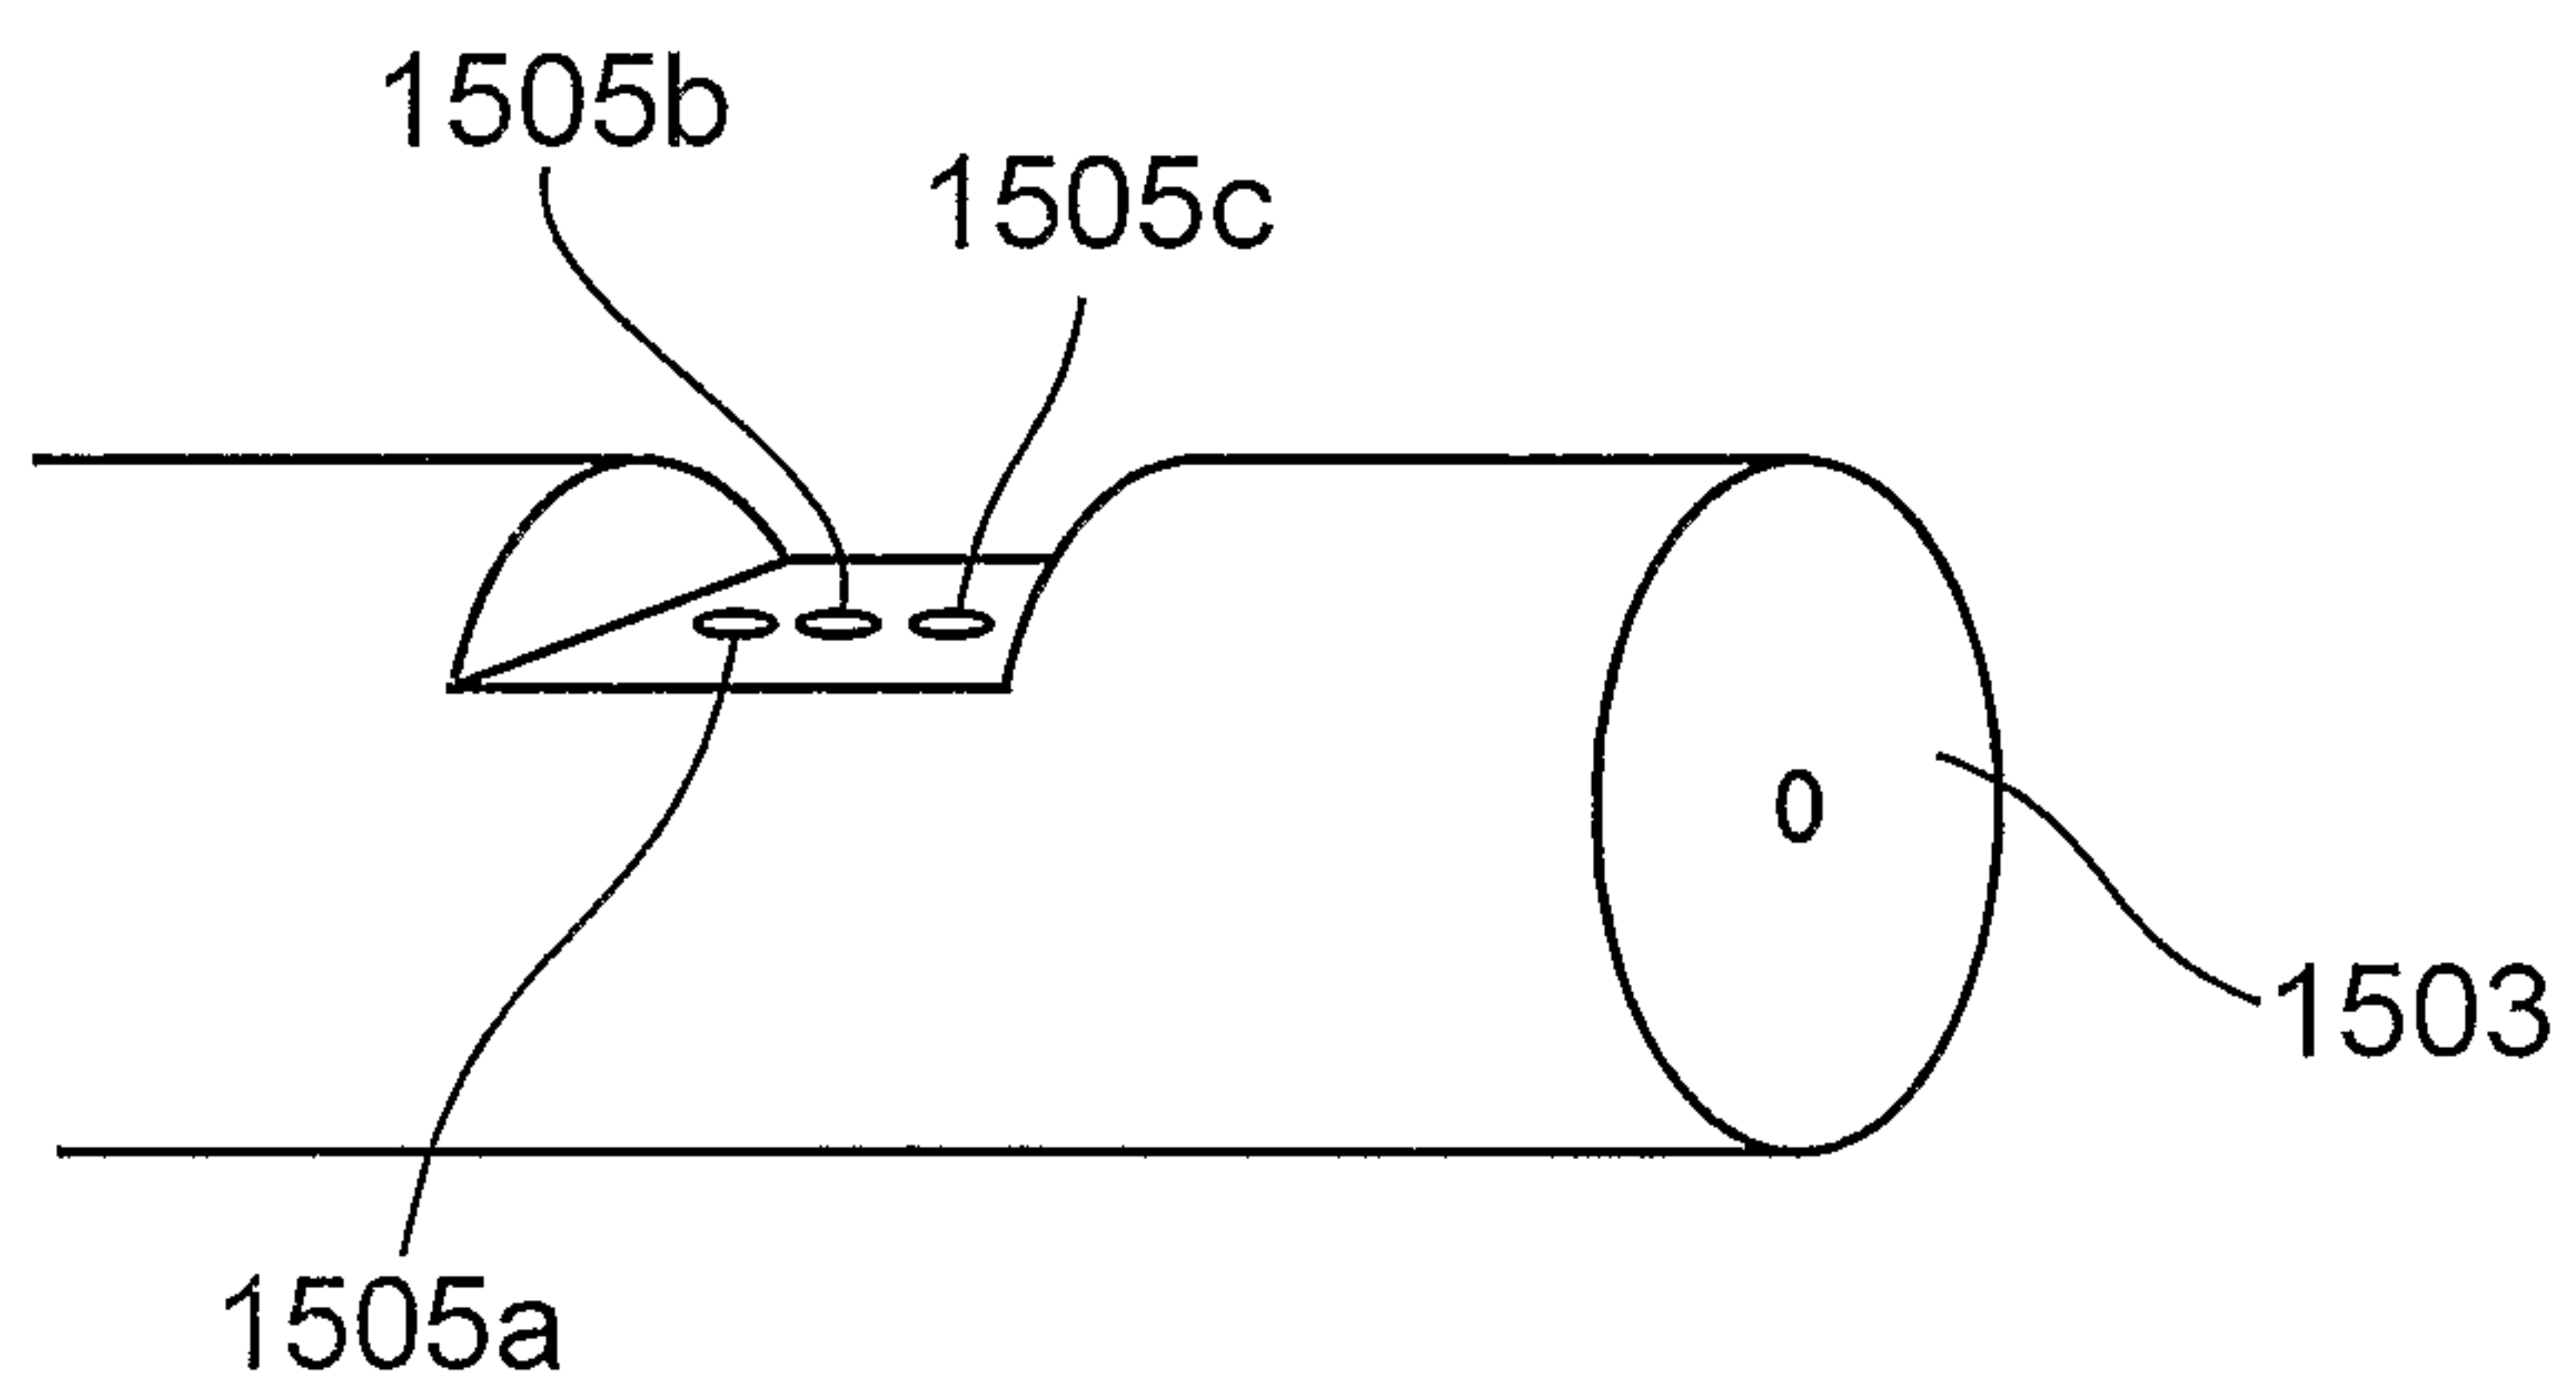


Figure 14b

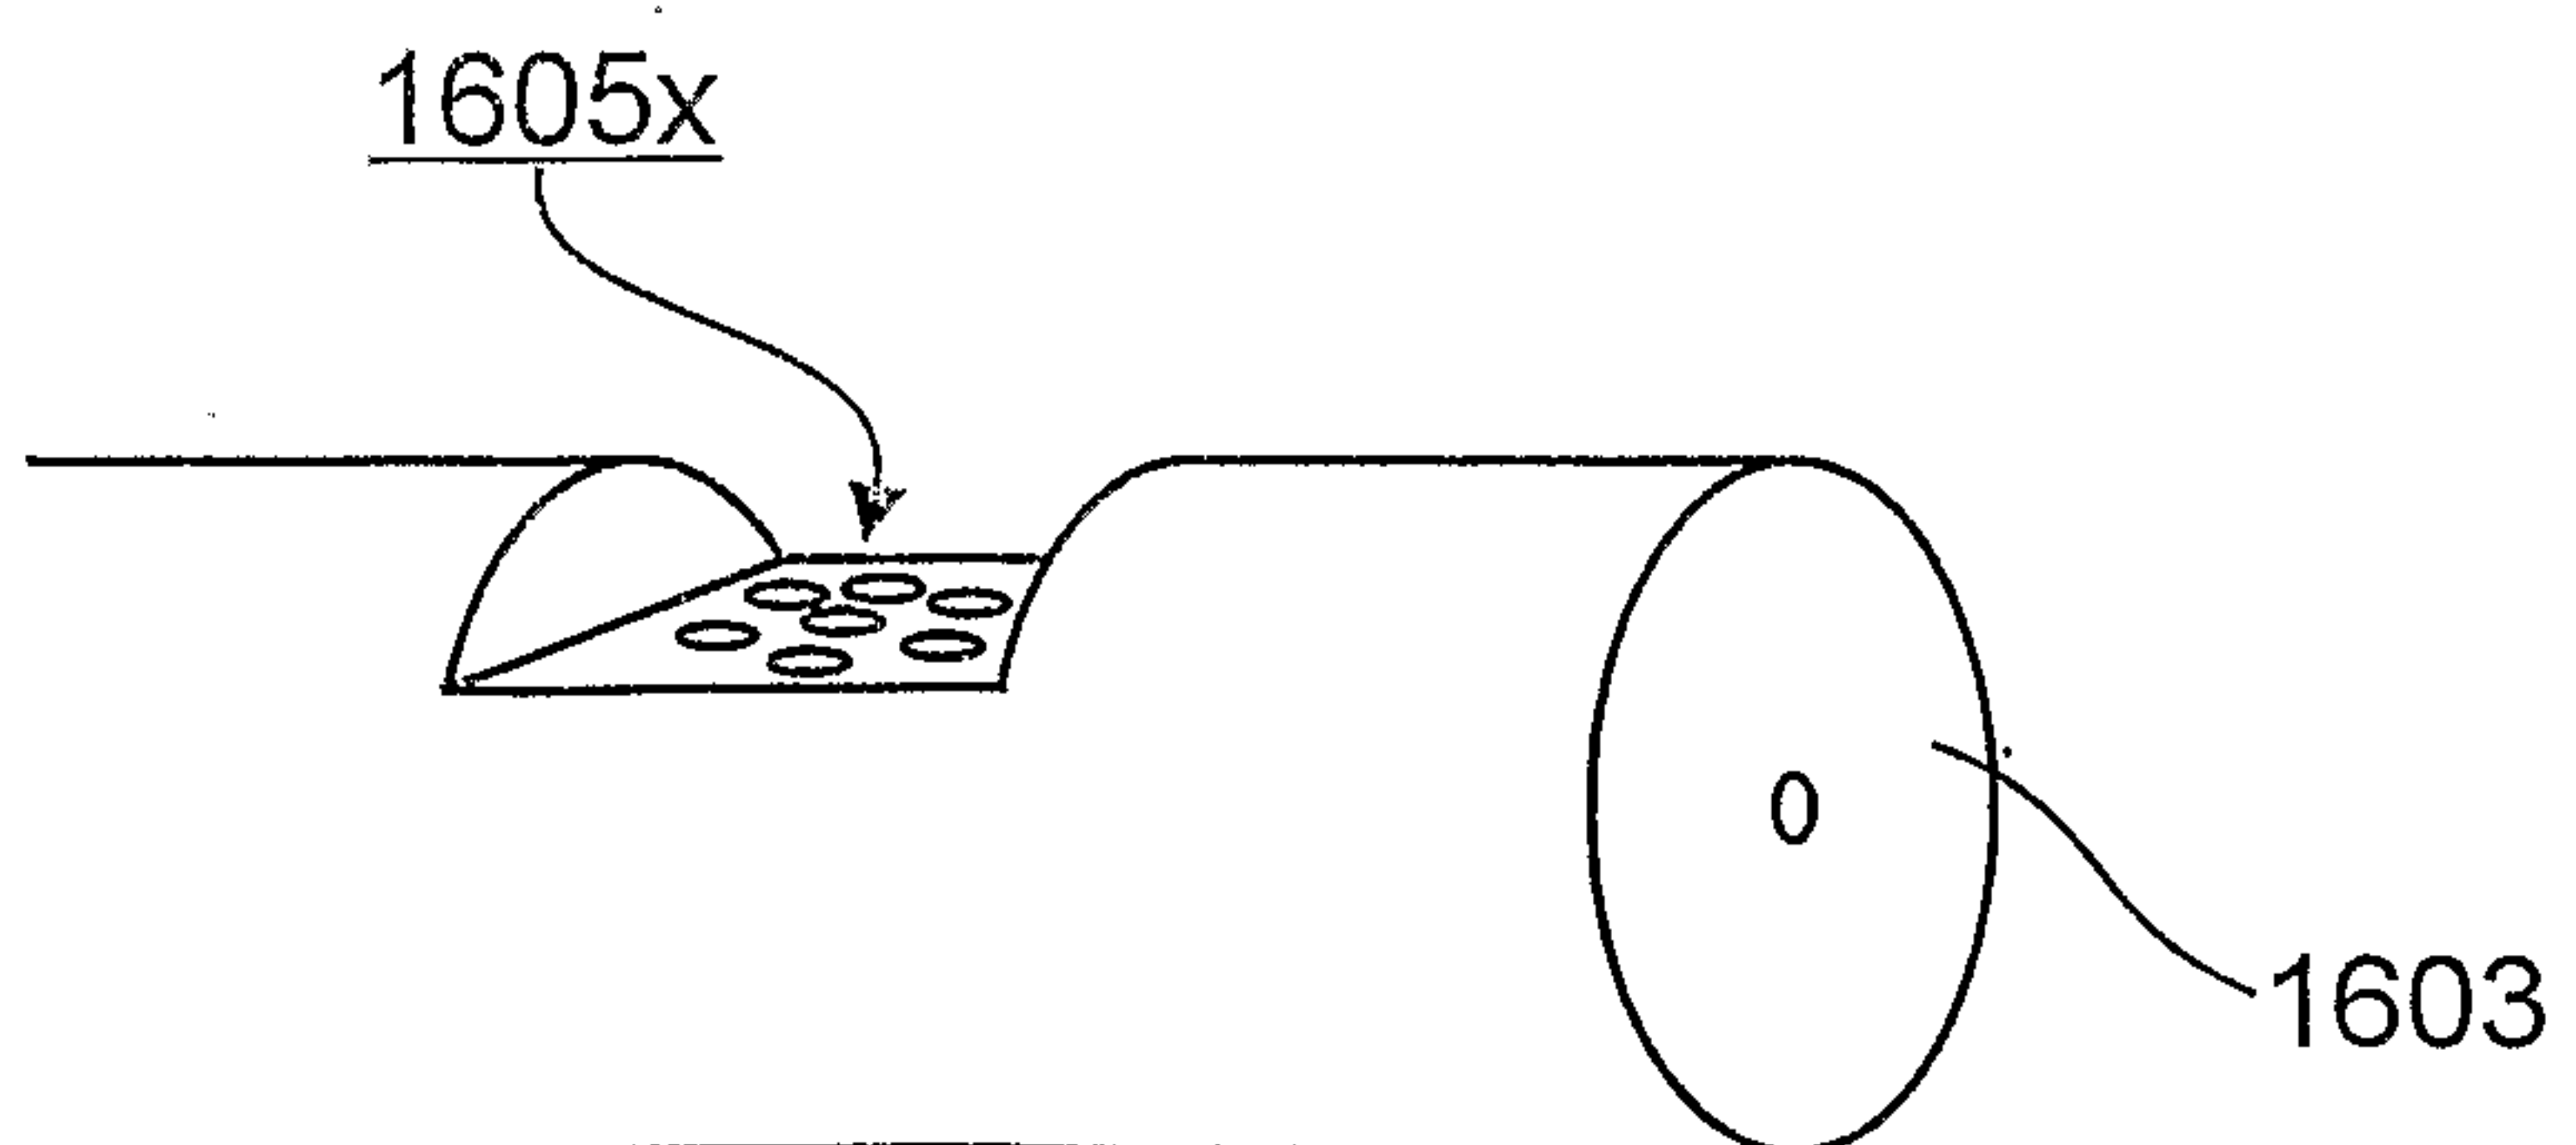


Figure 14c

