



(86) Date de dépôt PCT/PCT Filing Date: 2015/11/25
(87) Date publication PCT/PCT Publication Date: 2016/06/09
(85) Entrée phase nationale/National Entry: 2017/05/29
(86) N° demande PCT/PCT Application No.: US 2015/062750
(87) N° publication PCT/PCT Publication No.: 2016/089702
(30) Priorité/Priority: 2014/12/04 (US14/561,133)

(51) Cl.Int./Int.Cl. *A61M 5/172* (2006.01),
A61M 5/142 (2006.01), *G06F 19/00* (2011.01)

(71) Demandeur/Applicant:
MEDTRONIC MINIMED, INC., US

(72) Inventeurs/Inventors:
MONIRABBASI, SALMAN, US;
LINTEREUR, LOUIS J., US;
YAN, JIN, US;
TORRES, LINDA I., US

(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : PROCEDES DE TRANSITIONS DE MODES DE FONCTIONNEMENT, ET DISPOSITIFS ET SYSTEMES DE
PERFUSION ASSOCIES

(54) Title: METHODS FOR OPERATING MODE TRANSITIONS AND RELATED INFUSION DEVICES AND SYSTEMS

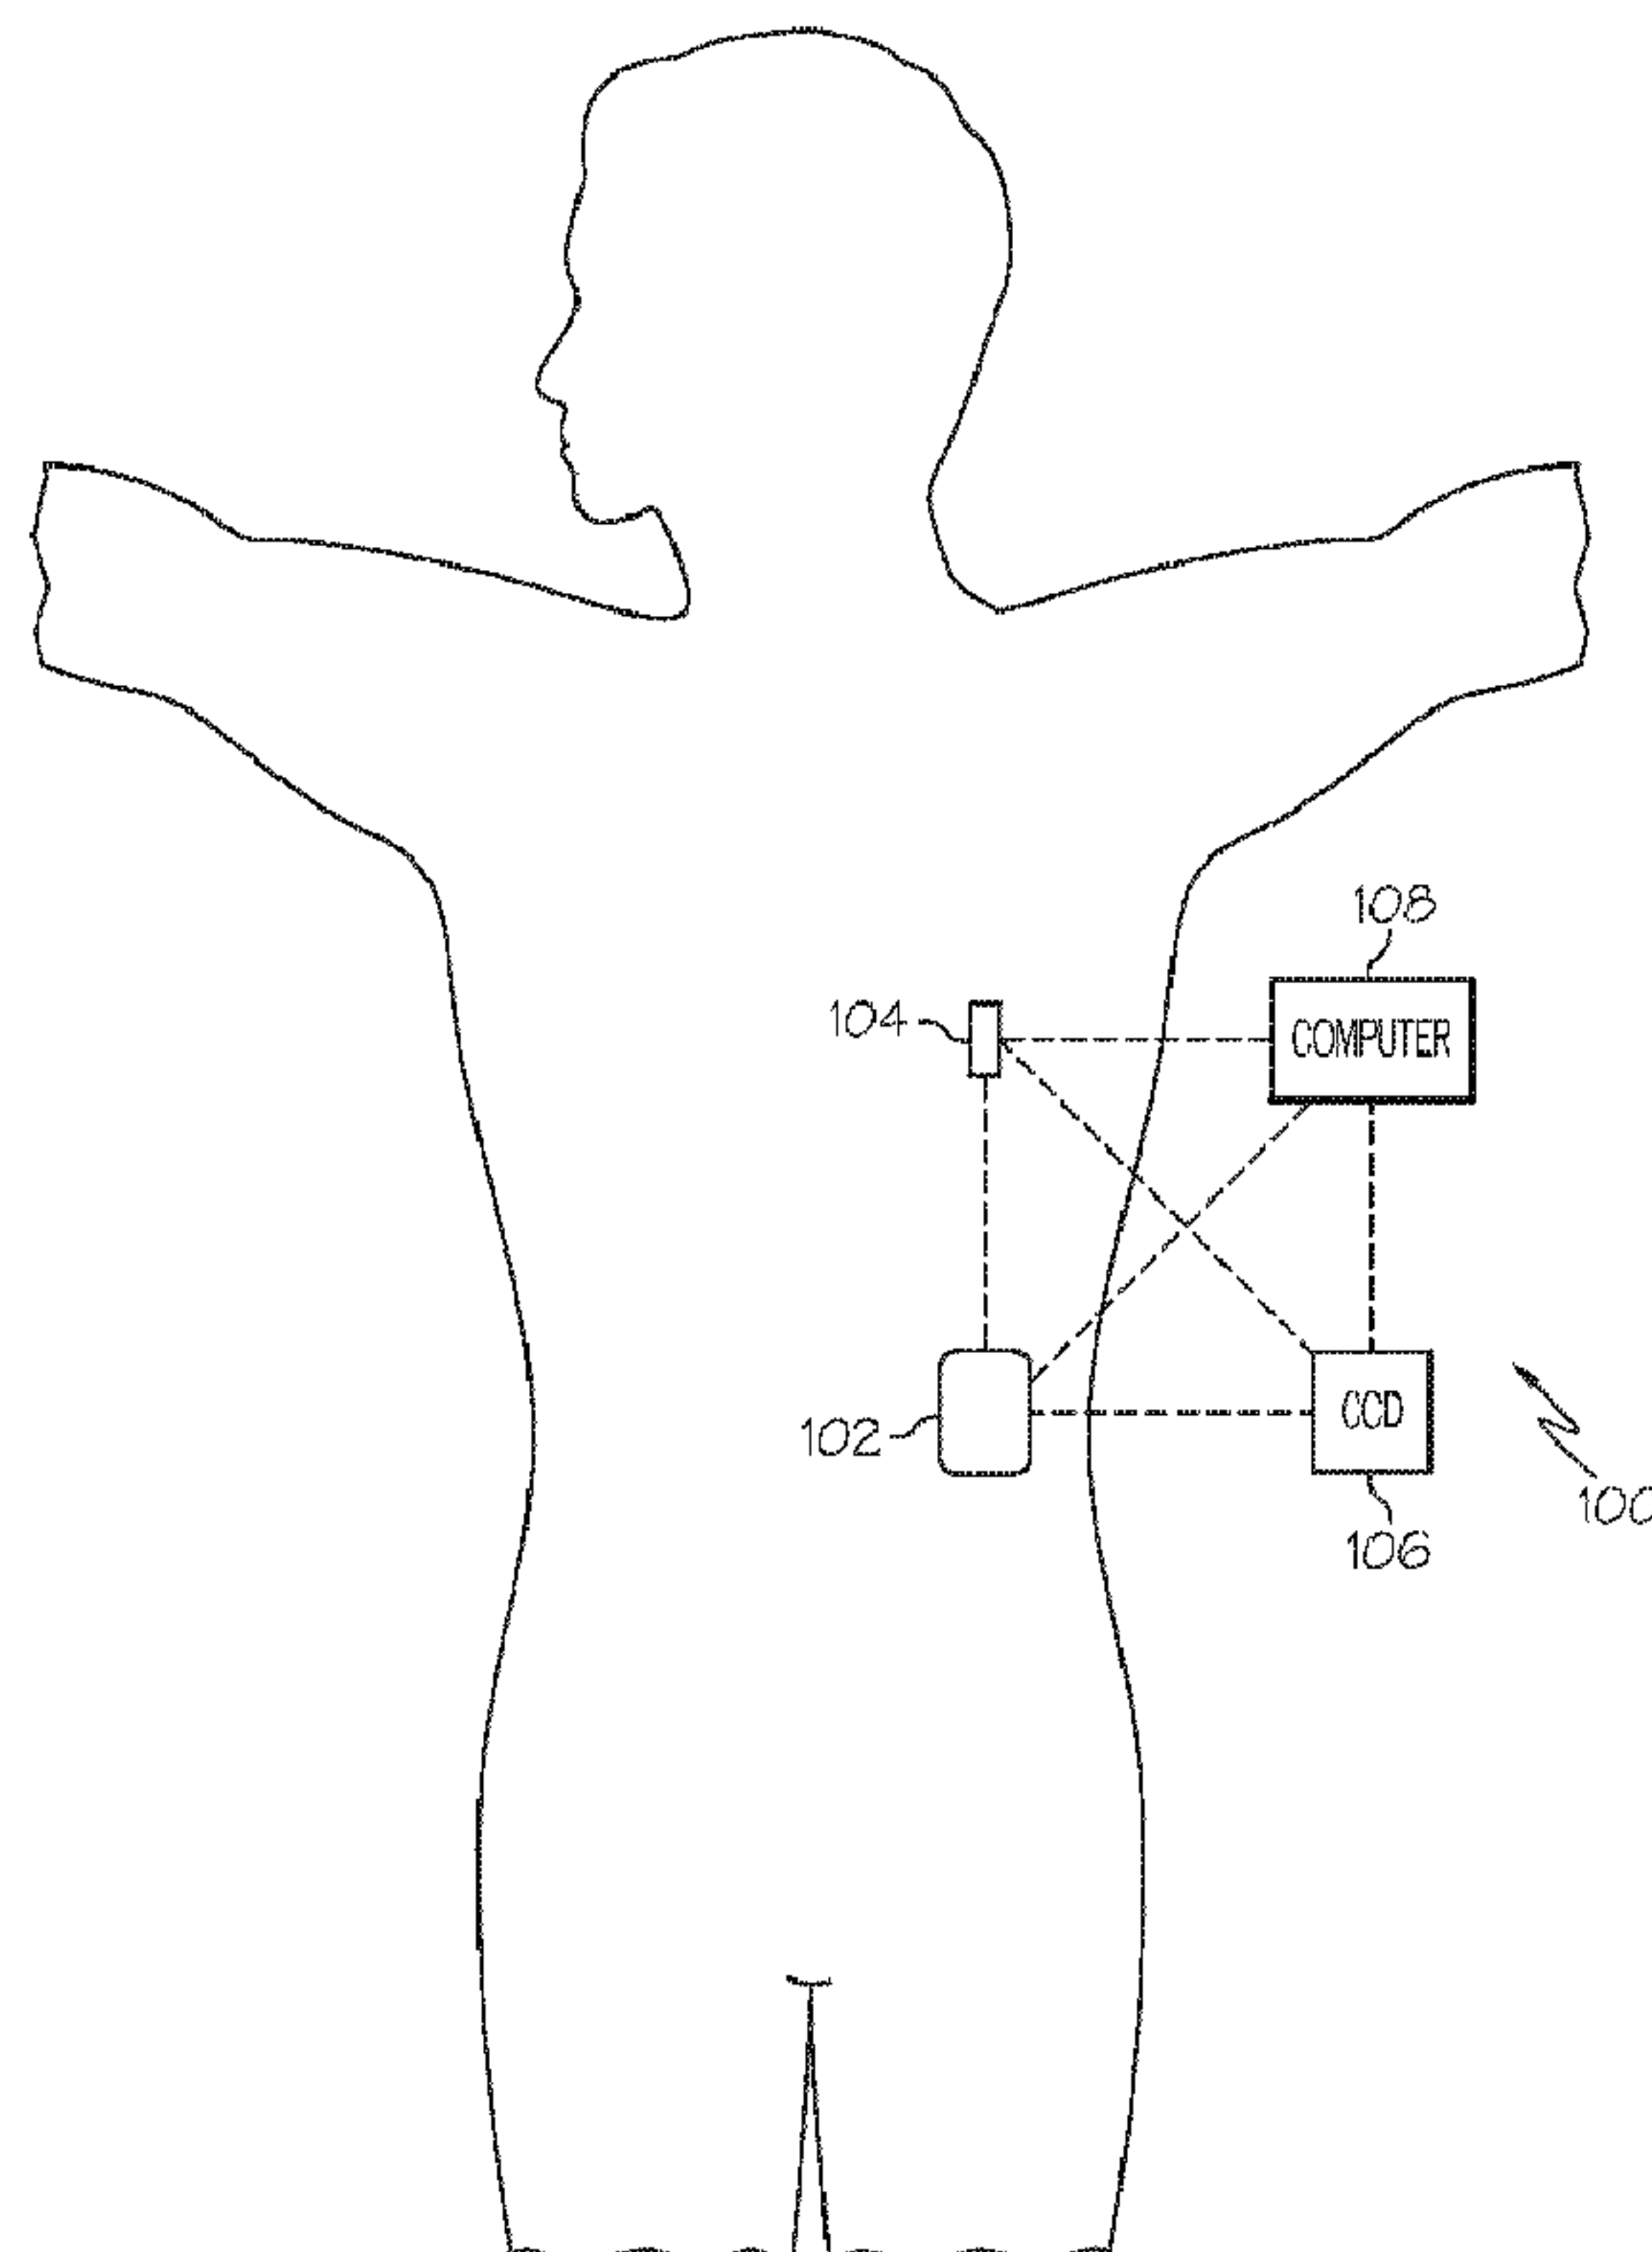


FIG. 1

(57) **Abrégé/Abstract:**

Infusion systems, infusion devices, and related operating methods are provided. An exemplary method involves operating an infusion device to deliver fluid to a user in accordance with a first operating mode of a plurality of operating modes, obtaining



(57) **Abrégé(suite)/Abstract(continued):**

operational information pertaining to the first operating mode, and obtaining clinical information pertaining to the user. A destination operating mode of the plurality of operating modes is determined based at least in part on the operational information and the clinical information, and the infusion device is operated to deliver the fluid in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
9 June 2016 (09.06.2016)



(10) International Publication Number
WO 2016/089702 A1

(51) International Patent Classification:
A61M 5/172 (2006.01) *G06F 19/00* (2011.01)

(21) International Application Number:
PCT/US2015/062750

(22) International Filing Date:
25 November 2015 (25.11.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/561,133 4 December 2014 (04.12.2014) US

(71) Applicant: **MEDTRONIC MINIMED, INC.** [US/US];
18000 Devonshire Street, Northridge, California 91325-
1219 (US).

(72) Inventors: **MONIRABBASI, Salman**; 7100 Playa Vista
Dr, #409, Playa Vista, California 90094 (US).
LINTEREUR, Louis J.; 25512 Magnolia Lane, Stevenson
Ranch, California 91381 (US). **YAN, Jin**; 10519 Eton Av-

enue, Chatsworth, California 91311 (US). **TORRES, Linda I.**; 4009 Bending Oak Court, Moorpark, California 93021 (US).

(74) Agent: **WALTERS, James R.**; Ingrassia Fisher & Lorenz,
PC, 7010 E. Cochise Rd., Scottsdale, Arizona 85253 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

[Continued on next page]

(54) Title: METHODS FOR OPERATING MODE TRANSITIONS AND RELATED INFUSION DEVICES AND SYSTEMS

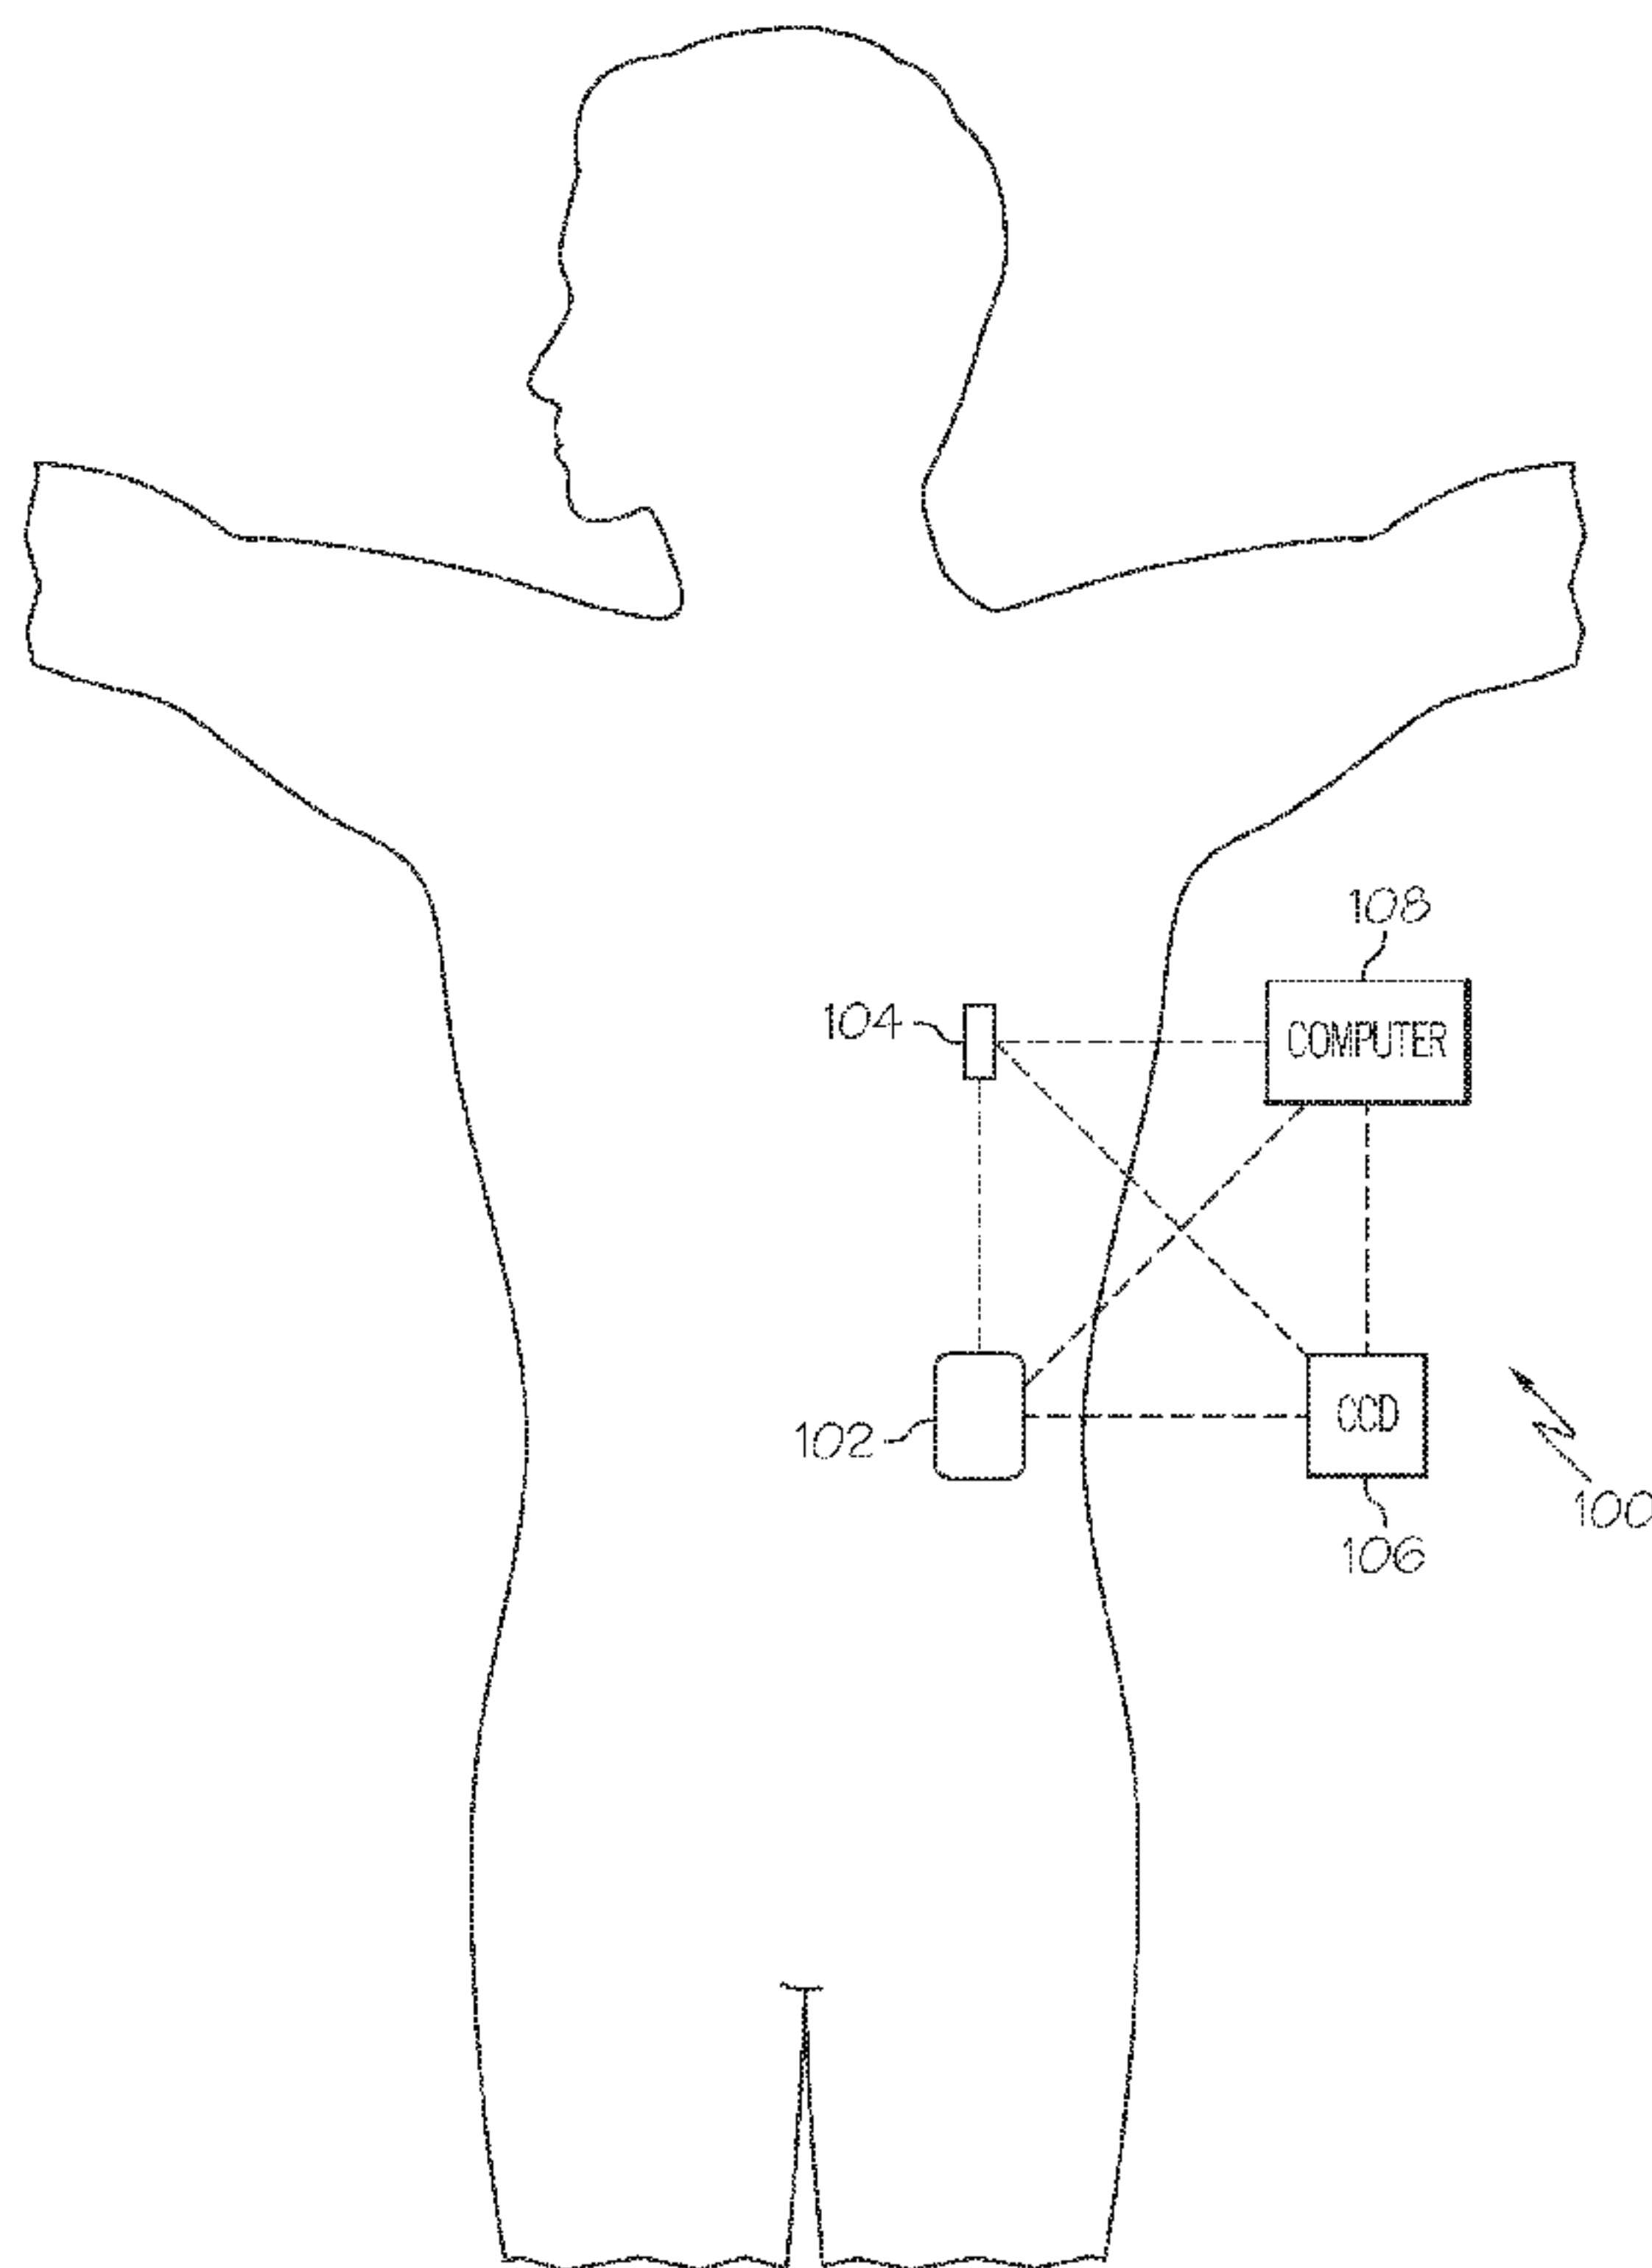


FIG. 1

(57) Abstract: Infusion systems, infusion devices, and related operating methods are provided. An exemplary method involves operating an infusion device to deliver fluid to a user in accordance with a first operating mode of a plurality of operating modes, obtaining operational information pertaining to the first operating mode, and obtaining clinical information pertaining to the user. A destination operating mode of the plurality of operating modes is determined based at least in part on the operational information and the clinical information, and the infusion device is operated to deliver the fluid in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

WO 2016/089702 A1

TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report (Art. 21(3))*

METHODS FOR OPERATING MODE TRANSITIONS AND RELATED INFUSION DEVICES AND SYSTEMS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This PCT application claims the benefit of, and claims priority to: United States Patent Application Serial Number 14/561,133, filed December 4, 2014.

TECHNICAL FIELD

[0002] Embodiments of the subject matter described herein relate generally to medical devices, and more particularly, embodiments of the subject matter relate to managing transitions into fluid infusion device operating modes.

BACKGROUND

[0003] Infusion pump devices and systems are relatively well known in the medical arts, for use in delivering or dispensing an agent, such as insulin or another prescribed medication, to a patient. A typical infusion pump includes a pump drive system which typically includes a small motor and drive train components that convert rotational motor motion to a translational displacement of a plunger (or stopper) in a reservoir that delivers medication from the reservoir to the body of a user via a fluid path created between the reservoir and the body of a user. Use of infusion pump therapy has been increasing, especially for delivering insulin for diabetics.

[0004] Continuous insulin infusion provides greater control of a diabetic's condition, and hence, control schemes are being developed that allow insulin infusion pumps to monitor and regulate a user's blood glucose level in a substantially continuous and autonomous manner. For example, an insulin infusion pump may operate in a closed-loop operating mode overnight while a user is sleeping to regulate the user's glucose level to a target glucose level. In practice, multiple different operating modes for providing continuous insulin infusion may be supported by an infusion pump. However, care must be taken when transitioning between operating modes to avoid potentially compromising a user's condition and ensure compliance with applicable regulatory requirements.

[0005] Additionally, in some situations, one or more preconditions must be satisfied before entering to a particular operating mode is allowed. When preconditions are not satisfied, entry into the operating mode may be denied, which may frustrate a user who

would like to operate the infusion pump in that particular operating mode at that particular moment in time. Additionally, after entering a particular operating mode, various conditions may be encountered while operating the infusion pump in that operating mode that result in generation of alerts, which could be disruptive or distracting to the user. Thus, it is desirable to provide multiple different operating modes that facilitate greater and more customizable control over the user's physiological condition without degrading the user experience.

BRIEF SUMMARY

[0006] Infusion devices, systems and related methods of operation in accordance with various operating modes are provided. One exemplary method involves operating an infusion device to deliver fluid to a user in accordance with a first operating mode of a plurality of operating modes, obtaining operational information pertaining to the first operating mode, and obtaining clinical information pertaining to the user. The method continues by determining a destination operating mode of the plurality of operating modes based at least in part on the operational information and the clinical information, and operating the infusion device to deliver the fluid in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

[0007] Another embodiment of an infusion device includes a data storage element to maintain operational information pertaining to a first operating mode of a plurality of operating modes and clinical information pertaining to a user, a motor operable to deliver fluid influencing a physiological condition to a body of the user, and a control system coupled to the motor and the data storage element. The control system operates the motor to deliver the fluid in accordance with the first operating mode, determines a destination operating mode of the plurality of operating modes based at least in part on the operational information and the clinical information, and operates the infusion device to deliver the fluid in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

[0008] In yet another embodiment, a method of operating an infusion device operable to deliver insulin to a user involves operating the infusion device to deliver the insulin in accordance with a first operating mode of a plurality of operating modes, obtaining operational information pertaining to the first operating mode, and obtaining one or more glucose values for the user. In response to an indication to terminate the first operating

mode, the method continues by determining a set of one or more possible operating modes from the plurality of operating modes based at least in part on the one or more glucose values and the operational information. The method selects a destination operating mode from the set of one or more possible operating modes and operates the infusion device to deliver the insulin in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

[0009] The invention also provides an infusion device for a medicinal fluid, the device including: a motor operable to deliver the fluid in response to commands; a management system coupled to the motor for generating said commands; wherein the management system includes: a plurality of control modules each configured to generate said commands in accordance with a different respective operating mode; a supervisory module connected to each of the control modules and configured to monitor the status of the control modules, and to receive a mode transition signal; a command multiplexer connected to each of the control modules, to the motor, and to the supervisory module and configured to direct the said commands from a selected one of the control modules to the motor, in accordance with a selection signal from the supervisory module; the supervisory module being further configured to change the selection signal, upon receipt of the mode transition signal thereby causing the command multiplexer to direct the commands from a different selected one of the control modules to the motor.

[0010] The infusion device may further include a user interface and the mode transition signal may be generated by a user manipulating the user interface. The management system may be configured to generate the mode transition signal in response to a predetermined maximum operation time limit being reached by a control module that is generating the commands being sent to the motor. In addition, or instead, the management system may be configured to generate the mode transition signal in response to a unreliability being detected in a control module that is generating the commands being sent to the motor. The supervisory module maybe configured to inhibit the selection on receipt of the mode transition signal, of a control module in which an unreliability has been detected.

[0011] The said status may include a prediction of future commands that would be directed to the motor if a respective control module were selected, and the supervisory module may be configured to inhibit the selection on receipt of the mode transition signal, of a control module where the future commands would result in one or more of

transgression of a pre-specified maximum suspension time, transgression of a pre-specified maximum delivery limit, and failure to meet a pre-specified minimum delivery threshold.

[0012] The operating modes may be selected from a list comprising open-loop mode, closed-loop mode, LGS mode in which a basal rate of delivery of the medicinal fluid is provided while a physiological analyte level that is controlled by the medicinal fluid is above a threshold and suspended while it is not, and PLGM mode in which a basal rate of delivery of the medicinal fluid is provided while a predicted level of the physiological analyte that is controlled by the medicinal fluid is above a threshold and suspended while it is not. The medicinal fluid may be insulin.

[0013] This summary is provided to introduce a selection of concepts in a simplified form that are further described below in the detailed description. This summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] A more complete understanding of the subject matter may be derived by referring to the detailed description and claims when considered in conjunction with the following figures, wherein like reference numbers refer to similar elements throughout the figures, which may be illustrated for simplicity and clarity and are not necessarily drawn to scale.

[0015] FIG. 1 depicts an exemplary embodiment of an infusion system;

[0016] FIG. 2 depicts a plan view of an exemplary embodiment of a fluid infusion device suitable for use in the infusion system of FIG. 1;

[0017] FIG. 3 is an exploded perspective view of the fluid infusion device of FIG. 2;

[0018] FIG. 4 is a cross-sectional view of the fluid infusion device of FIGS. 2-3 as viewed along line 4-4 in FIG. 3 when assembled with a reservoir inserted in the infusion device;

[0019] FIG. 5 is a block diagram of an exemplary control system suitable for use in a fluid infusion device, such as the fluid infusion device of FIG. 1 or FIG. 2;

[0020] FIG. 6 is a block diagram of an exemplary pump control system suitable for use in the control system of FIG. 5;

[0021] FIG. 7 is a block diagram of a closed-loop control system that may be implemented or otherwise supported by the pump control system in the fluid infusion device of FIG. 5 in one or more exemplary embodiments;

[0022] FIG. 8 is a block diagram of an exemplary management system that may be implemented or otherwise supported by the pump control system in the fluid infusion device of FIG. 5 in one or more exemplary embodiments; and

[0023] FIG. 9 is a flow diagram of an exemplary operating mode transition process suitable for use with the control system of FIG. 5.

DETAILED DESCRIPTION

[0024] The following detailed description is merely illustrative in nature and is not intended to limit the embodiments of the subject matter or the application and uses of such embodiments. As used herein, the word “exemplary” means “serving as an example, instance, or illustration.” Any implementation described herein as exemplary is not necessarily to be construed as preferred or advantageous over other implementations. Furthermore, there is no intention to be bound by any expressed or implied theory presented in the preceding technical field, background, brief summary or the following detailed description.

[0025] While the subject matter described herein can be implemented in any electronic device that includes a motor, exemplary embodiments described below are implemented in the form of medical devices, such as portable electronic medical devices. Although many different applications are possible, the following description focuses on a fluid infusion device (or infusion pump) as part of an infusion system deployment. For the sake of brevity, conventional techniques related to infusion system operation, insulin pump and/or infusion set operation, and other functional aspects of the systems (and the individual operating components of the systems) may not be described in detail here. Examples of infusion pumps may be of the type described in, but not limited to, United States Patent numbers: 4,562,751; 4,685,903; 5,080,653; 5,505,709; 5,097,122; 6,485,465; 6,554,798; 6,558,320; 6,558,351; 6,641,533; 6,659,980; 6,752,787; 6,817,990; 6,932,584; and 7,621,893; each of which are herein incorporated by reference.

[0026] Described herein is a fluid infusion devices including a motor that is operable to linearly displace a plunger (or stopper) of a reservoir provided within the fluid infusion device to deliver a dosage of fluid, such as insulin, to the body of a user. However, as the invention relates to the operation of the infusion device and the structure necessary for that

operation detail of any mechanical structures for conveying or propelling the fluid is given as an example only. Dosage commands that govern operation of the motor, i.e. the device responsible for directly or indirectly imparting motion to the fluid, may be generated in an automated manner in accordance with the delivery control scheme associated with a particular operating mode. The fluid infusion device may be operated in any one of a number of operating modes and be able to switch between the modes. Examples of operating modes are closed-loop, predictive, and open-loop. The device typically contains algorithms which when executed implement respective ones of the operating modes. In that case switching modes involves switching from one algorithm to another. In a closed-loop operating mode, for example, the dosage commands are generated based on a difference between a current (or most recent) measurement of a physiological condition in the body of the user (e.g., an interstitial fluid glucose level in the case of diabetes management by infusion of insulin) and a target (or reference) value for that physiological condition. In a predictive operating mode, the dosage commands may be influenced by a predicted value (or anticipated measurement) for that physiological condition in the body of the user at some point in the future. Conversely, in an open-loop operating mode, the dosage commands may be configured to implement a predetermined delivery rate. Such rate may be substantially independent of the current or predicted measurements of the physiological condition of the user.

[0027] As described in greater detail below primarily in the context of FIGS. 8-9, in exemplary embodiments, transitions between operating modes implemented by the infusion device are also supervised or otherwise managed to maintain satisfactory control of the user's physiological condition and ensure compliance with applicable delivery control rules. The delivery control rules may be dictated by regulatory requirements, manufacturer requirements, device settings, user preferences, or the like. In this regard, the destination operating mode is initialized using operational information pertaining to the current operation of the infusion device in the initial operating mode being transitioned from to provide a relatively seamless transition between operating modes. In exemplary embodiments, before transitioning to the destination operating mode, information pertaining to the operating mode currently being implemented is obtained. The operational information characterizes the current instance of the current operating mode and may include, for example, delivery or suspension information (e.g., whether or not delivery was suspended at any time, the duration delivery was suspended, and the like), the values of any active timers (e.g., the duration of a current instance of delivery suspension, the

duration of a current refractory period, and the like), alert information (e.g., whether or not any alerts were generated, and information identifying what types of alerts were generated or the root cause) and information indicating why the current instance of the current operating mode is being exited. At least a portion of the operational information is provided to the destination operating mode upon the transition from the previous operating mode, with the operation of the infusion device in accordance with the destination operating mode being influenced by that operational information. For example, the destination operating mode may be initialized with the same timer values or counter values from the preceding operating mode to ensure that no time constraints or other applicable maximum limits are violated by the destination operating mode.

[0028] In exemplary embodiments, before transitioning into a destination operating mode, clinical status information pertaining to the physiological condition of the user is also obtained. As described above, the clinical information may include, for example, recent or historical sensor measurement values of the physiological condition of the user, reference measurement values of the physiological condition of the user, sensor calibration history for the user, and the like. In one or more embodiments, the destination operating mode is automatically determined based at least in part on portions of the clinical information and the operational information for the current operating mode along with the device settings or user preferences establishing a hierarchical order for the operating modes. In this regard, the clinical information and/or the operational information may be used to identify and exclude operating modes that are likely to violate any applicable constraints or requirements upon entry, with the hierarchical information for the operating modes being used to select the most preferable operating mode from among the remaining potential operating modes.

[0029] Turning now to FIG. 1, one exemplary embodiment of an infusion system 100 includes, without limitation, a fluid infusion device (or infusion pump) 102, a sensing arrangement 104, a command control device (CCD) 106, and a computer 108. The components of an infusion system 100 may be realized using different platforms, designs, and configurations, and the embodiment shown in FIG. 1 is not exhaustive or limiting. In practice, the infusion device 102 and the sensing arrangement 104 are secured at desired locations on the body of a user (or patient), as illustrated in FIG. 1. In this regard, the locations at which the infusion device 102 and the sensing arrangement 104 are secured to the body of the user in FIG. 1 are provided only as a representative, non-limiting, example. The elements of the infusion system 100 may be similar to those described in United

States Patent No. 8,674,288, the subject matter of which is hereby incorporated by reference in its entirety.

[0030] In the illustrated embodiment of FIG. 1, the infusion device 102 is designed as a portable medical device suitable for infusing a fluid, a liquid, a gel, or other agent into the body of a user. In exemplary embodiments, the infused fluid is insulin, although many other fluids may be administered through infusion such as, but not limited to, HIV drugs, drugs to treat pulmonary hypertension, iron chelation drugs, pain medications, anti-cancer treatments, medications, vitamins, hormones, or the like. In some embodiments, the fluid may include a nutritional supplement, a dye, a tracing medium, a saline medium, a hydration medium, or the like.

[0031] The sensing arrangement 104 generally represents the components of the infusion system 100 configured to sense, detect, measure or otherwise quantify a condition of the user, and may include a sensor, a monitor, or the like, for providing data indicative of the condition that is sensed, detected, measured or otherwise monitored by the sensing arrangement. In this regard, the sensing arrangement 104 may include electronics and enzymes reactive to a biological condition, such as a blood glucose level, or the like, of the user, and provide data indicative of the blood glucose level to the infusion device 102, the CCD 106 and/or the computer 108. For example, the infusion device 102, the CCD 106 and/or the computer 108 may include a display for presenting information or data to the user based on the sensor data received from the sensing arrangement 104, such as, for example, a current glucose level of the user, a graph or chart of the user's glucose level versus time, device status indicators, alert messages, or the like. In other embodiments, the infusion device 102, the CCD 106 and/or the computer 108 may include electronics and software that are configured to analyze sensor data and operate the infusion device 102 to deliver fluid to the body of the user based on the sensor data and/or preprogrammed delivery routines. Thus, in exemplary embodiments, one or more of the infusion device 102, the sensing arrangement 104, the CCD 106, and/or the computer 108 includes a transmitter, a receiver, and/or other transceiver electronics that allow for communication with other components of the infusion system 100, so that the sensing arrangement 104 may transmit sensor data or monitor data to one or more of the infusion device 102, the CCD 106 and/or the computer 108.

[0032] Still referring to FIG. 1, in various embodiments, the sensing arrangement 104 may be secured to the body of the user or embedded in the body of the user at a location that is remote from the location at which the infusion device 102 is secured to the body of

the user. In various other embodiments, the sensing arrangement 104 may be incorporated within the infusion device 102. In other embodiments, the sensing arrangement 104 may be separate and apart from the infusion device 102, and may be, for example, part of the CCD 106. In such embodiments, the sensing arrangement 104 may be configured to receive a biological sample, analyte, or the like, to measure a condition of the user.

[0033] As described above, in some embodiments, the CCD 106 and/or the computer 108 may include electronics and other components configured to perform processing, delivery routine storage, and to control the infusion device 102 in a manner that is influenced by sensor data measured by and/or received from the sensing arrangement 104. By including control functions in the CCD 106 and/or the computer 108, the infusion device 102 may be made with more simplified electronics. However, in other embodiments, the infusion device 102 may include all control functions, and may operate without the CCD 106 and/or the computer 108. In various embodiments, the CCD 106 may be a portable electronic device. In addition, in various embodiments, the infusion device 102 and/or the sensing arrangement 104 may be configured to transmit data to the CCD 106 and/or the computer 108 for display or processing of the data by the CCD 106 and/or the computer 108.

[0034] In some embodiments, the CCD 106 and/or the computer 108 may provide information to the user that facilitates the user's subsequent use of the infusion device 102. For example, the CCD 106 may provide information to the user to allow the user to determine the rate or dose of medication to be administered into the user's body. In other embodiments, the CCD 106 may provide information to the infusion device 102 to autonomously control the rate or dose of medication administered into the body of the user. In some embodiments, the sensing arrangement 104 may be integrated into the CCD 106. Such embodiments may allow the user to monitor a condition by providing, for example, a sample of his or her blood to the sensing arrangement 104 to assess his or her condition. In some embodiments, the sensing arrangement 104 and the CCD 106 may be used for determining glucose levels in the blood and/or body fluids of the user without the use of, or necessity of, a wire or cable connection between the infusion device 102 and the sensing arrangement 104 and/or the CCD 106.

[0035] In some embodiments, the sensing arrangement 104 and/or the infusion device 102 are cooperatively configured to utilize a closed-loop system for delivering fluid to the user. Examples of sensing devices and/or infusion pumps utilizing closed-loop systems may be found at, but are not limited to, the following United States patent numbers:

6,088,608, 6,119,028, 6,589,229, 6,740,072, 6,827,702, 7,323,142, and 7,402, 153, all of which are incorporated herein by reference in their entirety. In such embodiments, the sensing arrangement 104 is configured to sense or measure a condition of the user, such as, blood glucose level or the like. The infusion device 102 is configured to deliver fluid in response to the condition sensed by the sensing arrangement 104. In turn, the sensing arrangement 104 continues to sense or otherwise quantify a current condition of the user, thereby allowing the infusion device 102 to deliver fluid continuously in response to the condition currently (or most recently) sensed by the sensing arrangement 104 indefinitely. In some embodiments, the sensing arrangement 104 and/or the infusion device 102 may be configured to utilize the closed-loop system only for a portion of the day, for example only when the user is asleep or awake.

[0036] FIGS. 2-4 depict one exemplary embodiment of a fluid infusion device 200 (or alternatively, infusion pump) suitable for use in an infusion system, such as, for example, as infusion device 102 in the infusion system 100 of FIG. 1. The fluid infusion device 200 is a portable medical device designed to be carried or worn by a patient (or user), and the fluid infusion device 200 may leverage any number of conventional features, components, elements, and characteristics of existing fluid infusion devices, such as, for example, some of the features, components, elements, and/or characteristics described in United States Patent numbers 6,485,465 and 7,621,893. It should be appreciated that FIGS. 2-4 depict some aspects of the infusion device 200 in a simplified manner; in practice, the infusion device 200 could include additional elements, features, or components that are not shown or described in detail herein.

[0037] As best illustrated in FIGS. 2-3, the illustrated embodiment of the fluid infusion device 200 includes a housing 202 adapted to receive a fluid-containing reservoir 205. An opening 220 in the housing 202 accommodates a fitting 223 (or cap) for the reservoir 205, with the fitting 223 being configured to mate or otherwise interface with tubing 221 of an infusion set 225 that provides a fluid path to/from the body of the user. In this manner, fluid communication from the interior of the reservoir 205 to the user is established via the tubing 221. The illustrated fluid infusion device 200 includes a human-machine interface (HMI) 230 (or user interface) that includes elements 232, 234 that can be manipulated by the user to administer a bolus of fluid (e.g., insulin), to change therapy settings, to change user preferences, to select display features, and the like. The infusion device also includes a display element 226, such as a liquid crystal display (LCD) or another suitable display element, that can be used to present various types of information

or data to the user, such as, without limitation: the current glucose level of the patient; the time; a graph or chart of the patient's glucose level versus time; device status indicators; etc.

[0038] The housing 202 is formed from a substantially rigid material having a hollow interior 214 adapted to allow an electronics assembly 204, a sliding member (or slide) 206, a drive system 208, a sensor assembly 210, and a drive system capping member 212 to be disposed therein in addition to the reservoir 205, with the contents of the housing 202 being enclosed by a housing capping member 216. The opening 220, the slide 206, and the drive system 208 are coaxially aligned in an axial direction (indicated by arrow 218), whereby the drive system 208 facilitates linear displacement of the slide 206 in the axial direction 218 to dispense fluid from the reservoir 205 (after the reservoir 205 has been inserted into opening 220), with the sensor assembly 210 being configured to measure axial forces (e.g., forces aligned with the axial direction 218) exerted on the sensor assembly 210 responsive to operating the drive system 208 to displace the slide 206. In various embodiments, the sensor assembly 210 may be utilized to detect one or more of the following: an occlusion in a fluid path that slows, prevents, or otherwise degrades fluid delivery from the reservoir 205 to a user's body; when the reservoir 205 is empty; when the slide 206 is properly seated with the reservoir 205; when a fluid dose has been delivered; when the infusion pump 200 is subjected to shock or vibration; when the infusion pump 200 requires maintenance.

[0039] Depending on the embodiment, the fluid-containing reservoir 205 may be realized as a syringe, a vial, a cartridge, a bag, or the like. In certain embodiments, the infused fluid is insulin, although many other fluids may be administered through infusion such as, but not limited to, HIV drugs, drugs to treat pulmonary hypertension, iron chelation drugs, pain medications, anti-cancer treatments, medications, vitamins, hormones, or the like. As best illustrated in FIGS. 3-4, the reservoir 205 typically includes a reservoir barrel 219 that contains the fluid and is concentrically and/or coaxially aligned with the slide 206 (e.g., in the axial direction 218) when the reservoir 205 is inserted into the infusion pump 200. The end of the reservoir 205 proximate the opening 220 may include or otherwise mate with the fitting 223, which secures the reservoir 205 in the housing 202 and prevents displacement of the reservoir 205 in the axial direction 218 with respect to the housing 202 after the reservoir 205 is inserted into the housing 202. As described above, the fitting 223 extends from (or through) the opening 220 of the housing 202 and mates with tubing 221 to establish fluid communication from the interior of the

reservoir 205 (e.g., reservoir barrel 219) to the user via the tubing 221 and infusion set 225. The opposing end of the reservoir 205 proximate the slide 206 includes a plunger 217 (or stopper) positioned to push fluid from inside the barrel 219 of the reservoir 205 along a fluid path through tubing 221 to a user. The slide 206 is configured to mechanically couple or otherwise engage with the plunger 217, thereby becoming seated with the plunger 217 and/or reservoir 205. Fluid is forced from the reservoir 205 via tubing 221 as the drive system 208 is operated to displace the slide 206 in the axial direction 218 toward the opening 220 in the housing 202.

[0040] In the illustrated embodiment of FIGS. 3-4, the drive system 208 includes a motor assembly 207 and a drive screw 209. The motor assembly 207 includes a motor that is coupled to drive train components of the drive system 208 that are configured to convert rotational motor motion to a translational displacement of the slide 206 in the axial direction 218, and thereby engaging and displacing the plunger 217 of the reservoir 205 in the axial direction 218. In some embodiments, the motor assembly 207 may also be powered to translate the slide 206 in the opposing direction (e.g., the direction opposite direction 218) to retract and/or detach from the reservoir 205 to allow the reservoir 205 to be replaced. In exemplary embodiments, the motor assembly 207 includes a brushless DC (BLDC) motor having one or more permanent magnets mounted, affixed, or otherwise disposed on its rotor. However, the subject matter described herein is not necessarily limited to use with BLDC motors, and in alternative embodiments, the motor may be realized as a solenoid motor, an AC motor, a stepper motor, a piezoelectric caterpillar drive, a shape memory actuator drive, an electrochemical gas cell, a thermally driven gas cell, a bimetallic actuator, or the like. The drive train components may comprise one or more lead screws, cams, ratchets, jacks, pulleys, pawls, clamps, gears, nuts, slides, bearings, levers, beams, stoppers, plungers, sliders, brackets, guides, bearings, supports, bellows, caps, diaphragms, bags, heaters, or the like. In this regard, although the illustrated embodiment of the infusion pump utilizes a coaxially aligned drive train, the motor could be arranged in an offset or otherwise non-coaxial manner, relative to the longitudinal axis of the reservoir 205.

[0041] As best shown in FIG. 4, the drive screw 209 mates with threads 402 internal to the slide 206. When the motor assembly 207 is powered and operated, the drive screw 209 rotates, and the slide 206 is forced to translate in the axial direction 218. In an exemplary embodiment, the infusion pump 200 includes a sleeve 211 to prevent the slide 206 from rotating when the drive screw 209 of the drive system 208 rotates. Thus, rotation

of the drive screw 209 causes the slide 206 to extend or retract relative to the drive motor assembly 207. When the fluid infusion device is assembled and operational, the slide 206 contacts the plunger 217 to engage the reservoir 205 and control delivery of fluid from the infusion pump 200. In an exemplary embodiment, the shoulder portion 215 of the slide 206 contacts or otherwise engages the plunger 217 to displace the plunger 217 in the axial direction 218. In alternative embodiments, the slide 206 may include a threaded tip 213 capable of being detachably engaged with internal threads 404 on the plunger 217 of the reservoir 205, as described in detail in United States patent numbers 6,248,093 and 6,485,465, which are incorporated by reference herein.

[0042] As illustrated in FIG. 3, the electronics assembly 204 includes control electronics 224 coupled to the display element 226, with the housing 202 including a transparent window portion 228 that is aligned with the display element 226 to allow the display 226 to be viewed by the user when the electronics assembly 204 is disposed within the interior 214 of the housing 202. The control electronics 224 generally represent the hardware, firmware, processing logic and/or software (or combinations thereof) configured to control operation of the motor assembly 207 and/or drive system 208, as described in greater detail below in the context of FIG. 5. Whether such functionality is implemented as hardware, firmware, a state machine, or software depends upon the particular application and design constraints imposed on the embodiment. Those familiar with the concepts described here may implement such functionality in a suitable manner for each particular application, but such implementation decisions should not be interpreted as being restrictive or limiting. In an exemplary embodiment, the control electronics 224 includes one or more programmable controllers that may be programmed to control operation of the infusion pump 200.

[0043] The motor assembly 207 includes one or more electrical leads 236 adapted to be electrically coupled to the electronics assembly 204 to establish communication between the control electronics 224 and the motor assembly 207. In response to command signals from the control electronics 224 that operate a motor driver (e.g., a power converter) to regulate the amount of power supplied to the motor from a power supply, the motor actuates the drive train components of the drive system 208 to displace the slide 206 in the axial direction 218 to force fluid from the reservoir 205 along a fluid path (including tubing 221 and an infusion set), thereby administering doses of the fluid contained in the reservoir 205 into the user's body. Preferably, the power supply is realized one or more batteries contained within the housing 202. Alternatively, the power supply may be a solar

panel, capacitor, AC or DC power supplied through a power cord, or the like. In some embodiments, the control electronics 224 may operate the motor of the motor assembly 207 and/or drive system 208 in a stepwise manner, typically on an intermittent basis; to administer discrete precise doses of the fluid to the user according to programmed delivery profiles.

[0044] Referring to FIGS. 2-4, as described above, the user interface 230 includes HMI elements, such as buttons 232 and a directional pad 234, that are formed on a graphic keypad overlay 231 that overlies a keypad assembly 233, which includes features corresponding to the buttons 232, directional pad 234 or other user interface items indicated by the graphic keypad overlay 231. When assembled, the keypad assembly 233 is coupled to the control electronics 224, thereby allowing the HMI elements 232, 234 to be manipulated by the user to interact with the control electronics 224 and control operation of the infusion pump 200, for example, to administer a bolus of insulin, to change therapy settings, to change user preferences, to select display features, to set or disable alarms and reminders, and the like. In this regard, the control electronics 224 maintains and/or provides information to the display 226 regarding program parameters, delivery profiles, pump operation, alarms, warnings, statuses, or the like, which may be adjusted using the HMI elements 232, 234. In various embodiments, the HMI elements 232, 234 may be realized as physical objects (e.g., buttons, knobs, joysticks, and the like) or virtual objects (e.g., using touch-sensing and/or proximity-sensing technologies). For example, in some embodiments, the display 226 may be realized as a touch screen or touch-sensitive display, and in such embodiments, the features and/or functionality of the HMI elements 232, 234 may be integrated into the display 226 and the HMI 230 may not be present. In some embodiments, the electronics assembly 204 may also include alert generating elements coupled to the control electronics 224 and suitably configured to generate one or more types of feedback, such as, without limitation: audible feedback; visual feedback; haptic (physical) feedback; or the like.

[0045] Referring to FIGS. 3-4, in accordance with one or more embodiments, the sensor assembly 210 includes a back plate structure 250 and a loading element 260. The loading element 260 is disposed between the capping member 212 and a beam structure 270 that includes one or more beams having sensing elements disposed thereon that are influenced by compressive force applied to the sensor assembly 210 that deflects the one or more beams, as described in greater detail in United States Patent No. 8,474,332, which is incorporated by reference herein. In exemplary embodiments, the back plate structure

250 is affixed, adhered, mounted, or otherwise mechanically coupled to the bottom surface 238 of the drive system 208 such that the back plate structure 250 resides between the bottom surface 238 of the drive system 208 and the housing cap 216. The drive system capping member 212 is contoured to accommodate and conform to the bottom of the sensor assembly 210 and the drive system 208. The drive system capping member 212 may be affixed to the interior of the housing 202 to prevent displacement of the sensor assembly 210 in the direction opposite the direction of force provided by the drive system 208 (e.g., the direction opposite direction 218). Thus, the sensor assembly 210 is positioned between the motor assembly 207 and secured by the capping member 212, which prevents displacement of the sensor assembly 210 in a downward direction opposite the direction of arrow 218, such that the sensor assembly 210 is subjected to a reactionary compressive force when the drive system 208 and/or motor assembly 207 is operated to displace the slide 206 in the axial direction 218 in opposition to the fluid pressure in the reservoir 205. Under normal operating conditions, the compressive force applied to the sensor assembly 210 is correlated with the fluid pressure in the reservoir 205. As shown, electrical leads 240 are adapted to electrically couple the sensing elements of the sensor assembly 210 to the electronics assembly 204 to establish communication to the control electronics 224, wherein the control electronics 224 are configured to measure, receive, or otherwise obtain electrical signals from the sensing elements of the sensor assembly 210 that are indicative of the force applied by the drive system 208 in the axial direction 218.

[0046] FIG. 5 depicts an exemplary embodiment of a control system 500 suitable for use with an infusion device 502, such as the infusion device 102 in FIG. 1 or the infusion device 200 of FIG. 2. The control system 500 is configured to control or otherwise regulate a physiological condition in the body 501 of a user. In one or more exemplary embodiments, the condition being regulated is sensed, detected, measured or otherwise quantified by a sensing arrangement 504 (e.g., sensing arrangement 104) communicatively coupled to the infusion device 502. However, it should be noted that in alternative embodiments, the condition being regulated by the control system 500 may be correlative to the measured values obtained by the sensing arrangement 504. That said, for clarity and purposes of explanation, the subject matter may be described herein in the context of the sensing arrangement 504 being realized as a glucose sensing arrangement that senses, detects, measures or otherwise quantifies the user's glucose level, which is being regulated in the body 501 of the user by the control system 500.

[0047] In exemplary embodiments, the sensing arrangement 504 includes one or more interstitial glucose sensing elements that generate or otherwise output electrical signals having a signal characteristic that is correlative to, influenced by, or otherwise indicative of the relative interstitial fluid glucose level in the body 501 of the user. The output electrical signals are filtered or otherwise processed to obtain a measurement value indicative of the user's interstitial fluid glucose level. In exemplary embodiments, a blood glucose meter 530, such as a finger stick device, is utilized to directly sense, detect, measure or otherwise quantify the blood glucose in the body 501 of the user. In this regard, the blood glucose meter 530 outputs or otherwise provides a measured blood glucose value that may be utilized as a reference measurement for calibrating the sensing arrangement 504 and converting a measurement value indicative of the user's interstitial fluid glucose level into a corresponding calibrated blood glucose measurement value. For purposes of explanation, sensor glucose value, sensed glucose value, or variants thereof should be understood to encompass any glucose value indicative of a current glucose level in the body of the user that is based on the electrical signals output by the sensing element(s) of the sensing arrangement 504.

[0048] The pump control system 520 generally represents the electronics and other components of the infusion device 502 that control operation of the fluid infusion device 502 according to a desired infusion delivery program in a manner that may be influenced by the sensed glucose value indicative of a current glucose level in the body 501 of the user. The particular operating mode being implemented by the pump control system 520 influences the generated dosage commands for operating the motor 507 to displace the plunger 517 and deliver insulin to the body 501 of the user. For example, in a closed-loop (CL) operating mode, the pump control system 520 generates or otherwise determines dosage commands for operating the motor 507 based on the difference between a sensed glucose value and the target (or commanded) glucose value to regulate the sensed glucose value to the target. In other operating modes, the pump control system 520 may generate or otherwise determine dosage commands configured to maintain the sensed glucose value below an upper glucose limit, above a lower glucose limit, or otherwise within a desired range of glucose values. For example, in a predictive low glucose management (PLGM) operating mode, the pump control system 520 calculates or otherwise determines a predicted glucose value based on the currently sensed glucose value, and generates dosage commands configured to provide a basal infusion rate when the predicted glucose value is greater than a predictive suspend threshold and automatically suspends delivery (e.g., by

providing dosage commands equal to zero) when the predicted glucose value is less than the predictive suspend threshold. In a low glucose suspend (LGS) operating mode, the pump control system 520 generates dosage commands configured to provide a basal infusion rate when the sensed glucose value is greater than a suspend threshold (which may be different from the predictive suspend threshold) and automatically suspends delivery when the sensed glucose value is less than the suspend threshold. In an open-loop (OL) operating mode, the pump control system 520 generates dosage commands configured to provide a predetermined open-loop basal infusion rate independent of the sensed glucose value. In practice, the infusion device 502 may store or otherwise maintain the target value, suspension threshold values, and/or other glucose threshold value(s) in a data storage element accessible to the pump control system 520.

[0049] The target glucose value and other threshold values may be received from an external component (e.g., CCD 106 and/or computing device 108) or be input by a user via a user interface element 540 associated with the infusion device 502. In practice, the one or more user interface element(s) 540 associated with the infusion device 502 typically include at least one input user interface element, such as, for example, a button, a keypad, a keyboard, a knob, a joystick, a mouse, a touch panel, a touchscreen, a microphone or another audio input device, and/or the like. Additionally, the one or more user interface element(s) 540 include at least one output user interface element, such as, for example, a display element (e.g., a light-emitting diode or the like), a display device (e.g., a liquid crystal display or the like), a speaker or another audio output device, a haptic feedback device, or the like, for providing notifications or other information to the user. It should be noted that although FIG. 5 depicts the user interface element(s) 540 as being separate from the infusion device 502, in practice, one or more of the user interface element(s) 540 may be integrated with the infusion device 502. Furthermore, in some embodiments, one or more user interface element(s) 540 are integrated with the sensing arrangement 504 in addition to and/or in alternative to the user interface element(s) 540 integrated with the infusion device 502. The user interface element(s) 540 may be manipulated by the user to operate the infusion device 502 to deliver correction boluses, adjust target and/or threshold values, modify the delivery control scheme or operating mode, and the like, as desired.

[0050] In exemplary embodiments, the pump control system 520 includes or otherwise accesses a data storage element, memory, or other non-transitory computer-readable medium capable of storing programming instructions for execution by the pump

control system 520. The computer-executable programming instructions, when read and executed, cause the pump control system 520 to determine dosage commands in accordance with a particular operating mode and perform various additional tasks, operations, functions, and processes described herein in the context of FIGS. 7-10.

[0051] Still referring to FIG. 5, in the illustrated embodiment, the infusion device 502 includes a motor control module 512 coupled to a motor 507 (e.g., motor assembly 207) that is operable to displace a plunger 517 (e.g., plunger 217) in a reservoir (e.g., reservoir 205) and provide a desired amount of fluid to the body 501 of a user. In this regard, displacement of the plunger 517 results in the delivery of a fluid that is capable of influencing the condition in the body 501 of the user to the body 501 of the user via a fluid delivery path (e.g., via tubing 221 of an infusion set 225). A motor driver module 514 is coupled between an energy source 503 and the motor 507. The motor control module 512 is coupled to the motor driver module 514, and the motor control module 512 generates or otherwise provides command signals that operate the motor driver module 514 to provide current (or power) from the energy source 503 to the motor 507 to displace the plunger 517 in response to receiving, from a pump control system 520, a dosage command indicative of the desired amount of fluid to be delivered.

[0052] In exemplary embodiments, the energy source 503 is realized as a battery housed within the infusion device 502 (e.g., within housing 202) that provides direct current (DC) power. In this regard, the motor driver module 514 generally represents the combination of circuitry, hardware and/or other electrical components configured to convert or otherwise transfer DC power provided by the energy source 503 into alternating electrical signals applied to respective phases of the stator windings of the motor 507 that result in current flowing through the stator windings that generates a stator magnetic field and causes the rotor of the motor 507 to rotate. The motor control module 512 is configured to receive or otherwise obtain a commanded dosage from the pump control system 520, convert the commanded dosage to a commanded translational displacement of the plunger 517, and command, signal, or otherwise operate the motor driver module 514 to cause the rotor of the motor 507 to rotate by an amount that produces the commanded translational displacement of the plunger 517. For example, the motor control module 512 may determine an amount of rotation of the rotor required to produce translational displacement of the plunger 517 that achieves the commanded dosage received from the pump control system 520. Based on the current rotational position (or orientation) of the rotor with respect to the stator that is indicated by the output of the rotor sensing

arrangement 516, the motor control module 512 determines the appropriate sequence of alternating electrical signals to be applied to the respective phases of the stator windings that should rotate the rotor by the determined amount of rotation from its current position (or orientation). In embodiments where the motor 507 is realized as a BLDC motor, the alternating electrical signals commutate the respective phases of the stator windings at the appropriate orientation of the rotor magnetic poles with respect to the stator and in the appropriate order to provide a rotating stator magnetic field that rotates the rotor in the desired direction. Thereafter, the motor control module 512 operates the motor driver module 514 to apply the determined alternating electrical signals (e.g., the command signals) to the stator windings of the motor 507 to achieve the desired delivery of fluid to the user.

[0053] When the motor control module 512 is operating the motor driver module 514, current flows from the energy source 503 through the stator windings of the motor 507 to produce a stator magnetic field that interacts with the rotor magnetic field. In some embodiments, after the motor control module 512 operates the motor driver module 514 and/or motor 507 to achieve the commanded dosage, the motor control module 512 ceases operating the motor driver module 514 and/or motor 507 until a subsequent dosage command is received. In this regard, the motor driver module 514 and the motor 507 enter an idle state during which the motor driver module 514 effectively disconnects or isolates the stator windings of the motor 507 from the energy source 503. In other words, current does not flow from the energy source 503 through the stator windings of the motor 507 when the motor 507 is idle, and thus, the motor 507 does not consume power from the energy source 503 in the idle state, thereby improving efficiency.

[0054] Depending on the embodiment, the motor control module 512 may be implemented or realized with a general purpose processor, a microprocessor, a controller, a microcontroller, a state machine, a content addressable memory, an application specific integrated circuit, a field programmable gate array, any suitable programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof, designed to perform the functions described herein. Furthermore, the steps of a method or algorithm described in connection with the embodiments disclosed herein may be embodied directly in hardware, in firmware, in a software module executed by the motor control module 512, or in any practical combination thereof. In exemplary embodiments, the motor control module 512 includes or otherwise accesses a data storage element or memory, including any sort of random access memory (RAM), read only

memory (ROM), flash memory, registers, hard disks, removable disks, magnetic or optical mass storage, or any other short or long term storage media or other non-transitory computer-readable medium, which is capable of storing programming instructions for execution by the motor control module 512. The computer-executable programming instructions, when read and executed by the motor control module 512, cause the motor control module 512 to perform the tasks, operations, functions, and processes described herein.

[0055] It should be appreciated that FIG. 5 is a simplified representation of the infusion device 502 for purposes of explanation and is not intended to limit the subject matter described herein in any way. In this regard, depending on the embodiment, some features and/or functionality of the sensing arrangement 504 may be implemented by or otherwise integrated into the pump control system 520, or vice versa. Similarly, in practice, the features and/or functionality of the motor control module 512 may be implemented by or otherwise integrated into the pump control system 520, or vice versa. Furthermore, the features and/or functionality of the pump control system 520 may be implemented by control electronics 224 located in the fluid infusion device 200, while in alternative embodiments, the pump control system 520 may be implemented by a remote computing device that is physically distinct and/or separate from the infusion device 502, such as, for example, the CCD 106 or the computing device 108.

[0056] FIG. 6 depicts an exemplary embodiment of a pump control system 600 suitable for use as the pump control system 520 in FIG. 5 in accordance with one or more embodiments. The illustrated pump control system 600 includes, without limitation, a pump control module 602, a communications interface 604, and a data storage element (or memory) 606. The pump control module 602 is coupled to the communications interface 604 and the memory 606, and the pump control module 602 is suitably configured to support the operations, tasks, and/or processes described herein. In exemplary embodiments, the pump control module 602 is also coupled to one or more user interface elements 608 (e.g., user interface 230, 540) for receiving bolus or other delivery instructions and providing notifications or other information to the user. Although FIG. 6 depicts the user interface element 608 as being integrated with the pump control system 600 (e.g., as part of the infusion device 200, 502), in various alternative embodiments, the user interface element 608 may be integrated with the sensing arrangement 504 or another element of an infusion system 100 (e.g., the computer 108 or CCD 106).

[0057] Referring to FIG. 6 and with reference to FIG. 5, the communications interface 604 generally represents the hardware, circuitry, logic, firmware and/or other components of the pump control system 600 that are coupled to the pump control module 602 and configured to support communications between the pump control system 600 and the sensing arrangement 504. In this regard, the communications interface 604 may include or otherwise be coupled to one or more transceiver modules capable of supporting wireless communications between the pump control system 520, 600 and the sensing arrangement 504 or another electronic device 106, 108 in an infusion system 100. In other embodiments, the communications interface 604 may be configured to support wired communications to/from the sensing arrangement 504.

[0058] The pump control module 602 generally represents the hardware, circuitry, logic, firmware and/or other component of the pump control system 600 that is coupled to the communications interface 604 and configured to determine dosage commands for operating the motor 507 to deliver fluid to the body 501 based on data received from the sensing arrangement 504 and perform various additional tasks, operations, functions and/or operations described herein. For example, in exemplary embodiments, pump control module 602 implements or otherwise executes a command generation module 614 that automatically calculates or otherwise determines a dosage command for operating the motor 507 of the infusion device 502 in accordance with a particular operating mode. In exemplary embodiments described herein, the command generation module 614 supports multiple different operating modes having different delivery control schemes associated therewith. Additionally, the command generation module 614 may generate dosage commands for delivering boluses that are manually-initiated or otherwise instructed by a user via a user interface element 608. The illustrated pump control module 602 also implements or otherwise executes a diagnostics module 612 that generates or otherwise provides user notifications or alerts via a user interface element 608.

[0059] Still referring to FIG. 6, depending on the embodiment, the pump control module 602 may be implemented or realized with a general purpose processor, a microprocessor, a controller, a microcontroller, a state machine, a content addressable memory, an application specific integrated circuit, a field programmable gate array, any suitable programmable logic device, discrete gate or transistor logic, discrete hardware components, or any combination thereof, designed to perform the functions described herein. In this regard, the steps of a method or algorithm described in connection with the embodiments disclosed herein may be embodied directly in hardware, in firmware, in a

software module executed by the pump control module 602, or in any practical combination thereof. In exemplary embodiments, the pump control module 602 includes or otherwise accesses the data storage element or memory 606, which may be realized using any sort of non-transitory computer-readable medium capable of storing programming instructions for execution by the pump control module 602. The computer-executable programming instructions, when read and executed by the pump control module 602, cause the pump control module 602 to perform the tasks, operations, functions, and processes described in greater detail below.

[0060] It should be understood that FIG. 6 is a simplified representation of a pump control system 600 for purposes of explanation and is not intended to limit the subject matter described herein in any way. For example, in some embodiments, the features and/or functionality of the motor control module 512 may be implemented by or otherwise integrated into the pump control system 600 and/or the pump control module 602, for example, by the command generation module 614 converting the dosage command into a corresponding motor command, in which case, the separate motor control module 512 may be absent from an embodiment of the infusion device 502.

[0061] FIG. 7 depicts an exemplary closed-loop control system 700 that may be implemented by a pump control system 520, 600 to regulate a condition in the body of a user to a desired (or target) value. It should be appreciated that FIG. 7 is a simplified representation of the control system 700 for purposes of explanation and is not intended to limit the subject matter described herein in any way.

[0062] In exemplary embodiments, the control system 700 receives or otherwise obtains a target glucose value at input 702. In some embodiments, the target glucose value may be stored or otherwise maintained by the infusion device 502 (e.g., in memory 606), however, in some alternative embodiments, the target value may be received from an external component (e.g., CCD 106 and/or computer 108). In one or more embodiments, the target glucose value may be dynamically calculated or otherwise determined prior to entering the closed-loop operating mode based on one or more patient-specific control parameters. For example, the target blood glucose value may be calculated based at least in part on a patient-specific reference basal rate and a patient-specific daily insulin requirement, which are determined based on historical delivery information over a preceding interval of time (e.g., the amount of insulin delivered over the preceding 24 hours). The control system 700 also receives or otherwise obtains a current glucose measurement value from the sensing arrangement 504 at input 704. The illustrated control

system 700 implements or otherwise provides proportional-integral-derivative (PID) control to determine or otherwise generate delivery commands for operating the motor 510 based at least in part on the difference between the target glucose value and the current glucose measurement value. In this regard, the PID control attempts to minimize the difference between the measured value and the target value, and thereby regulates the measured value to the desired value. PID control parameters are applied to the difference between the target glucose level at input 702 and the measured glucose level at input 704 to generate or otherwise determine a dosage (or delivery) command provided at output 730. Based on that delivery command, the motor control module 512 operates the motor 510 to deliver insulin to the body of the user to influence the user's glucose level, and thereby reduce the difference between a subsequently measured glucose level and the target glucose level.

[0063] The illustrated control system 700 includes or otherwise implements a summation block 706 configured to determine a difference between the target value obtained at input 702 and the measured value obtained from the sensing arrangement 504 at input 704, for example, by subtracting the target value from the measured value. The output of the summation block 706 represents the difference between the measured and target values, which is then provided to each of a proportional term path, an integral term path, and a derivative term path. The proportional term path includes a gain block 720 that multiplies the difference by a proportional gain coefficient, K_P , to obtain the proportional term. The integral term path includes an integration block 708 that integrates the difference and a gain block 722 that multiplies the integrated difference by an integral gain coefficient, K_I , to obtain the integral term. The derivative term path includes a derivative block 710 that determines the derivative of the difference and a gain block 724 that multiplies the derivative of the difference by a derivative gain coefficient, K_D , to obtain the derivative term. The proportional term, the integral term, and the derivative term are then added or otherwise combined to obtain a delivery command that is utilized to operate the motor at output 730. Various implementation details pertaining to closed-loop PID control and determine gain coefficients are described in greater detail in United States patent number 7,402,153, which is incorporated by reference.

[0064] In one or more exemplary embodiments, the PID gain coefficients are user-specific (or patient-specific) and dynamically calculated or otherwise determined prior to entering the closed-loop operating mode based on historical insulin delivery information (e.g., amounts and/or timings of previous dosages, historical correction bolus information,

or the like), historical sensor measurement values, historical reference blood glucose measurement values, user-reported or user-input events (e.g., meals, exercise, and the like), and the like. In this regard, one or more patient-specific control parameters (e.g., an insulin sensitivity factor, a daily insulin requirement, an insulin limit, a reference basal rate, a reference fasting glucose, an active insulin action duration, pharmacodynamical time constants, or the like) may be utilized to compensate, correct, or otherwise adjust the PID gain coefficients to account for various operating conditions experienced and/or exhibited by the infusion device 502. The PID gain coefficients may be maintained by the memory 606 accessible to the pump control module 602. In this regard, the memory 606 may include a plurality of registers associated with the control parameters for the PID control. For example, a first parameter register may store the target glucose value and be accessed by or otherwise coupled to the summation block 706 at input 702, and similarly, a second parameter register accessed by the proportional gain block 720 may store the proportional gain coefficient, a third parameter register accessed by the integration gain block 722 may store the integration gain coefficient, and a fourth parameter register accessed by the derivative gain block 724 may store the derivative gain coefficient.

[0065] Turning now to FIG. 8, in accordance with one or more embodiments, a management system 800 manages transitions between operating modes supported by an infusion device. In one or more exemplary embodiments described herein, the management system 800 is implemented by a pump control system 520, 600 and/or pump control module 602. In this regard, the various modules 802, 804, 806, 808, 810 may be subcomponents of the pump control module 602 or the command generation module 614. For example, in one embodiment, the command generation module 614 includes or otherwise implements the management system 800. The illustrated system 800 includes a plurality of operating mode control modules 802, 804, 806, 808 along with a supervisory control module 810 that manages transitions between the respective operating modes. In the illustrated embodiment, the supervisory control module 810 operates a command multiplexer 820, which is coupled to the motor control module 512 to output a dosage command from the selected operating mode control module 802, 804, 806, 808 corresponding to the operating mode currently being implemented by the infusion device 502.

[0066] The closed-loop control module 802 generally represents the components of the pump control system 520, 600 that are configured to support the closed-loop operating mode. In this regard, the closed-loop control module 802 may implement the closed-loop

control system 700 of FIG. 7 and generate a dosage command based on a difference between the current (or most recent) measurement of the user's interstitial fluid glucose level and a target (or reference) interstitial fluid glucose value.

[0067] The predictive low glucose control module 804 generally represents the components of the pump control system 520, 600 that are configured to support a PLGM operating mode. As described above, the PLGM control module 804 generates dosage commands to provide a basal infusion rate when a predicted glucose value is greater than a predictive suspend threshold and automatically suspends delivery (or generates dosage commands equal to zero) when the predicted glucose value is less than the predictive suspend threshold.

[0068] The low glucose control module 806 generally represents the components of the pump control system 520, 600 that are configured to support a LGS operating mode. As described above, the LGS control module 806 by generates dosage commands to provide a basal infusion rate when the current (or most recent) measurement of the user's interstitial fluid glucose level is greater than a suspend threshold and automatically suspends delivery when the current measurement value is less than the suspend threshold.

[0069] The open-loop control module 808 generally represents the components of the pump control system 520, 600 that are configured to support an open-loop operating mode. In this regard, the open-loop control module 808 generates dosage commands configured to provide a predetermined open-loop basal infusion rate.

[0070] In the illustrated embodiment, the command multiplexer 820 is coupled to the outputs of the respective control modules 802, 804, 806, 808 to selectively output the dosage command from one of the modules 802, 804, 806, 808 to the motor control module 512 in response to a selection signal from the supervisory control module 810. In this regard, the selection signal identifies the operating mode that is currently being implemented by the infusion device 102, 200, 502. The supervisory control module 810 generally represents the components of the pump control system 520, 600 that are coupled to the control modules 802, 804, 806, 808 and configured to support the operating mode transition process 900 and perform the tasks, operations, functions, and processes described herein managing transitions between operating modes associated with the respective control modules 802, 804, 806, 808.

[0071] It should be appreciated that FIG. 8 is a simplified representation of the management system 800 for purposes of explanation and is not intended to limit the subject matter described herein in any way. In this regard, depending on the embodiment,

any number of operating mode control modules may be present to support any number of operating modes. In some embodiments, the features and/or functionality of the command multiplexer 820 may be implemented by or otherwise integrated into the supervisory control module 810. Furthermore, while in some embodiments the features and/or functionality of the management system 800 are implemented by control electronics 224 located in the fluid infusion device 200, 502, in alternative embodiments, various aspects of the management system 800 may be implemented by a remote computing device that is physically distinct and/or separate from the infusion device 200, 502, such as, for example, the CCD 106 or the computing device 108.

[0072] FIG. 9 depicts an exemplary operating mode transition process 900 suitable for implementation by a control system associated with a fluid infusion device to manage transitions between operating modes supported by the device. Various tasks performed in connection with the operating mode transition process 900 may be performed by hardware, firmware, software executed by processing circuitry, or any combination thereof. For illustrative purposes, the following description refers to elements mentioned above in connection with FIGS. 1-7. In practice, portions of the operating mode transition process 900 may be performed by different elements of the control system 500, such as, for example, the infusion device 502, the pump control system 520, 600, the diagnostics module 612, the command generation module 614, the management system 800, the supervisory control module 810 and/or the command multiplexer 820. It should be appreciated that the operating mode transition process 900 may include any number of additional or alternative tasks, the tasks need not be performed in the illustrated order and/or the tasks may be performed concurrently, and/or the operating mode transition process 900 may be incorporated into a more comprehensive procedure or process having additional functionality not described in detail herein. Moreover, one or more of the tasks shown and described in the context of FIG. 9 could be omitted from a practical embodiment of the operating mode transition process 900 as long as the intended overall functionality remains intact.

[0073] Referring to FIG. 9, and with continued reference to FIG. 8, the operating mode transition process 900 initializes or otherwise begins in response to detecting or otherwise identifying a desire to exit a particular operating mode. For example, the operating mode transition process 900 may be initiated in response to a user manipulating the user interface 540, 608 to indicate a desire to exit one operating mode and enter another operating mode. In other embodiments, the operating mode transition process 900

may be initiated in response to a particular operating mode automatically determining it should be exited and providing a corresponding indication to the supervisory module 810. For example, a maximum time limit may be imposed for one or more of the control modules 802, 804, 806, 808, with the respective control module 802, 804, 806, 808 implementing a timer and automatically notifying the supervisory control module 810 when the maximum time limit has been reached. Alternatively, the supervisory control module 810 may implement the appropriate timers and identify when the maximum time limit for a particular operating mode has been reached. Additionally, in some embodiments, one or more of the control modules 802, 804, 806, 808 may be configured to continually monitor or analyze its performance and detect or otherwise identify that its operating mode should be terminated when its performance appears to be unreliable. For example, the closed-loop control module 802 may automatically identify that the closed-loop operating mode should exit when one or more of the closed-loop control parameters appears to be invalid or unreliable, when measurement values from the sensing arrangement 504 appear to be invalid or unreliable, or the like.

[0074] In response to detecting or otherwise identifying a desire to exit a particular operating mode, the operating mode transition process 900 receives or otherwise obtains operational information pertaining to the operating mode being exited along with clinical information pertaining to the physiological condition of the user (tasks 902, 904). In this regard, the supervisory module 810 obtains operational information from the control module 802, 804, 806, 808 associated with the operating mode currently being implemented. The operational information includes timer values (e.g., a delivery suspend time, a refractory period time, and the like), delivery status (e.g., whether or not delivery has been suspended), alert or event information (e.g., hypoglycemic events or alerts, hyperglycemic events or alerts, and the like), the reason the operating mode is terminating (e.g., manually-initiated, timeout, invalid control parameters and/or invalid measurement values, an anomalous condition, or the like), and other information characterizing the current instance of the operating mode. In exemplary embodiments, the supervisory module 810 obtains clinical information for the user, such as, for example, recent sensor glucose measurement values, predicted glucose measurement values, blood glucose reference measurement values, sensor calibration data, other historical data, and the like, from memory 606.

[0075] Using the operational information and the clinical information, the mode transition process 900 identifies or otherwise determines the available operating modes for

the transition destination (task 906). In this regard, the supervisory module 810 utilizes the clinical information in conjunction with the operational information to identify which other operating modes are viable destinations for the transition while excluding any operating modes that are likely to violate one or more applicable constraints or otherwise are not likely to be viable. In this manner, the mode transition process 900 increases the likelihood that the destination operating mode will not result in violations of applicable delivery control rules, constraints, limits, or the like. The mode transition process 900 also reduces the likelihood that the destination operating mode will generate alerts that could degrade the user experience, and reduces the likelihood that the destination operating mode will automatically terminate or exit after being activated.

[0076] For example, in one or more embodiments, a maximum suspension time limit may be imposed on the infusion device 502 across all operating modes, with the supervisory module 810 excluding operating modes that would likely result in the minimum suspension time being violated based on the current suspend duration for the initial operating mode and the current or predicted glucose values for the user. For example, if transitioning from a closed-loop operating mode that has been suspending delivery for a period of time, and the user's predicted glucose value indicates the PLGM operating mode will likely suspend delivery for an additional amount of time such that the sum of the current suspend duration for the closed-loop operating mode and the expected suspend duration for the PLGM operating mode exceeds the maximum suspension time, the supervisory module 810 may exclude the PLGM operating mode from consideration as a possible destination operating mode.

[0077] As another example, a maximum insulin delivery limit over a particular timeframe (e.g., the preceding 24 hours) may be imposed, with the supervisory module 810 excluding operating modes that would likely result in the maximum insulin delivery limit being delivered based on the amount of insulin delivered for the initial operating mode and the current or predicted glucose values for the user. For example, if the difference between current and/or predicted glucose values for the user and the target glucose value for the closed-loop operating mode indicates that the closed-loop operating mode is likely to result in an amount of fluid delivery that would cause a maximum insulin delivery limit to be violated, the supervisory module 810 may exclude the closed-loop operating mode from consideration as a possible destination operating mode. In lieu of the closed-loop operating mode, in some embodiments, if the mode transition process 900 is initiated in response to the maximum insulin delivery limit being reached during

implementation of a current operating mode, a safe basal delivery mode (or hybrid closed-loop delivery mode) may be identified as a possible destination operating mode. The safe basal delivery mode may be realized as a hybrid closed-loop operating mode that configured to maintain a delivery rate that does not violate either the maximum insulin delivery limit or a minimum insulin delivery limit independent of the current or predicted measurements of the user's glucose. In this regard, the safe basal delivery mode may impose a maximum delivery rate that is less than or equal to the maximum insulin delivery limit divided by its applicable timeframe and impose a minimum delivery rate that is greater than the minimum insulin delivery limit divided by its applicable timeframe. Thus, the delivery commands generated in the safe basal delivery mode based on the difference between the current sensor glucose measurement value and the target glucose measurement value are bounded such that they will not violate applicable delivery limits.

[0078] Similarly, the supervisory module 810 may exclude operating modes that would likely result in the minimum insulin delivery limit being violated based on the amount of insulin delivered for the initial operating mode and the current or predicted glucose values for the user. For example, if the difference between current and/or predicted glucose values for the user and the target glucose value indicates the closed-loop operating mode is unlikely to deliver fluid for an amount of time that would cause the minimum insulin delivery limit to be violated, the supervisory module 810 may exclude the closed-loop operating mode from consideration as a possible destination operating mode. In some embodiments, if the mode transition process 900 is initiated in response to the minimum insulin delivery limit being reached during implementation of a current operating mode, a safe basal delivery mode may be identified as a possible destination operating mode in lieu of the closed-loop operating mode.

[0079] As another example, the supervisory module 810 may exclude operating modes that utilize sensor glucose measurement values based on sensor health information. In this regard, recent sensor glucose measurement values or historical calibration information for the sensing arrangement 504 indicating that the sensing arrangement 504 may not be viable for the particular operating mode. In this regard, if the previous sensor glucose measurement values or historical calibration information indicates the sensing arrangement 504 is unhealthy or may require recalibration or replacement, the supervisory module 810 prevents entry of operating modes that would otherwise be relying potentially unreliable sensor measurement values. For example, the supervisory module 810 may exclude the closed-loop operating mode from consideration as a possible destination

operating mode if a difference between the current sensor glucose measurement value and a predicted glucose value is greater than a threshold value, a calibration factor for the sensing arrangement 504 has expired, communications with the sensing arrangement 504 have been interrupted, a difference between the current calibration factor and the preceding calibration factor is greater than a threshold amount (e.g., a difference of more than 35%), or a difference between reference blood glucose measurement value and the corresponding sensor measurement value used for the current calibration factor is greater than a threshold amount (e.g., the sensor measurement value is more than 35% greater than or less than the reference blood glucose measurement value). In other embodiments, an operating mode that utilizes sensor glucose measurement values may be excluded when a duration of time that has elapsed since the most recent calibration exceeds a threshold value.

[0080] In one exemplary embodiment, a desired maximum number of alerts over a particular timeframe (e.g., the preceding 24 hours) could be designated by the user, with the supervisory module 810 excluding operating modes that would likely result in that maximum number of alerts being exceeded. For example, the operational information obtained by the supervisory module 810 may include a current number of user notifications or alerts that have been generated by the current operating mode (e.g., by the respective control module 802, 804, 806, 808 implementing a corresponding counter). The supervisory module 810 may determine an expected number of user notifications or alerts to be generated by a particular operating mode based on the current and/or predicted glucose values for the user, and exclude that operating mode from the set of possible destination operating modes when the sum of the expected number of alerts and the current number of alerts exceeds the maximum number chosen by the user.

[0081] In one or more embodiments, the supervisory module 810 excludes operating modes based on the status of user notifications previously generated by the infusion device 502. For example, if a user notification has been generated that indicates the user should recalibrate or replace the sensing arrangement 504, and the user has not responded to the user notification by recalibrating or replacing the sensing arrangement 504 within a threshold amount of time (e.g., 90 minutes), the supervisory module 810 may exclude the closed-loop operating mode or other operating modes that rely on the sensing arrangement 504 from consideration as possible destination modes until the user responds to the notification.

[0082] Still referring to FIG. 9, after identifying the available operating modes for a potential transition destination, the mode transition process 900 continues by identifying or otherwise selecting a destination operating mode from among the group of available operating modes (task 908). In exemplary embodiments, the supervisory module 810 automatically selects the available operating mode to that is most preferable or most highly ranked based on device settings or user preferences maintained in memory 606. In this regard, the user may manipulate a user interface 540, 608 to establish a hierarchical ordering of the operating modes in the user's order of preference, with the hierarchical information being stored in the memory 606 along with other user preferences. For example, the user may identify the closed-loop operating mode as the most preferred operating mode, followed by the PLGM operating mode as the next most preferred operating mode, the LGS operating mode as the next most preferred operating mode, and the open-loop operating mode as the least preferred operating mode. In other embodiments, default settings for the infusion device 102, 200, 502 may specify a default hierarchical order of operating modes. It should be appreciated, however, that the subject matter described herein is not limited to any particular type of selection criteria used to identify the most preferable operating mode from among the available operating modes.

[0083] After selecting the destination operating mode, the mode transition process 900 continues by identifying or otherwise determining the types or subset of operational information pertaining to the current operating mode to be provided to the destination operating mode and providing that identified operational information to the destination operating mode (tasks 910, 912). In this regard, the supervisory module 810 passes at least a portion of the operational information obtained from the current operating mode control module 802, 804, 806, 808 to the destination module 802, 804, 806, 808 such that the implementation of the destination operating mode does not violate any delivery rules, constraints, limits, or the like. For example, the supervisory module 810 may obtain the current refractory period timer value, the current suspend duration timer value, or the like, from the control module 802, 804, 806, 808 corresponding to the current operating mode and provide those values to the control module 802, 804, 806, 808 corresponding to the destination operating mode to ensure that the destination operating mode does not violate a minimum refractory time period between suspending delivery, a maximum suspend duration, a minimum suspend duration, or the like. Additionally, the supervisory module 810 may provide the exit reason for the current operating mode, the current delivery status, information about alerts or events that occurred during the current operating mode, active

insulin estimates, sensor health status and/or calibration information, and/or other historical delivery information to the destination operating mode control module 802, 804, 806, 808. The destination operating mode generates dosage commands in accordance with the operational information received from the preceding operating mode to provide a relatively seamless transition among operating modes.

[0084] Referring again to FIG. 9, the mode transition process 900 continues by providing, to the infusion device motor control module, the dosage (or delivery) commands generated by the destination operating mode in accordance with the provided operational information (task 914). In this regard, the supervisory module 810 signals, commands or otherwise operates the command multiplexer 820 to output dosage commands generated by the destination operating mode control module 802, 804, 806, 808 and cease outputting dosage commands from the previously-active operating mode. For example, to transition from the closed-loop operating mode to the PLGM operating mode, the supervisory module 810 signals, commands or otherwise operates the command multiplexer 820 to output dosage commands generated by the PLGM control module 804 instead of the closed-loop control module 802. Additionally, in some embodiments, the supervisory module 810 may assert or otherwise provide interrupt signals that indicate, to the respective control modules 802, 804, 806, 808, whether or not the respective control module 802, 804, 806, 808 should generate dosage commands. For example, the supervisory module 810 may deactivate the closed-loop control module 802 (e.g., by providing a logical high interrupt signal to the closed-loop control module 802) and activate the PLGM control module 804 (e.g., by providing a logical low interrupt signal to the PLGM control module 804) while maintaining the other control modules 806, 808 deactivated.

[0085] Referring to FIG. 8, in accordance with one embodiment, when transitioning from the closed-loop operating mode to the PLGM operating mode, the supervisory module 810 obtains information identifying the exit reason (e.g., manual or auto), the amount of time delivery has been suspended in the preceding sixty minutes, and the current value of the closed-loop refractory timer from the closed-loop control module 802. In some embodiments, the supervisory module 810 calculates the refractory time based on the amount of continuous delivery commands that precede the transition. The supervisory module 810 provides the obtained values and information to the PLGM control module 804, and thereafter, the PLGM control module 804 generates dosage commands in accordance with the operational information from the closed-loop control module 802.

[0086] For example, the PLGM control module 804 may set its refractory timer to the value of the closed-loop refractory timer and maintain delivery until the total refractory time exceeds the minimum refractory time period before suspending delivery. Thus, even if the user's predicted glucose level is below the predictive suspend threshold, the PLGM control module 804 may continue providing dosage commands that result in a basal rate of infusion until the value of the PLGM refractory timer is greater than or equal to the minimum refractory time period. In some embodiments, the PLGM control module 804 may utilize the exit reason to determine whether to continue providing dosage commands until the value of the PLGM refractory timer is greater than or equal to the minimum refractory time period. For example, if the exit reason is manual (e.g., the user manually transitioned the infusion device 502 to the PLGM mode), the PLGM control module 804 may provide dosage commands until the minimum refractory time period is observed, however, if the exit reason is automatic, the PLGM control module 804 may suspend dosage commands before the minimum refractory time period is observed and reset the PLGM refractory timer as appropriate.

[0087] In some embodiments, the sensor health status and/or calibration information, estimated active insulin information, and/or other operational information from the closed-loop operating mode may be utilized in conjunction with the exit reason when determining whether to observe the minimum refractory time period in the PLGM operating mode. For example, the PLGM control module 804 may allow dosage commands to be suspended only if the sensing arrangement 504 was calibrated less than a threshold amount of time before the transition (e.g., within the last hour) and the estimated active insulin is greater than a safe threshold value, which may be manually set by a user or a default value maintained by the infusion device 502. Thus, the minimum refractory time period may still be observed for an automatic transition if the sensing arrangement 504 was not calibrated recently or the estimated active insulin is too low. Conversely, the PLGM control module 804 may automatically suspend delivery when the refractory time from the closed-loop control module 802 is less than the minimum refractory time period in response to determining the active insulin estimate from the closed-loop control module 802 is greater than the threshold value.

[0088] Similarly, if delivery is currently being suspended, the PLGM control module 804 may set its delivery suspend timer to the value of the closed-loop suspend timer (e.g., the amount of time delivery has been suspended in the preceding sixty minutes). Thus, even if the user's predicted glucose level is below the predictive suspend threshold, the

PLGM control module 804 may begin providing dosage commands once the value of the PLGM delivery suspend timer is greater than the maximum suspension time period. Additionally, in some embodiments, the exit reason may be utilized by the PLGM control module 804 to determine whether to suspend delivery or resume delivery, either independently or in conjunction with the sensor health status and/or calibration information, estimated active insulin information, and/or other operational information, in a similar manner as described above. For example, if the sensing arrangement 504 was calibrated less than a threshold amount of time before the transition (e.g., within the last hour) and the estimated active insulin is less than a threshold value, the PLGM control module 804 may resume providing dosage commands even though the maximum suspension time period may not have been met.

[0089] When transitioning from the closed-loop operating mode to the LGS operating mode, the supervisory module 810 obtains information identifying the exit reason (e.g., manual or auto), the amount of time delivery has been suspended in the preceding sixty minutes, and the current value of the closed-loop refractory timer from the closed-loop control module 802 and provides the obtained values and information to the LGS control module 806 for generating dosage commands in accordance therewith, in a similar manner as described above for transitions to the PLGM operating mode.

[0090] In another example embodiment, when transitioning from the closed-loop operating mode to the open-loop operating mode, the supervisory module 810 may only provide the refractory timer values from the closed-loop control module 802 to the open-loop control module 808. In such an embodiment, the open-loop control module 808 provides dosage commands that result in an open-loop basal rate of infusion while dynamically updating the refractory timer value for a subsequent transition to another operating mode. In this regard, the refractory timer value is updated so that if the infusion device 502 subsequently transitions from the open-loop operating mode to another operating mode where delivery could be suspended, the minimum refractory period is still observed by the control module 802, 804, 806 associated with that subsequent operating mode before delivery is suspended. In other embodiments, in lieu of providing the refractory time information to the open-loop control module 808, the supervisory module 810 may independently manage and dynamically update the refractory time information, and subsequently provide the refractory time information to another destination control module 802, 804, 806 when transitioning from the open-loop operating mode. Similarly, in some embodiments, the supervisory module 810 may provide suspension information to

the open-loop control module 808 (e.g., the amount of time delivery was suspended over a preceding time interval) for dynamically updating the suspension time information to ensure any maximum suspension limits are still observed by a control module 802, 804, 806 associated with that subsequent operating mode. Alternatively, the supervisory module 810 may also independently manage and dynamically update the refractory time information, and subsequently provide the refractory time information to a destination control module 802, 804, 806 when transitioning from the open-loop operating mode.

[0091] In other exemplary embodiments, when transitioning from the PLGM operating mode or the LGS operating mode to the closed-loop operating mode, the supervisory module 810 obtains information identifying the exit reason (e.g., manual or auto) and the current value of the respective refractory timer from the respective control module 804, 806 and provides the obtained values and information to the closed-loop control module 802. In this regard, the closed-loop control module 802 sets its refractory timer to the value of the refractory timer of the respective control module 804, 806 and may maintain delivery until the total refractory time exceeds the minimum refractory time period before suspending delivery. In other embodiments, the closed-loop control module 802 may suspend delivery even though the total refractory time is less than the minimum refractory time period. For example, the closed-loop control module 802 may obtain sensor calibration information from the preceding operating mode and determine whether a duration of time that has elapsed since the most recent calibration exceeds a threshold value corresponding to the reliable lifetime of a calibration factor for purposes of the closed-loop mode. When the duration of time that has elapsed since the most recent calibration exceeds the threshold value, the closed-loop control module 802 may generate a notification via the user interface 540 that prompts the user to obtain a new blood glucose reference measurement value for recalibrating the sensing arrangement 504 upon transitioning to the closed-loop mode. In response to the user manipulating the blood glucose meter 530 to obtain a new blood glucose reference measurement value, and the new blood glucose reference measurement value indicates delivery should be suspended, the closed-loop control module 802 may suspend delivery even though the total refractory time does not exceed the minimum refractory time period. Alternatively, in the absence of a new blood glucose reference measurement value that indicates delivery should be suspended, the closed-loop control module 802 may generate dosage commands to provide a minimum basal rate of infusion while the closed-loop refractory timer value is less than

the minimum refractory time period even though the user's current glucoses measurement value may be less than the target glucose value for the closed-loop control system.

[0092] In yet other exemplary embodiments, when transitioning from the open-loop operating mode to another operating mode, the supervisory module 810 obtains information identifying the exit reason (e.g., manual or auto) and the current value of the refractory timer from the open-loop module 808 and provides the obtained value to the particular destination operating mode control module 802, 804, 806. In this regard, when transitioning from the open-loop operating mode, the destination operating mode control module 802, 804, 806 sets its refractory timer to the value provided by the supervisory module 810 to maintain delivery until the total refractory time exceeds the minimum refractory time period before allowing delivery to be suspended.

[0093] It will be appreciated that in practice there are numerous different types of information that may be exchanged among control modules 802, 804, 806, 808 to achieve a desired manner of transitioning and comply with the particular constraints, rules, and/or limits for a particular application. Accordingly, the above examples are provided merely to aid in understanding of the subject matter and are not intended to be limiting.

[0094] To briefly summarize, the subject matter described herein facilitates transitioning between operating modes in a manner that enhances the user experience (e.g., by enabling the user to proactively increase viability of a desired operating mode and/or excluding operating modes that are likely to generate alerts from possible destinations for automatic transitions) and ensures compliance with applicable delivery control rules and other constraints (e.g., by excluding operating modes that are otherwise likely to result in a violation and transferring timer and/or counter values across operating modes).

[0095] For the sake of brevity, conventional techniques related to glucose sensing and/or monitoring, closed-loop glucose control, predictive glucose management, sensor calibration and/or compensation, and other functional aspects of the subject matter may not be described in detail herein. In addition, certain terminology may also be used in the herein for the purpose of reference only, and thus is not intended to be limiting. For example, terms such as “first”, “second”, and other such numerical terms referring to structures do not imply a sequence or order unless clearly indicated by the context. The foregoing description may also refer to elements or nodes or features being “connected” or “coupled” together. As used herein, unless expressly stated otherwise, “coupled” means that one element/node/feature is directly or indirectly joined to (or directly or indirectly communicates with) another element/node/feature, and not necessarily mechanically.

[0096] While at least one exemplary embodiment has been presented in the foregoing detailed description, it should be appreciated that a vast number of variations exist. It should also be appreciated that the exemplary embodiment or embodiments described herein are not intended to limit the scope, applicability, or configuration of the claimed subject matter in any way. For example, the subject matter described herein is not limited to the infusion devices and related systems described herein. Moreover, the foregoing detailed description will provide those skilled in the art with a convenient road map for implementing the described embodiment or embodiments. It should be understood that various changes can be made in the function and arrangement of elements without departing from the scope defined by the claims, which includes known equivalents and foreseeable equivalents at the time of filing this patent application. Accordingly, details of the exemplary embodiments or other limitations described above should not be read into the claims absent a clear intention to the contrary.

The following paragraphs set out further embodiments forming part of the present disclosure.

Paragraph 1. A method of operating an infusion device operable to deliver fluid to a user, the method comprising:

- operating the infusion device to deliver the fluid in accordance with a first operating mode of a plurality of operating modes; and

- obtaining operational information pertaining to the first operating mode;

- obtaining clinical information pertaining to the user;

- determining a destination operating mode of the plurality of operating modes based at least in part on the operational information and the clinical information; and

- operating the infusion device to deliver the fluid in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

Paragraph 2. The method of paragraph 1, wherein determining the destination operating mode comprises:

- identifying a set of one or more possible operating modes of the plurality of operating modes based at least in part on the operational information and the clinical information; and

- selecting the destination operating mode from the set.

Paragraph 3. The method of paragraph 2, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes when the clinical information indicates the operating mode will violate a delivery control rule based on the operational information.

Paragraph 4. The method of paragraph 3, the clinical information including a current glucose measurement value and the operational information including a suspended delivery time for the first operating mode, wherein excluding the operating mode comprises excluding the operating mode when the current glucose measurement value indicates the operating mode will violate a suspension time limit based on the suspended delivery time.

Paragraph 5. The method of paragraph 3, the clinical information including a current glucose measurement value and an insulin delivered, wherein excluding the operating mode comprises excluding the operating mode when the current glucose measurement value indicates the operating mode will violate an insulin delivery limit.

Paragraph 6. The method of paragraph 2, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes when the clinical information indicates the operating mode will generate a user notification.

Paragraph 7. The method of paragraph 2, the operational information including a first number of user notifications generated by the first operating mode, wherein identifying the set of one or more possible operating modes comprises:

determining an operating mode of the plurality of operating modes is likely to generate a second number of user notifications based on the clinical information; and

excluding the operating mode of the plurality of operating modes from the set when a sum of the first number and the second number is greater than a threshold number of user notifications.

Paragraph 8. The method of paragraph 2, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes when the clinical information indicates the operating mode will automatically terminate.

Paragraph 9. The method of paragraph 2, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes in response to determining the operating mode is not viable for an expected duration based at least in part on the clinical information.

Paragraph 10. The method of paragraph 2, the portion of the operational information including sensor health information, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes based on the sensor health information.

Paragraph 11. The method of paragraph 1, the portion of the operational information including a value for a first timer of the first operating mode, wherein operating the infusion device to deliver the fluid in accordance with the destination operating mode comprises setting the first timer of the destination operating mode to the value.

Paragraph 12. The method of paragraph 1, the portion of the operational information including an insulin estimate and a refractory time, wherein operating the infusion device comprises suspending delivery when the refractory time is less than a minimum refractory period in response to determining the insulin estimate is greater than a threshold amount.

Paragraph 13. An infusion device comprising:

- a data storage element to maintain operational information pertaining to a first operating mode of a plurality of operating modes and clinical information pertaining to a user;

- a motor operable to deliver fluid to a body of the user, the fluid influencing a physiological condition of the user; and

- a control system coupled to the motor and the data storage element to:

- operate the motor to deliver the fluid in accordance with the first operating mode;

- determine a destination operating mode of the plurality of operating modes based at least in part on the operational information and the clinical information; and

operate the infusion device to deliver the fluid in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

Paragraph 14. The infusion device of paragraph 13, further comprising a user interface to receive an indication to exit the first operating mode from the user, wherein the control system determines the destination operating mode and transitions from the first operating mode to the destination operating mode in response to the indication.

Paragraph 15. The infusion device of paragraph 13, wherein the control system includes a supervisory module to select the destination operating mode from among the plurality of operating modes and provide the portion of the operational information from a first module associated with the first module to a second module associated with the destination operating mode.

Paragraph 16. The infusion device of paragraph 13, wherein:

- the data storage element maintains user preferences; and

- the control system identifies a set of one or more possible operating modes of the plurality of operating modes based at least in part on the operational information and the clinical information and selects the destination operating mode from the set based on the user preferences.

Paragraph 17. A method of operating an infusion device operable to deliver insulin to a user, the method comprising:

- operating the infusion device to deliver the insulin in accordance with a first operating mode of a plurality of operating modes; and

- obtaining operational information pertaining to the first operating mode;

- obtaining one or more glucose values for the user; and

- in response to an indication to terminate the first operating mode:

- determining a set of one or more possible operating modes from the plurality of operating modes based at least in part on the one or more glucose values and the operational information;

- selecting a destination operating mode from the set of one or more possible operating modes; and

operating the infusion device to deliver the insulin in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

Paragraph 18. The method of paragraph 17, the portion of the operational information including a current value for a refractory timer of the first operating mode, wherein operating the infusion device to deliver the insulin in accordance with the destination operating mode comprises:

- setting the refractory timer of the destination operating mode to the current value for the refractory timer of the first operating mode; and

- delivering the insulin at least until a value of the refractory timer of the destination operating mode is greater than or equal to a minimum refractory period.

Paragraph 19. The method of paragraph 17, the one or more glucose values including a predicted glucose value and the operational information including a current delivery suspension time for the first operating mode, wherein determining the set of one or more possible operating modes comprises:

- determining an expected delivery suspension time for a predictive low glucose suspend operating mode of the plurality of operating modes based at least in part on the predicted glucose value; and

- excluding the predictive low glucose suspend operating mode from the set when a sum of the expected delivery suspension time and the current delivery suspension time is greater than a maximum delivery suspension threshold.

Paragraph 20. The method of paragraph 17, the one or more glucose values including a current glucose measurement value and the operational information including a current delivery suspension time for the first operating mode, wherein determining the set of one or more possible operating modes comprises:

- determining an expected delivery suspension time for a low glucose suspend operating mode of the plurality of operating modes based at least in part on the current glucose measurement value; and

- excluding the low glucose suspend operating mode from the set when a sum of the expected delivery suspension time and the current delivery suspension time is greater than a maximum delivery suspension threshold.

CLAIMS

What is claimed is:

1. A method of operating an infusion device operable to deliver fluid to a user, the method comprising:
 - operating the infusion device to deliver the fluid in accordance with a first operating mode of a plurality of operating modes; and
 - obtaining operational information pertaining to the first operating mode;
 - obtaining clinical information pertaining to the user;
 - determining a destination operating mode of the plurality of operating modes based at least in part on the operational information and the clinical information; and
 - operating the infusion device to deliver the fluid in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.
2. The method of claim 1, wherein determining the destination operating mode comprises:
 - identifying a set of one or more possible operating modes of the plurality of operating modes based at least in part on the operational information and the clinical information; and
 - selecting the destination operating mode from the set.
3. The method of claim 2, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes when the clinical information indicates the operating mode will violate a delivery control rule based on the operational information.
4. The method of claim 3, the clinical information including a current glucose measurement value and the operational information including a suspended delivery time for the first operating mode, wherein excluding the operating mode comprises excluding the operating mode when the current glucose measurement value indicates the operating mode will violate a suspension time limit based on the suspended delivery time.

5. The method of claim 3, the clinical information including a current glucose measurement value and an insulin delivered, wherein excluding the operating mode comprises excluding the operating mode when the current glucose measurement value indicates the operating mode will violate an insulin delivery limit.

6. The method of claim 2, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes when the clinical information indicates the operating mode will generate a user notification.

7. The method of claim 2, the operational information including a first number of user notifications generated by the first operating mode, wherein identifying the set of one or more possible operating modes comprises:

determining an operating mode of the plurality of operating modes is likely to generate a second number of user notifications based on the clinical information; and

excluding the operating mode of the plurality of operating modes from the set when a sum of the first number and the second number is greater than a threshold number of user notifications.

8. The method of claim 2, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes when the clinical information indicates the operating mode will automatically terminate.

9. The method of claim 2, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes in response to determining the operating mode is not viable for an expected duration based at least in part on the clinical information.

10. The method of claim 2, the portion of the operational information including sensor health information, wherein identifying the set of one or more possible operating modes comprises excluding an operating mode of the plurality of operating modes based on the sensor health information.

11. The method of claim 1, the portion of the operational information including a value for a first timer of the first operating mode, wherein operating the infusion device to

deliver the fluid in accordance with the destination operating mode comprises setting the first timer of the destination operating mode to the value.

12. The method of any preceding claim, the portion of the operational information including an insulin estimate and a refractory time, wherein operating the infusion device comprises suspending delivery when the refractory time is less than a minimum refractory period in response to determining the insulin estimate is greater than a threshold amount.

13. An infusion device comprising:

a data storage element to maintain operational information pertaining to a first operating mode of a plurality of operating modes and clinical information pertaining to a user;

a motor operable to deliver fluid to a body of the user, the fluid influencing a physiological condition of the user; and

a control system coupled to the motor and the data storage element to:

operate the motor to deliver the fluid in accordance with the first operating mode;

determine a destination operating mode of the plurality of operating modes based at least in part on the operational information and the clinical information; and

operate the infusion device to deliver the fluid in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

14. The infusion device of claim 13, further comprising a user interface to receive an indication to exit the first operating mode from the user, wherein the control system determines the destination operating mode and transitions from the first operating mode to the destination operating mode in response to the indication.

15. The infusion device of claim 13 or 14, wherein the control system includes a supervisory module to select the destination operating mode from among the plurality of operating modes and provide the portion of the operational information from a first module associated with the first mode to a second module associated with the destination operating mode.

16. The infusion device of claim 13, 14 or 15, wherein:
the data storage element maintains user preferences; and
the control system identifies a set of one or more possible operating modes of the plurality of operating modes based at least in part on the operational information and the clinical information and selects the destination operating mode from the set based on the user preferences.

17. A method of operating an infusion device operable to deliver insulin to a user, the method comprising:

operating the infusion device to deliver the insulin in accordance with a first operating mode of a plurality of operating modes; and

obtaining operational information pertaining to the first operating mode;

obtaining one or more glucose values for the user; and

in response to an indication to terminate the first operating mode:

determining a set of one or more possible operating modes from the plurality of operating modes based at least in part on the one or more glucose values and the operational information;

selecting a destination operating mode from the set of one or more possible operating modes; and

operating the infusion device to deliver the insulin in accordance with the destination operating mode in a manner that is influenced by at least a portion of the operational information pertaining to the first operating mode.

18. The method of claim 17, the portion of the operational information including a current value for a refractory timer of the first operating mode, wherein operating the infusion device to deliver the insulin in accordance with the destination operating mode comprises:

setting the refractory timer of the destination operating mode to the current value for the refractory timer of the first operating mode; and

delivering the insulin at least until a value of the refractory timer of the destination operating mode is greater than or equal to a minimum refractory period.

19. The method of claim 17, the one or more glucose values including a predicted glucose value and the operational information including a current delivery suspension time

for the first operating mode, wherein determining the set of one or more possible operating modes comprises:

determining an expected delivery suspension time for a predictive low glucose suspend operating mode of the plurality of operating modes based at least in part on the predicted glucose value; and

excluding the predictive low glucose suspend operating mode from the set when a sum of the expected delivery suspension time and the current delivery suspension time is greater than a maximum delivery suspension threshold.

20. The method of claim 17, the one or more glucose values including a current glucose measurement value and the operational information including a current delivery suspension time for the first operating mode, wherein determining the set of one or more possible operating modes comprises:

determining an expected delivery suspension time for a low glucose suspend operating mode of the plurality of operating modes based at least in part on the current glucose measurement value; and

excluding the low glucose suspend operating mode from the set when a sum of the expected delivery suspension time and the current delivery suspension time is greater than a maximum delivery suspension threshold.

21. An infusion device (502) for a medicinal fluid, the device (502) including:

a motor (507) operable to deliver the fluid in response to commands;

a management system (800) coupled to the motor (507) for generating said commands;

wherein the management system (800) includes:

a plurality of control modules (802, 804, 806, 808) each configured to generate said commands in accordance with a different respective operating mode;

a supervisory module (810) connected to each of the control modules (802, 804, 806, 808) and configured to monitor the status of the control modules, and to receive a mode transition signal;

a command multiplexer (820) connected to each of the control modules (802, 804, 806, 808), to the motor (507), and to the supervisory module (810) and configured to direct the said commands from a selected one of the control modules (802, 804, 806, 808) to the motor (507), in accordance with a selection signal from the supervisory module (810);

the supervisory module (810) being further configured to change the selection signal, upon receipt of the mode transition signal thereby causing the command multiplexer to direct the commands from a different selected one of the control modules (802, 804, 806, 808) to the motor (507).

22. The infusion system of claim 21 wherein the infusion device further includes a user interface (540) and the mode transition signal is generated by a user manipulating the user interface (540).

23. The infusion system of claim 21 wherein the management system (800) is configured to generate the mode transition signal in response to a predetermined maximum operation time limit being reached by a control module (802, 804, 806, 808) that is generating the commands being sent to the motor (507).

24. The infusion system of claim 21 wherein the management system (800) is configured to generate the mode transition signal in response to a unreliability being detected in a control module (802, 804, 806, 808) that is generating the commands being sent to the motor (507).

25. The infusion system of any of claims 21 to 23 wherein the supervisory module is configured to inhibit the selection on receipt of the mode transition signal, of a control module (802, 804, 806, 808) in which an unreliability has been detected.

26. The infusion system of any of claims 21 to 25 wherein the said status includes a prediction of future commands that would be directed to the motor (507) if a respective control module (802, 804, 806, 808) were selected, and the supervisory module (810) is configured to inhibit the selection on receipt of the mode transition signal, of a control module (802, 804, 806, 808) where the future commands would result in one or more of transgression of a pre-specified maximum suspension time, transgression of a pre-specified maximum delivery limit, and failure to meet a pre-specified minimum delivery threshold.

27. The infusion system of any one of claims 21 to 26 wherein the operating modes are selected from a list comprising open-loop mode, closed-loop mode, LGS mode in which a basal rate of delivery of the medicinal fluid is provided while a physiological analyte level that is controlled by the medicinal fluid is above a threshold and suspended while it is not,

and PLGM mode in which a basal rate of delivery of the medicinal fluid is provided while a predicted level of the physiological analyte that is controlled by the medicinal fluid is above a threshold and suspended while it is not.

28. The infusion system of any one of claims 21 to 27 wherein the medicinal fluid is insulin.

1 / 9

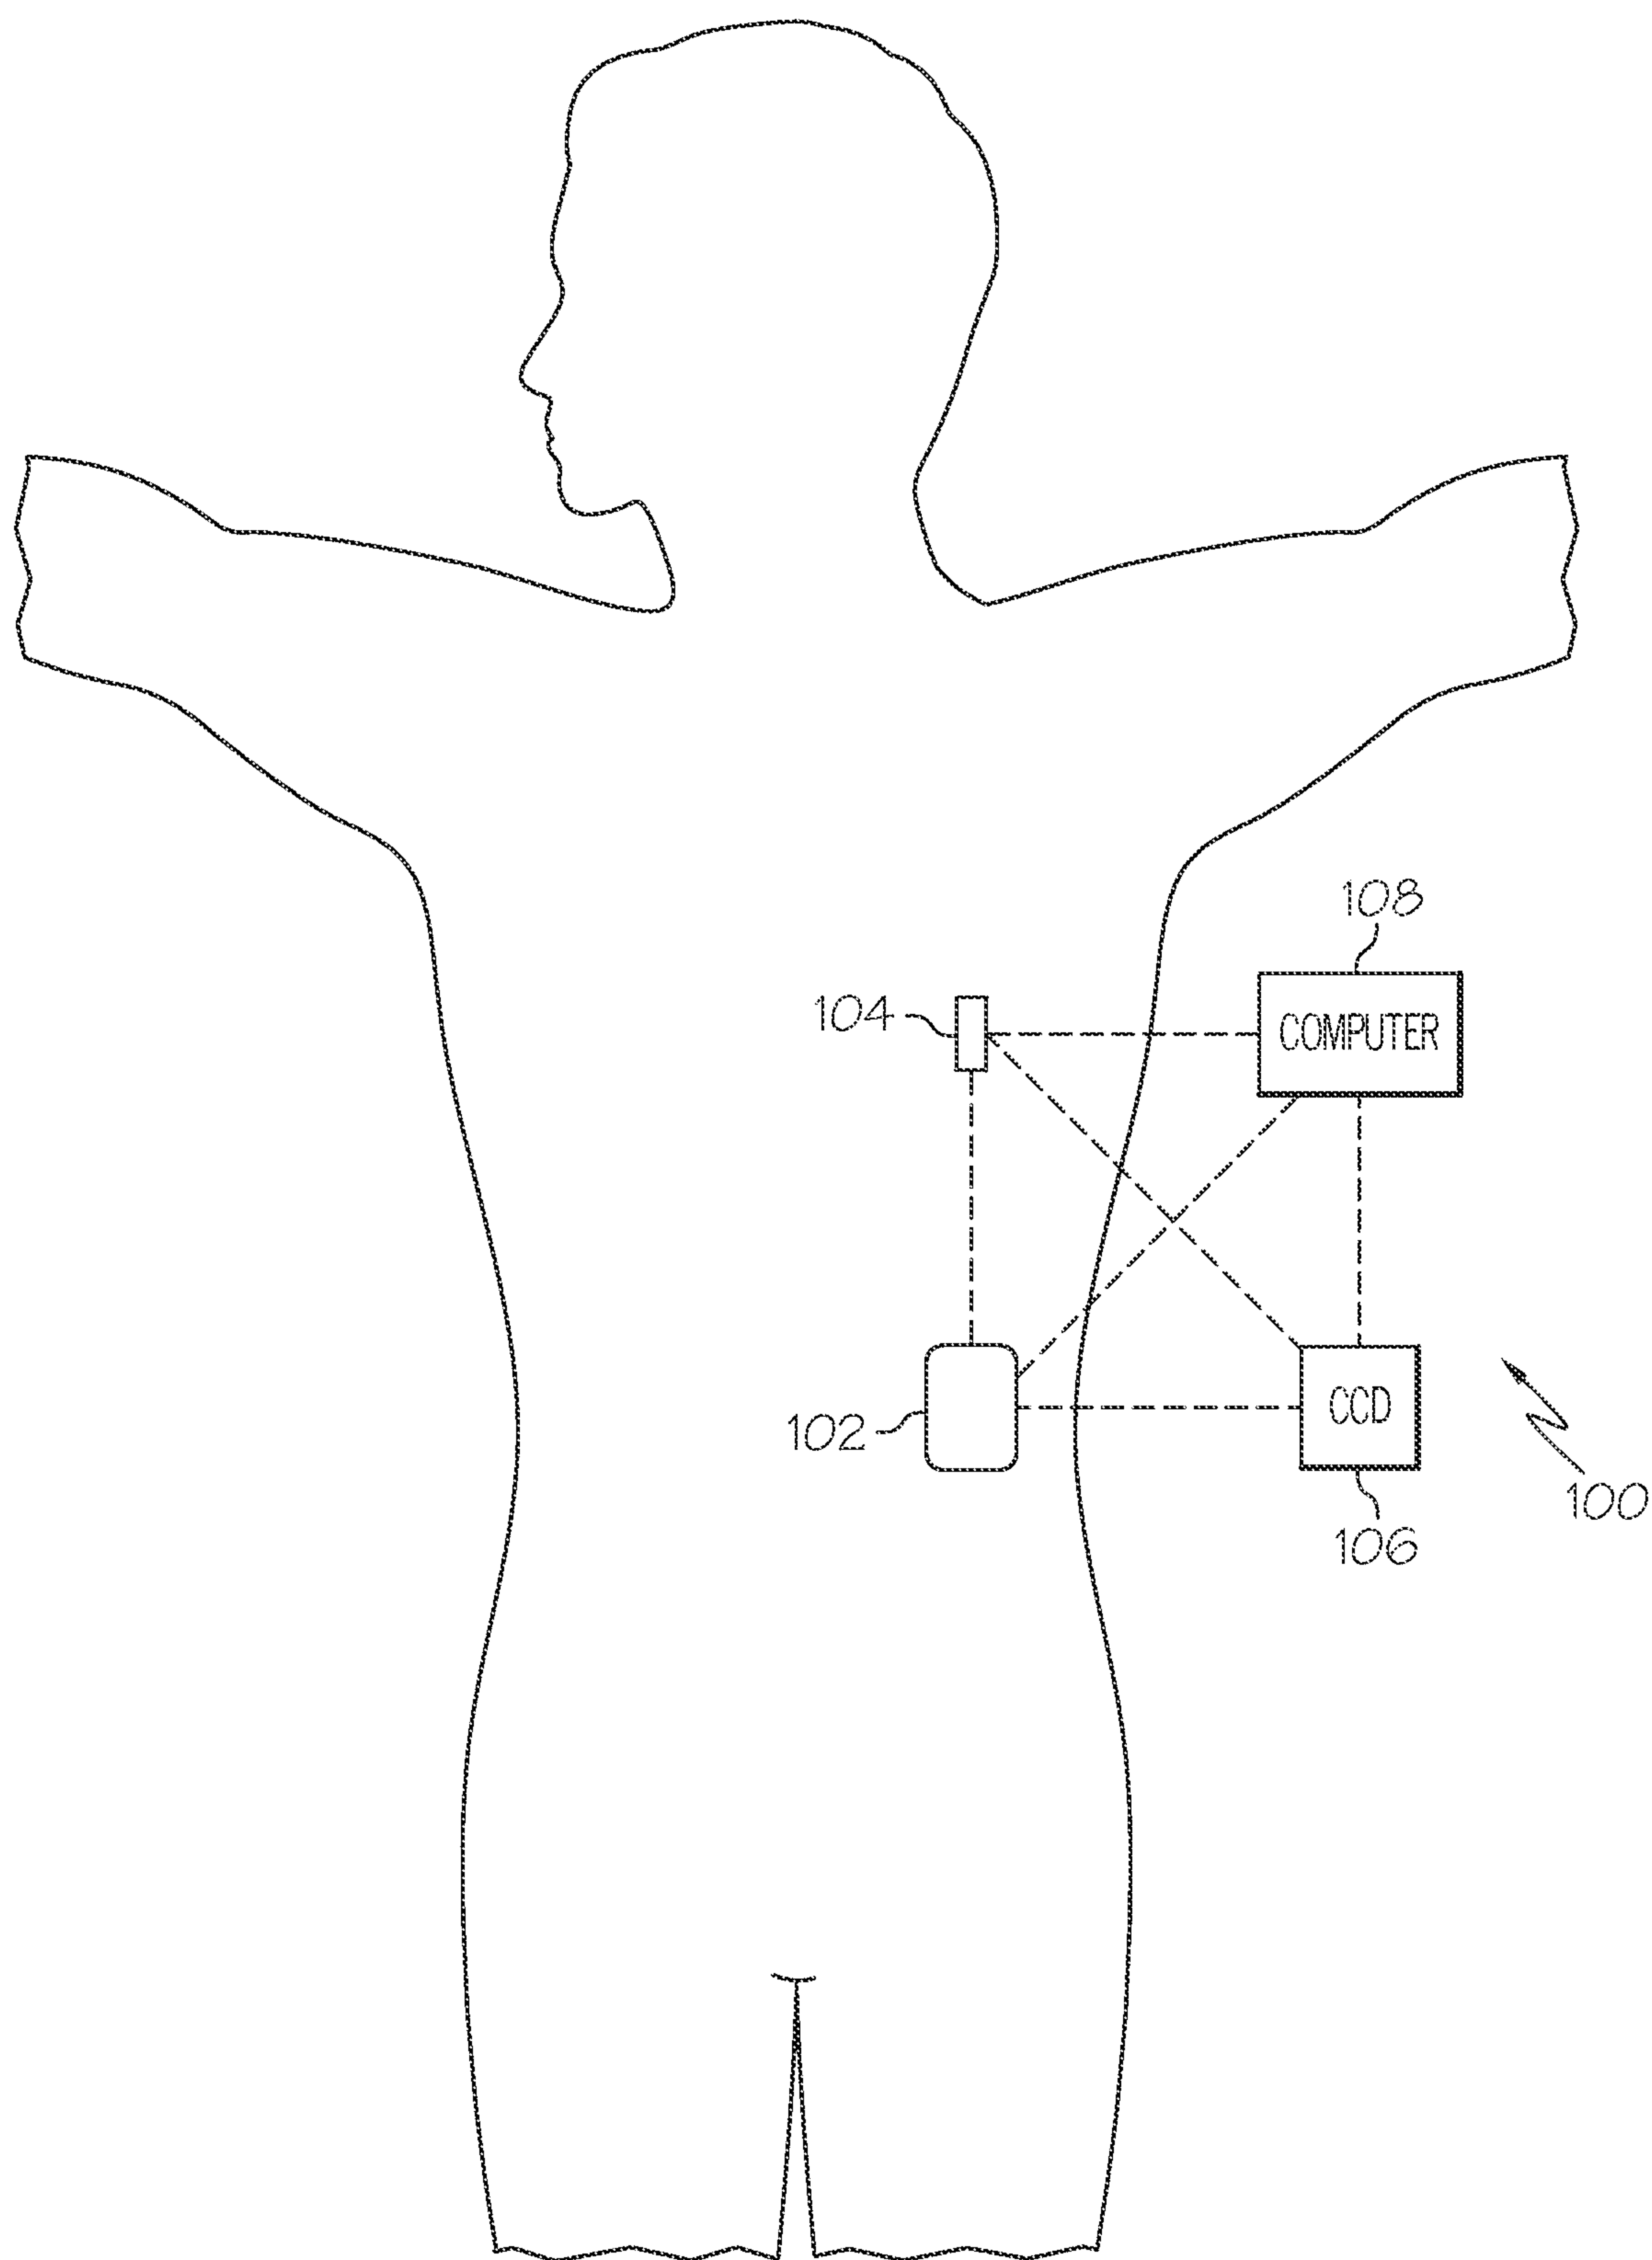


FIG. 1

2 / 9

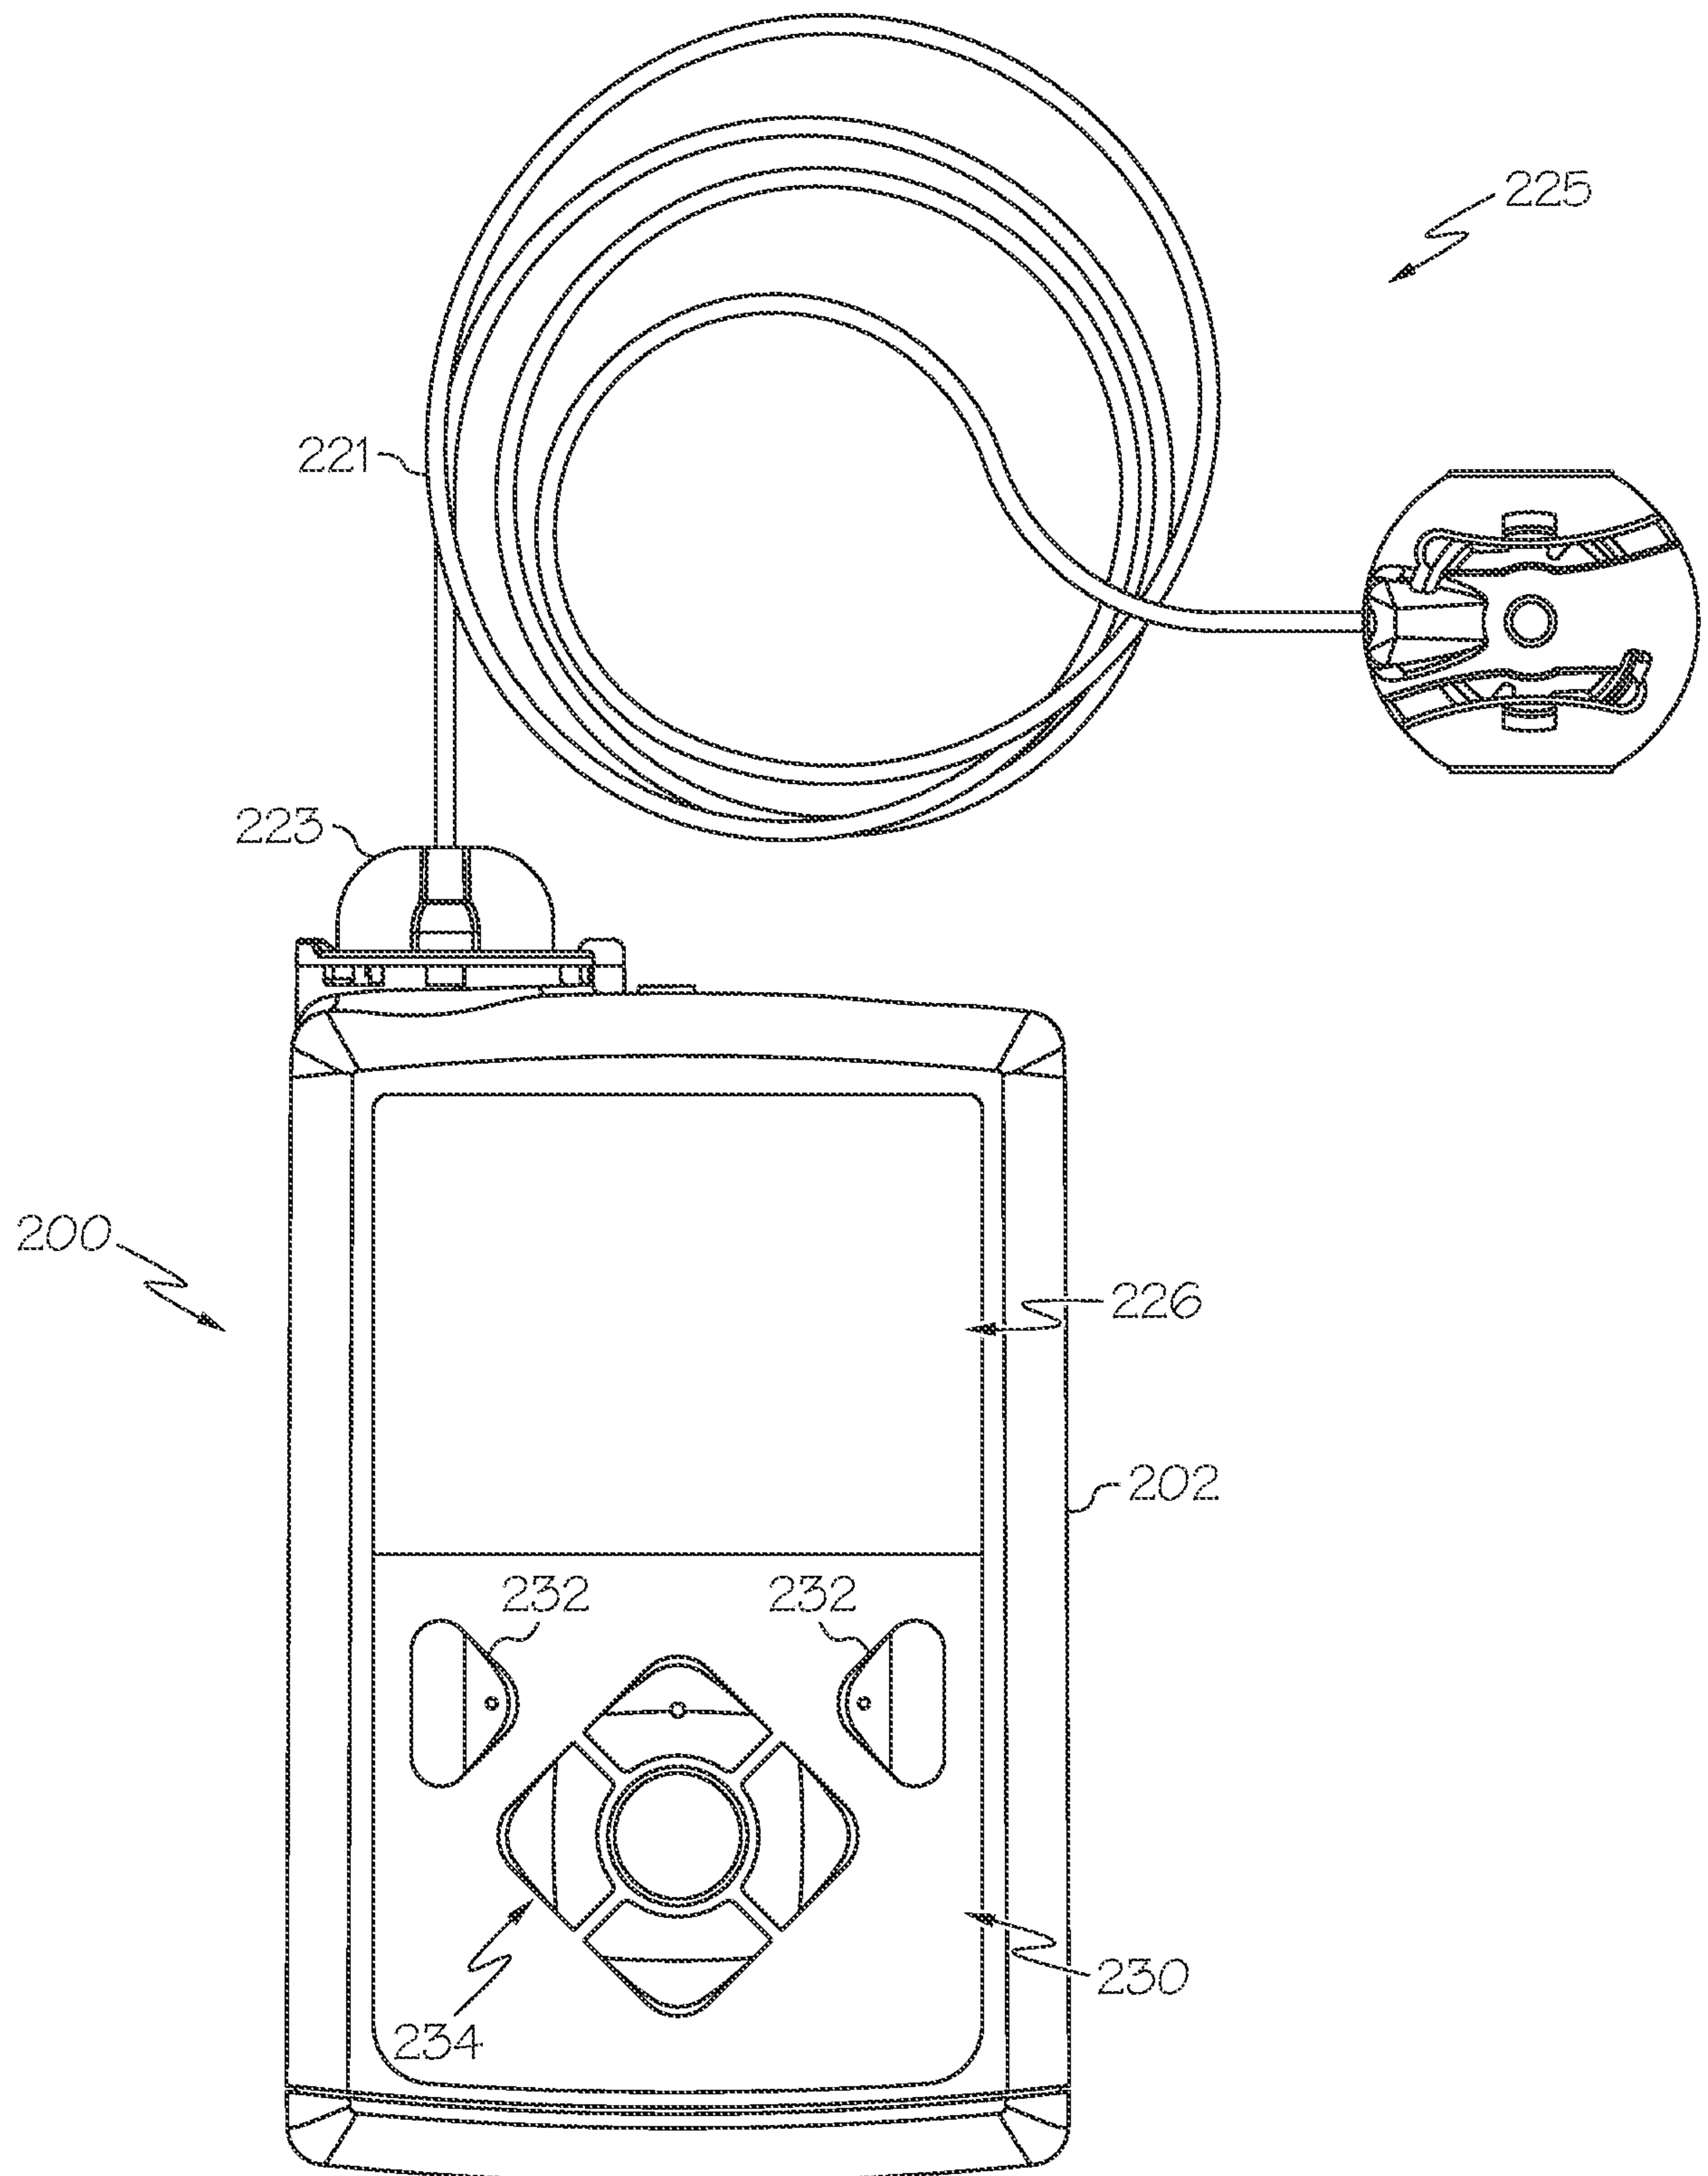


FIG. 2

3 / 9

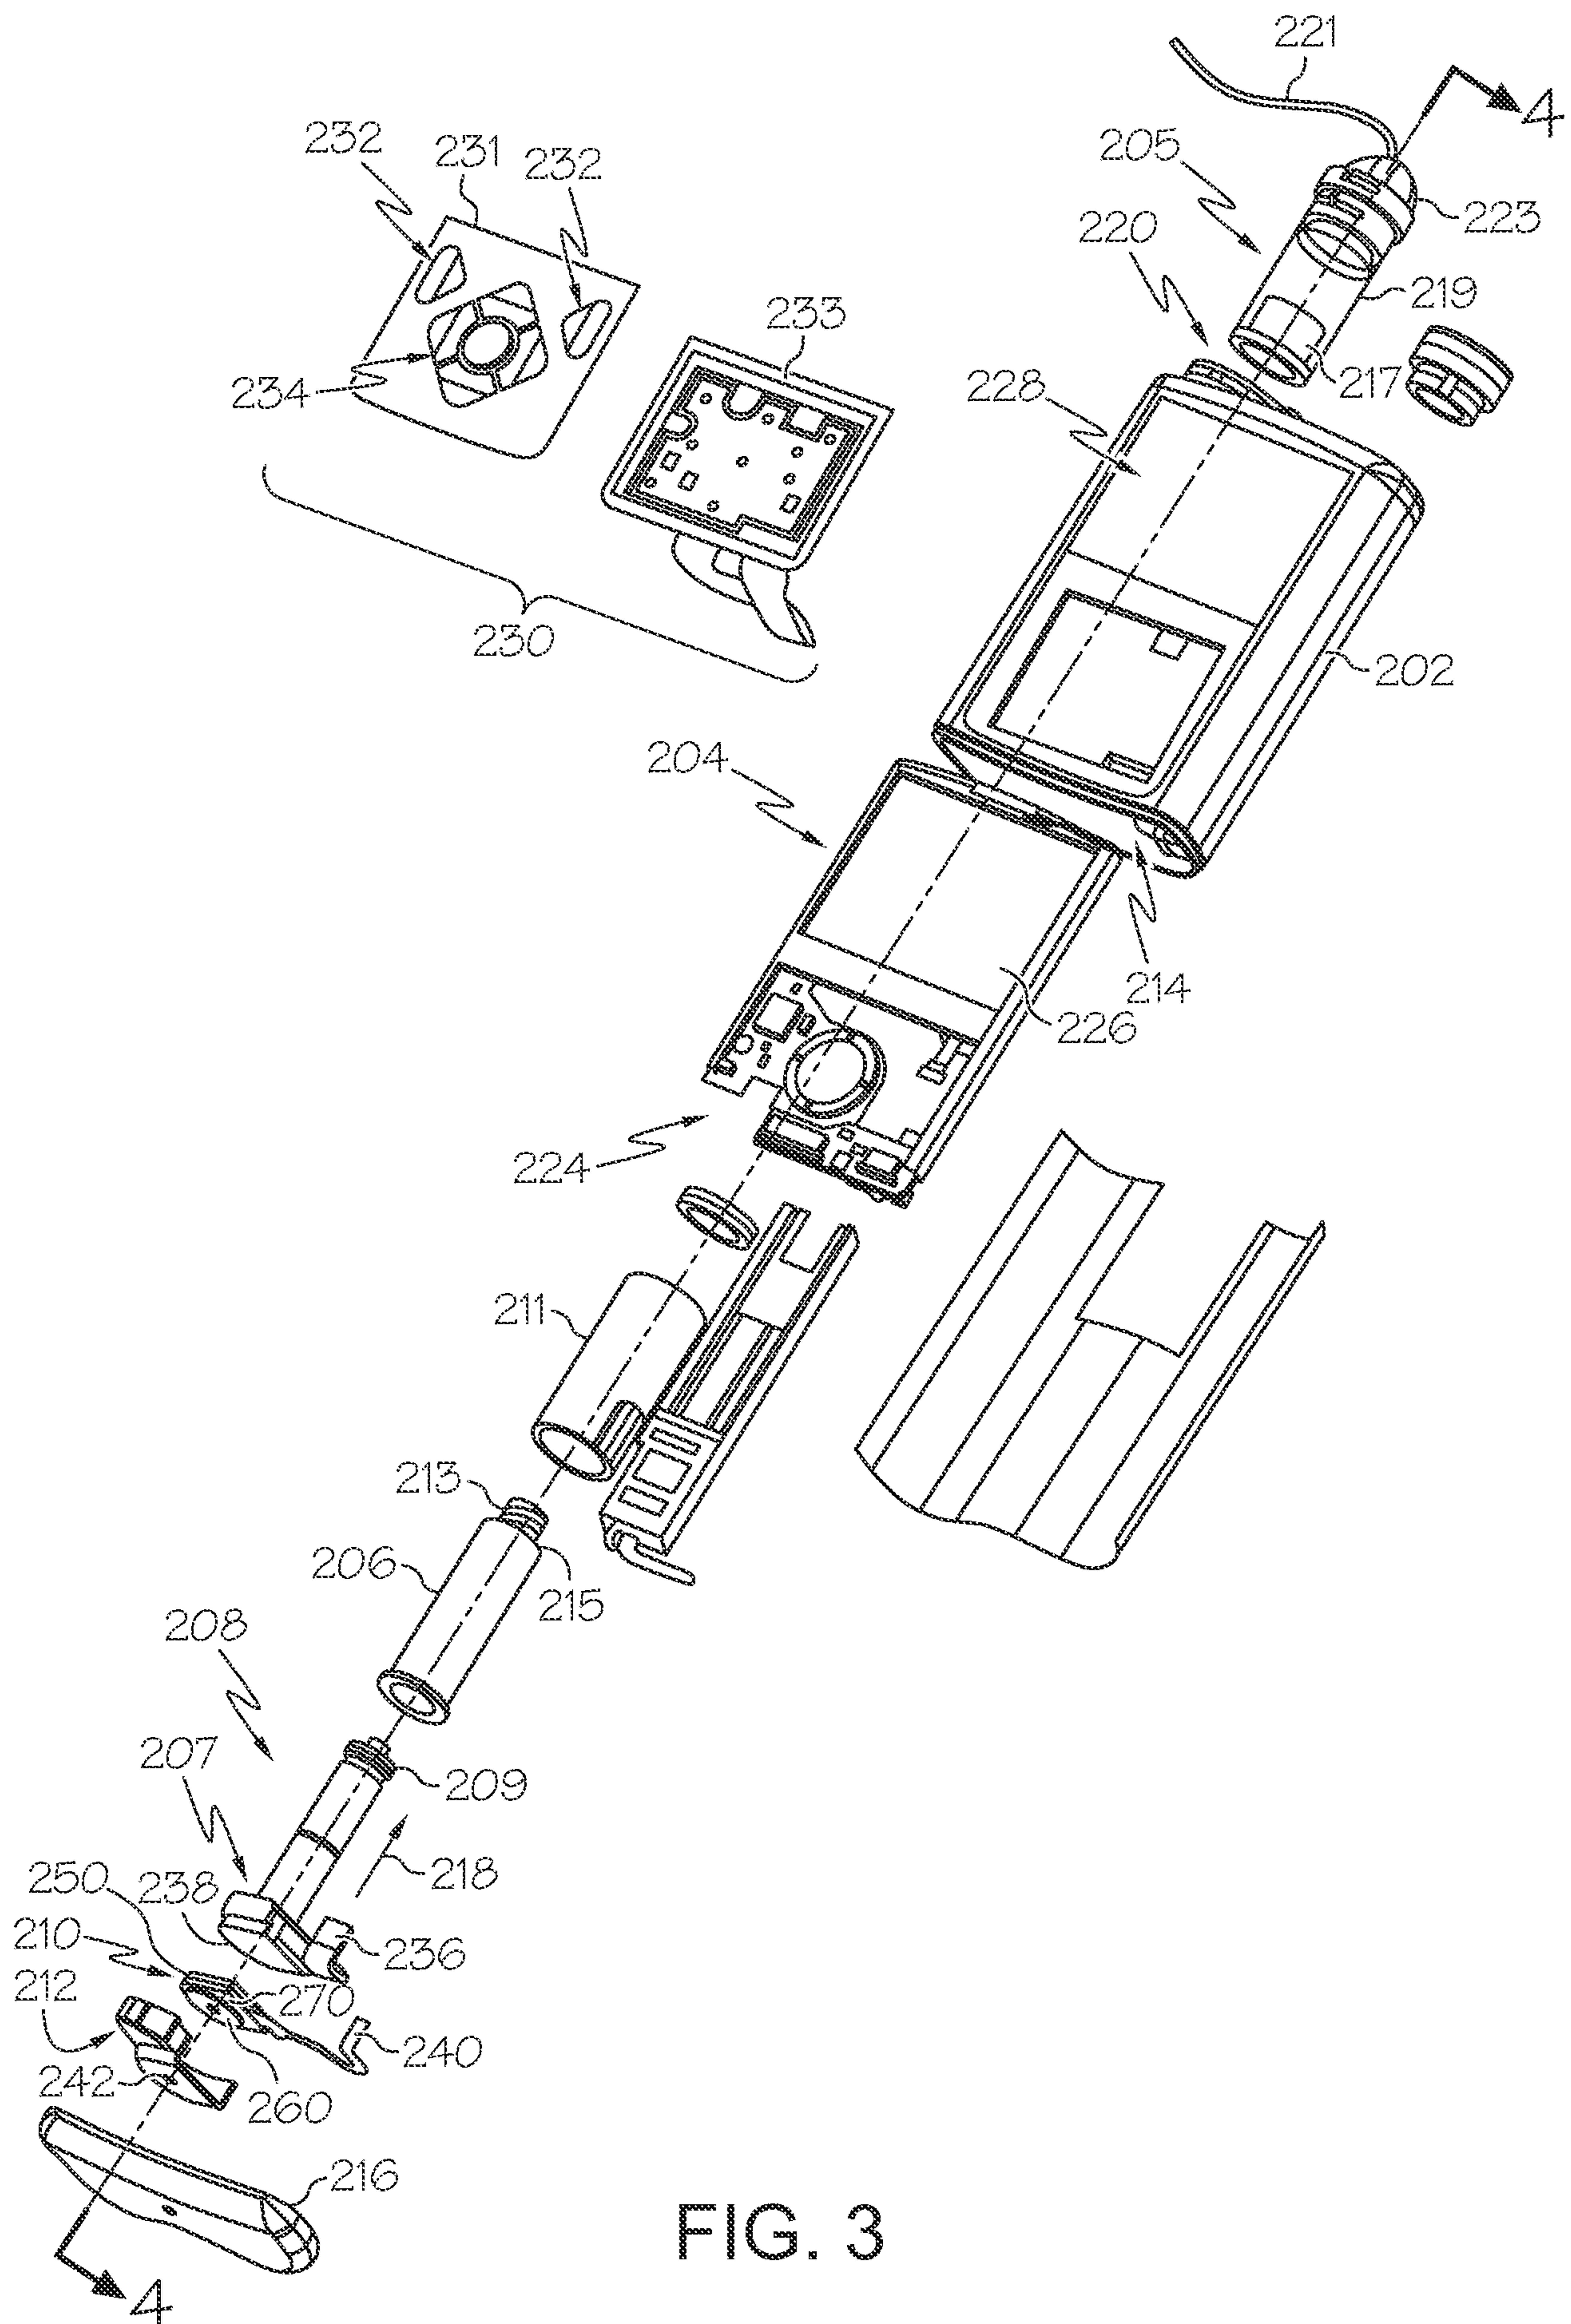


FIG. 3

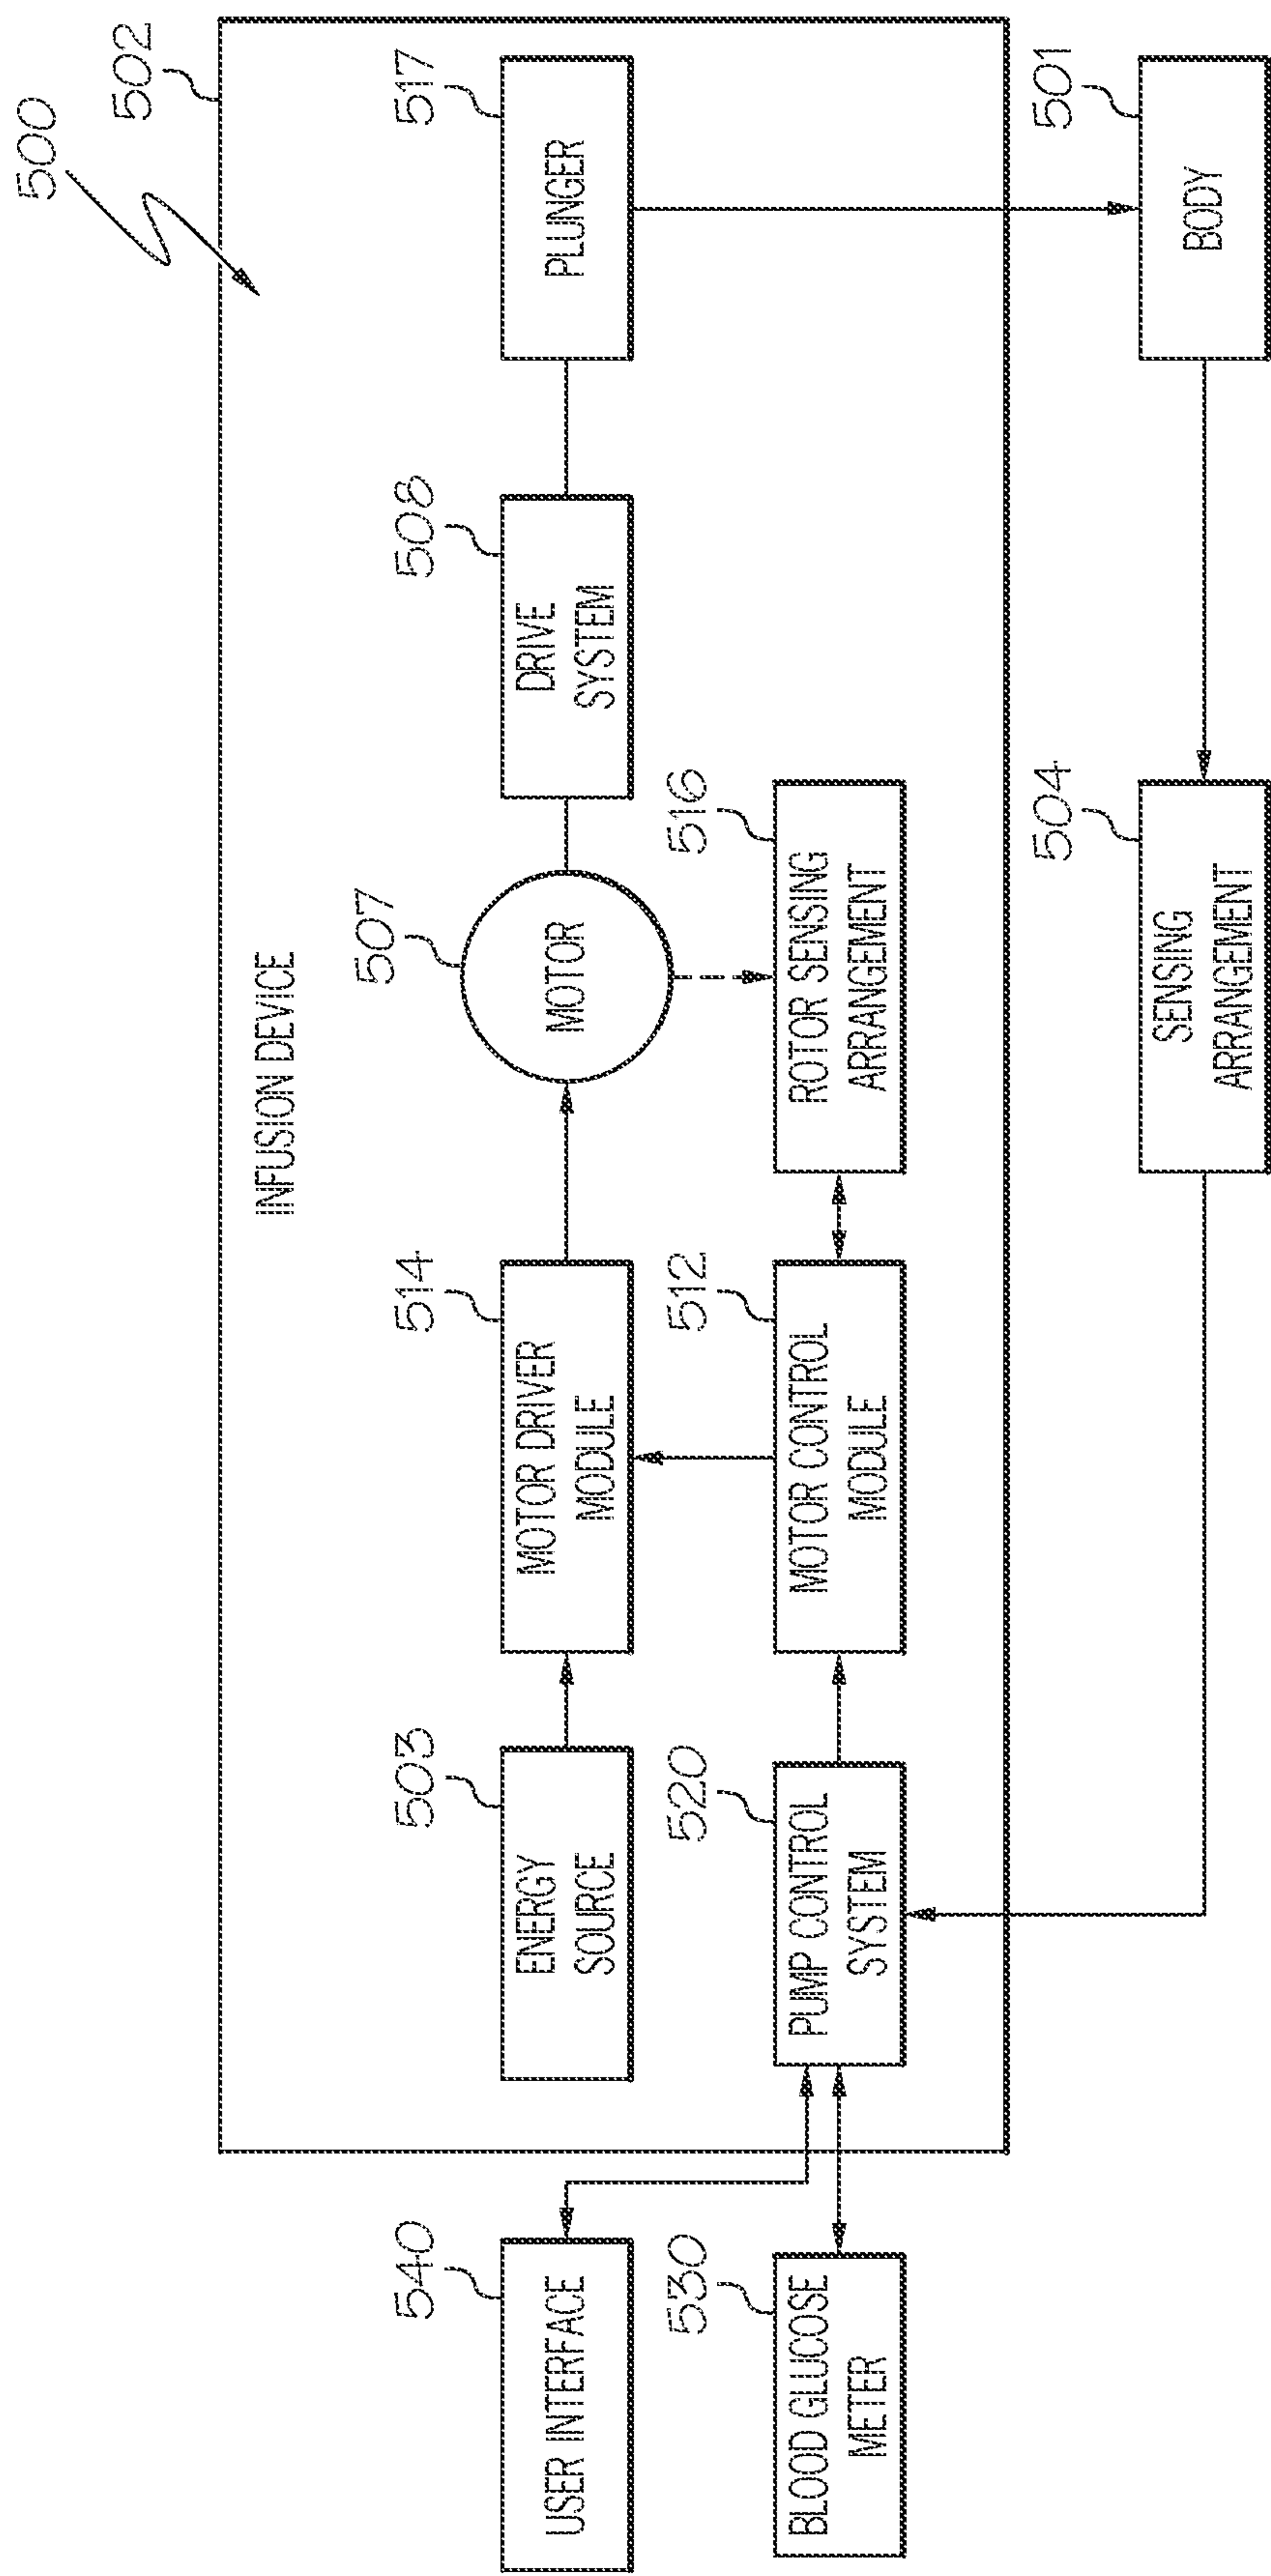


FIG. 5

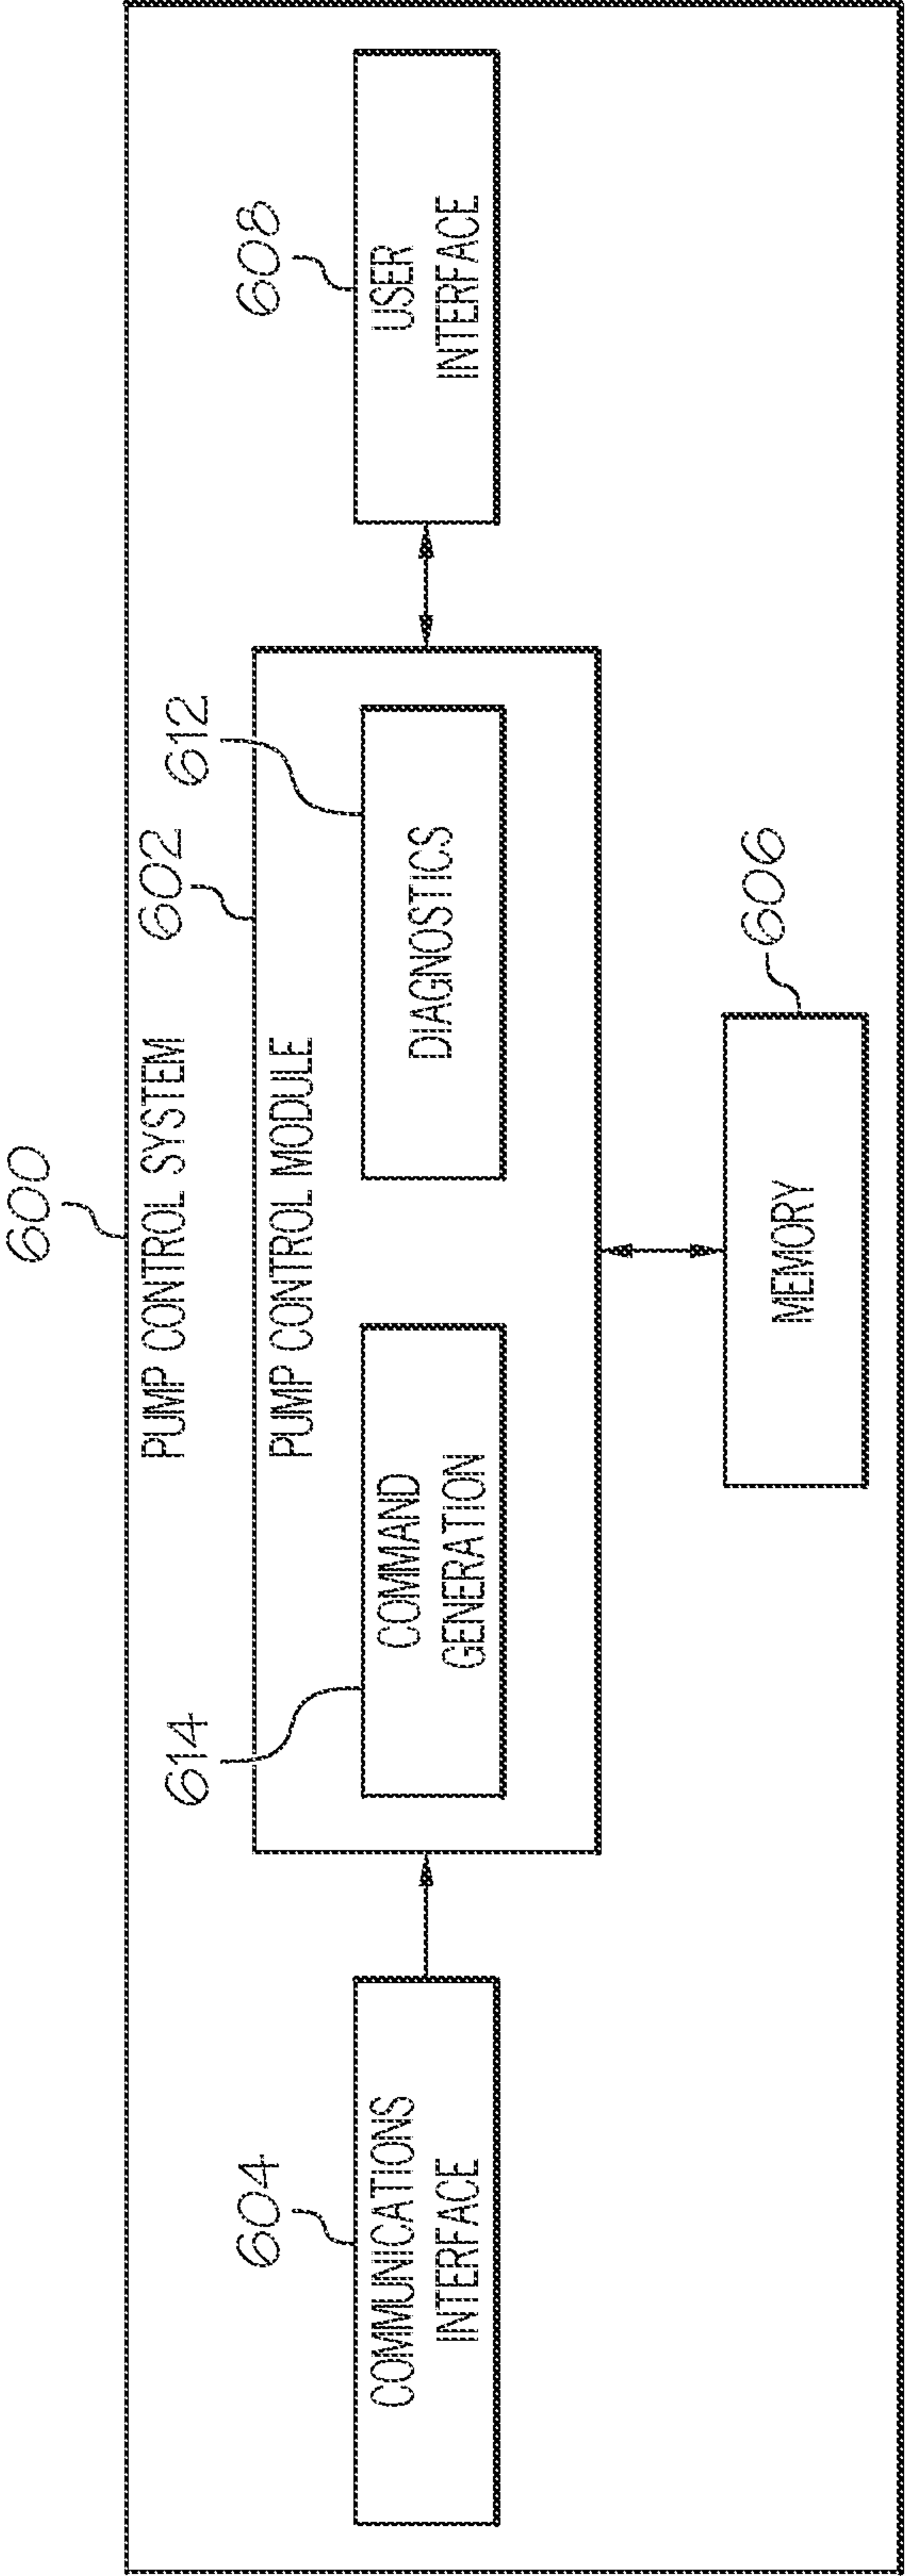


FIG. 6

7 / 9

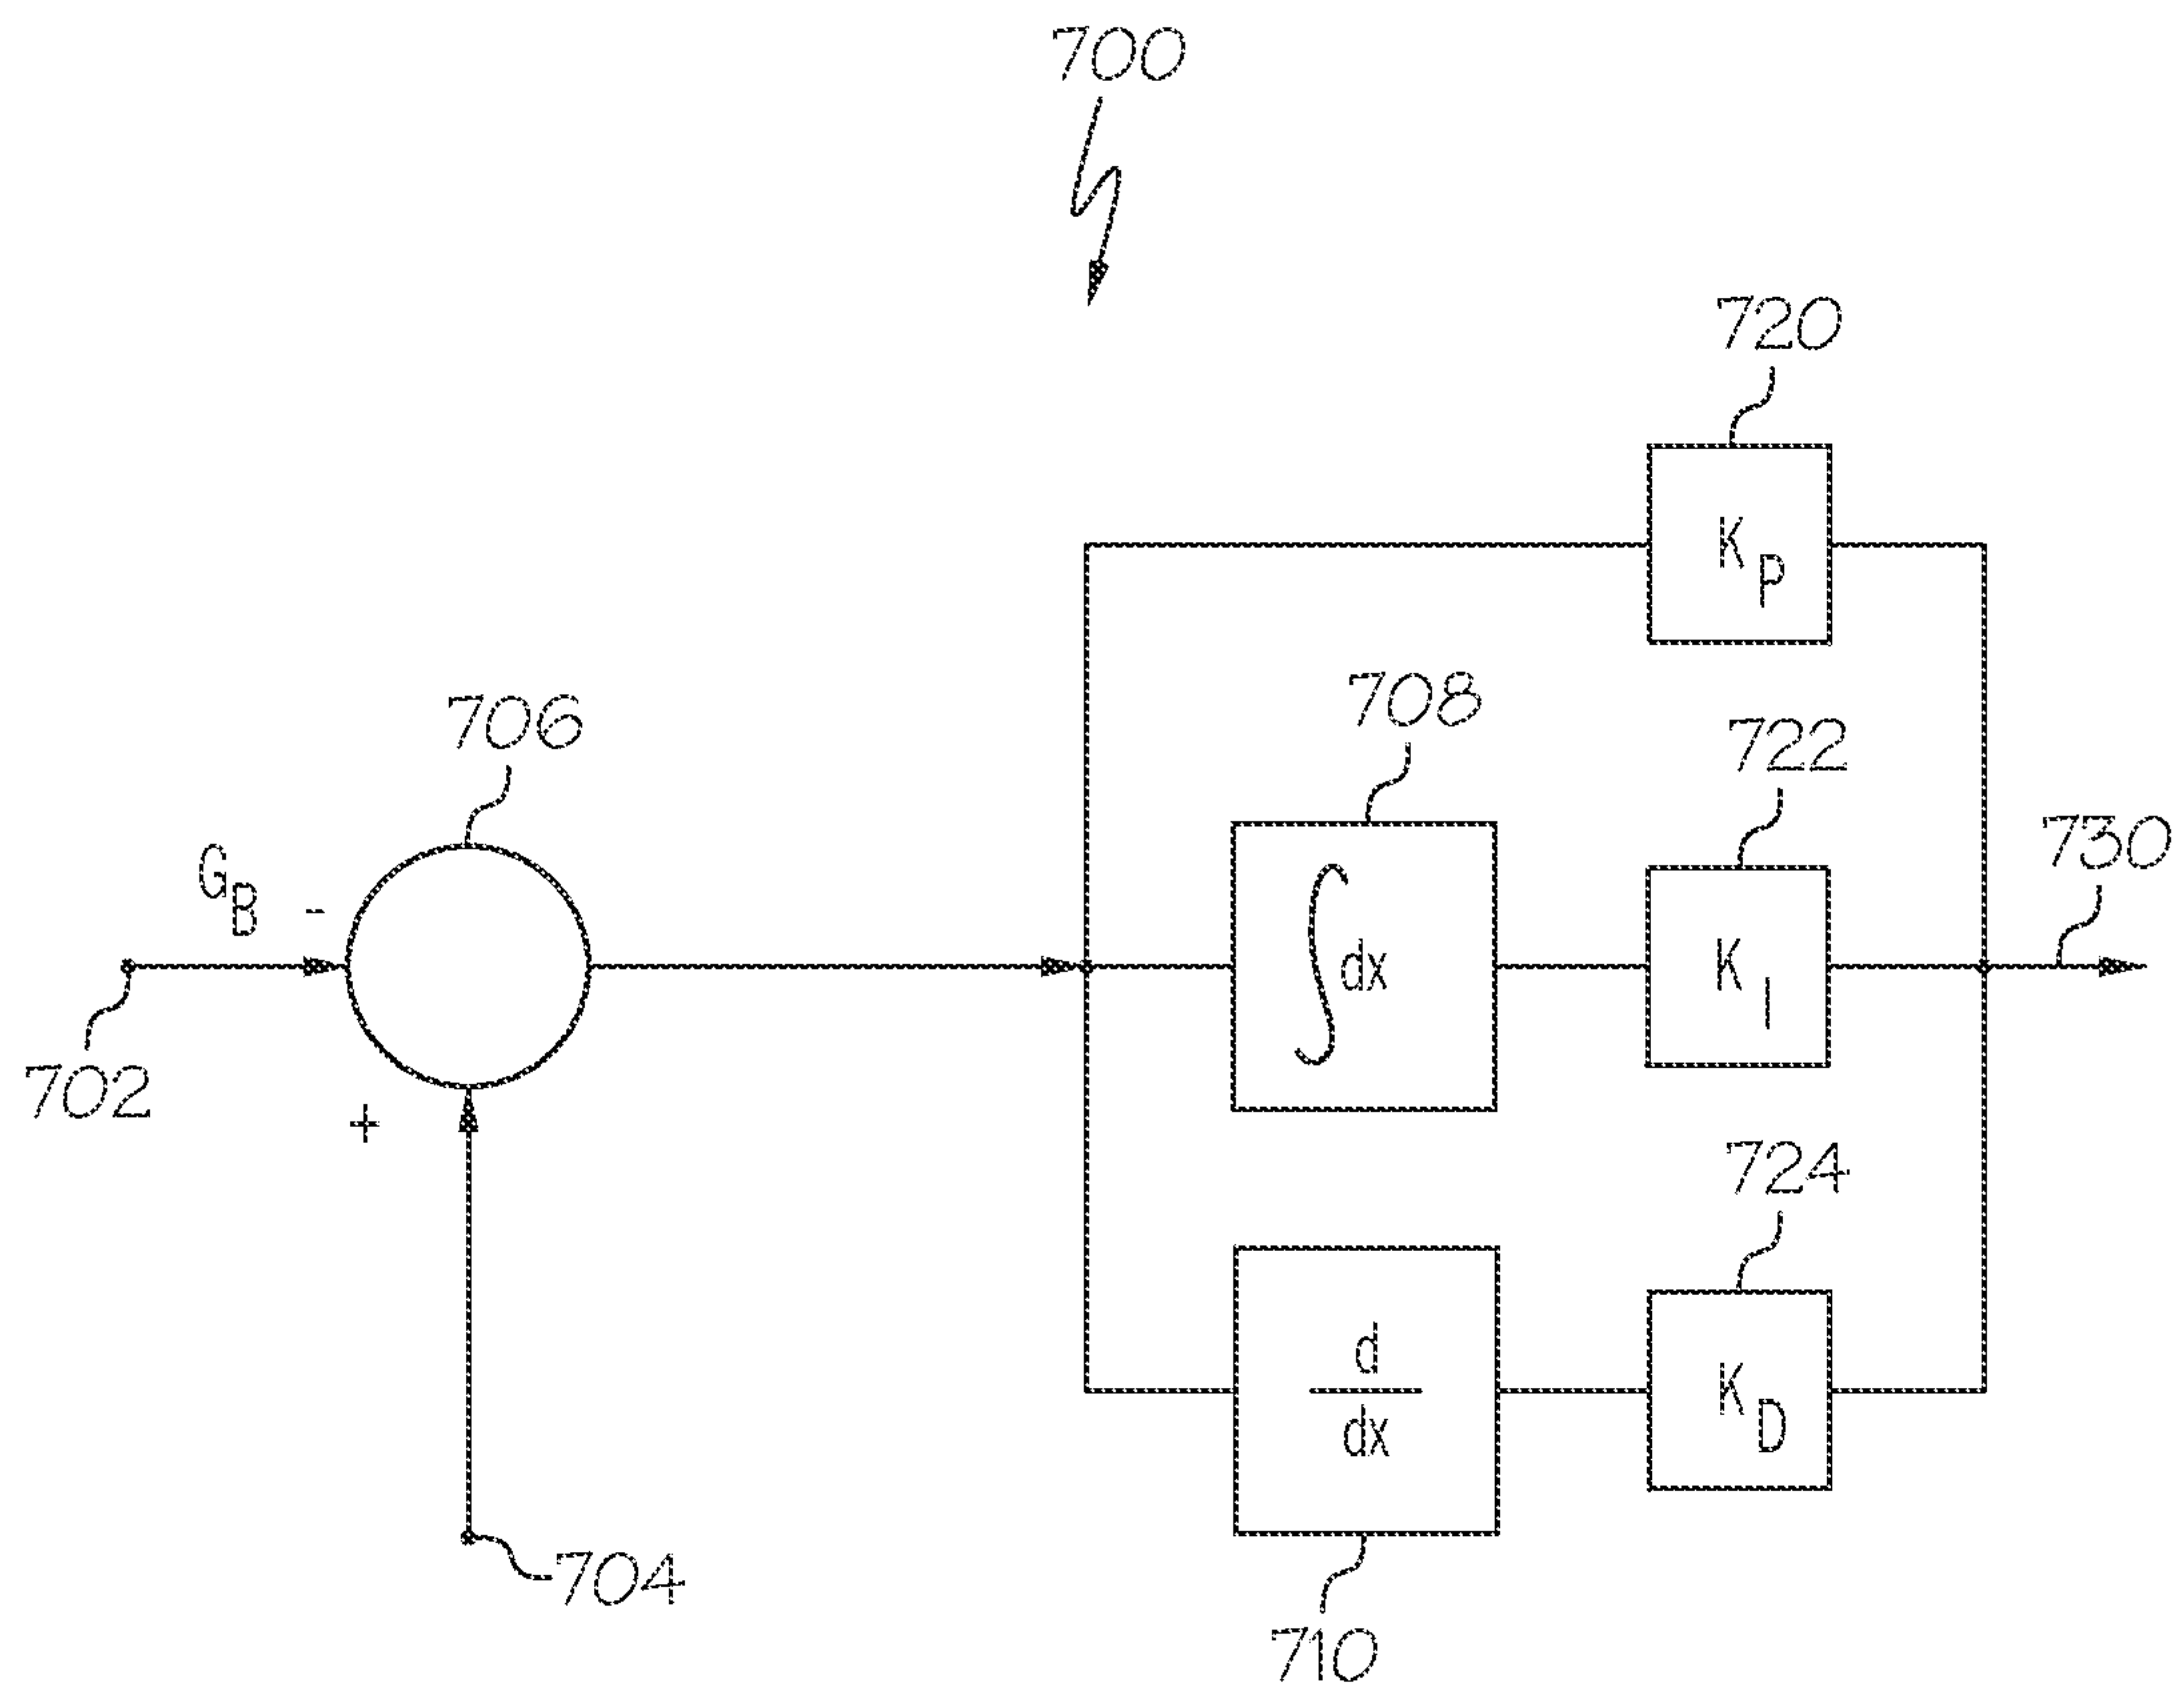


FIG. 7

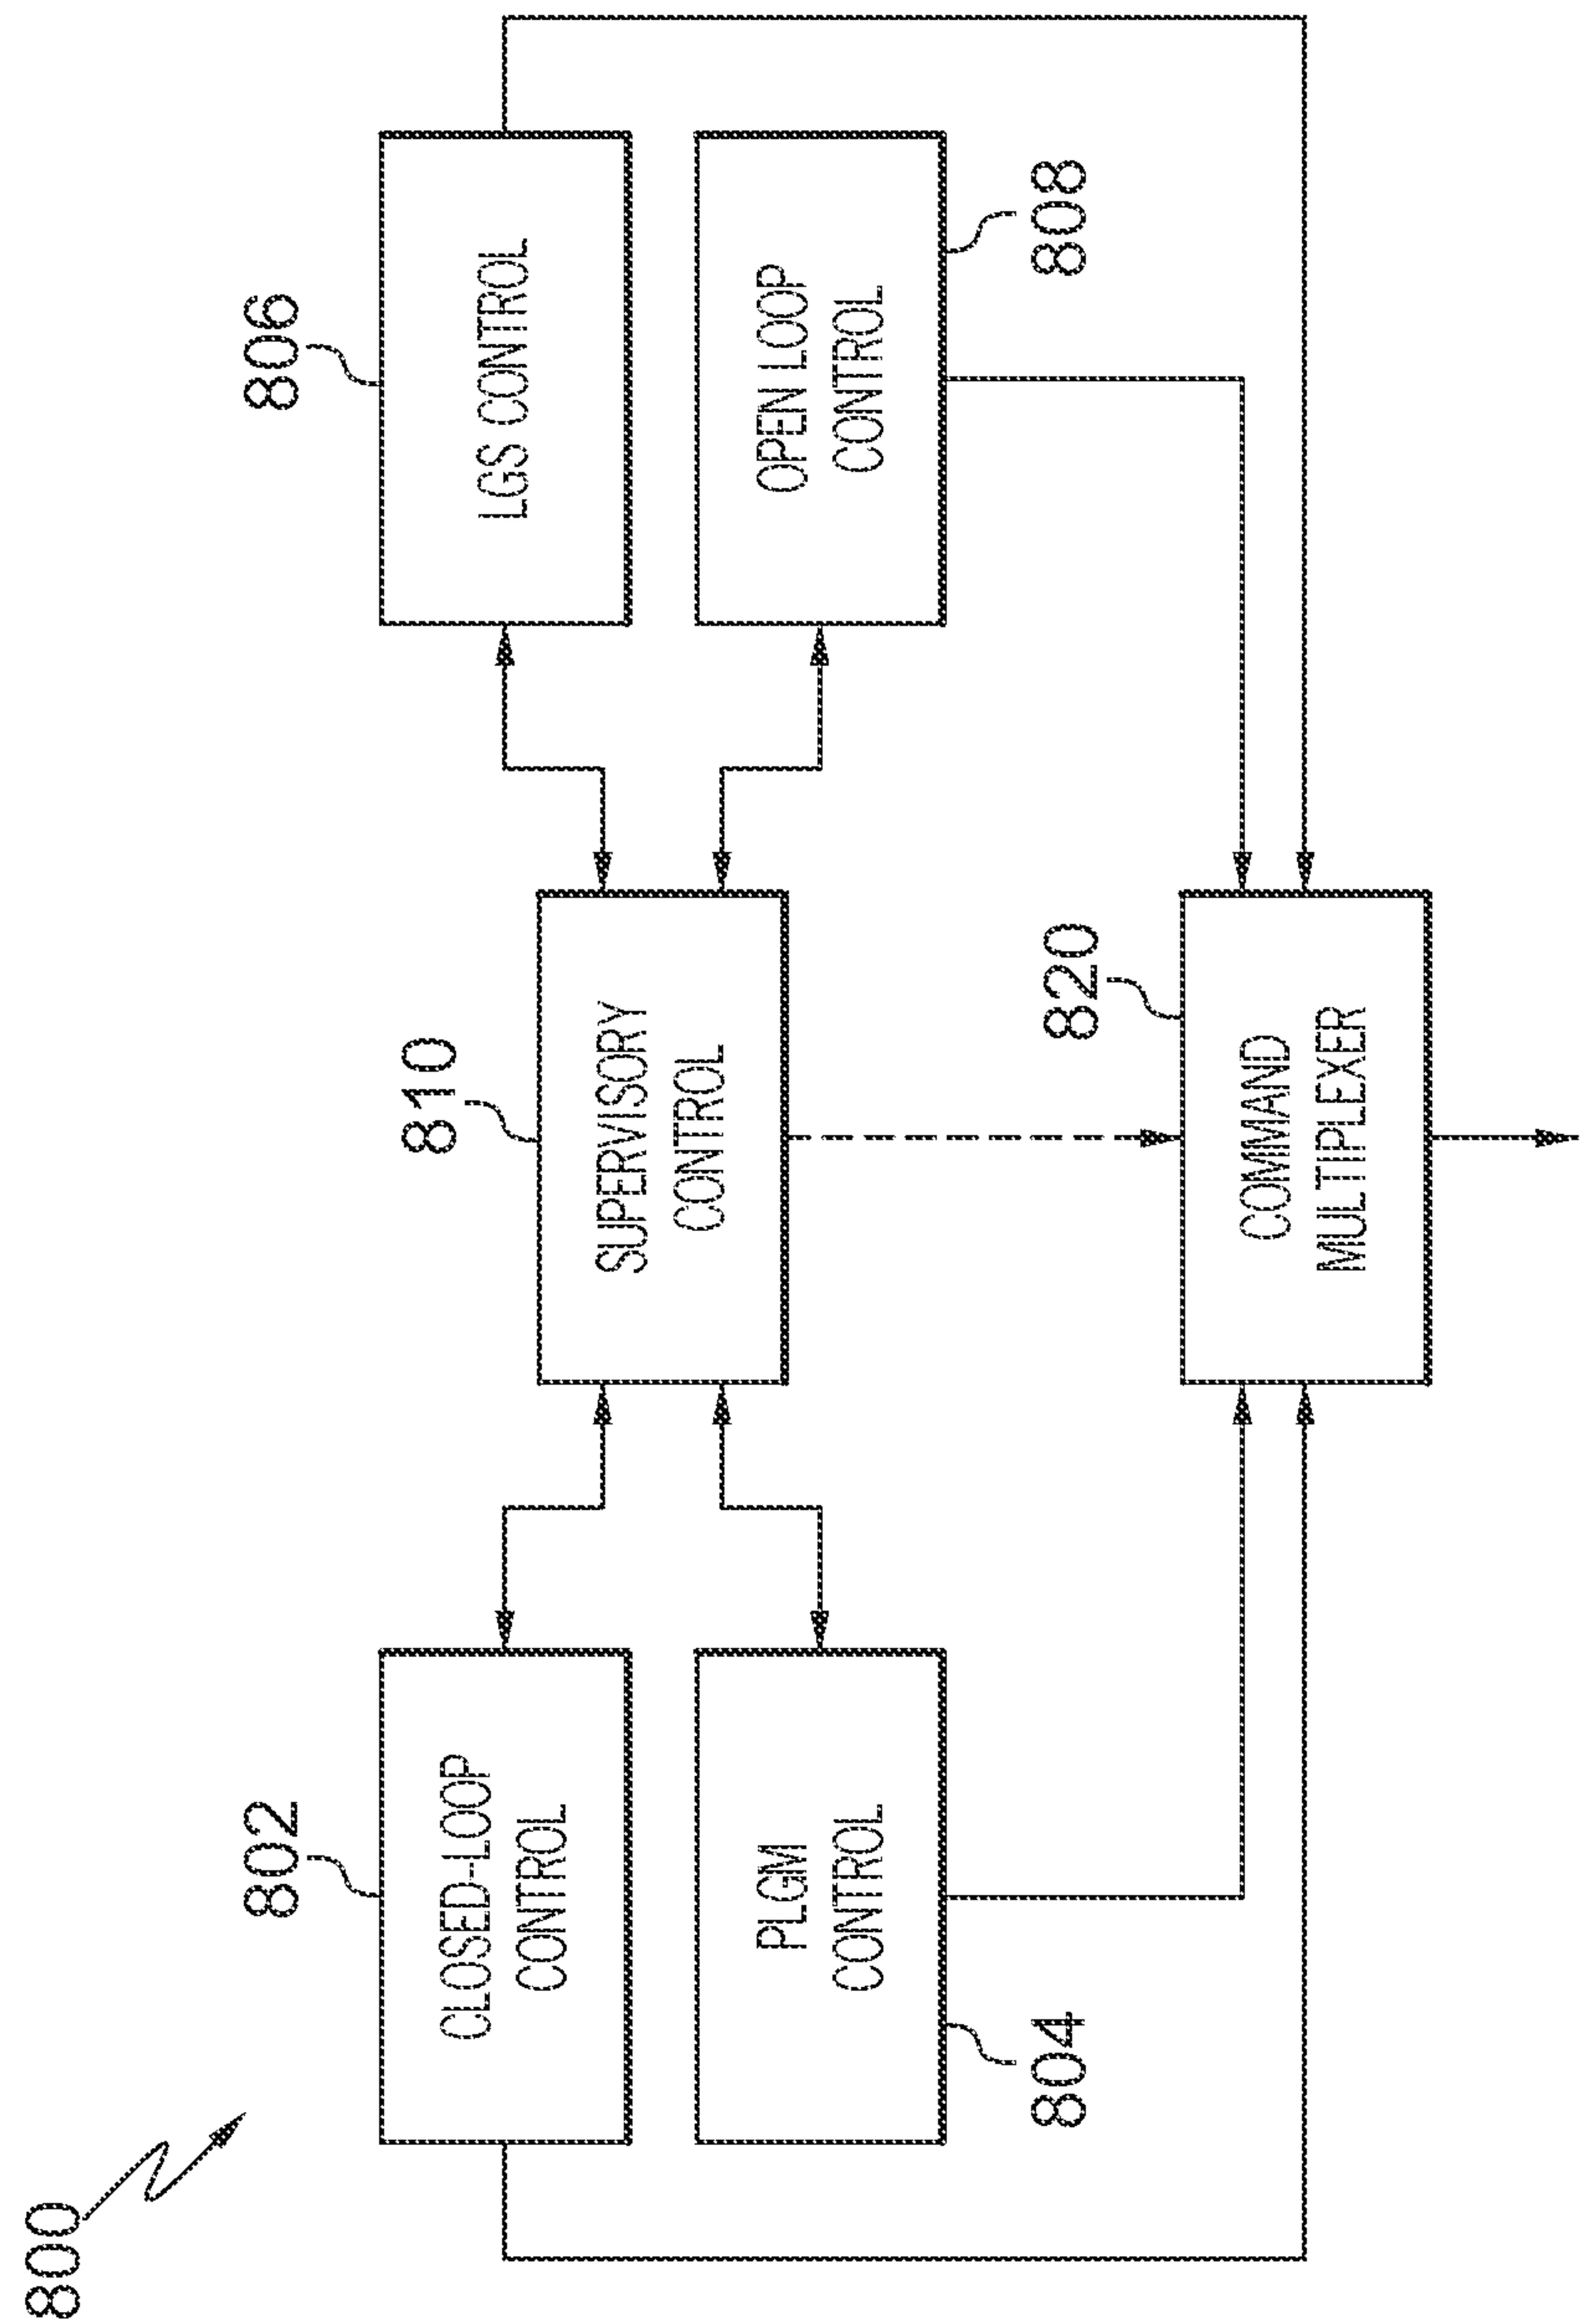


FIG. 8

9 / 9

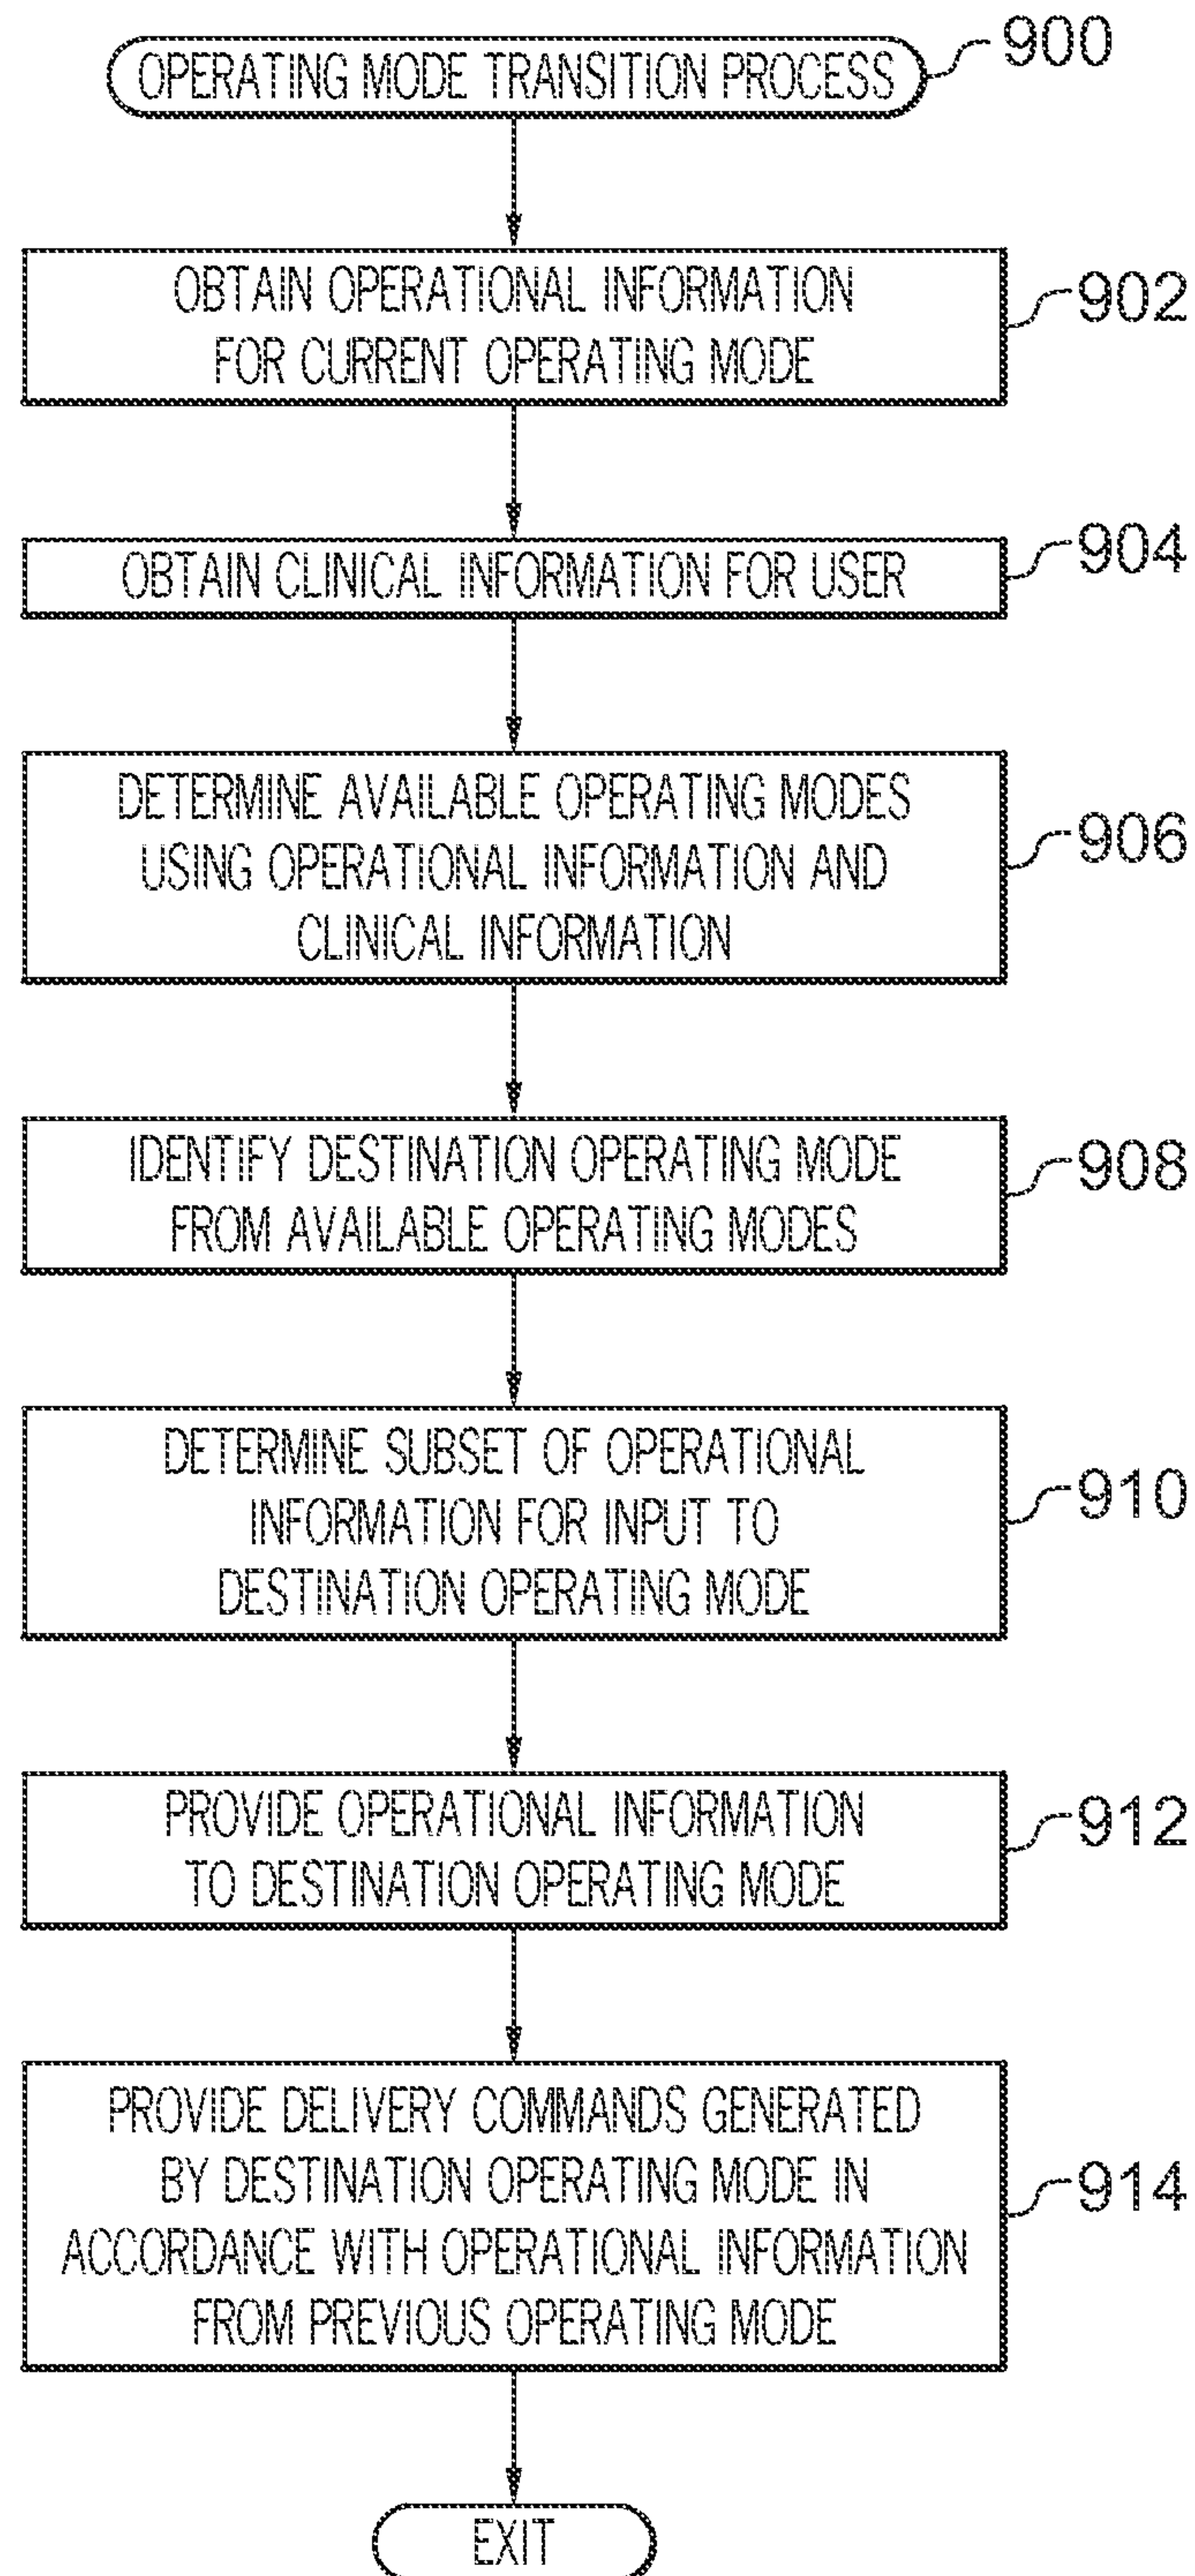


FIG. 9

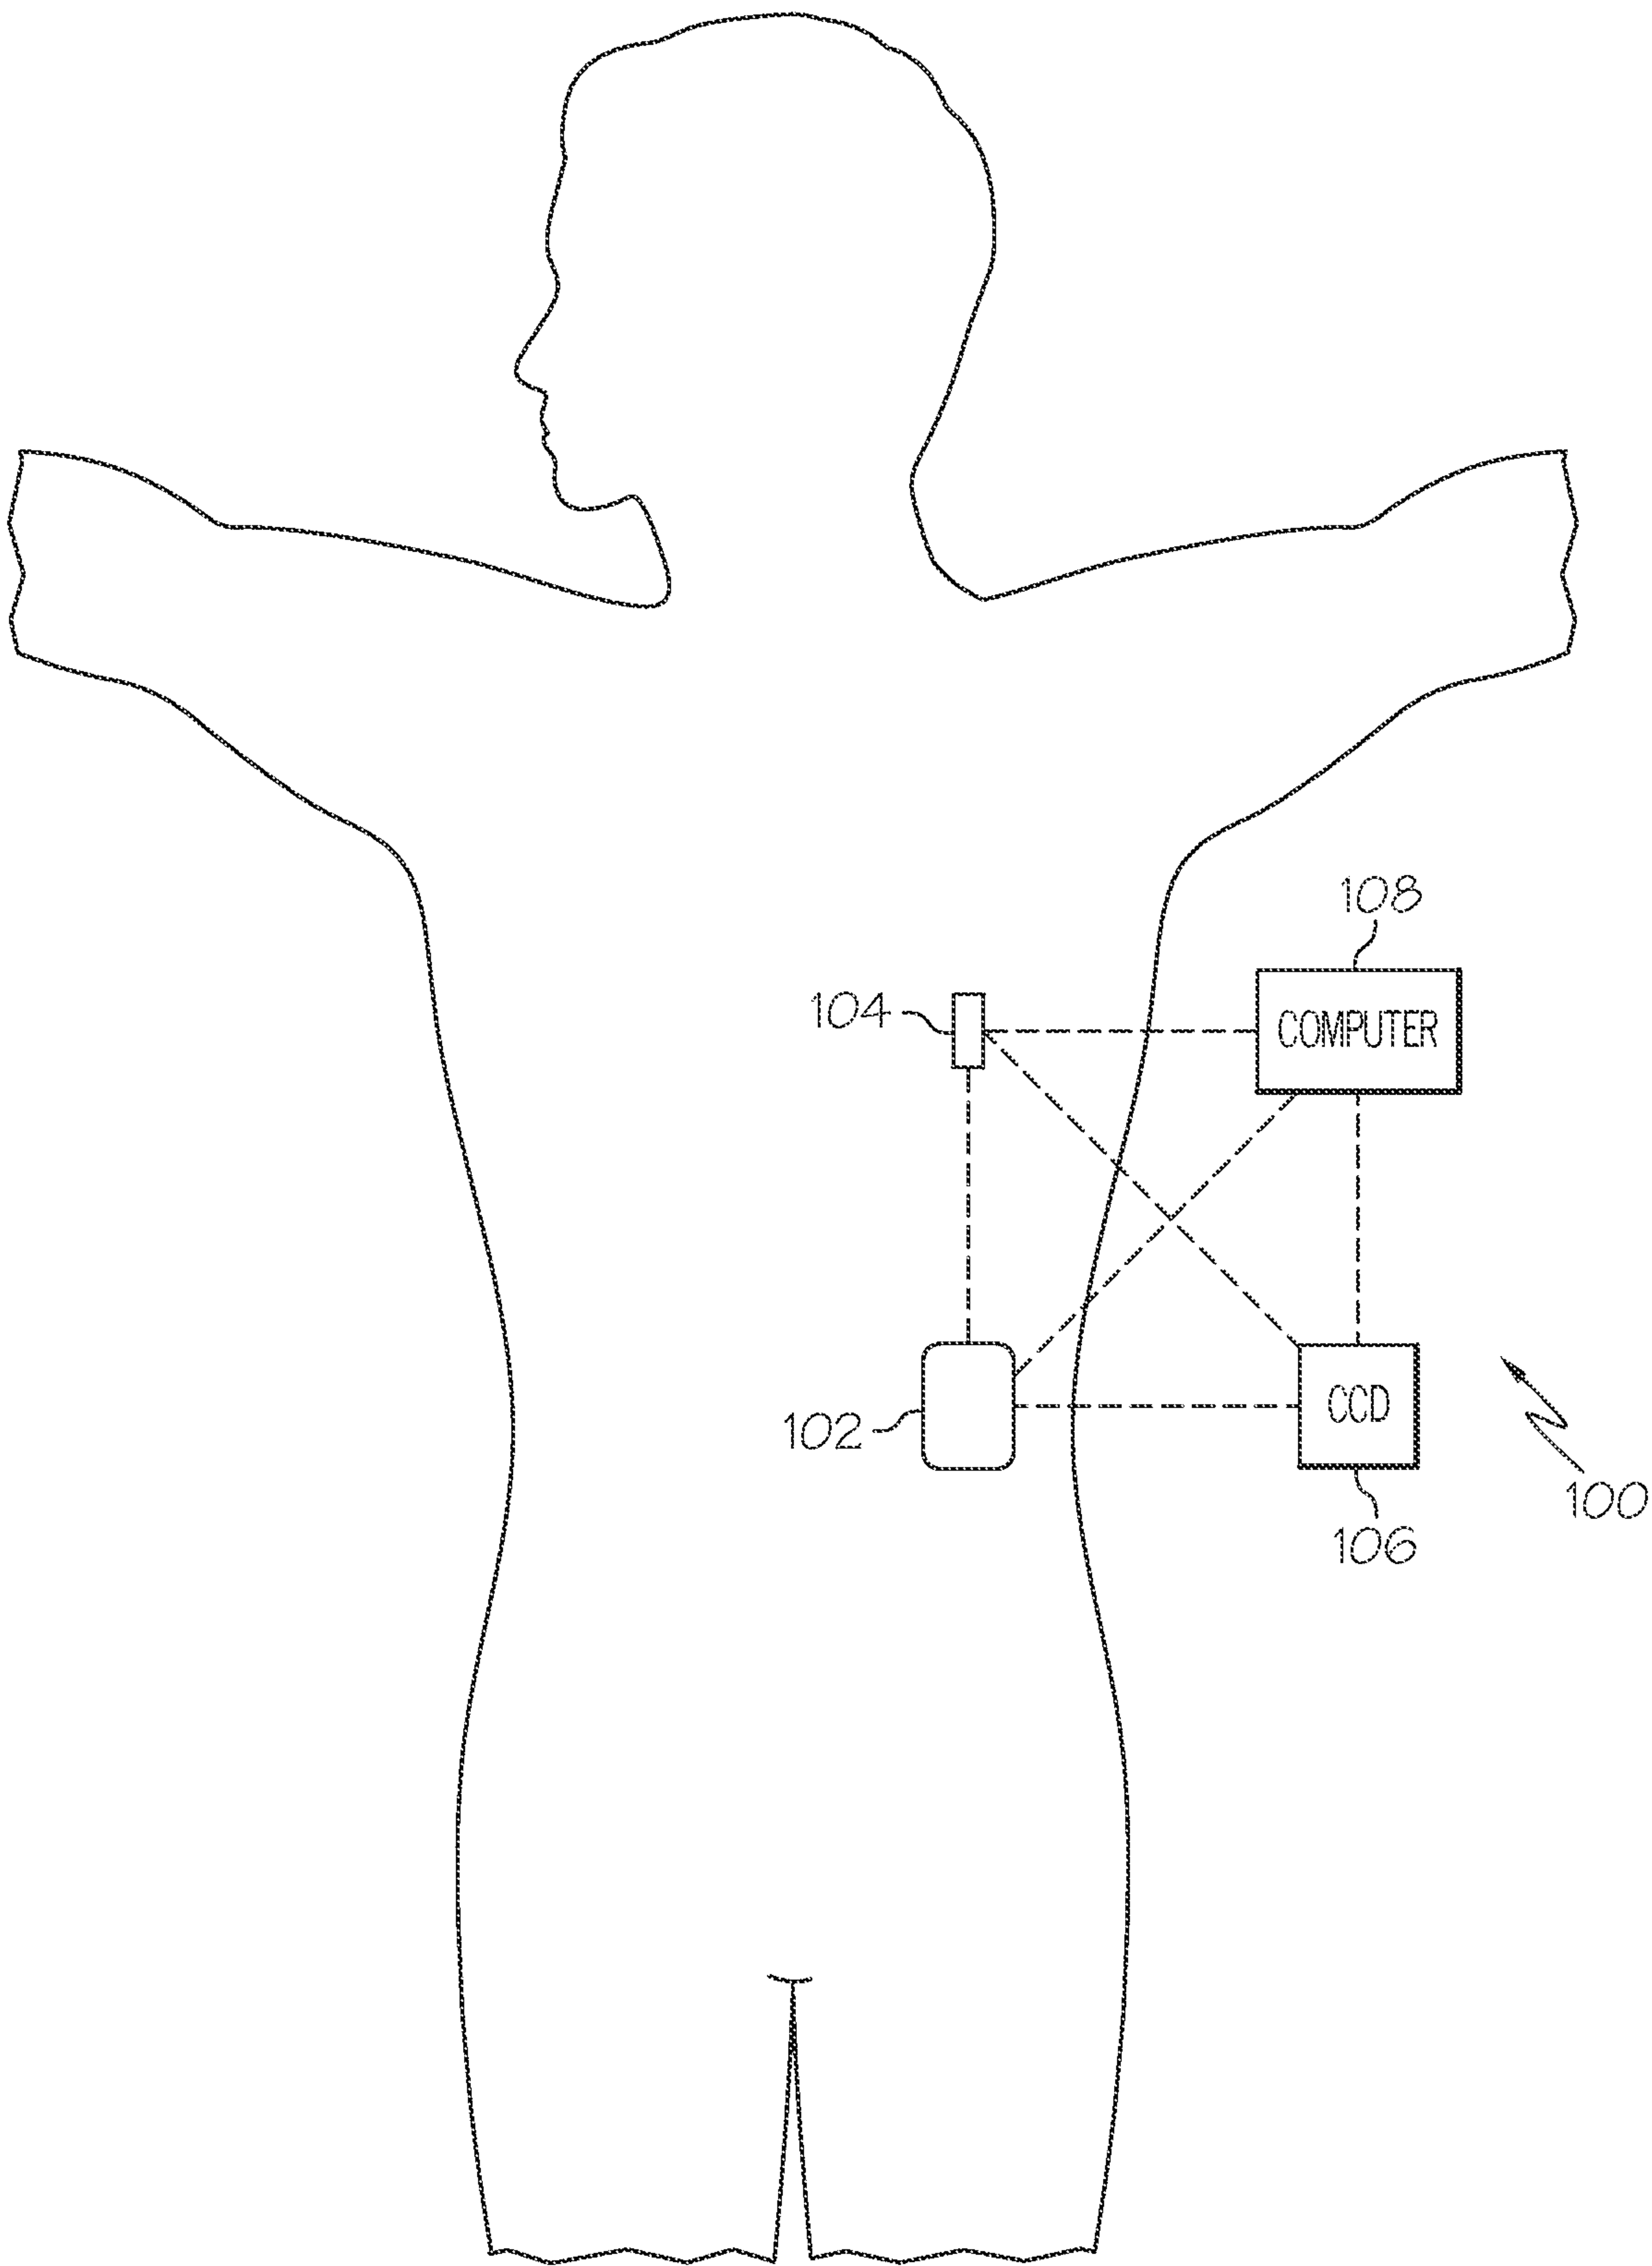


FIG. 1