

(43) International Publication Date
16 June 2011 (16.06.2011)(10) International Publication Number
WO 2011/071552 A1(51) International Patent Classification:
A63F 9/24 (2006.01)(21) International Application Number:
PCT/US2010/027493(22) International Filing Date:
16 March 2010 (16.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

61/285,097	9 December 2009 (09.12.2009)	US
61/307,320	23 February 2010 (23.02.2010)	US
12/719,854	8 March 2010 (08.03.2010)	US
12/719,851	8 March 2010 (08.03.2010)	US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier applications:

US	12/719,854 (CIP)
Filed on	8 March 2010 (08.03.2010)
US	12/719,851 (CIP)
Filed on	8 March 2010 (08.03.2010)

(72) Inventors; and

(71) Applicants : **CHIU, Bernard** [US/US]; c/o First Act Inc., 745 Boylston Street, Boston, MA 02116 (US). **IZEN, Mark** [US/US]; 181 Laurel Road, Chestnut Hill, MA 02467 (US). **FRANSOZA, Paul** [US/US]; 178 Scituate Street, Arlington, MA 02476 (US). **GAITER, Andrea** [US/US]; 34 Briant Drive, Sudbury, MA 01776 (US). **MITTELSTADT, Wendy** [US/US]; 257 Rogers Street, #2, Lowell, MA 01852 (US). **SCHILD, Ilissa** [US/US]; 10 Child Street, #3, Boston, MA 02130 (US). **SMALL, Craig** [US/US]; 34 Warren Road, Framingham, MA 01702 (US). **VIANI, Gabriel** [US/US]; 18 Spring

Street, Salem, MA 01970 (US). **WEBSTER, Stephen, Paul** [GB/CA]; 241 Mississauga Street, Oakville, ON L6L 3B1 (CA). **YIU, David** [CN/CN]; Flat F Floor 51, Tower 2, Vianni Cove, 33 Tin Kwai Road, Tin Shui Wai, HK (CN).

(74) Agent: **RUSSAVAGE, Edward, J.**; Lando & Anastasi, LLP, Riverfront Office Park, One Main Street - 11th Floor, Cambridge, MA 02142 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHODS AND APPARATUS FOR STRINGED CONTROLLERS AND INSTRUMENTS

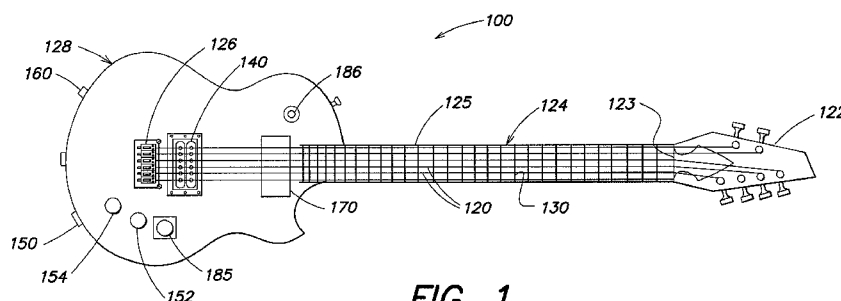


FIG. 1

(57) Abstract: Stringed instruments, game controllers, and related structures and methods are described. A game controller having one or more strings is described for a computer gaming application. A plurality of frets can be disposed on a fingerboard and underlying the strings. The frets may include electrically conductive zones that can be electrically insulated from each other, and each zone corresponds to a different string. A method of manufacturing the frets is disclosed. A polyphonic pickup having a plurality of wire-wound coils coupled to corresponding magnetic returns can be included, and can be adapted to detect striking of at least one of the strings by a user of the game controller. Output signals may be sent from the controller to the gaming application indicative of fingering of the game controller and the time at which the strings of the game controller are struck. A stringed apparatus may be used as both a game controller and an instrument.

METHODS AND APPARATUS FOR STRINGED CONTROLLERS AND INSTRUMENTS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Patent Application Serial No. 12/719,854, filed on March 8, 2010 and to U.S. Patent Application Serial No. 12/719,851, filed on March 8, 2010, both of which are continuation-in-part applications of U.S. Patent Application Serial No. 12/359,237, filed on January 23, 2009, which claimed priority from U.S. Provisional Patent Application Serial No. 61/023,285, filed January 24, 2008. This application claims priority from U.S. Provisional Patent Application Serial No. 61/285,097, filed December 9, 2009, and entitled “Combined Monophonic and Polyphonic Pickup for Use with Musical Instruments and Video Game Controllers;” and from U.S. Provisional Patent Application Serial No. 61/307,320, filed February 23, 2010, and entitled “Improved Video Game Controllers and Game Interfaces,” which are all hereby incorporated herein by reference in their entirety.

FIELD

[0002] The technology described herein relates to stringed controllers and instruments.

BACKGROUND ART

[0003] Some popular computer gaming applications, such as the Guitar Hero® games, employ a special controller that has some similarities to an instrument (e.g., is generally guitar-shaped), but which differs significantly from an actual instrument. The controller for use with Guitar Hero® has no strings and instead has colored fret buttons and a strum bar. The controller provides two types of information to the gaming software, referred to herein as selection information and timing information. The selection information is provided by depressing the fret buttons, and the timing information is provided by toggling the strum bar. A series of icons, each corresponding to a color and position of one of the fret buttons, is displayed on the game screen as music is played. The player’s goal is to hold down the fret button corresponding to the icon shown and toggle the strum bar at the same time that a note passes a marked area on the game screen.

SUMMARY

[0004] In one aspect, the present invention provides a game controller that includes a musical instrument having a fingerboard and a plurality of strings extending along the fingerboard. A plurality of frets can be disposed on the fingerboard, and can be underlying the plurality of strings. At least one of the frets can include a plurality of electrically conductive zones that can be electrically insulated from each other. Each zone can correspond to a different string in the plurality of strings. At least one first sensor can be adapted to detect fingering of the fingerboard by a user of the game controller, at least in part, by detecting contacts between the strings and the frets. At least one second sensor can include a polyphonic pickup having a plurality of wire-wound coils coupled to corresponding magnetic returns. Each coil and corresponding magnetic return can be associated with a particular string in the plurality of strings. The second sensor can be adapted to detect striking of at least one of the plurality of strings by the user of the game controller. At least one control module can be coupled to the at least one first sensor and the at least one second sensor to provide at least one electrical signal indicating the fingering of the fingerboard by the user, and indicating the striking of at least one of the plurality of strings by the user.

[0005] One or more of the following features may be included in various embodiments. The plurality of strings and at least some of the plurality of frets can be electrically conductive, and at least one first sensor can be adapted to detect which of the electrically conductive strings has contacted the electrically conductive fret. A monophonic pickup can be coupled to the polyphonic pickup, and the monophonic pickup and polyphonic pickup can be disposed in a housing configured as a single component on the game controller. The monophonic pickup can be a stacked humbucker pickup adapted to detect movement of the plurality of strings. The polyphonic pickup can be a hexaphonic pickup adapted to detect movement of each of the strings in the plurality of strings. The magnetic return can be made of magnetizable material including any one of iron, steel, other ferrous material, or any combination thereof. Each of the coils can include a corresponding neodymium magnet and magnetic core. The game controller can be a dual mode device that may be capable of operating in a first mode as the game controller, and in a second mode as a stringed musical instrument. The game controller can be tunable to enable the plurality of strings to play the full range of notes available on a guitar. At least one user control can be capable of operating volume and tone when the game controller is in the second mode, and capable of operating menu-navigation and other game features when the

game controller is in the first mode. A string dampener having a plurality of separate engagement surfaces can be adapted to dampen vibration of at least one of the plurality of strings after being struck by the user to facilitate detection of distinct string strikes. Each separate engagement surface may correspond to a particular string or subset of strings in the plurality of strings. The dampener may include any one of a mechanical dampener or an electromechanical dampener. At least one electrical signal can provide control information for interacting with a video game.

[0006] In another aspect, the present invention provides a method that can include 1) generating control signals for a computer game based on user interactions with a game controller that can include a musical instrument having a fingerboard, a plurality of strings extending along the fingerboard, a plurality of frets disposed on the fingerboard and underlying the plurality of strings wherein at least one of the frets having a plurality of electrically conductive zones that can be electrically insulated from each other and each zone corresponds to a different string in the plurality of strings, at least one first sensor adapted to detect fingering of the fingerboard by a user of the game controller, and at least one second sensor comprising a polyphonic pickup having a plurality of wire-wound coils coupled to corresponding magnetic returns wherein each coil and corresponding magnetic return is associated with a particular string in the plurality of strings and adapted to detect striking of at least one of the plurality of strings by the user of the game controller; and 2) evaluating at least first and second distinct pieces of information relating to the user interactions, the first piece of information being indicative of fingering of the fingerboard by the user, and the second piece of information being indicative of the striking of at least one of the plurality of strings by the user.

[0007] One or more of the following features may be included in various embodiments. Dampening vibration of at least one of the plurality of strings after it is struck by the user to facilitate detection of distinct string strikes. Dampening an amplitude of the vibration of at least one of the plurality of strings by at least 70% within 0.025 seconds of the at least one of the plurality of strings being struck.

[0008] In another aspect, the present invention provides a method of adapting a musical instrument to enable the musical instrument to be used as a game controller. The musical instrument can include a fingerboard and multiple strings extending along the fingerboard. The method can include 1) affixing a plurality of frets on the fingerboard and underlying

the plurality of strings, wherein at least one of the frets has a plurality of electrically conductive zones that can be electrically insulated from each other and each zone corresponds to a different string in the plurality of strings; 2) positioning at least one first sensor on the fingerboard to detect fingering of the fingerboard by a user of the game controller; 3) providing at least one second sensor comprising a polyphonic pickup having a plurality of wire-wound coils coupled to corresponding magnetic returns to detect striking of at least one of the plurality of strings by the user of the game controller; and 4) providing at least one control module to generate at least one electrical signal to a game. The at least one electrical signal can indicate the fingering of the fingerboard by the user, and can indicate the striking of at least one of the strings by the user.

[0009] One or more of the following features may be included in various embodiments. Providing a string dampener having a plurality of separate engagement surfaces, wherein each engagement surface corresponds to a particular string or subset of strings in the plurality of strings, and wherein the string dampener can be adapted to dampen vibration of at least one of the plurality of strings after it is struck by the user to facilitate detection of distinct string strikes. Providing at least one string dampener includes providing a mechanical dampener or an electromechanical dampener.

[0010] In another aspect the present invention provides a fret that includes a body portion made of a non-conductive material, and having a first end, a second end, and a length defined between the first and second ends. A plurality of electrically conductive elements can be disposed along at least part of the body portion. Each element can be electrically insulated from the other conductive elements by the body portion.

[0011] One or more of the following features may be included in various embodiments. The body portion can include a radial curvature along the length of the body portion that corresponds to a curvature of a fret board on a game controller or stringed musical instrument. The body portion can be configured to be substantially horizontal along the length to correspond to a flat fret board on a game controller or stringed musical instrument. Each of the conductive elements can be exposed on the top surface of the body portion so as to correspond to a different string in a plurality of strings of a game controller or stringed musical instrument. The exposed elements on the top surface of the body portion can be geometrically shaped, and disposed adjacent to each other to permit at least one the strings to slide smoothly from one exposed element to the next while

maintaining constant contact with one or more of the exposed elements. Each of the conductive elements may extend below the body portion and can be adapted to electrically connect the fret to an underlying game controller or stringed musical instrument. Each conductive element can include at least one aperture through which the element can be affixed to the body portion. The conductive elements can be made of metal including any one of nickel, silver, steel, titanium, metal alloy, or any combination thereof. The fret can be configured for use with a stringed game controller. The fret can be configured for use with a stringed musical instrument. The non-conductive material can be a synthetic or natural material including any one of plastic, glass, wood, or combination thereof.

[0012] In another aspect, the present invention provides a method of making a fret. The method includes 1) providing a blank formed of electrically conductive material, 2) processing the blank to provide a plurality of electrically conductive elements, 3) affixing a body portion made of a non-conductive material to the plurality of electrically conductive elements, the body portion electrically insulating each element from the other conductive elements, and 4) removing material from the processed blank and affixed body portion to form a perimeter of the fret in a desired shape.

[0013] One or more of the following features may be included in various embodiments. Processing can include stamping the blank to provide the plurality of electrically conductive elements. Processing can include heating and casting the blank to provide the plurality of electrically conductive elements. Processing can include machining the blank to provide the plurality of electrically conductive elements. Processing can include cutting at least one portion of the blank to electrically separate each electrically conductive element from the plurality of electrically conductive elements. Processing can include providing at least one aperture in each electrically conductive element through which the element can be affixed to the body portion. Processing can include providing a radial curvature along the length of the body portion that corresponds to a curvature of a fret board. Affixing can include over-molding the non-conductive material onto at least a portion of the plurality of electrically conductive elements. Affixing can include disposing the plurality of electrically conductive elements along at least part of the body portion so that each of the conductive elements can be exposed on the top surface of the body portion so as to correspond to a different string in a plurality of strings of a game controller or stringed musical instrument. Affixing can include disposing the plurality of electrically

conductive elements along at least part of the body portion so that the conductive elements extend below the bottom surface of the body portion to provide electrical connection points for the fret. Removing can include abrasively surfacing the fret to smooth out and remove rough edges. Determining length of the fret based on a taper of a corresponding fret board.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] Figure 1 shows an apparatus that may operate as both a game controller and an instrument, according to one embodiment of the present invention.

[0015] Figure 2 shows one embodiment of a vibration dampening arrangement, according to one embodiment of the invention.

[0016] Figure 3 shows another embodiment of a vibration dampener.

[0017] Figures 4 A-D show various aspects of fret detection arrangements according to embodiments of the present invention.

[0018] Figure 5 shows details related to use of a brace according to an embodiment of the present invention.

[0019] Figures 6 A-C show structural details of a non-adjustable bridge for the apparatus of Figure 1, according to one embodiment of the invention.

[0020] Figure 7 shows a controller output module according to one embodiment of the present invention.

[0021] Figures 8 A-B show color and number coding of the neck frets on the apparatus of Figure 1, according to one embodiment of the invention.

[0022] Figure 9 shows the state arrangement of a strum detector module, according to one embodiment of the invention.

[0023] Figure 10 shows an example of a filtered signal envelope estimate over time for use in a strum detector, according to some embodiments.

[0024] Figure 11 shows an interactive visual display according to one embodiment of the present invention.

[0025] Figures 12 A-D show an interactive visual display according to another embodiment of the present invention.

[0026] Figure 13 shows an interactive visual display according to yet another embodiment of the present invention.

[0027] Figures 14 A-D show an interactive visual display according to a further embodiment of the present invention.

[0028] Figures 15 A-C show an interactive visual display according to another embodiment of the present invention.

[0029] Figures 16 A-B show an interactive visual display according to a further embodiment of the present invention.

[0030] Figure 17 shows various logical steps in a game flow according to one embodiment of the present invention.

[0031] Figures 18 A-B illustrate various strumming and picking aspects of embodiments of the present invention.

[0032] Figure 19 shows an interactive visual display according to another embodiment of the present invention.

[0033] Figure 20 illustrates an example of a configuration which may be used to provide electromechanical damping of strings, according to one embodiment.

[0034] Figure 21 illustrates an example of a circuit which may be used to alter the decay time of a signal representing a string vibration, to facilitate detection of discrete strum events, according to one embodiment.

[0035] Figure 22 illustrates a stringed game controller coupled to a processor for operating a gaming application, according to one embodiment.

[0036] Figure 23 illustrates an embodiment of the invention directed to an adapter that may be used to employ a stringed instrument as a stringed game controller.

[0037] Figure 24A illustrates a fret assembly in accordance with one embodiment of the present invention.

[0038] Figure 24B illustrates another fret assembly in accordance with another embodiment of the present invention.

[0039] Figure 25A-B illustrate fret subassemblies for use in connection with various embodiments of the present invention.

[0040] Figure 26 illustrates electrically conductive elements that can be utilized in the manufacture of frets according to an embodiment.

[0041] Figure 27 illustrates a fret subassembly for use in connection with an embodiment of the present invention.

[0042] Figure 28 illustrates an assembled fret manufactured in accordance with one embodiment.

[0043] Figure 29 illustrates a close-up view of the fret shown in Figure 28.

[0044] Figure 30A-E illustrate various string dampener configurations for use in connection with various embodiments of the present invention.

[0045] Figure 31A-D illustrate various subassemblies of a polyphonic pickup configured for use in connection with an embodiment of the present invention.

[0046] Figure 32 illustrates a combined monophonic and polyphonic pickup configured in accordance with an embodiment of the present invention.

[0047] Figure 33 illustrates a method of manufacturing a segmented fret in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

[0048] Applicants have appreciated that conventional guitar-shaped game controllers, such as those described above, differ from actual guitars in many ways, including in their lack of strings. Thus, such conventional game controllers do not provide the user with a realistic experience of playing an instrument.

[0049] According to one aspect of the technology described herein, a stringed controller for games, such as video games, is provided. In some detailed embodiments described below, the stringed controller resembles a guitar, but the aspects of the present invention described herein are not limited in this respect, and can be used with other fretted (e.g., a bass guitar) or unfretted (e.g., a violin or cello) instruments.

[0050] The stringed controller can be used for any type of gaming application, as the aspects of the invention described herein are not limited in this respect. In some embodiments, the stringed controller can be used with a play-along game, similar to Guitar Hero[®], but provide a more realistic user/player experience. In other embodiments, the stringed controller can be used to control action in any type of game, and replace any

existing controller, so that playing games can give the player experience with the instrument (e.g., in fingering the frets and strumming the strings of a guitar). In yet further embodiments, the stringed controller can be used to control a game specifically designed to teach the player how to play the instrument.

[0051] In some embodiments, the controller may be configured to provide output signals to a game (i.e., to a gaming application executing on a computer or gaming console), allowing a user to interact with the game. The output signals produced by the controller may represent any suitable information for interacting with the gaming application, such as indicating placement of a user's hands on the controller (e.g., fret placement on a fretted controller) as well as the timing at which one or more of the strings of the controller is played. The controller in some embodiments may further optionally include one or more components, such as user inputs (e.g., knobs, buttons, dials, or any other inputs), making it compatible with any of a variety of gaming systems (e.g., personal computers or a module for any gaming platform), as the various aspects relating to a stringed controller are not limited in this respect.

[0052] According to some aspects of the technology described herein, a stringed game controller may produce one or more output signals derived from different parts of the controller, or derived from different user interactions with the controller. For example, vibration of the strings of the stringed controller may be used to produce an output signal representing timing information (e.g., the time at which each string is initially played), or any other suitable timing information. A second type of information, such as information indicative of the positioning of a user's hand on the stringed controller (e.g., the fret position on a fretted controller), may be derived irrespective of whether the string is vibrating. Other types of information may also be provided, as the various aspects described herein are not limited to stringed controllers producing any particular types of output signals.

[0053] According to another aspect, a multi-mode apparatus is provided, which may function both as a stringed instrument (e.g., a guitar, a bass guitar, a violin, or any other stringed instrument) and as a game controller for a gaming application, such as a computer gaming application. When acting as an instrument, the apparatus may be played to produce musical notes, for example by plucking the strings and depressing a fret of a fretted instrument. In such a mode, the instrument may function in a conventional manner

so that the output signal of the apparatus may be caused by the vibration of the string(s), which may be directly audible (for example, as with an acoustic instrument) or processed and amplified (e.g., as with an electric guitar), which output signal may therefore include tonal components reflecting movement of the strings and the length of the vibrating portion of the strings, i.e., pitch information. In this mode, the apparatus may be connected to a dedicated amplifier or to a computer or gaming system which may operate as an amplifier (e.g., a virtual amplifier), or may be directly played without connection to any external components, for example as in the case of an acoustic instrument. However, the various aspects described herein are not limited in this respect, as in the instrument mode the instrument may be used in any suitable manner, including in any of the ways instruments are conventionally employed.

[0054] When the multi-mode apparatus is operated as a game controller, the game application may derive any desired information from the user's interaction with the strings, but in some embodiments may not use any information about pitch or tone from the strings. As discussed above, in one embodiment separate information can be provided indicative of the positioning of the user's fingers on the fingerboard (e.g., fret position on a fretted device, which may be indicative of string length) and timing information from striking, or playing, a string (e.g., plucking, picking, or otherwise playing). To facilitate use of the strings for determining timing but not pitch information, the strings may be damped, for example to reduce or prevent vibration. A pickup may be used to detect movement of one or more strings of the apparatus, for example when struck by the user, and may generate a corresponding timing index component of a gaming input signal provided to the gaming software.

[0055] When the multi-mode apparatus is operated as a game controller, in some embodiments information about a user's hand positioning on the controller may be provided to the game in a manner other than by assessing tonal components of vibrations of the strings, i.e., other than by assessing the pitch of any vibrating string. For example, the apparatus may be fretted (e.g., a guitar), and one or more fret sensors may be used to detect contact of the strings with a fret. The fret sensor(s) may generate one or more components of a gaming input signal. Alternatively, the positioning of a user's hand may be determined using input buttons positioned on the instrument (e.g., on the fingerboard of the guitar), a pressure responsive material, or in any other suitable manner, as the aspects

described herein are not limited in this respect.

[0056] As should be appreciated from the foregoing, according to one non-limiting embodiment, when the multi-mode apparatus is operated as a game controller, outputs of the controller may be generated that do not require detection of any string vibration tonal components. According to such embodiments, this may reduce or eliminate any need for the stringed controller to be in tune to properly function as a game controller. Rather, the strings of the apparatus may be used to derive timing information only, and the position of a user's hand may be determined by fret sensors, buttons, or in any other suitable manner. In some embodiments, the tonal components of the instrument/controller may be ignored entirely. However, all aspects of the invention are not limited in this respect, as the tonal output of the instrument/controller may optionally be used in some embodiments to provide an additional, or alternative, input.

[0057] According to one non-limiting embodiment, the apparatus may include a controller output module, which may process signals from the apparatus to determine one or more types of information from the user's interaction (e.g., timing information, hand positioning information, or any other type of information), and may then generate one or more controller output signals to be provided to the gaming application in any format recognized by the gaming application. Alternatively, raw signals indicative of the user's actions (e.g., representing timing and positioning information) may be provided to the gaming application, which may process the raw signals to determine desired types of information, such as timing and/or positioning information, or any other desired types of information. Other manners of signal processing are also possible, as the various aspects described herein relating to a game controller are not limited in this respect.

[0058] It should be appreciated that while some embodiments described herein relate to a multi-mode device, not all embodiments are limited in this respect. Rather, according to some embodiments, a stringed controller may be a dedicated stringed controller, and may not be an actual instrument.

[0059] Applicants have further appreciated that it may be desirable to provide a game controller and/or instrument from materials (e.g., plastic or other materials) which can not withstand the loading force imposed by strings (e.g., the devices may bend or break when subjected to the loading force of the strings, or may be unable to hold tune to a satisfactory degree). Thus, according to one aspect of the technology described herein, a stringed

instrument and/or instrument-shaped stringed controller may include a brace. The instrument and/or controller may be formed of one of more components, such as a body, a neck, a fingerboard, or any other suitable components, one or more of which may be formed of material(s) unable to withstand the loading forces imposed by strings. The instrument, or instrument-shaped controller, may be formed of multiple pieces fastened together, or of a single piece of material. A brace may be provided to enable the instrument and/or controller to withstand the loading force of the strings, and may be made of any material suitable for bracing the instrument or instrument-shaped controller against the loading force of the strings. The brace may be made of metal, wood, plastic, or any other suitable bracing material, as the braces described herein are not limited to being formed of any particular material. The brace may prevent the stringed apparatus (e.g., instrument, or instrument-shaped controller) from breaking. In addition, in accordance with some embodiments discussed below, the brace may facilitate keeping the apparatus in tune with little or no adjustment.

[0060] The aspects mentioned above, as well as further aspects of the technology, are now described in further detail. It should be appreciated that the aspects of the technology described above and below may be used individually, all together, or in any combination of two or more, as the technology described is not limited in this respect.

[0061] As mentioned, according to one aspect of the technology described herein, a stringed game controller is provided. Figure 1 shows an apparatus **100** according to one embodiment, which apparatus may be used as a game controller for interfacing with a game, such as, but not limited to, a video game. While the apparatus **100** resembles a guitar, it should be appreciated that such a shape and structure is non-limiting, as stringed game controllers implementing one or more of the features described herein may be shaped similarly to bass guitars, violins, cellos, or any other stringed instruments.

[0062] The apparatus **100** comprises one or more strings **120** extending from the head **122** over the nut **123**, along the neck **124** and fingerboard **125**, over one or more pickups **140**, to the bridge **126** on the guitar body **128**. In one embodiment, there are six strings **120**, but not all embodiments are limited in this respect, as any number of strings can be employed. According to some embodiments, the strings **120** produce electromagnetically detectable signals, and therefore may be made of an electrically conductive material, such as being steel guitar strings, nickel-wound strings, or may be formed of any other suitable

string material, including materials not conventionally employed for guitar strings. The strings **120** may be light gauge strings, heavy gauge strings, or have any suitable gauge, as the stringed apparatus described herein are not limited to use with any particular string gauge. Depending on the length, diameter and mass of a given string **120**, when it is struck (e.g., picked, plucked, strummed, or otherwise struck), the string **120** may vibrate with a harmonic tonal component corresponding to a musical note. Pushing a string **120** down onto one of the fingerboard frets **130** on the neck **124** changes its vibrational length, thereby changing the corresponding musical note associated with the string.

[0063] According to one embodiment, the apparatus **100** includes a guitar body **128** with at least one guitar pickup **140**. The guitar pickup **140** may detect movement of one or more of the strings **120**, and may generate an electrical signal, such as a voltage, in response to detecting such movement. In one embodiment, the pickup **140** may be a magnet surrounded by wires that detects movement of the strings **120** and produces a corresponding voltage output signal, but the aspects of the invention described herein are not limited in this respect, as the pickup **140** may be anything capable of detecting movement of the strings **120**. For example, the guitar pickup **140** may be a double coil pickup assembly from a guitar pickup vendor having a plastic ring and shell cover, Humbucker bobbin, ceramic magnet, and pole piece assembly, or any other suitable structure. The guitar pickup **140** may be inserted from above and secured with screws to the guitar body **128**, or may be connected to the apparatus **100** in any other suitable manner.

[0064] As described, in some embodiments the apparatus **100** may be a dedicated stringed game controller, i.e., that is not used in any mode as an instrument. According to other embodiments, the apparatus **100** may be a multi-mode apparatus operable both as a computer gaming input device (i.e., a game controller) and as an instrument (e.g., an electric guitar in the embodiment of Figure 1). For use as an electric guitar, the guitar body **128** may include a standard quarter-inch stereo audio jack **150** for communicating the output signal from the guitar pickup **140** to an external audio amplifier (e.g., via an audio cable), or to any other suitable device. The audio amplifier may be a designated amplifier, such as a conventional guitar amplifier, a computer, or a gaming system operable as a virtual amplifier, or may be any other suitable amplifier, as the type of amplifier is non-limiting. When the apparatus **100** is operated as an instrument, the

output signal from the guitar pickup **140** may be a conventional electric guitar output signal which contains string vibration tonal components representative of harmonic vibration of the strings **120**, and the output signal may be adjusted by a volume control **152** and a tone control **154**.

[0065] Whether the apparatus **100** is a dedicated game controller or a multi-mode apparatus capable of operating as a game controller, it may comprise one or more components and/or signal processing circuitry facilitating its operation as a game controller. For example, according to one embodiment, the apparatus **100** may provide one or more output signals (or one or more components of a single output signal) when operating as a game controller, which output signal(s) may provide one or more types of information for interacting with a gaming application. The apparatus may therefore include one or more components and/or signal processing circuitry suitable to produce such output signals.

[0066] With regard to the non-limiting example of Figure 1, one type of signal produced by the apparatus **100** when operated as a game controller may represent the positioning of a user's hand, finger, or fingers, on the fingerboard **125**. For example, the apparatus **100** may be a fretted apparatus, as shown in Figure 1, and one type of signal produced by the apparatus when used as a game controller may indicate a fret position of a user's hand, although similar signals may be generated for non-fretted controllers. Such a signal indicating the position of a user's hand on the game controller may be generated in any suitable manner, as the various aspects relating to stringed game controllers are not limited in this respect. In addition, it should be appreciated that a signal indicative of a user's hand positioning on the game controller is merely one non-limiting example of a type of signal which may be generated.

[0067] One manner in which a signal indicative of fret position may be determined is now described. However, it should be understood that other manners of such determination are possible, and that the following example is merely provided for purposes of illustration. For example, according to one non-limiting embodiment, the controller includes one or more fret sensors for detecting contact between the frets and one or more of the strings **120** to generate signals indicative of finger position that may be provided as an output signal (or portion thereof) which may serve as an input signal to a gaming application. Figures 4A-4C, described below, provide one non-limiting example

of how fret position of the apparatus **100** may be detected. It should, however, be appreciated that any suitable technique for detecting fret position may be used, as the technology described herein is not limited to use with any particular technique of fret detection. Moreover, fret positioning detection is only one non-limiting example of an output signal which may be produced by a stringed game controller. For example, some stringed game controllers may not have frets (e.g., a game controller shaped as a violin), and the position of a user's hand on the controller may be detected using a pressure sensitive material, a resistive material on a fingerboard of the stringed game controller, or using any other suitable technique.

[0068] With regard to Figure 1, a second type of signal (or component of a signal) produced by the apparatus **100** and provided as a gaming input to a gaming application may be a signal conveying timing information. For example, when the apparatus **100** is operated as a game controller, striking one or more of the strings **120** (e.g., plucking, picking, strumming, or otherwise striking) may generate a signal representing timing information. In some embodiments, the game controller may generate a separate output for each string. In other embodiments, only one output may be generated when any string is struck, however not all embodiments are limited in this respect.

[0069] Applicants have appreciated that determining the timing at which one or more of the strings **120** is played may be facilitated by damping the strings **120**, to reduce or prevent extended vibration of the strings (irrespective of whether the damping alters the pitch or tone of the string), thereby facilitating determination of when string movement is caused by a new strike as opposed to extended vibration. Therefore, according to one non-limiting embodiment, the strings **120** may be damped when the apparatus **100** is used as a game controller.

[0070] If the strings **120** are to be damped, any suitable manner of doing so may be used, as the technology described herein is not limited to damping the strings **120** in any particular manner. For example, according to the non-limiting embodiment of Figure 1, the apparatus **100** includes a mechanical vibration dampener **170** having an engagement surface for damping the strings **120**. For example, the engagement surface of the dampener **170** may partially contact the strings **120**, encapsulate the strings **120**, or have any other suitable relationship to the strings **120** for damping them. According to one embodiment for use with a controller that can also operate as an instrument, the vibration

dampener **170** may be retractable or removable in any suitable manner (e.g., may be recessed into the guitar body **128**) when the apparatus **100** is being used as an instrument, e.g., an electric guitar. When the apparatus **100** is operated in a gaming mode, the vibration dampener **170** may be positioned (e.g., raised up from the guitar body **128**) so that the engagement surface contacts (e.g., encapsulates) the strings **120** to reduce or prevent their harmonic vibration. The output signals from the guitar pickup **140** may then lack string vibration tonal components representative of harmonic vibration and instead may be used to represent one or more timing index components of one or more input signals to a gaming application (i.e., the time at which the strings **120** are moved). It should be appreciated that the positioning and type of dampener **170** described is only one non-limiting example, and that other structures and techniques for damping the strings **120** may be used. Other examples of mechanical dampeners are described below in connection with Figures 2 and 3. In addition, in some embodiments, dampening may be performed by signal processing, either alone or working together with some type of mechanical and/or electromechanical dampener, as described below.

[0071] It should thus be appreciated from the above discussion that, according to one embodiment, a game controller may produce one or more output signals representing timing information and positioning (e.g., fret positioning) information from the user's interaction with the strings of the stringed game controller. In some embodiments, the strings are used solely for generating timing information, and no pitch information is detected. Thus, according to this embodiment, processing of an output signal generated by striking one or more of the strings may not entail analyzing frequency information from the string vibration (e.g., pitch information), but rather may simply analyze whether a particular string is vibrating or not (i.e., whether a string has been struck). Thus, latencies associated with pitch analysis may be avoided in the signal processing stages. Also, according to this non-limiting embodiment, because the vibration of strings is not analyzed for pitch information, the strings of the stringed game controller need not be in tune to use the game controller, which may facilitate use of the apparatus as a game controller by users who are unable to tune the strings with sufficient precision to generate the proper pitch. In this embodiment, the fret or finger positioning information may be generated separately from any vibration of the string(s), for example by detecting contact of a string with a fingerboard, with a fret, or in any other suitable manner. Alternatively, in some embodiments, the pitch of a string may be detected and analyzed.

[0072] The apparatus **100** may further comprise a controller output module for processing received signals (e.g., one or more signals including the finger position component from the fret sensors or otherwise, and one or more timing index components from the guitar pickup **140**, according to one non-limiting embodiment) independently of any string vibration tonal component to generate one or more corresponding controller output signals to provide to the computer gaming application. The controller output module may be within the guitar body **128**, as in Figure 1 (which is why the controller is not visible in Figure 1), may be part of a module distinct from the apparatus **100**, may be disposed partially within and partially outside of the apparatus **100**, or may be implemented in any other suitable manner. The controller output module may have any suitable structure for processing the gaming input signals, one non-limiting example of which is shown and described below in connection with Figure 7. The controller output signal in gaming mode may be output through the audio jack **150**, or there may be one or more special game controller output ports such as a USB port **160**, a wireless communications link through an antenna (e.g., using a protocol such as Bluetooth and a 2.4 GHz RF module or other wireless technology), or any other suitable arrangement. When configured with a wireless communications link, it may operate up to a 30 ft. range and still meet a 40 hour battery life specification, or may have any other suitable operating range and battery life, as the aspects described herein as relating to game controllers are not limited in this respect.

[0073] As mentioned, according to one aspect of the technology described herein, the strings of a stringed game controller may be damped to reduce or eliminate their vibration after being struck (e.g., plucked, picked, strummed, or otherwise struck). The damping of the string vibration signal can be accomplished by applying mechanical and/or electro-mechanical damping directly to the strings, by signal processing of the electrical signal from the pickup, by some combination of these techniques, or in any other suitable manner. According to one embodiment, the damping may be performed to facilitate use of the strings to provide a timing signal.

[0074] When mechanical damping alone is used, it may be desirable that any vibration of the strings be damped by a sufficient amount to facilitate detection of distinct strikes on the strings generated by a user. A user typically may play, or strike, the strings in the frequency range of 1-5 Hertz (Hz) (e.g., 1-5 strums per second) when playing a song, and

the aspects of the invention described herein can be used with applications in which the user may strike the strings at that pace, a slower pace, or even faster. In some embodiments, the vibrations may be damped to exhibit a suitable amount of decay (also referred to as attenuation) to facilitate detection of distinct string strikes in a time less than the expected period between string strikes. For example, for some gaming applications it may be expected that a user will strum the strings of a stringed controller at a rate of approximately one strum per second (i.e., 1Hz). Thus, according to some embodiments, the strings of a stringed game controller may be damped to ensure that any vibration of the strings is sufficiently attenuated in less than approximately one second to distinguish between ongoing vibration of the string from the initial strike and a subsequent string strike. According to some embodiments, a sufficient amount of attenuation may be on the order of 50% or more attenuation of the initial string vibration, approximately 60% attenuation, approximately 70% attenuation, approximately 80% attenuation, approximately 88% attenuation, approximately 90% attenuation, or approximately 95% attenuation. However, it should be appreciated that the various aspects relating to damping described herein are not limited to providing any particular amount of attenuation.

[0075] Furthermore, while a non-limiting example of an expected play rate is one strum/strike per second, it should be appreciated that other play rates may also be used, for example, as mentioned play rates of 1-5Hz may be expected, or any other suitable play rate. Thus, according to some embodiments, a sufficient amount of damping (so as to achieve any of the amounts of attenuation listed above, or any other suitable amount) may be applied to distinguish between distinct string strikes in a time of less than approximately one second to less than approximately two tenths of a second (i.e., the time between strikes for play rates of 1-5Hz). Moreover, according to some embodiments, a sufficient amount of damping may be applied to attenuate the vibration of a string by a sufficient amount (e.g., any of those amounts previously listed) in less than approximately half of the time period between expected string strikes (i.e., in less than approximately 0.1 seconds for a play rate of 5Hz), in less than approximately one third of the time period between expected string strikes (i.e., in less than approximately 0.07seconds for a play rate of 5Hz), in less than approximately one quarter of the time between expected string strikes (i.e., in less than approximately 0.05 seconds for a play rate of approximately 5Hz), or in less than any other suitable time. According to some embodiments, the strings of a

stringed controller are damped to reduce any initial vibrations therein by approximately 90% or more (e.g., by approximately 98% in some embodiments) in approximately 25 milliseconds or less (e.g., one quarter of the time period between expected string strikes at a rate of approximately 10Hz), however it should be appreciated that not all embodiments are limited in this respect.

[0076] Figure 2 shows specific details of one specific embodiment of a mechanical vibration dampener **200** which may be used to damp strings on a stringed game controller, such as the apparatus **100**. For purposes of explanation, the operation of the dampener **200** will be described in connection with the apparatus **100** of Figure 1. However, it should be appreciated that the dampener **200** (or one like it but modified, e.g., to handle a different number of strings) may be applicable to other stringed game controllers.

[0077] The dampener **200** includes an engagement surface **201** that may encapsulate the strings **120** to reduce or prevent harmonic vibration, for example to reduce or eliminate vibration from a strike in any of the time periods listed above (e.g., in less than approximately 1 second, less than approximately 0.1 seconds, less than approximately 25 milliseconds, or within any other suitable time). In the example shown, the engagement surface **201** has six string slots **202** which each receive one of the strings **120** when the vibration dampener **200** is raised into operating position for gaming mode. The engagement surface **201** may be a foam piece (e.g., Poron[®]), or any other suitable material for providing a desired amount of damping within a desired time. The length, L, of the engagement surface slot **202** may be long enough to ensure sufficient dampening of the strings **120**. For example, the slot may be one inch or more in length in the direction along the strings **120**, or may have any suitable length. The decay time constant of string vibration corresponds to the amount of time it takes for the string vibrations to dissipate and the vibration dampener **200** may reduce the decay time constant relative to an undamped string to as close to zero as practical (given mechanical and other constraints), to any of the other time periods listed above, or to any other suitable time period. For example, a foam piece with a slot at least an inch long may dampen the decay time constant of string vibration to less than 25 milliseconds. However, in other embodiments, a dampener may be employed that dampens less efficiently but is still effective to facilitate the detection of distinct string strikes.

[0078] In one embodiment, the engagement surface **201** may be easily replaceable and

may be friction fit into an outer shell **204** (which may be formed of plastic or some other materials). Thus, according to one embodiment a user may select one of various options of materials for the engagement surface **201**, where the different options have different characteristics (e.g., stiffness), and may switch between materials by removing one type and friction fitting a replacement into the outer shell **204**. However, other constructions are possible. For example, the engagement surface may not be fit into any outer shell in some embodiments, but rather may be formed and mounted in any suitable manner to perform its damping function. In some embodiments, the vibration dampener **200** may include a dampening control mechanism, allowing it to be raised and lowered around the strings **120**. For example, the dampener **200** may be raised around the strings **120** when the apparatus is used in game mode (i.e., as a game controller), and may be lowered from the strings **120** if, and when, the apparatus **100** is used in a guitar mode (i.e., as an instrument). The dampener **200** may be raised and lowered by squeezing two control ends **203** with thumb and forefinger, and may include a locking mechanism to secure it in correct position in accordance with one embodiment, but other arrangements are possible.

[0079] Referring to FIG. 30a, in various embodiments, string dampeners, such as dampeners 170 and 200, may include a single engagement surface 3001 to dampen all of the strings 120 when apparatus 100 is used as a game controller. Depending on the material that the engagement surface 3001 is made of, such a configuration may be adequate to reduce harmonic vibration of the strings 120 to a level sufficient for game play. However, in some instances, vibrations generated from one or more string strikes may propagate through the engagement surface 3001 and onto adjacent strings 120. Such occurrences may result in the pickup 140 misidentifying the actual string 120 that was struck by a user. In turn, the misinterpreted output signals from the pickup 140 may be processed by a game application resulting in a less than optimal game playing experience for the user.

[0080] Referring to FIGs. 30b-30e, in another embodiment, the single engagement surface 3001 can be segmented into multiple engagement surfaces 3001a-3001n, with each segment corresponding to a particular string 120 or subset of strings. Utilizing multiple and distinct engagement surfaces 3001a-3001n can reduce propagation of string strike vibrations. Specifically, as illustrated in FIG. 30b, a dampener (e.g., 170, 200) can include a first engagement surface 3001a for damping a subset of the strings 120 (e.g., three of the

six strings), and a second engagement surface 3001b for damping another subset of the strings 120. The first engagement surface 3001a can be physically separated from the second engagement surface 3001b by a setoff distance (i.e., an air gap) 3003. This configuration can prevent string strike vibrations originating on engagement surface 3001a from propagating to any of the strings 120 being damped by engagement surface 3001b and vice versa. Unwanted string strike vibrations may still propagate through the segmented engagement surface 3001a, and onto one or more adjacent strings 120 within the same subset being damped by engagement surface 3001a. These vibrations can be reduced further by utilizing more engagement surfaces to dampen even smaller subsets of strings. For example, as illustrated in FIG. 30c, three separate engagement surfaces 3001a-3001c can be utilized to dampen subsets of two strings each. Similarly, as shown in FIG. 30d, in some embodiments, string strike vibrations from adjacent strings can be minimized by providing each string 120 with a separate corresponding engagement surface 3001a-3001f. As illustrated in FIG. 30e, a dampener 3002 can be adapted to include multiple engagement surfaces 3001a-3001n that can be separate and distinct from each other. In game mode, the dampener 3002 can be raised so that the separate engagement surfaces 3001a-3001n can simultaneously dampen all corresponding strings on apparatus 100.

[0081] Figure 3 shows another non-limiting embodiment of a vibration dampener **300**. The dampener **300** includes a neck strap arrangement, in that it includes a flexible strap **320** made of a material, such as cotton, rubber, plastic, or any other suitable material, which stretches in a longitudinal direction, and which may wrap around the guitar neck **124** to mechanically couple a vibration dampening material, described below, around the neck. Flexible strap **320** may include a fastening material **330** (such as Velcro[®] or other fastening material) on the ends to facilitate fastening, or may include any other suitable fastening mechanism. Engagement surface **310**, which may be coupled to the flexible strap **320** in any suitable removable or fixed manner (e.g., by gluing, sewing, or in any other suitable manner) may engage the strings **120** from above, and may be made of any suitable material (e.g., felt, rubber, or any other suitable material) for providing a desired amount of damping within a desired time (e.g., 70%, 80%, 85%, 90%, 95% or more attenuation in approximately 25 milliseconds or less or some other desired timeframe, depending on the rate at which users are expected to strike the strings). Additionally, in some embodiments, the engagement surface **310** may be formed of an electrically non-

conductive material.

[0082] The vibration dampener **300** may be applied in any manner suitable for damping the strings **120** by the desired amount and within the desired time, but in some embodiments is not attached so tightly as to cause the strings **120** to contact the frets **130**. Alternatively, a neck attaching vibration dampener **300** may be adapted to fit between the guitar strings **120** and the fingerboard **125** to engage the guitar strings **120** from below. For example, according to one embodiment, the dampener may include a piece of foam which is positioned between the fingerboard and the strings of the game controller, although other configurations are also possible. In some embodiments, the stiffness of the engagement surface **310** may be selected, for example from a plurality of options, to reduce the decay time constant of the string vibrations of the guitar strings **120**. For example, the engagement surface **310** may be formed of a material removable from the flexible strap **320**, so that a user may select one of various options of materials to use for the engagement surface **310**, where the various options have differing degrees of stiffness. The vibration dampener **300** may be removed from the guitar neck **124** of apparatus **100** if the apparatus **100** is to be used as an instrument, e.g. as a guitar.

[0083] While Figures 2 and 3 illustrate two examples of dampeners which may be used with a stringed game controller to dampen the strings, it should be appreciated that other types and forms of dampeners may be used. For example, damping of the strings **120** may be performed electromechanically and/or through signal processing, or through any combination of the damping techniques described herein, as the various aspects relating to damping of strings of a game controller are not limited to use with any particular type of damping. Also, it should be appreciated that dampening may not be employed in embodiments in which the expected play rate (i.e., the expected frequency of string strikes) is sufficiently low that the vibrations of the strings would naturally attenuate by a sufficient amount to allow detection of distinct strikes, or in embodiments in which the processing of signals from the strings is sufficiently fast and/or accurate to distinguish between distinct string strikes without dampening.

[0084] Figure 20 illustrates an example of a circuit which may apply electromechanical damping to one or more of the strings of a stringed game controller. The string **120** may be positioned proximate a pickup transducer **2002** and a force transducer **2004**, each of which may be connected to ground (GND). The pickup transducer **2002** and force

transducer **2004** may be coupled to each other via a negative feedback amplifier **2006**, having a suitable gain of $-A$. Vibration of the string **120** may induce a voltage in the pickup transducer **2002**, which is then amplified by the negative feedback amplifier **2006**, and then applied to the force transducer **2004**. The force transducer **2004** may then apply a restorative electromagnetic force to the string **120**, damping the vibration of the string **120**.

[0085] Figure 21 illustrates an alternative damping technique, in which vibration of the string is not itself damped, but a signal produced in a pickup is. As shown, an envelope **2102** of a signal generated by a vibrating string (e.g., a signal output by pickup **140** of Figure 1) is input to both a voltage controlled amplifier **2104** and an envelope follower **2106**. The output **2108** of the envelope follower **2106** therefore follows the envelope **2102** of the input signal and functions as a gain control voltage for controlling the gain of the voltage controlled amplifier **2104**. The output envelope **2110** of the voltage controlled amplifier may exhibit a shorter decay period than that of the envelope **2102**, even though the vibration of the string itself may not be damped. The output envelope **2110** may therefore be used to detect strikes occurring closer together in time than could the envelope **2102**. It should be appreciated that other methods of processing output signals from a pickup may also be used to shorten the decay time of the signal, and that the aspects described herein relating to damping string vibrations are not limited to using any particular method of damping.

[0086] As explained above, according to one embodiment, one type of output signal generated by a stringed game controller, which may be provided as an input to a gaming application, is a signal indicative of one or more fret positions of the user's fingers on the game controller. The fret position information may be detected in any suitable way. For example, referring to Figures 4A-C, a signal may be developed by making the frets **130** and the strings **120** of electrically conductive material, and connecting such electrically conductive frets **130** to a fret wiring ribbon **400** that runs under (or along, or within) the fingerboard **125**. Such frets **130** may be made of any suitable electrically conductive material, such as steel (for example, 18% Nickel-Silver fret wire) or any other material with suitable electrical and mechanical properties. According to some embodiments, the frets **130** are made of a material that resists coloration and rust, although the various aspects relating to game controllers described herein are not limited in this respect.

[0087] The frets **130** may be securely attached to the fingerboard **125** by any suitable means such as individually by ultrasonic welding, and may be trimmed for size using snips or in any other manner. The fret wiring ribbon **400** may be, for example, a 20 gauge 6-position ribbon cable terminated in a PCB connector **402** that connects to the controller output module of a stringed controller or may be any other suitable connector. As shown in Fig. 4 C, from the fret wiring ribbon **400** an individual wire may be crimped to a vertical fret connector **401** (e.g., 0.1 pitch) for each of the first several frets, for example for the first five frets, or for any other number of frets. The fret wiring ribbon **400** may run within the guitar neck **124** alongside any internal structural components, such as a brace discussed below, or may be positioned in any other suitable manner, such as along the outside of the neck **124**, or in any other suitable manner.

[0088] While one example of a gaming input signal representation of finger position along the neck of the controller is generated by detecting the contact of a string **120** to a fret **130**, it should be appreciated that other techniques may be employed for detecting finger position along the neck of the controller. For example, part or all of the fingerboard **125** may be formed of a pressure sensitive material, such that an electrical signal may be generated when a particular area of the fingerboard is pressed by a string or a user's hand. The pressure sensitive material may comprise one or more sections, for example corresponding to frets or to each of the strings. Alternatively, a resistive material may be formed to define a single area or many areas (for example to correspond to frets) on the fingerboard **125**, from which an electrical signal is generated when a string or finger is contacted to the fingerboard **125**. These alternate techniques can be used for fretted or non-fretted controllers. Thus, it should be appreciated that the various aspects relating to stringed game controllers are not limited to generating an indication of a user's hand position in any particular manner, or for that matter to even generating an indication of a user's hand position.

[0089] As discussed above, stringed game controllers, such as the apparatus **100** in Fig. 1, may be used to provide inputs to a gaming application. The apparatus may therefore comprise one or more features making it compatible with the gaming application. For example, the apparatus **100** may include control features specifically for interaction with a computer (such as a personal computer or a Mac[®] from Apple[®], Inc.), a gaming console (e.g., an Xbox 360[®] from Microsoft[®] Corporation, Playstation[®] from Sony[®], PS3[®] from

Sony[®], a Wii[®] from Nintendo[®] or any other gaming console), or any other type of device with which the apparatus may want to communicate, either for gaming purposes, sound processing purposes, amplification purposes, learning purposes, or any other purpose.

[0090] In the non-limiting example of Figure 1, the apparatus **100** comprises an analog joystick **185** that may be used in the normal manner of a computer game joystick (and which in some embodiments may alternatively be a digital joystick), and a sync button **186** for wireless synchronizing of the apparatus **100** to a game console (for example for multi-player games, or for any other purpose). According to one embodiment for use with multi-player applications, player indicator LEDs within the sync button **186** light up to indicate which player number the controller has been assigned (Player 1, Player 2, Player 3, or Player 4). While a joystick and a sync button are two non-limiting examples of the types of features which may be added to, or adapted on, a device to facilitate compatibility of the device with a gaming system, it should be appreciated that other types of features, such as dials, knobs, and direction buttons (e.g., 4 direction keypads and 8 direction keypads) may also be used, or any other suitable features.

[0091] The volume control **152** and tone control **154** may both be multi-function potentiometers with a center detent position or may be implemented in other ways. Their functionality may be specific to whether the apparatus **100** is in game mode (i.e., being used as a game controller) or guitar mode (i.e., being used as an instrument), which modes may in some embodiments be selected by a user from menu options of a gaming application visual display, or in any other suitable manner. In game mode, the volume control **152** may act as a select/back button that the player presses, for example, to highlight different menu options or to move backwards in a game menu system. Twisting the volume control **152** in game mode may have no effect. In guitar mode, the volume control **152** may be turned to act as a conventional volume control for the output signal from the guitar pickup **140**, and pressing it may have no effect. The tone control **154** similarly controls the tone of the pickup output signal in guitar mode. In game mode, the tone control **154** may act as a pressable start switch to activate a game function, and turning the control has no effect.

[0092] The ways in which the instrument controls (e.g., the volume and tone knobs) can be adapted to control a game discussed above are just an example, as the instrument controls can be adapted to control a game in any suitable manner. In addition, while some

examples of features making apparatus **100** compatible with gaming applications have been described, it should be appreciated that such examples are non-limiting. Stringed game controllers according to aspects of the technology described herein may have any number and type of features (e.g., buttons, knobs, dials, ports, joysticks or any other features) making them compatible with any particular gaming application. The number, type, and functionality of such features may depend on the gaming application itself, e.g., the types of input signals the gaming application receives from a user to operate. Thus, the various aspects of stringed game controllers described herein are not limited to including any particular number, type, or function of features to be compatible with a gaming application.

[0093] As mentioned above, conventional instruments, such as guitars, are typically assembled from various wooden or composite material components which are connected together. Each component piece is individually strong and rigid. Various features of such a conventional guitar are adjustable so that the surfaces and angles of the neck, fretboard, frets, and pickup can be adjusted to be in correct relationship to the strings over time (e.g., as the materials expand or contract due to temperature and/or humidity, or other reasons). Typically, this is based on an adjustable bridge arrangement at the base of the guitar body where the strings terminate. By raising, lowering and tilting the different sections of the adjustable bridge, the strings can be correctly positioned over the other components.

[0094] As discussed above, Applicants have appreciated that it may be desirable to create instrument-shaped controllers out of material which cannot withstand the loading forces imposed by strings without bending to an unsatisfactory degree or breaking. For embodiments wherein the controller is a dual use device capable of use as an instrument, such devices, if they did not break entirely, may require frequent tuning or adjustment, and be unable to hold tune with sufficient precision to enable it to be used as an instrument. Applicants have appreciated that a brace (alternatively referred to herein as a stringer or support) may also or alternatively be used to support an instrument and/or an instrument-shaped game controller made of material(s) (e.g., lightweight plastics or other materials) that would not otherwise be sufficiently strong to withstand the loading force of strings. The brace structure may be in the form of a stiff metal bar structural member, or any other suitable bracing structure, that provides structural support for the device, for example as the backbone provides structural support in a human.

[0095] Applicants have appreciated that the amount of adjustment of a stringed instrument needed to maintain the instrument in tune and/or to maintain the strings at a proper positioning relative to the other components of the instrument may be reduced or eliminated by use of a brace. Thus, according to some embodiments of the technology described herein, a stringed instrument (which may optionally serve as a game controller) may be constructed as a substantially adjustment-free device which may be provided to the customer with the strings already correctly positioned and ready to use without the need for adjustments, such as bridge adjustments.

[0096] As should be appreciated from the foregoing, according to one aspect of the technology described herein, a stringed device comprises a brace connected between the two ends at which the strings of the device are fixed, to support the structure in withstanding the force of the strings and/or to minimize or eliminate alterations in the relationship between the ends of the strings. For example, in a guitar, the strings are typically fixed between the head or nut and the bridge. Therefore, according to one embodiment, a brace may be provided to support the guitar from the head or nut to the bridge, for example to maintain the strings in a proper position. In some embodiments, one end of the brace is connected to the nut, or the head of a guitar-shaped device, and a second end of the brace is connected to the bridge. The brace may be formed of any suitable bracing material for withstanding a loading force applied on the stringed device by strings, which, for example, may be approximately 150 pounds to 200 pounds for light gauge guitar strings, but which may vary depending on the string characteristics. The brace may be formed of metal, wood, plastic, or any other sufficiently strong material, and may take any suitable shape that, together with the material, provides the desired level of support. In this respect, the desired level of support may vary depending on the application. For example, when the apparatus is to be used solely as a game controller and is not intended to be used as an instrument, the level of support may be one to simply prevent the device from deforming or breaking, as keeping the device properly tuned may not be an issue when it is not intended to be played as an instrument. In addition, for embodiments wherein the apparatus is intended to be usable as an instrument, while desirable to provide a level of support to make the instrument adjustment-free, it is not necessary in all embodiments.

[0097] Figure 5 shows one specific example of a brace **500** in the specific form of a

solid bent steel bar which runs from the head end of a stringed device, such as guitar-shaped apparatus **100** of Figure 1, down through the guitar body, and which provides structural support for the device. The brace **500** may provide the structural strength to withstand the loading force of the guitar strings, which may be around 250 pounds in some embodiments. While steel is used as the material for the brace **500** in one embodiment due to its combination of strength, availability, and low cost, it should be appreciated that any suitable bracing material may be used. In the embodiment shown, the neck head **501** is a separate steel stamping that is welded onto the neck end of the brace **500**, and the neck **502** is a plastic part that is placed onto the brace **500** which allows the finger board **503** to snap in. However, the aspect of the invention relating to a brace is not limited to such a configuration, and it should be appreciated that the braces described herein for supporting stringed devices are not limited to any particular shapes, materials, methods of fabrication, or methods of attachment.

[0098] As discussed above, in some embodiments, with the use of a brace, such as brace **500** above, an adjustment-free stringed device, such as a guitar or guitar-shaped game controller, may be provided. For purposes of illustration, such a device is described in relation to a guitar, such as apparatus **100** in Figure 1, though it should be appreciated that the concept of a substantially adjustment-free stringed device may apply to other types of stringed instruments, and/or instrument-shaped controllers. According to one embodiment, the device may include a non-adjustable bridge. The non-adjustable bridge may be implemented in any suitable manner, an example of which is the non-adjustable bridge **600** shown in Figures 6A-6C. The non-adjustable bridge may facilitate maintaining a non-adjustable correct relationship between the fingerboard and the strings. For example, the non-adjustable bridge **600** may terminate the body end of the strings **120** after they have passed over the guitar pickup **140**. In this non-limiting embodiment, the bridge **600**, which may be made of steel or any other suitable material, secures the ends of the strings **120** in anchor holes **601**. In this embodiment, the bridge **600** includes mounting holes **603** for connecting the bridge **600** to the guitar body **128**. The non-adjustable string slots **602** elevate the strings **120** to a desired or optimum height above the guitar pickup **140** and frets **130**. Because of the unvarying rigid structure imparted to the instrument and/or controller (e.g., the apparatus **100**) in this non-limiting embodiment by the brace **500**, little or no user adjustments may be needed to the bridge **600**, or any other components, to achieve satisfactory string placement. Thus, the device may be

immediately ready for use when purchased and not require tuning by the user.

[0099] While some embodiments of the technology discussed herein related to an adjustment-free device can be used in connection with a dual mode instrument and game controller, it should be appreciated that these aspects of the technology described herein can be used with instruments that do not have any of the techniques described herein that enable their use as a game controller, and can be used with a dedicated instrument and/or with a dedicated game controller.

[00100] As mentioned above, a stringed game controller in accordance with some embodiments may include a controller output module for processing signals based on user interactions (e.g., signals generated when strings **120** contact the frets, signals from the pickup **140** based on string strikes, etc.) and providing such signals to a gaming application. Figure 7 is a circuit diagram of one non-limiting example of a controller output module **710**, which may be implemented, for example, by a digital processor running firmware, and/or any other suitable combination of hardware, firmware, and software, as the embodiments described herein relating to game controllers are not limited to use with any particular type of controller output module. According to some embodiments, the controller output module **710** may include any suitable processing device, such as a microcontroller and/or programmable logic (e.g., a field programmable gate array (FPGA)), or any other suitable processing device. As mentioned previously, the output module may be within the stringed controller (e.g., within the guitar body **128** of apparatus **100**), or in any other suitable location.

[00101] In the embodiment shown in Figure 7, each of input pins **702a-702f** of the controller output module **710** is electrically connected to the respective frets **130** of the apparatus **100**, and generates an input signal indicating that a fret is contacted by a string **120**. The electrical connection may be direct as shown, or it may be via intermediary electronic devices, such as resistors, capacitors, transistors, or the like, or via non-wired media. The strings **120** are electrically connected to the ground pin **704** of the controller output module **710**. When a string **120** contacts a guitar fret **130**, a circuit to ground is closed and a small current (e.g., 5 mA or any other suitable current) runs to ground **704** through the string **120**. The corresponding input pin **702a-702f** connected to the fret **130** contacting the string **120** is therefore connected to ground, and the voltage on that input pin may therefore drop. The drop in voltage on the input pin may be detected by the

controller output module **710**, which may therefore generate a signal directly or indirectly resulting in a gaming input signal, which information may then be relayed to an external processor and/or external gaming application. As discussed above, the gaming input signal may be relayed through the USB port **160** (which in the non-limiting example of Figure 7 is illustrated as having four signal lines, corresponding to a power supply line (VDD), a ground line (GND), a serial input line (SI), and a serial output line (SO)) or in any other suitable way. It should be appreciated that the form of USB port **160** shown is not limiting, and that signals from the controller output module **710** may also or alternatively be provided to an external device, such as a computer or gaming console, in ways other than using a USB port (e.g., using a PS/2 connector or in any other suitable manner). While Figure 7 illustrates one circuit configuration by which connection of a string **120** to a fret **130** may be detected, it should be appreciated that other configurations are possible, and that the various features described herein relating to stringed game controllers are not limited in this respect. Also, in some embodiments, multiple signals can be generated for each fret (e.g. with one signal per string contacting a fret or one signal representing contact by any contribution of two or more strings).

[00102] Embodiments of the stringed game controller (e.g., apparatus **100** in Fig. 1) may incorporate a suitable scheme for providing indicia to the user for use in developing the component of the gaming input signal indicative of a user's hand position or fret position. For example, a visual clue may be provided (such as a color coding scheme, a number coding scheme, a symbolic coding scheme, an icon coding scheme, etc.), a tactile scheme may be employed, any combination thereof, or any other suitable type of scheme may be employed. The elements of the scheme (e.g. the numbers in a number coding scheme) may be positioned on, or incorporated with, any suitable part of the apparatus **100**, such as on the frets **130**, the fingerboard **125**, the neck **124**, or any other suitable part of the apparatus. For example, Figures 8A-B show that there may be color coding and/or numbering along the neck **124** and/or on the face of the fingerboard **125**. In some embodiments, together with such a coding scheme, a user interface for the gaming application (e.g., a visual display screen) may use corresponding indicia (e.g., colors/numbers that directly match the indicia on the apparatus or are correlated in some manner) to communicate the inputs the user should be performing (e.g., strum timing and direction, string fingering, etc.).

[00103] The gaming input signal(s) from the apparatus **100**, (e.g., from the frets **130**, string strikes, etc.) may be updated to reflect user interaction in any suitable manner. For example, in those embodiments in which one of the gaming input signals (or one of the components of a gaming input signal) reflects whether a string is contacting a fret, different monitoring schemes may be employed. For example, in one embodiment, the strings **120** are all connected to ground simultaneously and each fret **130** is connected to a corresponding input pin of the controller output module (e.g., input pins **702a-702f** of the controller output module **710**), so that whenever a string contacts a fret, a signal is generated on the corresponding input pin of the output module. In an alternative embodiment, one or more of the strings **120** are alternately grounded (i.e., alternately connected to ground **704**) so that a signal is generated on the corresponding input pin of controller output module **710** only if a string is contacting a fret at the same time that the string is electrically grounded, effectively meaning the strings are individually monitored at different times. In this latter monitoring scenario, which string **120** is connected to ground may be alternated rapidly, or at any suitable rate, either sequentially or in any suitable order to poll the strings individually for signals thereon. It should also be appreciated that the two monitoring schemes described above for monitoring signals generated when a string contacts a fret are non-limiting, and that other monitoring schemes may be employed.

[00104] In another embodiment, one or more of the frets **130** may be sub-divided into a number of (e.g. six) spaced electrically isolated segments each corresponding to one of the strings **120**. In such a configuration, each segment of the frets **130** may be configured to allow separate detection of when it is contacted by a string (as opposed to the fret generating a single signal when contacted by any string), for example by modifying the electrical connection scheme of Figures 4A-4C to add connections for each of the six segments of the frets of interest (e.g. by adding additional wiring ribbons), or in any other suitable manner. It should be appreciated that in this embodiment contact of specific individual strings with each fret **130** may be determined, which may be desirable in some applications where it is desired to increase the number of possible inputs from the user and/or to challenge the user to interact with the stringed controller in a manner more realistic to playing the corresponding instrument by detecting precisely which string contacts a fret. However, as discussed above, not all embodiments are limited in this respect and others need not differentiate between which strings contact a fret or are

otherwise fingered by the user.

[00105] Referring to FIGs. 24A and 24B, in various embodiments, at least one fret may be configured as a segmented fret 2400 that can be utilized with a stringed game controller, or with a stringed musical instrument. The segmented fret 2400 can include a body portion 2401 made of non-conductive material, and having a first end, a second end, and a length defined between the first and second ends. The segmented fret 2400 can be implemented in curved fret boards, by adapting the body portion 2401 to include a corresponding radial curvature along the length of the body portion. Alternatively, the segmented fret 2400 can be implemented in flat fret boards, by adapting the body portion 2401 to be substantially horizontal along its length. The length of the segmented fret 2400 can be determined based on a taper or configuration of a corresponding fret board.

[00106] Multiple electrically conductive elements 2406 can be disposed along the length of at least part of the body portion 2401. The conductive elements 2406 can be made of metal including nickel, silver, steel, titanium, a metal alloy, or any such combination. Each conductive element 2406 can be electrically insulated from the other conductive elements by the body portion 2401, which can be made of a synthetic or natural non-conductive material, such as plastic, glass, wood, or any such combination. With reference to FIGs. 25A-B, each conductive element 2406 may include at least one aperture 2502 through which the conductive element 2406 can be affixed to the body portion 2401.

[00107] Referring also to FIGs. 28-29, in an embodiment, each conductive element 2406 can include an exposed surface 2402 on the top of the body portion 2401 that can correspond to a particular string 120 of a game controller or stringed musical instrument. The exposed surfaces 2402 can be shaped, for instance, as a parallelogram, and can be disposed adjacent to each other between insulated separations 2403 along the length of the body portion 2401. This configuration can permit at least one string 120 to slide smoothly from one exposed surface 2402 to the next while maintaining constant contact with one or more of the exposed surfaces 2402. The exposed surfaces 2402 can be configured in various geometric shapes to achieve this functionality; however diagonal shaped edges 2701, 2702 may be most practical.

[00108] For example, when a guitarist performs string bending, a metal string 120 can be pressed down onto the exposed surface 2402 of a first conductive element 2406, and forced across the insulated separation 2403 and onto the exposed surface 2402 of the

adjacent conductive element 2406 without losing string to metal contact. If the diagonal-shaped edges 2701, 2702 were horizontal instead of slanted, string to metal contact would be lost when the string 120 made contact with the insulated separation 2403.

[00109] Each of the conductive elements 2406 may also extend below the body portion 2401, and can be adapted to electrically connect the fret 2400 to an underlying game controller or stringed musical instrument. In some embodiments, the conductive elements 2406 can be configured to include extended length tangs 2404 that can pass through a corresponding fingerboard 125 and into, for instance, an underlying printed circuit board (PCB) 403 configured as a scanning matrix (see FIG. 4D). As illustrated in FIGs. 4A-C, other underlying electrical connections can be utilized to electrically couple the frets to a game controller or stringed musical instrument. Each tang 2404 may also include at least one aperture 2405 to facilitate attachment of the tang 2404, for instance by soldering, to the underlying PCB board 403 or other electrical connection.

[00110] Referring to FIG. 33, a manufacturing method 3300 can be utilized to fabricate the segmented fret 2400 and can include: providing a blank formed of electrically conductive material (3302), processing the blank to provide a plurality of electrically conductive elements (3303), affixing a body portion made of a non-conductive material to the plurality of electrically conductive elements, so that each element can be insulated from the other conductive elements by the body portion (3304), and removing material from the processed blank and affixed body portion to form a perimeter of the fret in a desired shape (3305).

[00111] Specifically, and with reference to FIGs. 25A-B, the electrically conductive elements 2406 can be stamped from metal blanks or sheets made of nickel, silver, steel, titanium, metal alloy, or any combination of these metals. Each stamped blank 2501 can include multiple conductive elements 2406. The stamped blank 2501 may be adapted to include a horizontal top surface 2503, or a curved/arching top surface 2504 to correspond to the shape of a particular fret board. Each blank 2501 can also be stamped to include one or more apertures 2502 corresponding to each conductive element 2406. The apertures 2502 can be utilized to secure each conductive element 2406 to the body portion 2401. In alternative embodiments, the conductive elements 2406 can be manufactured by heating and casting the metal blank in molds, or by machining the metal blanks or other appropriate material.

[00112] Referring to FIGs. 26 and 27, the stamped blank 2501 can be processed further to separate the conductive elements 2406 from each other. For example, processing can include cutting away at least one portion of the stamped blank 2501, for instance at separations 2403, to separate the electrically conductive elements 2406 from each other. The process of cutting away can also provide each conductive element 2406 with a diagonal shape. As shown in Fig. 27, in some embodiments, a sprue 2601 may be included as part of the stamped blank 2501, which serves to keep all of the separated conductive elements 2406 aligned.

[00113] Thereafter, the conductive elements 2406 can be placed in a mold and over-molded with a non-conductive material to produce the body portion 2401 of the segmented fret 2400. For example, when plastic is utilized as the non-conductive material, the plastic can first be heated until in liquid form, and can then be used to over-mold the conductive elements 2406. The liquid plastic can fill-in the separations 2403 to electrically insulate the conductive elements 2406 from each other and to form the body portion 2401. The plastic also fills in apertures 2502 to secure the elements 2406 to the body portion 2401. Upon hardening, the segmented fret 2400 can be abrasively surfaced to smooth out and remove and rough edges. If a sprue 2601 is utilized to align the conductive elements 2406, it can be removed at this point. The fret can then be affixed to a stringed game controller or stringed musical instrument.

[00114] As mentioned above, in some embodiments, a stringed game controller may include interfaces or controls in addition to the strings for interfacing with a gaming application. As discussed above, examples of such interfaces or controls may include an analog joystick **185** and sync button **186** shown in Fig. 1, or any other suitable features (e.g., directional keypads, knobs, dials, or any other features). In some embodiments, the signals produced by the additional interfaces or controls may be processed by the same output control module that processes signals from the strings, but the embodiments of the invention described herein are not limited in this respect. The signals from any additional controls can be detected and processed in any suitable manner, as the aspects of the invention described herein are not limited in this respect.

[00115] As one example, as shown in Figure 7, additional computer gaming application controls, for example in the form of a button (e.g. sync button **186**) and a joystick (e.g., joystick **185**), may be connected to the controller output module (e.g., controller output

module **710**). The sync button **186** is represented by a switch, and may be connected between ground and an input pin **706b** of the controller output module so that when activated the controller output module **710** detects a drop in voltage at input pin **706b** and relays information indicating that the control has been activated to an external processing device or external gaming application in any suitable manner (e.g. through the USB port **160**). It should be appreciated that the three additional input pins **706a**, **706c** and **706d** are shown as being connected to switches **708a**, **708b**, and **708c**, which switches may correspond to additional controls on the game controller (e.g., apparatus **100**) not shown in Figure 1, but which may be included in some embodiments. The joystick **185** has been described as an analog joystick, and therefore may be implemented using two potentiometer tracks **712a** and **712b**, which may be connected to ADC input channels **714a** and **714b** of the controller output module **710**, respectively. However, it should be appreciated that the joystick **185** may be implemented in any suitable manner, and may alternatively be a digital joystick suitably implemented. It should also be appreciated that other configurations for the computer gaming application controls are also possible, as any number (including zero) of additional interfaces or controls may be provided on a stringed controller according to some embodiments.

[00116] As previously explained, according to one embodiment, a stringed game controller (e.g., apparatus **100** in Fig. 1) may generate an output signal, or a component of an output signal (it should be appreciated that for purposes of this application separate components of a single signal may be considered to be separate signals, and vice versa), indicative of the timing at which strings are struck, which may be provided as a gaming input signal to a gaming application. This timing information can be generated based on user interaction with the stringed controller in any suitable manner. For example, according to one embodiment for use with the output module of Fig. 7 and the guitar shaped controller **100** of Fig. 1, to develop this timing index component of the gaming input signal, the controller output module **710** of Figure 7 may include an internal analog to digital converter (ADC) module having an input pin **720** that is connected to sample the voltage across the guitar pickup **140**. The ADC module may operate at a sampling rate of about 5 to 6 KHz, or at any other suitable sampling rate. The guitar pickup **140** may be a transducer that converts movement and vibrations in the strings **120** into a voltage signal across its terminals. For example, the pickup **140** may include one or more permanent magnets wrapped in one or more wire coils which possess an associated magnetic field.

When the strings **120** move relative to the magnets of the pickup **140**, they may change the magnetic field, which induces electric currents in the coil and a corresponding voltage across the terminals of the pickup **140**, which may be sampled by the ADC module. The output signal of the ADC module may then be processed in any suitable manner, one example of which is described below in connection with a strum detector, to determine whether a string has been struck and thereby derive a signal indicative of the timing of string strikes.

[00117] As mentioned, some embodiments of a stringed game controller may include a dampener to dampen vibrations of the strings **120**. When engaged, the vibration dampener may remove some or all of the frequency tonal components of the string vibrations and may greatly reduce the time constant of decay for those vibrations, thereby making it easier to detect string strikes. It should be appreciated that the timing index component of the gaming input signal may be developed in other manners (including from string controllers other than the guitar-shaped controller **100** of Fig. 1 and using a different output module from that shown in Fig. 7), and that the example described above is non-limiting.

[00118] In the non-limiting example of Figure 7, the guitar pickup **140** is also connected to circuitry to enable the apparatus **100** to operate in a mode where it can be played as an instrument. This may be achieved in any suitable manner and the aspect of the invention that enables the stringed controller to also operate as an instrument is not limited in this respect. In one non-limiting example, the guitar pickup is connected in parallel with a tone control circuit **770** and a volume control circuit **780** when the output jack **150**, which may be a standard $\frac{1}{4}$ inch phone jack or any other suitable connection, is connected to an external guitar amplifier. The volume control circuit **780** may be an adjustable voltage divider implemented with a potentiometer that may be manually adjusted by turning the volume control **152**. Tone control circuit **770** may include a capacitor in series with a potentiometer with one terminal shorted to the middle terminal, allowing it to function as an adjustable resistor. The tone control circuit **770** may be in parallel with the volume control circuit **780** and may provide an alternate path to ground with an impedance that decreases with increasing frequency due to the capacitor, thereby operating as a low-pass filter by attenuating high frequency voltage signals from the guitar pickup **140** relative to low frequency signals. The cutoff frequency of this low-pass filter may be adjusted

manually by turning the potentiometer, via tone control **154**, to change the resistance in series with the capacitor, or may be adjusted in any other suitable manner. As mentioned above, the aspects of the invention are not limited to use with any particular type of volume control or tone control circuit, or even to use with a device that includes volume or tone controls.

[00119] It should be appreciated that input pin **720** presents a high input impedance, so that current flowing on the pin is small relative to current that flows through the tone control circuit **770** and volume control circuit **780** when the output jack **150** is connected. When the output jack **150** is disconnected, the tone control circuit **770** and volume control circuit **780** are open circuits, in which case the only electrical loading on the guitar pickup **140** is the input impedance of the ADC module.

[00120] As discussed above, according to some embodiments, user strikes of the strings **120** are detected via any suitable combination of hardware, software and/or firmware (e.g., via the controller output module **710**). For example, according to one embodiment, the controller output module **710** includes an ADC module which receives an analog signal from pickup **140** and converts it to a digital signal. The controller output module **710** may then filter a resulting digital signal from the ADC module to detect user strikes of the controller strings (e.g., strings **120** in Fig. 1) as discrete events independently of string vibration tonal components. The digital signals from the ADC module may be low pass filtered to obtain an estimate of the envelope of the signal from the pickup **140**. According to another embodiment, the output of the ADC module may be rectified by a full-wave rectifier and then filtered by a peak detection filter to create the envelope of the signal from the pickup **140**. This envelope estimate may then be compared to different thresholds based on the current state of a strum detector module implemented in the controller output module **710**, with different thresholds being used to determine when a strum has occurred. A vibration dampener, examples of which were previously described, may facilitate detection of such string movements as discrete timing index events, since reducing the decay time constant for string vibrations may facilitate resolving individual string strikes. The specific processing discussed above to detect string strikes is provided only as one non-limiting example, as other manners of identifying discrete string strikes and timing index events are also possible, and the embodiments of the invention described herein are not limited to using any particular technique.

[00121] Furthermore, it should be appreciated that various pickup scenarios may be employed. For example, a single pickup (e.g., pickup **140**) may be used to detect string vibration from any of the strings of a stringed controller or instrument (e.g., strings **120** of apparatus **100**). In such a scenario, the pickup may have a single output signal, such as shown in Figure 7, and a single ADC channel may be used. The sampling rate of the ADC channel may be chosen to be higher than the highest expected string vibration frequency, or any other suitable value.

[00122] However, according to another embodiment, a pickup may be used to detect vibrations of individual strings, as opposed to detecting the vibration of any of the strings of the device. For example, referring to the apparatus **100** of Figure 1, a 6-way pickup (referred to as a “hex” pickup) may be employed, such that detection of vibrations may be individually detected from any of the six strings **120** shown. In such a scenario, the controller output module (e.g., controller output module **710**) may include an ADC channel for each of the pickup channels (i.e., six ADC channels in the example in which a 6-way pickup is used). In those embodiments in which multiple ADC channels are used, the multiple channels may be realized by multiple dedicated ADC hardware channels, by a single ADC with a multiplexer having an input for each output of the pickup (i.e., a multiplexer with six inputs in the example in which the pickup is a 6-way pickup), or in any other suitable manner, as the various aspects are not limited in this respect. Other types of pickups are also possible, and the various aspects relating to detecting vibrations of the strings of a stringed device are not limited to use with any particular pickup configuration.

[00123] Referring to FIGs 31a-31d, in an embodiment, the pickup **140** can be configured as a polyphonic pickup (e.g., hex-pickup) **3100** that includes a separate transducer **3105** for each corresponding string **120** on the apparatus **100**. For example, hex-pickup **3100** can include six individual transducers **3105**, each of which can generate an electrical signal, such as a voltage, in response to detecting movement of a corresponding string **120**. Each individual transducer **3105** can include a magnetic core **3101** disposed through a wire-wound bobbin coil **3102**, a magnet **3103**, and a magnetic return **3104**.

[00124] The core **3101** can be any piece of magnetizable material, such as, a soft iron rod, steel, bundle of wires, or other ferrous material. The core **3101** can intensify and provide a path for a magnetic field produced by a current running through the wire-windings of coil

3102. The magnet 3103 can be a neodymium magnet or other strong magnet. The magnetic return 3104 can be made of any magnetizable material, such as, iron, steel, or other ferrous material.

[00125] The hex-pickup 3100 can be mounted on apparatus 100 so that each individual string 120 can be disposed horizontally above and across the top of a core 3101 and return 3104 of a corresponding transducer 3105. A typical setoff distance 3106 between the disposed string 120 and the underlying core 3101 and return 3104 can be less than or equal to about 2mm.

[00126] As illustrated in FIG. 31d, the core 3101, magnet 3103, and magnetic return 3104 form a U-shaped structure that together with the string 120 loosely form a closed magnetic path (i.e., magnetic circuit); the reluctance of which is dominated by the setoff 3106 (i.e., air gap) between the string 120 and the core 3101, and the string 120 and the return 3104. The magnetic return 3104 can be utilized to reduce the reluctance in the magnetic circuit to achieve two objectives: 1) to increase the magnetic field strength and thereby increase the output voltage of the transducer 3105; and 2) to constrain any fringe flux component of the individual magnetic flux-paths to reduce undesirable crosstalk to adjacent coils 3102 in the pickup 3100.

[00127] Specifically, reducing the reluctance by reducing the setoff 3106 (i.e., total air gap) in the magnetic circuit has the effect of increasing the magnetic flux coupling to both the string 120 and to the windings of the corresponding coil 3102. This increases the signal induced in the coil 3102 by a factor of about three times or more compared to a pickup having no magnetic return 3104. The reduced reluctance can also reduce the amount of stray flux that may couple to adjacent coils 3102 in pickup 3100, which reduces crosstalk between adjacent transducers 3105.

[00128] The output voltage of each individual transducer 3105 is proportional to the flux density in its magnetic circuit, and the number of turns in its coil 3102. Vibration of the string 120 modulates the flux density in the magnetic circuit by modulating the reluctance of the circuit. In other words, vibrations of the string 120 cause variations in a magnetic field that produce corresponding variations in the output voltage. The output voltage equation is $E = NAdB/dt$ where N is the number of coil turns, A is the mean cross sectional area of the magnetic core 3101, and B is the resulting flux density.

[00129] Several advantages can be obtained by utilizing a polyphonic pickup 3100 having magnetic returns 3104 coupled to individual coils 3102 as described above. Specifically, the disclosed configuration can be utilized with stringed musical instruments and with stringed game controllers. The disclosed configuration provides a wide range of output voltage levels that can be utilized as input parameters during game play to enhance a user's game playing experience. For example, the range of output voltage levels can be used to determine how hard a user is striking the strings 120. Other advantages include realizing space and cost savings by avoiding the need for a dual-coil configuration that is typically utilized in polyphonic pickups. Overall performance of the disclosed pickup 3100 can equal or surpass that of costlier dual-coil polyphonic pickups.

[00130] Referring to FIG. 32, in an embodiment, a single combined-pickup assembly 3200 can be configured to provide both, a monophonic pickup 3201 and the polyphonic pickup 3100 in the same housing 3202. This configuration can be utilized for applications where both types of pickups are required in a stringed musical instrument or game controller.

[00131] In an embodiment, the monophonic pickup 3201 can include two rectangular aspect coils in a "stacked humbucker" configuration to provide a single output for all of the strings 120. The coils can be stacked vertically one upon the other, and connected in series anti-phase. The first coil closest to the strings 120 can provide an instrument signal of interest, along with an unwanted electromagnetic interference component that may be induced by environmental factors, such as transformers, fluorescent lights etc. The second coil placed beneath the first coil (i.e., string pickup coil) provides little string signal component, but is instead designed to generate the same electromagnetic interference component as that which is induced into the first coil by external interfering electromagnetic fields. By connecting the coils in series anti-phase, the interference component can be effectively cancelled, leaving only the signal component of interest at the pickup terminals.

[00132] In various embodiments, the combined pickup assembly 3200 can be utilized as a component of a game controller. The combined pickup can generate and transmit at least one signal corresponding to the particular vibrating string to a processor associated with the interactive video game. The processor may process and manipulate the signal prior to providing the signal as input to the video game. In other embodiments, the combined

pickup 3200 may provide the generated signal directly to a game console as input. The combined pickup 3200 may be coupled to additional transducers and components of a game controller so that a user interacting with the game controller can provide a variety of input data to the video game in real-time.

[00133] In an embodiment, the combined pickup assembly 3200 can be adapted to fit into the same space as a typical single pickup, which can result in substantial space and cost savings. This space savings can be realized by stacking the coils of the monophonic pickup 3201 on top of each other along one side of the housing 3202, and disposing hex-pickup 3100 along the other side of housing 3202. Since hex-pickup 3100 includes magnetic return 3104 rather than a bulky dual-coil configuration, less space is required for housing the hex-pickup 3100.

[00134] The processing of signals from the pickup of a stringed game controller or instrument to detect discrete strikes of the strings may be accomplished in any suitable manner. According to some embodiments, a strum module may be employed to analyze the envelope of the output signal from the pickup, the envelope being created by filtering the output signal of the pickup, or in any other suitable manner. The strum module may include two or more states which may be used to identify when a strum is initiated, and when the vibrations from the strum are sufficiently attenuated to conclude that subsequent vibrations of the strings are due to a subsequent strum. It should be appreciated that while the term “strum” is used in this context, the applicability of the methodologies described is not limited to scenarios in which multiple strings of the instrument are played in a single upward or downward stroke, but rather may apply equally well to detecting strikes of individual strings. Thus, the terms “strum” and “strike” may be used interchangeably in this context.

[00135] Figure 9 illustrates a non-limiting example of the different states of a strum detector module (e.g., implemented in the controller output module **710**) according to one embodiment of the invention. In the embodiment of Fig. 9, a strum detector module has three states, including a strum high state, a strum low state, and a no strum state. In the no strum state **920**, the strum detector module outputs a logic low signal (e.g., a logic “0”), and repeatedly compares the current estimate of the signal envelope of interest to a strum start threshold (SST). As described above, the signal of interest may be the signal from pickup **140**, and the estimate of the signal envelope may be generated by low pass filtering

the digital version of the signal from pickup **140**, which digital version may be provided by the ADC module of the controller output module **710**. However, other methods of developing the envelope are possible, and in some embodiments no envelope may be generated, as any suitable signal representing the output of the pickup **140** may be used. If the envelope (abbreviated as “env” in Figure 9) is greater than the SST, the strum detector transitions to the strum high state **930**, and outputs a logic high signal (e.g., a logic “1”). Otherwise, the strum detector remains in the no strum state **920**. In the strum high state **930**, the strum detector module repeatedly compares the estimate of the signal envelope to a strum end threshold (SET). If the envelope is greater than the SET, the strum detector module remains in the strum high state, and continues to output the logic high signal. Otherwise, the strum detector module transitions to a strum low state **940** and starts a counter (abbreviated as “ctr” in Figure 9) to measure time elapsed in the strum low state **940**. The strum module continues to output the logic high signal while in the strum low state.

[00136] While in the strum low state **940**, the strum detector module repeatedly compares the estimate of the signal envelope to the SET. If the envelope is greater than the SET, the strum detector module transitions to the strum high state **930**, and continues to output the logic high signal. Otherwise, the strum detector module compares the value stored in the counter to the strum hold time (SHT). If the counter value is greater than the SHT, the strum detector module transitions to the no strum state **920**, and outputs a logic low signal. Otherwise, the strum detector module remains in the strum low state **940**.

[00137] Information about the current state of the strum detector module may be transmitted to an external device or application via the communications port **160** at various times, or via any other suitable technique. For example, strum detector state information may be sent in response to a state transition. Alternatively or additionally strum detector state information may be sent periodically to an external device or application. Also, it should be appreciated that other manners of strum detection are possible, and that Figure 9 merely provides one non-limiting example. For example, the number of strum states, and their significance (e.g., the significance of a transition between states) may be varied, as the embodiments described herein relating to detection of distinct strum/strike events is not limited to using any particular detection algorithm.

[00138] Figure 10 shows an example of the application of the strum detector of Figure 9

to a filtered signal envelope estimate **1002**, for example as might be obtained by low pass filtering the output signal of the ADC module of controller output module **710**. The output of the strum module is represented by logic output signal **1004**. As shown, the strum module may begin in its no strum state, prior to time t_0 . In this state, the logic output signal **1004** of the strum module is low, and the strum module may compare the value of the envelope estimate to the SST. The strum is first detected at time t_0 when the envelope estimate **1002** first exceeds the SST, in response to which the strum module transitions to the strum high state, and its logic output signal **1004** goes high. In the strum high state, the strum module compares the value of the envelope estimate **1002** to the SET.

[00139] At time t_1 , the envelope estimate **1002** is less than the SET, and the strum module transitions to its strum low state, during which the logic output signal **1004** remains high. The counter is begun, and the end of the strum is detected at time t_2 when the envelope estimate **1002** next remains below the SET for a duration longer than the SHT. Thus, at time t_2 the strum module transitions to its no strum state and its logic output signal **1004** goes low.

[00140] As mentioned above, it should be appreciated that various algorithms may be used to detect the beginning and end of a strum/strike, and that the examples of Figures 9-10 are not limiting. Other algorithms may be employed.

[00141] According to one embodiment, the strum detection module may determine the timing index component of the gaming input signal as described above independently of the operation of any sensors (e.g., finger position or fret sensors) that determine one or more other components (e.g., fret position components) of the gaming input signal. Alternatively, the determination of both components of the gaming input signals may be related. For example, a fret sensor circuit may be configured to only send an update of the fret sensor state to an external processing device or application when a strum event is detected by the strum detector. This provides output signals that more realistically reflect the way a corresponding instrument operates, but not all embodiments are limited in this respect. In another example, the strum detector may be configured to adjust the SST, SET, or SHT in response to a detected change in the fret sensor state.

[00142] According to some embodiments, software running on an external processing device (e.g., a gaming console, a computer, etc.) may generate visual and/or audio signals based at least in part upon the user's interaction with the stringed controller (e.g., based at

least partially on the strikes of the strings and the fingering of the strings). This system may be used for any number of purposes including for entertainment such as for computer gaming, for education such as to facilitate training of the user in the use of the stringed instrument (e.g., in the use of a guitar in the example of Figure 1) or in any other way, as aspects of the invention are not limited in any respect by the manner in which a software program (e.g., a game) responds to input from a stringed controller. Examples of software applications for use with a stringed controller are described below, but it should be appreciated that the various aspects described herein are not limited to use with any particular software applications.

[00143] As has been mentioned, one aspect of the technology described herein relates to the use of stringed game controllers, for example in the shape of a guitar, bass guitar, violin, or other stringed instrument. Such game controllers may be configured to be coupled to an external device including a processor (e.g., a personal computer, a gaming console, or any other device including a processor) operating a gaming application or other software application that responds to inputs from the stringed controller. For example, referring to the non-limiting embodiment of Figure 22, an external device **2202**, which may be a computer, a gaming console, or any other type of device including one or more processors, runs a computer gaming application or other software application that responds to the input signals generated by the stringed game controller (e.g., the apparatus **100** of Figure 1) in response to user actions. The external device **2202** may be coupled to the apparatus **100** by a communication link **2204** that may include a wired connector through a communication port, such as USB port **160** in Figure 1, a wireless link or in any other suitable manner. The computer gaming (or other software) application may interact with the user via a visual display (e.g., on a screen **2206**) and/or audio output through, for example, gaming system or computer speakers **2208**, a television, or in any other suitable manner.

[00144] According to some embodiments, the gaming application may be configured to produce Musical Instrument Digital Interface (MIDI) sounds (for example, via speakers **2208**) corresponding to a plurality of instruments. In some embodiments, the user may be able to select the types of sounds produced from a MIDI instrument selector (e.g., guitar, tuba, trumpet, or any other instruments). Moreover, different MIDI instruments may be assigned (by a user or otherwise) to different frets of a fretted game controller, such that

touching a string to a particular fret may result in the gaming application producing a sound corresponding to the instrument assigned to that fret. Similarly, sound effects may be assigned to frets (by user selection or otherwise) in some embodiments, such as reverb, delay, vibrato, pitch bending, or any other sound effect. Similarly, the gaming application may allow the user to assign particular chords to the frets, so that contacting a string to a particular fret may result in the gaming application sounding the chord assigned to that fret. It should thus be appreciated that according to various embodiments various effects (e.g., instrument type, note, sound effect, etc.) may be selected by a user (or otherwise assigned), and that the various aspects described herein are not limited in this respect.

[00145] Various examples of interfaces that a game or other software application may employ to interact with a user of a stringed controller will now be described. It should be appreciated that these examples are non-limiting, as the various aspects described herein relating to stringed game controllers are not limited to use with games or other software applications that use any particular type of user interfaces. For example, it should be appreciated that the stringed game controllers according to some aspects described herein may be compatible with any existing gaming applications, such as the Guitar Hero[®] games and others.

[00146] Figure 11 shows an embodiment of an interactive visual display **1100** that provides user input directions to tell the user how and when to produce a gaming input signal. The interactive visual display **1100**, which may be used in connection with a stringed game controller such as apparatus **100**, communicates indications related to strum timing, fret fingering, and strum direction (e.g., up or down). A strum indicator **1101** (shown as an arrow in Figure 11 but other visual cues can be used) indicates to the user when to strike the strings of the game controller with either an upward or downward stroke (e.g., by using a guitar pick or the user's fingers). When the user successfully strums at the correct time while pressing the correct fret (indicated by fret indicator **1104**), a visual cue is provided to indicate this success to the user. This can be done in any suitable way. In one non-limiting example, the strum indicator **1101** changes to a "hit" color (e.g., changes from black to blue) to indicate correct performance. When the user strums at an incorrect time, strums while not pressing the correct fret, or fails to strum at all at the correct time, the strum indicator **1101** changes to a "miss" color (e.g., changes from black to red) to indicate a failed performance. When the strum indicator **1101** is black it

indicates a strum that has not been played yet.

[00147] The interactive visual display **1100** also includes a tempo indicator **1102** which moves horizontally from left to right giving a visual indication of the tempo. The placement of the tempo indicator **1102** directly over a strum indicator **1101** indicates the user is to strum while depressing the correct fret. The tempo indicator **1102** may take any suitable form, such as a bouncing ball, a moving bar, or any other suitable form. Below the strum indicators **1101** is a rhythm count **1103** in the specific form of a number to help the user keep the proper rhythm count. It should be appreciated that the rhythm count **1103** may take any suitable form.

[00148] A fret indicator **1104** may be used to indicate the correct finger placement (e.g., the correct fret number to depress). For example a “1” may indicate to the user to press on the first fret of the game controller (e.g., a guitar-shaped game controller), a “2” the second fret, and so on. The fret indicator **1104** on the interactive visual display **1100** may be have a visual cue (e.g., color and/or number coded) that matches corresponding visual indicators **800** on the neck **124** of the apparatus **100**, as shown for example in Figure 8A, or may be coded in any suitable manner.

[00149] The interactive visual display **1100**, which again is one non-limiting example of a suitable interactive display, also includes a score indicator **1105** that provides the user with feedback about how well the user did in correctly performing the visual cues illustrated on the display. Such feedback can be provided in any suitable way. For example, a user may get a point for each strum correctly executed, lose one or more points for incorrect or missed strums, receive bonus points for long, consecutive strings of successful strums without mistakes, etc. Other feedback mechanisms are also possible (e.g., separately noting correct and incorrect strums) and the aspects of the invention described herein are not limited in this respect.

[00150] It should be appreciated that interactive visual display **1100** is merely one non-limiting example of an interactive visual display, and that many variations and modifications of the interactive visual display **1100** are possible. For example, according to some specific embodiments, the game or software application may require (or have a selectable mode of operation that requires) only correctly timed strumming, regardless of whether a correct fret is depressed by the user. In such a case, the fret indicator **1104** may not appear on the interactive visual display **1100**, and/or correct fingering may not be

tracked and the user may only be required to strum the correct rhythm with open (non-fretted) or any fretted strings. In some such embodiments, a chord-progression may be pre-programmed to automatically change the chords at the correct time with no extra input needed by the user so a user can play along with a song simply by properly striking the strings. A similar approach may also be used for single-note melodies (solos, leads). Alternatively, some embodiments may require only proper fingering, without string striking. In such a case, the strum indicators **1101** might not appear, might appear as simple lines without a directional up or down arrowhead, or might optionally appear with a direction indicator. To produce sound, the user would only need to finger the frets or strings with the correct timing. It should be appreciated that other ways of interacting with the user are also possible.

[00151] Figures 12 A-D show an example of another interactive display interface **1200**, which communicates strum timing. In this embodiment, a graphical representation of the strum area **1201** of the apparatus **100** is depicted. In the specific example shown, the strum area **1201** includes the bridge, pickups, bottom of the neck and guitar strings, however it should be appreciated that any suitable area may be displayed. Such an interactive display interface **1200** may be displayed all the time, or only when the concept of strumming is pertinent to game play. Therefore, fret fingering is not accounted for in this particular interactive display interface **1200**. For example, such an interactive display interface **1200** may be used for unfretted open strumming of the strings. The interactive display interface **1200** may indicate that a user is supposed to strum when a falling pick icon **1202** passes over the strum area **1201**. It should be appreciated that Figures 12A-D are merely examples, and that other ways of indicating strum timing are possible.

[00152] Figure 13 shows another non-limiting example of an interactive display interface **1300** similar to the one shown in Figure 12, but which communicates both strum timing and fret fingering information. In this non-limiting example, the pick icons **1302** may be coded to indicate fingering information, for example by adding color and/or number coding to the pick icons **1302**, or by using any other suitable indicator of fingering information. A falling pick icon **1302** passing over the strum area **1301** may indicate that the user is to strum while simultaneously pressing the correct fret number.

[00153] Figures 14 A-D show another embodiment of an interactive display interface **1400** that communicates strum timing and fingering information. In this embodiment, a

representation of the headstock and first several frets on the neck of the apparatus **100** are depicted on the display interface **1400**. There are five fret tracks **1401** that pick icons **1402** slide on, with each fret track **1401** corresponding to a target fret **1403**. The fret tracks **1401** and/or the target frets **1403** may be coded using color and/or number coding, as shown, or using any other suitable type of coding (e.g., symbol coding, or any other suitable type of coding). The pick icons **1402** travel along the fret tracks **1401** towards the target frets **1403**. When a pick icon **1402** intersects with a target fret **1403**, the user is supposed to strum while simultaneously pressing the correct corresponding fret on the neck of the guitar-type controller **100**.

[00154] Figures 15 A-C show another non-limiting example of an interactive display interface **1500**, which includes a time target area **1501** and a pick icon **1502**. The user is supposed to strum the strings of the game controller when a sliding pick icon **1502** passes over the time target area **1501**. In this interactive display interface **1500**, the direction of the sliding pick icons **1502** may be left to right, right to left, top to bottom, bottom to top, or any other suitable direction. Such an interactive display interface **1500** might be used all the time or only when the concept of strumming is pertinent to game play, and fingering is not accounted for in this particular interactive display interface **1500**. For example, such an interactive display interface **1500** may be used for unfretted open strumming of the strings of the game controller.

[00155] Figures 16 A-B show another non-limiting example of an interactive display interface **1600** similar to the one shown in Fig. 15, but which communicates both strum timing and fingering information by adding color and/or number coding to the pick icons **1602** to communicate fretting information. It should, however, be appreciated that any type of coding may be used to convey fingering information, as color and number coding are but two non-limiting examples. When a sliding pick icon **1602** passes over the time target area **1601**, the user is to strum while simultaneously pressing the correct fret number. The embodiments in Figures 16A-B show two different methods for the coding of the pick icons to convey fret information. Fig. 16 A shows pick icons **1602** that are individually color and/or number coded. Fig. 16 B shows the use of groups of like pick icons **1602** that are color and/or number coded together. It should be appreciated that other manners of coding the pick icons are also possible, and that the display interfaces described herein are not limited to use with any particular type of coding.

[00156] Figure 17 shows one non-limiting example of various logical steps in the flow of a game that can be controlled using a stringed controller according to any of the embodiments described herein. It should be appreciated that the steps may vary depending on the game, and that the various aspects described herein relating to playing of a game are not limited to any particular type(s) of steps, number, or order of steps.

[00157] As mentioned, Figure 17 is a flowchart illustrating an example of the order of steps of game play flow of a game which may be played using a stringed controller according to any of the embodiments described herein. The game flow begins at the main menu, step **1701**, which may allow a user, at **1702**, to choose a mode of play or to alter game options. Upon choosing the game mode, the user is taken to a selection screen, step **1703**, where he or she may choose, at **1704**, a level (e.g., impacting degree of difficulty), location, music selection, or any other selection information. In this non-limiting example, once the chosen level/location/music is loaded a beat matching game play begins, step **1705**.

[00158] The game interface produces a series of rhythm events, step **1706**, such as the correct timing of a strum and/or fret press. Many of these events in a row constitute the beat matching play of an entire song. For each event, the game tests whether or not the user accurately strummed and/or fretted for that event, step **1707**. If so, a score is awarded and the instrument audio track remains audible. If not, the user is awarded no score, or there may be a score penalty, and the guitar audio track may continue or become inaudible for the duration of that event. When all events are finished (i.e., when the song is over), the final score is displayed, step **1708**, and a story scene, or cinematic, may occur, in the form of one or more transitional visual sequences which advances the game's story. The user is then returned to the location/level/music selection screen, step **1709**, where they are prompted to choose another location, level and music selection for the next section of the game. Again, it should be appreciated that the types, number and order of steps illustrated in Figure 17 are merely a non-limiting example, and that other possibilities for the flow of a game or program are also possible.

[00159] A stringed game controller, such as those discussed above, may be useful for other types of game play applications besides beat matching. For example, an application may employ specific defined melodic patterns (e.g., guitar licks) to control the game. For example, fretting and strumming fret "1" followed by fretting and strumming fret "2" is a

melodic pattern that may be defined as “1, 2.” A gaming application may require specific melodic patterns that have a specific utilization and application according to the rules of the game. For example, the user may be taught the melodic pattern “1, 2, 3,” and then be informed that providing this melodic pattern in front of a closed door in the game will open that door. From that point forward, whenever the user encounters a closed door, he or she may, and in some embodiments must, perform the melodic pattern “1, 2, 3” to open the door. It should be appreciated that this is only one example, and that other melodic patterns may be used in other embodiments.

[00160] According to one embodiment, when a melodic pattern is performed, any sound, such as a specific musical note or a sound effect, may be played for each performed note of the pattern. The melodic pattern may or may not need to be played with a specific rhythm and timing depending on the game play context and application of this concept. Melodic patterns may contain two or more inputs, for example: “1, 2”; “3, 2, 3, 4, 1, 2, 5, 3, 2, 1, 2, 3”, etc. According to one embodiment, melodic patterns (e.g., licks) may be given specific identifiers or names in the game play context to identify them and distinguish them to the user. For example, the door opener pattern described above may be named “Open Sesame” in the context of the game.

[00161] The user interactions that can control a gaming application (e.g., by opening a door, causing a character to run or take another action, etc.) are not limited to playing melodic patterns, and can include any desired manipulation of the strings on the controller. For example, some gaming applications may require specific manipulations of the stringed controller to cause specific actions in a game. A specific manipulation may be any specific input or series of inputs that can be performed on the stringed controller and be detected by the gaming application. That is, there may be specific inputs or series of inputs that have a specific utilization and application according to the rules of the game. For example, the user may be taught that pressing any two frets simultaneously in front of a closed door in the game will open that door. From that point forward, whenever the user encounters a closed door, he or she may press any two frets simultaneously to open the door. Examples of specific manipulations include, but are not limited to: pressing two or more specific frets simultaneously, pressing any two or more frets simultaneously, hammer-on either once or in rapid succession, pull-off either once or in rapid succession, strumming, strumming softly, strumming rigorously, strumming very slowly, strumming

very quickly, playing any particular note or chord, any combination of the above, or any other suitable manipulations.

[00162] According to some embodiments, a gaming application may require fast, repeated strumming of the game controller's strings to fulfill a game objective. Thus the user may satisfy game play objectives by sustained, rapid strumming of the stringed controller. For example, the user's progress may be depicted by a bar or meter that fills as the user strums, until the goal is reached. The bar or meter may decay (deplete) at a specific rate, so that to fill the meter the user must consistently strum more quickly than the decay rate until the goal is achieved.

[00163] According to another embodiment, a gaming application may also, or alternatively, require open unfretted strumming to produce a defined chord progression, as shown in Figure 18 A. Each time the user open strums, the predetermined chord progression progresses by one beat, during which a chord progression may be aurally produced via software, as shown. Similarly, some gaming applications may require open picking in response to a defined melody, as shown in Fig. 18 B. Each time the user open-picks a string, the predetermined melody progresses by one beat, during which the melody is produced aurally via software. These are two non-limiting examples, and it should be appreciated that other types of user interaction are also possible.

[00164] As should be appreciated from the foregoing, in some applications, the stringed controller may be used to control games that do not have a musical instrument play along theme. For example, a stringed controller can be used to control any type of game and be adapted to work with or replace controllers conventionally used to control such games. If the game requires the player to simulate proper musical instrument operation (e.g., play chords) to control game operation, the user experience in playing the game may simultaneously provide valuable practice time in the playing of the instrument.

[00165] In some specific gaming applications, the stringed controller may be used to simulate musical improvisation. For example, specific notes and/or chords may be related to each finger position or fret, so that when the strings are fingered and/or struck by the user, the specific note and/or chord is produced aurally by the software. The user can then be placed into a free mode of game play in which he or she is free to finger and strike/strum as desired with little or no game play rules or structure. The result is a simulation of musical improvisation, with or without background accompaniment music

for the improvisation.

[00166] In some embodiments, a stringed game controller, such as apparatus **100** when used as a game controller, may be used to control a gaming avatar in two-dimensional or three-dimensional space. For example fingering the strings (e.g., pressing a specific fret) of the game controller in particular ways may cause the avatar to walk forward, walk backwards, left, or right. Other fingerings or strikes may cause the avatar to perform other actions, such as jumping, running, or any other action that makes sense in the context of the game play. Similarly, the controller also may be used to control a game camera view. For example, a specific fingering may cause the game camera to pan, zoom, rotate, pitch, yaw, swivel, or otherwise alter its state. Other functions within the gaming application may also, or alternatively, be controlled by the game controller, as those listed are merely non-limiting examples.

[00167] In some embodiments, the gaming or software application is configured to detect true chord fingerings (e.g., on the frets or otherwise) of the stringed controller. For example, a software application may ask the user to fret a D major chord and show the correct fingering. Then when frets number “2” and “3” are activated simultaneously, positive feedback may be given to the user in any suitable manner, e.g., audibly and/or visually, such as via the large check mark in Figure 19. Thus, it should be appreciated that various aspects of the technology described herein may be used as an educational, or teaching aid.

[00168] As has been explained, various embodiments described herein may include producing timing and/or finger positioning signals using a stringed game controller. In some embodiments, information about the pitch of a string played is not produced, or is not sent to or detected by the gaming application. Alternatively, according to one embodiment, a real-time pitch detection algorithm may be included in the application software, and may be used to determine a pitch produced by the stringed controller. Any suitable pitch detection algorithm may be used, as the embodiments described herein that employ pitch detection are not limited in this respect. The pitch produced by the stringed controller may then be compared to a target pitch in the context of a game or other application. For example, pitch detection may be used in the context of beat matching game play or other type of game play, or in any other suitable application.

[00169] Embodiments of the present invention may also include a computer software

application having an instrument (e.g., a guitar) training mode that trains the user to play a song or portion of a song on an instrument, using audio and visual feedback including an interactive display interface which may be similar to those discussed above. For example, in training mode, operation may optionally start by only requiring strumming without a “play-by-numbers fret indicator” appearing on the interactive display interface, and the player would only be required to strum the correct rhythm with open (non-fretted) strings. A chord progression may be pre-programmed into the computer software application so that the chord sounds would indeed be changing, but with no extra input needed by the user. The same method may also be used for single-note melodies such as solos and leads. Alternatively, a training mode of operation could start by only requiring fret fingering with the strum indicators appearing as lines with no directional up or down arrow.

[00170] As described above, some embodiments of the present invention are directed to a stringed game controller having a controller output module for detecting, processing, and outputting signals from the game controller either directly or indirectly (e.g., via any other suitable device) to a computer or gaming console executing a software application to be controlled by the controller. It should be appreciated that in some embodiments of the present invention, the controller output module need not be integrated into the same apparatus as the strings and supporting body of the stringed game controller. For example, as illustrated in Figure 23, according to one embodiment a stringed game controller **100a** may be provided that includes a controller output housed separately from the strings and their supporting body and coupled in any way (e.g., wired and/or wireless connection). For example, the controller output module may be housed in a box **2302** separate from the guitar body and strings, and may include any of the functionality discussed above in connection with the controller output module (e.g., as discussed in connection with the controller output module **710** in Figure 7). For embodiments where additional controls are provided in addition to the strings (e.g., a joystick **185**, sync button **186**, etc.), they may be provided on the separate box **2302** as shown in Figure 23. In some embodiments, the box **2302** may be detachably mounted to the guitar body **128**, or may be a distinct box. Outputs from the strings **120** can be provided to the controller output module in the box **2302** in any suitable way, including using any of the techniques discussed above. For example, according to some embodiments output signals from pickup **140** may be provided to the box **2302** by a suitable connection **2304** (wired or wireless), such as an output cable, or any other suitable connection. According to some embodiments, one or

more of the frets **130** may be electrically connected to the box **2302** by a suitable connection **2306**, which may be configured to send a signal to the box **2302** when a string **120** contacts a fret **130**. It should be appreciated that these are non-limiting examples of ways in which the box **2302** may be coupled to the guitar-shaped structure of FIG. 23 to receive output signals from which one or more gaming input signals may be derived, and that other coupling configurations and types are possible.

[00171] In addition, in accordance with one embodiment, the box **2302** can be formed as part of a kit or adapter that can adapt or retrofit any musical instrument (e.g., any guitar) into a stringed game controller so that the owner of an instrument may obtain an adapter and use his/her instrument as a game controller. For example, in some embodiments an acoustic-electric instrument (e.g., an acoustic-electric guitar) may be used as a game controller by employing an adapter kit including the box **2302**. The pickup of the acoustic-electric instrument may be coupled to the box **2302** in the manner shown by connection **2304** of Figure 23, and one or more of the frets of the instrument may be coupled to the box **2302** to detect when one or more of the strings **120** contact the fret(s), using a suitable connection (e.g., connection **2306**, or any other suitable connection). For adapting a fretted instrument that does not have conductive strings, an alternate technique for detecting finger position may be employed (examples of which are discussed above).

[00172] Moreover, for instruments that do not have a pickup built in, such as some acoustic instruments (e.g., an acoustic guitar), a suitable pickup may be added to the instrument (e.g., an off-the-shelf pickup as part of a converter kit including the box **2302**, or otherwise), and then the output of the pickup connected to box **2302**, by a connection such as **2304**. Other configurations are also possible. Thus, it should be appreciated that various features of the technology described are application to electric instruments, acoustic-electric instruments, acoustic instruments, and non-instruments (e.g., dedicated game controllers), and are not limited in this respect.

[00173] Similarly, while some detectors (e.g., conductive fret sensors for the frets **130** in Figure 1) have been described as being integrated into the stringed controller, it should be appreciated that other configurations are possible. For example, according to some embodiments, fret sensors may be detachable from the frets **130**, and may be connected to box **2302** as part of an adapter kit for adapting a stringed instrument to work as a game controller. Other configurations for fret sensors are also possible. In addition, as

discussed above, other techniques can also be employed for detecting finger positions on the neck of a fretted or non-fretted instrument, and any of those techniques may be made removable to allow an instrument to be adapted to function as a game controller.

[00174] The above-described embodiments of the present invention can be implemented in any of numerous ways. For example, the embodiments may be implemented using hardware, software or a combination thereof. When implemented in software, the software code can be executed on any suitable processor or collection of processors, whether provided in a single computer or distributed among multiple computers. It should be appreciated that any component or collection of components that perform the functions described above can be generically considered as one or more controllers that control the above-discussed functions. The one or more controllers can be implemented in numerous ways, such as with dedicated hardware, or with general purpose hardware (e.g., one or more processors) that is programmed using microcode or software to perform the functions recited above.

[00175] In this respect, it should be appreciated that one implementation of the embodiments of the present invention comprises at least one computer-readable storage medium (e.g., a computer memory, a floppy disk, a compact disk, a tape, etc.) encoded with a computer program (i.e., a plurality of instructions), which, when executed on a processor, performs the above-discussed functions of the embodiments of the present invention. The computer-readable storage medium can be transportable such that the program stored thereon can be loaded onto any computer resource to implement the aspects of the present invention discussed herein. In addition, it should be appreciated that the reference to a computer program which, when executed, performs the above-discussed functions, is not limited to an application program running on a host computer. Rather, the term computer program is used herein in a generic sense to reference any type of computer code (e.g., software or microcode) that can be employed to program a processor to implement the above-discussed aspects of the present invention.

[00176] In addition, various functions and operations may be described as being performed by or caused by software code to simplify description. However, those skilled in the art will recognize what is meant by such expressions is that the functions result from execution of the code by a processor, such as a microprocessor. Alternatively, or in combination, the functions and operations can be implemented using special purpose

circuitry, with or without software instructions, such as using Application-Specific Integrated Circuit (ASIC) or Field-Programmable Gate Array (FPGA). Embodiments can be implemented using hardwired circuitry without software instructions, or in combination with software instructions. Thus, the techniques are limited neither to any specific combination of hardware circuitry and software, nor to any particular source for the instructions executed by the data processing system.

[00177] While some embodiments can be implemented in fully functioning computers and computer systems, various embodiments are capable of being distributed as a computing product in a variety of forms and are capable of being applied regardless of the particular type of machine or computer-readable media used to actually effect the distribution.

[00178] At least some aspects disclosed can be embodied, at least in part, in software. That is, the techniques may be carried out in a computer system or other data processing system in response to its processor, such as a microprocessor, executing sequences of instructions contained in a memory, such as ROM, volatile RAM, non-volatile memory, cache or a remote storage device.

[00179] Routines executed to implement the embodiments may be implemented as part of an operating system or a specific application, component, program, object, module or sequence of instructions referred to as "computer programs." The computer programs typically comprise one or more instructions set at various times in various memory and storage devices in a computer, and that, when read and executed by one or more processors in a computer, cause the computer to perform operations necessary to execute elements involving the various aspects.

[00180] A machine readable medium can be used to store software and data which when executed by a data processing system causes the system to perform various methods. The executable software and data may be stored in various places including for example ROM, volatile RAM, non-volatile memory and/or cache. Portions of this software and/or data may be stored in any one of these storage devices. Further, the data and instructions can be obtained from centralized servers or peer to peer networks. Different portions of the data and instructions can be obtained from different centralized servers and/or peer to peer networks at different times and in different communication sessions or in a same communication session. The data and instructions can be obtained in entirety prior to the

execution of the applications. Alternatively, portions of the data and instructions can be obtained dynamically, just in time, when needed for execution. Thus, it is not required that the data and instructions be on a machine readable medium in entirety at a particular instance of time.

[00181] Examples of computer-readable media include but are not limited to recordable and non-recordable type media such as volatile and non-volatile memory devices, read only memory (ROM), random access memory (RAM), flash memory devices, floppy and other removable disks, magnetic disk storage media, optical storage media (e.g., Compact Disk Read-Only Memory (CD ROMS), Digital Versatile Disks (DVDs), etc.), among others. The instructions may be embodied in digital and analog communication links for electrical, optical, acoustical or other forms of propagated signals, such as carrier waves, infrared signals, digital signals, etc.

[00182] In general, a machine readable medium includes any mechanism that provides (i.e., stores and/or transmits) information in a form accessible by a machine (e.g., a computer, network device, personal digital assistant, manufacturing tool, any device with a set of one or more processors, etc.).

[00183] In various embodiments, hardwired circuitry may be used in combination with software instructions to implement the techniques. Thus, the techniques are neither limited to any specific combination of hardware circuitry and software nor to any particular source for the instructions executed by the data processing system.

[00184] Although some of the drawings illustrate a number of operations in a particular order, operations which are not order dependent may be reordered and other operations may be combined or broken out. While some reordering or other groupings are specifically mentioned, others will be apparent to those of ordinary skill in the art and so do not present an exhaustive list of alternatives. Moreover, it should be recognized that the stages could be implemented in hardware, firmware, software or any combination thereof.

[00185] The phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting. The use of "including," "comprising," "having," "containing", "involving", and variations thereof, is meant to encompass the items listed thereafter and additional items.

[00186] Having described several embodiments of the invention in detail, various modifications and improvements will readily occur to those skilled in the art. Such modifications and improvements are intended to be within the spirit and scope of the invention. Accordingly, the foregoing description is by way of example only, and is not intended as limiting. The invention is limited only as defined by the following claims and the equivalents thereto.

CLAIMS

What is claimed is:

1. A game controller comprising:

a musical instrument having a fingerboard and a plurality of strings extending along the fingerboard;

a plurality of frets disposed on the fingerboard and underlying the plurality of strings, at least one of the frets having a plurality of electrically conductive zones that are electrically insulated from each other and each zone corresponds to a different string in the plurality of strings;

at least one first sensor adapted to detect fingering of the fingerboard by a user of the game controller, at least in part, by detecting contacts between the strings and the frets;

at least one second sensor comprising a polyphonic pickup having a plurality of wire-wound coils coupled to corresponding magnetic returns, each coil and corresponding magnetic return being associated with a particular string in the plurality of strings, the second sensor adapted to detect striking of at least one of the plurality of strings by the user of the game controller; and

at least one control module that is coupled to the at least one first sensor and the at least one second sensor and that provides at least one electrical signal indicating the fingering of the fingerboard by the user and indicating the striking of at least one of the plurality of strings by the user.

2. The game controller of claim 1, wherein the plurality of strings and at least some of the plurality of frets are electrically conductive, and wherein the at least one first sensor is adapted to detect which of the electrically conductive strings has contacted the electrically conductive fret.

3. The game controller of claim 1, further comprising a monophonic pickup coupled to the polyphonic pickup, and wherein the monophonic pickup and polyphonic pickup are disposed in a housing configured as a single component on the game controller.

4. The game controller of claim 1, wherein the monophonic pickup is a stacked humbucker pickup adapted to detect movement of the plurality of strings.
5. The game controller of claim 1, wherein the polyphonic pickup is a hexaphonic pickup adapted to detect movement of each of the strings in the plurality of strings.
6. The game controller of claim 1, wherein the magnetic return is made of magnetizable material including any one of iron, steel, other ferrous material, or any combination thereof.
7. The game controller of claim 6, wherein each of the coils includes a corresponding neodymium magnet and magnetic core.
8. The game controller of claim 1, wherein the game controller is a dual mode device that is capable of operating in a first mode as the game controller and in a second mode as a stringed musical instrument, and wherein the game controller is tunable to enable the plurality of strings to play the full range of notes available on a guitar.
9. The game controller of claim 8, further comprising at least one user control that is capable of operating volume and tone when the game controller is in the second mode, and capable of operating menu-navigation and other game features when the game controller is in the first mode.
10. The game controller of claim 1, further comprising a string dampener having a plurality of separate engagement surfaces adapted to dampen vibration of at least one of the plurality of strings after it is struck by the user to facilitate detection of distinct string strikes.

11. The game controller of claim 10, wherein each separate engagement surface corresponds to a particular string or subset of strings in the plurality of strings.

12. The game controller of claim 10, wherein the dampener comprises any one of a mechanical dampener or an electromechanical dampener.

13. The game controller of claim 1, wherein the at least one electrical signal provides control information for interacting with a video game.

14. A method comprising:

generating control signals for a computer game based on user interactions with a game controller that comprises a musical instrument having a fingerboard, a plurality of strings extending along the fingerboard, a plurality of frets disposed on the fingerboard and underlying the plurality of strings wherein at least one of the frets having a plurality of electrically conductive zones that are electrically insulated from each other and each zone corresponds to a different string in the plurality of strings, at least one first sensor adapted to detect fingering of the fingerboard by a user of the game controller, and at least one second sensor comprising a polyphonic pickup having a plurality of wire-wound coils coupled to corresponding magnetic returns wherein each coil and corresponding magnetic return is associated with a particular string in the plurality of strings and adapted to detect striking of at least one of the plurality of strings by the user of the game controller; and

evaluating at least first and second distinct pieces of information relating to the user interactions, the first piece of information being indicative of fingering of the fingerboard by the user, and the second piece of information being indicative of the striking of at least one of the plurality of strings by the user.

15. The method of claim 14, further comprising dampening vibration of at least one of the plurality of strings after it is struck by the user to facilitate detection of distinct string strikes.

16. The method of claim 15, wherein dampening vibration includes dampening an amplitude of the vibration of the at least one of the plurality of strings by at least 70% within 0.025 seconds of the at least one of the plurality of strings being struck.

17. A method of adapting a musical instrument to enable the musical instrument to be used as a game controller, the musical instrument having a fingerboard and a plurality of strings extending along the fingerboard, the method comprising:

affixing a plurality of frets on the fingerboard and underlying the plurality of strings, wherein at least one of the frets has a plurality of electrically conductive zones that are electrically insulated from each other and each zone corresponds to a different string in the plurality of strings;

positioning at least one first sensor on the fingerboard to detect fingering of the fingerboard by a user of the game controller;

providing at least one second sensor comprising a polyphonic pickup having a plurality of wire-wound coils coupled to corresponding magnetic returns to detect striking of at least one of the plurality of strings by the user of the game controller; and

providing at least one control module to generate at least one electrical signal to a game, the at least one electrical signal indicating the fingering of the fingerboard by the user and indicating the striking of at least one of the plurality of strings by the user.

18. The method of claim 17, further comprising providing a string dampener having a plurality of separate engagement surfaces, each engagement surface corresponding to a particular string or subset of strings in the plurality of strings, wherein the string dampener is adapted to dampen vibration of at least one of the plurality of strings after it is struck by the user to facilitate detection of distinct string strikes.

19. The method of claim 18, wherein providing at least one string dampener includes providing a mechanical dampener.

20. The method of claim 18, wherein providing at least one string dampener includes providing an electromechanical dampener.

21. A fret comprising:

a body portion made of a non-conductive material and having a first end, a second end, and a length defined therebetween; and

a plurality of electrically conductive elements disposed along at least part of the body portion, each element being electrically insulated from the other conductive elements by the body portion.

22. The fret of claim 21, wherein the body portion includes a radial curvature along the length of the body portion that corresponds to a curvature of a fret board on a game controller or stringed musical instrument.

23. The fret of claim 21, wherein the body portion is configured to be substantially horizontal along the length to correspond to a flat fret board on a game controller or stringed musical instrument.

24. The fret of claim 21, wherein each of the conductive elements is exposed on the top surface of the body portion so as to correspond to a different string in a plurality of strings of a game controller or stringed musical instrument.

25. The fret of claim 24, wherein the exposed elements on the top surface of the body portion are geometrically shaped and disposed adjacent to each other to permit at least one the strings to slide smoothly from one exposed element to the next while maintaining constant contact with one or more of the exposed elements.

26. The fret of claim 21, wherein each of the conductive elements extends below the

body portion and is adapted to electrically connect the fret to an underlying game controller or stringed musical instrument.

27. The fret of claim 21, wherein each conductive element includes at least one aperture through which the element is affixed to the body portion.

28. The fret of claim 21, wherein the conductive elements are made of metal including any one of nickel, silver, steel, titanium, metal alloy, or any combination thereof.

29. The fret of claim 21, wherein the fret is configured for use with a stringed game controller.

30. The fret of claim 21, wherein the fret is configured for use with a stringed musical instrument.

31. The fret of claim 21, wherein the non-conductive material is a synthetic or natural material including any one of plastic, glass, wood, or combination thereof.

32. A method of making a fret, the method comprising:

- providing a blank formed of electrically conductive material;
- processing the blank to provide a plurality of electrically conductive elements;
- affixing a body portion made of a non-conductive material to the plurality of electrically conductive elements, the body portion electrically insulating each element from the other conductive elements; and
- removing material from the processed blank and affixed body portion to form a perimeter of the fret in a desired shape.

33. The method of claim 32, wherein processing includes stamping the blank to

provide the plurality of electrically conductive elements.

34. The method of claim 32, wherein processing includes heating and casting the blank to provide the plurality of electrically conductive elements.

35. The method of claim 32, wherein processing includes machining the blank to provide the plurality of electrically conductive elements.

36. The method of claim 32, wherein processing includes cutting at least one portion of the blank to electrically separate each electrically conductive element from the plurality of electrically conductive elements.

37. The method of claim 32, wherein processing includes providing at least one aperture in each electrically conductive element through which the element is affixed to the body portion.

38. The method of claim 32, wherein processing includes providing a radial curvature along the length of the body portion that corresponds to a curvature of a fret board.

39. The method of claim 32, wherein affixing includes over-molding the non-conductive material onto at least a portion of the plurality of electrically conductive elements.

40. The method of claim 32, wherein affixing includes disposing the plurality of electrically conductive elements along at least part of the body portion so that each of the conductive elements is exposed on the top surface of the body portion so as to correspond to a different string in a plurality of strings of a game controller or stringed musical instrument.

41. The method of claim 32, wherein affixing includes disposing the plurality of electrically conductive elements along at least part of the body portion so that the conductive elements extend below the bottom surface of the body portion to provide electrical connection points for the fret.

42. The method of claim 32, wherein removing includes abrasively surfacing the fret to smooth out and remove rough edges.

43. The method of claim 32, further comprising determining length of the fret based on a taper of a corresponding fret board.

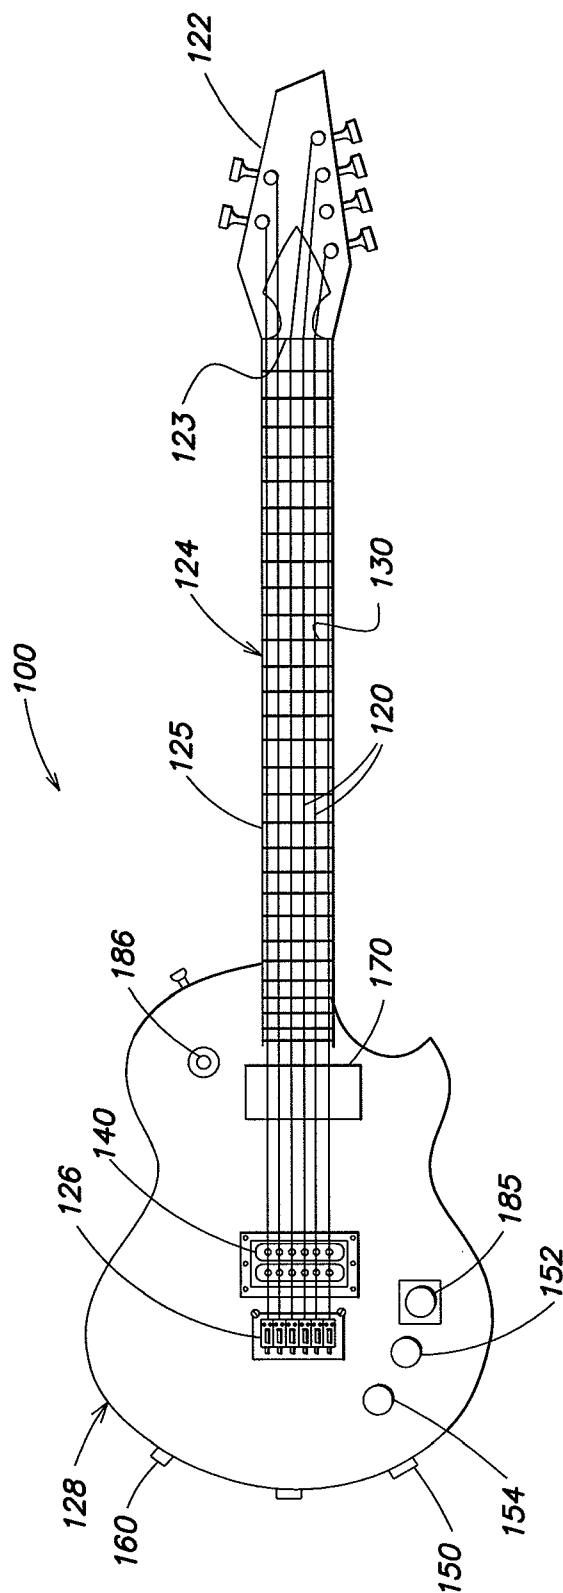
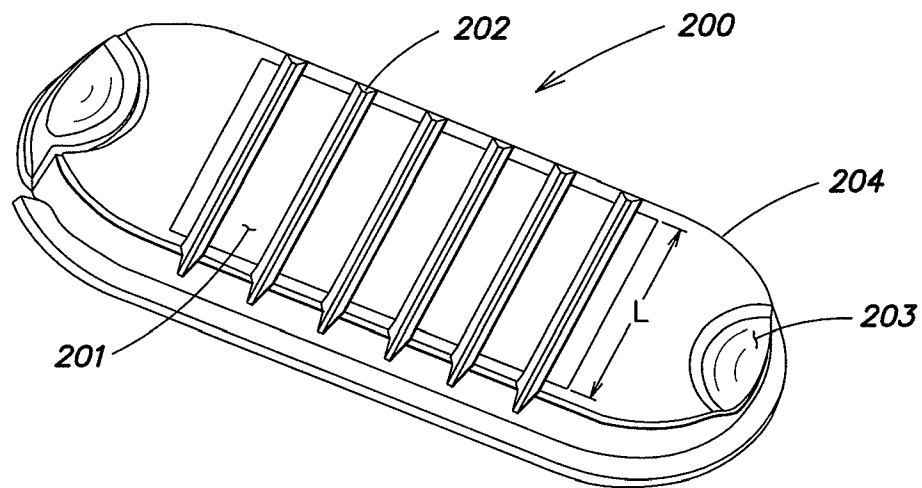
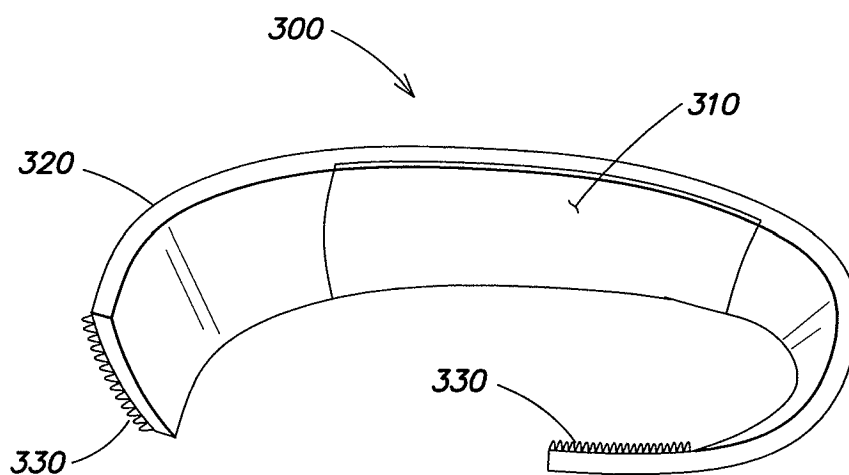


FIG. 1

**FIG. 2****FIG. 3**

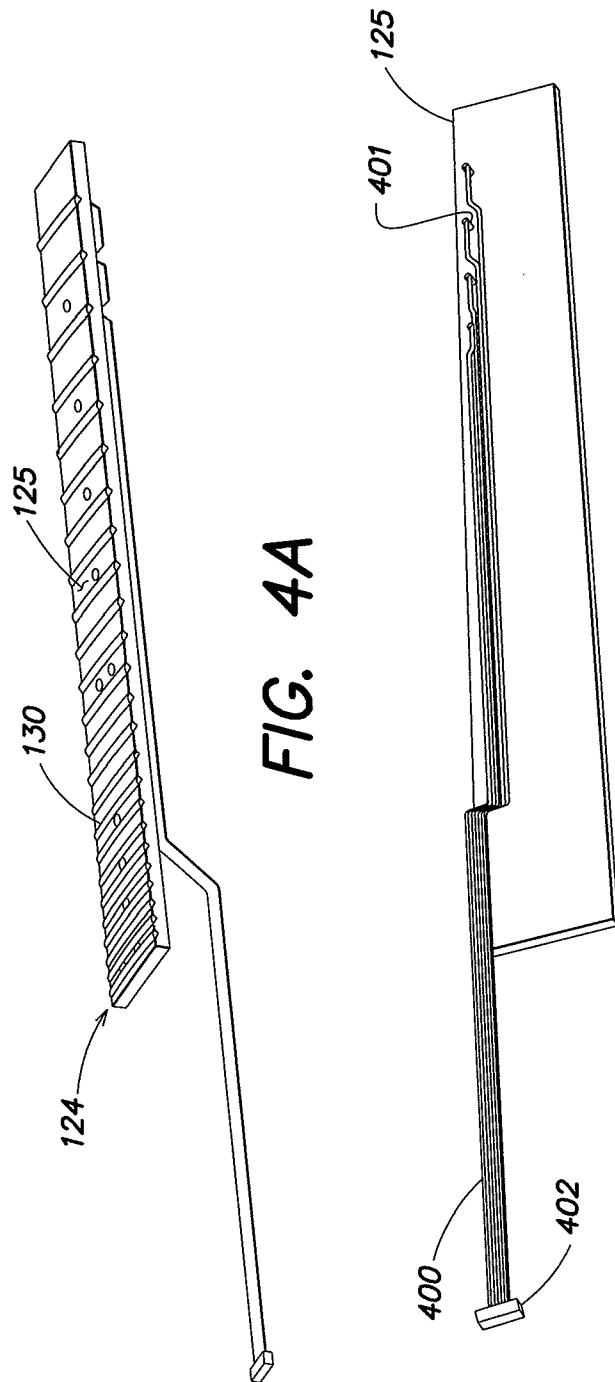


FIG. 4A

FIG. 4B

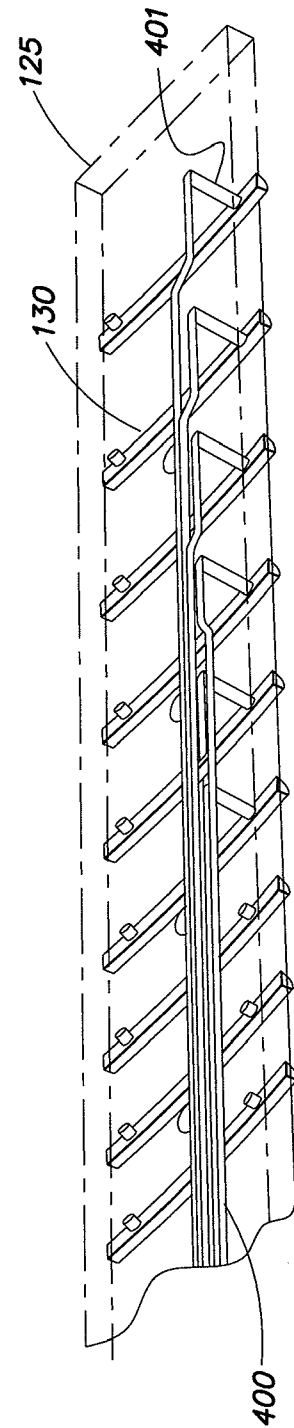
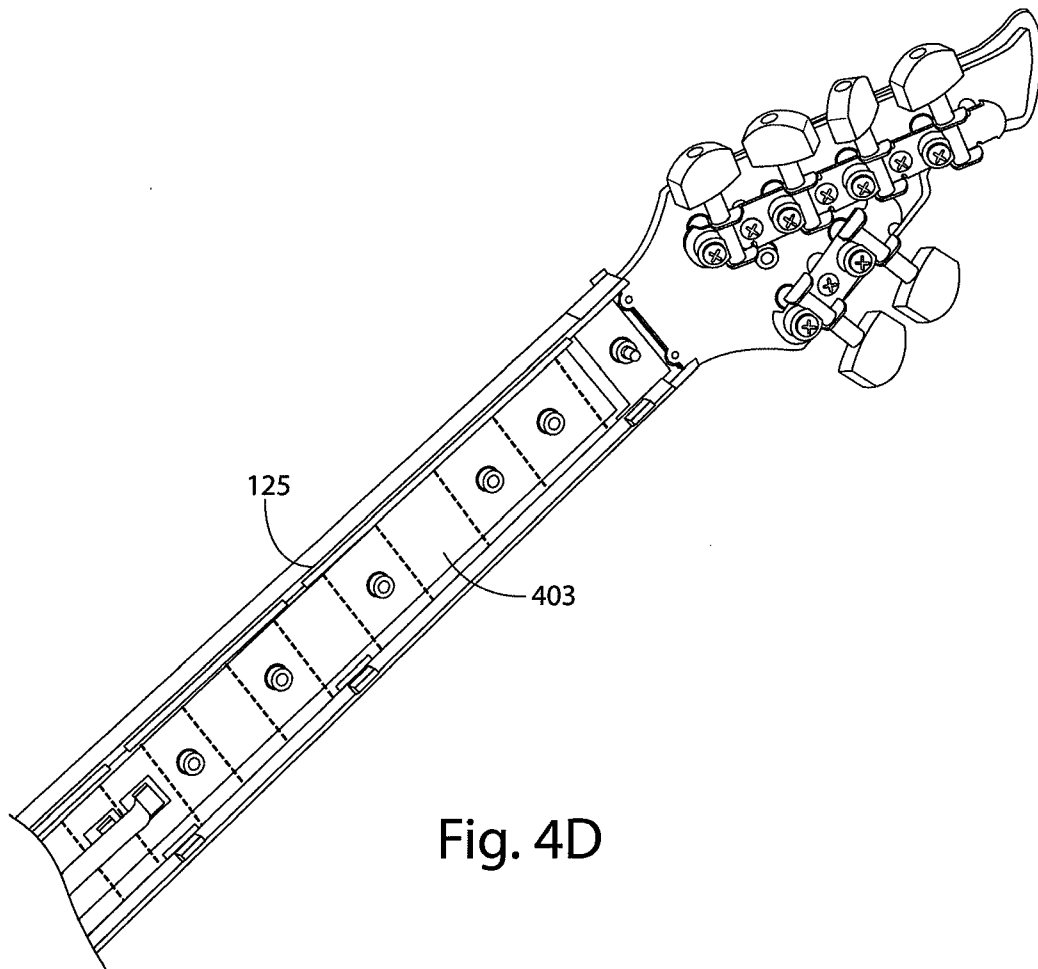


FIG. 4C



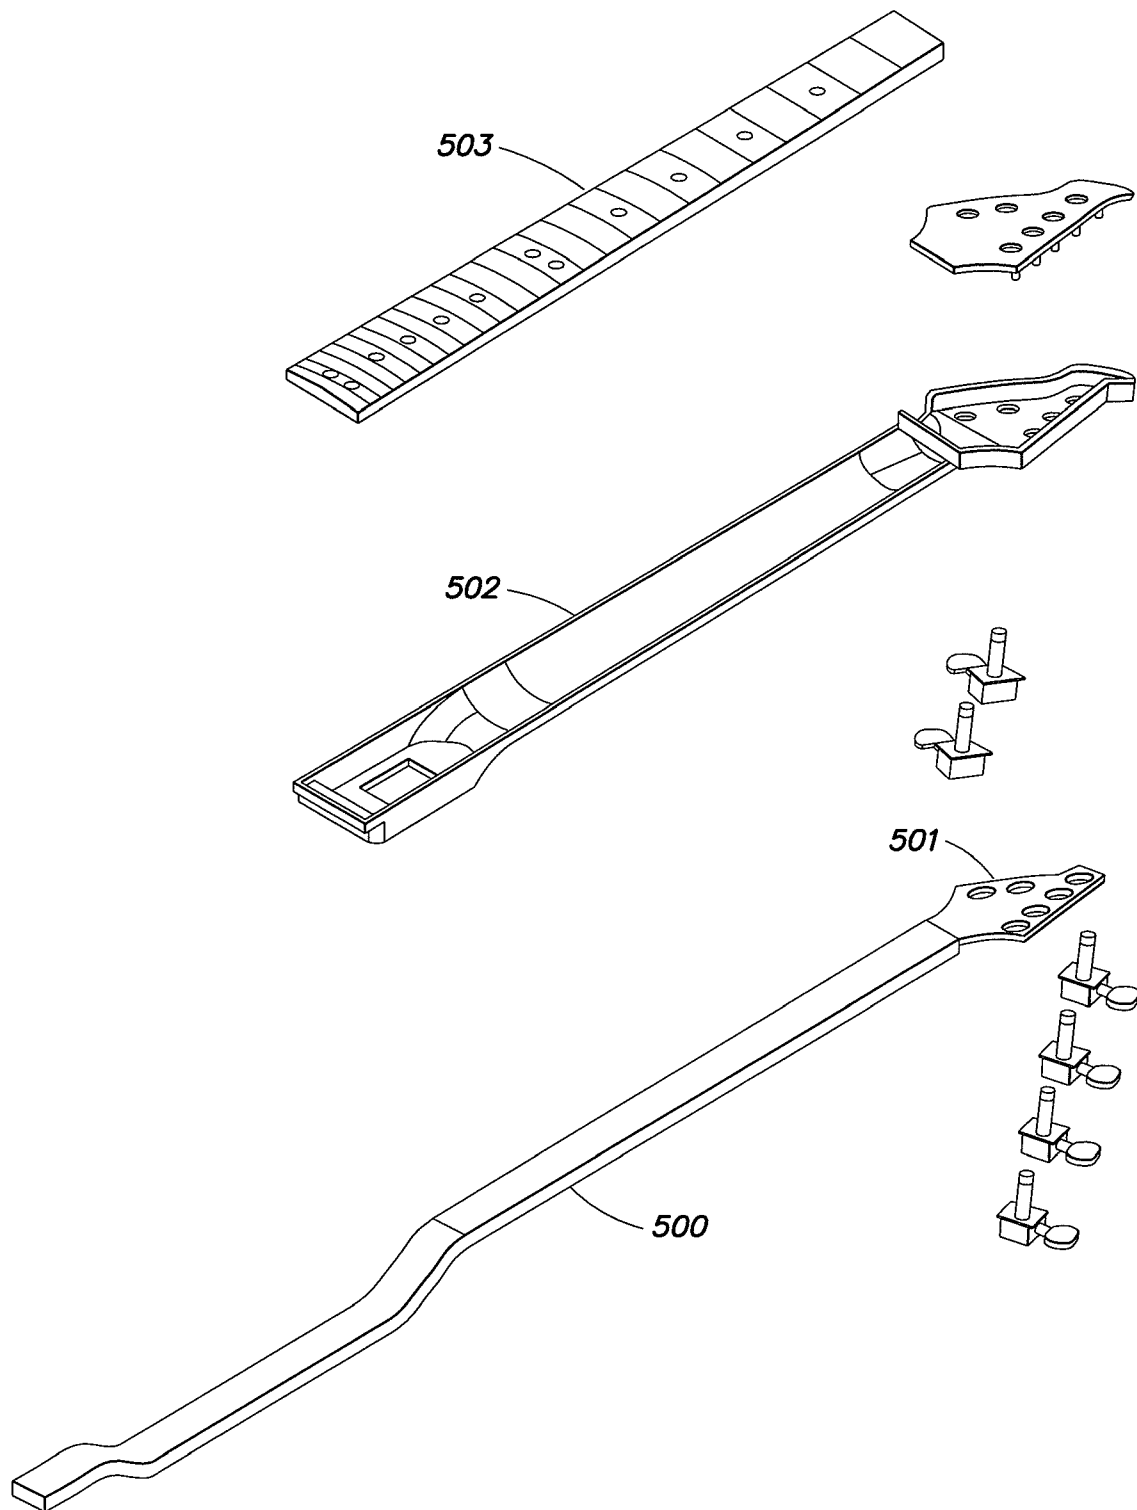
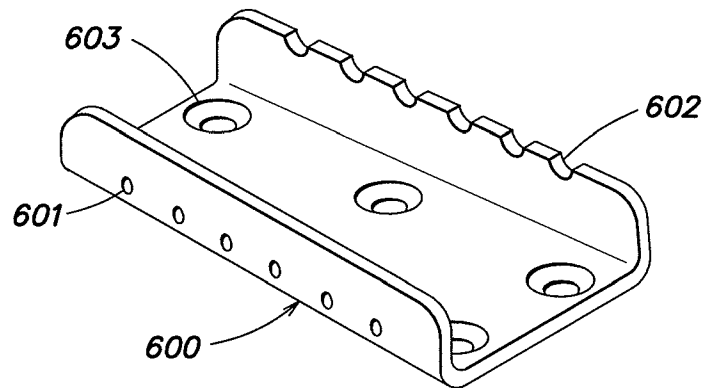
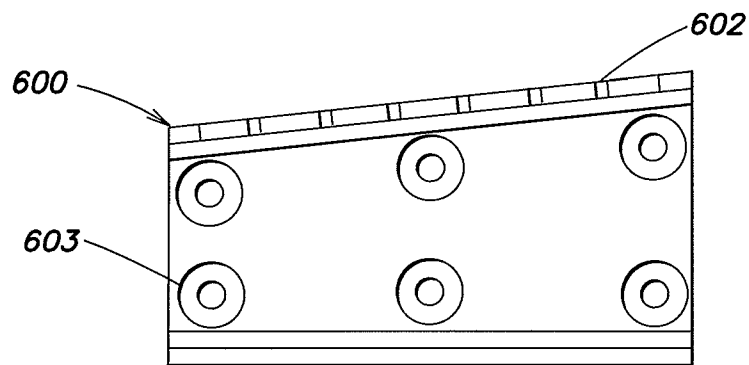
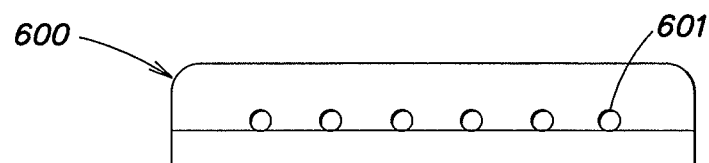


FIG. 5

**FIG. 6A****FIG. 6B****FIG. 6C**

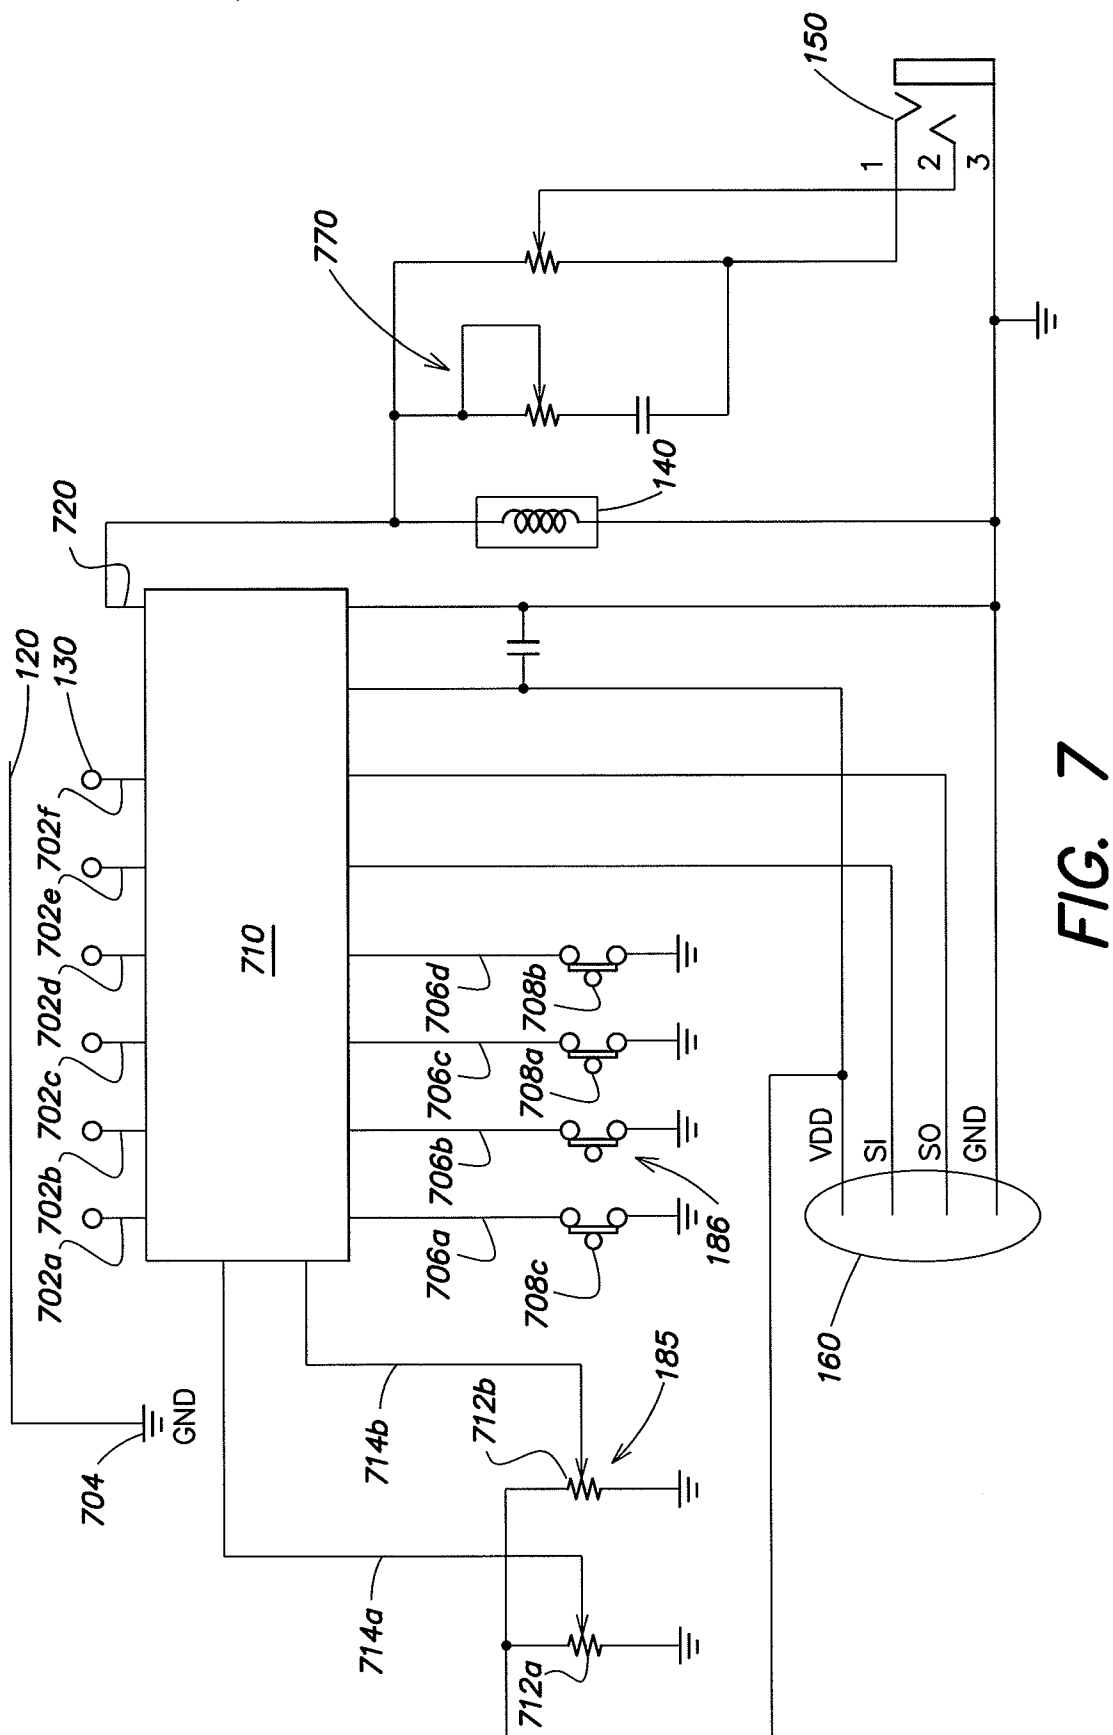


FIG. 7

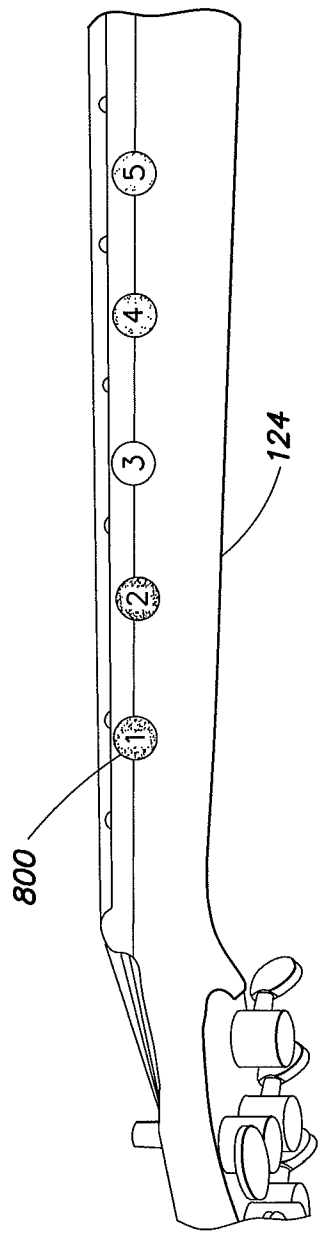


FIG. 8A

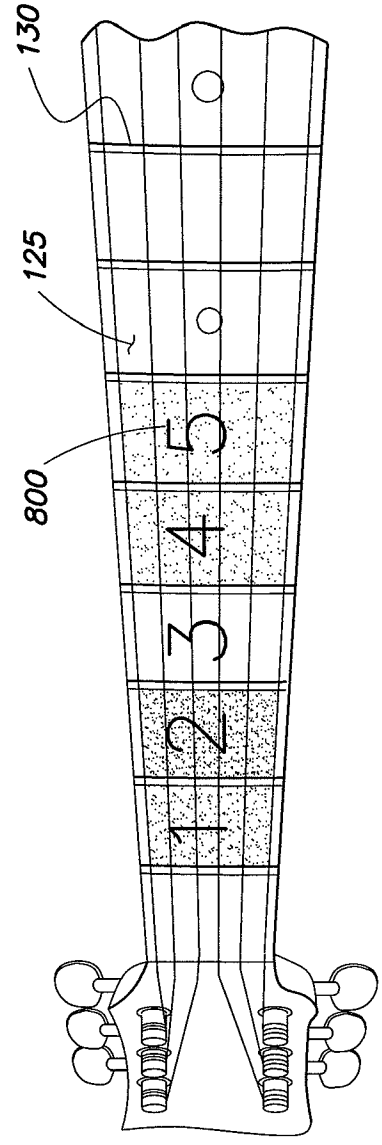
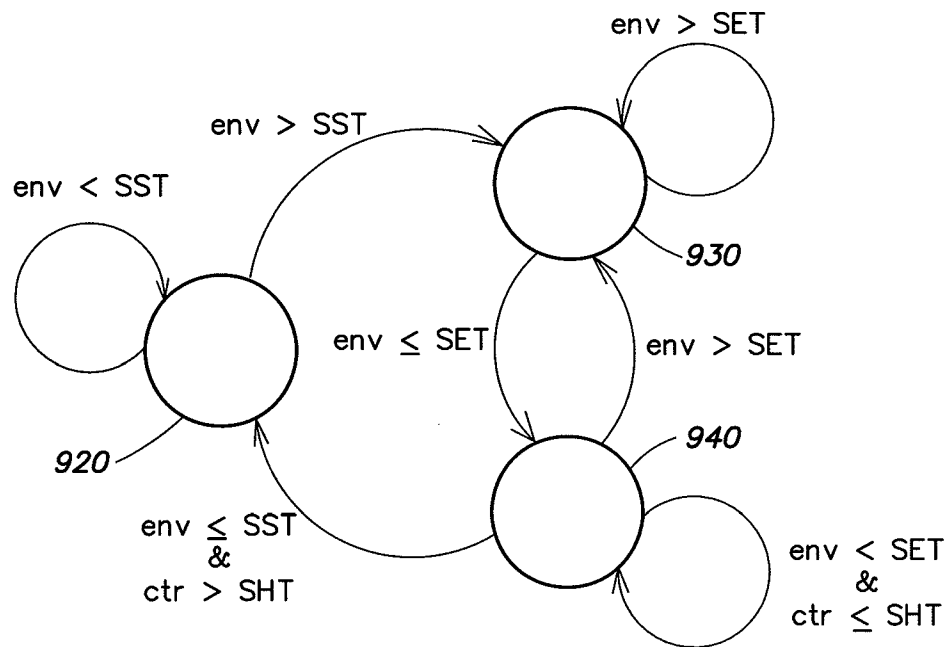


FIG. 8B

**FIG. 9**

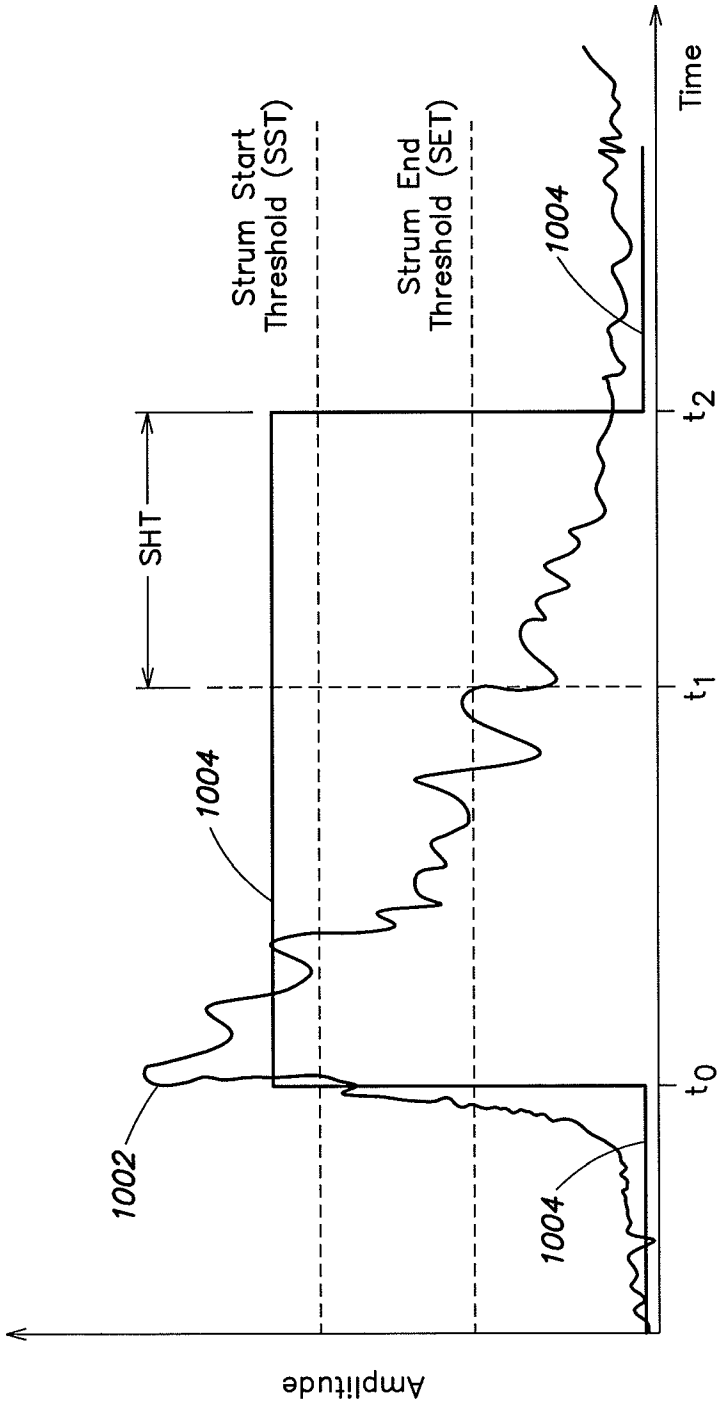


FIG. 10

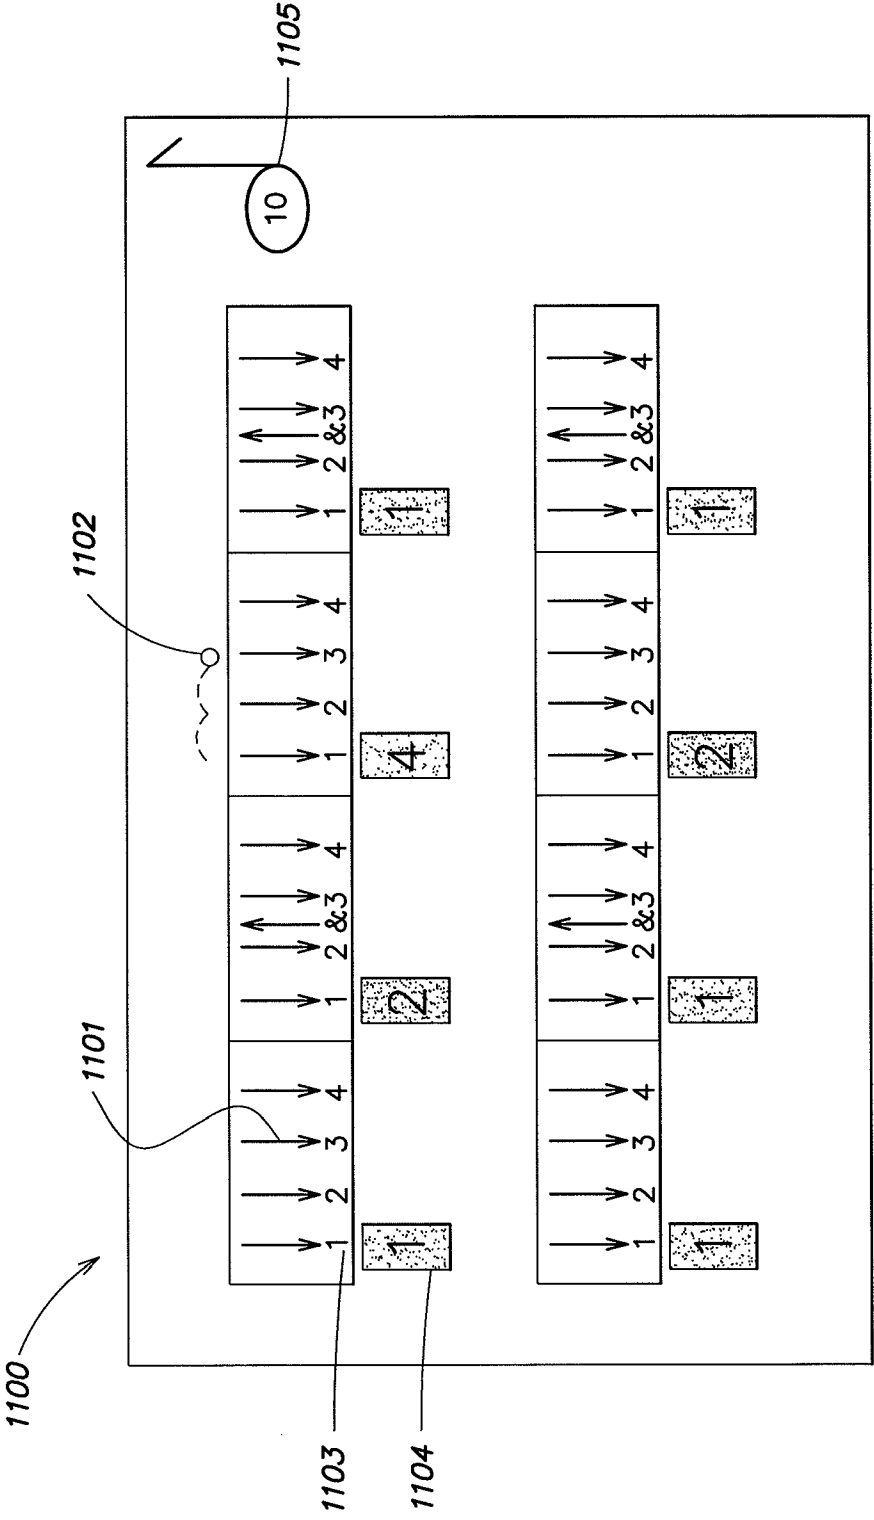


FIG. 11

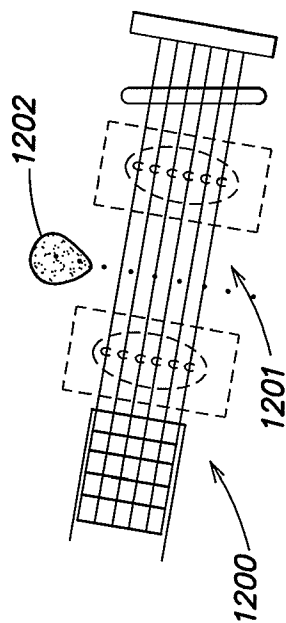


FIG. 12A

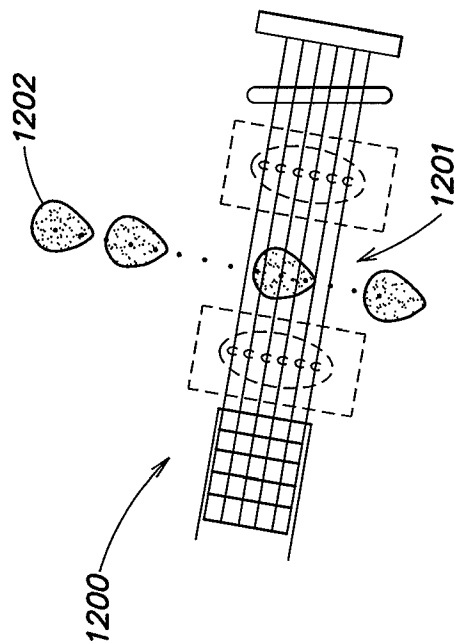


FIG. 12B

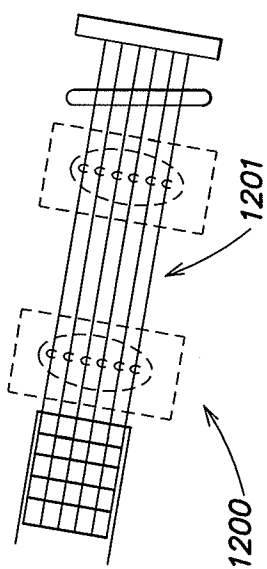


FIG. 12C

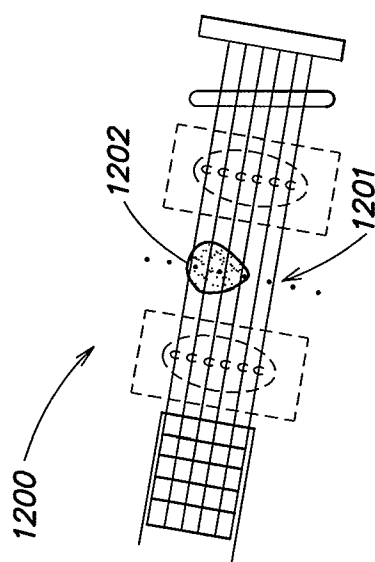
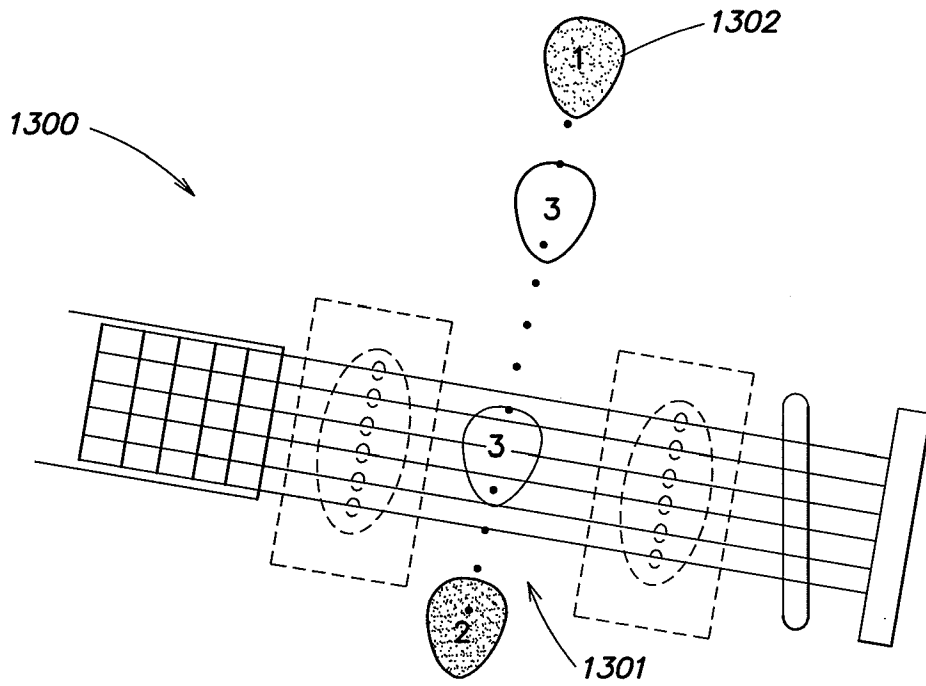


FIG. 12D

**FIG. 13**

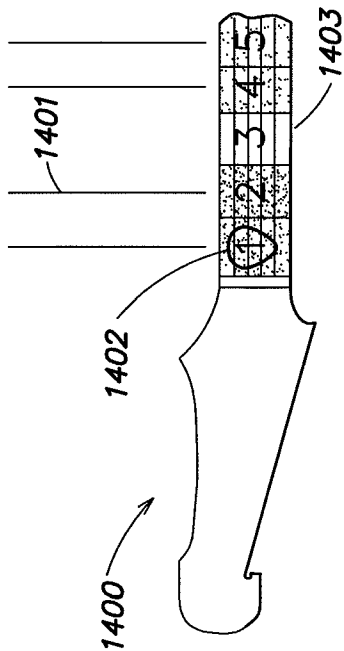


FIG. 14B

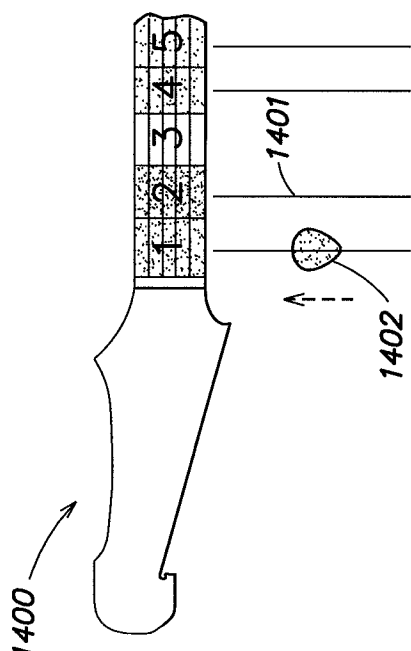


FIG. 14D

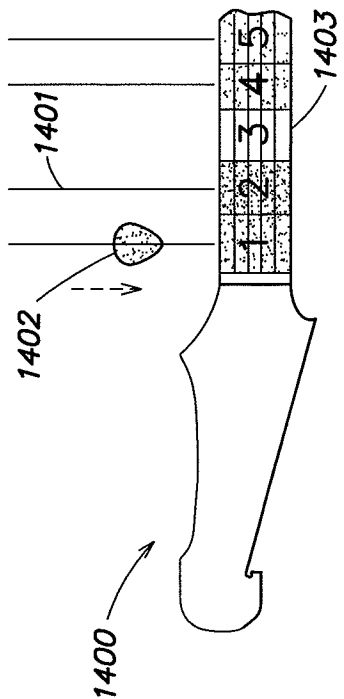


FIG. 14A

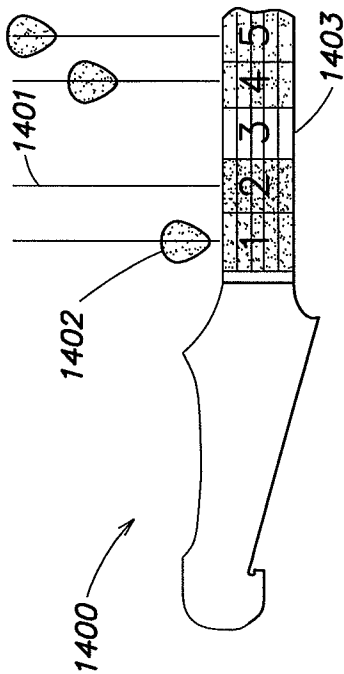


FIG. 14C

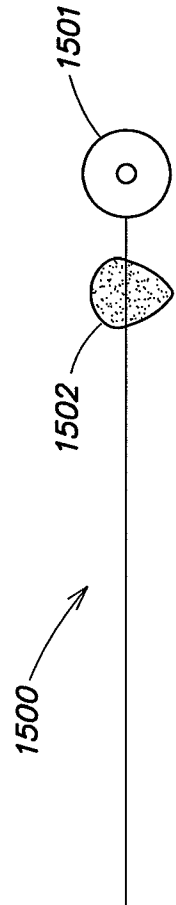


FIG. 15A

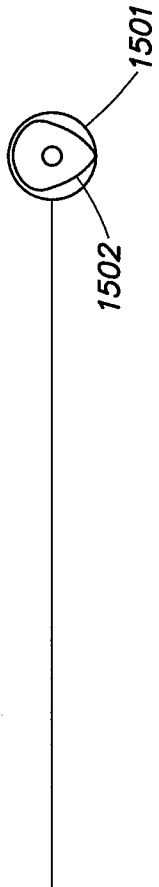


FIG. 15B

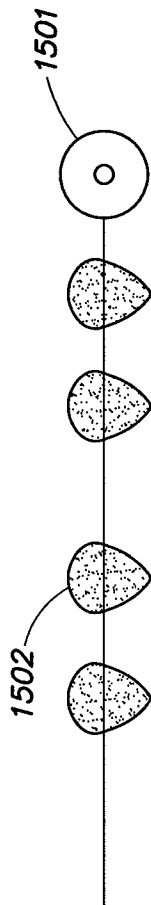


FIG. 15C

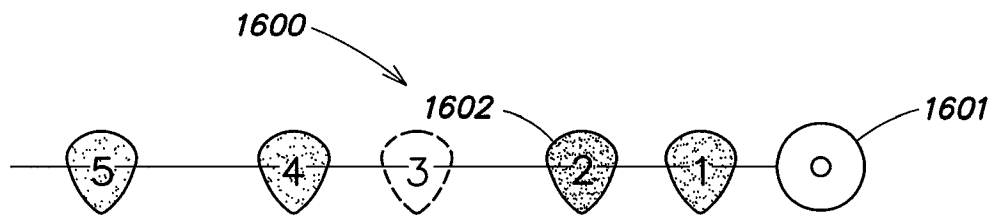


FIG. 16A

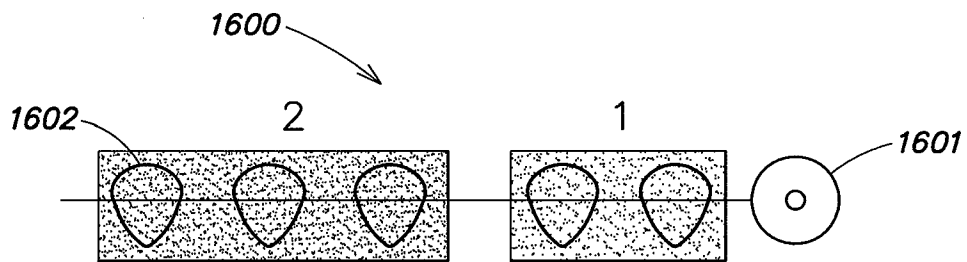
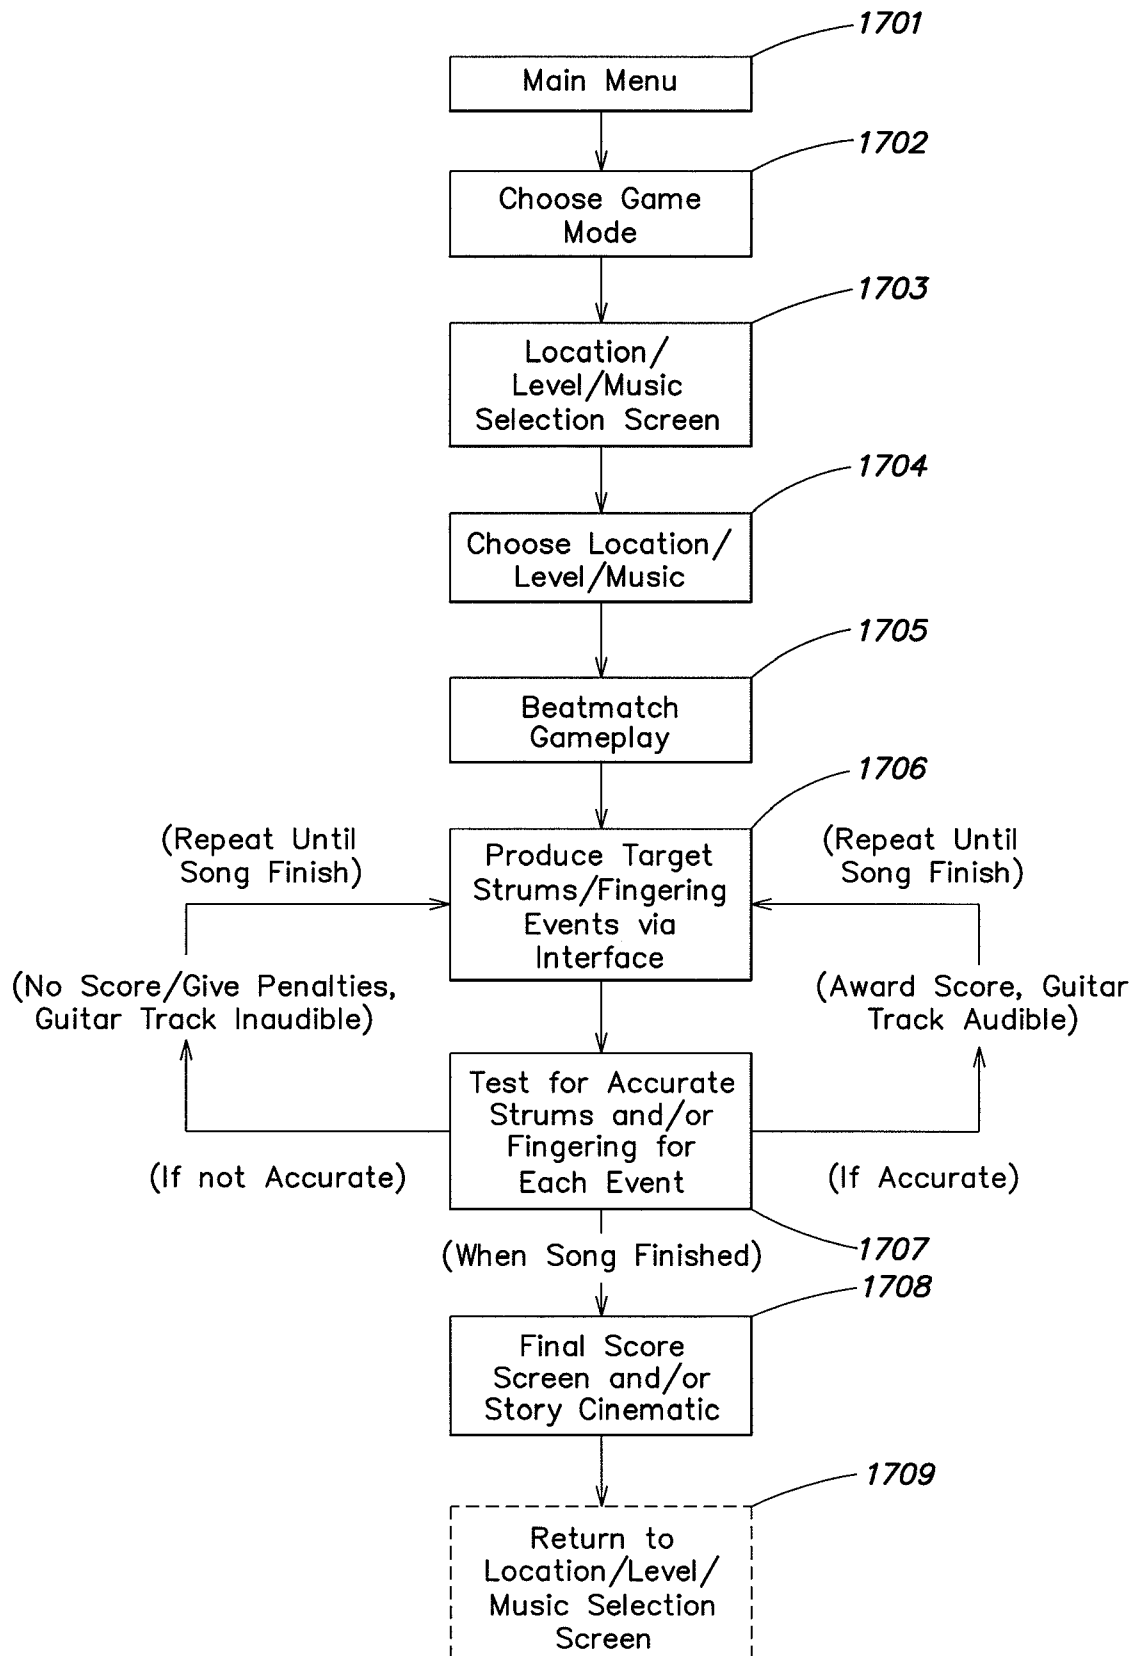


FIG. 16B

**FIG. 17**

Finger a D Major Chord

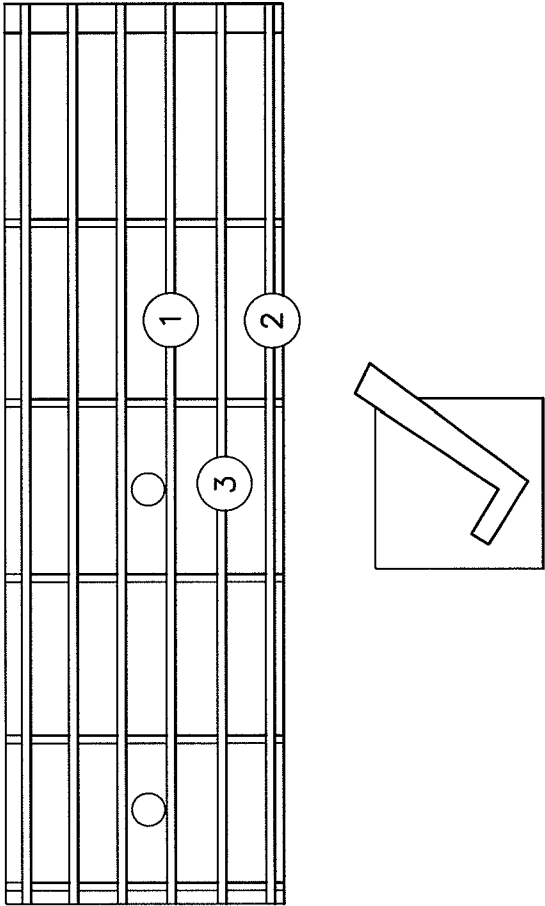
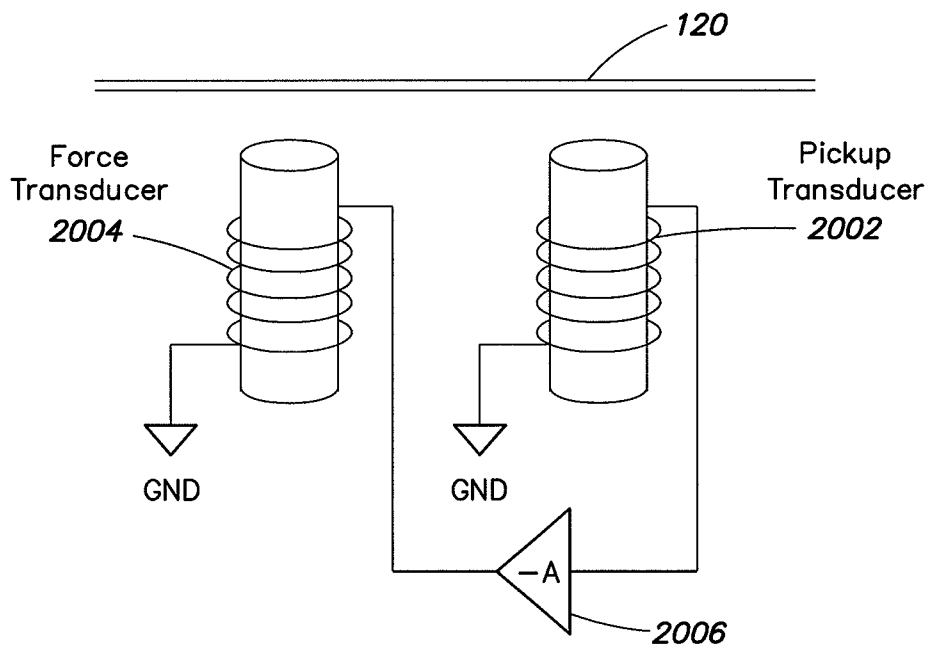
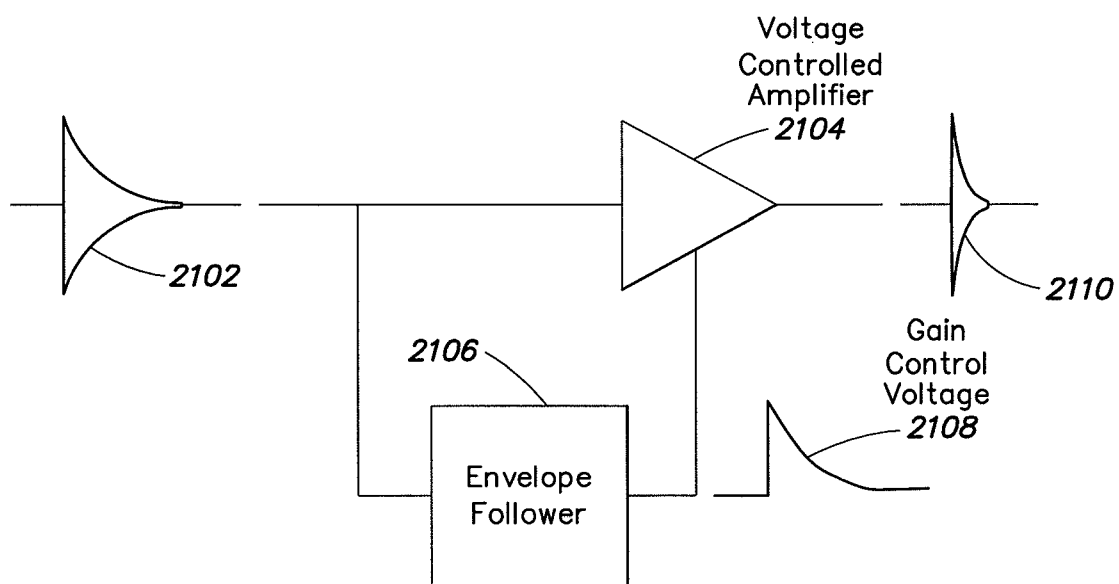


FIG. 19

**FIG. 20****FIG. 21**

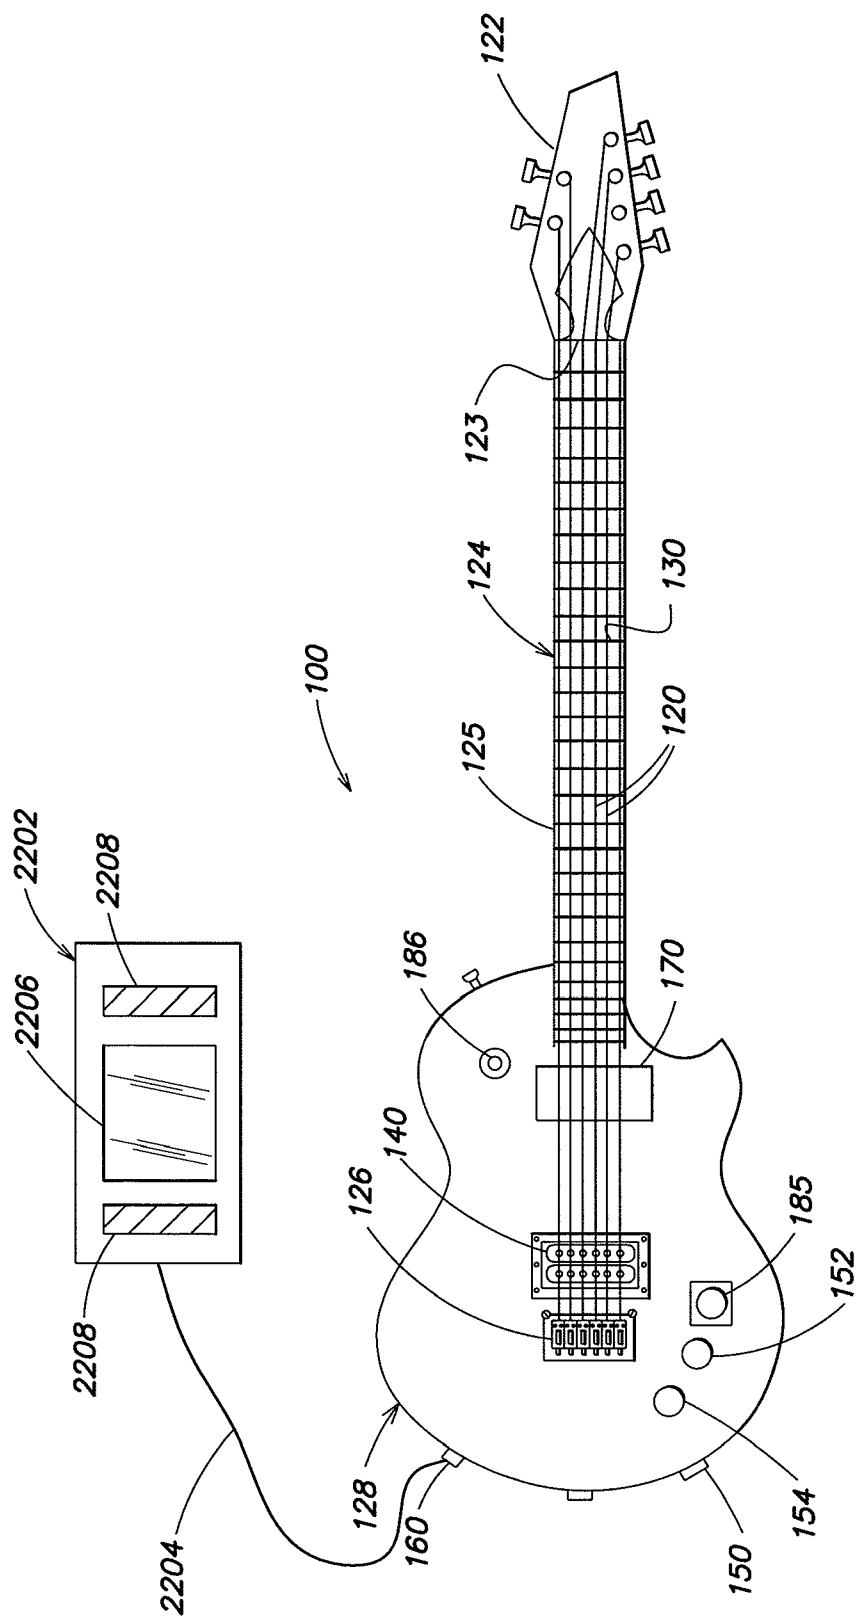


FIG. 22

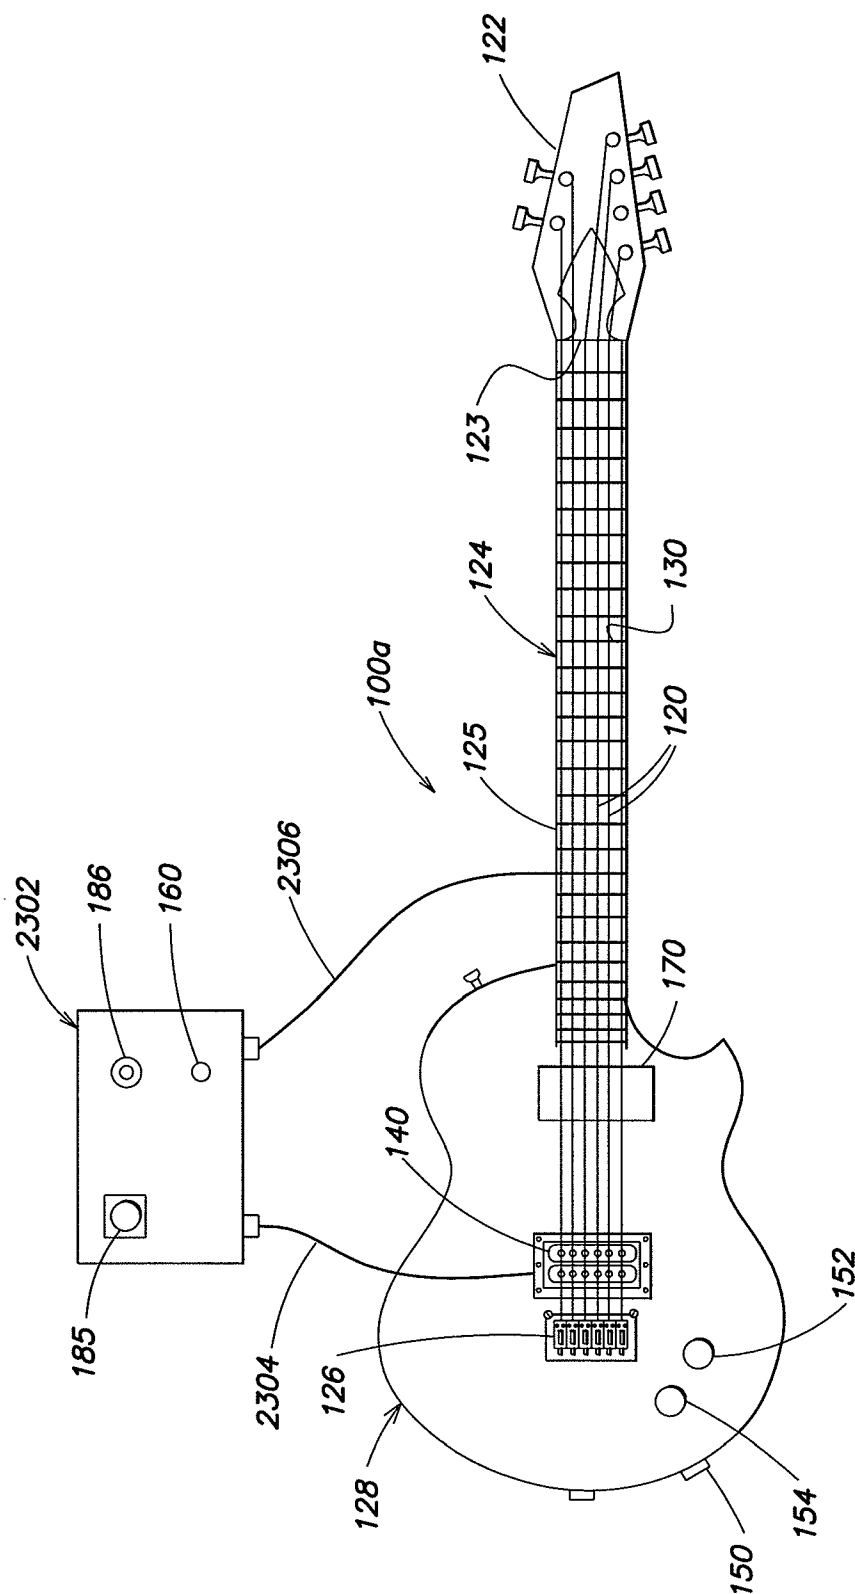


FIG. 23

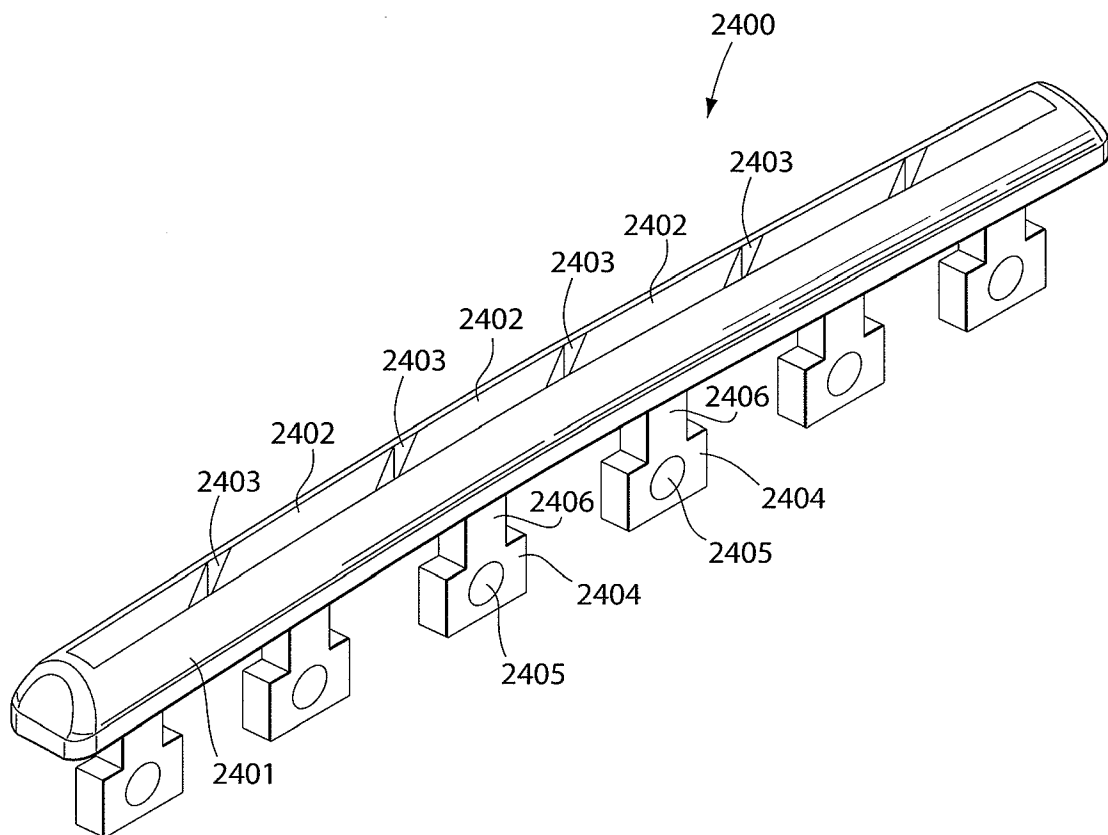


Fig. 24A

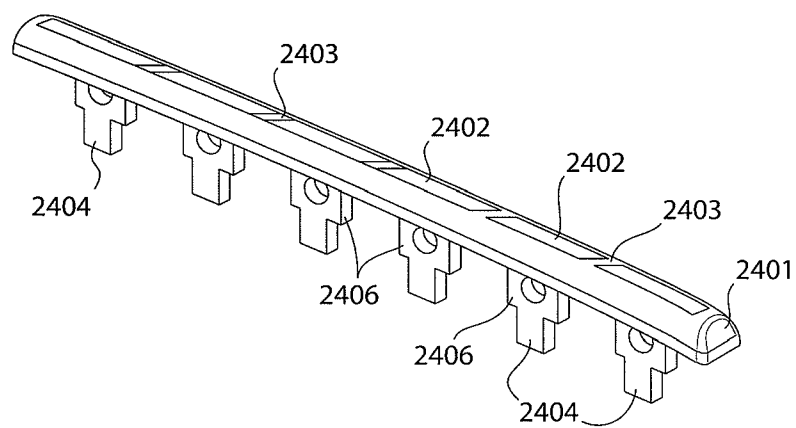


Fig. 24B

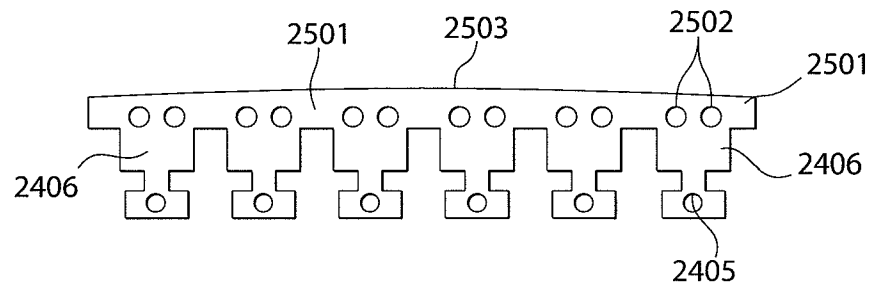


Fig. 25A

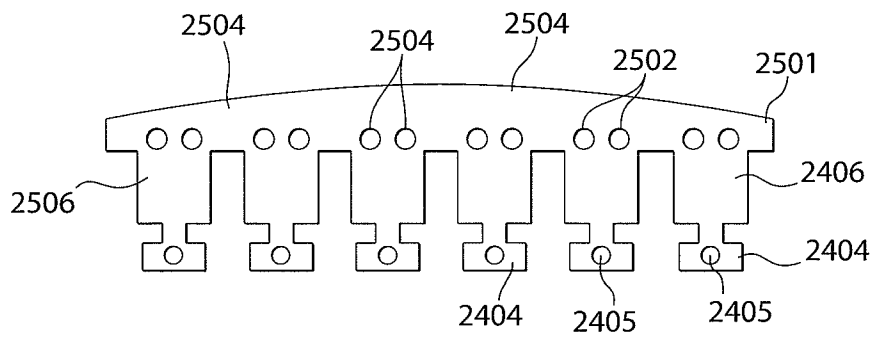


Fig. 25B

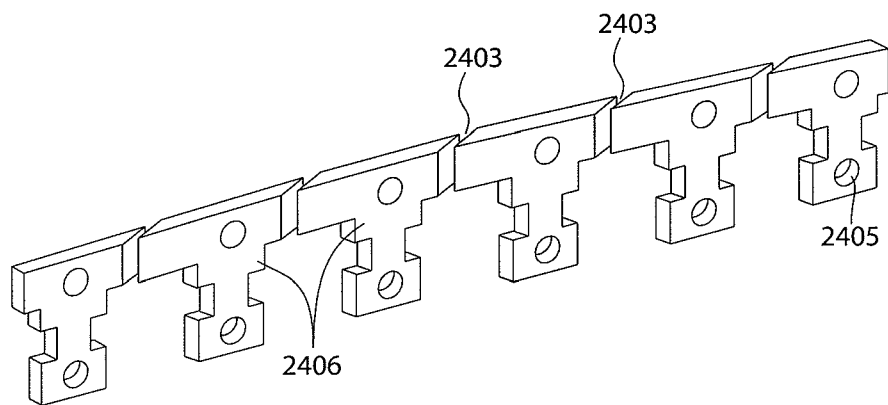


Fig. 26

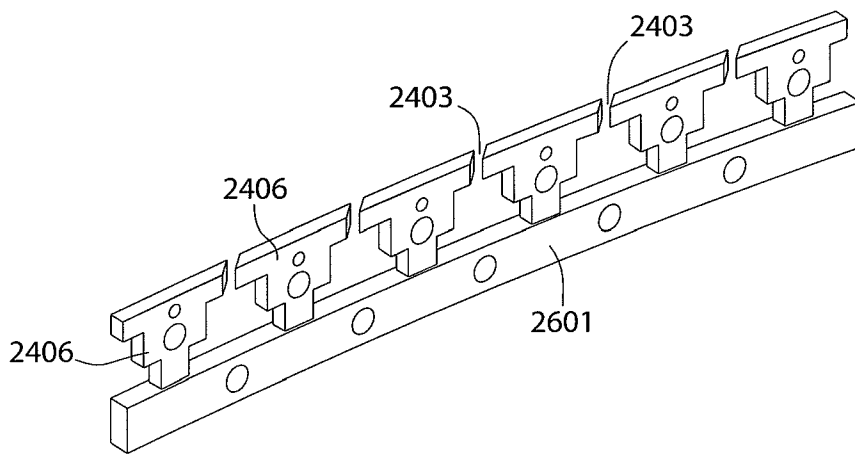


Fig. 27

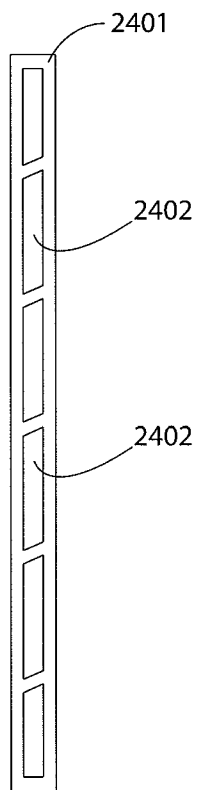


Fig. 28

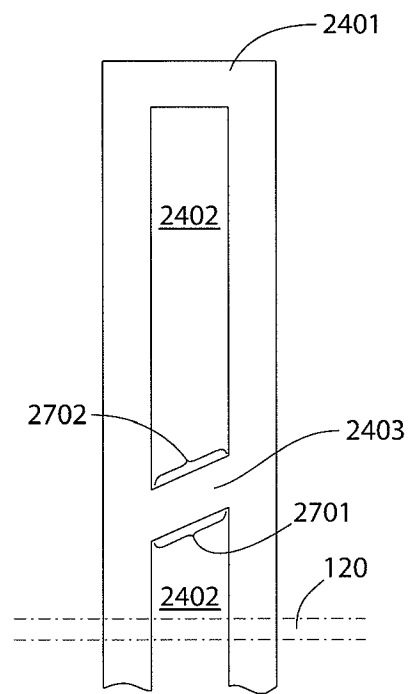


Fig. 29

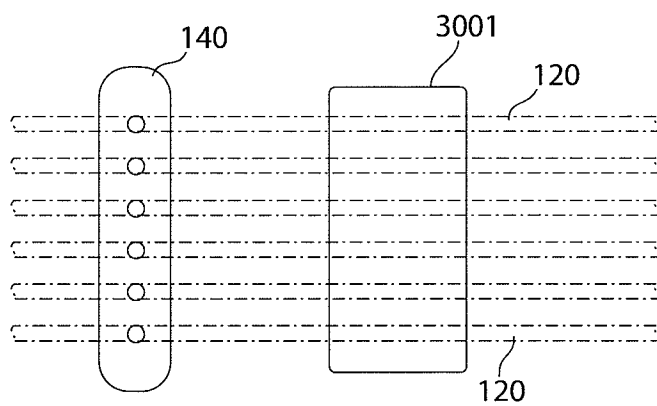


Fig. 30A

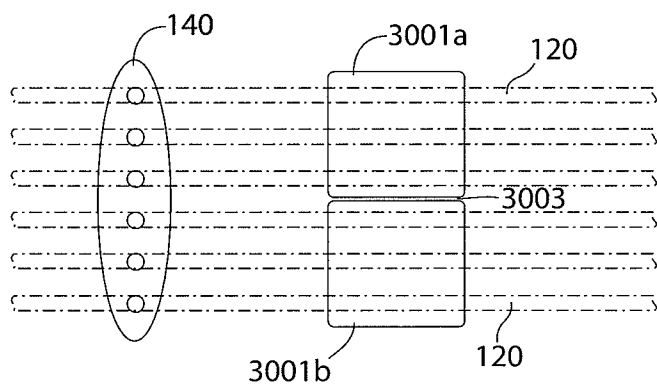


Fig. 30B

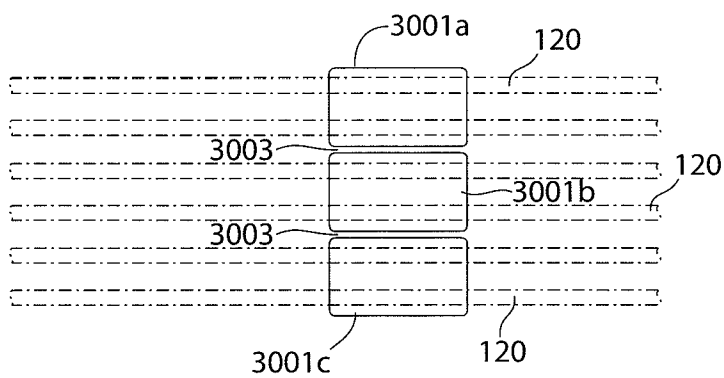


Fig. 30C

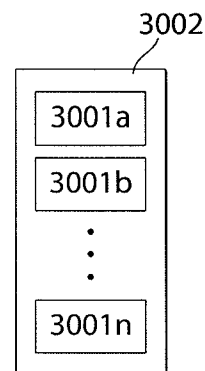


Fig. 30E




Fig. 30D

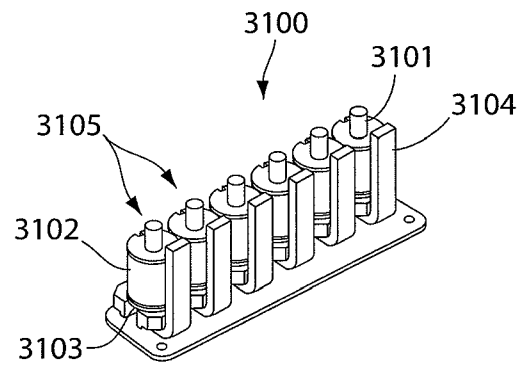


Fig. 31a




Fig. 31b




Fig. 31c

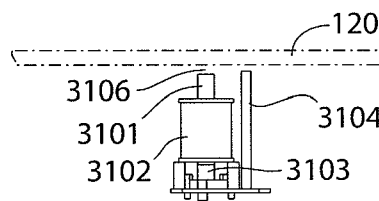


Fig. 31d

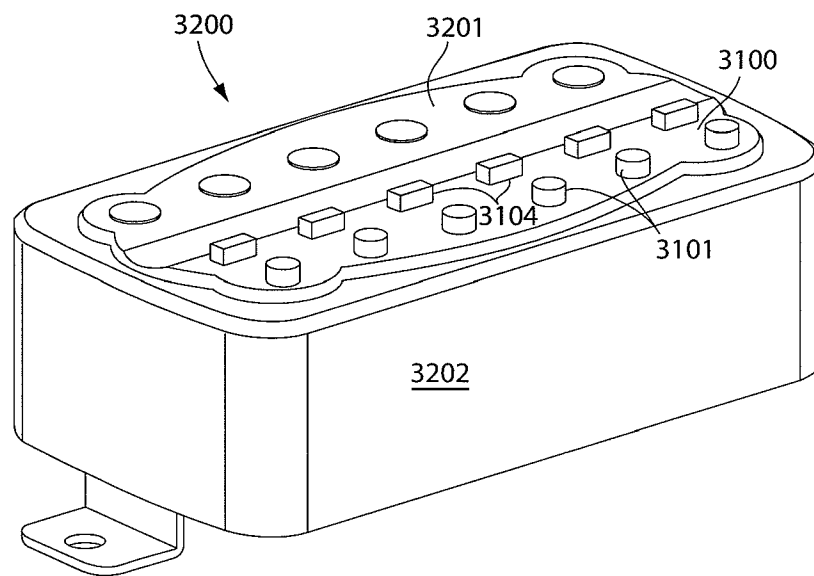


Fig. 32

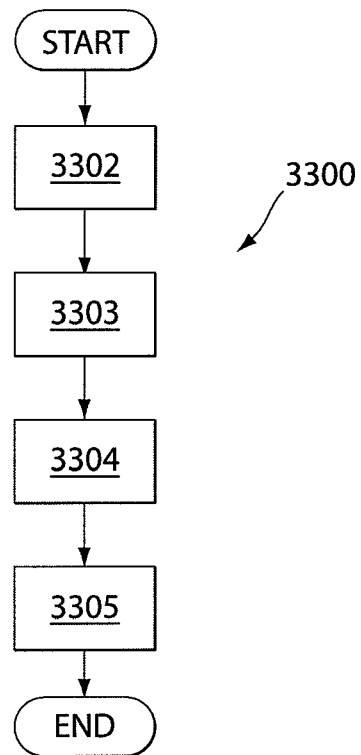


Fig. 33

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2010/027493

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A63F 9/24 (2010.01)

USPC - 463/37

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - A63F 9/24;13/00 (2010.01)

USPC - 463/7,37

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

MicroPatent

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2009/0191932 A1 (CHIU et al) 30 July 2009 (30.07.2009) entire document	1-6,8-43 --- 7
Y	US 2008/0297328 A1 (CRAWFORD et al) 04 December 2008 (04.12.2008) entire document	7
A	US 6,353,165 B1 (CHIU et al) 05 March 2002 (05.03.2002) entire document	1-43
A	US 5,627,331 A (DEVITRYSMITH) 06 May 1997 (16.05.1997) entire document	1-43

☐ Further documents are listed in the continuation of Box C.


* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

03 May 2010

Date of mailing of the international search report

12 MAY 2010

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774