

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 March 2011 (03.03.2011)

(10) International Publication Number
WO 2011/025834 A1

(51) International Patent Classification:

A61L 15/00 (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/US2010/046677

(22) International Filing Date:

25 August 2010 (25.08.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/546,912 25 August 2009 (25.08.2009) US

(71) Applicants: HIGHLAND INDUSTRIES, INC. [US/US]; 215 Drummond Street, Kernersville, NC 27284 (US). BERKSHIRE CORPORATION [US/US]; 6509 Franz Warner Parkway, Whitsett, NC 27377 (US).

(72) Inventors: DAVIDSON, Adam, S.; 638 S. Poplar Street, Winston-Salem, NC 27101 (US). FAILE, Susan, E.; 2004 Berkley Lane, Asheboro, NC 27205 (US).

(74) Agent: RILEE, Edward, W.; MacCord Mason PLLC, P.O. Box 2974, Greensboro, NC 27402 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IMPROVED CLEAN ROOM WIPES

(57) Abstract: A supply of clean room wipes. The supply of clean room wipes includes a sealed package and a plurality of wipes within the sealed package. The wipes in the package include a substrate and an anhydride finish applied to the substrate. The treated wipes have a Strength Contribution from Treatment (lbs) when tested using a standard trap tear method ASTM D 5587:1996 of greater than about 10% and an average improvement in Percent Carbon Black Pick-Up greater than about 10% compared to an untreated wipe. In addition, a sealed edge may be applied along the perimeter of each wipe to prevent loss of material from the wipe during use.

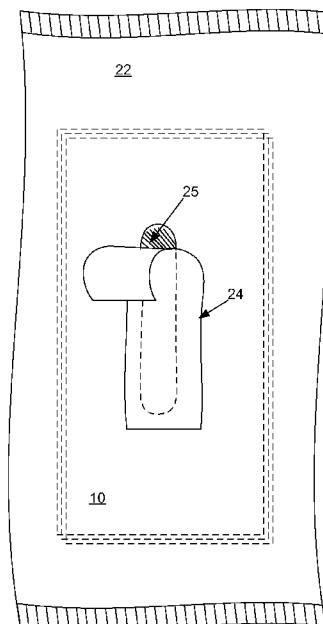


FIG. 2

IMPROVED CLEAN ROOM WIPES

Background of the Inventions

(1) Field

5 The present inventions relate generally to a supply of clean room wipes and, more particularly, to a clean room wipes treated to provide improved strength and particulate capture over an untreated wipe.

(2) Related Art

10 Wipes find utility in cleaning surfaces, whenever it is desirable to minimize particulate contamination. Wipes are utilized for a number of different cleaning applications, such as in clean rooms, automotive painting rooms and other controlled environments.

15 Different applications require different standards that these types of wipes should attain. For example, wipes utilized in clean rooms must meet stringent performance standards. These standards are related to fluid sorbency and contamination, including maximum allowable particulate, unspecified extractable matter and individual ionic contaminants. The standards for particulate contaminant release are especially rigorous and various methods have been devised to meet them.

20 Wipes may be made from knitted, woven or non-woven textile fabrics. The fabric is cut into wipes, typically 9-inch-by-9-inch squares. The wipes may be washed in a clean room laundry, employing special surfactants and highly filtered and purified water, to reduce the contamination present on the fabric. After washing, the wipes may be packaged dry or pre-saturated with a suitable solvent.

25 The physical properties of wipes are generally dependent on the substrate the wipes are made from and the fabric are often sealed along the edges or otherwise further enhanced mechanically.

Thus, there remains a need for a new and improved clean room wipe that is suitable for such use while, at the same time, is treated to provide improved strength and particulate capture over an untreated wipe.

5

Summary of the Inventions

The present inventions are directed to a supply of clean room wipes. The supply of clean room wipes includes a sealed package and a plurality of wipes within the sealed package. The wipes in the package include a substrate and an anhydride finish applied to 10 the substrate. The treated wipes have a Strength Contribution from Treatment (lbs) when tested using a standard trap tear method ASTM D 5587:1996 of greater than about 10% and an average improvement in Percent Carbon Black Pick-Up greater than about 10% compared to an untreated wipe. In addition, a sealed edge may be applied along the perimeter of each wipe to prevent loss of material from the wipe during use.

15 Preferably, the substrate is formed of synthetic yarns. The synthetic yarns may be polyester of between about 30 denier and about 200 denier. Preferably, the synthetic yarns are about 70 denier. In addition, the synthetic yarns may be texturized such as air texturized and air texturized without entanglement. Preferably, the substrate is between about 40 gms/meter² and about 300 gms/meter². The substrate may be formed by circular 20 knitting and slit prior to packaging.

25 Preferably, the anhydride finish is topically applied and is applied by immersion and padding. Preferably, the anhydride finish is between about 0.02 wt.% and 2 wt.% solids on weight of fabric with between about 0.1 wt.% and 0.5 wt.% solids on weight of fabric being most preferred. Preferably, the anhydride finish is a co-polymer and preferably is ethylene maleic anhydride (EMA).

The wipes may further including a saturant. The saturant may be chosen from alcohols, water, ketones, hypochlorites, peroxides, biostats, biocides, lubricants, surfactants and mixtures thereof. In some cases, the wipes are clean room may be laundered prior to packaging.. The wipes may also be sterilized and may be irradiated 30 until substantially sterile after packaging.

The wipes may further including an outer bag surrounding said sealed package, which is adapted to be removed prior to use. The sealed package may be resealable. The sealed package may be solvent resistant. In addition, the sealed package may forms a sterile barrier between the environment and said plurality of wipes. The material forming 5 the sealed package may be selected from the group consisting of laminates, films, metalized films and combinations thereof.

Accordingly, one aspect of the present inventions is to provide a supply of clean room wipes, the product includes: (a) a sealed package; and (b) a plurality of wipes within the sealed package, the plurality of wipes having a Strength Contribution from 10 Treatment (lbs) when tested using a standard trap tear method ASTM D 5587:1996 of greater than about 10% and an average improvement in Percent Carbon Black Pick-Up greater than about 10% compared to an untreated wipe.

Another aspect of the present inventions is to provide a textile article having a particle capturing finish, the product including: (a) a substrate; and (b) an anhydride 15 finish applied to the substrate.

Still another aspect of the present inventions is to provide a supply of clean room wipes, the supply of clean room wipes including: (a) a sealed package; (b) a plurality of wipes within the sealed package, the wipes including (i) a substrate and (ii) an anhydride finish applied to the substrate, wherein the plurality of wipes having a Strength 20 Contribution from Treatment (lbs) when tested using a standard trap tear method ASTM D 5587:1996 of greater than about 10% and an average improvement in Percent Carbon Black Pick-Up greater than about 10% compared to an untreated wipe; and (c) a sealed edge along the perimeter of each wipe to prevent loss of material from the wipe during use.

25 These and other aspects of the present inventions will become apparent to those skilled in the art after a reading of the following description of the preferred embodiment when considered with the drawings.

Brief Description of the Drawings

Figure 1 is a top view of a wipe constructed according to the present inventions;

Figure 2 is a top view of a supply of wipes including a package;

5 Figure 3 is a top view of a supply of wipes inside an outer bag;

Figure 4 graphically compares the strength of some embodiments of the present inventions with some commercially available products, using a bar graph;

Figure 5 graphically represents the effect of EMA on the strength of fabric substrates, using an XY scatter graph;

10 Figure 6 graphically compares carbon pick-up percentages of some embodiments of the present inventions with some commercially available products, using a bar graph;

Figure 7 graphically represents the effect of EMA on carbon pick up, using an XY scatter graph;

Figure 8 graphically represents the effect of EMA on the strength of fabric substrates and carbon pick up, using an XY scatter graph with two Y-axes;

15 Figure 9 graphically compares particle capture of some embodiments of the present inventions with some commercially available products, using a bar graph;

Figure 10 graphically compares particle retention of some embodiments of the present inventions with some commercially available products, using a bar graph: and

20 Figure 11 is a compilation of experimental results.

Description of the Preferred Embodiments

In the following description, like reference characters designate like or corresponding parts throughout the several views. Also in the following description, it is to be understood that such terms as "forward," "rearward," "left," "right," "upwardly," "downwardly," and the like are words of convenience and are not to be construed as limiting terms.

Referring now to the drawings in general and Fig. 1 in particular, it will be understood that the illustrations are for the purpose of describing a preferred embodiment of the inventions and are not intended to limit the inventions thereto. As best seen in Fig. 125254.doc

1, a wipe formed from a textile article, generally designated 10, is shown constructed according to the present inventions. The textile article 10 includes a fabric substrate 12 and a sealed edge 18. As used herein, a "textile article" specifically includes wipes and cleaning cloths that are intended for either single or multiple uses, such as clean room 5 wipes.

Fabric substrate 12 may be formed of synthetic yarns, with polyester being preferred. The preferred denier of the synthetic yarns is between about 30 denier and about 200 denier, with about 70 denier being most preferred. The synthetic yarns may be texturized, with air-texturized yarns being preferable, and air texturized synthetic yarns 10 without entanglement being most preferred. Preferably, substrate 12 is between about 40 grams per meter squared (gm/meter²) and about 300 gm/meter². Substrate 12 may be formed by circular knitting, and is preferably slit prior to packaging.

It is preferable that the perimeter of each textile article includes sealed edge 18 to prevent the loss of material during use. Specifically, frayed or shedding ends could 15 undesirably contaminate an area with particles of yarn from substrate 12. Edge 18 can be sealed by hot knife, hot wire, hot air jet, ultrasonic or laser, with ultrasonic or laser being the most preferred.

Textile article 10 includes a finish. Preferably, this finish is substantially 20 insoluble in isopropyl alcohol at a temperature of greater than about 180F (its boiling point) for about 5 minutes according to IEST-RP-CC-004.3 section 7.1.1. Preferably this finish is an anhydride, more preferably a co-polymer, with ethylene maleic anhydride (EMA) being most preferred. This finish is preferably applied to substrate 12 in a range 25 of between about 0.02 percent by weight (wt.%) to about 2 wt.% of solids on weight of fabric substrate, with between about 0.1 wt.% to about 0.5 wt.% being more preferred, and about 0.2% being most preferred. Preferably this anhydride finish is topically applied, most preferably by immersion and padding.

Textile article 10 also preferably includes a saturant such as alcohol, water, ketone, hypochlorite, peroxide, biostat, biocide, lubricant, surfactant or mixtures thereof.

Referring now to Fig. 2, a plurality of textile articles 10 may be packaged within 30 sealed package 22, thereby creating supply 20. Having a sealed package 22 is

particularly important when supply 20 includes a saturant. The textile articles 10 of supply 20 are preferably clean room laundered and sterilized, most preferably irradiated, prior to packaging. Packaging 22 forms a sterile barrier between the environment and textile articles 10, and can be a variety of different types of containers known in the art 5 such as pouches, bags, canisters, boxes or sleeves, with the preferred container varying according to the quantity of articles 10.

Where package 22 is intended to serve as a dispenser, it is desirable to cover dispensing opening 25 with a resealable closing mechanism such as flap 24, which can include adhesives, snaps, compression zippers, slider zippers and the like. Package 22 is 10 preferably solvent resistant, and may include materials such as laminates, films, metalized films and combinations including at least one.

Referring now to Fig. 3, supply 20 may further include outer bag 30, which is adapted to be removed prior to use. This outer bag 30 would be employed to prevent contamination of environment by package 22.

15 In practice, a user could open outer bag 30 (if present), remove supply 20 and position supply 20 in a convenient location, such as in a clean room workstation. To prepare a surface, the user could pull back flap 24 to expose opening 25, reach through opening 25 to grasp a textile article 10, and pull textile article 10 through opening 25. Opening 25 could then be resealed with flap 24, and textile article 10 could be used to 20 wipe a surface.

The present inventions are not only structurally novel, but they provide substantial and unexpected improvements over commercial clean room wipes. Specifically, the present inventions are stronger and have increased particulate capture than untreated wipes. Moreover, the particle capture and particle retention profiles and particle 25 generation profiles are comparable to competitive wipes.

It should be noted that not all experiments were run on all samples. Accordingly, non-sequential sample numbers (i.e., "Sample 2", "Sample 3", "Sample 5", etc.) are reported in some Tables. This should not be construed as meaning that data has been selectively omitted. Rather, it would have been inconclusive and/or burdensome to run

all experiments on all samples. Where a sample was tested, the data is either individually reported or reported as an average of other identical samples.

However, the characteristics of a given sample (i.e., product name, manufacturer, chemical treatment) are consistently referred to by the same sample number among the 5 various experiments, although the actual physical sample is, obviously, not the same. As used herein, "N/T" means "Not Tested"; "N/C" means "Not Calculable" (e.g. because zero cannot be divided); "UNKNOWN" chemical treatment indicates that the wipe is marketed as having a treatment, but the identity of the treatment is unknown to Applicants; "VSLP" is the ValuSeal LP product; and "MSVP" is the MicroSeal VP 10 product available from the Berkshire Corporation of Great Barrington, MA. Finally, some graphs contain prophetic examples based on best estimates of what would be expected. A compilation of experimental results is reported in FIG. 11.

To test the strength of the present inventions compared to what is commercially available, clean room wipes were tested using a standard trap tear method, ASTM D 15 5587:1996. This is a trapezoidal tear method, in which a constant-rate-of-extension instrument (Instron) is used to determine tear strength of the knit as based upon the 15 average of the five highest peaks obtained during testing.

For this test, a total of four repetitions were used per sample and data was 20 collected from the course direction of the fabric. Wale direction data was not collected because previously performed wale strength experiments yielded non-reproducible data due to the fabric necking and snapping after extreme elongation. Comparisons were made between untreated wipes, wipes with EMA and wipes with a Particle Attraction Treatment (PAT) of unknown chemical identities.

Samples of untreated polyester knit wipes (VSLP and MSVP) were jet scoured, 25 heat set, ultrasonically cut into 9"x9" wipes and laundered in an ISO Class 4 clean room laundry. A nonionic surfactant was added during laundering to aid in cleaning and increase absorbency of the finished wipes. Treated wipes were created in the same manner except that 0.16% or 0.20% on weight of fabric EMA was applied by padding to some samples before the heat set process. EMA is available from Vertellus Health &

Specialty Products LLC of Indianapolis, IN under the trade name ZeMac® E400. These samples were tested against commercially available wipes with and without PAT.

Table 1 – Comparison of Strength

5

Sample	Product Name	Knit Construction /weight	Chemical Treatment (% on wt. of fabric)	Average Strength (lbs)	Strength Contribution from Treatment (lbs) (adj for fabric wt)
1	ValuSeal LP	Modified Pique/144 gsm	0.16% EMA	23.5	2.27
2	ValuSeal LP	Modified Pique/133 gsm	0.20% EMA	22.9	3.37
3	ValuSeal LP	Modified Pique/139 gsm	NONE	20.5	0
4	MicroSeal VP	Interlock/127 gsm	0.20% EMA	38.7	6.81
5	MicroSeal VP	Interlock/126 gsm	NONE	31.8	0
6	Anticon Heavy Wt. with PAT	Mock Pique/145 gsm	UNKNOWN	17.7	N/T
7	Anticon Heavy Wt.	Mock Pique/138 gsm	NONE	18.8	N/T

As seen in the Table 1 and Fig. 4, wipes treated with about 0.2 % EMA are significantly stronger than identical untreated wipes. Specifically, VSLP with 0.2% EMA is 11.5% stronger than VSLP without EMA; and MSVP with 0.2% EMA is 21.9% stronger than untreated MSVP. This strengthening characteristic remains true as the “Strength Contribution from Treatment” results show.

The dramatic strength imparted to MSVP by what are very low levels of EMA may be attributable to some effect of EMA on the fabric knit structure. This strength improvement capability of EMA is particularly significant and unexpected when compared to the effect of PAT on a commercially available wipe. Specifically, untreated 125254.doc

Anticon Heavy Weight is no stronger than its PAT-treated counterpart is. Therefore, contrary to PAT, EMA strengthens while PAT shows no improvement in strength. It is hypothesized that EMA provides enhanced surface lubricity, which increases yarn slippage, thereby leading to the bunching of the yarns, which increases the tearing strength. The relationship between EMA and strength is represented in Fig. 5.

Another benefit of the present inventions is that it yields a superior wipe with respect to carbon black pick-up. Again, samples of untreated polyester knit wipes (VSLP and MSVP) were jet scoured, heat set, ultrasonically cut into 9"x9" wipes and laundered in an ISO Class 4 clean room laundry. A nonionic surfactant was added during laundering to aid in cleaning and increase absorbency of the finished wipes. Treated wipes were created in the same manner except that 0.16% or 0.20% on weight of fabric EMA was applied by padding to some samples before the heat set process. These samples were tested against commercially available wipes with and without PAT.

In the test, 40 mg \pm 1.0 mg carbon black particles (Carbon Black M-1300, Cabot Corporation, USA) were weighed and placed in a beaker with 400 ml of water. A 9"x 9" sample wipe was added to the beaker and stirred with a magnetic stirring bar for 30 seconds and removed. Excess water was squeezed from the wipe by hand and returned to the beaker. The water in the beaker was filtered through a 1.0 micron pore size glass fiber filter, which had been pre-weighed. The filter was dried and weighed, and the amount of carbon black left in the beaker after exposure to the wipe was calculated.

The Percent Carbon Black Pick-Up by the wipe was calculated using the following formula:

$$\frac{\text{Initial Carbon Black in Beaker(mg)} - \text{Carbon Black on Filter(mg)}}{\text{Initial Carbon Black in Beaker (mg)}} \times 100\%$$

Table 2 below expresses the findings:

Table 2 – Comparison of Carbon Black Pick-Up

Sample	Product Name	Chemical Treatment (% on wt. of fabric)	Carbon Black Pick-Up
1	ValuSeal LP	0.16% EMA	61.0%
2	ValuSeal LP	0.20% EMA	69.0%
3	ValuSeal LP	NONE	41.8%
4	MicroSeal VP	0.20% EMA	73.4%
5	MicroSeal VP	NONE	52.2%
6	Anticon Heavy Wt.	UNKNOWN	63.5%
7	Anticon Heavy Wt.	NONE	37.5%
8	Anticon White Magic	UNKNOWN	72.7%
9	Anticon White Magic	NONE	47.1%
10	Anticon Light Wt.	UNKNOWN	56.6%
11	Anticon Standard Wt.	UNKNOWN	63.3%
12	Vectra Alpha Nu	UNKNOWN	22.4%

5 As shown in Table 2 and Fig. 6, MSVP with about 0.2 % EMA has superior carbon black pick-up compared to all other samples tested. As represented in Fig. 7, the carbon pick-up appears to be a function of the concentration of EMA. Combining the data from Tables 1 and 2 into Fig. 8, it appears that both carbon pick-up and strength are a function of EMA concentration.

10 In addition to improvements in carbon black pick-up and strength, particle capture and particle retention profiles are also quite good for the EMA treated textile articles. In these experiments, VSLP and MSVP samples with and without EMA were prepared similarly to those prepared for the carbon black pick-up testing. The testing process used was based on IEST-RP-CC-004.3 Section 6.1.3, with particle counts measured and recorded as the cumulative number of particles by size ($\geq 0.5 \mu\text{m}$, $\geq 1 \mu\text{m}$, $\geq 2 \mu\text{m}$, $\geq 5 \mu\text{m}$, $\geq 15 \mu\text{m}$, and $\geq 25 \mu\text{m}$) using a Hiac Royco 8000A Laser Particle Counter.

15 Specifically, a suspension containing 0.100g carbon black (M-1300, Cabot Corporation, USA) in 3000 ml of filtered, deionized water was vigorously shaken and

allowed to settle for 30 minutes. Approximately 400 ml was decanted off the top and was used as a stock solution. The stock solution was placed in an ultrasonic bath for 10 minutes, and 750 μ l of the stock solution was added to filtered deionized water to make 755 ml of particle suspension. The suspension was shaken on a W.S. Tyler RX-86
5 biaxial shaker for 5 minutes, and particle concentration was measured using 190 ml of the suspension. A dry wipe was weighed and then added to the remaining 565 ml of particle suspension in the jar. The suspension and wipe were shaken on a biaxial shaker for 5 minutes. The wipe was removed from the jar and the particle concentration was measured. The wipe was next added to a jar containing 565 ml of filtered deionized
10 water, then shaken on a biaxial shaker for 5 minutes, then the wipe was removed. The weight and dimensions of the wet wipe were measured and recorded, and the particle concentration in the jar was measured.

Particle Capture is defined as the net reduction in particles in solution after agitation with the wipe. If the number of particles captured was negative, meaning that
15 more particles were released into the water than removed, Particle Capture was defined as zero.

20
Particle Capture (Count) = Initial Particles in Suspension – Particles Remaining
After Exposure to Wipe
Particle Capture (Percent) = (Particle Capture (Count) / Initial Particles in
Suspension) x 100%

25
Particle Retention is defined as the number of the captured particles that are retained by the soiled wipe after agitation in clean water. If the number of particles retained was negative, particle retention was defined as zero.

30
Particle Retention (Count) = Particle Capture (Count) – Particles Released
125254.doc

Particle Retention (Percent)= (Particle Retention (Count) / Particle Capture (Count)) x 100%

5 Particle Capture and Retention Data are set forth in Table 3, and Figs. 9 and 10:

Table 3 – Comparison of Particle Capture and Retention

Sample	Product Name	Chemical Treatment (% on wt. of fabric)	Particle Capture (Cumulative %)			Particle Retention (Cumulative %)		
			$\geq 1\mu\text{m}$	$\geq 2\mu\text{m}$	$\geq 5\mu\text{m}$	$\geq 1\mu\text{m}$	$\geq 2\mu\text{m}$	$\geq 5\mu\text{m}$
1	ValuSeal LP	0.16% EMA	8.1%	27.7%	69.6%	7.0%	78.8%	91.3%
2	ValuSeal LP	0.20% EMA	14.8%	51.3%	83.3%	36.5%	86.3%	94.3%
3	ValuSeal LP	NONE	0.0%	0.0%	0.0%	N/C	N/C	N/C
4	MicroSeal VP	0.20% EMA	10.4%	55.8%	80.0%	16.9%	85.6%	92.5%
5	MicroSeal VP	NONE	0.0%	0.0%	1.3%	N/C	N/C	0.0%
6	Anticon Heavy Wt.	UNKNOWN	29.1%	55.7%	82.3%	51.5%	85.1%	94.7%
8	Anticon White Magic	UNKNOWN	4.3%	31.7%	79.5%	67.9%	91.5%	88.7%
9	Anticon White Magic	NONE	0.0%	0.0%	0.0%	N/C	N/C	N/C
12	Vectra Alpha Nu	UNKNOWN	0.0%	0.7%	16.4%	N/C	0.0%	5.8%

10

As can be seen from Table 3 and Figs. 9 and 10, EMA imparts an ability to capture and retain particles that is approximately equivalent to other finishes. Moreover, particle generation tested by both Biaxial Shake - IEST RP CC004.3 Section 6.1.3 and Helmke Drum - IEST RP CC003-87-T Section 5.3, modified to measure particulate generation on a sample size of 10 wipers, does not appear to be significantly affected by EMA. This is shown in Table 4 below:

Table 4 – Comparison of Particle Generation

Sample	Product Name	Chemical Treatment (% on wt. of fabric)	Biaxial Shake Particle Generation (>0.5µm x10 ³ /cm ²)	Helmke Drum Particle Generation (>0.5µm/ft ³ /wiper)
1	ValuSeal LP	0.16% EMA	0.85	NT
2	ValuSeal LP	0.20% EMA	0.58	4
3	ValuSeal LP	NONE	0.31	N/T
4	MicroSeal VP	0.20% EMA	0.8	2.5
5	MicroSeal VP	NONE	0.51	3
6	Anticon Heavy Wt.	UNKNOWN	0.23	13
8	Anticon White Magic	UNKNOWN	0.42	4
9	Anticon White Magic	NONE	0.66	N/T
10	Anticon Light Wt. w/PAT	UNKNOWN	0.53	17
11	Anticon Standard Wt.	UNKNOWN	0.35	16
12	Vectra Alpha Nu	UNKNOWN	0.78	N/T

5

Finally, a compilation of the experimental and test results are shown in Fig. 11 to further show the various unexpected improvements due to the present inventions.

Certain modifications and improvements will occur to those skilled in the art upon a reading of the foregoing description. By way of example, the copolymer could be changed with possible substitutes being polypropylene, vinyl and acrylic while still maintaining the actual functional group. Similarly, the anhydride type could be changed with possible substitutes being acetic anhydride, malic acid and maleic acid. Also, the use of microdenier yarns for all or part of the knit structure or the use of monofilament yarns for a portion of the knit structure may yield further improvements such as increased surface area and improved removal of particles from surfaces (scrubbing ability). The use of yarns with filaments of various cross sections (round, trilobal, pie, dog bone,

ribbon, star, etc.) and the use of conductive yarns for all or part of the knit structure (for ESD purposes) may also be desirable for special applications. This could include mixtures of natural and synthetic fibers or yarns in the substrate. In addition, other chemical treatment in conjunction with EMA such as antistats, antimicrobials, soil release agents, etc. could be applied to the wipes of the present inventions. Also, the use of surfactant types during laundering other than nonionic such as anionic, amphoteric or cationic as well as also laundering without the addition of surfactant may be desirable for some applications. Finally, it is expected that the present inventions would also provide affinity for particulate matter in addition to carbon black. Applicable particles may 5 include aluminum oxide, manganese oxide, titanium dioxide, zinc oxide, aluminum, copper, copper oxide, graphite, graphite, iron, ferric oxide, zinc, silicon, silicon dioxide, etc. It should be understood that all such modifications and improvements have been deleted herein for the sake of conciseness and readability but are properly within the 10 scope of the following claims.

15

We Claim:

1. A supply of clean room wipes, said product comprising:
 - (a) a sealed package; and
 - (b) a plurality of wipes within said sealed package, said plurality of wipes having a Strength Contribution from Treatment (lbs) when tested using a standard trap tear method ASTM D 5587:1996 of greater than about 10% and an average improvement in Percent Carbon Black Pick-Up greater than about 10% compared to an untreated wipe.
- 5 2. The product according to Claim 1 further including a sealed edge along the perimeter of each wipe to prevent loss of material from said wipe during use.
- 10 3. The product according to Claim 2 further including a saturant.
- 15 4. The product according to Claim 3, wherein said saturant is chosen from alcohols, water, ketones, hypochlorites, peroxides, biostats, biocides, lubricants, surfactants and mixtures thereof.
- 20 5. The product according to Claim 2, wherein said plurality of wipes are sterilized.
- 25 6. The product according to Claim 5, wherein said plurality of wipes are irradiated until substantially sterile.
7. The product according to Claim 2, wherein said plurality of wipes are clean room laundered prior to packaging.

8. The product according to Claim 1 further including an outer bag surrounding said sealed package, which is adapted to be removed prior to use.

9. The product according to Claim 1, wherein said sealed package is
5 resealable.

10. The product according to Claim 1, wherein said sealed package is solvent
resistant.

10 11. The product according to Claim 1, wherein said sealed package forms a
sterile barrier between the environment and said plurality of wipes.

12. The product according to Claim 1, wherein said material forming said
sealed package is selected from the group consisting of laminates, films, metalized films
15 and combinations thereof.

13. A textile article having a particle capturing finish, said product comprising:

5 (a) a substrate; and
(b) an anhydride finish applied to said substrate.

14. The product according to Claim 13, wherein said substrate is formed of synthetic yarns.

10

15. The product according to Claim 14, wherein said synthetic yarns are polyester.

15

16. The product according to Claim 14, wherein said synthetic yarns are between about 30 denier and about 200 denier.

17. The product according to Claim 16, wherein said synthetic yarns are about 70 denier.

20

18. The product according to Claim 14, wherein said synthetic yarns are texturized.

19. The product according to Claim 18, wherein said synthetic yarns are air texturized.

25

20. The product according to Claim 19, wherein said synthetic yarns are air texturized without entanglement.

30

21. The product according to Claim 13, wherein said substrate is between about 40 gms/meter² and about 300 gms/meter².

22. The product according to Claim 13, wherein said substrate is formed by circular knitting.

5 23. The product according to Claim 22, wherein said substrate formed by circular knitting is slit prior to packaging.

24. The product according to Claim 13, wherein said anhydride finish is topically applied.

10

25. The product according to Claim 24, wherein said topically applied finish is applied by immersion and padding.

15

26. The product according to Claim 13, wherein said anhydride finish is between about 0.02 wt.% and 2 wt.% solids on weight of fabric.

27. The product according to Claim 26, wherein said anhydride finish is between about 0.1 wt.% and 0.5 wt.% solids on weight of fabric.

20

28. The product according to Claim 13, wherein said anhydride finish is a co-polymer.

29. The product according to Claim 28, wherein said co-polymer is ethylene maleic anhydride (EMA).

25

30. A supply of clean room wipes, said supply of clean room wipes comprising:

- (a) a sealed package;
- 5 (b) a plurality of wipes within said sealed package, said wipes including (i) a substrate and (ii) an anhydride finish applied to said substrate, wherein said plurality of wipes having a Strength Contribution from Treatment (lbs) when tested using a standard trap tear method ASTM D 5587:1996 of greater than about 10% and an average improvement in Percent Carbon Black Pick-Up greater than about 10% compared to an untreated wipe; and
- (c) a sealed edge along the perimeter of each wipe to prevent loss of material from said wipe during use.

15 31. The product according to Claim 30 further including a saturant.

32. The product according to Claim 31, wherein said saturant is chosen from alcohols, water, ketones, hypochlorites, peroxides, biostats, biocides, lubricants, surfactants and mixtures thereof.

20 33. The product according to Claim 30, wherein said plurality of wipes are sterilized.

34. The product according to Claim 33, wherein said plurality of wipes are 25 irradiated until substantially sterile.

35. The product according to Claim 30, wherein said plurality of wipes are clean room laundered prior to packaging.

36. The product according to Claim 30 further including an outer bag surrounding said sealed package, which is adapted to be removed prior to use.

37. The product according to Claim 30, wherein said sealed package is
5 resealable.

38. The product according to Claim 30, wherein said sealed package is solvent
resistant.

10 39. The product according to Claim 30, wherein said sealed package forms a
sterile barrier between the environment and said plurality of wipes.

15 40. The product according to Claim 30, wherein said material forming said
sealed package is selected from the group consisting of laminates, films, metalized films
and combinations thereof.

41. The product according to Claim 30, wherein said substrate is formed of
synthetic yarns.

20 42. The product according to Claim 41, wherein said synthetic yarns are
polyester.

43. The product according to Claim 41, wherein said synthetic yarns are
between about 30 denier and about 200 denier.

25 44. The product according to Claim 43, wherein said synthetic yarns are about
70 denier.

30 45. The product according to Claim 41, wherein said synthetic yarns are
texturized.

46. The product according to Claim 45, wherein said synthetic yarns are air texturized.

5 47. The product according to Claim 46, wherein said synthetic yarns are air texturized without entanglement.

48. The product according to Claim 30, wherein said substrate is between about 40 gms/meter² and about 300 gms/meter².

10

49. The product according to Claim 30, wherein said substrate is formed by circular knitting.

15

50. The product according to Claim 49, wherein said substrate formed by circular knitting is slit prior to packaging.

51. The product according to Claim 30, wherein said anhydride finish is topically applied.

20

52. The product according to Claim 51, wherein said topically applied finish is applied by immersion and padding.

53. The product according to Claim 30, wherein said anhydride finish is between about 0.02 wt.% and 2 wt.% solids on weight of fabric.

25

54. The product according to Claim 53, wherein said anhydride finish is between about 0.1 wt.% and 0.5 wt.% solids on weight of fabric.

30

55. The product according to Claim 30, wherein said anhydride finish is a co-polymer.

56. The product according to Claim 55, wherein said co-polymer is ethylene maleic anhydride (EMA).

5

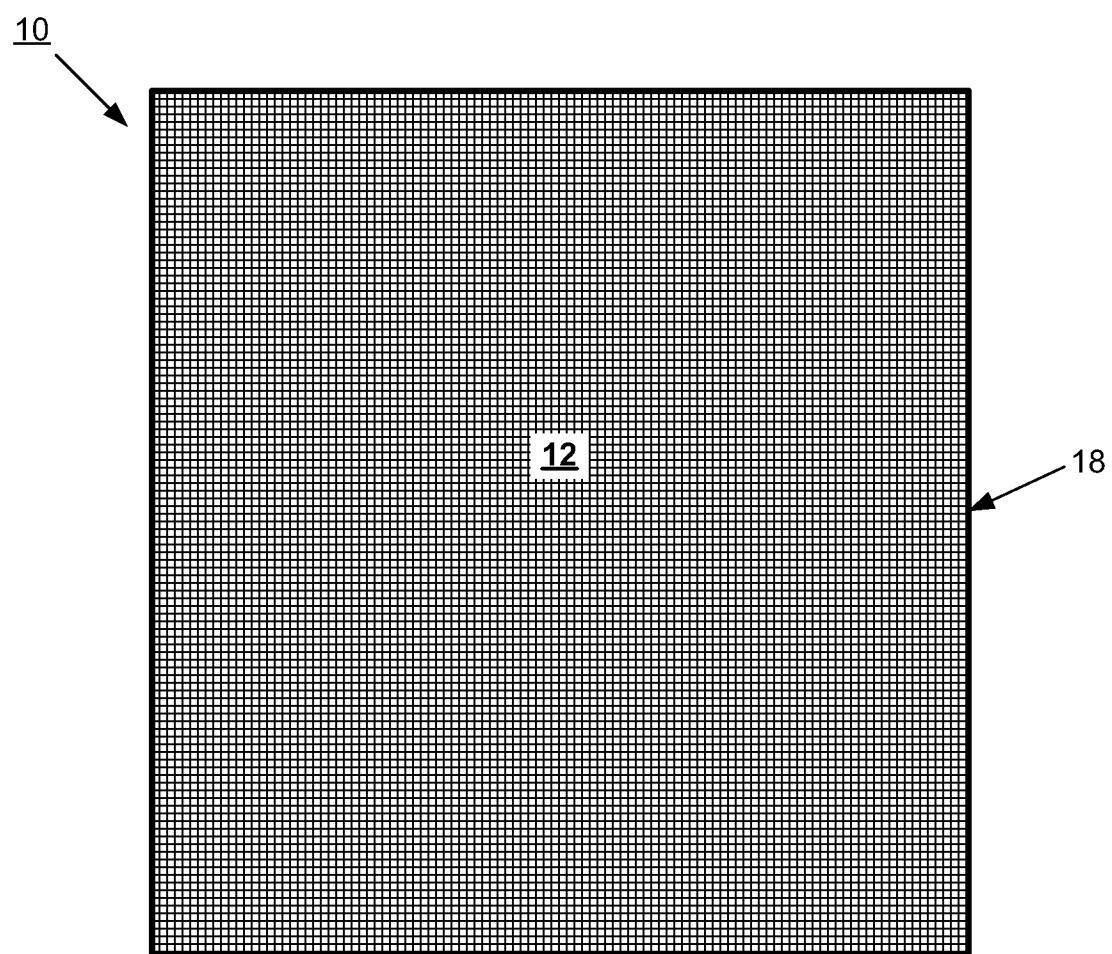
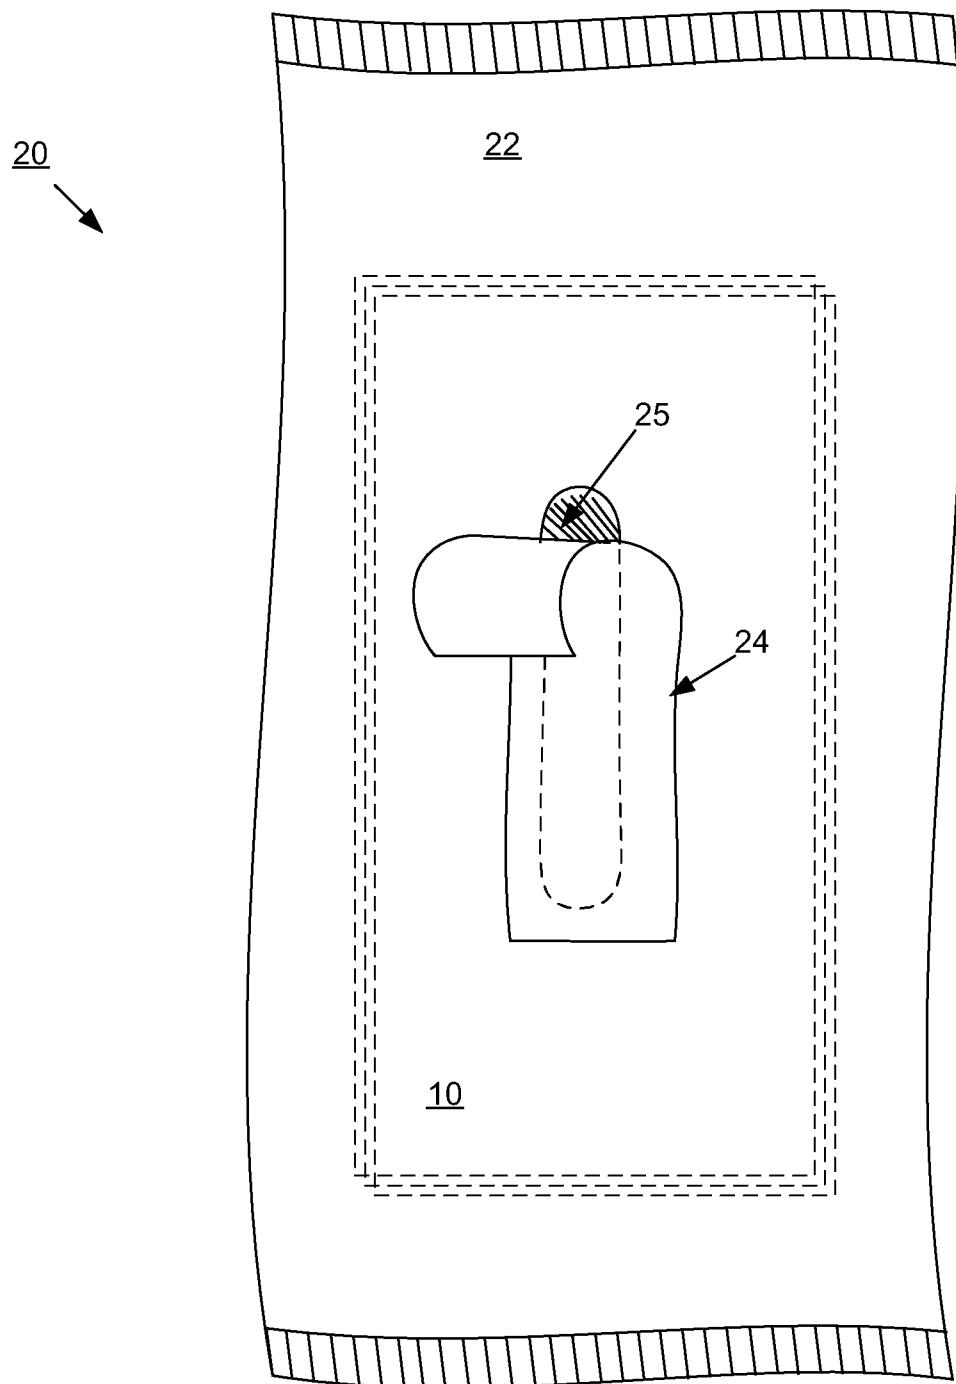
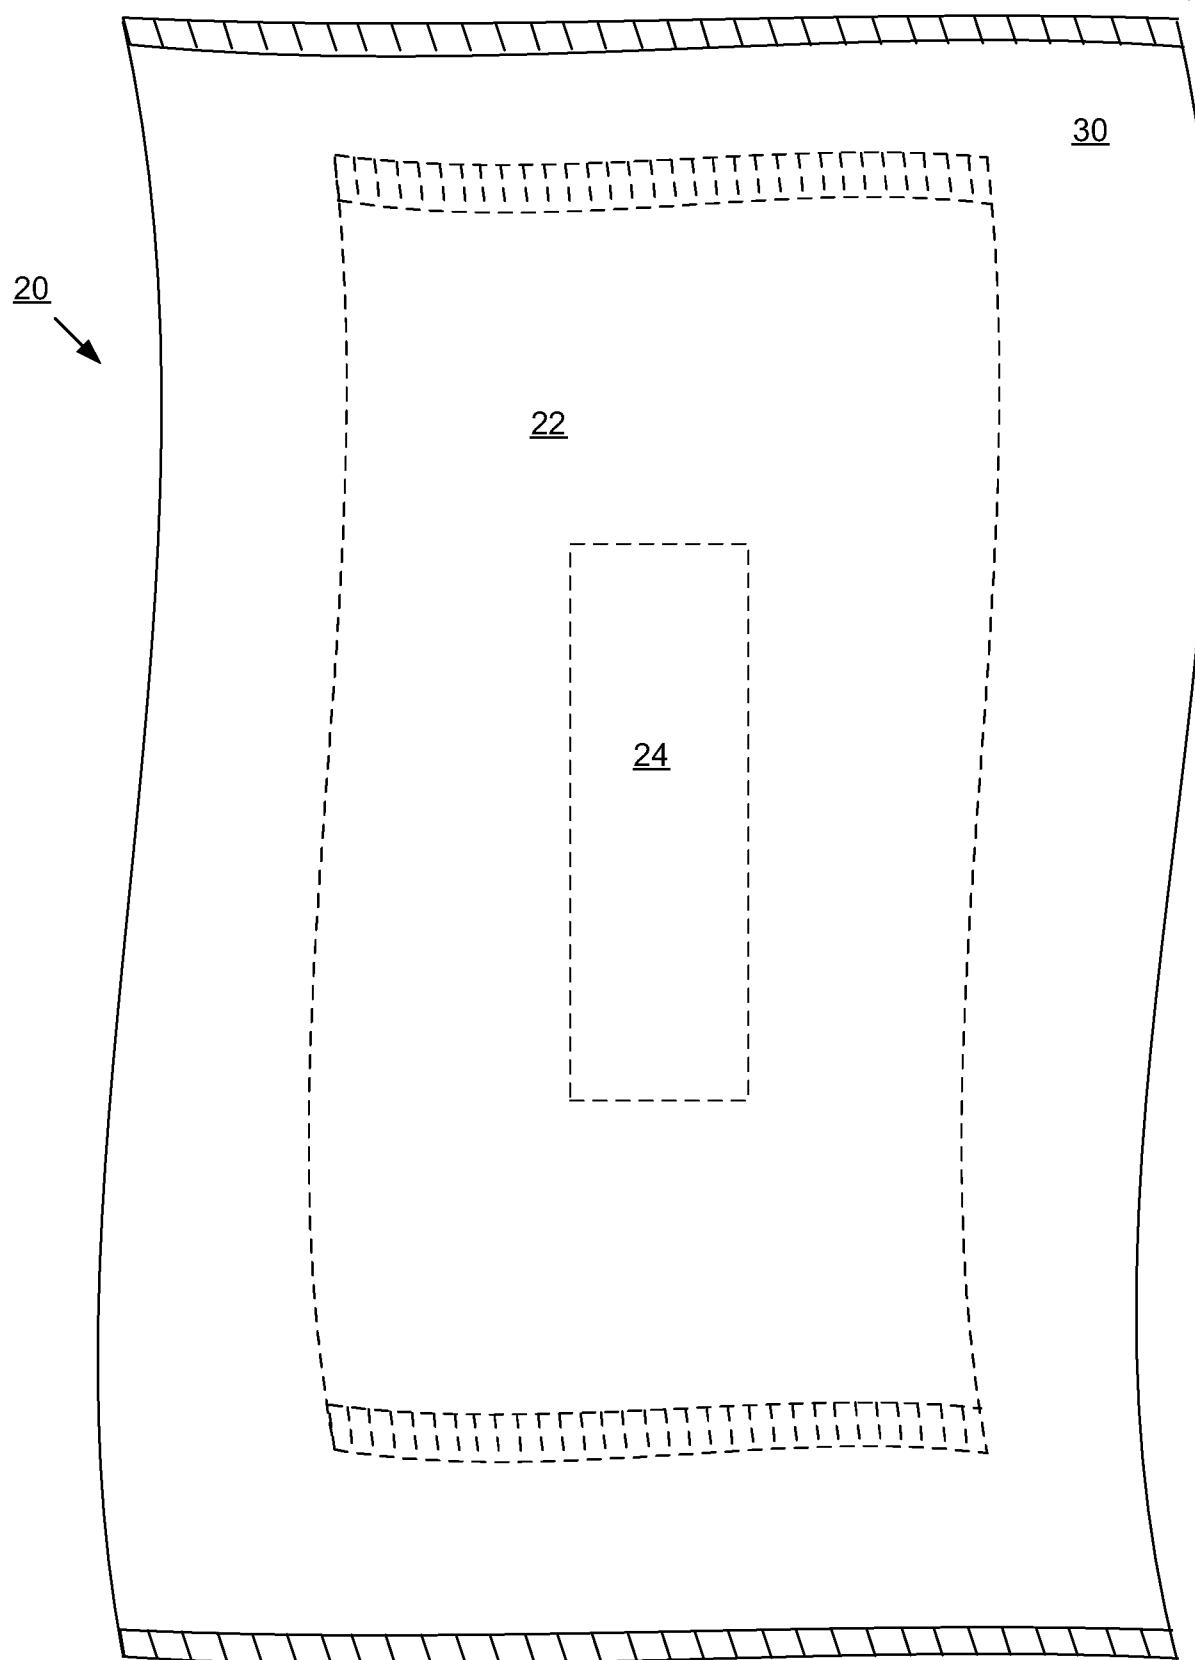
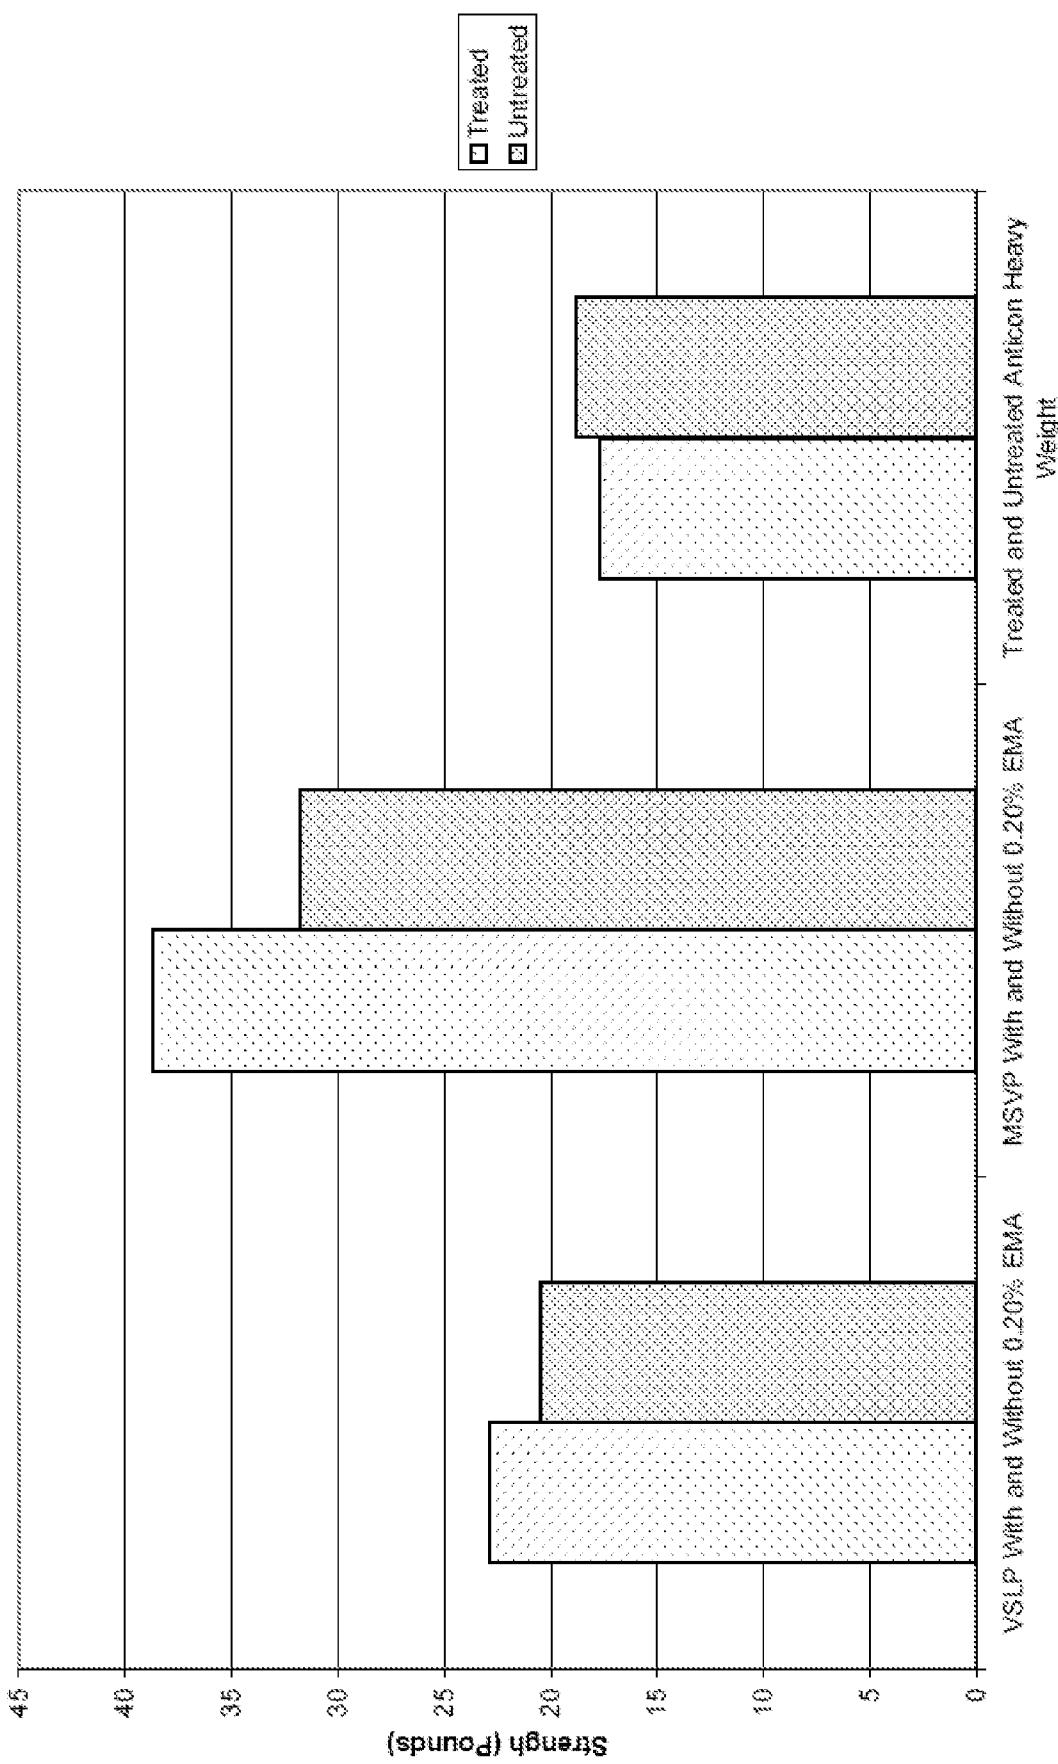


FIG. 1

**FIG. 2**

**FIG. 3**

Strength Comparison Between Treated and Untreated Wipes

**FIG. 4**

Strength As a Function of [EMAA]

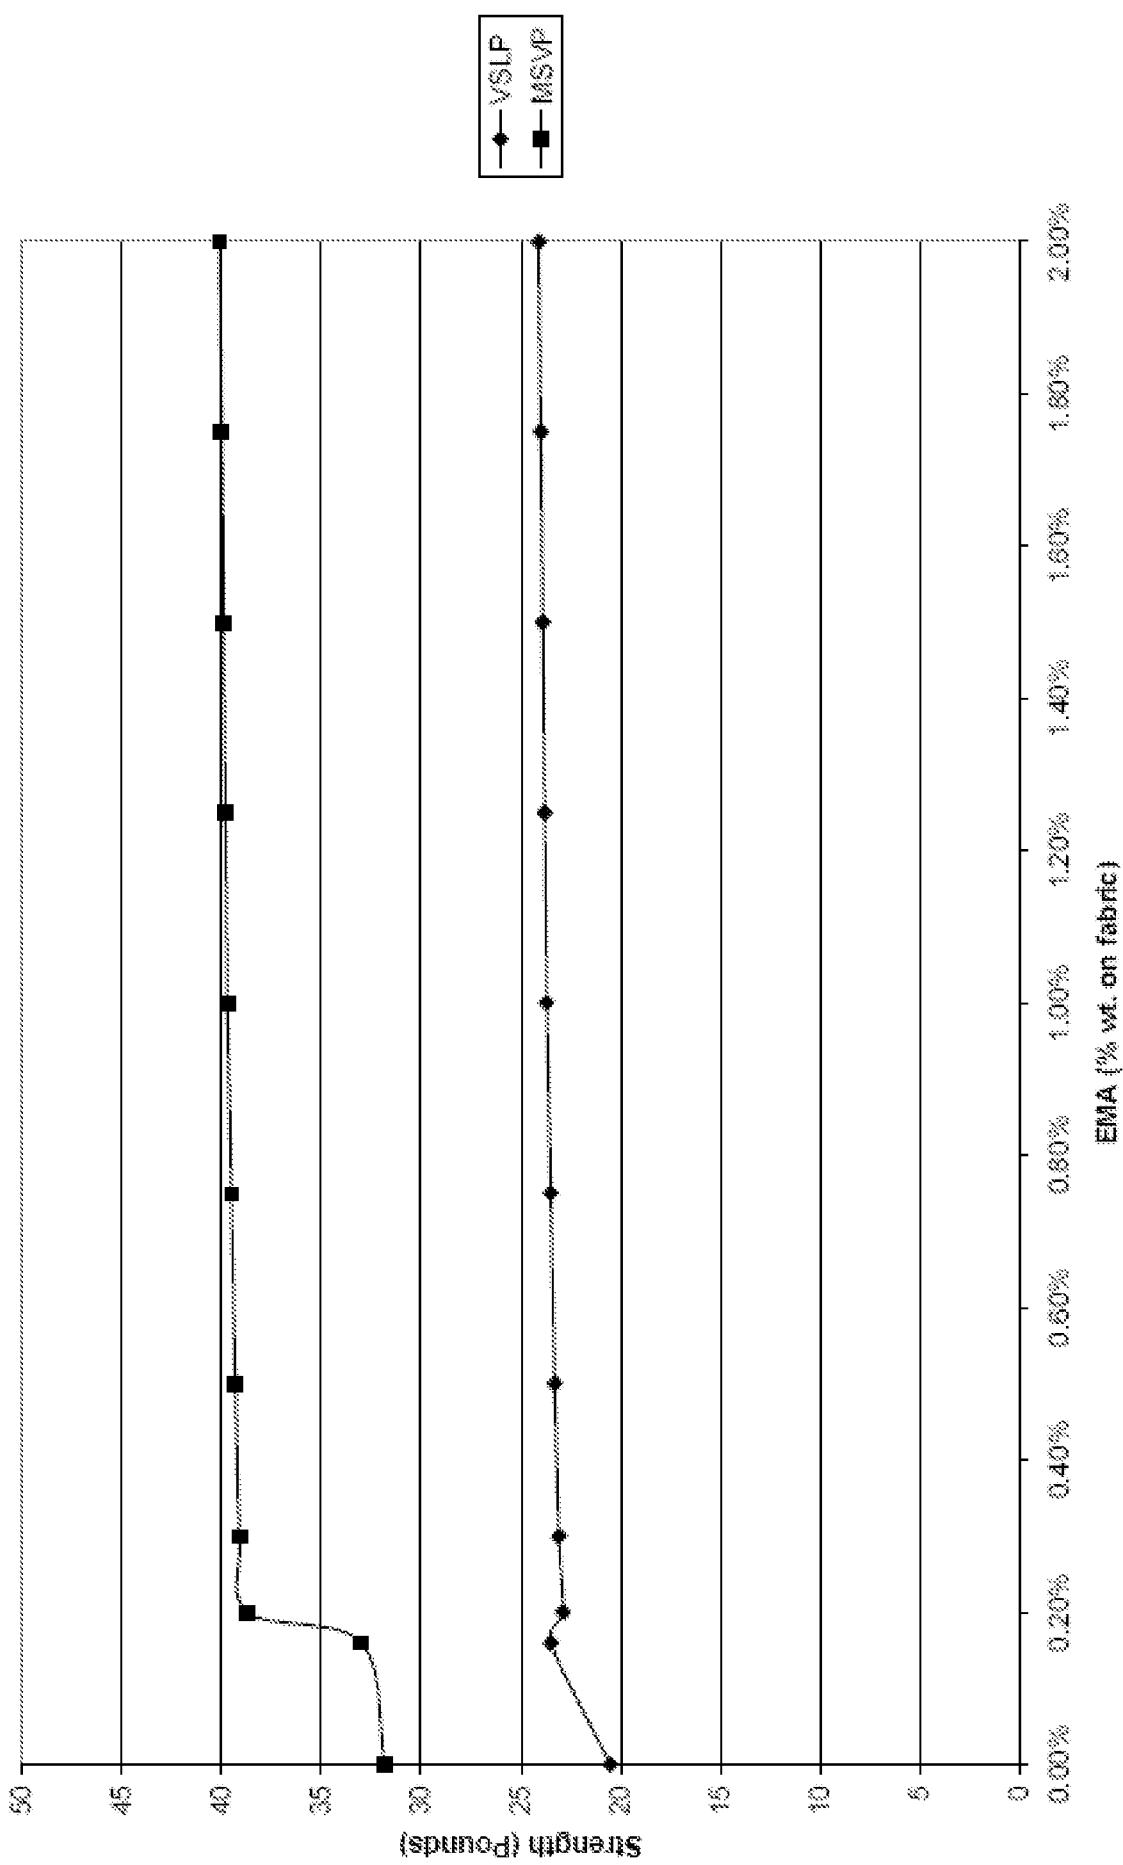


FIG. 5

Carbon Black Pick-Up Between Various Wipes

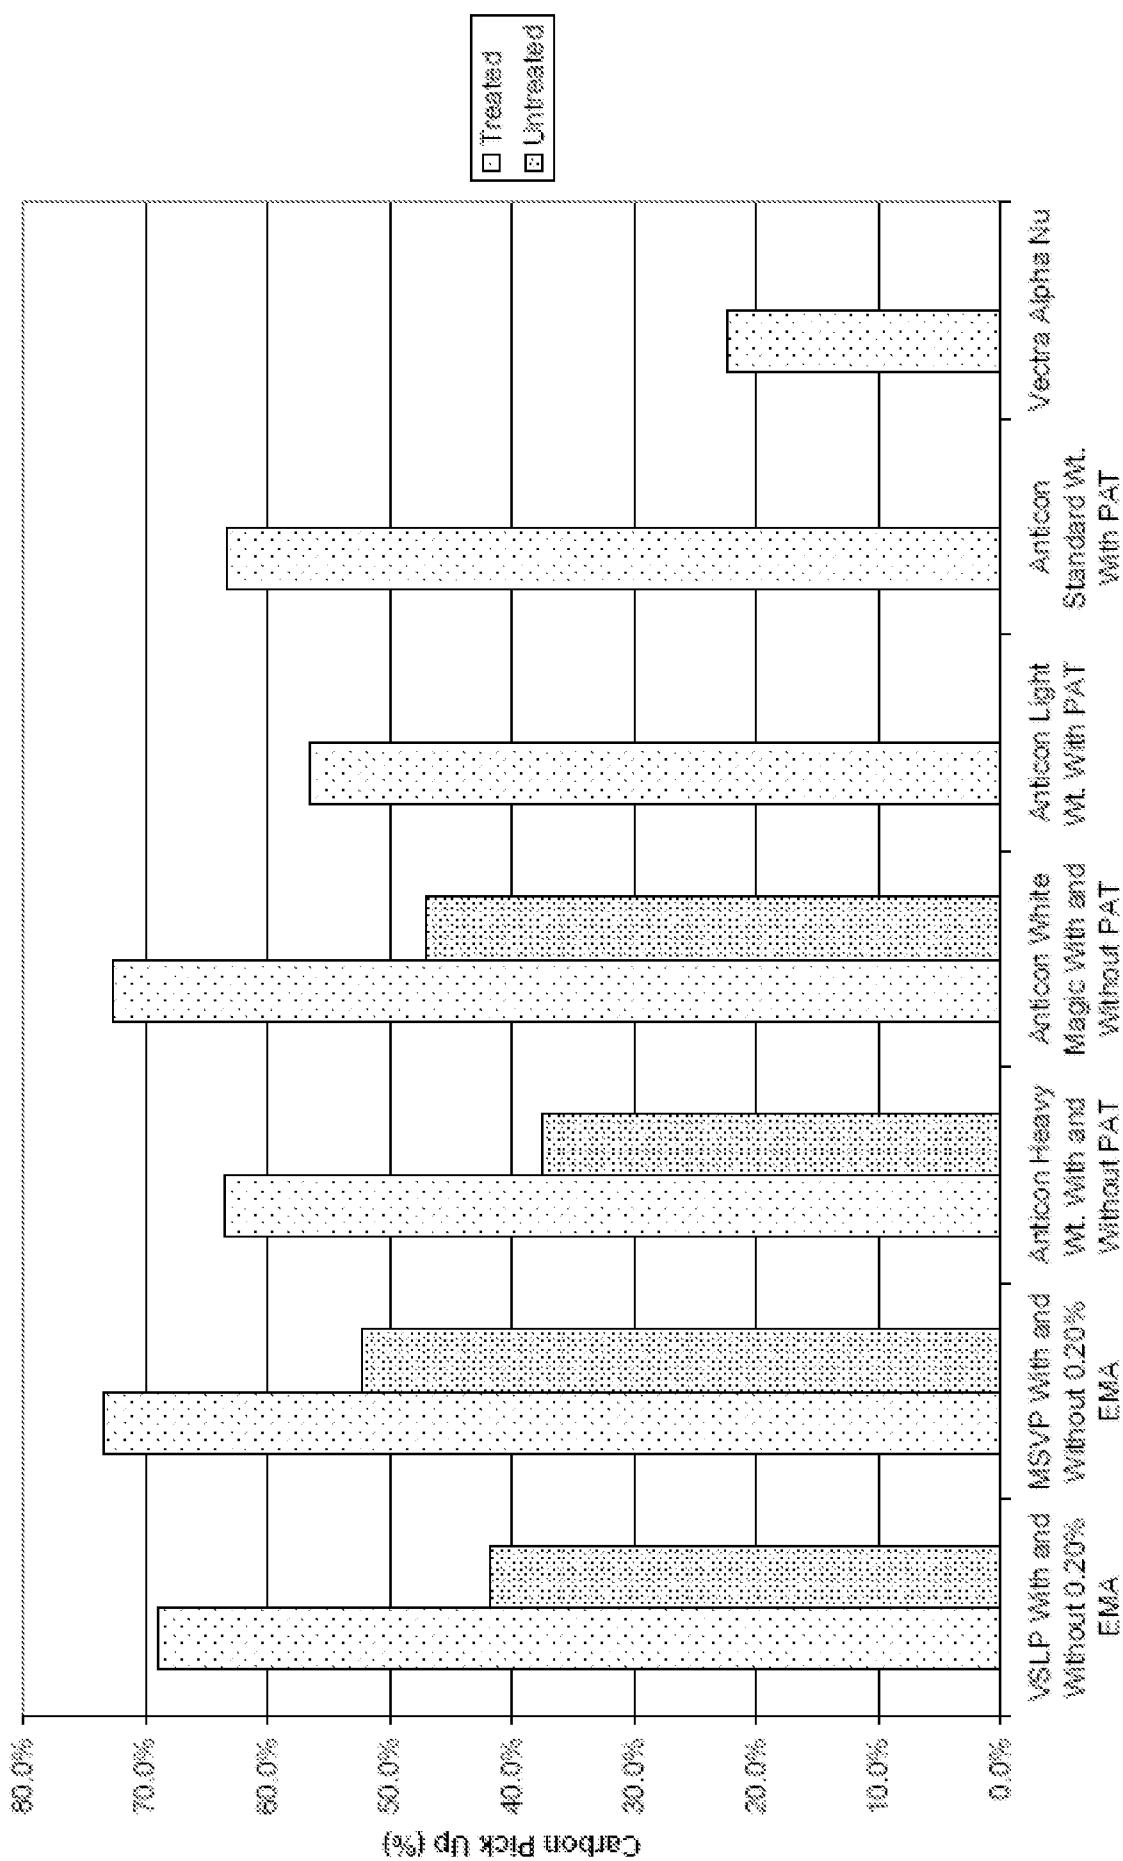


FIG. 6

Carbon Pick-Up As a Function of [EMA]

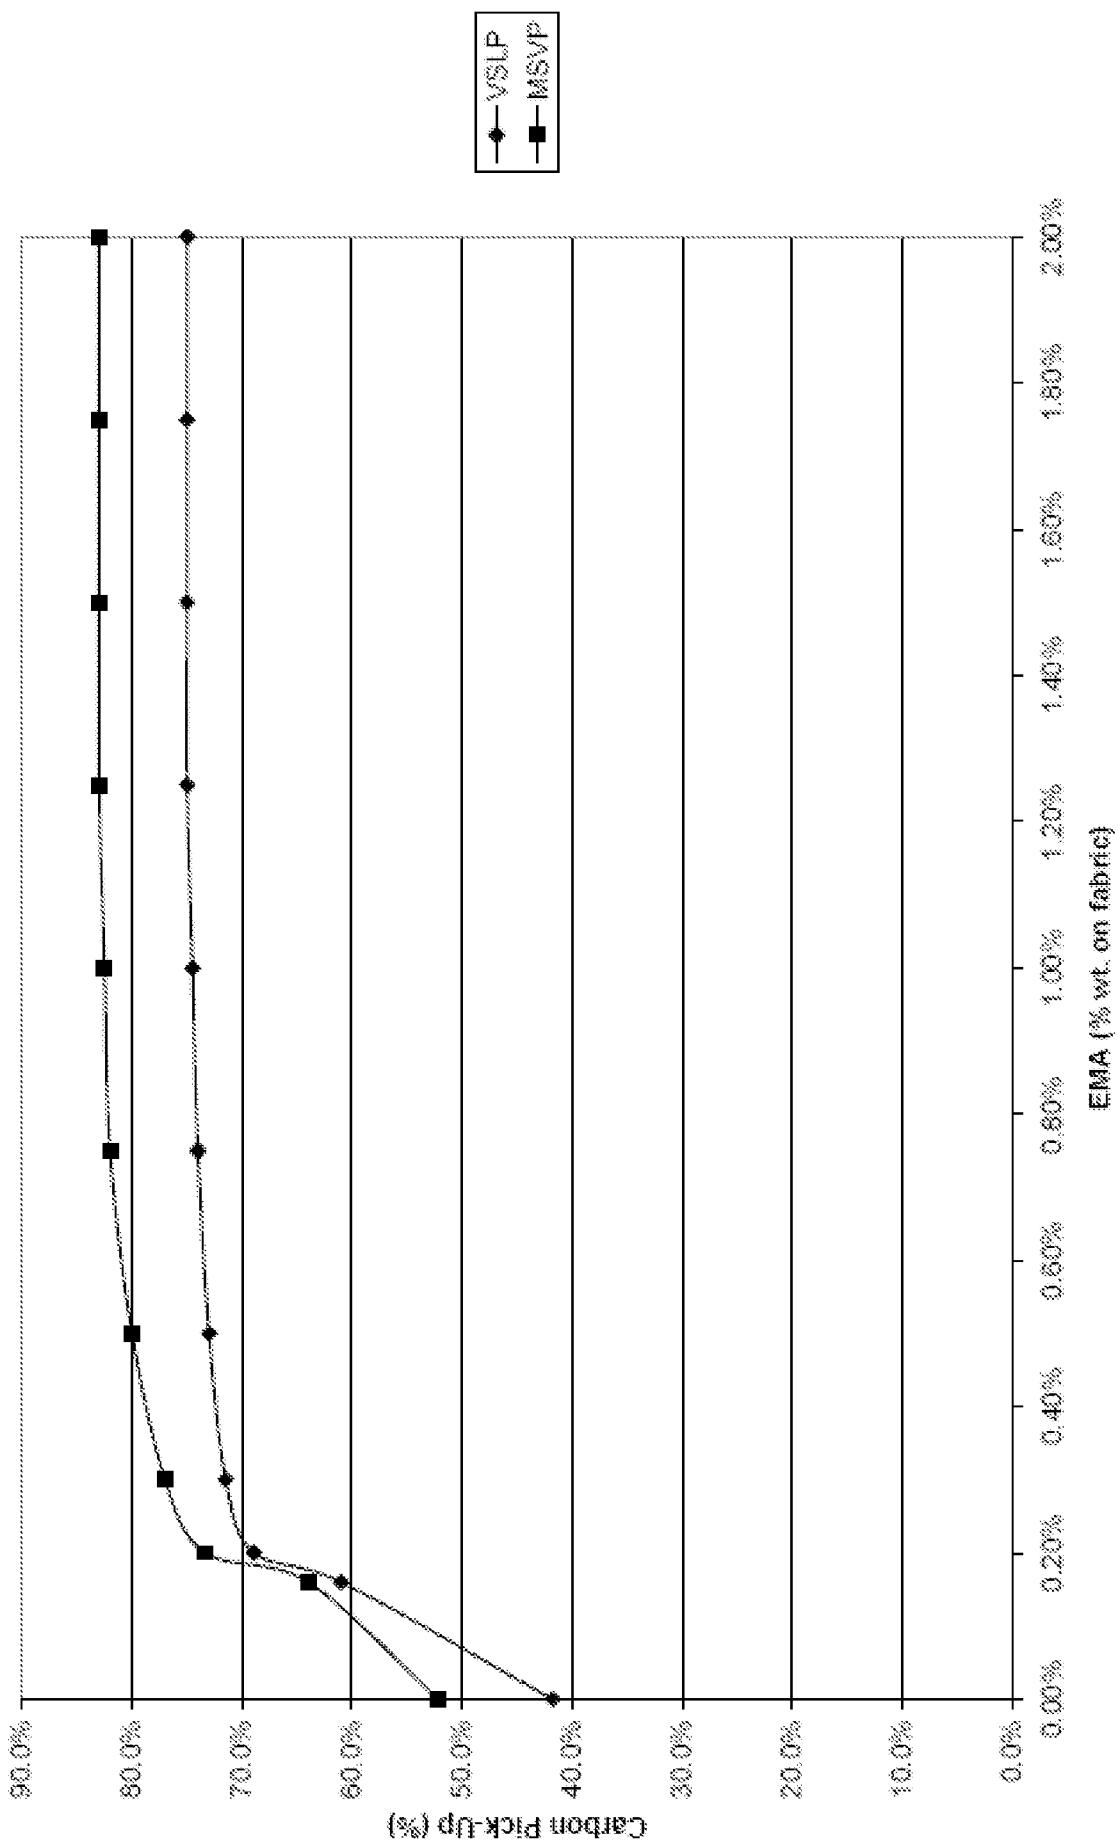


FIG. 7

Effect of EMA on Carbon Black Pick-Up and Strength

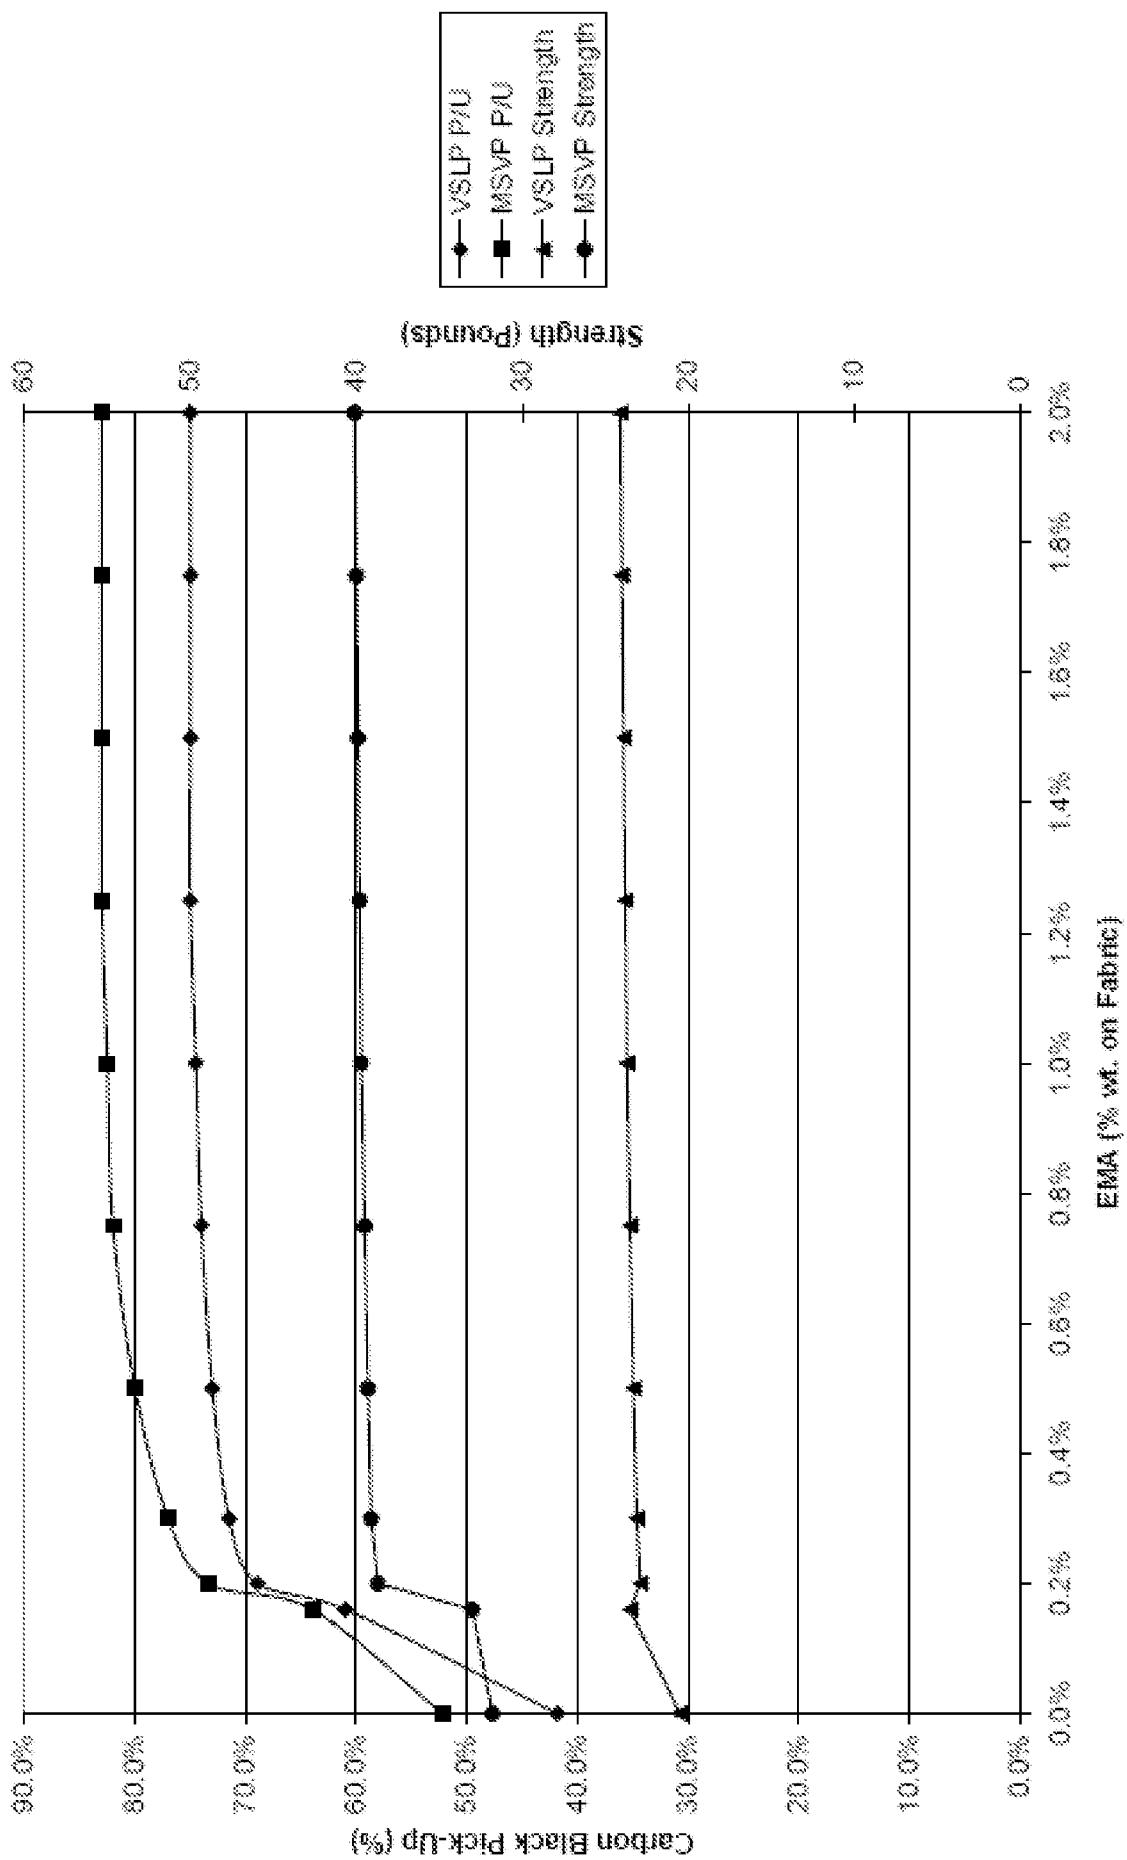


FIG. 8

Particle Capture Of Various Wipes

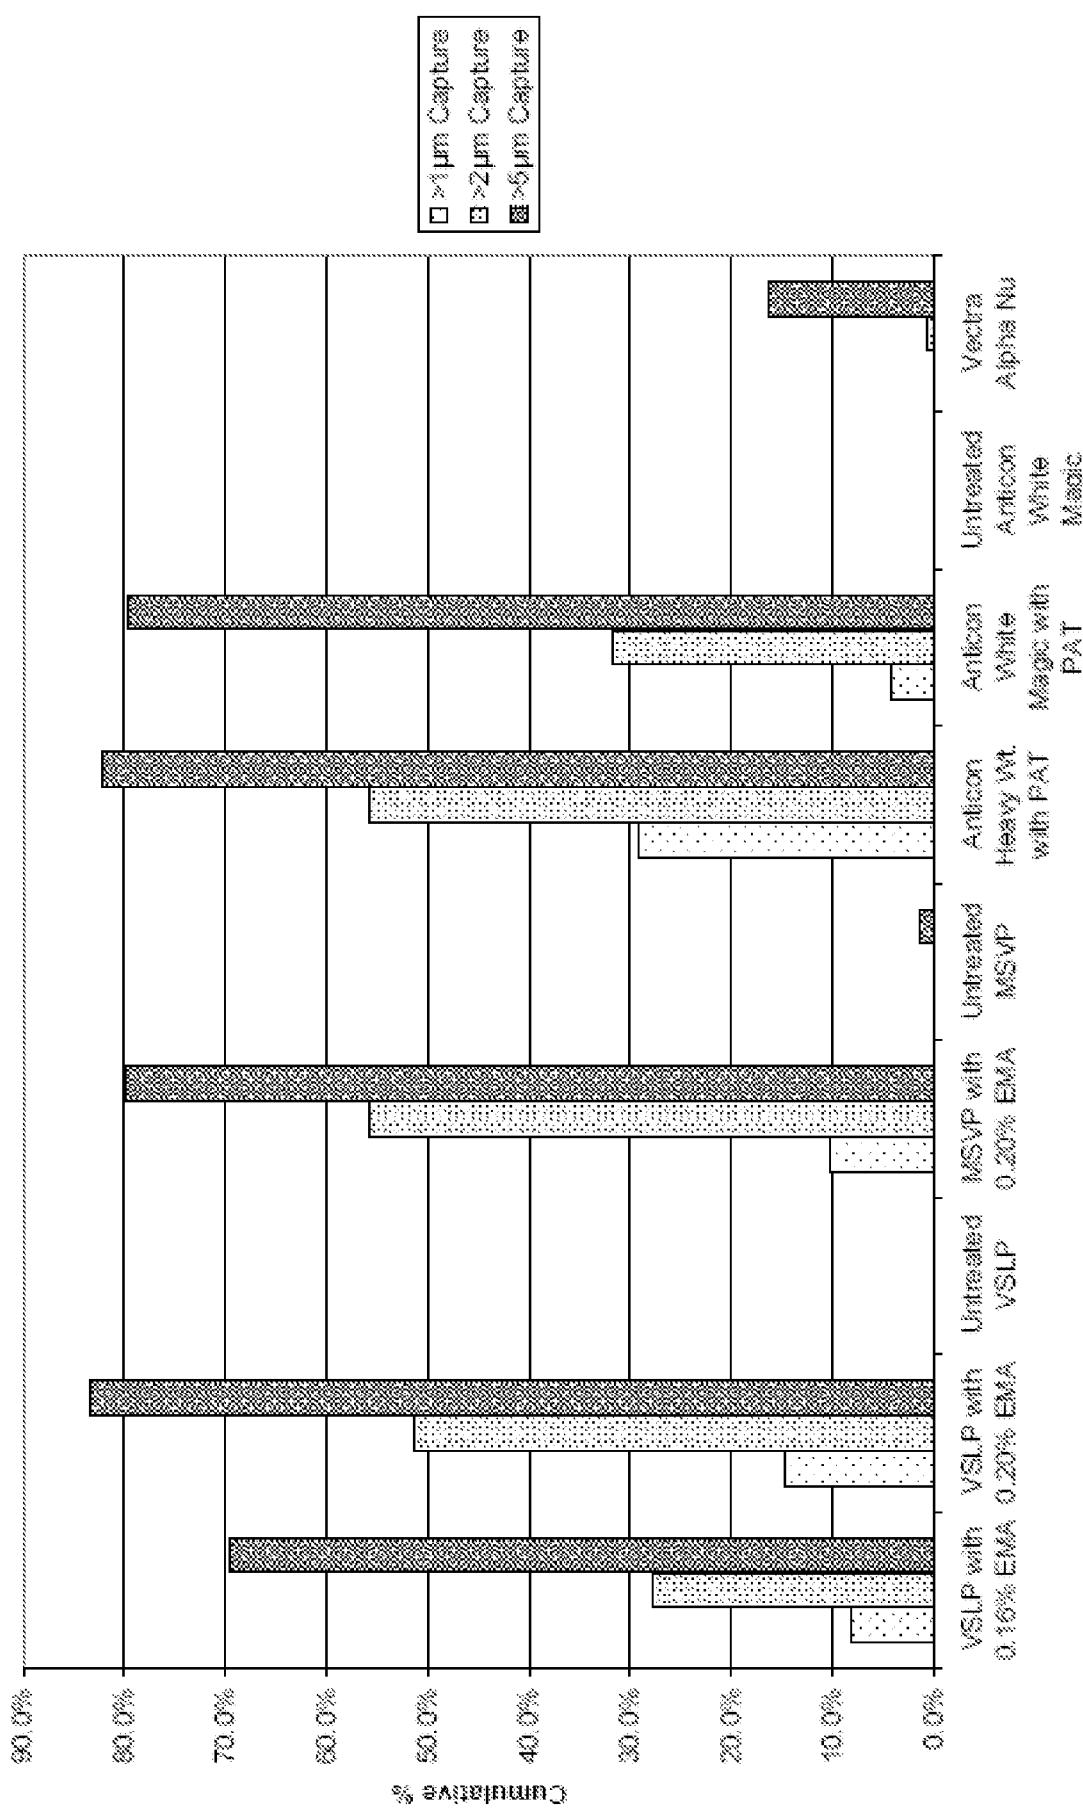


FIG. 9

Particle Retention Of Various Wipes

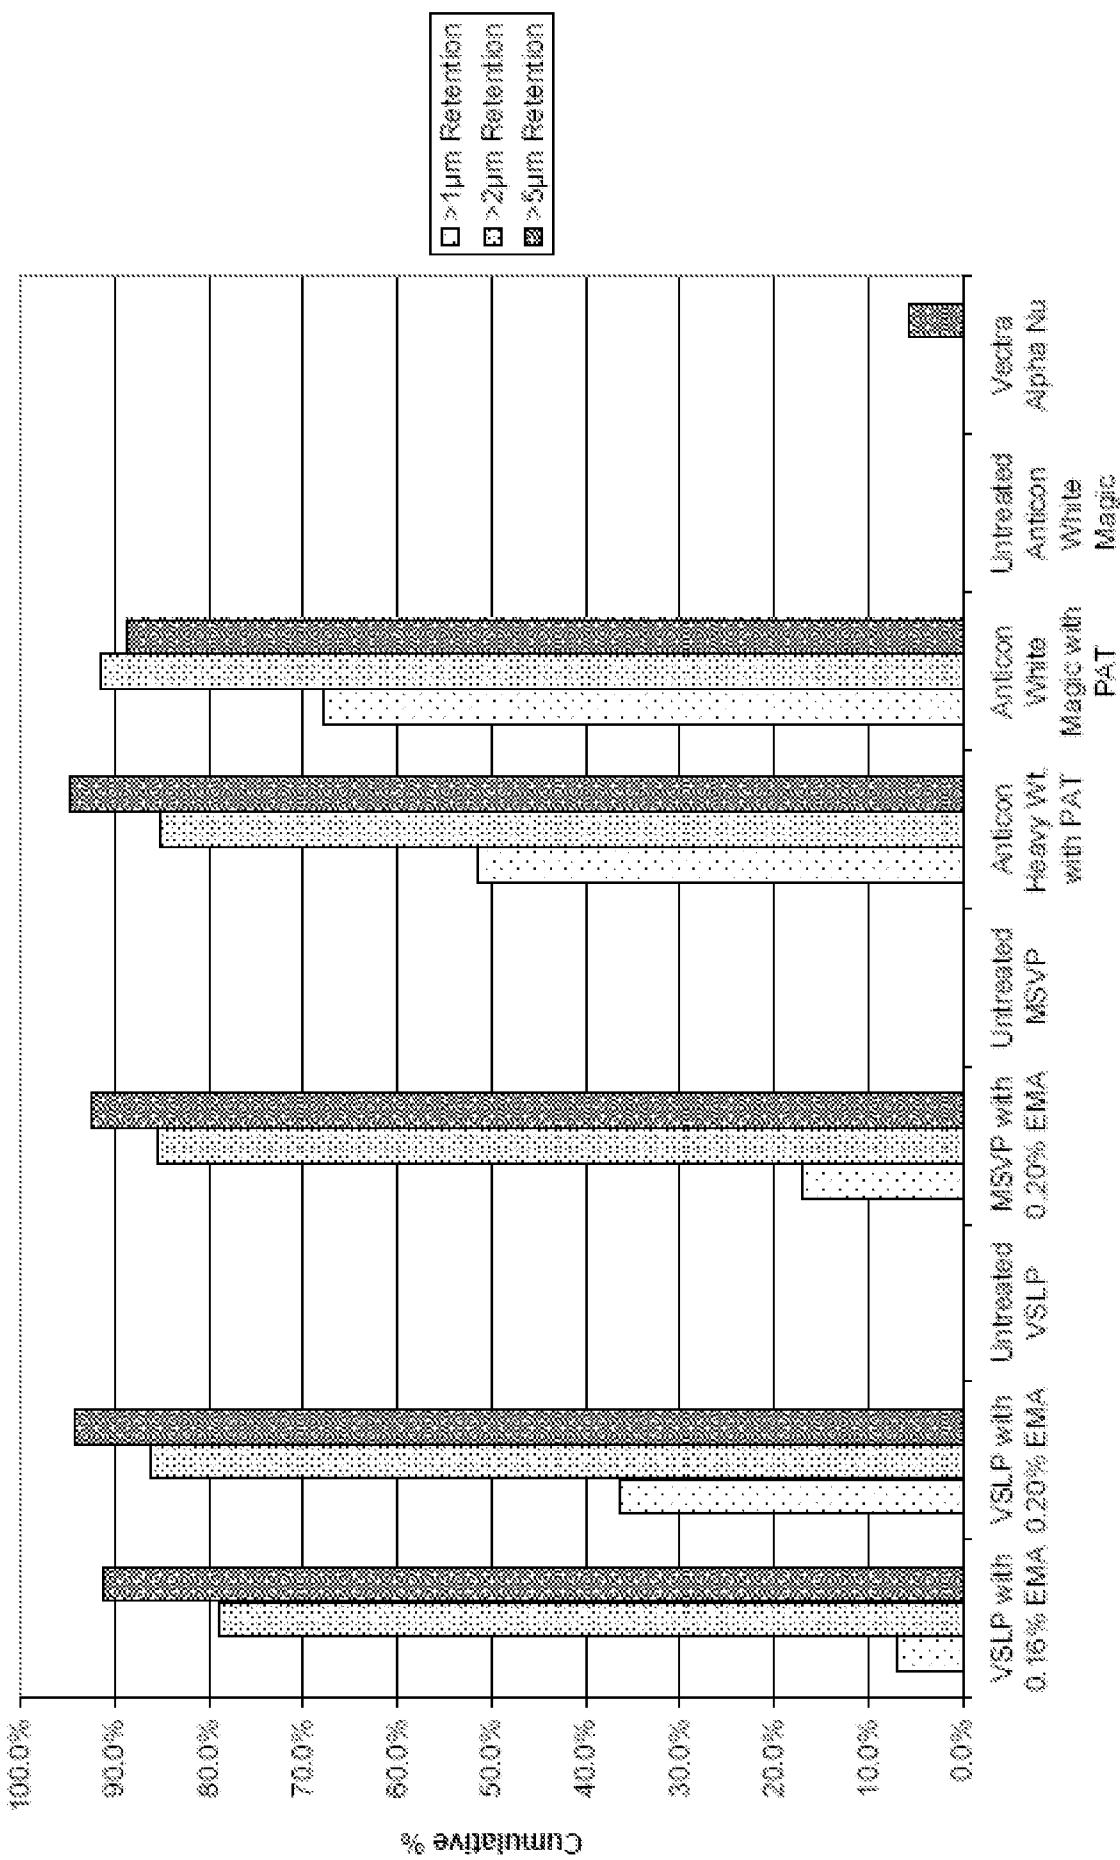


FIG. 10

Sample	Product Name	Manufacturer	Knit Construction	Basis Weight (g/m ²)	Chemical Treatment (%) on wt. of fabric)	Particle Capture (Cumulative %)			Particle Retention (Cumulative %)			Average Strength (pounds)	Treatment Strength Contribution (pounds)
						Biaxial Stake Particle Generation (<0.5 μ m $\times 10^3 / \text{cm}^2$)	Helms Drum Particle Generation (<0.5 μ m / It's wiper)	>1 μ m	>2 μ m	>5 μ m	>10 μ m		
1	ValuSeal® LP	Berkshire	Modified Plisse	155	0.16% EMA	0.85	NT	81.0%	8.1%	27.7%	38.8%	91.3%	22.5
2	ValuSeal® LP	Berkshire	Modified Plisse	143.5	0.20% EMA	0.98	4	89.0%	14.8%	51.3%	38.3%	88.3%	22.9
3	ValuSeal® LP	Berkshire	Modified Plisse	142	None	0.31	NT	41.8%	0.0%	0.0%	0.0%	MC	MC
4	MicroSeal® VP	Berkshire	Interlock	122	0.20% EMA	0.3	2.5	73.4%	10.4%	53.6%	60.0%	16.9%	35.8%
5	Anticon Heavy Wt. w/PA	Milliken & Co.	Mock Plisse	150	UNKNOWN	0.23	13	66.5%	28.1%	55.7%	62.3%	51.5%	65.1%
6	Anticon Heavy Wt.	Milliken & Co.	Mock Plisse	NT	None	NT	NT	NT	NT	NT	NT	NT	NT
7	Anticon White Magic w/PA	Milliken & Co.	Interlock	125	UNKNOWN	0.42	12	72.7%	4.3%	31.7%	79.5%	67.9%	91.5%
8	Anticon White Magic w/PA	Milliken & Co.	Interlock	125	UNKNOWN	0.42	12	72.7%	4.3%	31.7%	79.5%	67.9%	91.5%
9	Anticon White Magic w/PA	Milliken & Co.	Interlock	114	None	0.66	NT	47.1%	0.0%	0.0%	0.0%	MC	MC
10	Anticon Lite w/PA	Milliken & Co.	Mock Plisse	111	UNKNOWN	0.53	17	88.6%	NT	NT	NT	NT	NT
11	Anticon Standard Wt. w/PA	Milliken & Co.	Mock Plisse	125	UNKNOWN	0.35	18	63.3%	NT	NT	NT	NT	NT
12	Vectra Alpha	Enviro-Tex	Interlock	123	UNKNOWN	0.76	NT	22.4%	0.0%	0.7%	16.4%	MC	0.0%

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2010/046677

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61L 15/00 (2010.01)

USPC - 15/209.1

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - A61L 15/00 (2010.01)

USPC - 15/208, 209.1; 206/229; 221/36, 45; 422/28, 292; 424/402, 404, 405

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Patbase, Google Scholar

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2002/0183233 A1 (MITRA et al) 05 December 2002 (05.12.2002) entire document	1-12, 30-56
Y	US 2004/0065072 A1 (ZHU et al) 08 April 2004 (08.04.2004) entire document	1-12, 30-56
Y	US 2009/0000040 A1 (IKEMIZU) 01 January 2009 (01.01.2009) entire document	6, 7, 34, 35
Y	US 2007/0299383 A1 (MURPHY et al) 27 December 2007 (27.12.2007) entire document	13-29, 43-50
Y	US 2002/0102382 A1 (KWONG et al) 01 August 2002 (01.08.2002) entire document	13-56
A	US 2006/0094320 A1 (CHEN et al) 04 May 2006 (04.05.2006) entire document	1-56
A	US 2006/0051266 A1 (GREEN et al) 09 March 2006 (09.03.2006) entire document	1-56

Further documents are listed in the continuation of Box C.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search	Date of mailing of the international search report
15 November 2010	19 NOV 2010
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201	Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774