




(86) Date de dépôt PCT/PCT Filing Date: 2007/06/28
(87) Date publication PCT/PCT Publication Date: 2008/01/10
(85) Entrée phase nationale/National Entry: 2008/12/17
(86) N° demande PCT/PCT Application No.: US 2007/072312
(87) N° publication PCT/PCT Publication No.: 2008/005784
(30) Priorité/Priority: 2006/07/05 (US60/818,591)

(51) Cl.Int./Int.Cl. *B65D 30/22* (2006.01),
B65D 81/34 (2006.01), *B65D 81/38* (2006.01)
(71) Demandeur/Applicant:
GRAPHIC PACKAGING INTERNATIONAL, INC., US
(72) Inventeurs/Inventors:
COLE, LORIN R., US;
MIDDLETON, SCOTT W., US
(74) Agent: MACRAE & CO.

(54) Titre : EMBALLAGE A COMPARTIMENTS MULTIPLES POUR CHAUFFAGE PAR MICRO-ONDES
(54) Title: MULTI-COMPARTMENT MICROWAVE HEATING PACKAGE

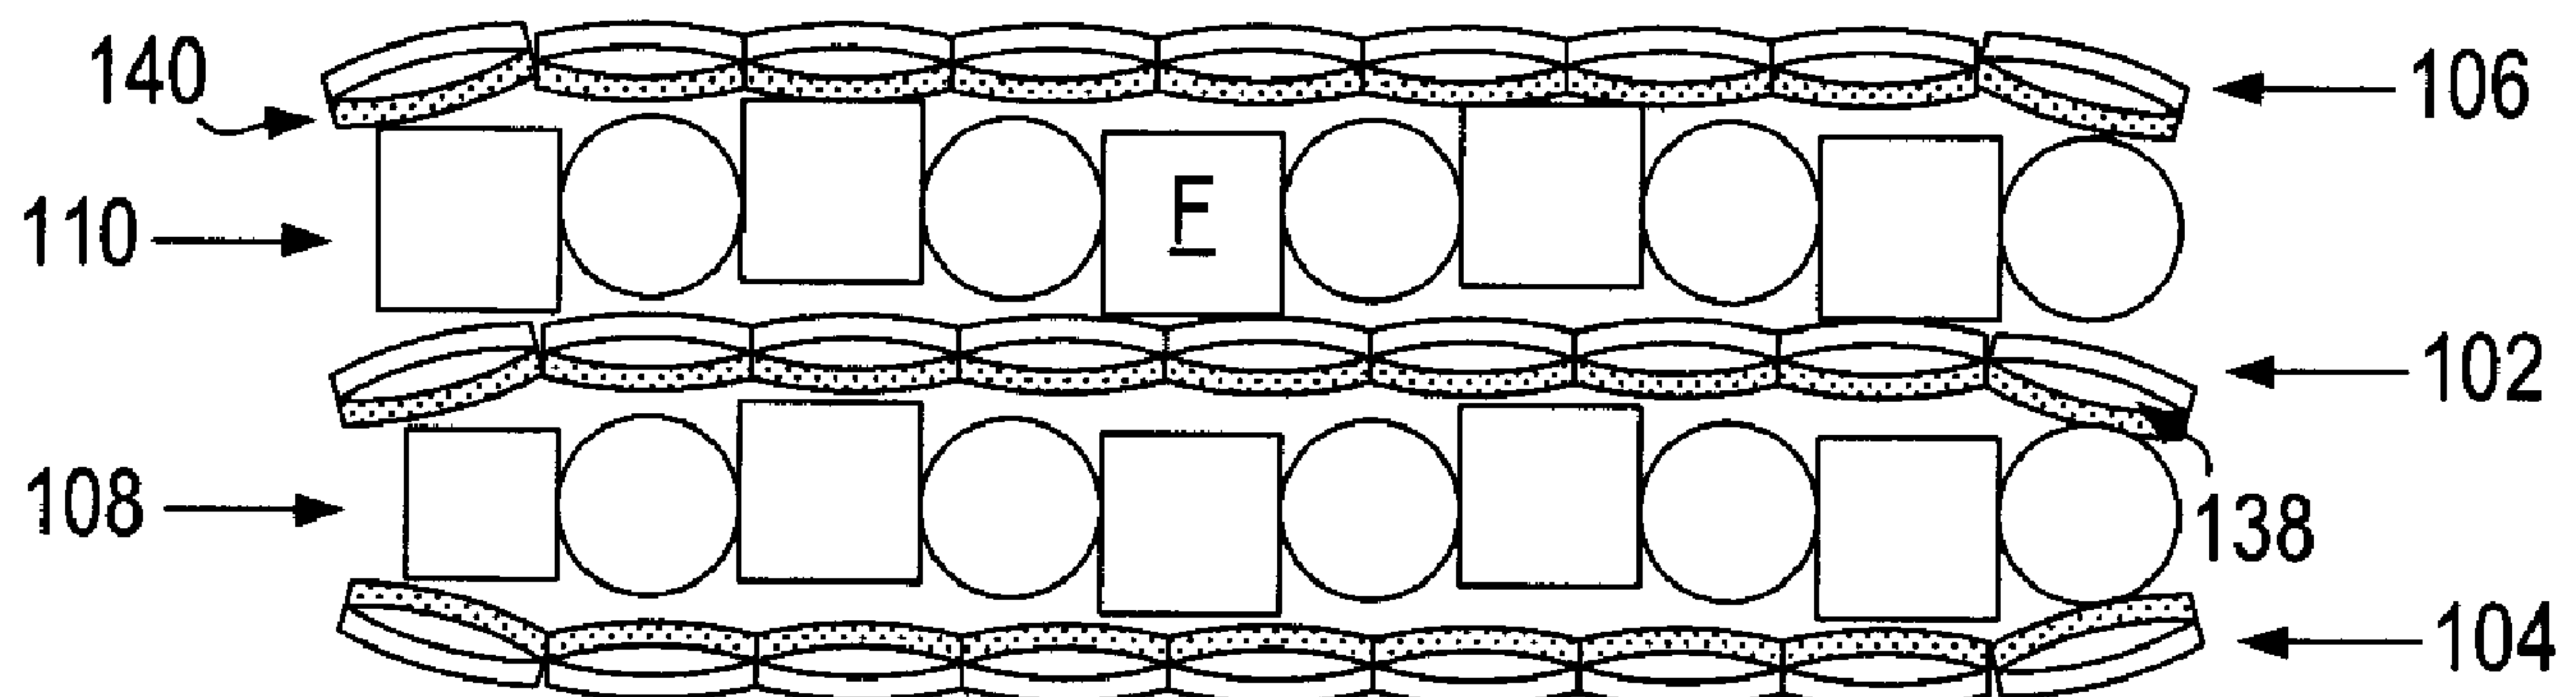

(57) **Abrégé/Abstract:**

A construct (100) for heating, browning, and/or crisping a food item in a microwave oven comprises a plurality of compartments (108, 110), at least one of which is defined at least partially by a microwave energy interactive insulating material that includes a layer of microwave energy interactive material supported on a polymer film, and a second polymer film layer that at least partially defines a plurality of expandable insulating cells that inflate upon exposure to microwave energy.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 January 2008 (10.01.2008)

PCT

(10) International Publication Number
WO 2008/005784 A1

(51) International Patent Classification:

B65D 30/22 (2006.01) *B65D 81/38* (2006.01)

B65D 81/34 (2006.01)

(21) International Application Number:

PCT/US2007/072312

(22) International Filing Date: 28 June 2007 (28.06.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/818,591 5 July 2006 (05.07.2006) US

(71) Applicant (for all designated States except US):

GRAPHIC PACKAGING INTERNATIONAL, INC.
[US/US]; 814 Livingston Court, Marietta, GA 30067 (US).

(72) Inventors: **COLE, Lorin, R.**; 8472 Samuel Drive, Larsen, WI 54947 (US). **MIDDLETON, Scott, W.**; 3065 Pine Ridge Road, Oshkosh, WI 54904 (US).

(74) Agents: **ISAF, Louis, T.** et al.; Womble Carlyle Sandridge & Rice, PLLC, P.O. Box 7037, Atlanta, GA 30357-0037 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG,

ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:


- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MULTI-COMPARTMENT MICROWAVE HEATING PACKAGE

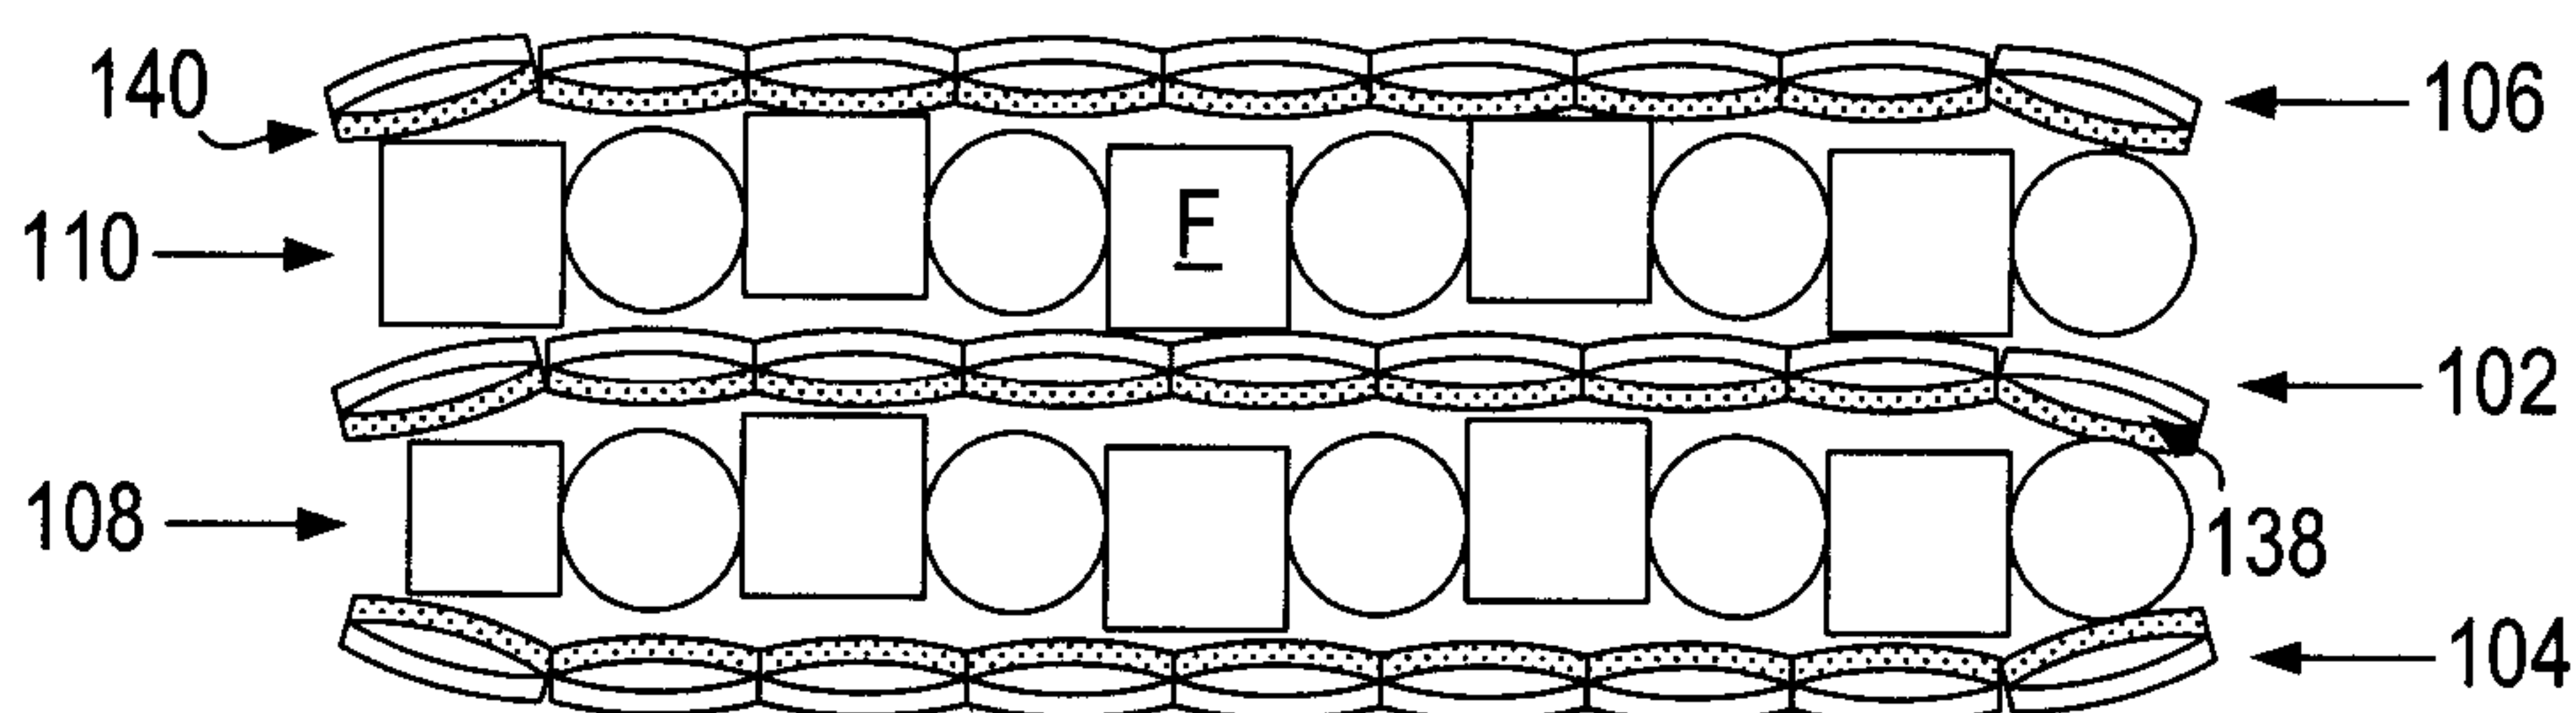

(57) Abstract: A construct (100) for heating, browning, and/or crisping a food item in a microwave oven comprises a plurality of compartments (108, 110), at least one of which is defined at least partially by a microwave energy interactive insulating material that includes a layer of microwave energy interactive material supported on a polymer film, and a second polymer film layer that at least partially defines a plurality of expandable insulating cells that inflate upon exposure to microwave energy.

WO 2008/005784 A1

MULTI-COMPARTMENT MICROWAVE HEATING PACKAGE

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of U.S. Provisional Application No.
5 60/818,591, filed July 5, 2006, which is incorporated by reference herein in its
entirety.

TECHNICAL FIELD

The present invention relates to various materials, packages, constructs,
and systems for heating or cooking a microwavable food item. In particular, the
10 invention relates to various materials, packages, constructs, and systems for
heating, browning, and/or crisping a food item in a microwave oven.

BACKGROUND

Microwave ovens provide a convenient means for heating a variety of
15 food items, including many items that ideally are browned and/or crisped, for
example, French fries, egg rolls, pizza snacks, and chicken nuggets. However,
microwave ovens tend to cook such items unevenly and are unable to achieve
the desired balance of thorough heating and a browned, crisp outer surface.
Many packages have been devised to improve the browning and/or crisping of
20 such items. Such packages often include one or more microwave energy
interactive elements that convert microwave energy to thermal energy to
promote browning and/or crisping of the food item. The food item or items
generally need to be in proximate or intimate contact with the microwave energy
interactive element to achieve the desired level of browning and/or crisping and,
25 as a result, often are heated in a single layer within the package. Unfortunately,
since the floor space within the interior of the microwave oven typically is
limited, such packages often are restricted to use with a small number of food
items. As such, there is a need for improved materials and packages that provide

the desired degree of heating, browning, and/or crisping of greater quantities of food items in a microwave oven.

SUMMARY

5 The present invention is directed generally to various sleeves, pouches, packages, systems, or other constructs (collectively "constructs") for heating browning, and/or crisping one or more food items in a microwave oven, various materials and blanks for forming such constructs, various methods of making such constructs, and methods of heating, browning, and/or crisping one or more
10 food items in a microwave oven.

 In one aspect, each of the various constructs of the invention includes a plurality of chambers or compartments into which one or more individual food items may be placed. At least a portion of at least one chamber includes a microwave energy interactive element that enhances or otherwise alters the
15 microwave heating, browning, and/or crisping of the food item or items placed therein. The microwave energy interactive element may be a browning and/or crisping element, a shielding element, or an energy directing element. In some particular examples, the microwave energy interactive element may be a susceptor, a susceptor film, a microwave energy interactive insulating material,
20 or any combination thereof.

 In another aspect, at least two of the chambers or compartments are capable of being arranged in a substantially stacked or substantially superposed configuration, thereby reducing the base dimensions or footprint of the package. Thus, the various constructs of the invention are capable of providing a greater
25 microwave interactive surface area for heating, browning, and/or crisping the food item(s) without increasing the footprint of the construct. As a result, a greater number of food items, and/or more than one portion of food items, may be heated, browned, and/or crisped effectively and concurrently in a microwave oven.

In one particular aspect, a construct for heating, browning, and/or crisping a food item in a microwave oven comprises a plurality of compartments, at least one of which is defined at least partially by a microwave energy interactive insulating material. The insulating material includes a layer of microwave energy
5 interactive material supported on a first polymer film layer, and a second polymer film layer that at least partially defines a plurality of expandable insulating cells that inflate upon exposure to microwave energy.

In one variation, the microwave energy interactive insulating material further includes a moisture-containing layer superposed with the microwave
10 energy interactive material, and the second polymer film layer is joined to the moisture-containing layer in a predetermined pattern, thereby defining the plurality of expandable insulating cells between the moisture-containing layer and the second polymer film layer. In another variation, the second polymer film layer is joined to the layer of microwave energy interactive material in a
15 predetermined pattern that defines the plurality of expandable insulating cells, and the microwave energy interactive insulating material further includes a gas-generating reagent disposed between the layer of microwave energy interactive material and the second polymer film layer.

In another variation, a first compartment of the plurality of compartments
20 has an interior surface defined at least partially by the first polymer film layer, and a second compartment of the plurality of compartments has an interior surface defined at least partially by the first polymer film layer and at least partially by the second polymer film layer. In still another variation, the first compartment and the second compartment each have an interior surface defined
25 at least partially by the first polymer film layer.

The plurality of compartments may be defined by one or more pieces or sheets of microwave energy interactive insulating material.

In one example, the compartments are defined by a single sheet of microwave energy interactive insulating material, and the sheet comprises a first

section, a second section, and a third section, each having substantially equal dimensions, with the second section being disposed between the first section and the third section. The first section and the second section at least partially define a first compartment, and the first section and the third section at least
5 partially define a second compartment.

The first section, second section, and third section may be joined along at least one respective edge. In one example, the first section, second section, and third section each include a pair of opposed end edges, and are joined along at least one respective end edge of the pair of opposed end edges. In another
10 example, the first section is joined to the second section along a first side edge of the first section, and the third section is joined to the first section along a second side edge of the first section opposite the first side edge of the first section.

In one variation, the sheet of insulating material has a first side comprising the first polymer film layer and a second side comprising the second polymer film layer, a first compartment has an interior surface defined substantially by the
15 first polymer film layer, and a second compartment has an interior surface defined partially by the first polymer film layer and partially by the second polymer film layer. Such a construct may be formed by defining a first section, a second section, and a third section of the sheet, each being substantially equal in size, folding the first section over the second section to form the first
20 compartment, folding the third section over the first section to form the second compartment, and joining the first section, second section, and the third section along at least one respective edge.

In another example, the plurality of compartments are defined by a single
25 sheet of microwave energy interactive insulating material, and the sheet comprises a first section, a second section, a third section, and a fourth section, each being substantially equal in dimension. The second section is disposed between the first section and the third section, and the third section is disposed between the second section and the fourth section. The first section and the

second section at least partially define a first compartment, and the third section and the fourth section at least partially define a second compartment.

The various sections may be joined in any suitable manner. In one example, the first section is joined to the second section along at least one
5 respective edge, and the third section is joined to the fourth section along at least one respective edge. In another example, the first section, second section, third section, and fourth section each include a pair of opposed end edges, the first section and second section are joined along at least one respective end edge of the pair of opposed end edges, and the third section, and fourth section are
10 joined along at least one respective end edge of the pair of opposed end edges. In still another example, the first section is joined to the second section along an edge of the second section adjacent the third section, and the fourth section is joined to the third section along an edge of the third section adjacent the second section.

15 In one variation of this example, the sheet of insulating material has a first side comprising the first polymer film layer and a second side comprising the second polymer film layer, and a first compartment and a second compartment each have an interior surface defined substantially by the first polymer film layer. Such a construct may be formed by defining a first section, a second section, a
20 third section, and a fourth section of the sheet, each being substantially equal in size, folding the first section over the second section to define the first compartment, folding the fourth section over the third section to define the second compartment, joining the first section to the second section, and joining the fourth section to the third section.

25 Other aspects, features, and advantages of the present invention will become apparent from the following description and accompanying figures.

BRIEF DESCRIPTION OF THE FIGURES

The description refers to the accompanying drawings, some of which are schematic, in which like reference characters refer to like parts throughout the several views, and in which:

5 **FIG. 1A** schematically depicts an exemplary construct according to various aspects of the present invention, including a first and second compartment in a stacked configuration;

FIG. 1B schematically depicts the construct of **FIG. 1A** with food items within the first compartment and the second compartment;

10 **FIG. 1C** schematically depicts an exemplary sheet having a plurality of panels that may be used to form the construct of **FIGS. 1A** and **1B**;

FIG. 1D schematically depicts the sheet of **FIG. 1C** in a partially folded configuration;

FIG. 1E schematically depicts the sheet of **FIG. 1C** in a substantially folded
15 configuration;

FIG. 1F schematically depicts the sheet of **FIG. 1C** formed from a microwave energy interactive insulating material, in a partially folded configuration, similar to that of **FIG. 1D**;

FIG. 1G schematically depicts another exemplary sheet having a plurality
20 of panels that may be used to form the construct of **FIGS. 1A** and **1B**;

FIG. 1H schematically depicts the construct of **FIGS. 1A** and **1B** formed from the sheet of **FIG. 1F**, upon exposure to microwave energy;

FIG. 2A schematically depicts another exemplary construct according to various aspects of the present invention, including a first and second
25 compartment in a stacked configuration;

FIG. 2B schematically depicts the construct of **FIG. 1B** in an unstacked, open, side-by-side configuration;

FIG. 2C schematically depicts an exemplary sheet having a plurality of panels that may be used to form the construct of **FIG. 2A**;

FIG. 2D schematically depicts the sheet of **FIG. 2C** in a partially folded configuration;

FIG. 2E schematically depicts the sheet of **FIG. 2C** in a substantially folded configuration;

5 **FIG. 2F** schematically depicts the sheet **FIG. 2C** formed from a microwave energy interactive insulating material, in a substantially folded configuration, similar to that of **FIG. 2E**;

10 **FIG. 3A** is a schematic cross-sectional view of an exemplary microwave energy interactive insulating material that may be used to form a construct in accordance with various aspects of the present invention;

FIG. 3B schematically depicts the exemplary microwave energy interactive insulating material of **FIG. 3A**, in the form of a cut sheet;

FIG. 3C schematically depicts the exemplary microwave energy interactive insulating sheet of **FIG. 3B**, upon exposure to microwave energy;

15 **FIG. 3D** is a schematic cross-sectional view of an exemplary variation of the exemplary microwave energy interactive insulating material of **FIG. 3A**;

FIG. 4 depicts a schematic cross-sectional view of another exemplary microwave energy interactive insulating material that may be used to form a construct in accordance with various aspects of the present invention;

20 **FIG. 5** depicts a schematic cross-sectional view of yet another exemplary microwave energy interactive insulating material that may be used to form a construct in accordance with various aspects of the present invention;

25 **FIG. 6A** depicts a schematic cross-sectional view of still another exemplary microwave energy interactive insulating material that may be used to form a construct in accordance with various aspects of the present invention; and

FIG. 6B depicts the exemplary microwave energy interactive insulating sheet of **FIG. 6A**, upon exposure to microwave energy.

DESCRIPTION

The present invention may be illustrated with reference to the figures. For purposes of simplicity, like numerals may be used to describe like features. It will be understood that where a plurality of similar features are depicted, not all
5 of such features are necessarily labeled on each figure. While various examples are shown and described in detail herein, it also will be understood that any of the various features may be used with any construct described herein or contemplated hereby, in any combination.

FIGS. 1A and 1B illustrate an exemplary construct according to various
10 aspects of the invention. In this example, the construct comprises a pouch **100** formed from a plurality of panels **102, 104, 106** that define a first chamber or compartment **108** and a second chamber or compartment **110** for receiving one or more food items **F** therein (**FIG. 1B**). More particularly, panels **102** and **104** at least partially define compartment **108**, and panels **102** and **106** at least partially
15 define compartment **110**. In this example, the various panels **102, 104, 106** are at least partially joined, and in some examples, substantially joined or completely joined, along respective peripheral areas **112, 114, and 116** to form a somewhat rectangular pouch **100** having a closed end **118** and an open end **120**. However, it will be understood that the construct may have any shape, any number of
20 compartments, and any construction as needed or desired for a particular application. Thus, for example, while the pouch shown in **FIGS. 1A and 1B** includes two compartments or chambers, various other constructs may include three, four, five, six, or any other number of compartments.

The construct **100** of **FIGS. 1A and 1B** may be formed using any suitable
25 process or technique including various sequences of steps. By way of example, and not limitation, the pouch **100** may be formed from a single, substantially continuous, planar sheet **122** including a first section, segment, portion, or panel **102**, a second section, segment, portion, or panel **104**, and a third section, segment, portion, or panel **106** defined by edges **124, 126, 128, 130** and creases,

fold lines, or other lines of weakening **132**, **134**, as shown in **FIG. 1C**. The creases **132**, **134** are positioned such that each of the first panel **102**, second panel **104**, and third panel **106** are approximately equal in size. As shown in **FIG. 1D**, the first panel **102** may be folded inwardly along crease **132** until edge **124** is aligned
5 substantially with crease **134**. As shown in **FIG. 1E**, the third panel **106** then may be folded inwardly along crease **134** until edge **126** is aligned substantially with crease **132**. In this arrangement, the first panel **102**, second panel **104**, and third panel **106** are substantially superposed.

If desired, a thermal, adhesive, ultrasonic, or other type of bond may be
10 formed along or proximate to respective creases **132**, **134** to secure the various panels into their respective positions and to provide dimensional stability along peripheral areas **112**, **116** of the resulting construct **100**, as shown in **FIGS. 1A** and **1B**. Furthermore, if desired, a thermal, adhesive, ultrasonic, or other type of bond also may be formed along or proximate to edge **128** to form pouch **100**, for
15 example, as shown with peripheral area **114** in **FIGS. 1A** and **1B**. If the pouch **100** is intended to serve as a container for the food items prior to heating, the open end **120** of the pouch **100** also may be sealed or otherwise closed (not shown) after the food items are placed inside.

In this and other aspects of the invention, numerous other methods of
20 forming the pouch are contemplated. For example, the pouch may be formed from a three panel sheet folded in alternating directions, resembling an accordion. As another example, the pouch may be formed from two sheets, each forming all or a portion of a panel. In one particular example, a first sheet may be folded in half to form a first compartment and a second sheet may be joined to
25 the first sheet to form a second compartment. As still another example, the pouch may be formed from three sheets or panels, joined to one another along at least a portion of respective edges. Still other possibilities are contemplated.

Various materials or structures may be used to form a sheet or panel used in the construct of the invention. For example, at least a portion of the pouch

100 may include or may be formed from one or more microwave energy interactive elements. In one particular example, at least a portion of the construct is formed from a microwave energy interactive insulating material. As used herein, the term “microwave energy interactive insulating material” (or
5 “microwave interactive insulating material”, “insulating material”, “microwave energy interactive insulating structure”, or “insulating structure”) refers any combination of layers of materials that is responsive to microwave energy and is capable of providing some degree of thermal insulation when used to heat a food item. Such insulating materials alter the effect of microwave energy to enhance
10 the heating, browning, and/or crisping of an adjacent food item, and also provide thermal insulation to prevent loss of thermal energy to the ambient heating environment.

As illustrated schematically in **FIG. 1F**, the pouch **100** of **FIGS. 1A** and **1B** may be formed at least partially from a sheet of insulating material **136** including
15 a plurality of cells **138** (sometimes referred to as “expandable cells”, “insulating cells”, or “expandable insulating cells”, shown schematically with dashed lines in **FIG. 1F**) that are capable of expanding when the pouch **100** is exposed to microwave energy. The insulating material **136** also includes a susceptor film **140** (shown schematically by stippling in **FIG. 1F**) that forms at least one side of the
20 sheet **136** and, therefore, at least a portion of the interior surface **142** of at least one compartment **108**, **110** of the construct **100**. More particularly, in this example, the susceptor film **140** defines the upper portion of the interior surface **142** of compartment **110** (i.e., the interior face of panel **106**) and the upper and lower portions of the interior surface **142** of compartment **108** (i.e., the interior
25 face of each of panels **102** and **104**). It will be understood that use of the terms “upper” and “lower” is merely for ease of description with reference to the drawings, and is not intended to be limiting in any manner. The susceptor film **140** comprises a thin layer of microwave interactive material supported on a polymer film. The microwave energy interactive material tends to absorb

microwave energy, thereby generating heat at the interface with a food item. Such elements often are used to promote browning and/or crisping of the surface of a food item (sometimes referred to as a “browning and/or crisping element”).

5 Several specific examples of insulating materials are described herein with reference to **FIGS. 3A-6B**. However, other insulating materials are contemplated hereby. Additionally, it is understood that numerous other types of materials may be used to form a construct according to the invention, including, but not limited to, susceptors and susceptor films without insulating cells. For example,
10 some of such materials, for example, material **144**, may include opposed sides **146, 148** or surfaces formed from susceptor films, as illustrated schematically in **FIG. 1G**, such that the interior surface and exterior surface of each chamber of the resulting construct (not shown) is formed at least partially from a susceptor film. Thus, in various examples, the construct may comprise a susceptor, a
15 microwave energy interactive insulating material, a multi-layer susceptor material, a multi-layer microwave energy interactive insulating material, any other microwave energy interactive element, or any combination thereof.

Returning to **FIGS. 1A** and **1B**, to use the pouch **100** according to one exemplary method, one or more food items **F**, which may be the same type or
20 may include different types, may be inserted through the open end **120** into the compartments **108, 110** of the pouch **100**. Alternatively, the pouch **100** may be provided with the food items **F** inside. In the example shown in **FIG. 1B**, a plurality of French fries **F** are seated within both compartments **108, 110**. If desired, the French fries **F** may be positioned substantially in a single layer to
25 increase the amount of intimate or proximate contact with the susceptor film that forms at least a portion of the interior surface **142** of the compartments **108, 110**.

The pouch **100** then may be placed into a microwave oven (not shown) and seated on an outer face of one of the outer panels, in this example, outer

panel **104**, such that compartment **110** overlies compartment **108** in a superposed relation. In this configuration, the French fries **F** in compartment **108** are seated on the interior face of outer panel **104**, and the French fries **F** in compartment **110** are seated on the side of the dividing panel **102** that faces
5 compartment **110**.

When the construct **100** is exposed to microwave energy, the microwave interactive material in the susceptor film **140** heats and causes the insulating cells **138** to expand, as shown schematically in **FIG. 1H** (in cross-sectional view), and as will be discussed further with reference to **FIGS. 3A-6B**. In doing so, the
10 susceptor film **140** (schematically illustrated by stippling) bulges away from the inflated cells **138**. In compartment **108**, the susceptor film **140** defines the upper and lower interior surface, each of which bulges towards the food item **F** (illustrated schematically with squares and circles). In contrast, since the susceptor film **140** defines only the upper interior surface of compartment **110**,
15 the susceptor film **140** will bulge towards the top surface of the food item **F**. In either case, bringing the susceptor film **140** into closer proximity to the food item enhances the browning and/or crisping of the surface of the French fries **F**. Furthermore, the expanded insulating cells **138** may reduce the loss of thermal energy to the ambient heating environment, which also may enhance heating,
20 browning, and/or crisping of the food item **F**. After heating, the French fries **F** may be consumed directly from the pouch **100** or may be removed prior to consumption.

It will be understood that in this and other aspects of the invention, by providing a plurality of substantially superposed chambers or compartments, a
25 greater quantity of food items may be heated, browned, and/or crisped concurrently. Stated otherwise, the various constructs of the invention increase the effective surface area available for heating, browning, and/or crisping a plurality of food items. For example, considering the pouch of **FIG. 1A**, and assuming that each of the outer panels and the dividing panel has substantially

the same unbonded length L and width W , and therefore footprint or area A , the total interior surface area available for contact with the food item is about four times A , or about $4A$. More particularly, using the material **136** of **FIG. 1F**, the total interior surface area of susceptor film **140** is about three times A , or about **3A**. In contrast, a single compartment package (not shown) having the same footprint or base area, A , would have a total interior surface area of about two times A , or $2A$, available for contact with the food item. While it is conceivable that the same quantity of French fries or other food items could fit into a single compartment construct, such items would not likely be heated, browned, and/or crisped as effectively. Where a three compartment construct having the same base area or footprint is used, the available contact area may be as much as about six times A , or about $6A$, and so on. Thus, according to the invention, a quantity of food items can be heated, browned, and/or crisped both concurrently and more effectively.

FIGS. 2A and **2B** depict another exemplary construct according to various aspects of the invention. In this example, the construct comprises a pouch **200** formed from a plurality of panels **202**, **204**, **206**, **208** that define chambers or compartments **210**, **212** for receiving one or more food items. More particularly, panels **202**, **204** at least partially define compartment **210**, and panels **206**, **208** at least partially define compartment **212**. The compartments **210**, **212** each have a first, closed end **214** defined by adjoined peripheral areas **216**, and a second, open end **218**. The compartments **210**, **212** are joined hingedly along peripheral region **220** and are capable of being arranged in a substantially stacked or superposed configuration, as shown in **FIG. 2A**, or in a substantially open configuration, as shown in **FIG. 2B**.

The construct **200** of **FIGS. 2A** and **2B** may be formed using any suitable process or technique including various sequences of steps. According to one exemplary method, the pouch **200** may be formed from a single sheet **222** (**FIG. 2C**) including a first section, segment, portion, or panel **202**, a second section,

segment, portion, or panel **204**, a third section, segment, portion, or panel **206**, and a fourth section, segment, portion, or panel **208** collectively defined by edges **224**, **226**, **228**, **230** and creases or fold lines **232**, **234**, **236**. The creases **232**, **234**, **236**, may be positioned such that panels **202**, **204**, **208**, **210** are each
5 approximately equal in size. As shown in **FIG. 2D**, the first panel **202** may be folded inwardly along crease **232** until edge **224** is aligned substantially with or proximate to crease **234**. Likewise, as shown in **FIG. 2E**, the fourth panel **208** then may be folded inwardly along crease **236** until edge **226** is aligned substantially with or proximate to crease **234**. In this arrangement, the first panel
10 **202** and second panel **204** are superposed substantially, and the third panel **206** and the fourth panel **208** are superposed substantially. If desired, one or more thermal, adhesive, ultrasonic or other type of bond areas or lines may be formed along or adjacent crease **234** to secure the various panels in their respective positions and to provide dimensional stability to the resulting construct **200**, for
15 example, bond area **220** in **FIGS. 2A** and **2B**. Furthermore, if desired, a thermal, adhesive, ultrasonic, or other type of bond also may be formed along or proximate edge **228** to form pouch **200**, for example, bond area **216** in **FIGS. 2A** and **2B**. If desired, the compartments **210**, **212** may be adjoined in a stacked configuration along creases **232**, **236** (not shown). Further, if the pouch **200** is
20 intended to serve as a container for the food items prior to heating, the open end **218** of the pouch also may be sealed (not shown) after the food items are inserted into the pouch. Numerous other methods for forming the pouch from one, two, three, or four sheets are contemplated hereby.

At least a portion of the pouch **200** may include or may be formed from
25 one or more microwave energy interactive elements. For example, as illustrated schematically in **FIG. 2F**, the pouch **200** of **FIGS. 2A** and **2B** may be formed at least partially from a somewhat flexible, microwave energy interactive insulating material **238** including a plurality of insulating cells **240** (shown schematically in **FIG. 2F** with dashed lines) that expand upon exposure to microwave energy. The

insulating material **238** also includes a susceptor film **242** (shown schematically in **FIG. 2F** by stippling) that forms at least a portion of the interior surface **244** of at least one compartment **210**, **212**. Examples of such materials are described with reference to **FIGS. 3A-6B**. However, numerous other materials may be used.

5 To use the pouch **200** according to one exemplary method, one or more of food items (not shown) may be inserted into the pouch **200** through the open end **218** or may be provided in the pouch **200**. The compartments **210**, **212** may be arranged in a substantially stacked configuration, as shown in **FIG. 2A**, and placed into a microwave oven, although it is contemplated that the food items
10 may be heated with the pouch **200** in an opened, unstacked configuration, as shown in **FIG. 2B**. In the example shown in **FIG. 2A**, compartment **210** overlies compartment **212**. However, compartment **212** may overlie **210** if desired.

 In any configuration, when the pouch **200** is exposed to microwave energy, the microwave energy interactive material in the susceptor film **242**
15 heats and causes the insulating cells **240** to inflate (not shown). In doing so, the susceptor film **242** that forms at least a portion of the interior surface **244** of the compartments **210**, **212** may bulge toward the food item, thereby enhancing the heating, browning, and/or crisping of the food item therein. After heating, the food item may be consumed from the pouch or may be removed prior to
20 consumption.

FIGS. 3A-6B illustrate various examples of microwave energy interactive materials that may be suitable for use with the present invention. The various insulating materials may include multiple layers or components, including both microwave energy responsive or interactive elements or components and
25 microwave energy transparent or inactive elements or components, provided that each is resistant to softening, scorching, combusting, or degrading at typical microwave oven heating temperatures, for example, at from about 250°F to about 425°F. The insulating material may include both microwave energy

responsive or interactive components, and microwave energy transparent or inactive components.

In one aspect, the insulating material comprises one or more susceptor layers in combination with one or more expandable insulating cells, as discussed particularly in connection with **FIGS. 1F** and **2F**. Such materials sometimes may be referred to herein as “expandable cell insulating materials”. Additionally, the insulating material may include one or more microwave energy transparent or inactive materials to provide dimensional stability, to improve ease of handling the microwave energy interactive material, and/or to prevent contact between the microwave energy interactive material and the food item.

In another aspect, the insulating material may comprise of microwave energy interactive material supported on a first polymer film layer, a moisture-containing layer superposed with the microwave energy interactive material, and a second polymer film layer joined to the moisture-containing layer in a predetermined pattern using an adhesive, chemical or thermal bonding, or other fastening agent or process, thereby forming one or more closed cells between the moisture-containing layer and the second polymer film layer. The microwave energy interactive material may serve as a susceptor. The closed cells expand or inflate in response to being exposed to microwave energy and cause the susceptor to bulge and deform toward the food item.

While not wishing to be bound by theory, it is believed that the heat generated by the susceptor causes moisture in the moisture-containing layer to evaporate, thereby exerting pressure on the adjacent layers. As a result, the expandable cells bulge outwardly away from the expanding gas, thereby allowing the expandable cell insulating material to conform more closely to the contours of the surface of the food item. As a result, the heating, browning, and/or crisping of the food item can be enhanced, even if the surface of the food item is somewhat irregular.

Further, the water vapor, air, and other gases contained in the closed cells provide insulation between the food item and the ambient environment of the microwave oven, thereby increasing the amount of sensible heat that stays within or is transferred to the food item. Such insulating materials also may help
5 to retain moisture in the food item when cooking in the microwave oven, thereby improving the texture and flavor of the food item. Additional benefits and aspects of such materials are described in PCT Publication No. WO 2003/66435, U.S. Patent No. 7,019,271, and U.S. Patent Application Publication No. 20060113300 A1, each of which is incorporated by reference herein in its
10 entirety.

Several exemplary insulating materials are depicted in **FIGS. 3A-6B**. As discussed above, the various panels, for example, panels **102, 104, 106, 202, 204, 208, 210**, that form the constructs of the invention, for example, constructs **100, 200**, may comprise, may consist essentially of, or may consist of such structures.
15 In each of the examples shown herein, it should be understood that the layer widths are not necessarily shown in perspective. In some instances, for example, the adhesive layers may be very thin with respect to other layers, but are nonetheless shown with some thickness for purposes of clearly illustrating the arrangement of layers. Furthermore, it is noted that, for purposes of simplicity,
20 and not limitation, the predetermined pattern of adhesion, bonding, or fastening may be generally referred to herein as “lines of adhesion” or a “pattern of adhesion” or a “patterned adhesive”. However, it will be understood that there are numerous methods of forming the closed cells, and that such methods are contemplated hereby.

25 **FIG. 3A** depicts an exemplary microwave energy interactive insulating material **300** that may be suitable for use in forming all or a portion of a construct according to the invention. In this example, a thin layer of microwave energy interactive material **302** that serves as a susceptor is supported on a first polymer film **304** (collectively forming a “susceptor film”) and bonded by lamination with

an adhesive **306** (or otherwise) to a dimensionally stable substrate **308**, for example, paper. The substrate **308** is bonded to a second polymer film **310** using a patterned adhesive **312** or other material, thereby forming a plurality of expandable insulating cells **314**. The insulating material **300** may be cut and
5 provided as a substantially flat, multi-layered sheet **316**, as shown in **FIG. 3B**.

As the layer microwave energy interactive material **302** (i.e., the susceptor) heats upon impingement by microwave energy, water vapor and other gases typically held in the substrate **308**, for example, paper, and any air trapped in the thin space between the second polymer film **310** and the
10 substrate **308** in the closed cells **314**, expand, as shown in **FIG. 3C**. The resulting insulating material **316'** has a quilted or pillowed or lofted top surface **318** and bottom surface **320**. When microwave heating has ceased, the cells **314** typically deflate and return to a somewhat flattened state.

If desired, the insulating material **300** may be modified to form a structure
15 **322** that includes an additional paper or polymer film layer **324** joined to the first polymer film layer **304** using an adhesive **326** or other suitable material, as shown in **FIG. 3D**.

FIG. 4 illustrates another exemplary insulating material **400**. The material **400** includes a polymer film layer **402**, a susceptor layer **404**, an adhesive layer
20 **406**, and a paper layer **408**. Additionally, the material **400** may include a second polymer film layer **410**, an adhesive **412**, and a paper layer **414**. The layers may be adhered or affixed by a patterned adhesive **416** that defines a plurality of closed expandable cells **418**.

FIG. 5 illustrates yet another exemplary insulating material **500** that may
25 be suitable for use with the invention. In this example, the insulating material **500** includes a pair of adjoined, symmetrical layer arrangements. If desired, the two symmetrical arrangements may be formed by folding one layer arrangement onto itself. The first symmetrical layer arrangement, beginning at the top of the drawing, comprises a polymer film layer **502**, a susceptor layer **504**, an adhesive

layer 506, and a paper or paperboard layer 508. The adhesive layer 506 joins the polymer film 502 and the susceptor layer 504 to the paperboard layer 508. The second symmetrical layer arrangement, beginning at the bottom of the drawing, also comprises a polymer film layer 510, a susceptor layer 512, an adhesive layer 514, and a paper or paperboard layer 516. A patterned adhesive layer 518 is provided between the two paper layers 508 and 516, and defines a pattern of closed cells 520 configured to expand when exposed to microwave energy.

By using an insulating material 500 having one susceptor 504 and 512 on each side of the expandable insulating cells 520, more heat is generated, thereby achieving greater expansion of the cells 520. As a result, such a material is able to conform more closely to the contours of a food item than an insulating material having a single susceptor layer, thereby potentially enhancing the heating, browning, crisping, and insulating properties of the construct.

It will be recognized that each of the exemplary insulating materials depicted in FIGS. 3A-5 include a moisture-containing layer (e.g. paper) that is believed to release at least a portion of the vapor that inflates the expandable cells. However, it is contemplated that expandable cell insulating structures that inflate without such moisture-containing layers also may be used in accordance with the invention.

FIG. 6A illustrates one example of an expandable cell insulating material 600 that inflates without the use of a moisture-containing layer, for example, paper. In this example, one or more reagents are used to generate a gas that expands the cells of the insulating material. For example, the reagents may comprise sodium bicarbonate (NaHCO_3) and a suitable acid. When exposed to heat, the reagents react to produce carbon dioxide. As another example, the reagent may comprise a blowing agent. Examples of blowing agents that may be suitable include, but are not limited to, p-p'-oxybis(benzenesulphonylhydrazide), azodicarbonamide, and p-toluenesulfonylsemicarbazide. However, it will be

understood that numerous other gas-generating reagents and released gases are contemplated hereby.

In the example shown in **FIG. 6A**, a thin layer of microwave interactive material **602** is supported on a first polymer film **604** to form a susceptor film **606**. One or more reagents **608**, optionally within a coating, lie adjacent at least a portion of the layer of microwave interactive material **602**. The reagent **608** coated susceptor film **606** is joined to a second polymer film **610** using a patterned adhesive **612** or other material, or using thermal bonding, ultrasonic bonding, or any other suitable technique, such that closed cells **614** (shown as a void) are formed in the material **600**. The microwave energy insulating material **600** may be cut into a sheet **616** (shown expanded in **FIG. 6B**) and used to form a construct according to the invention.

As discussed in connection with the other exemplary insulating materials, as the microwave interactive material **602** heats upon impingement by microwave energy, water vapor or other gases are released from or generated by the reagent **608**. The resulting gas applies pressure on the susceptor film **606** on one side and the second polymer film **610** on the other side of the closed cells **614**. Each side of the material **600** reacts simultaneously, but uniquely, to the heating and vapor expansion to form a pillowed or quilted insulating material **616**. This expansion may occur within 1 to 15 seconds in an energized microwave oven, and in some instances, may occur within 2 to 10 seconds. Even without a paper or paperboard layer, the gases released from or generated by the reagent is sufficient both to inflate the expandable cells and to absorb any excess heat from the microwave energy interactive material. Additional examples of “paperless” insulating materials are provided in U.S. Patent Application Publication No. 20060289521A1, which is incorporated by reference herein in its entirety.

Typically, when microwave heating has ceased, the cells or quilts may deflate and return to a somewhat flattened state. However, if desired, the

insulating material may comprise a durably expandable microwave energy interactive insulating material. As used herein, the term “durably expandable microwave energy interactive insulating material” or “durably expandable insulating material” refers to an insulating material that includes expandable cells
5 that tend to remain at least partially, substantially, or completely inflated after exposure to microwave energy has been terminated. Such materials may be used to form multi-functional packages and other constructs that can be used to heat a food item, to provide a surface for safe and comfortable handling of the food item, and to contain the food item after heating. Thus, a durably
10 expandable insulating material may be used to form a package or construct that facilitates storage, preparation, transportation, and consumption of a food item, even “on the go”.

In one aspect, a substantial portion or number of the plurality of cells remain substantially expanded for at least about 1 minute after exposure to
15 microwave energy has ceased. In another aspect, a substantial portion or number of the plurality of cells remain substantially expanded for at least about 5 minutes after exposure to microwave energy has ceased. In still another aspect, a substantial portion or number of the plurality of cells remain substantially expanded for at least about 10 minutes after exposure to microwave energy has
20 ceased. In yet another aspect, a substantial portion or number of the plurality of cells remain substantially expanded for at least about 30 minutes after exposure to microwave energy has ceased. It will be understood that not all of the expandable cells in a particular construct or package must remain inflated for the insulating material to be considered to be “durable”. Instead, only a sufficient
25 number of cells must remain inflated to achieve the desired objective of the package or construct in which the material is used.

For example, where a durably expandable insulating material is used to form all or a portion of a package or construct for storing a food item, heating, browning, and/or crisping the food item in a microwave oven, removing it from

the microwave oven, and removing it from the construct, only a sufficient number of cells need to remain at least partially inflated for the time required to heat, brown, and/or crisp the food item and remove it from the microwave oven after heating. In contrast, where a durably expandable insulating material is used
5 to form all or a portion of a package or construct for storing a food item, heating, browning, and/or crisping the food item in a microwave oven, removing the food item from the microwave oven, and consuming the food item within the construct, a sufficient number of cells need to remain at least partially inflated for the time required to heat, brown, and/or crisp the food item, remove it from
10 the microwave oven after heating, and transport the food item until the food item and/or construct has cooled to a surface temperature comfortable for contact with the hands of the user.

Any of the durably expandable insulating materials of the present invention may be formed at least partially from one or more barrier materials, for
15 example, polymer films, that substantially reduce or prevent the transmission of oxygen, water vapor, or other gases from the expanded cells. Examples of such materials are described below. However, the use of other materials is contemplated hereby.

It will be understood that any of the microwave energy interactive
20 insulating materials described herein or contemplated hereby may include an adhesive pattern or thermal bond pattern that is selected to enhance cooking of a particular food item. For example, where the food item is a larger item, the adhesive pattern may be selected to form substantially uniformly shaped expandable cells. Where the food item is a small item, the adhesive pattern may
25 be selected to form a plurality of different sized cells to allow the individual items to be variably contacted on their various surfaces. While several examples are provided herein, it will be understood that numerous other patterns are contemplated hereby, and the pattern selected will depend on the heating, browning, crisping, and insulating needs of the particular food item.

If desired, multiple layers of insulating materials may be used to enhance the insulating properties of the construct and, therefore, enhance the browning and crisping of the food item. Where multiple layers are used, the layers may remain separate or may be joined using any suitable process or technique, for example, thermal bonding, adhesive bonding, ultrasonic bonding or welding, mechanical fastening, or any combination thereof. In one example, two sheets of an insulating material may be arranged so that their respective susceptor film layers are facing away from each other. In another example, two sheets of an insulating material may be arranged so that their respective susceptor film layers are facing towards each other. In still another example, multiple sheets of an insulating material may be arranged in a like manner and superposed. In other examples, multiple sheets of various insulating materials are superposed in any other configuration as needed or desired for a particular application.

The degree of joining or bonding of the multiple layers may vary for a given application. For example, if the greatest degree of loft is desirable, it might be beneficial to use a discontinuous, patterned adhesive bond that will not restrict the expansion and flexing of the layers within the material. As another example, where structural stability is desirable, a continuous adhesive bond might provide the desired result.

Numerous materials or components may be suitable for use in forming the various materials and structures used in the constructs of the invention.

The microwave energy interactive material may be an electroconductive or semiconductive material, for example, a metal or a metal alloy provided as a metal foil; a vacuum deposited metal or metal alloy; or a metallic ink, an organic ink, an inorganic ink, a metallic paste, an organic paste, an inorganic paste, or any combination thereof. Examples of metals and metal alloys that may be suitable for use with the present invention include, but are not limited to, aluminum, chromium, copper, inconel alloys (nickel-chromium-molybdenum alloy with

niobium), iron, magnesium, nickel, stainless steel, tin, titanium, tungsten, and any combination or alloy thereof.

Alternatively, the microwave energy interactive material may comprise a metal oxide. Examples of metal oxides that may be suitable for use with the present invention include, but are not limited to, oxides of aluminum, iron, and tin, used in conjunction with an electrically conductive material where needed. Another example of a metal oxide that may be suitable for use with the present invention is indium tin oxide (ITO). ITO can be used as a microwave energy interactive material to provide a heating effect, a shielding effect, a browning and/or crisping effect, or a combination thereof. For example, to form a susceptor, ITO may be sputtered onto a clear polymer film. The sputtering process typically occurs at a lower temperature than the evaporative deposition process used for metal deposition. ITO has a more uniform crystal structure and, therefore, is clear at most coating thicknesses. Additionally, ITO can be used for either heating or field management effects. ITO also may have fewer defects than metals, thereby making thick coatings of ITO more suitable for field management than thick coatings of metals, such as aluminum.

Alternatively still, the microwave energy interactive material may comprise a suitable electroconductive, semiconductive, or non-conductive artificial dielectric or ferroelectric. Artificial dielectrics comprise conductive, subdivided material in a polymer or other suitable matrix or binder, and may include flakes of an electroconductive metal, for example, aluminum.

The substrate typically comprises an electrical insulator, for example, a polymer film or other polymeric material. As used herein the terms "polymer", "polymer film", and "polymeric material" include, but are not limited to, homopolymers, copolymers, such as for example, block, graft, random, and alternating copolymers, terpolymers, etc. and blends and modifications thereof. Furthermore, unless otherwise specifically limited, the term "polymer" shall include all possible geometrical configurations of the molecule. These

configurations include, but are not limited to isotactic, syndiotactic, and random symmetries.

The thickness of the film typically may be from about 35 gauge to about 10 mil. In one aspect, the thickness of the film is from about 40 to about 80 gauge. In another aspect, the thickness of the film is from about 45 to about 50 gauge. In still another aspect, the thickness of the film is about 48 gauge. Examples of polymer films that may be suitable include, but are not limited to, polyolefins, polyesters, polyamides, polyimides, polysulfones, polyether ketones, cellophanes, or any combination thereof. Other non-conducting substrate materials such as paper and paper laminates, metal oxides, silicates, cellulose, or any combination thereof, also may be used.

In one example, the polymer film comprises polyethylene terephthalate (PET). Polyethylene terephthalate films are used in commercially available susceptors, for example, the QWIKWAVE[®] Focus susceptor and the MICRORITE[®] susceptor, both available from Graphic Packaging International (Marietta, Georgia). Examples of polyethylene terephthalate films that may be suitable for use as the substrate include, but are not limited to, MELINEX[®], commercially available from DuPont Teijon Films (Hopewell, Virginia), SKYROL, commercially available from SKC, Inc. (Covington, Georgia), and BARRIALOX PET, available from Toray Films (Front Royal, VA), and QU50 High Barrier Coated PET, available from Toray Films (Front Royal, VA).

The polymer film may be selected to impart various properties to the microwave interactive structure, for example, printability, heat resistance, or any other property. As one particular example, the polymer film may be selected to provide a water barrier, oxygen barrier, or a combination thereof. Such barrier film layers may be formed from a polymer film having barrier properties or from any other barrier layer or coating as desired. Suitable polymer films may include, but are not limited to, ethylene vinyl alcohol, barrier nylon, polyvinylidene chloride, barrier fluoropolymer, nylon 6, nylon 6,6, coextruded nylon

6/EVOH/nylon 6, silicon oxide coated film, barrier polyethylene terephthalate, or any combination thereof.

One example of a barrier film that may be suitable for use with the present invention is CAPRAN® EMBLEM 1200M nylon 6, commercially available
5 from Honeywell International (Pottsville, Pennsylvania). Another example of a barrier film that may be suitable is CAPRAN® OXYSHIELD OBS monoaxially oriented coextruded nylon 6/ethylene vinyl alcohol (EVOH)/nylon 6, also commercially available from Honeywell International. Yet another example of a barrier film that may be suitable for use with the present invention is DARTEK® N-
10 201 nylon 6,6, commercially available from Enhance Packaging Technologies (Webster, New York). Additional examples include BARRIALOX PET, available from Toray Films (Front Royal, VA) and QU50 High Barrier Coated PET, available from Toray Films (Front Royal, VA), referred to above.

Still other barrier films include silicon oxide coated films, such as those
15 available from Sheldahl Films (Northfield, Minnesota). Thus, in one example, a susceptor may have a structure including a film, for example, polyethylene terephthalate, with a layer of silicon oxide coated onto the film, and ITO or other material deposited over the silicon oxide. If needed or desired, additional layers or coatings may be provided to shield the individual layers from damage during
20 processing.

The barrier film may have an oxygen transmission rate (OTR) as measured using ASTM D3985 of less than about 20 cc/m²/day. In one aspect, the barrier film has an OTR of less than about 10 cc/m²/day. In another aspect, the barrier film has an OTR of less than about 1 cc/m²/day. In still another aspect, the
25 barrier film has an OTR of less than about 0.5 cc/m²/day. In yet another aspect, the barrier film has an OTR of less than about 0.1 cc/m²/day.

The barrier film may have a water vapor transmission rate (WVTR) of less than about 100 g/m²/day as measured using ASTM F1249. In one aspect, the barrier film has a WVTR of less than about 50 g/m²/day. In another aspect, the

barrier film has a WVTR of less than about 15 g/m²/day. In yet another aspect, the barrier film has a WVTR of less than about 1 g/m²/day. In still another aspect, the barrier film has a WVTR of less than about 0.1 g/m²/day. In a still further aspect, the barrier film has a WVTR of less than about 0.05 g/m²/day.

5 Other non-conducting substrate materials such as metal oxides, silicates, cellulose, or any combination thereof, also may be used in accordance with the present invention.

The microwave energy interactive material may be applied to the substrate in any suitable manner, and in some instances, the microwave energy
10 interactive material is printed on, extruded onto, sputtered onto, evaporated on, or laminated to the substrate. The microwave energy interactive material may be applied to the substrate in any pattern, and using any technique, to achieve the desired heating effect of the food item. For example, the microwave energy interactive material may be provided as a continuous or discontinuous layer or
15 coating including circles, loops, hexagons, islands, squares, rectangles, octagons, and so forth. Examples of various patterns and methods that may be suitable for use with the present invention are provided in U.S. Patent Nos. 6,765,182; 6,717,121; 6,677,563; 6,552,315; 6,455,827; 6,433,322; 6,410,290; 6,251,451; 6,204,492; 6,150,646; 6,114,679; 5,800,724; 5,759,418; 5,672,407; 5,628,921;
20 5,519,195; 5,420,517; 5,410,135; 5,354,973; 5,340,436; 5,266,386; 5,260,537; 5,221,419; 5,213,902; 5,117,078; 5,039,364; 4,963,420; 4,936,935; 4,890,439; 4,775,771; 4,865,921; and Re. 34,683, each of which is incorporated by reference herein in its entirety. Although particular examples of patterns of microwave energy interactive material are shown and described herein, it should be
25 understood that other patterns of microwave energy interactive material are contemplated by the present invention.

The various constructs of the invention also may include one or more a dimensionally stable, moisture-containing, microwave energy transparent layers. For example, the constructs may include a paper or paper-based material

generally having a basis weight of from about 15 to about 60 lbs/ream (lbs/3000 sq. ft.), for example, from about 20 to about 40 lbs/ream. In one particular example, the paper has a basis weight of about 25 lbs/ream. Where a somewhat less flexible heating sheet is desired, the heating sheet or other structures may include a paperboard material generally having a basis weight of from about 60 to about 330 lbs/ream, for example, from about 80 to about 140 lbs/ream, or from about 100 to about 150 lbs/ream. The paperboard generally may have a thickness of from about 6 to about 30 mils, for example, from about 12 to about 28 mils. In one particular example, the paperboard has a thickness of about 12 mils. Any suitable paperboard may be used, for example, a solid bleached or solid unbleached sulfate board, such as SUS® board, commercially available from Graphic Packaging International.

If desired, any of the various constructs of the invention may include one or more discontinuities or microwave energy transparent or inactive regions to prevent overheating or charring of the heating sheet, dimensionally stable disk, tray, or any other component proximate the heating sheet during the heating cycle. The inactive regions may be designed to be microwave inactive, for example, by forming these areas without a microwave energy interactive material, by removing microwave energy interactive material from these areas, or by deactivating the microwave energy interactive material in these areas.

Further still, one or more panels, portions of panels, or portions of the construct may be designed to be microwave energy transparent to ensure that the microwave energy is focused efficiently on the areas to be browned and/or crisped, rather than being lost to portions of the food item not intended to be browned and/or crisped or to the heating environment. For example, the peripheral edges of the construct or other areas not expected to be in contact with the food item (e.g., one or more of bonded areas **112, 114, 116, 216, 220**) may not include a microwave energy interactive material, or may include a microwave energy interactive material that has been deactivated.

It will be understood that with some combinations of elements and materials, the microwave interactive material or element may have a grey or silver color this is visually distinguishable from the substrate or the other components in the structure. However, in some instances, it may be desirable to provide a structure having a uniform color and/or appearance. Such a structure may be more aesthetically pleasing to a consumer, particularly when the consumer is accustomed to packages or containers having certain visual attributes, for example, a solid color, a particular pattern, and so on. Thus, for example, the present invention contemplates using a silver or grey toned adhesive to join the microwave interactive elements to the substrate, using a silver or grey toned substrate to mask the presence of the silver or grey toned microwave interactive element, using a dark toned substrate, for example, a black toned substrate, to conceal the presence of the silver or grey toned microwave interactive element, overprinting the metallized side of the web with a silver or grey toned ink to obscure the color variation, printing the non-metallized side of the structure with a silver or grey ink or other concealing color in a suitable pattern or as a solid color layer to mask or conceal the presence of the microwave interactive element, or any other suitable technique or combination thereof.

Although specific examples are illustrated herein, the various constructs of the invention may have any shape, for example, triangular, square, rectangular, circular, oval, pentagonal, hexagonal, octagonal, or any other shape. The shape of the construct may be determined by the shape and portion size of the food item or items being heated, and it should be understood that different packages are contemplated for different food items and combinations of food items, for example, dough-based food items, breaded food items, sandwiches, pizzas, French fries, soft pretzels, chicken nuggets or strips, fried chicken, pizza bites, cheese sticks, pastries, doughs, egg rolls, soups, dipping sauces, gravy, vegetables, and so forth.

It also will be understood that in this and other aspects of the invention, one or more different food items may be placed into the various compartments for heating, browning, and/or crisping of thereof. As such, the various compartments may have the same dimensions, different dimensions, and may be
5 formed from the same materials or different materials. In one example, a construct for heating, browning, and/or crisping a plurality of food items includes at least two compartments, one for a sandwich and one for French fries. In other examples, various constructs may be formed to heat, brown, and/or crisp a sausage biscuit and hash browns; eggs and bacon; grilled cheese and potato
10 "tots"; French toast and sausage; chicken strips and biscuits; egg rolls and potstickers; pot pie and fruit cobbler; or one or more servings of any sweet or savory food item, or any combination thereof.

If desired, any of such food items may be provided within the sleeve, pouch, or other construct, which optionally may be sealed. Alternatively, any of
15 such food items may accompany the sleeve, pouch, or other construct within one or more other packages or overwraps.

Although certain embodiments of this invention have been described with a certain degree of particularity, those skilled in the art could make numerous alterations to the disclosed embodiments without departing from the spirit or
20 scope of this invention. All directional references (e.g., upper, lower, upward, downward, left, right, leftward, rightward, top, bottom, above, below, vertical, horizontal, clockwise, and counterclockwise) are used only for identification purposes to aid the reader's understanding of the various embodiments of the present invention, and do not create limitations, particularly as to the position,
25 orientation, or use of the invention unless specifically set forth in the claims. Joinder references (e.g., joined, attached, coupled, connected, and the like) are to be construed broadly and may include intermediate members between a connection of elements and relative movement between elements. As such,

joinder references do not necessarily imply that two elements are connected directly and in fixed relation to each other.

It will be recognized by those skilled in the art, that various elements discussed with reference to the various embodiments may be interchanged to
5 create entirely new embodiments coming within the scope of the present invention. It is intended that all matter contained in the above description or shown in the accompanying drawings shall be interpreted as illustrative only and not limiting. Changes in detail or structure may be made without departing from the spirit of the invention as defined in the appended claims. The detailed
10 description set forth herein is not intended nor is to be construed to limit the present invention or otherwise to exclude any such other embodiments, adaptations, variations, modifications, and equivalent arrangements of the present invention.

Accordingly, it will be readily understood by those persons skilled in the
15 art that, in view of the above detailed description of the invention, the present invention is susceptible of broad utility and application. Many adaptations of the present invention other than those herein described, as well as many variations, modifications, and equivalent arrangements will be apparent from or reasonably suggested by the present invention and the above detailed description thereof,
20 without departing from the substance or scope of the present invention. While the present invention is described herein in detail in relation to specific aspects, it is to be understood that this detailed description is only illustrative and exemplary of the present invention and is made merely for purposes of providing a full and enabling disclosure of the present invention. The detailed description
25 set forth herein is not intended nor is to be construed to limit the present invention or otherwise to exclude any such other embodiments, adaptations, variations, modifications, and equivalent arrangements of the present invention as set forth in the appended claims.

What is claimed is:

1. A construct for heating, browning, and/or crisping at least one food item in a microwave oven, comprising:

a plurality of compartments, at least one of the compartments being at least partially defined by a microwave energy interactive insulating material including

a layer of microwave energy interactive material supported on a first polymer film layer, and

a second polymer film layer that at least partially defines a plurality of expandable insulating cells that inflate upon exposure to microwave energy.

2. The construct of claim 1, wherein

the microwave energy interactive insulating material further includes a moisture-containing layer superposed with the microwave energy interactive material, and

the second polymer film layer is joined to the moisture-containing layer in a predetermined pattern, thereby defining the plurality of expandable insulating cells between the moisture-containing layer and the second polymer film layer.

3. The construct of claim 1, wherein

the second polymer film layer is joined to the layer of microwave energy interactive material in a predetermined pattern that defines the plurality of expandable insulating cells, and

the microwave energy interactive insulating material further includes a gas-generating reagent disposed between the layer of microwave energy interactive material and the second polymer film layer.

4. The construct of claim 1, wherein
 - a first compartment of the plurality of compartments has an interior surface defined at least partially by the first polymer film layer, and
 - a second compartment of the plurality of compartments has an interior surface defined at least partially by the first polymer film layer and at least partially by the second polymer film layer.
5. The construct of claim 1, wherein a first compartment and a second compartment of the plurality of compartments each have an interior surface defined at least partially by the first polymer film layer.
6. The construct of claim 1, wherein the plurality of compartments are defined by at least two sheets of microwave energy interactive insulating material.
7. The construct of claim 1, wherein
 - the plurality of compartments are defined by a single sheet of microwave energy interactive insulating material,
 - the sheet comprises a first section, a second section, and a third section, each having substantially equal dimensions, the second section being disposed between the first section and the third section,
 - the first section and the second section at least partially define a first compartment of the plurality of compartments, and
 - the first section and the third section at least partially define a second compartment of the plurality of compartments.
8. The construct of claim 7, wherein the first section, second section, and third section are joined along at least one respective edge.

9. The construct of claim 7, wherein
the first section, second section, and third section each include a pair of
opposed end edges, and
the first section, second section, and third section are joined along at least
one respective end edge of the pair of opposed end edges.
10. The construct of claim 7, wherein
the first section is joined to the second section along a first side edge of
the first section, and
the third section is joined to the first section along a second side edge of
the first section opposite the first side edge of the first section.
11. The construct of claim 7, wherein
the sheet has a first side comprising the first polymer film layer and a
second side comprising the second polymer film layer,
the first compartment has an interior surface defined substantially by the
first polymer film layer, and
the second compartment has an interior surface defined partially by the
first polymer film layer and partially by the second polymer film layer.
12. A method of making the construct of claim 11, comprising:
defining the first section, the second section, and the third section of the
sheet;
folding the first section over the second section to form the first
compartment;
folding the third section over the first section to form the second
compartment; and
joining the first section, second section, and the third section along at
least one respective edge.

13. The construct of claim 1, wherein
the plurality of compartments are defined by a single sheet of microwave energy interactive insulating material,
the sheet comprises a first section, a second section, a third section, and a fourth section, each being substantially equal in dimension, the second section being disposed between the first section and the third section, and the third section being disposed between the second section and the fourth section,
the first section and the second section at least partially define a first compartment of the plurality of compartments, and
the third section and the fourth section at least partially define a second compartment of the plurality of compartments.
14. The construct of claim 13, wherein
the first section is joined to the second section along at least one respective edge, and
the third section is joined to the fourth section along at least one respective edge.
15. The construct of claim 13, wherein
the first section, second section, third section, and fourth section each include a pair of opposed end edges,
the first section and second section are joined along at least one respective end edge of the pair of opposed end edges, and
the third section, and fourth section are joined along at least one respective end edge of the pair of opposed end edges.
16. The construct of claim 13, wherein

the first section is joined to the second section along an edge of the second section adjacent the third section, and

the fourth section is joined to the third section along an edge of the third section adjacent the second section.

17. The construct of claim 13, wherein

the sheet has a first side comprising the first polymer film layer and a second side comprising the second polymer film layer, and

the first compartment and the second compartment each have an interior surface defined substantially by the first polymer film layer.

18. A method of making the construct of claim 17, comprising:

defining the first section, the second section, the third section, and the fourth section of the sheet;

folding the first section over the second section to form the first compartment;

folding the fourth section over the third section to form the second compartment;

joining the first section to the second section; and

joining the fourth section to the third section.

19. A method of using the construct of claim 1, comprising:

inserting at least one food item into at least one of the plurality of compartments;

arranging the construct such that the compartments are in a superposed configuration; and

exposing the food items in the construct to microwave energy.

20. A multi-compartment construct for heating, browning, and/or crisping at least one food item in a microwave oven, comprising:

a first compartment overlying and connected to a second compartment, wherein

the first compartment is at least partially defined by a first panel,

the second compartment is at least partially defined by a second panel,

a third panel is positioned between the first panel and the second panel and at least partially defines at least one of the first compartment and the second compartment, and

the first panel, second panel, and third panel each comprise a microwave energy interactive material that generates heat in response to being exposed to microwave energy.

21. The multi-compartment construct of claim 20, wherein

the first compartment is foldably connected to the second compartment,

the third panel at least partially defines the first compartment,

a fourth panel is positioned between the third panel and the second panel,

the fourth panel at least partially defines the second compartment, and

the fourth panel comprises a microwave energy interactive material that generates heat in response to being exposed to microwave energy.

22. The multi-compartment construct of claim 20, comprising a substantially flexible pouch.

23. The multi-compartment construct of claim 20, wherein the first panel, second panel, and third panel are part of a single sheet of material that has been folded, whereby the single sheet of material includes each of the first panel, second panel, and third panel.

24. The multi-compartment construct of claim 23, wherein the sheet of material comprises a microwave energy interactive insulating material.

25. A construct for heating, browning, and/or crisping at least one food item in a microwave oven, comprising:

a plurality of compartments; and

a microwave energy interactive material that generates heat in response to being exposed to microwave energy.

1/11

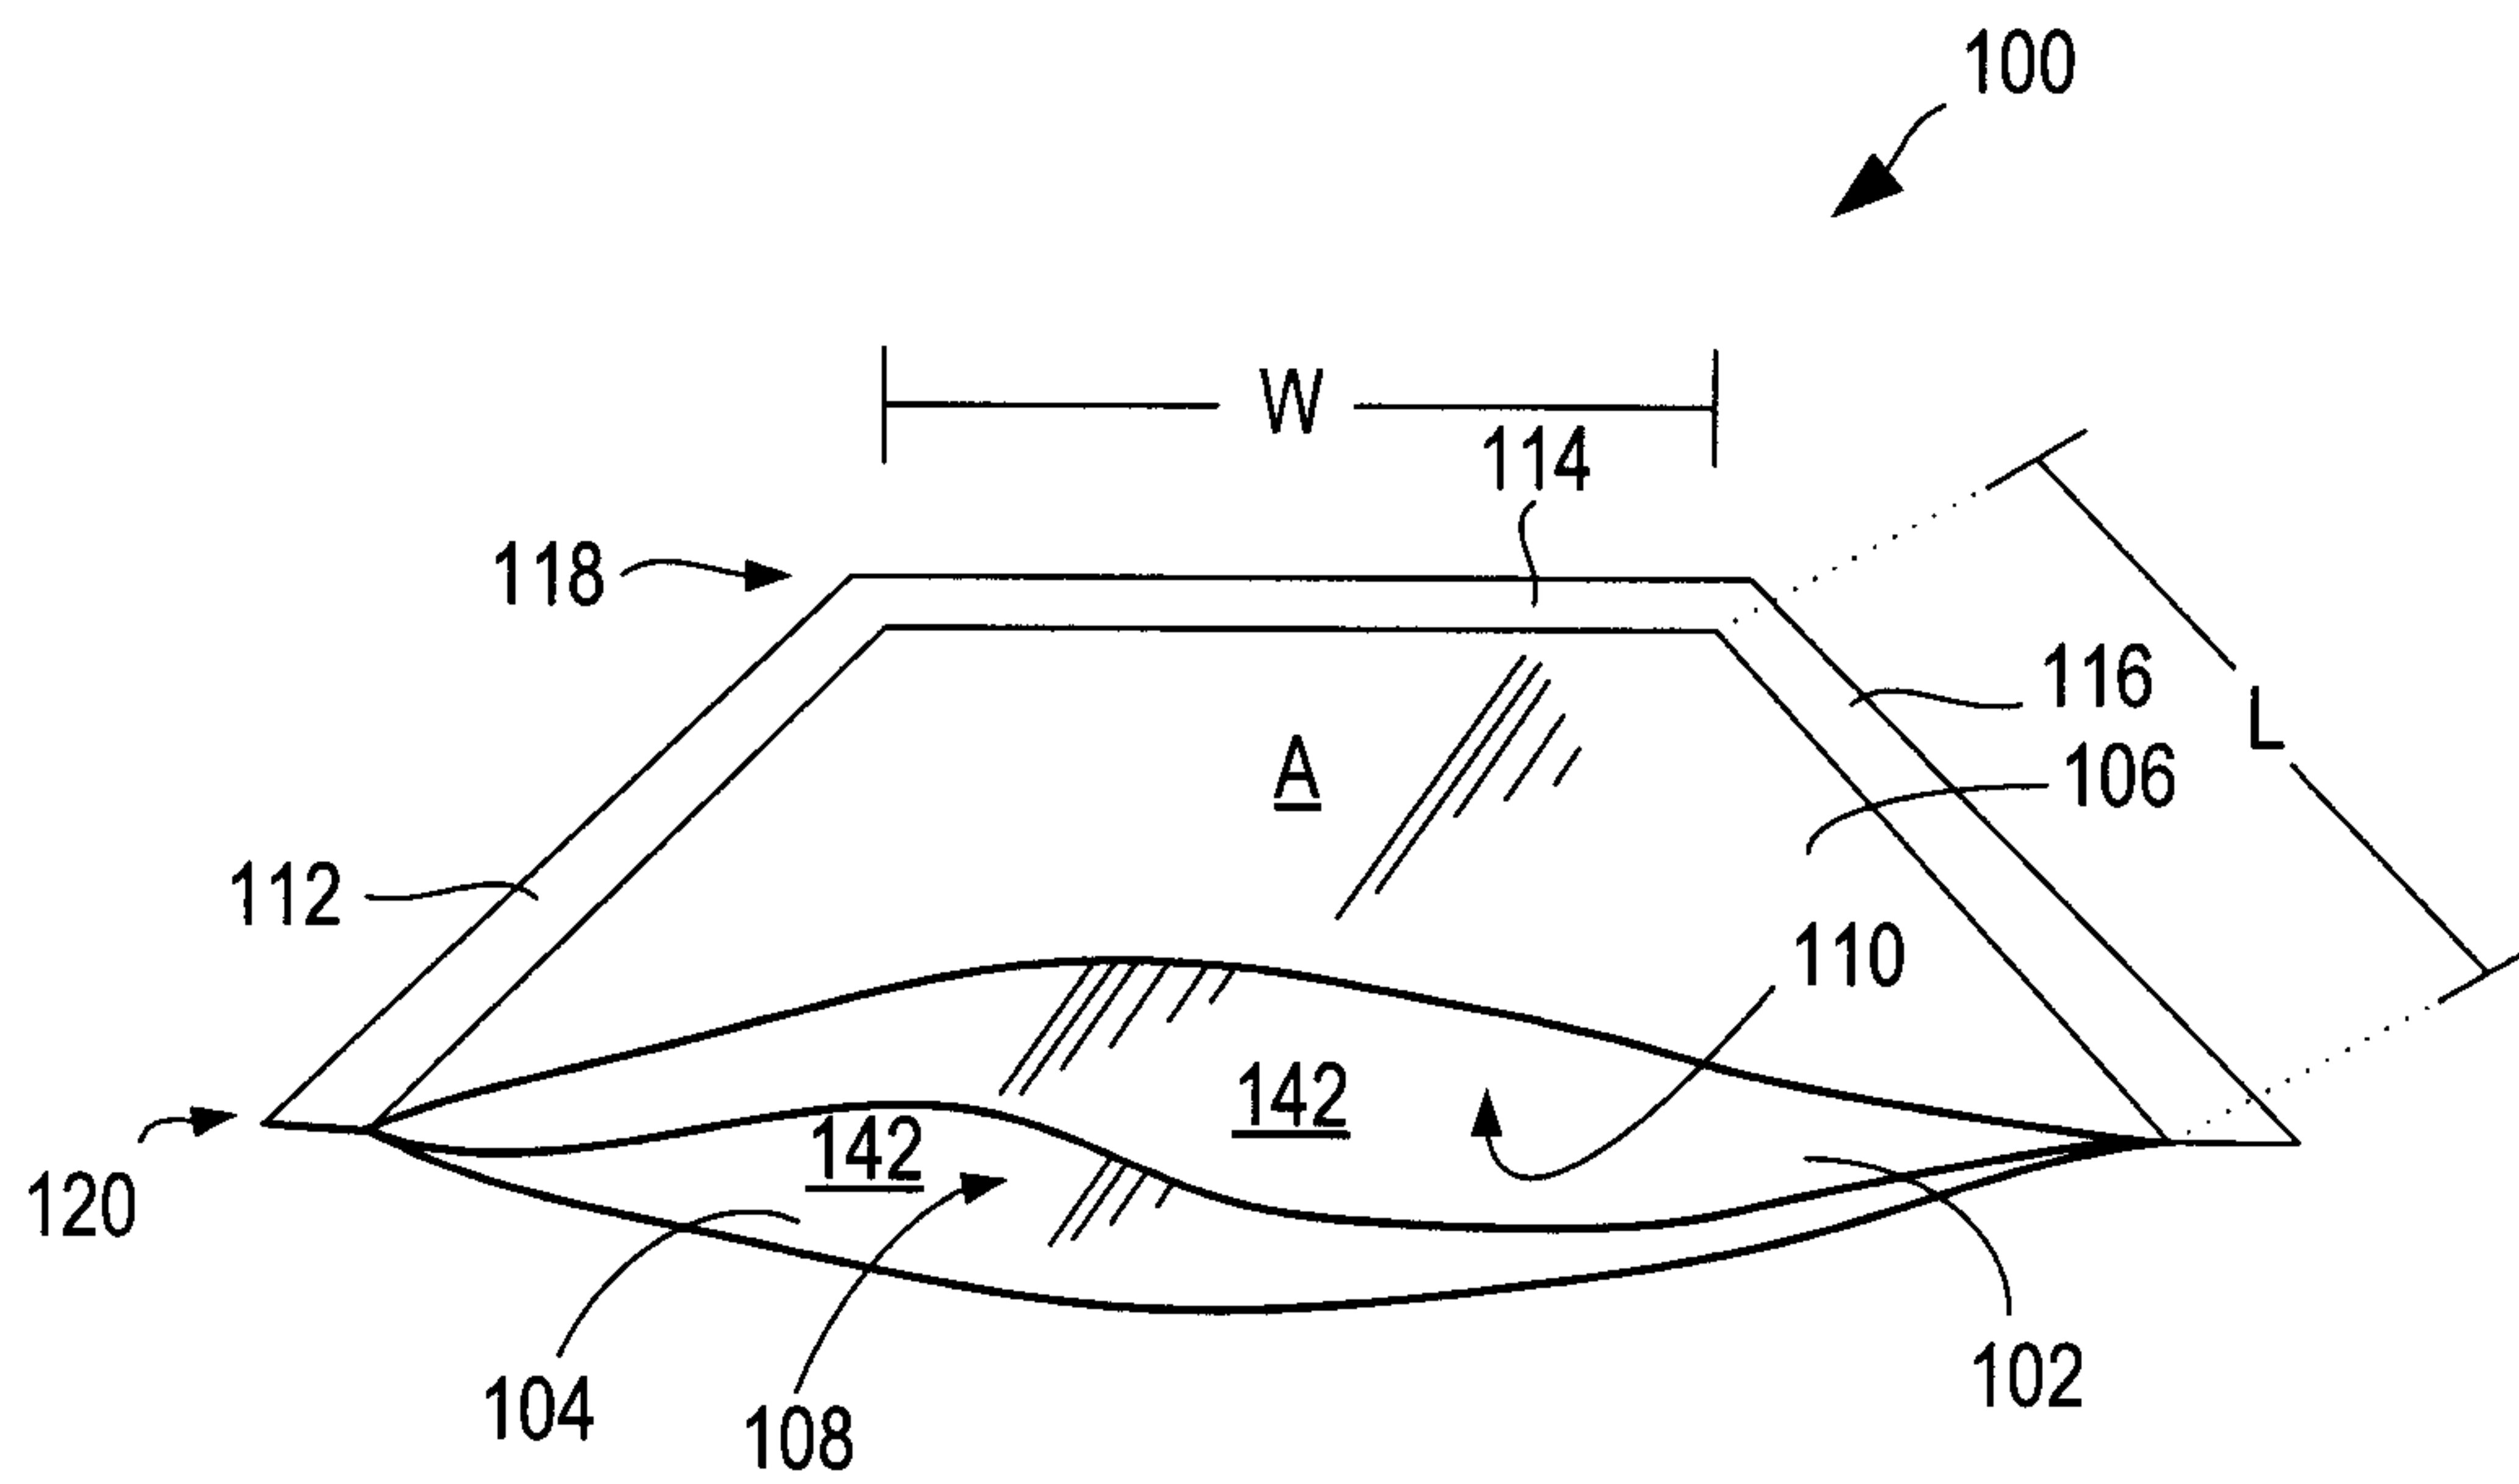


FIG. 1A

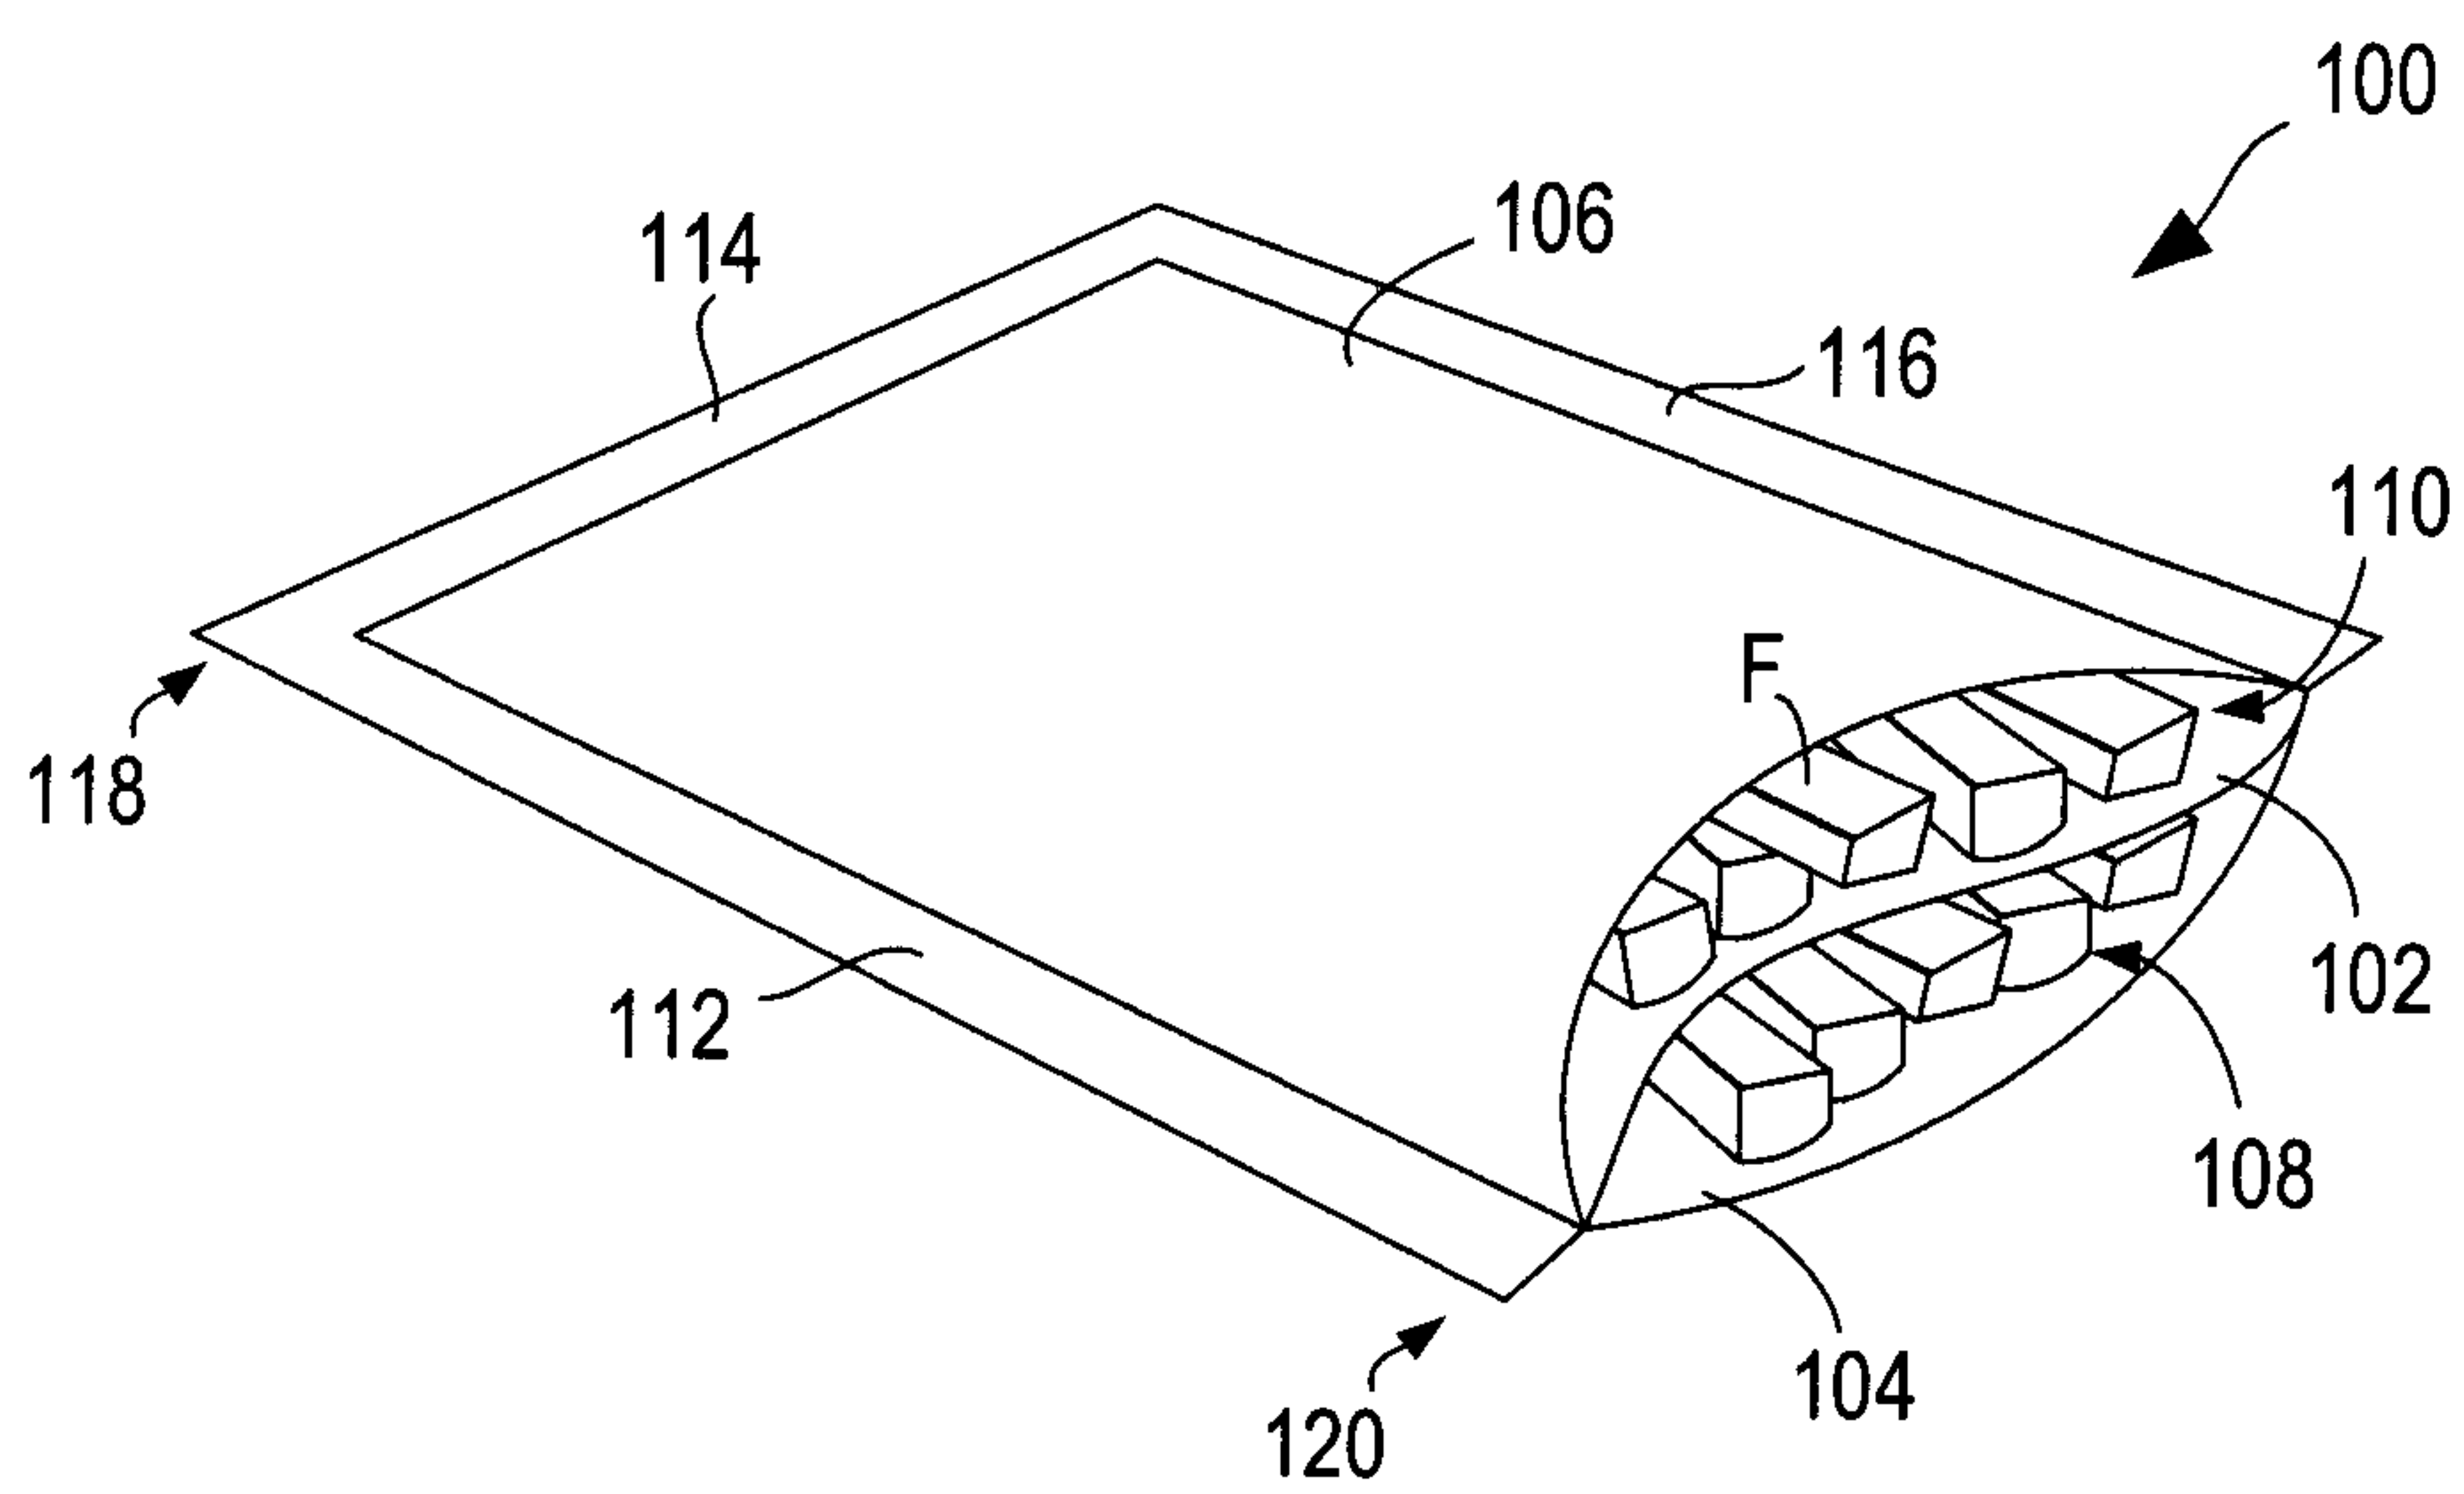


FIG. 1B

2/11

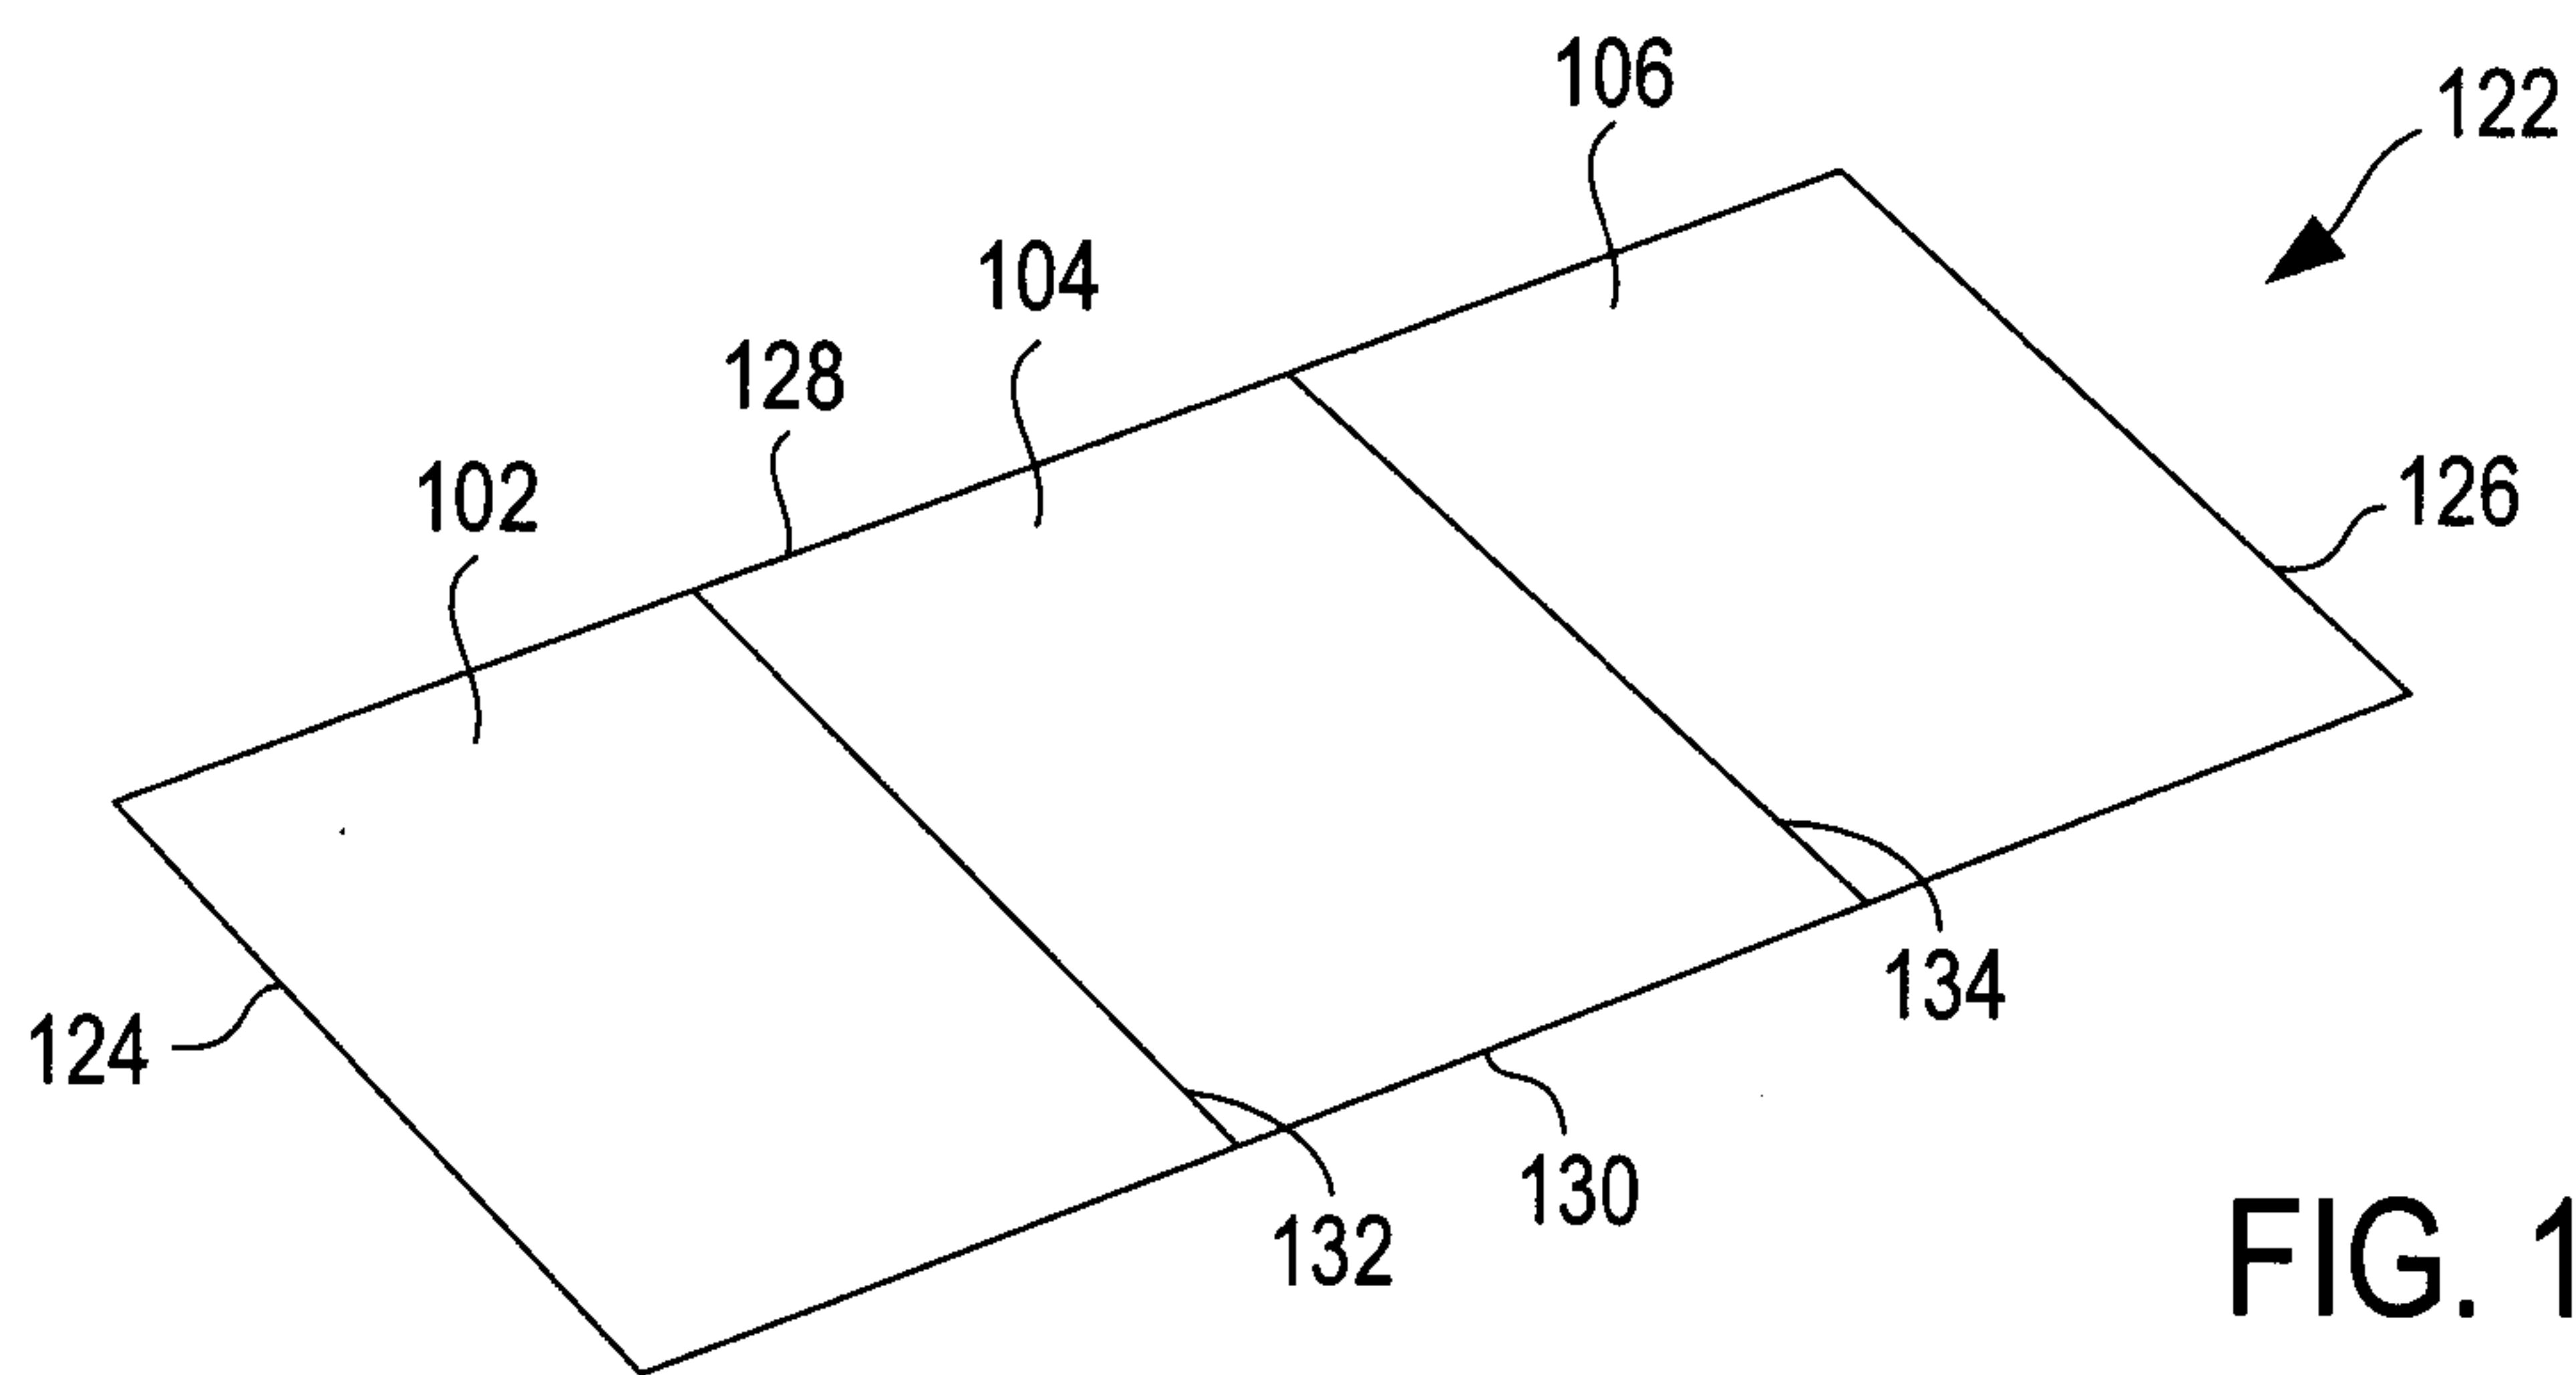


FIG. 1C

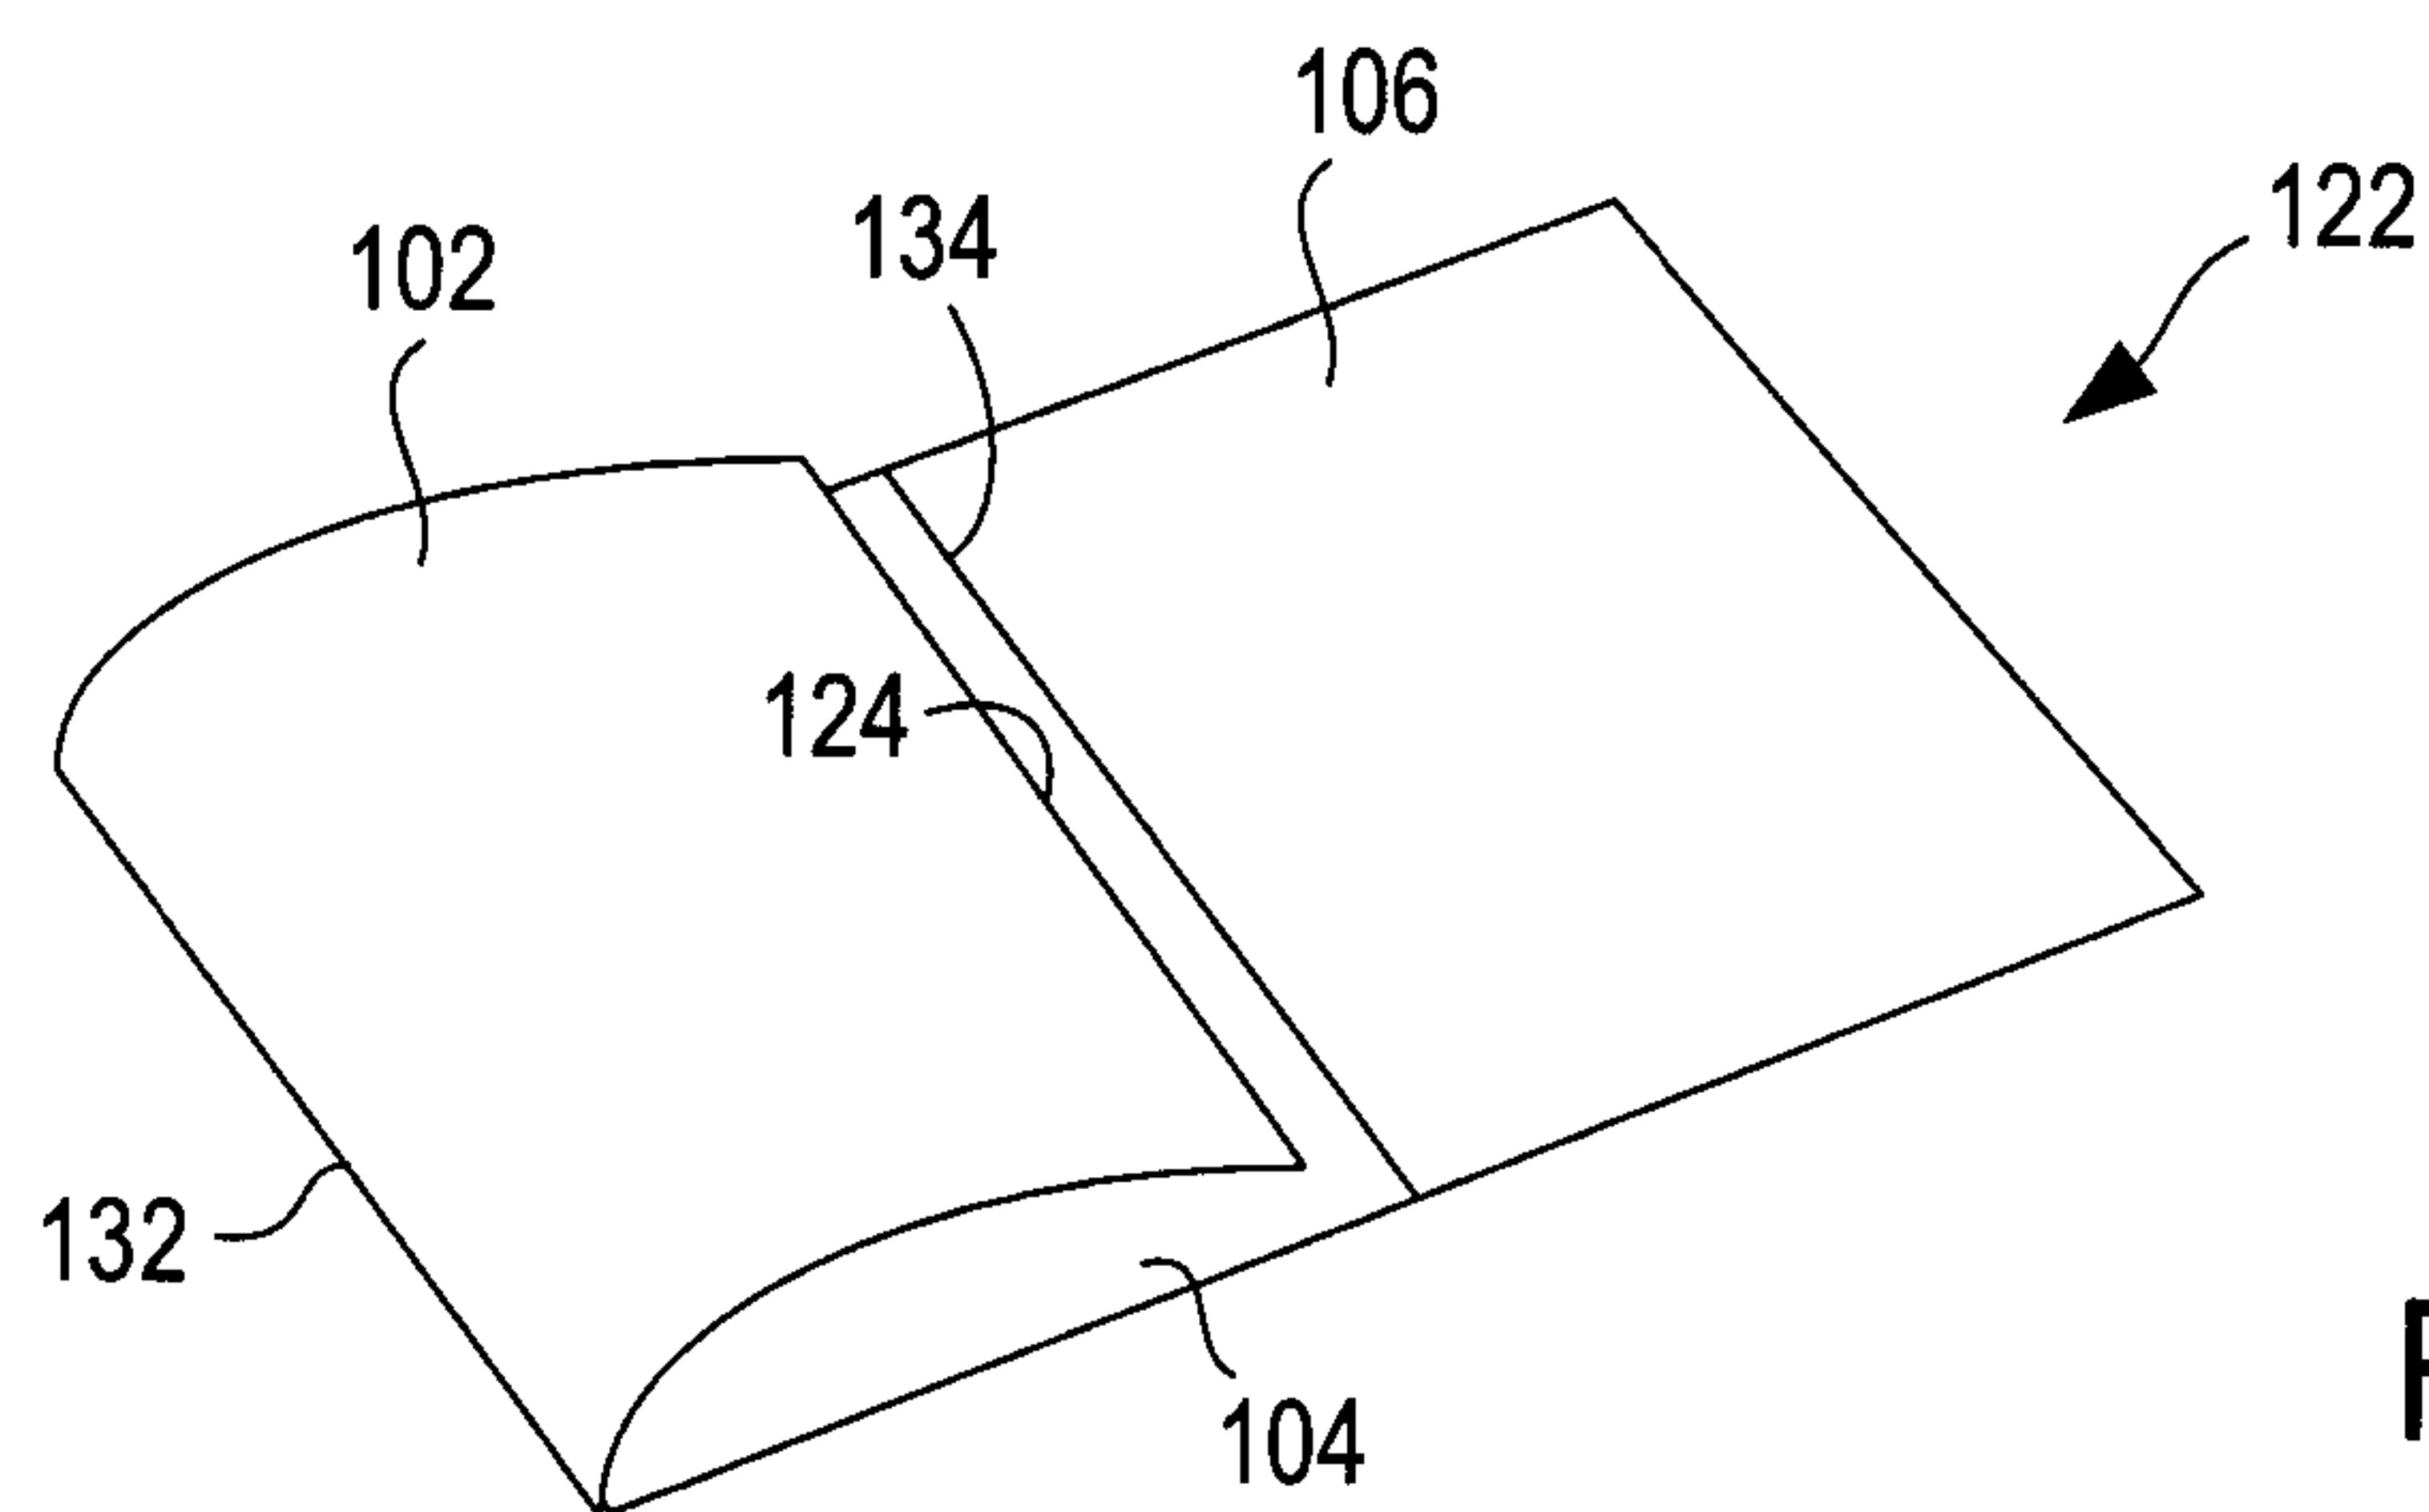


FIG. 1D

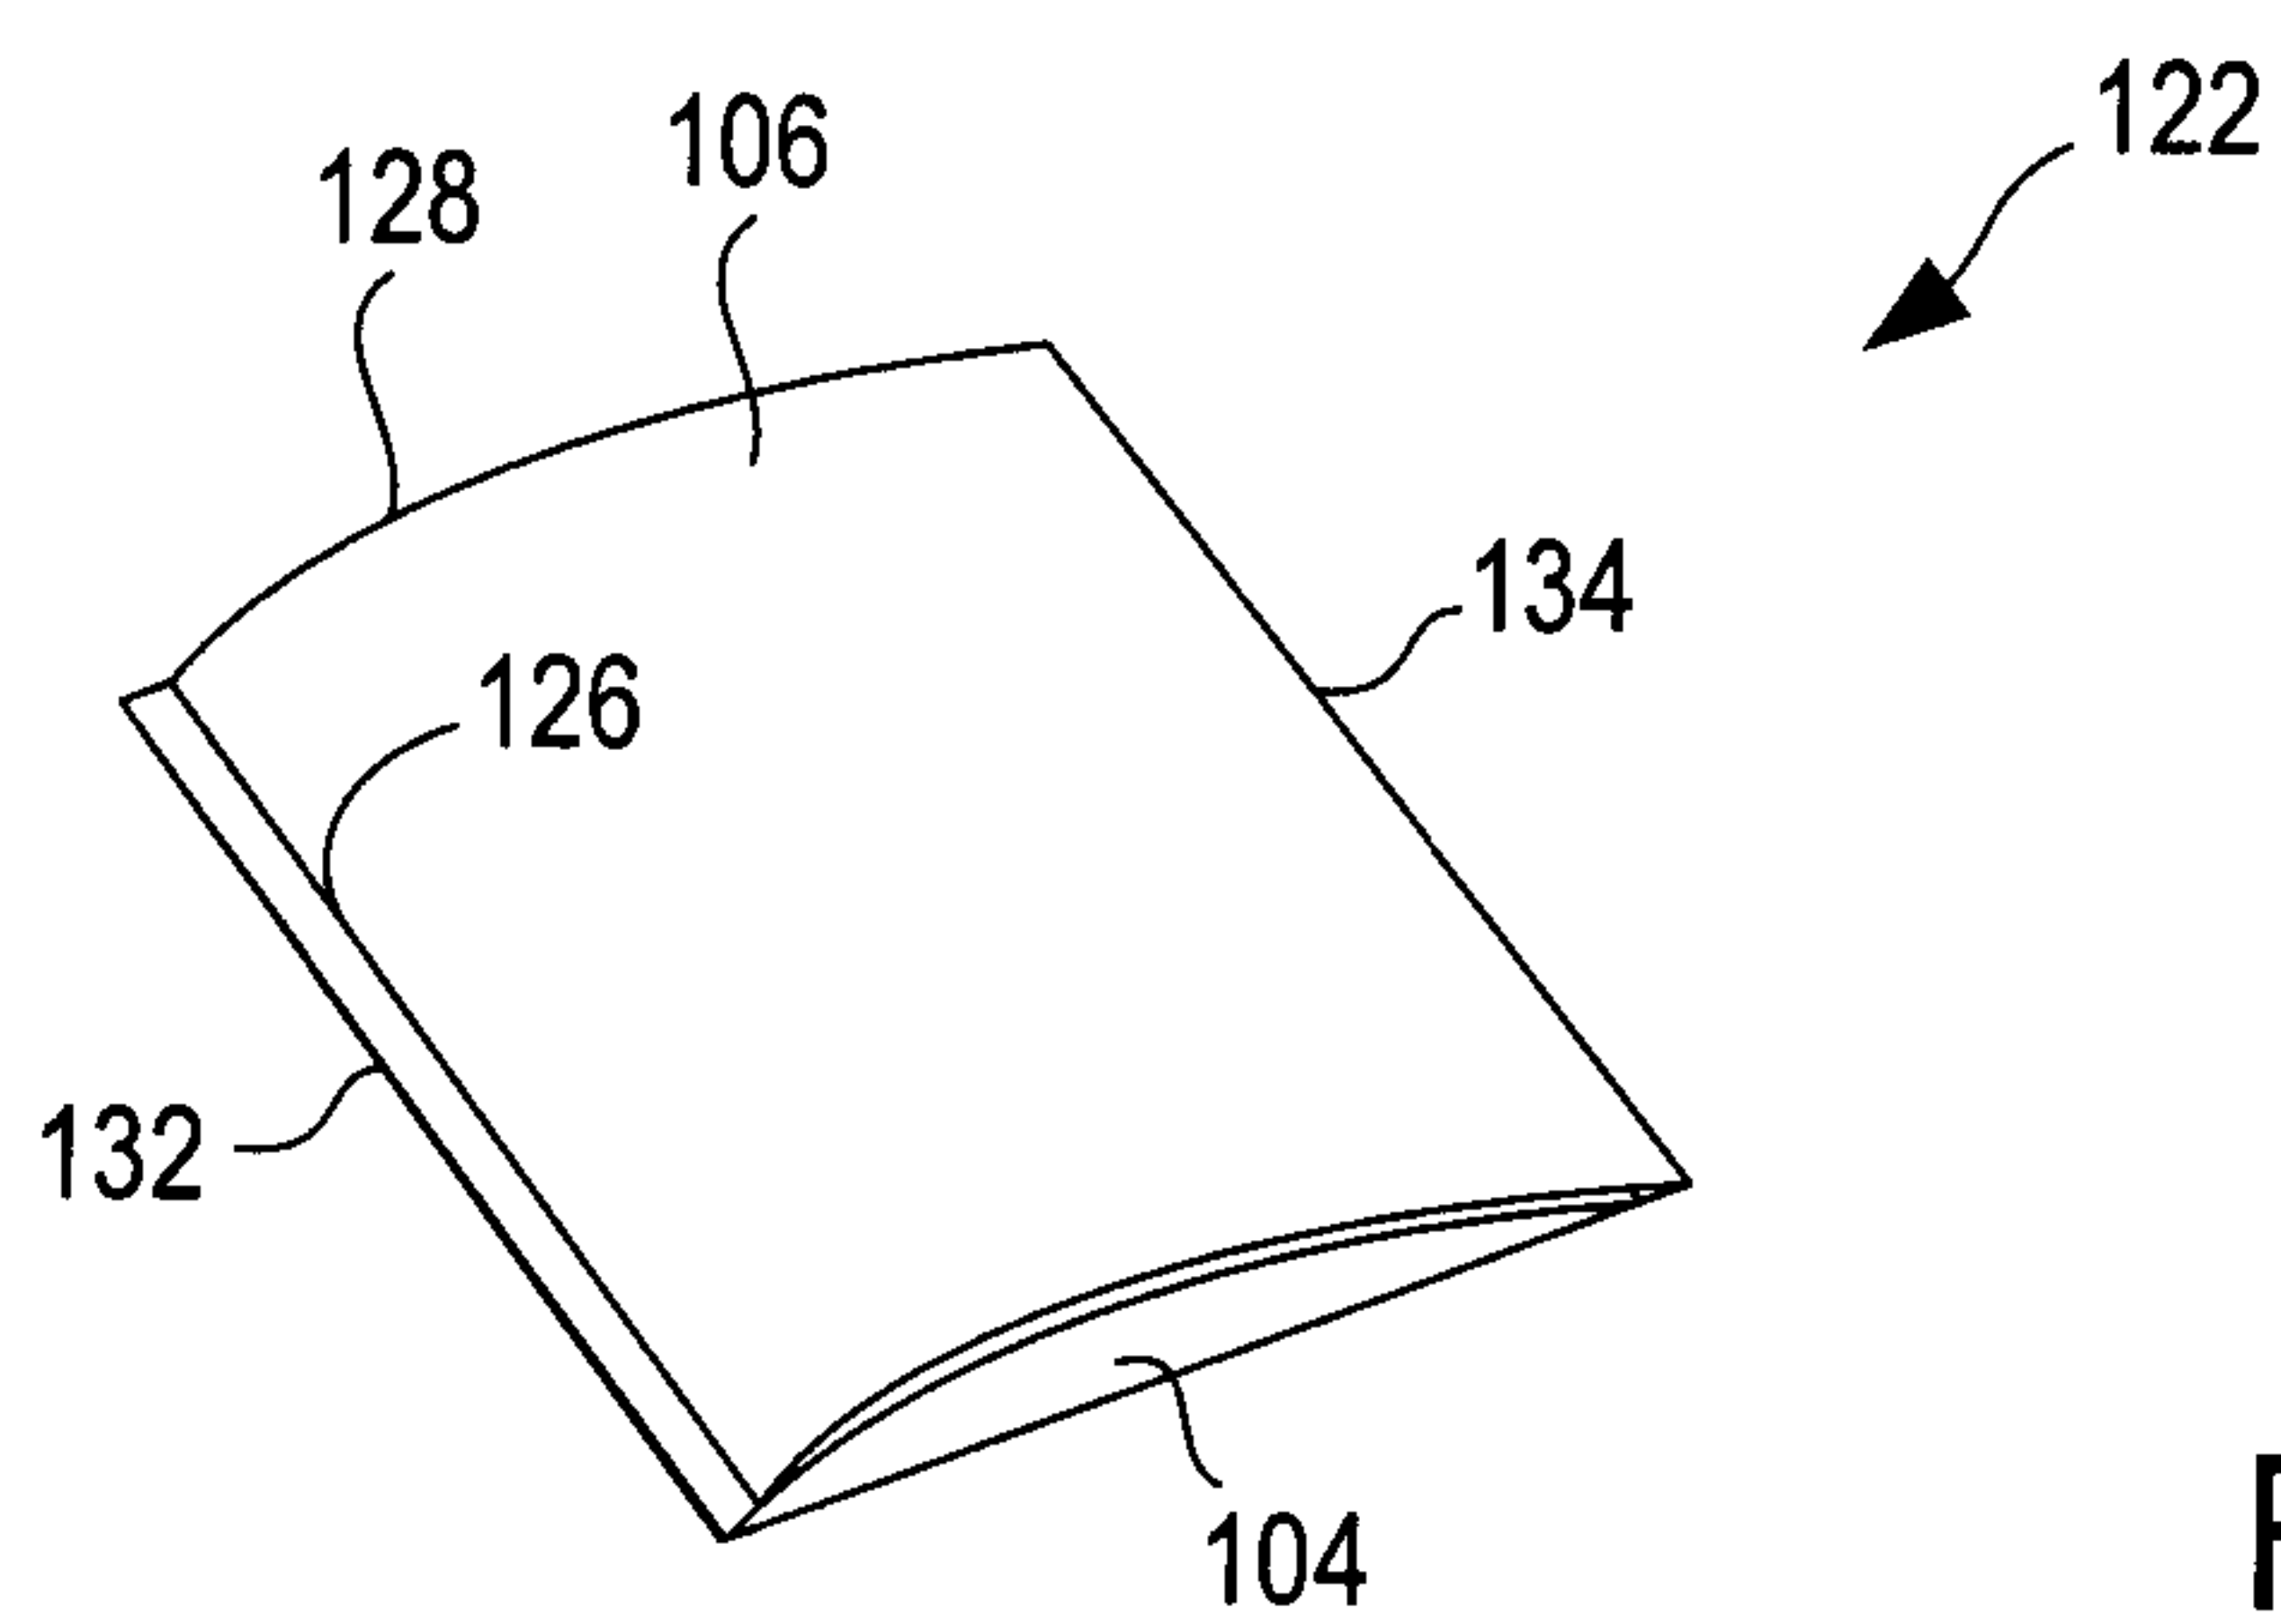
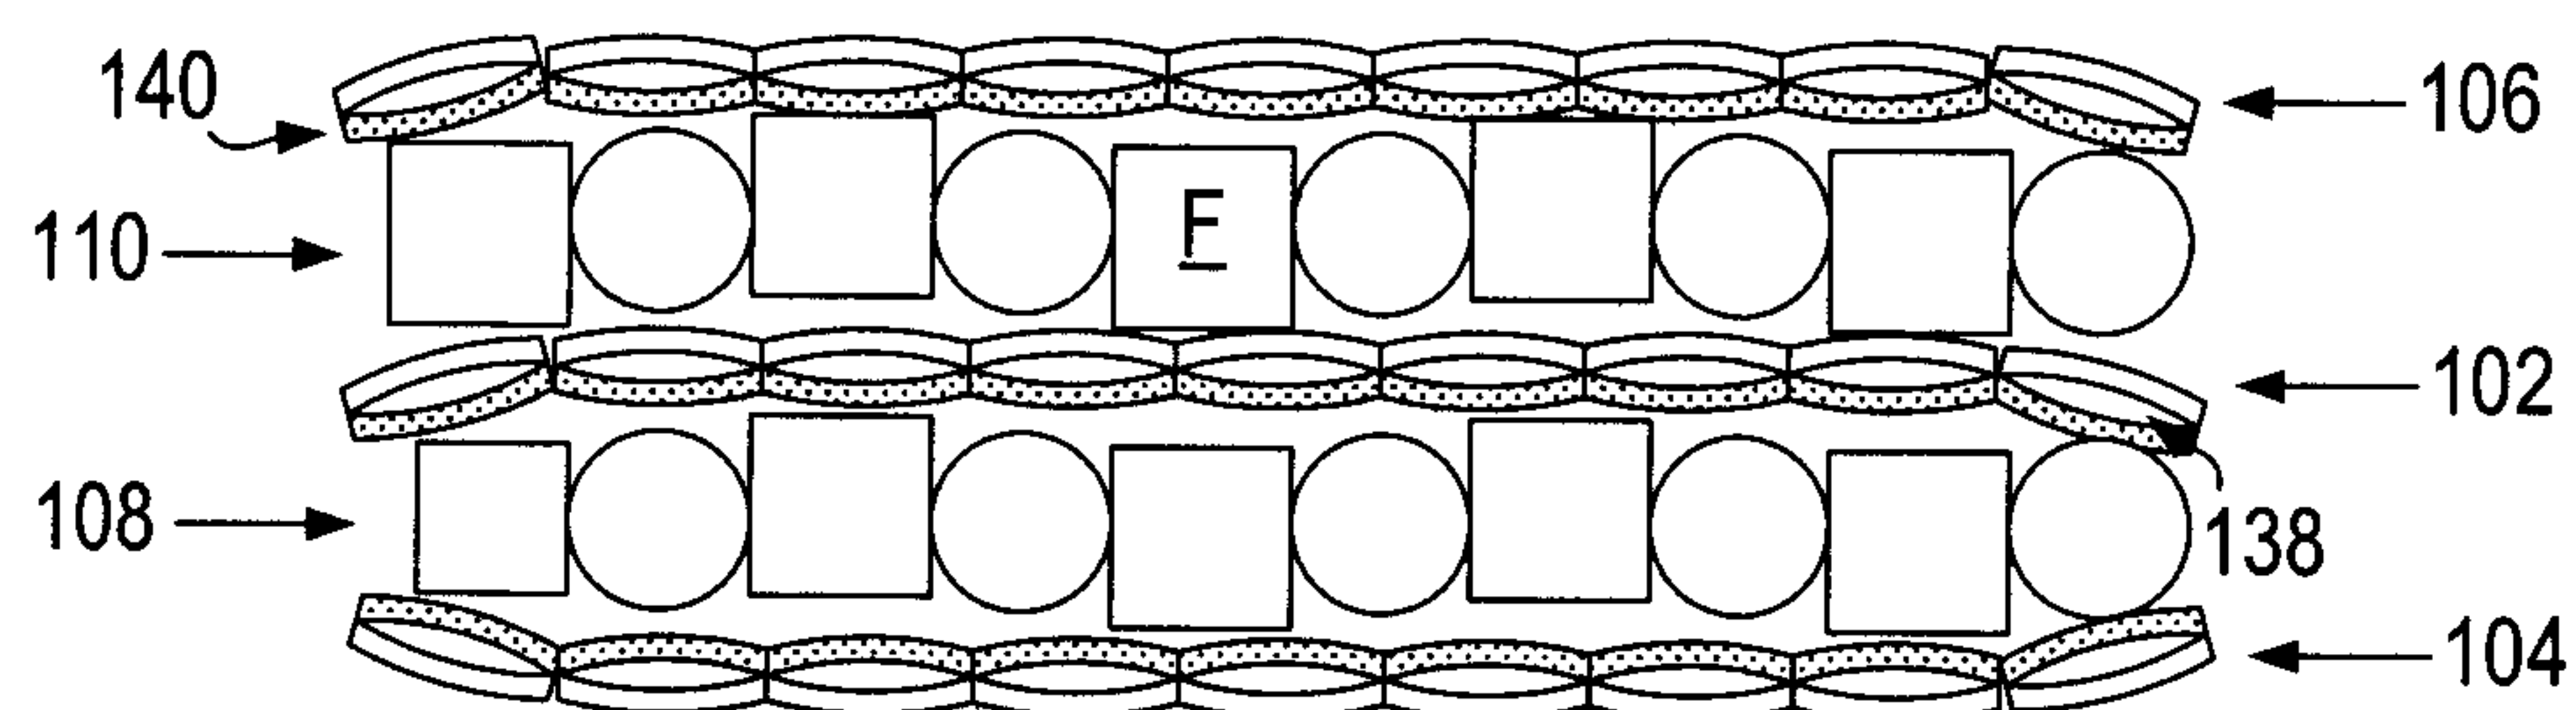
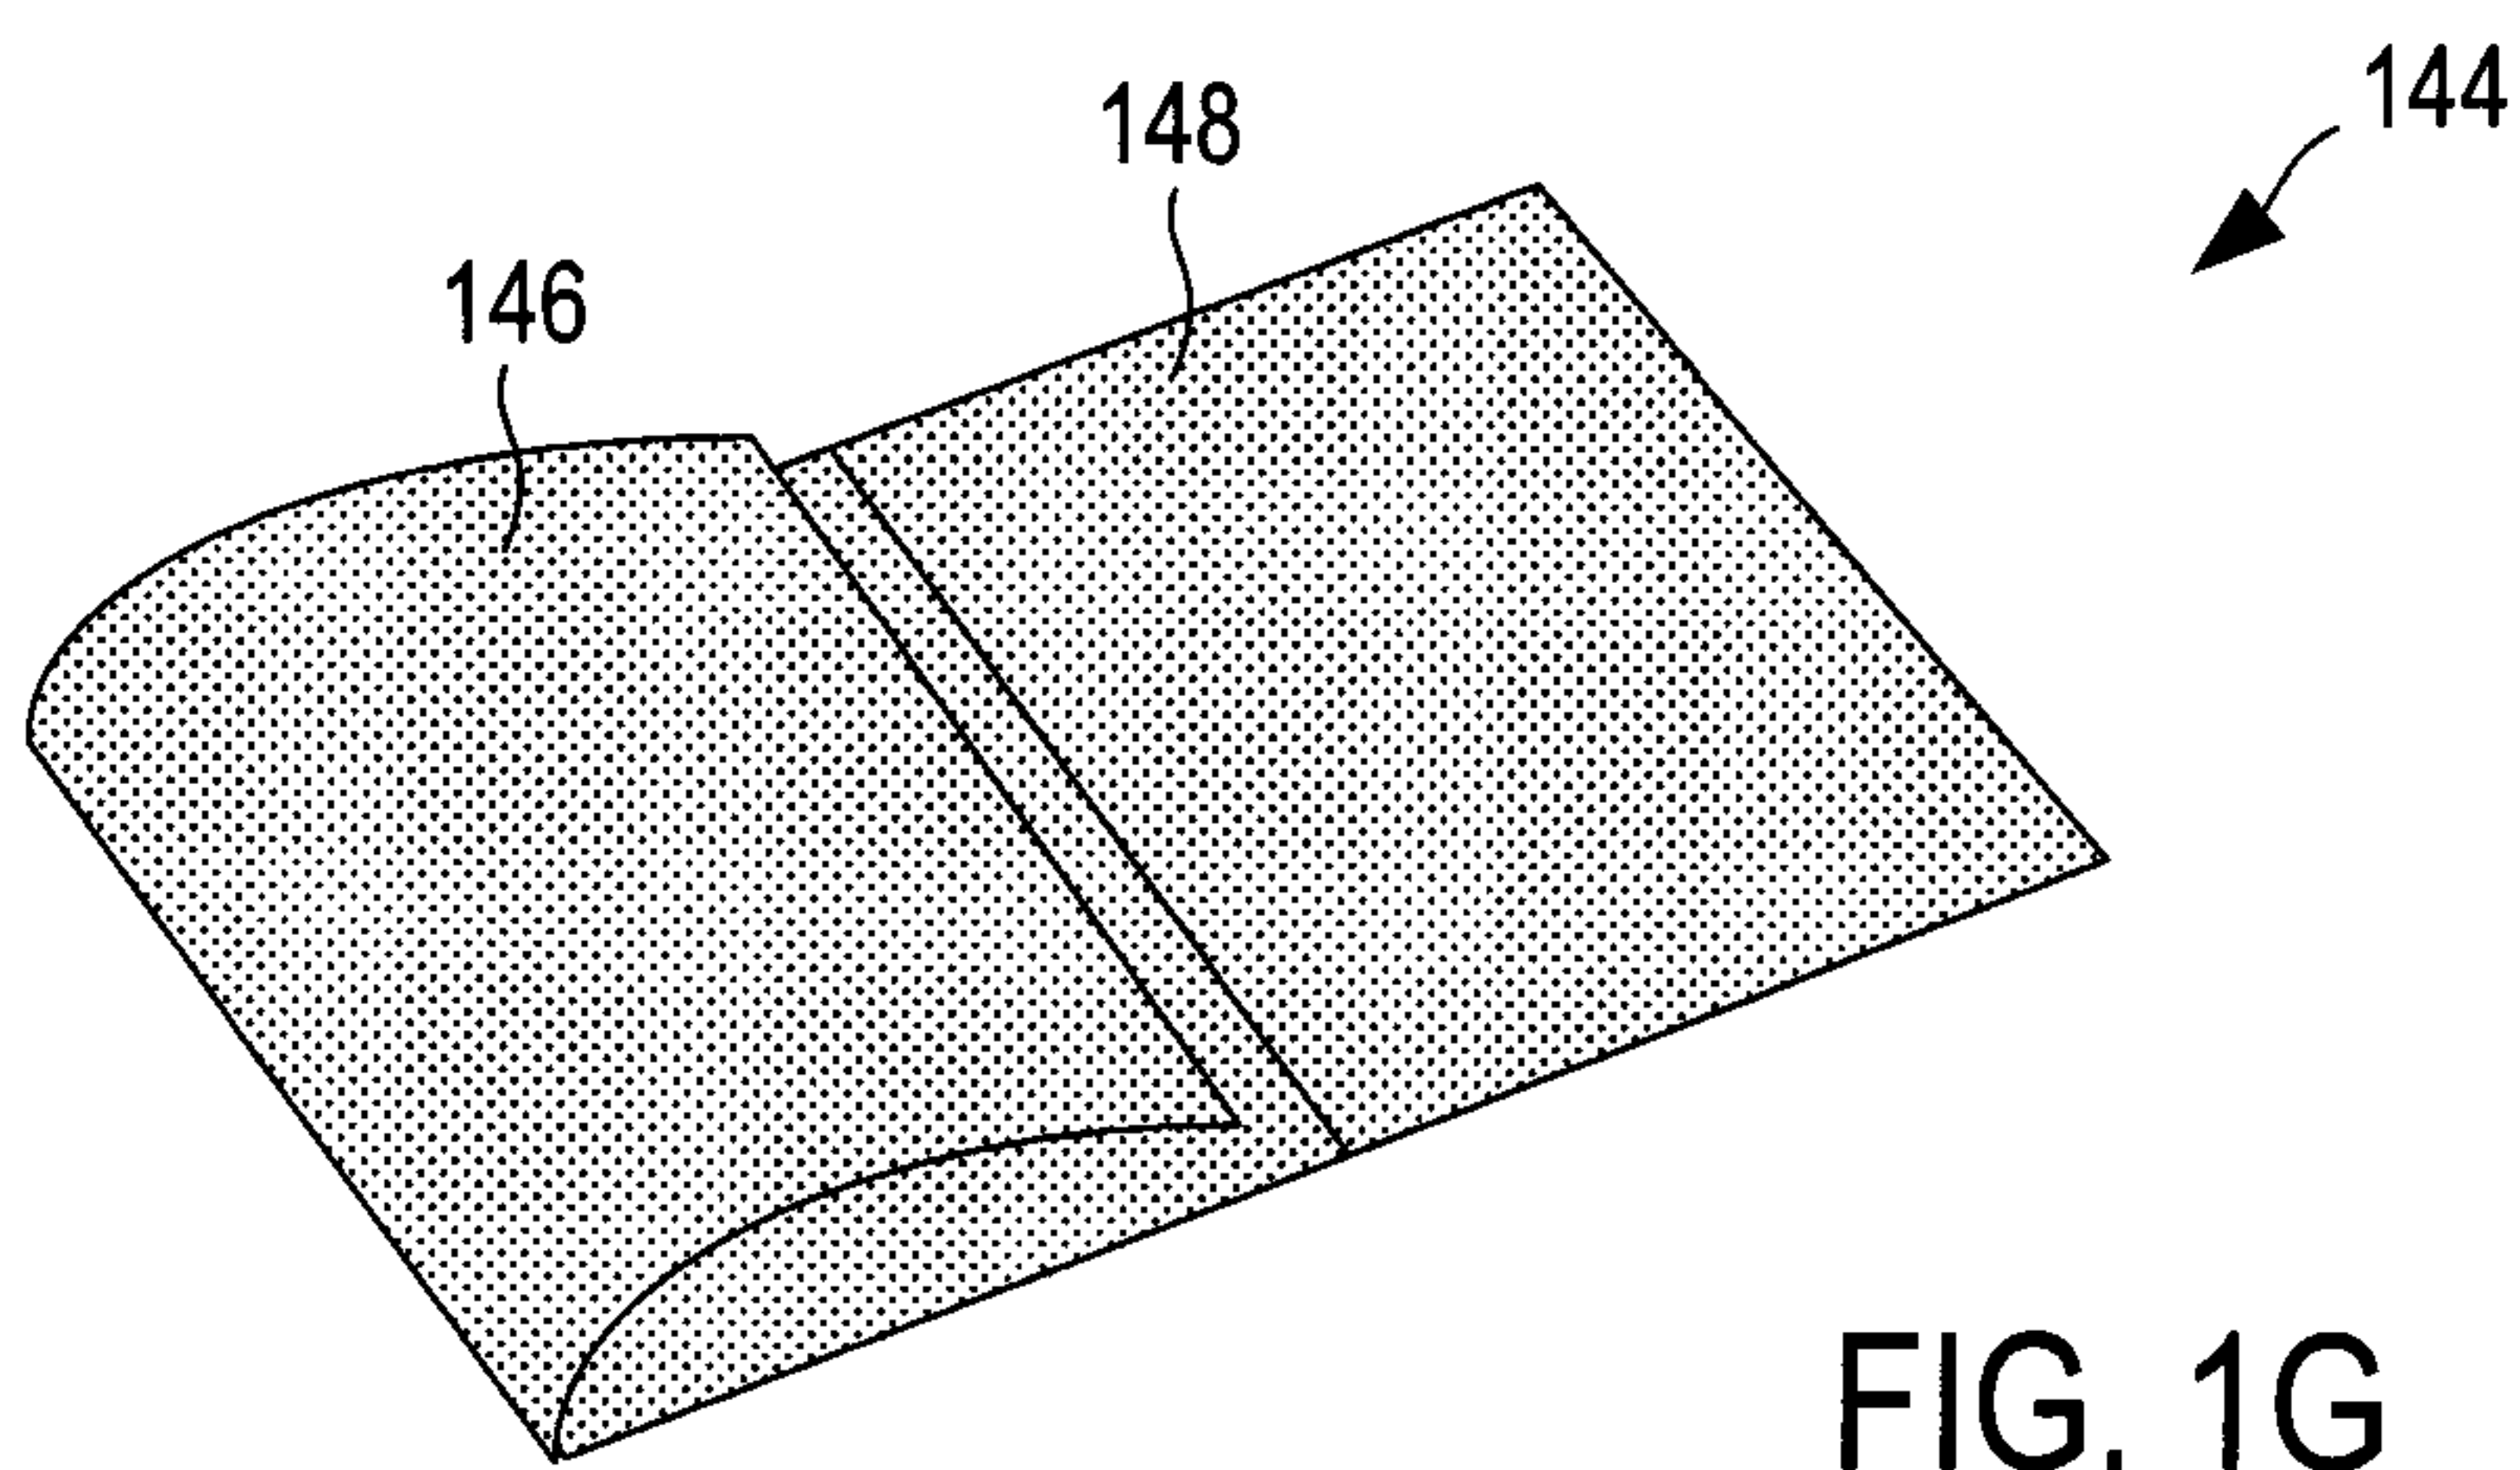
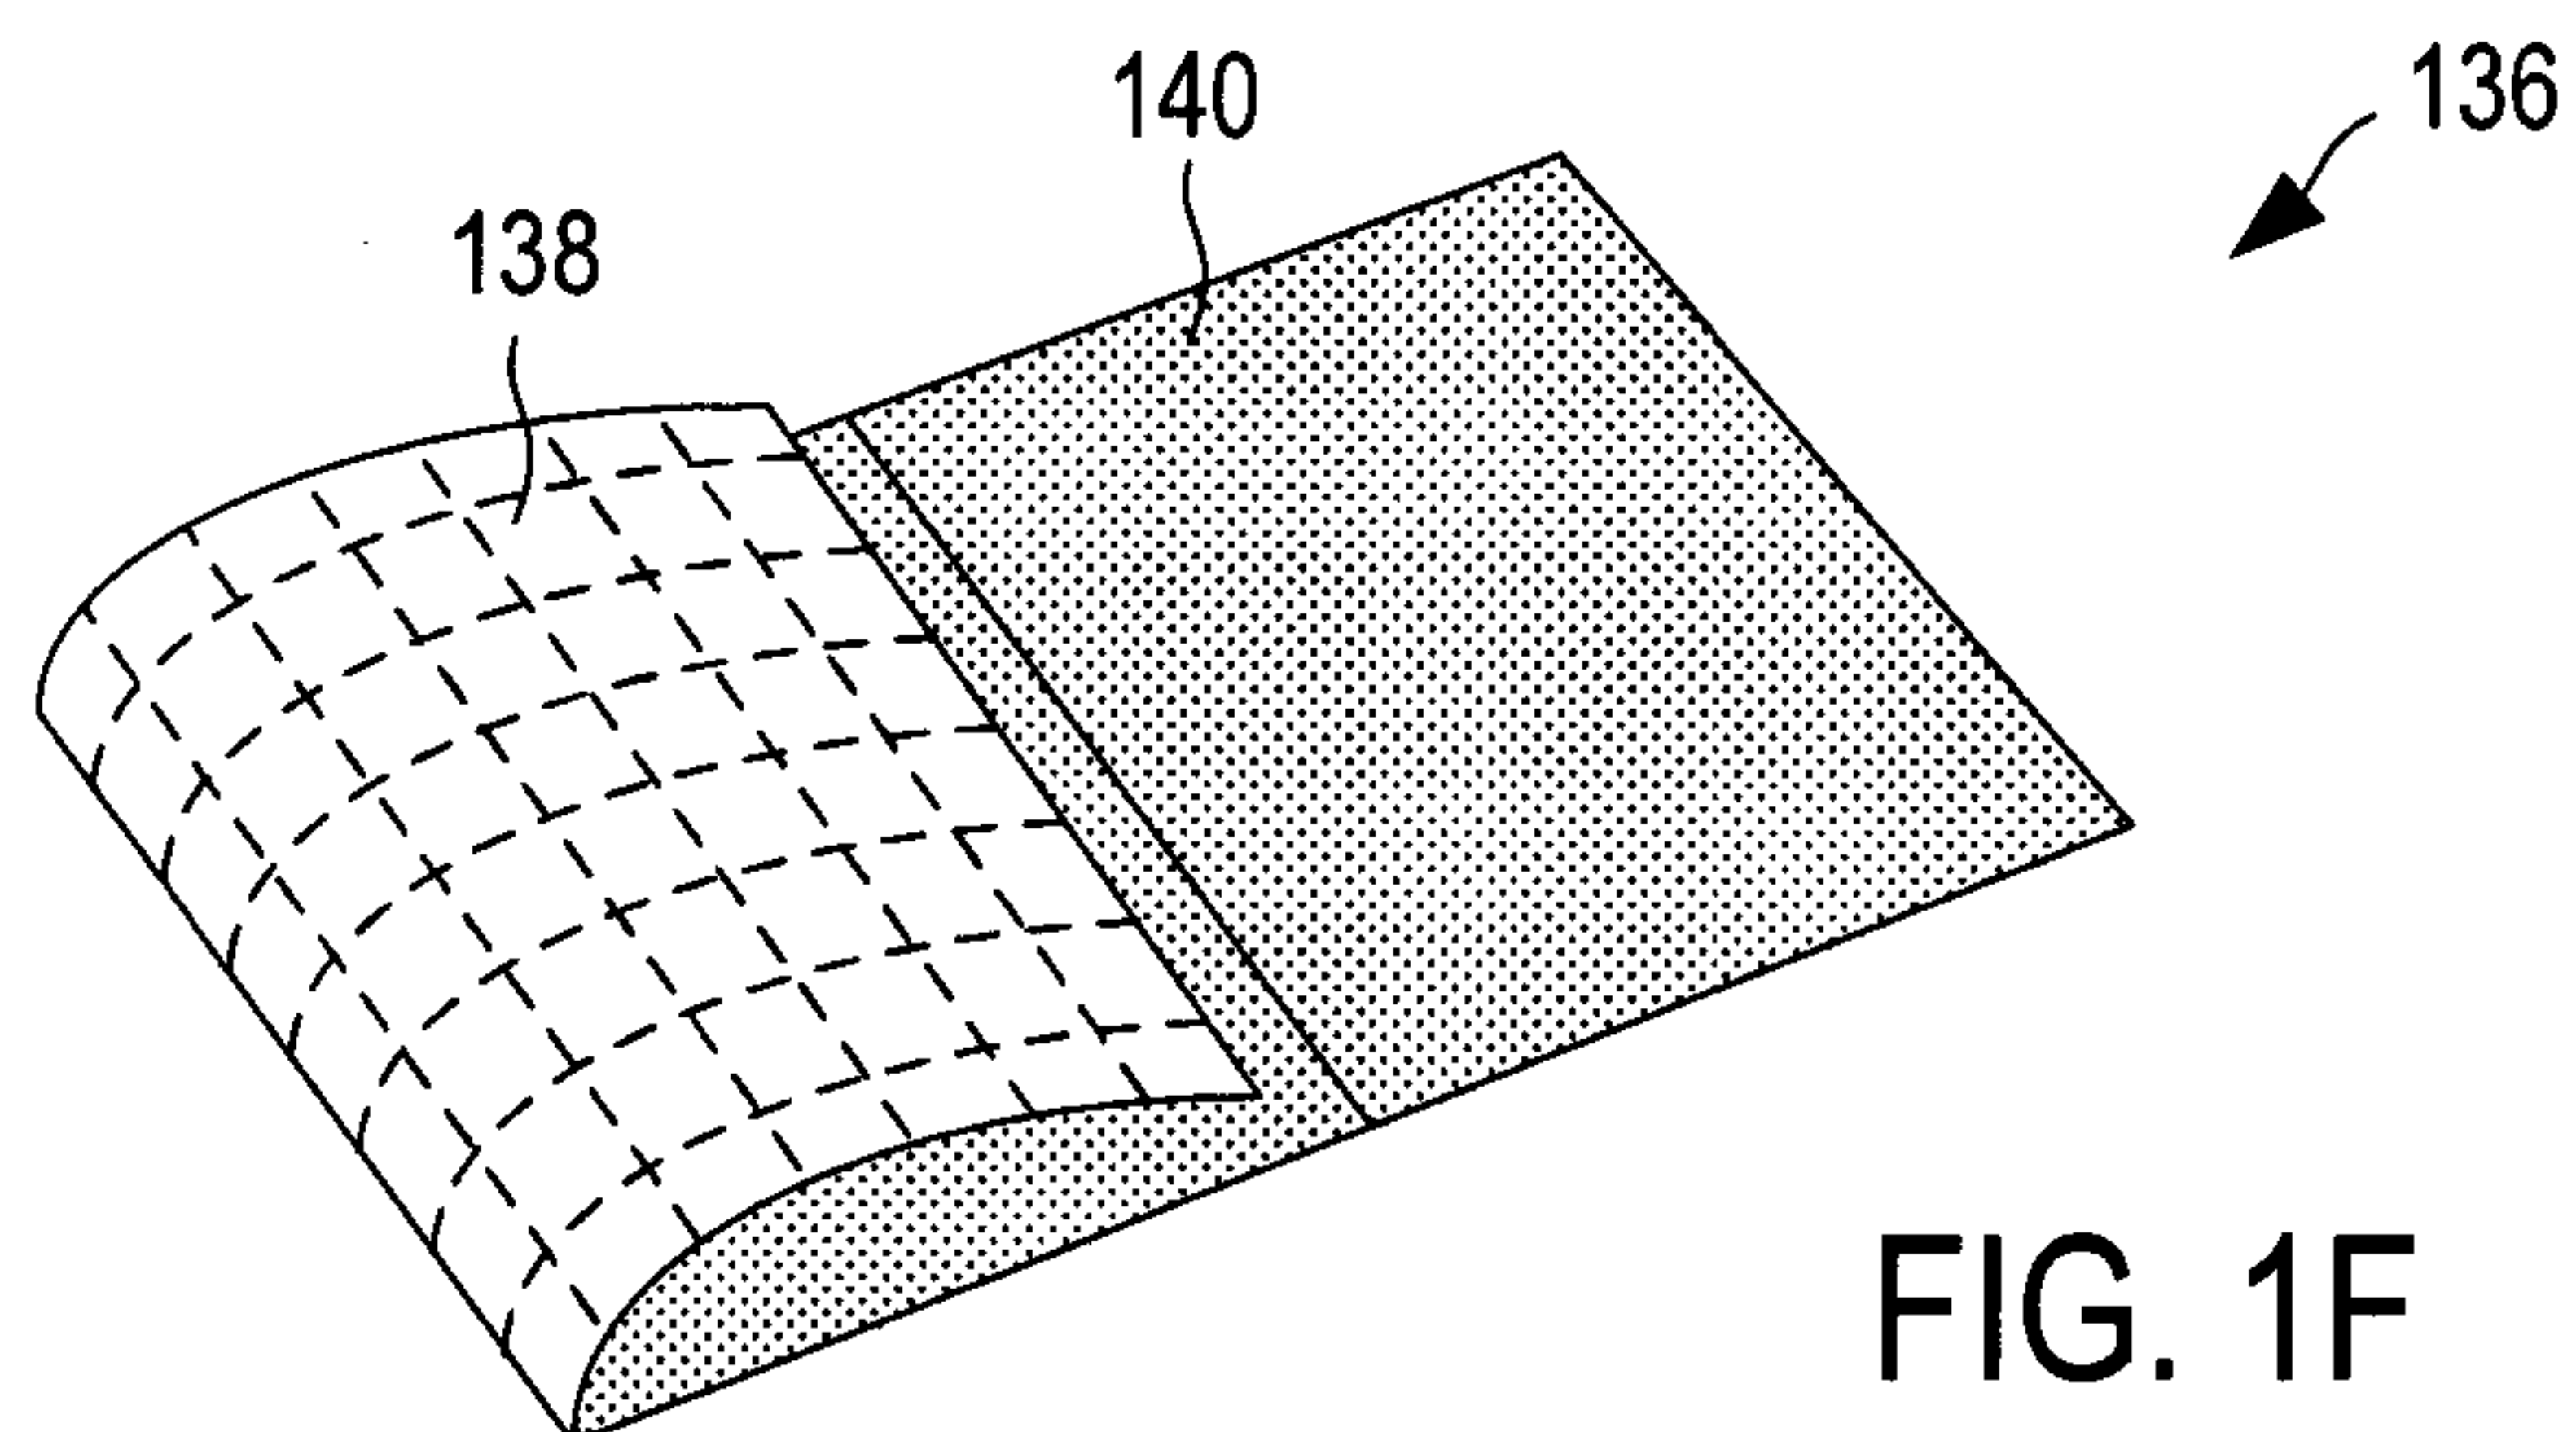


FIG. 1E



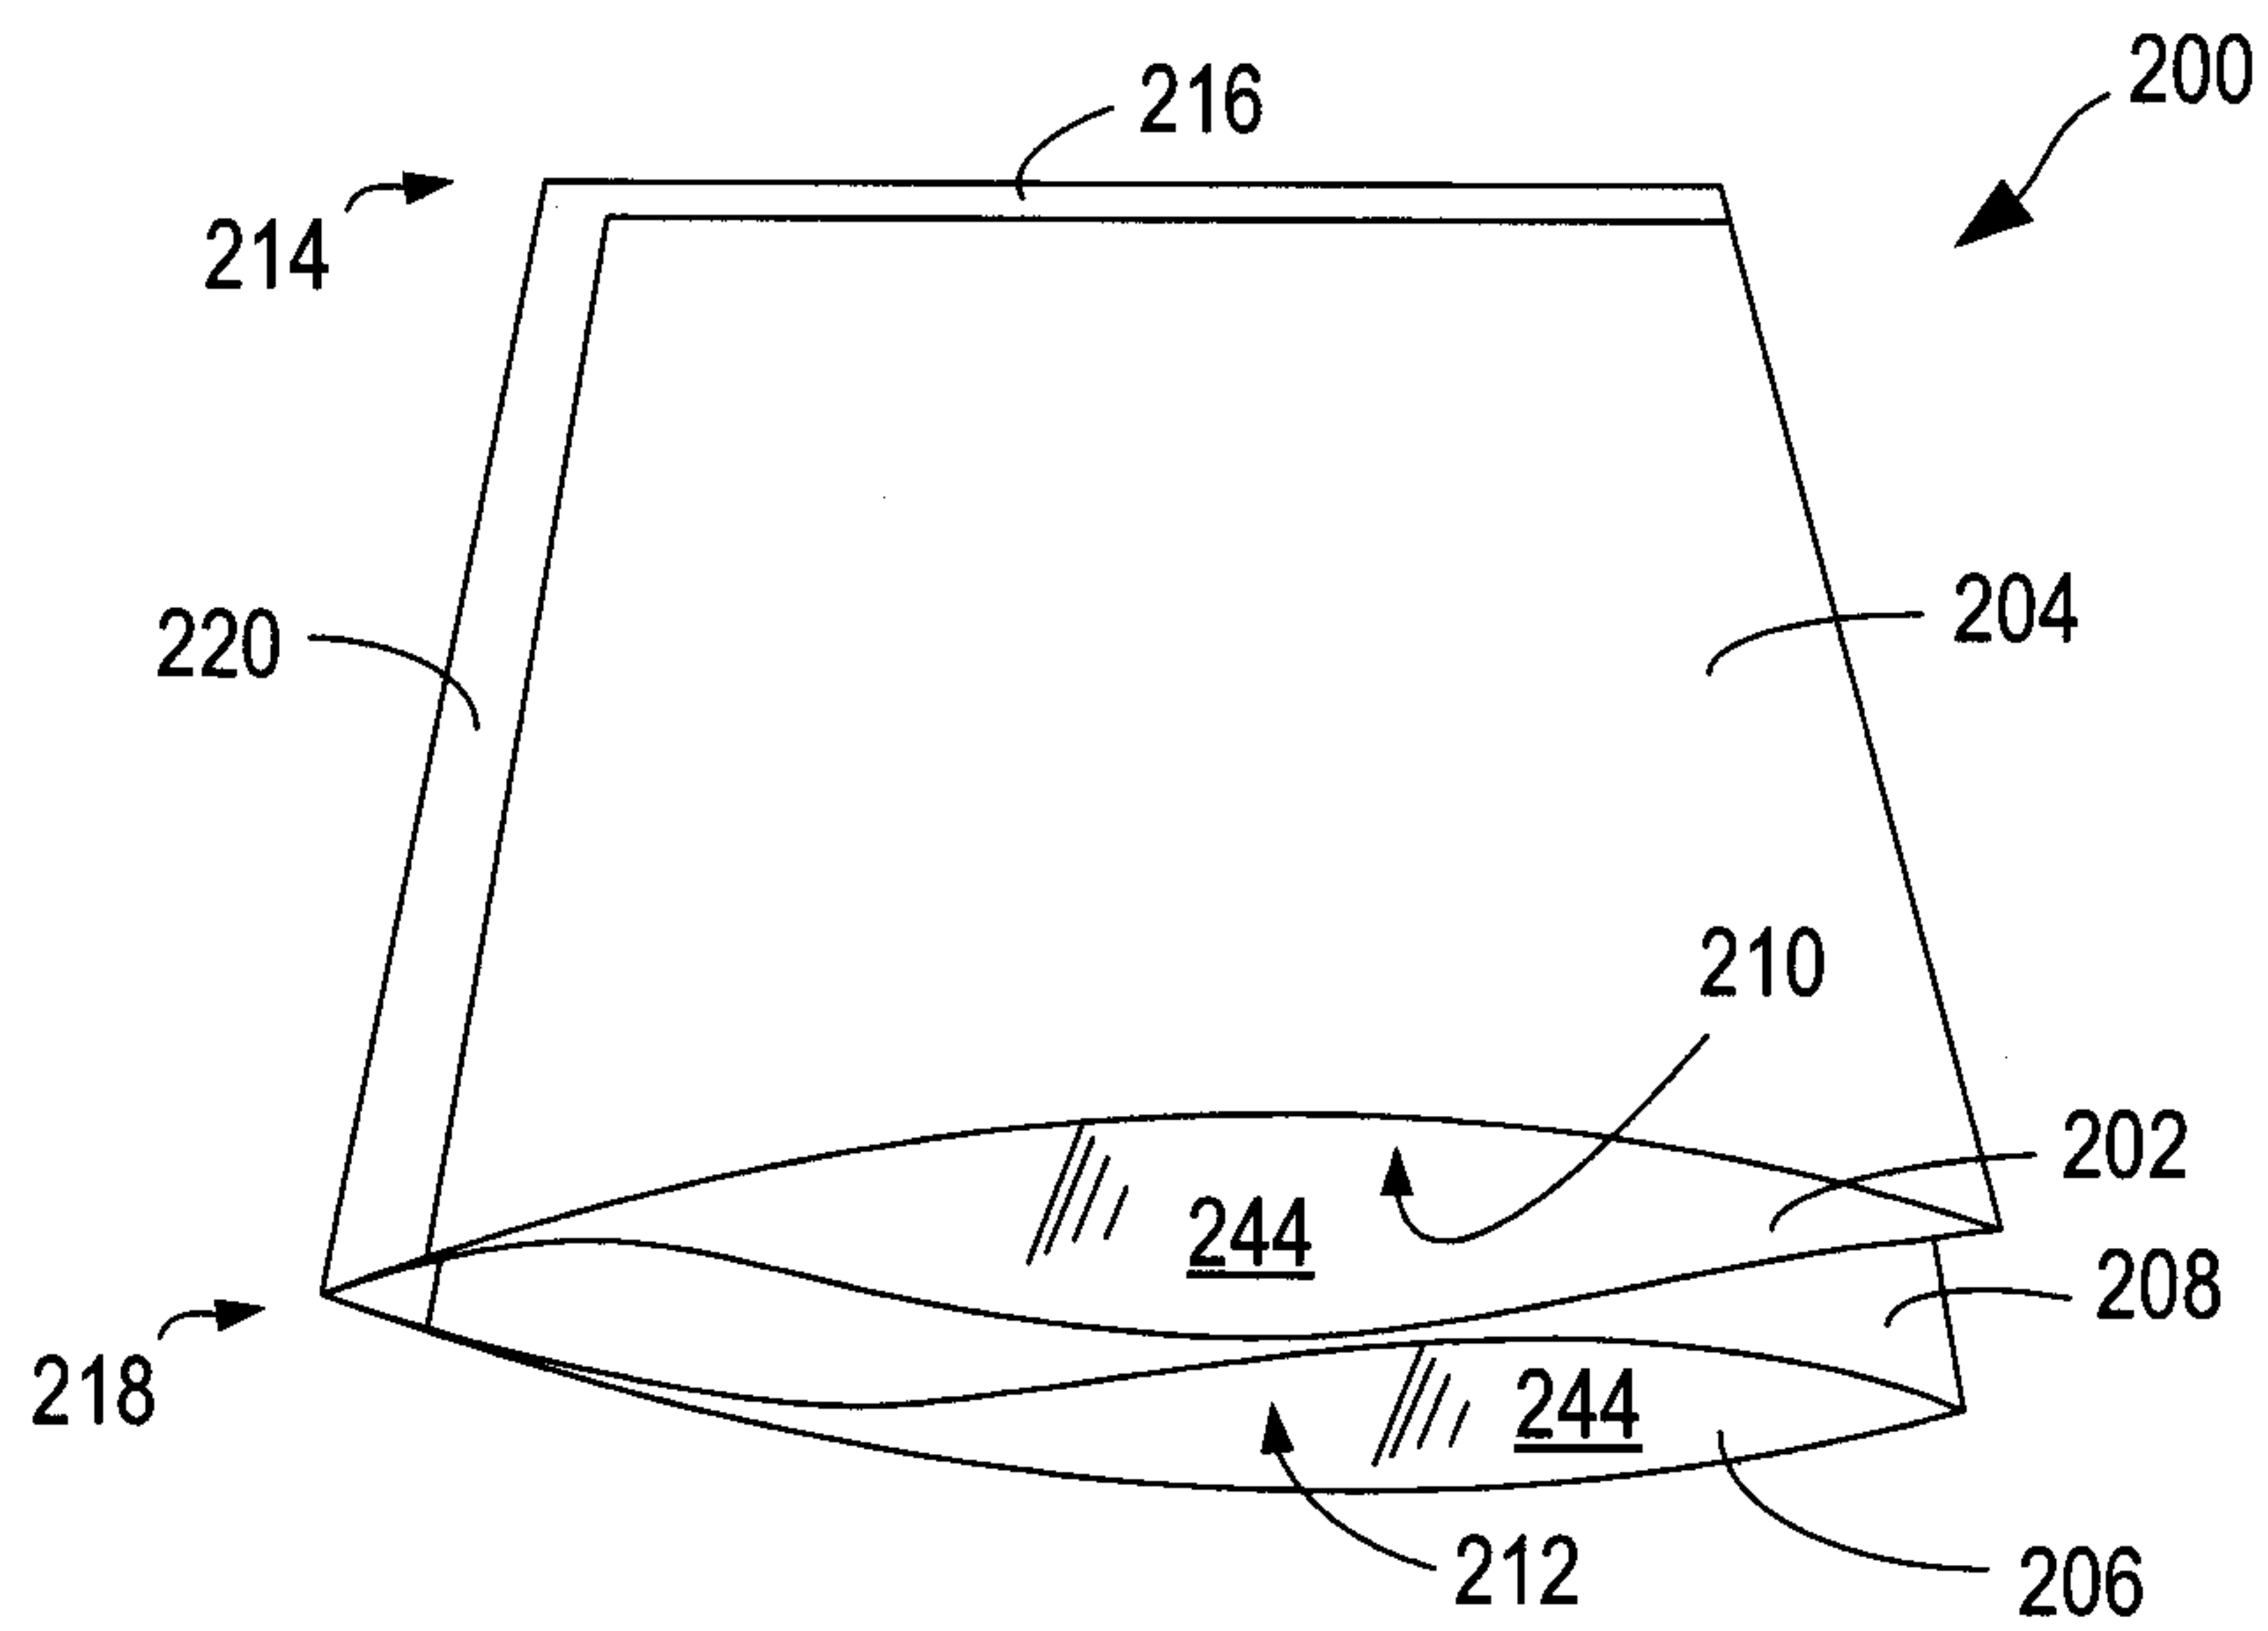


FIG. 2A

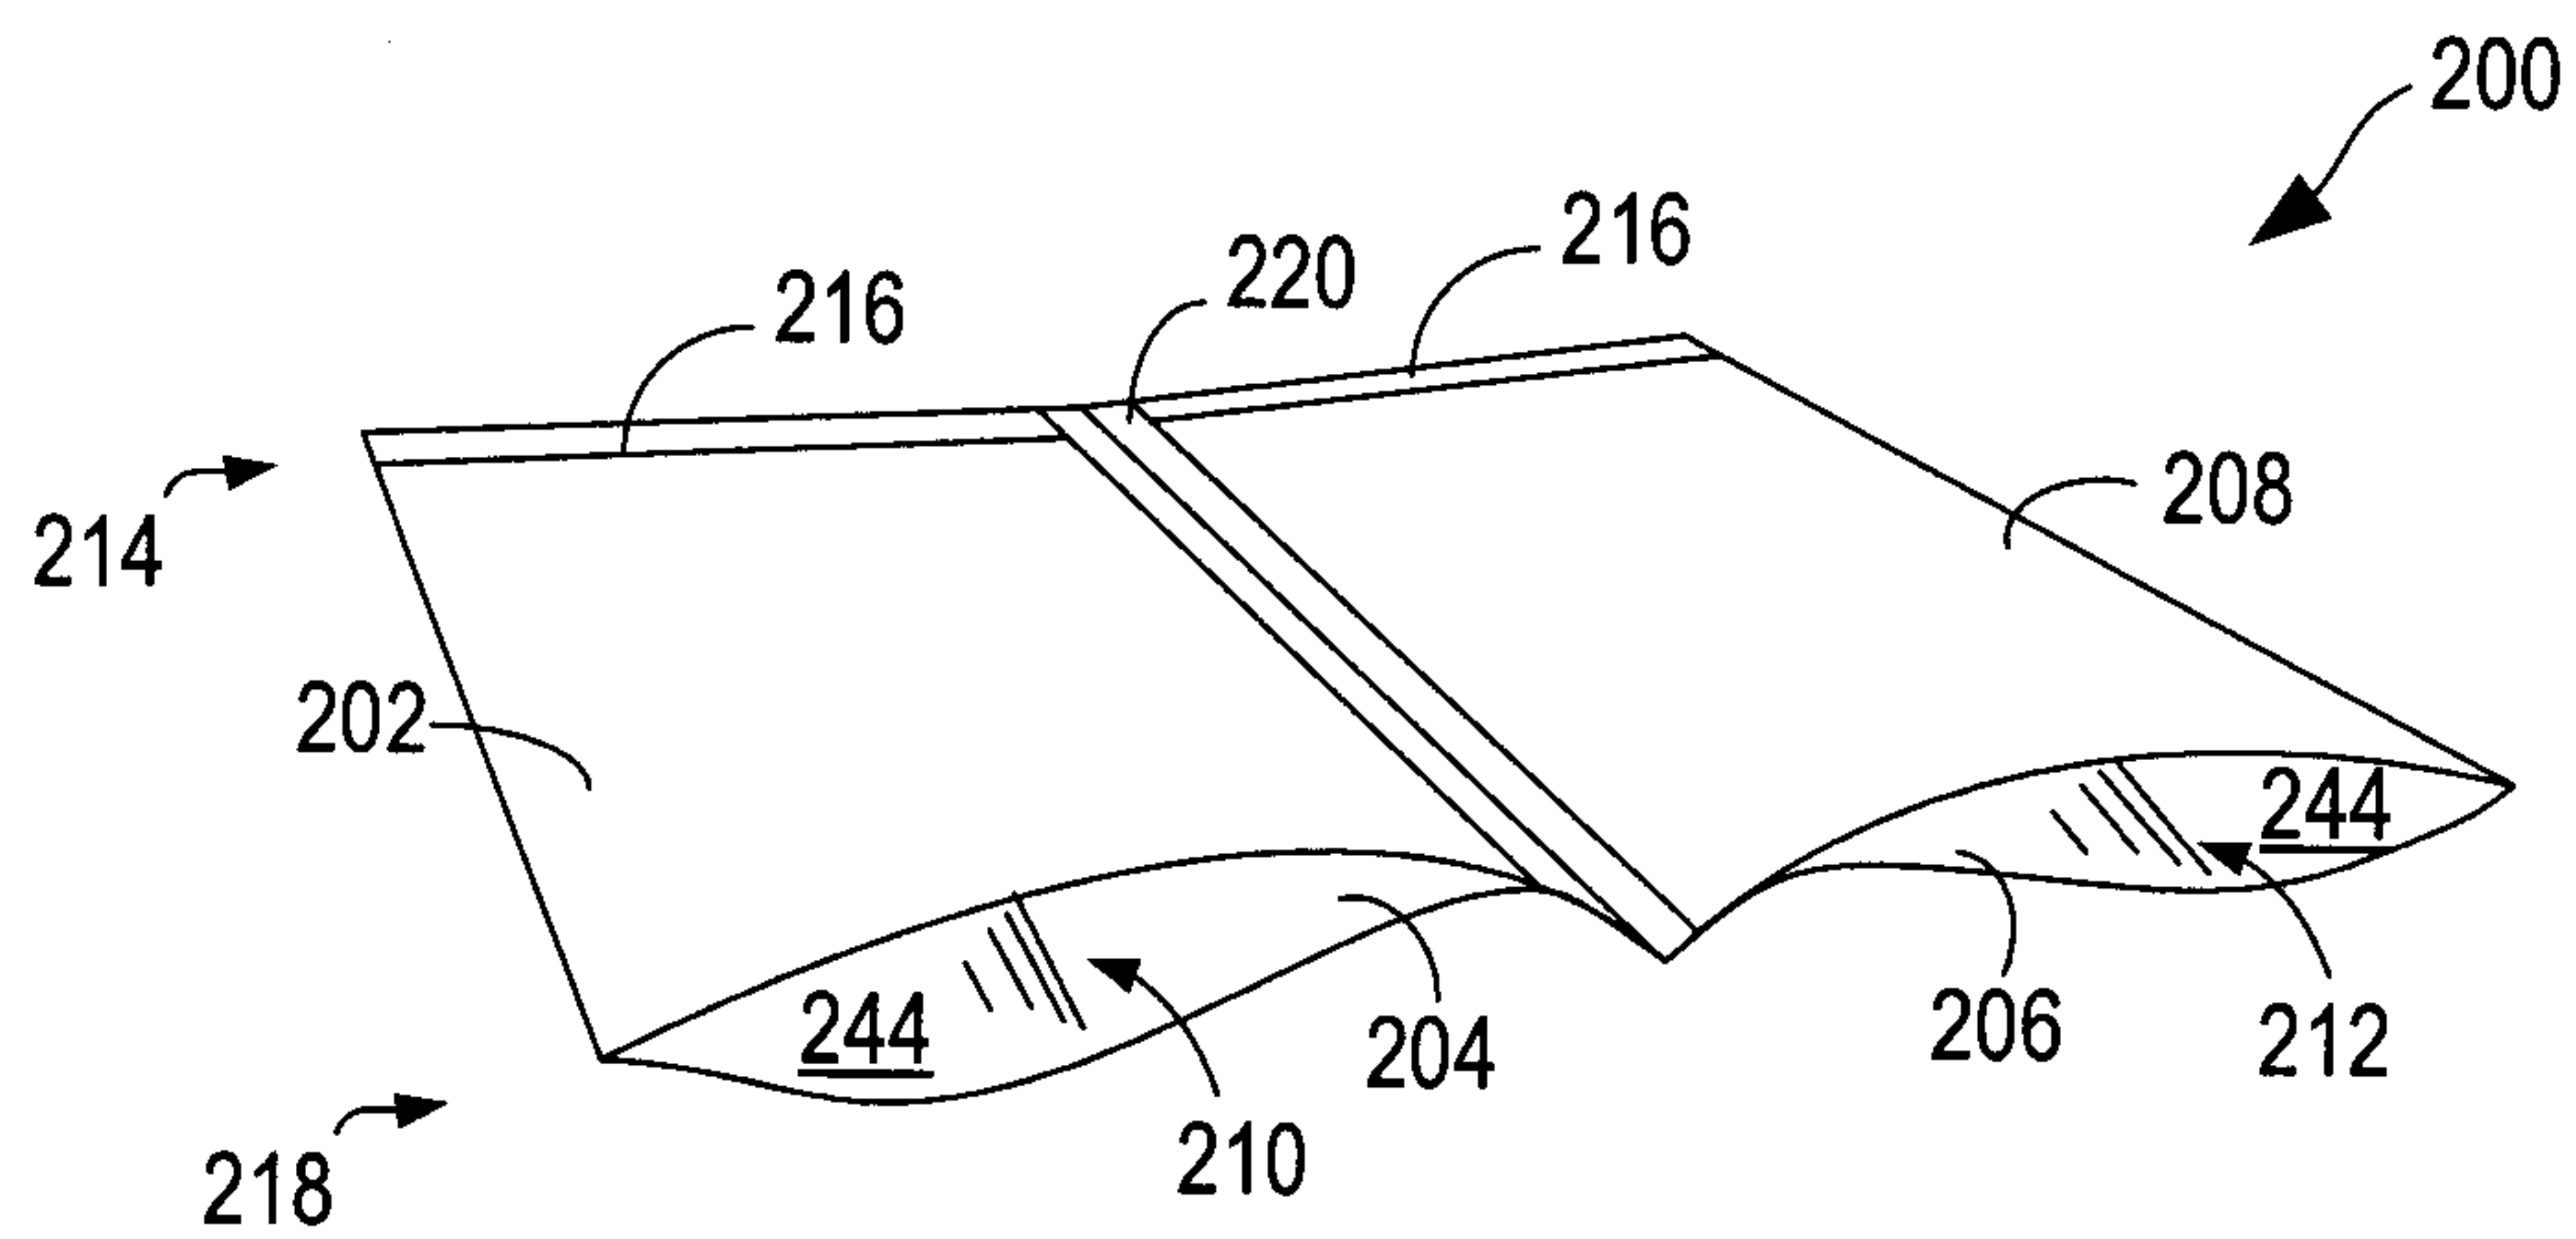


FIG. 2B

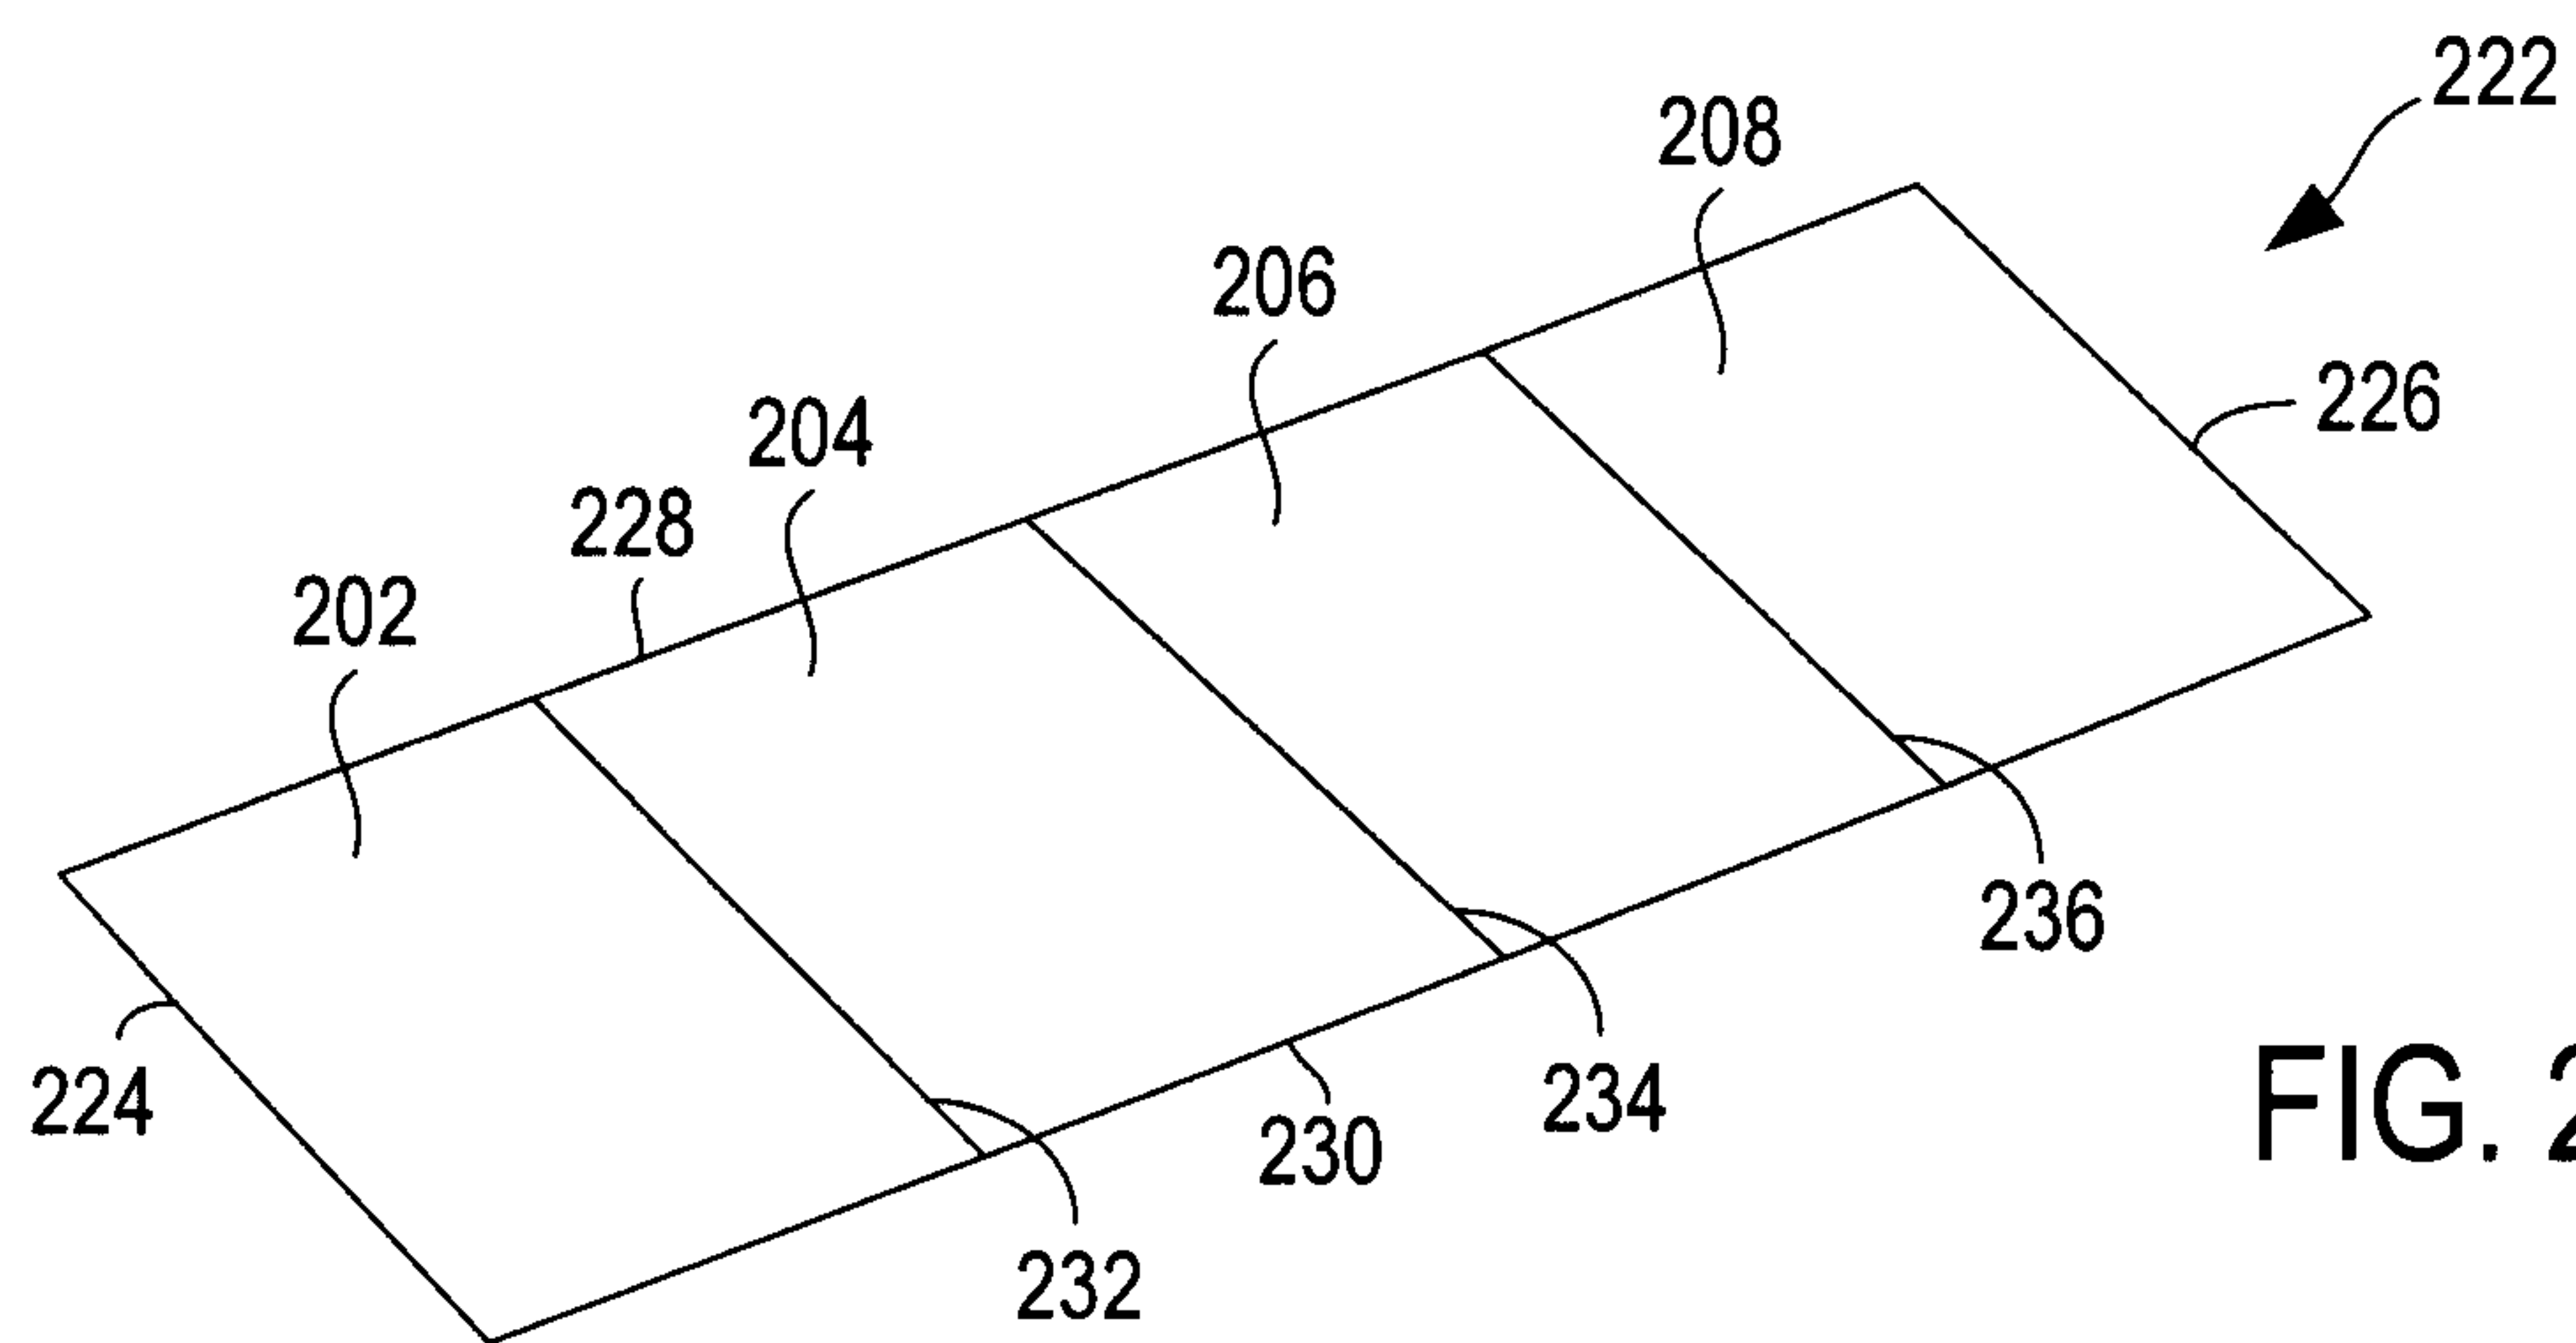


FIG. 2C

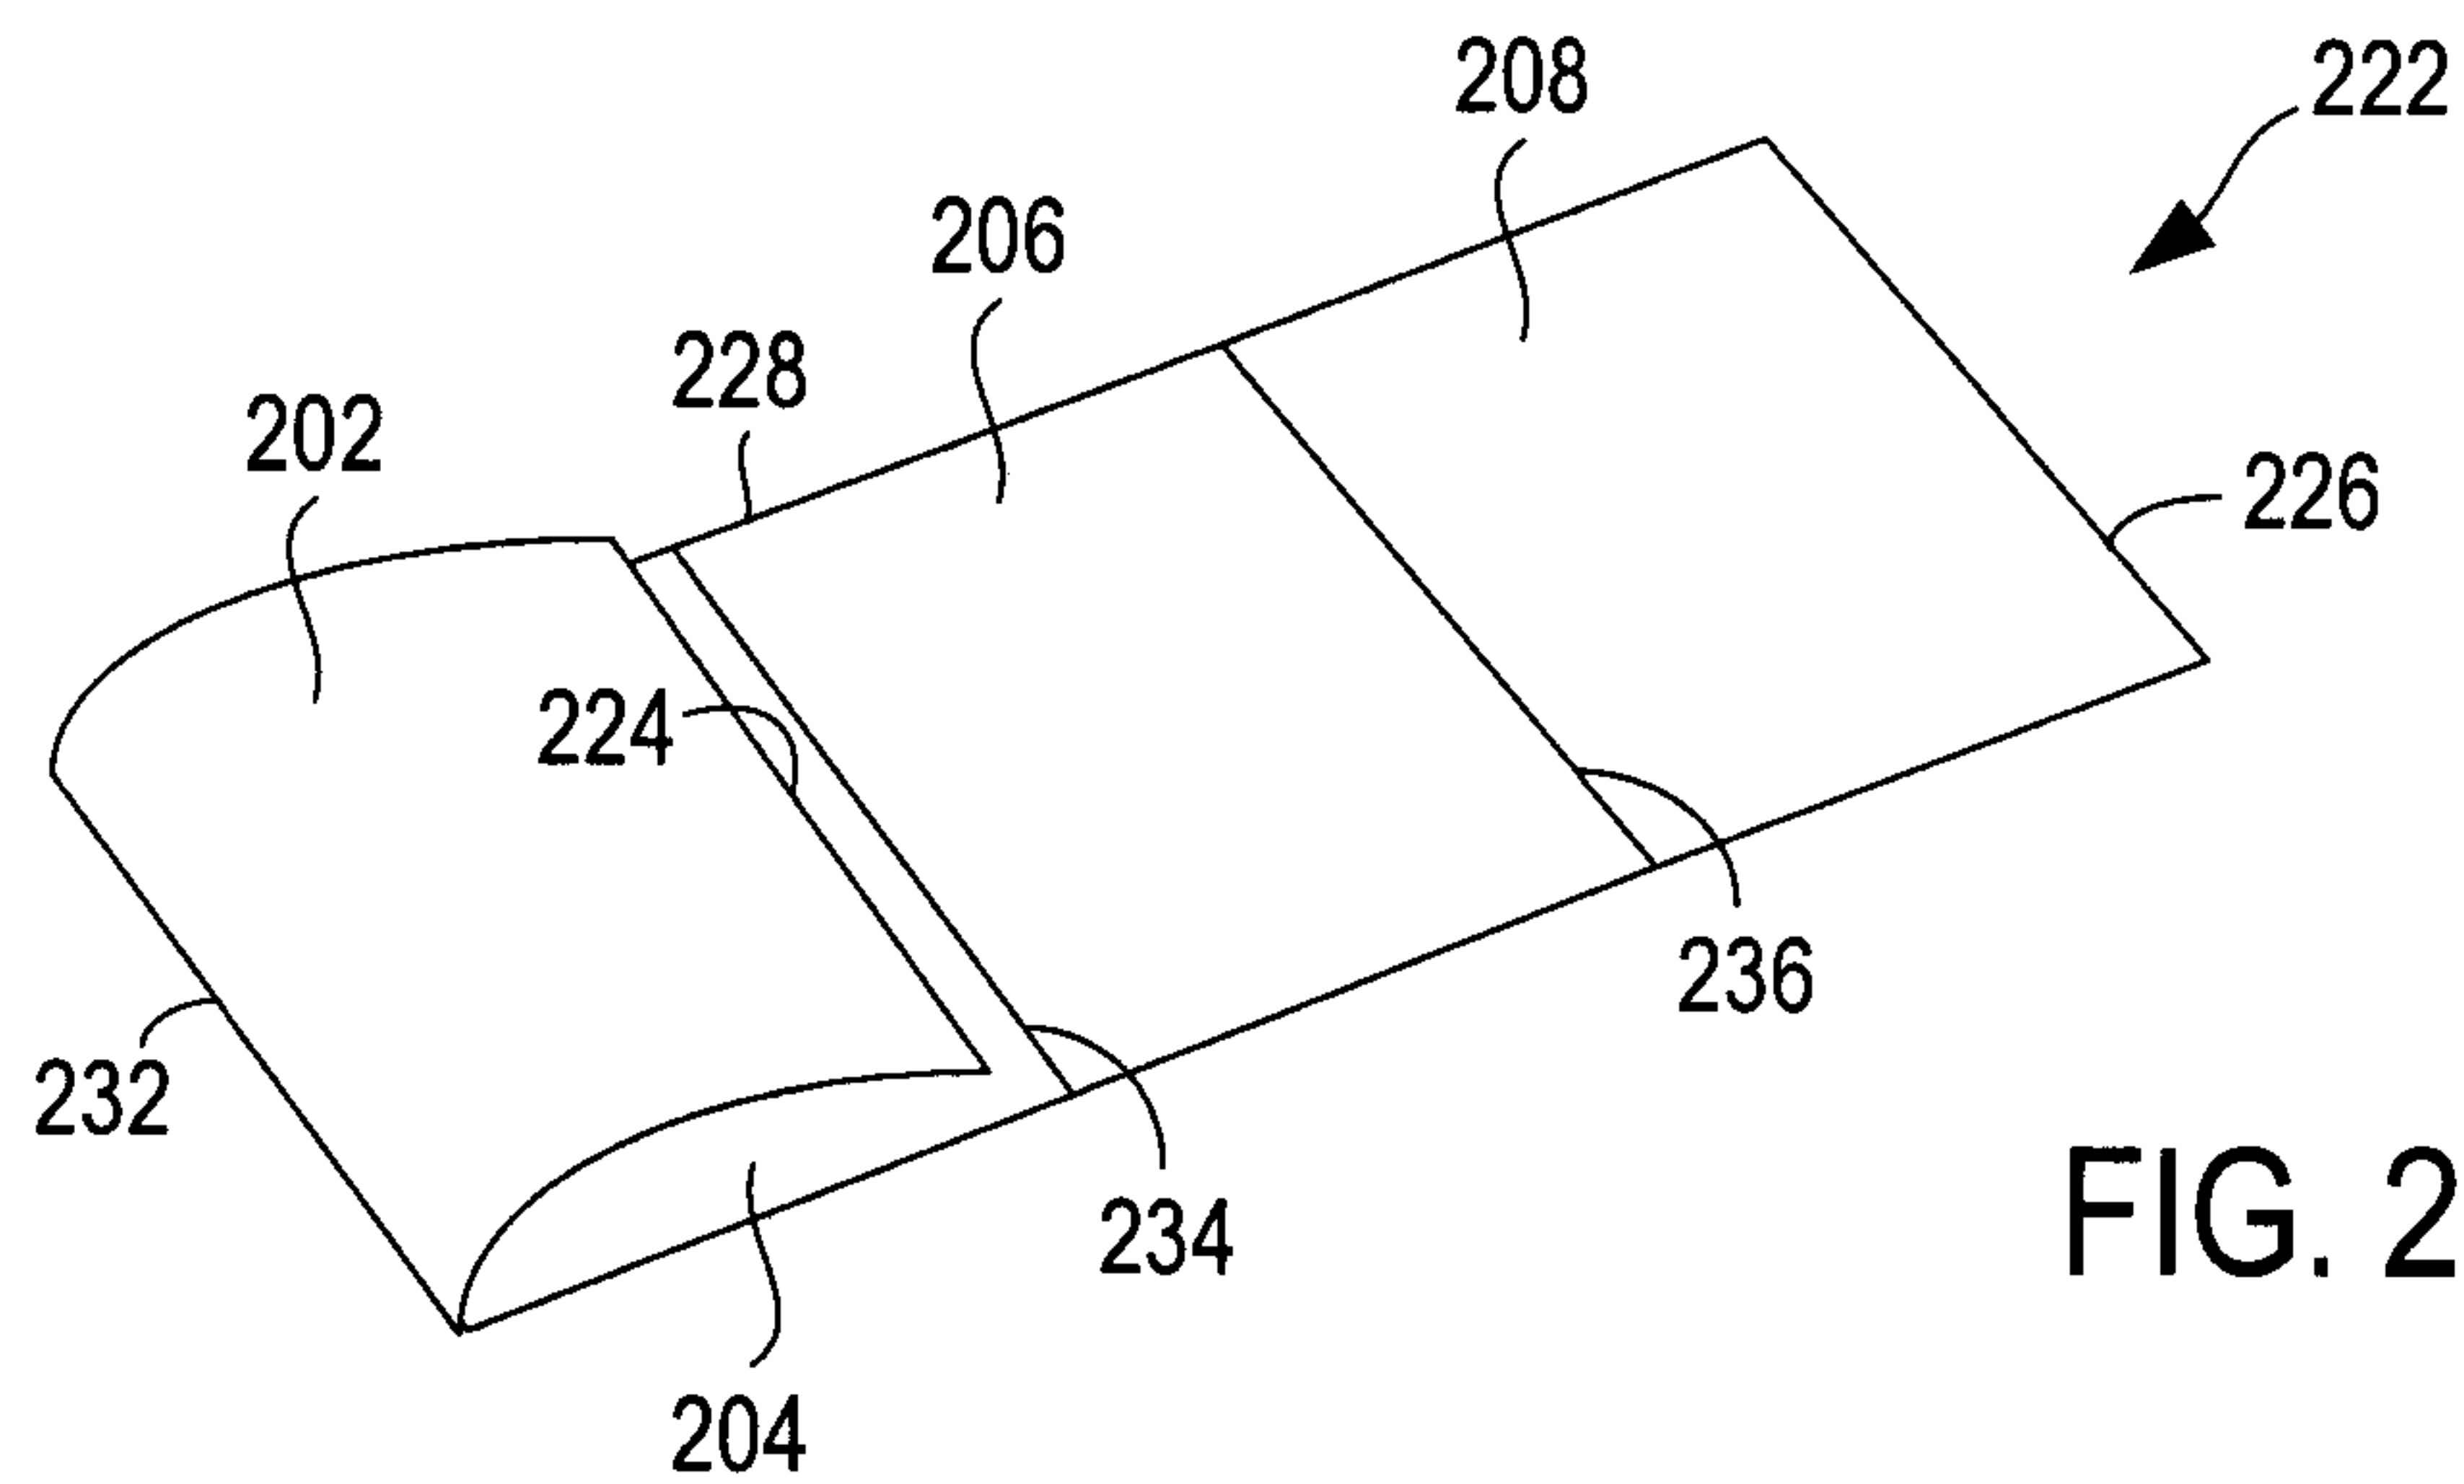


FIG. 2D

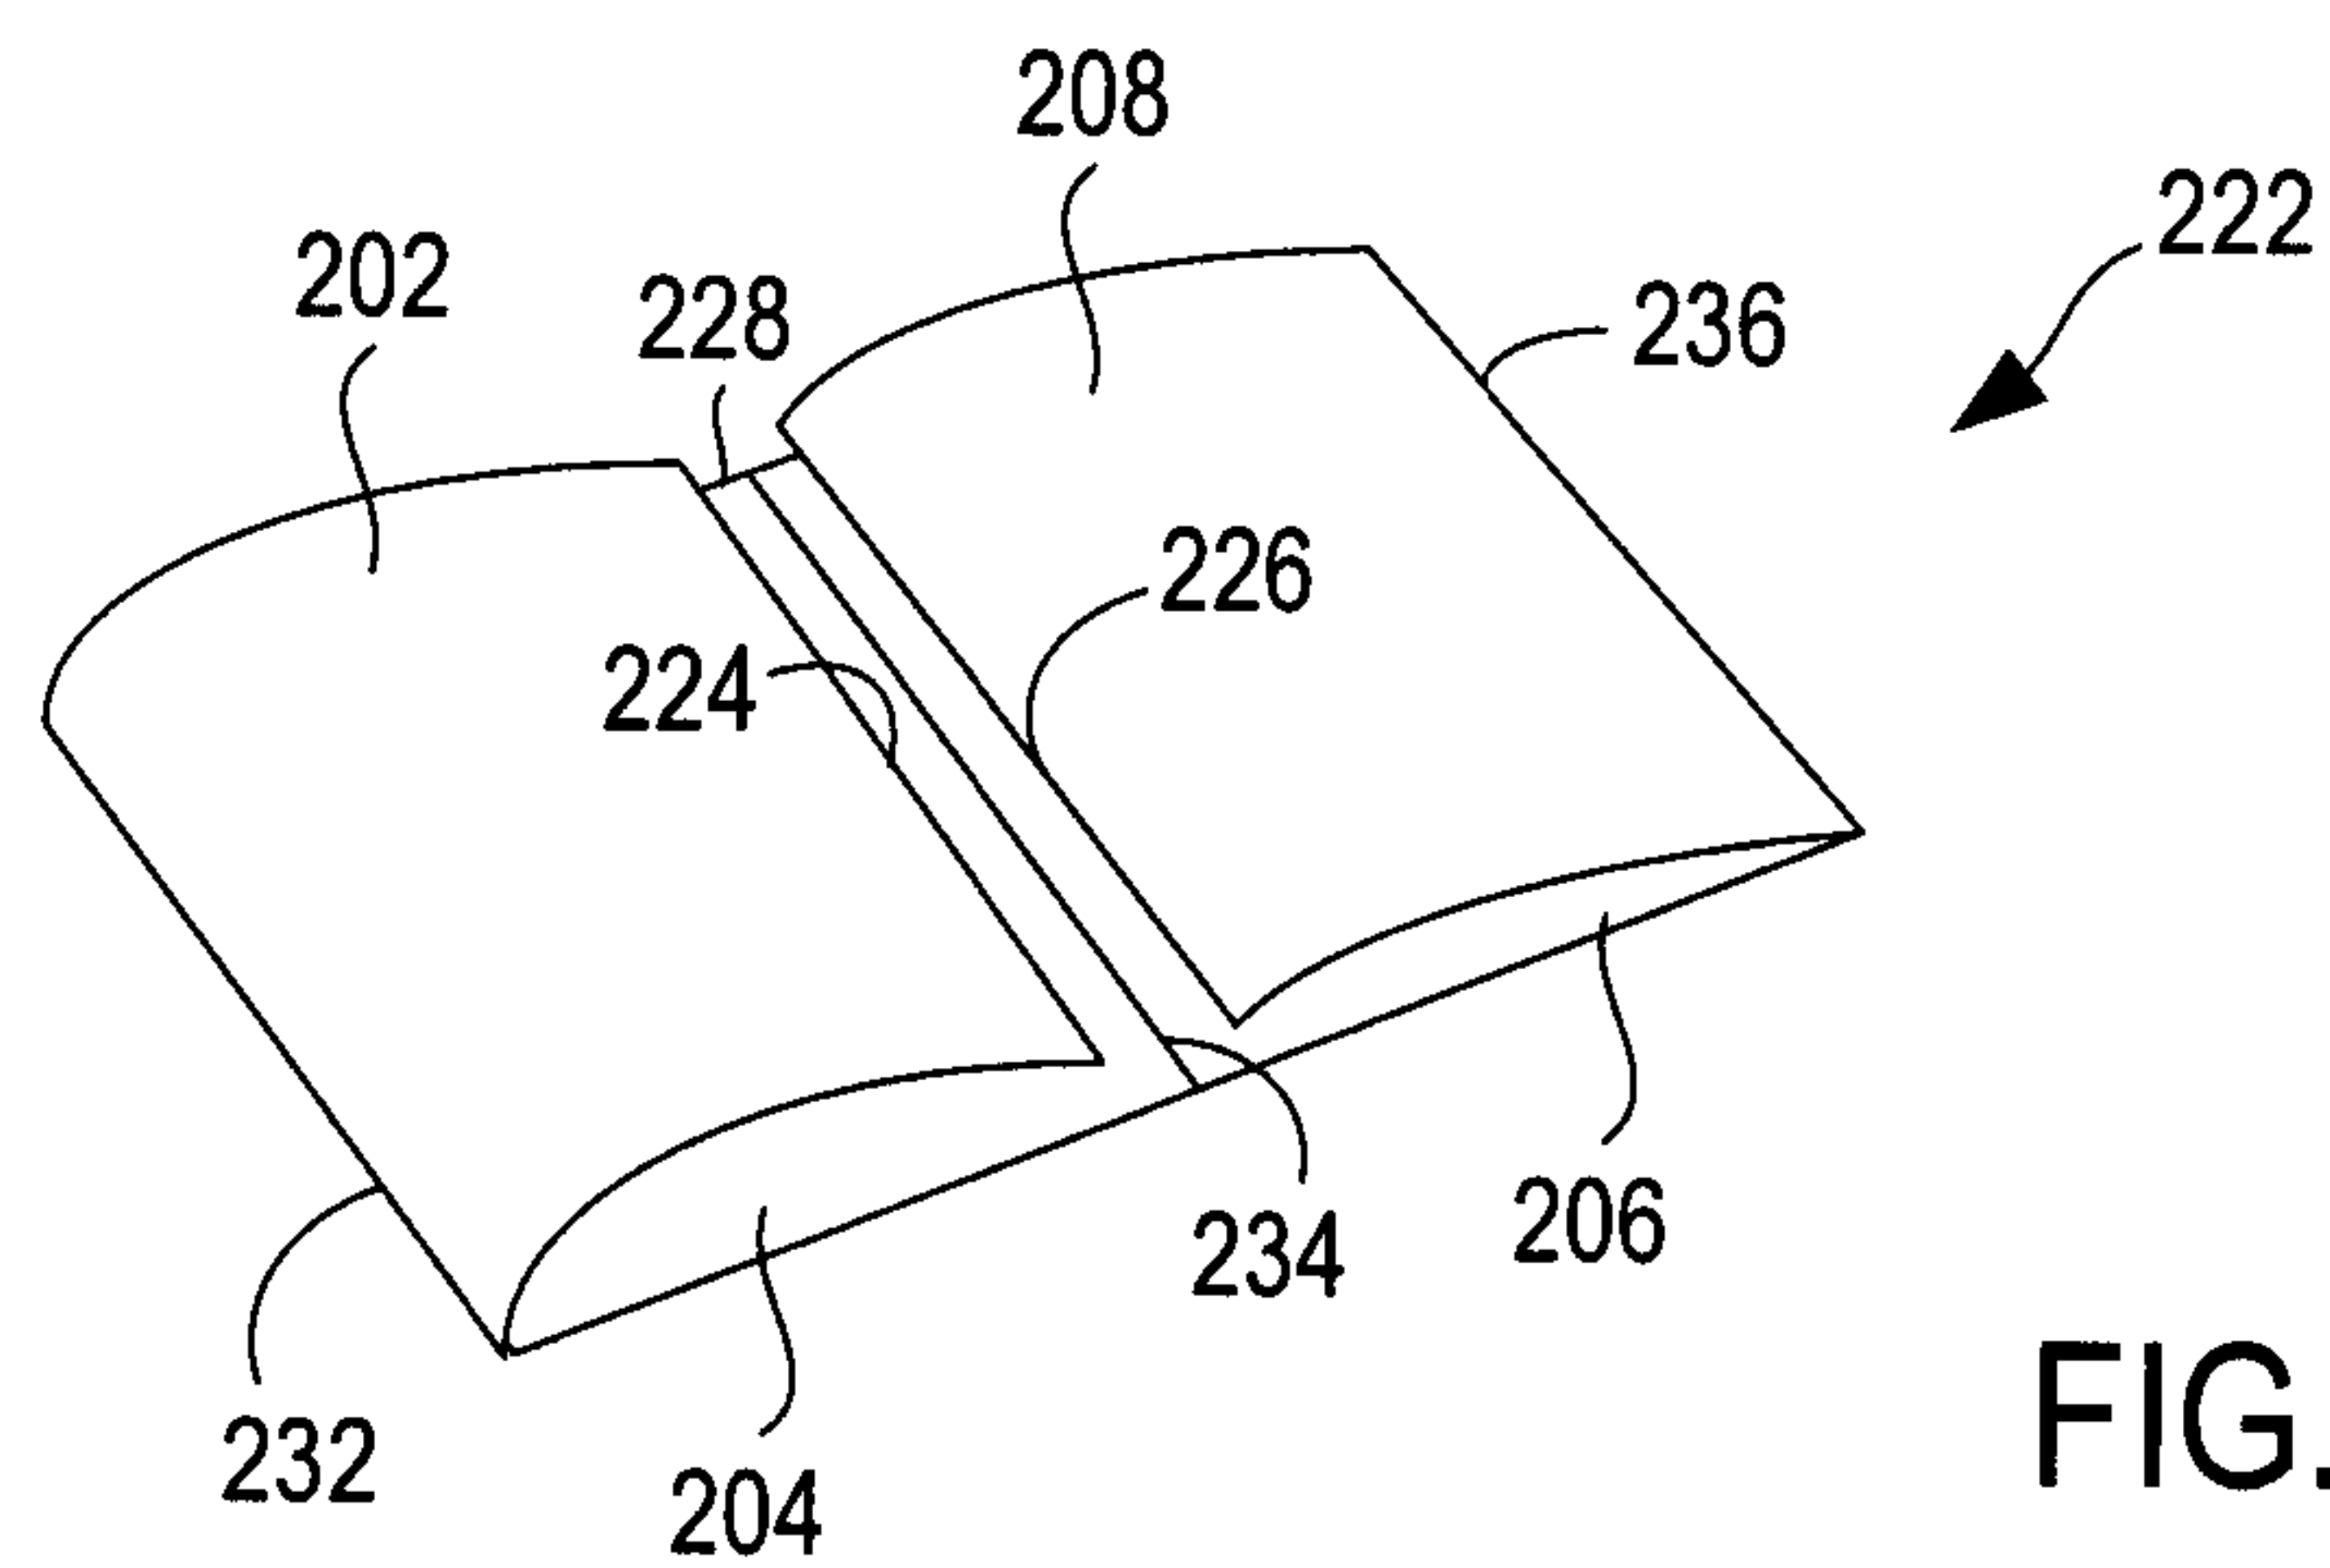


FIG. 2E

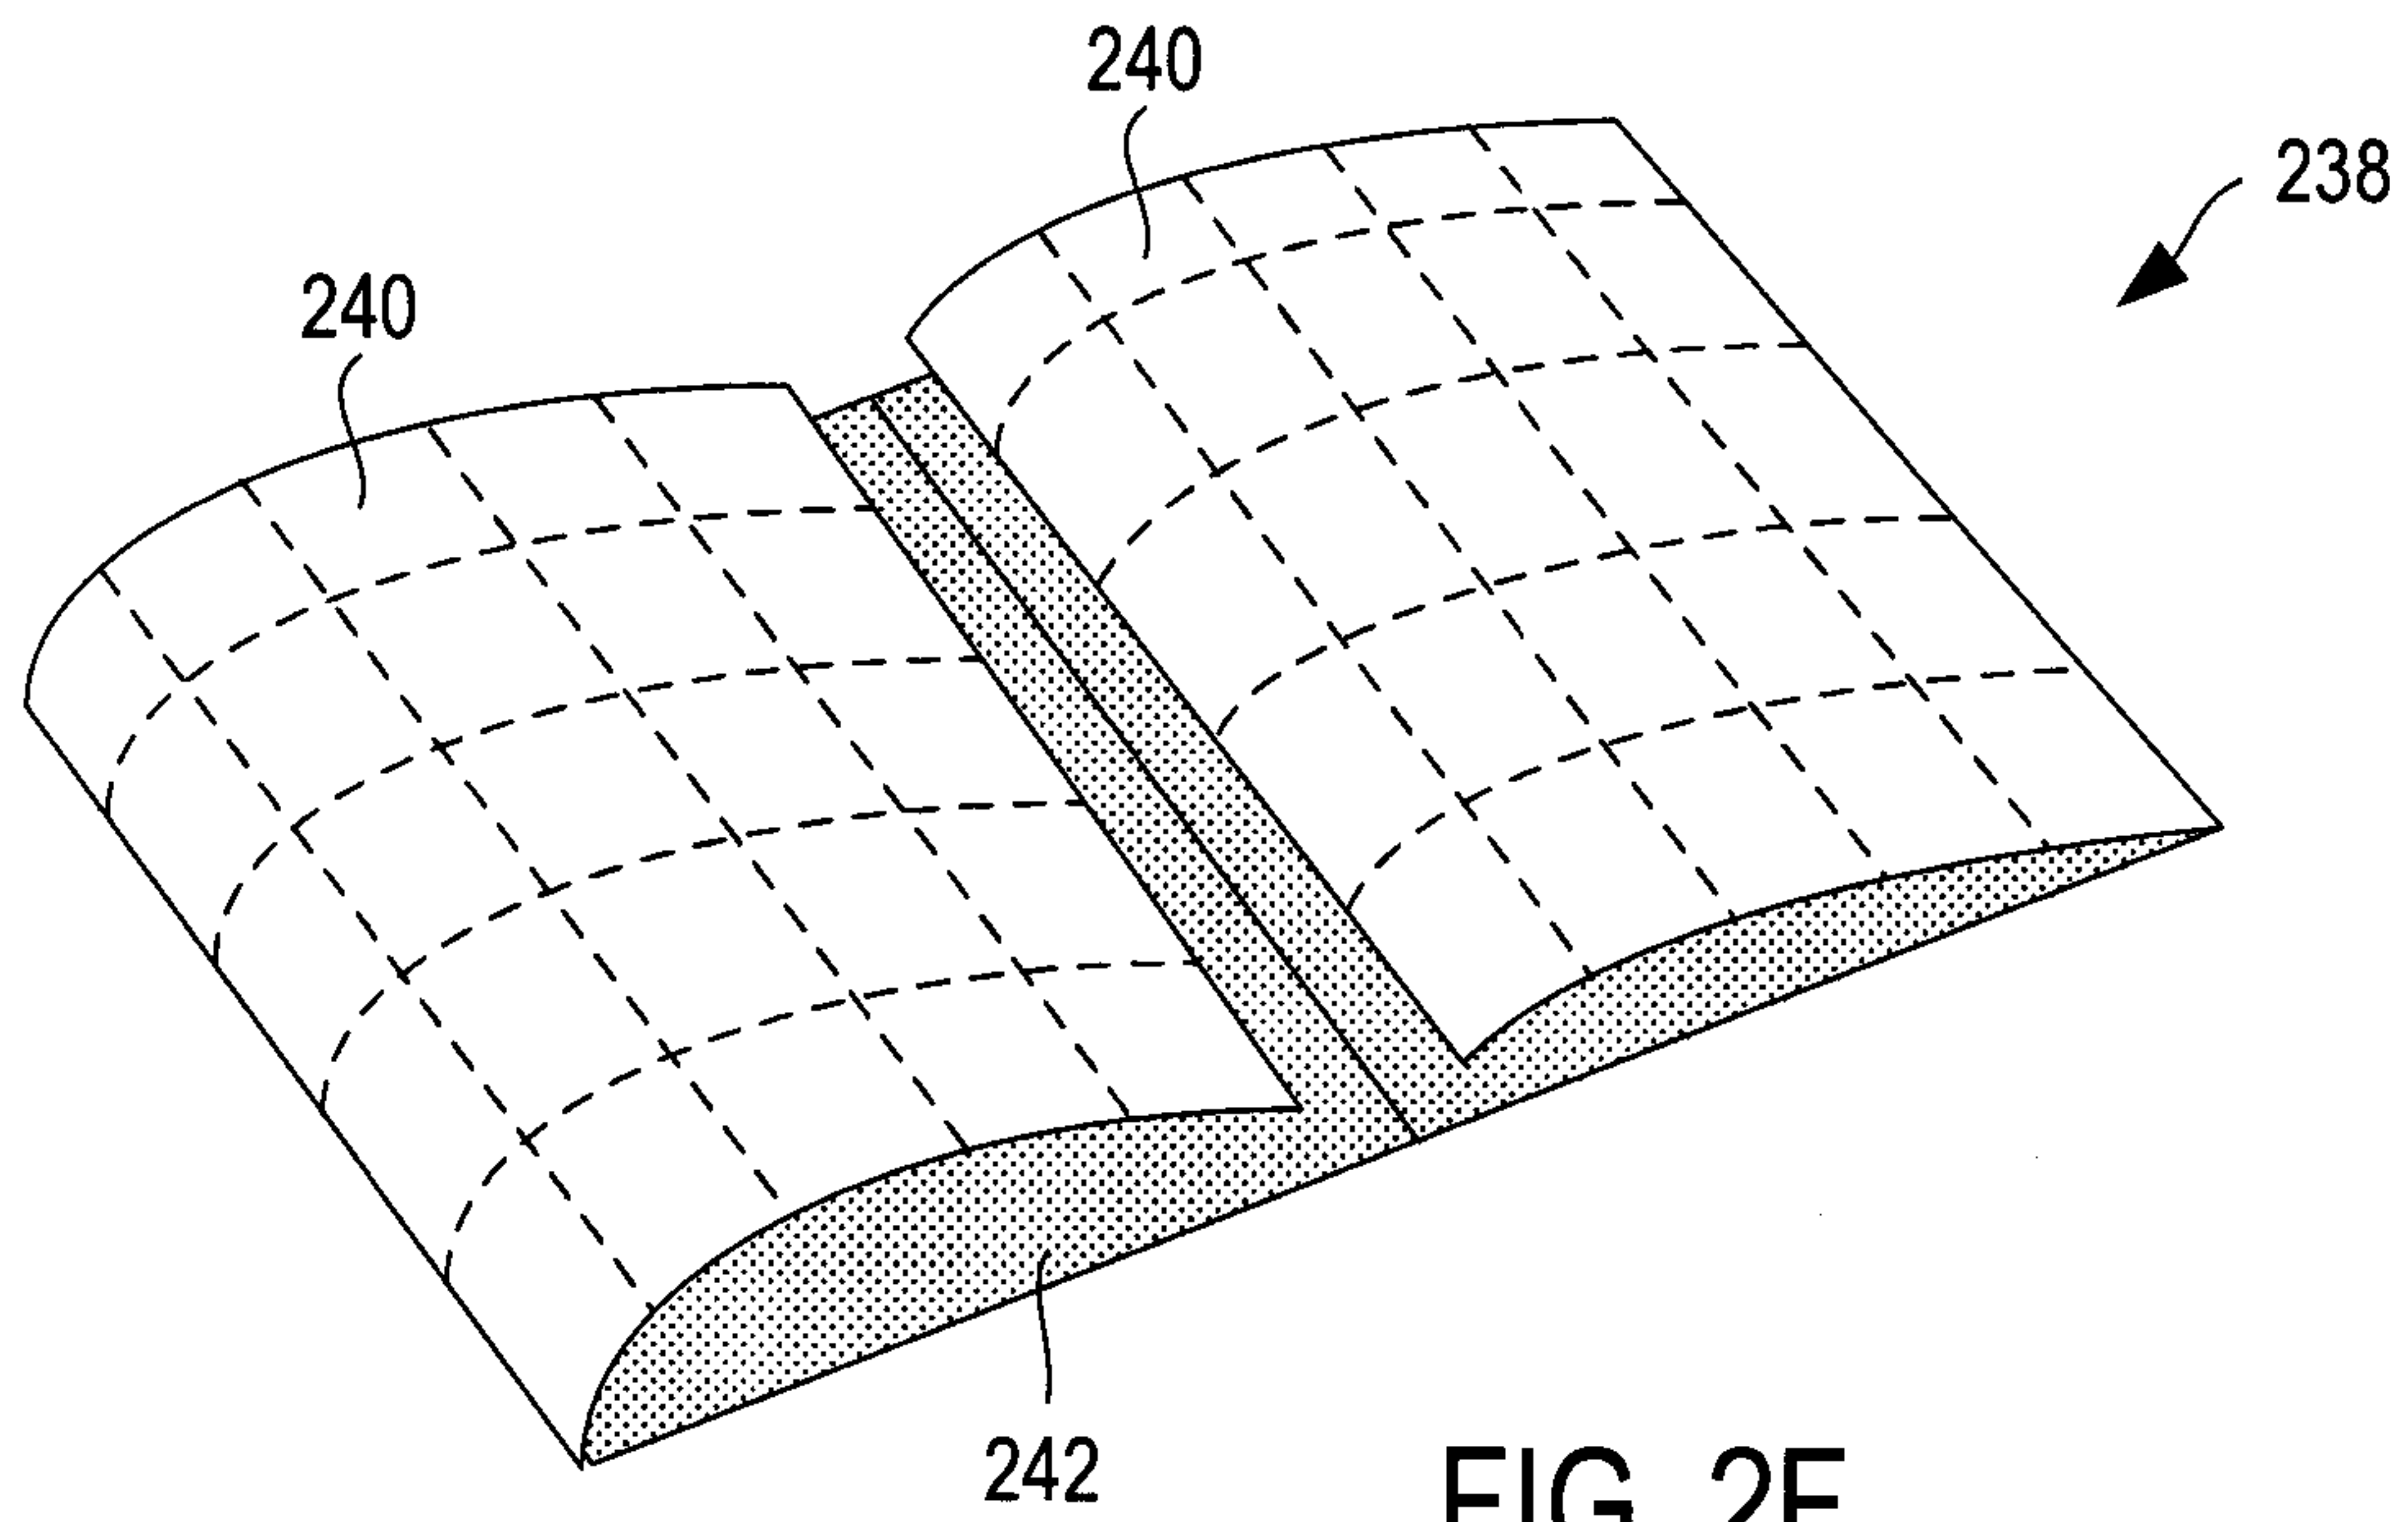


FIG. 2F

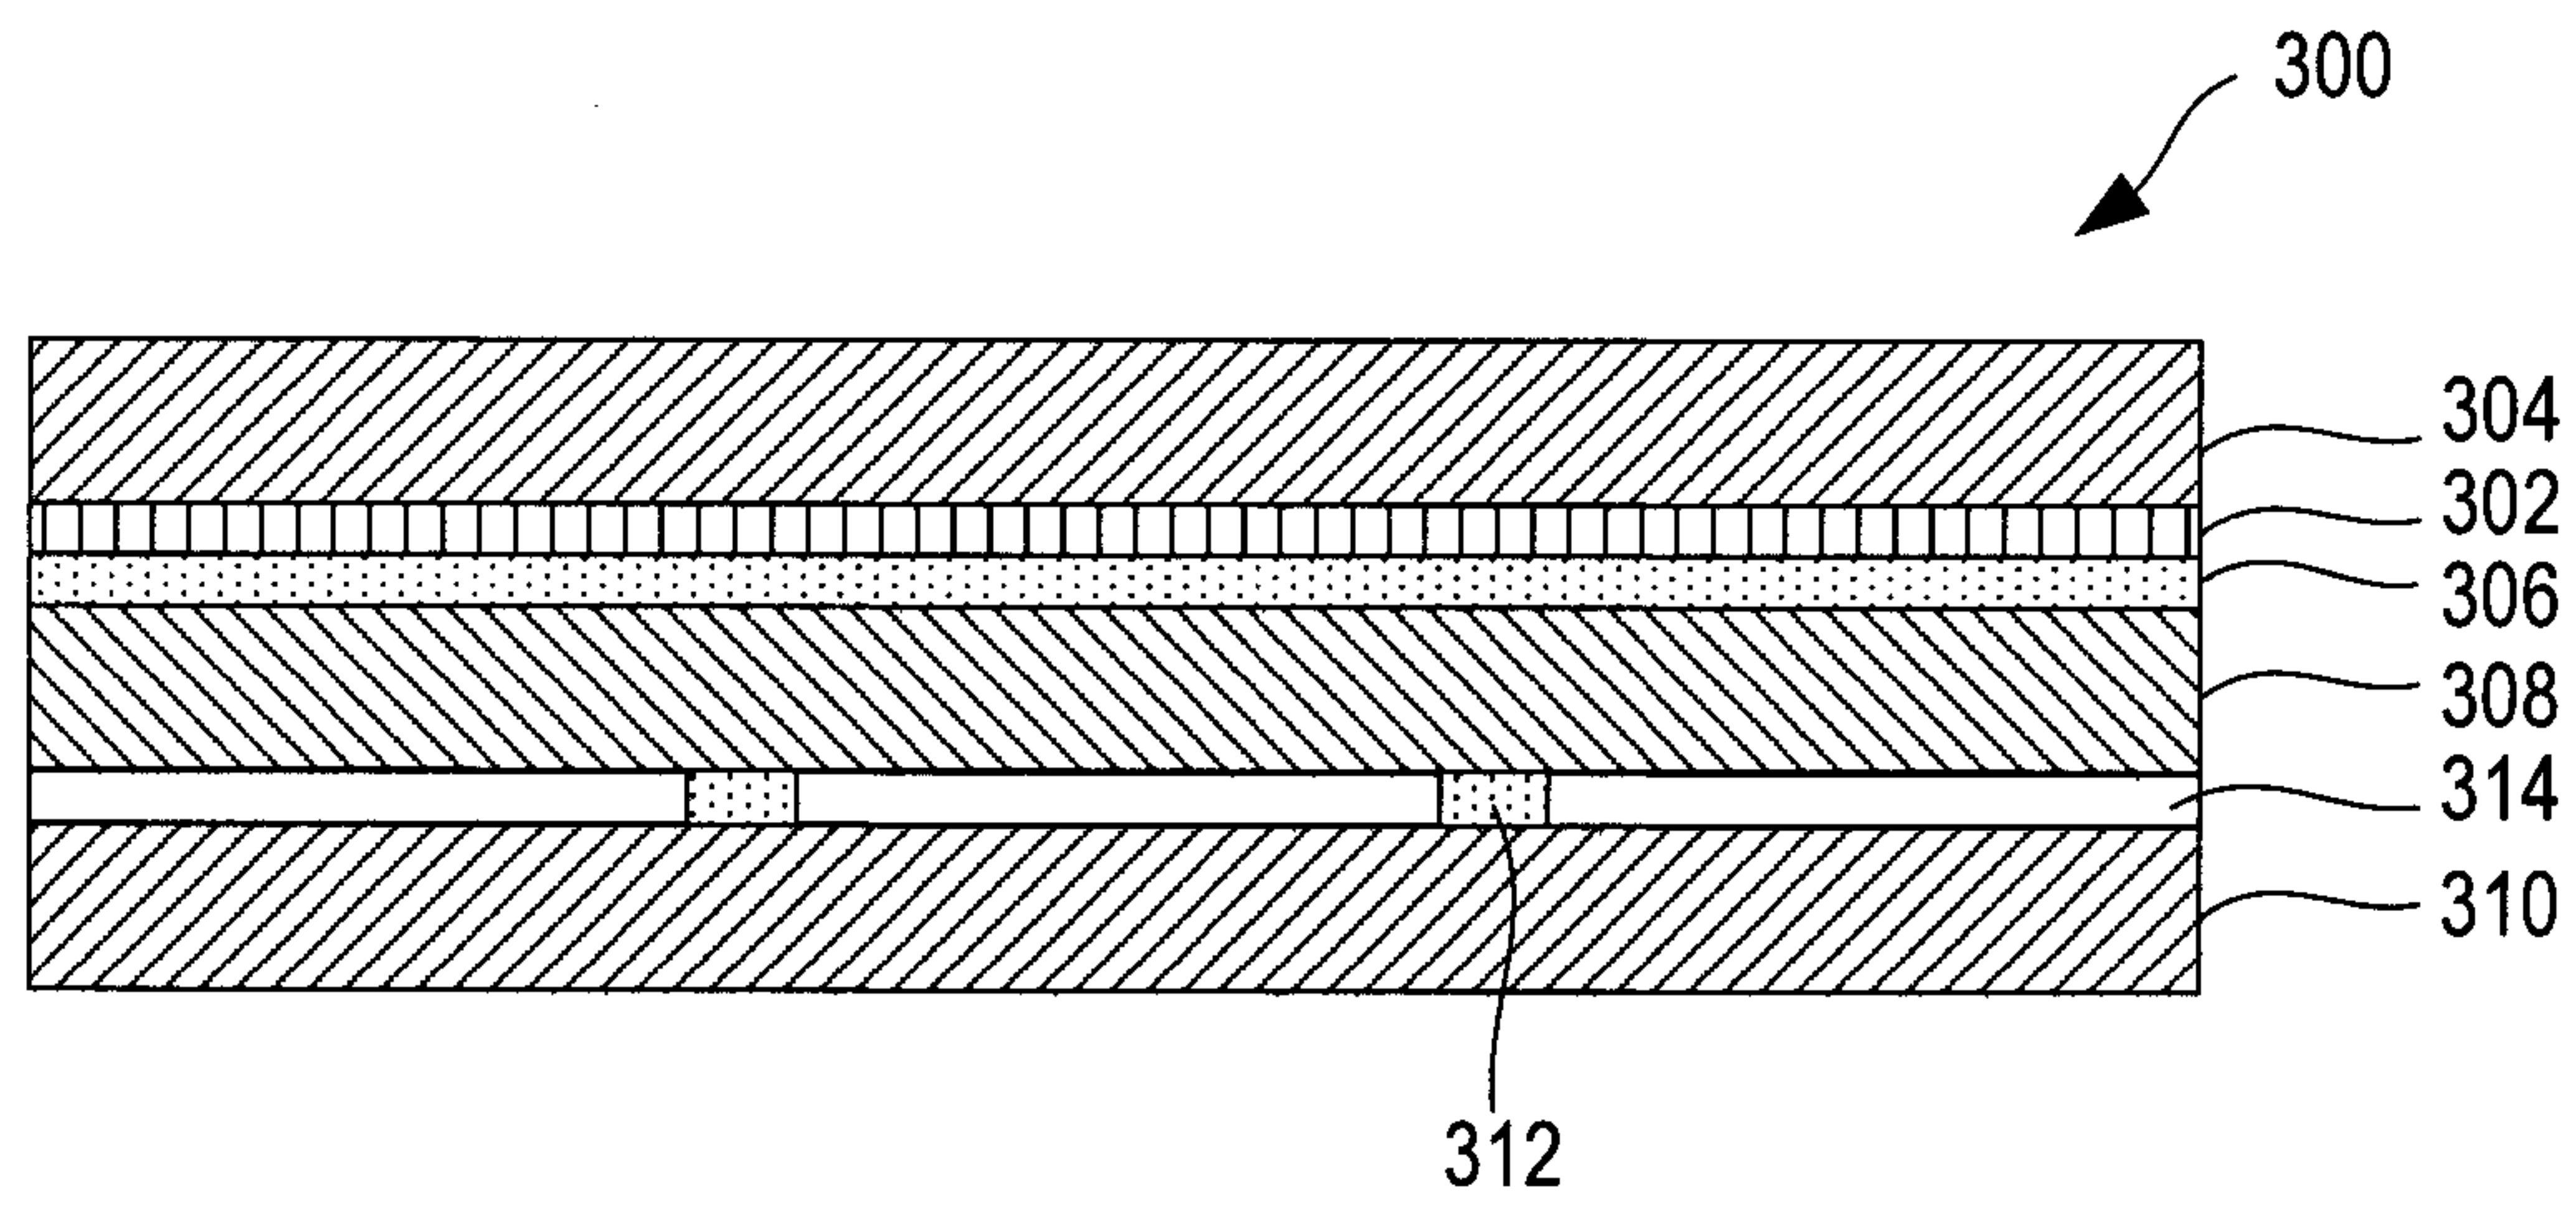


FIG. 3A

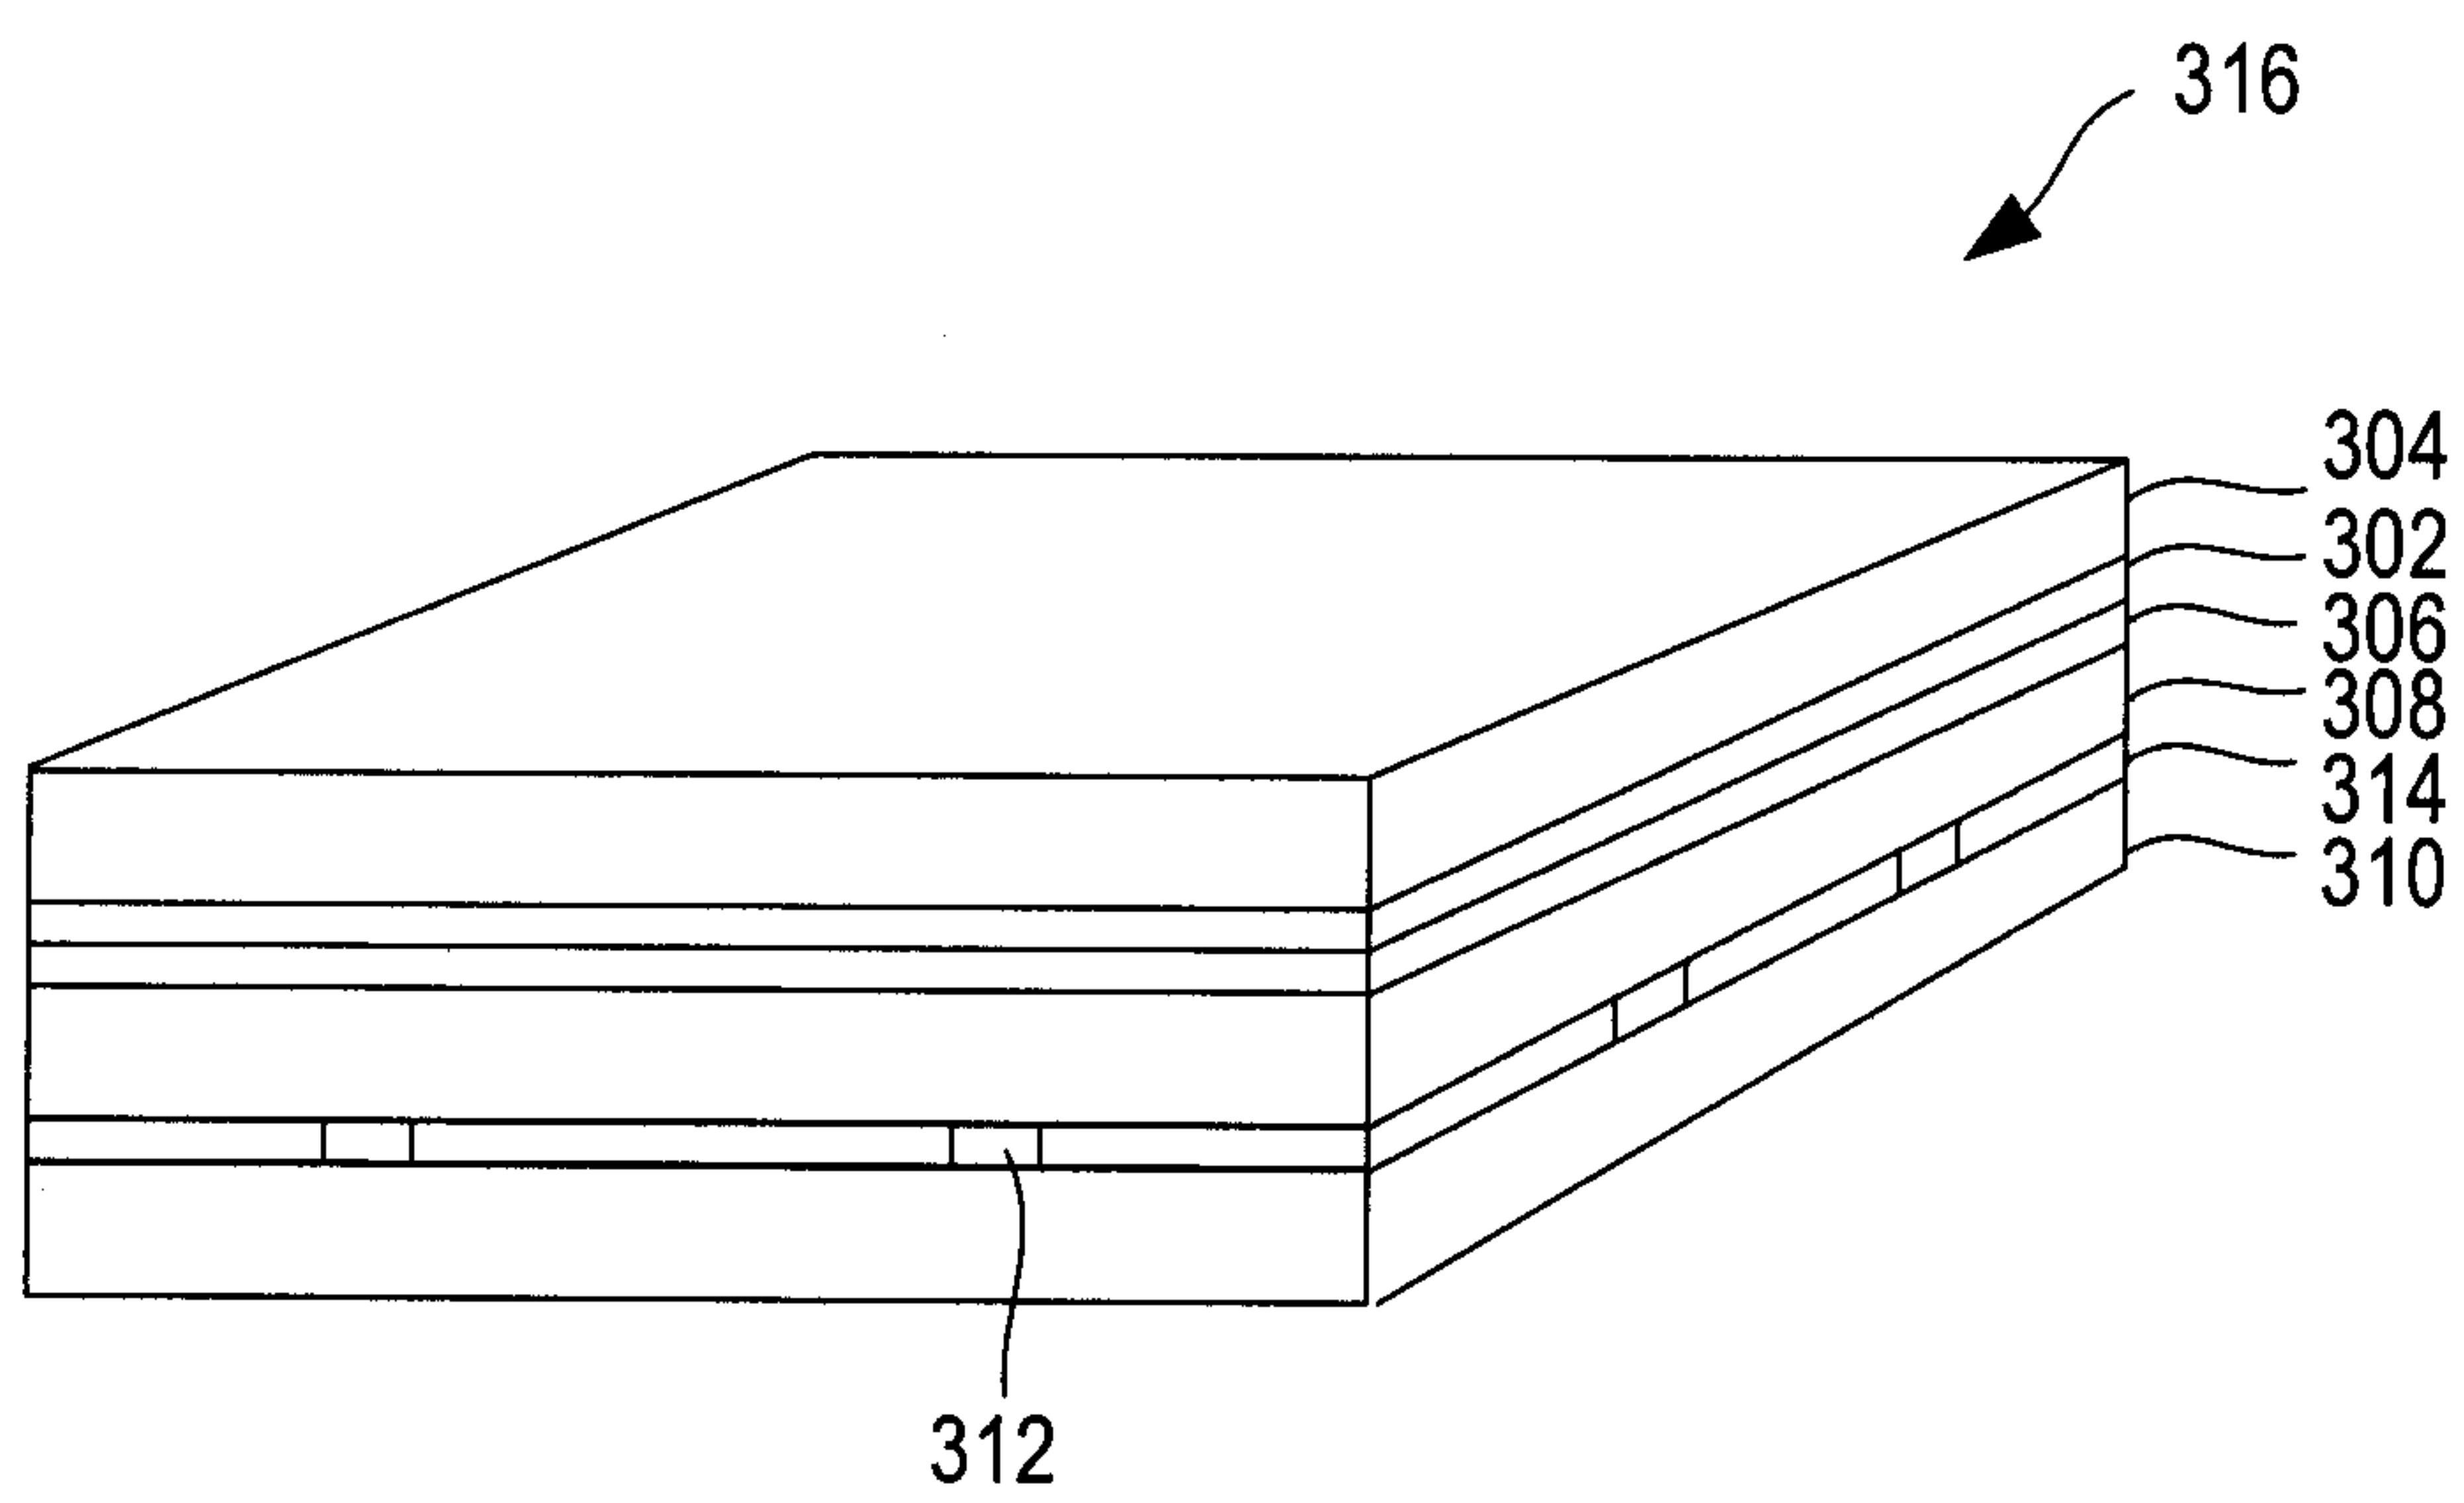


FIG. 3B

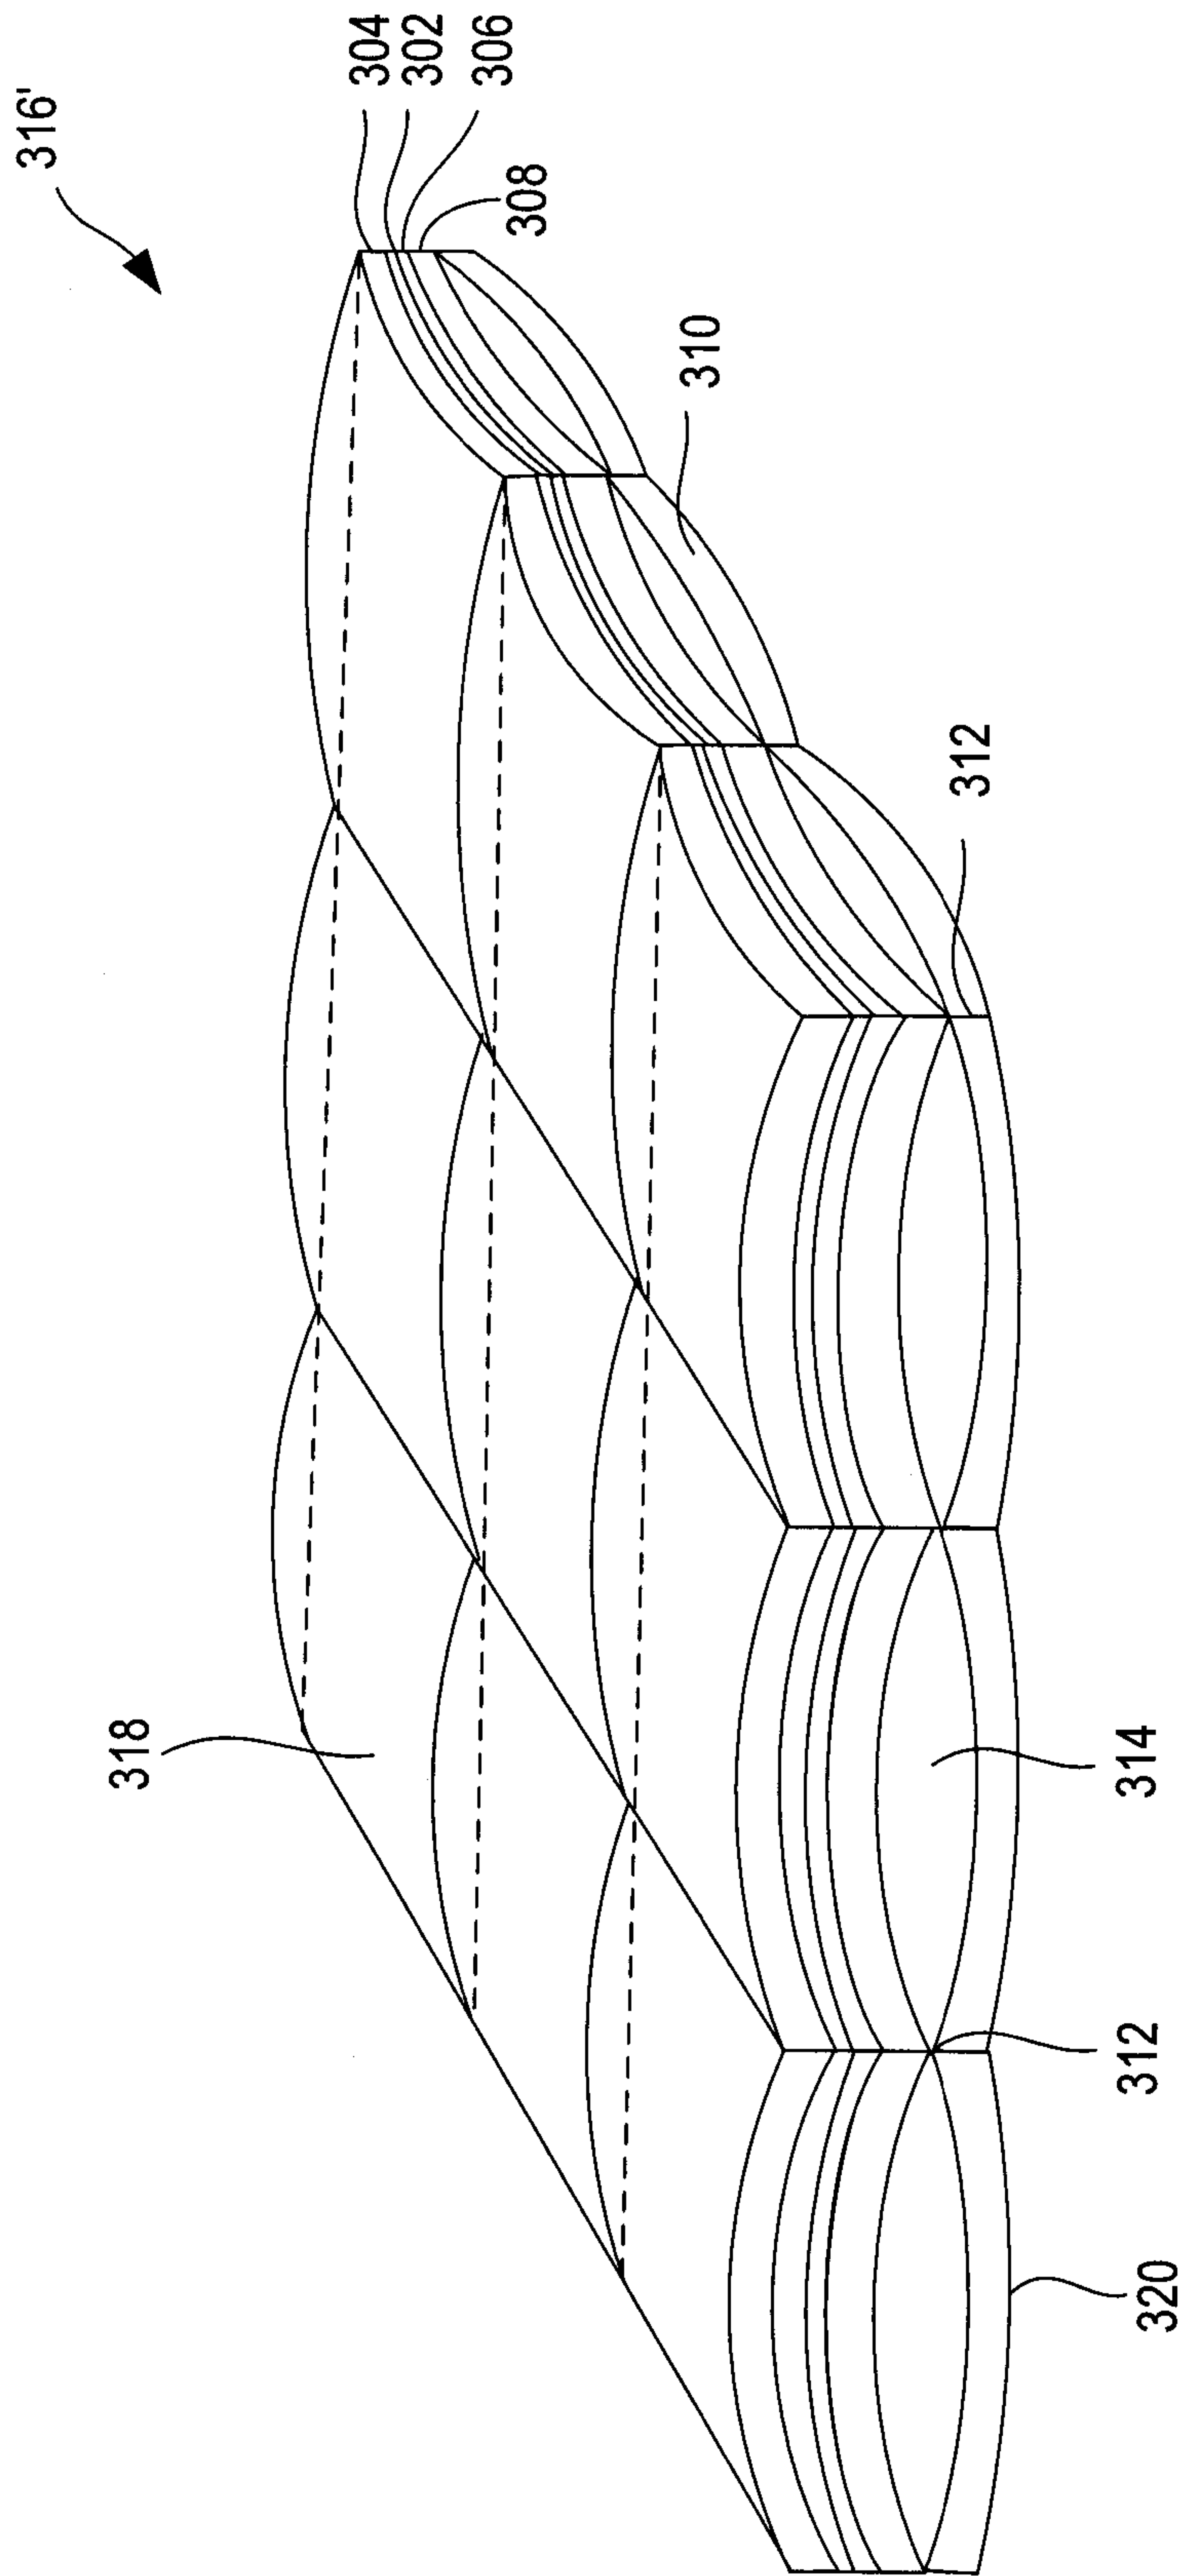


FIG. 3C

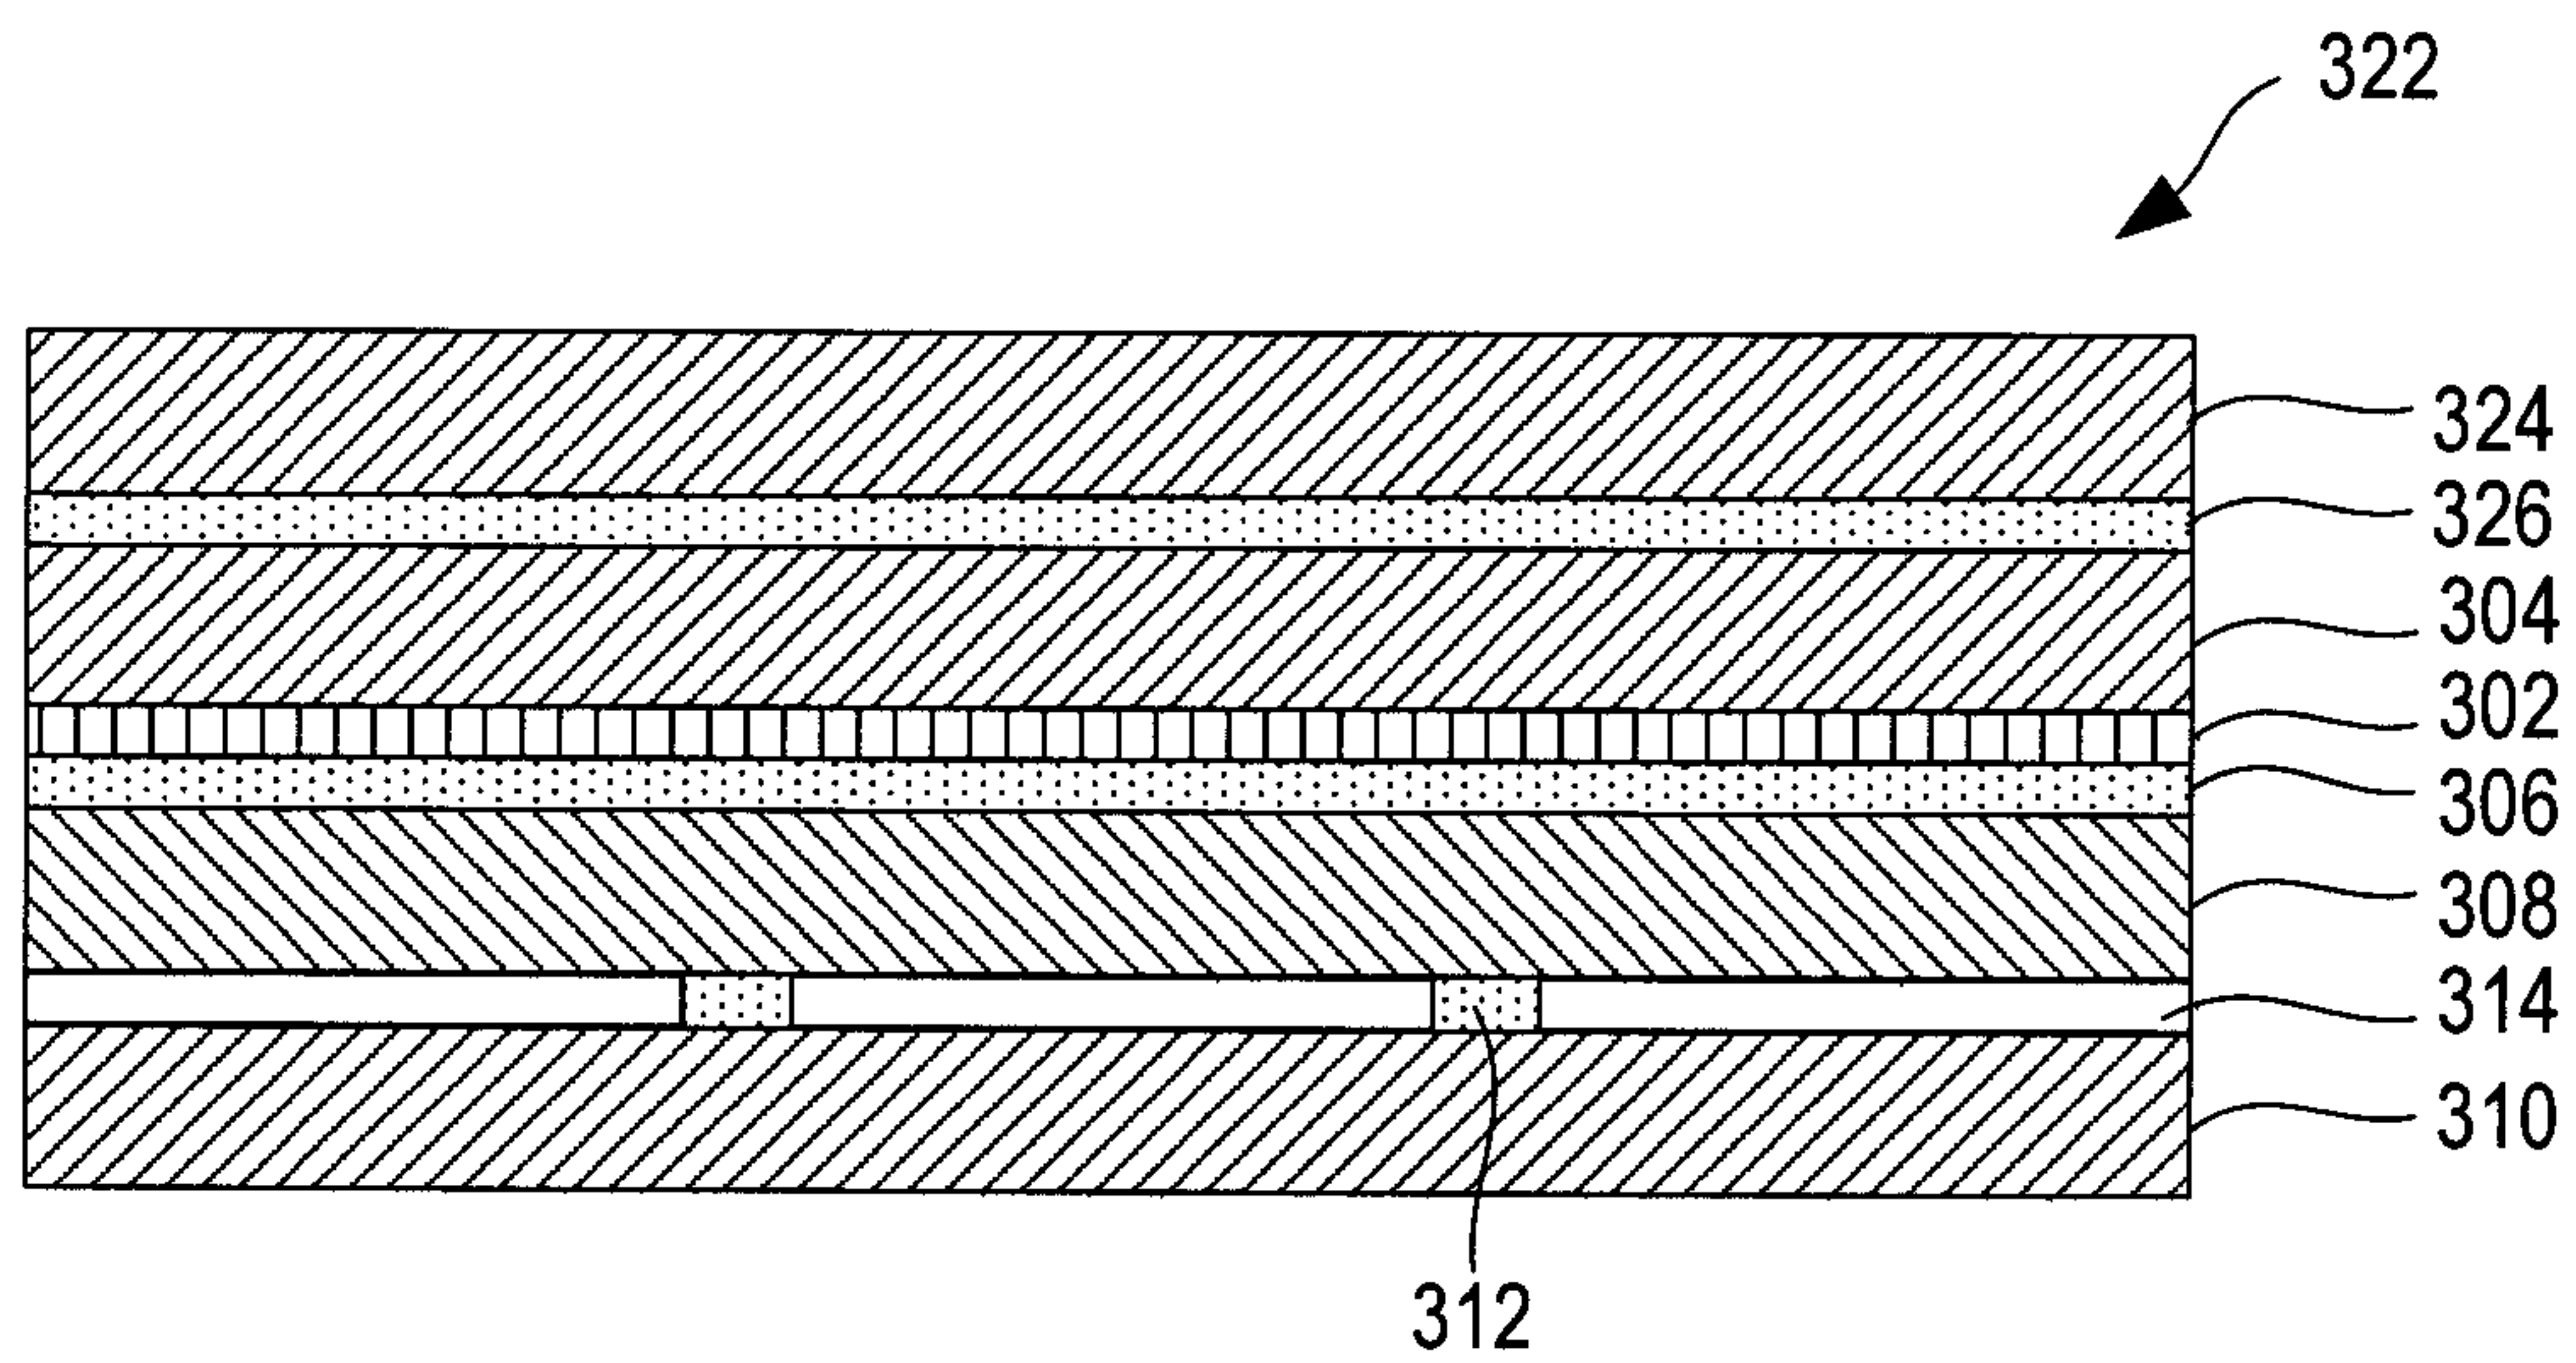


FIG. 3D

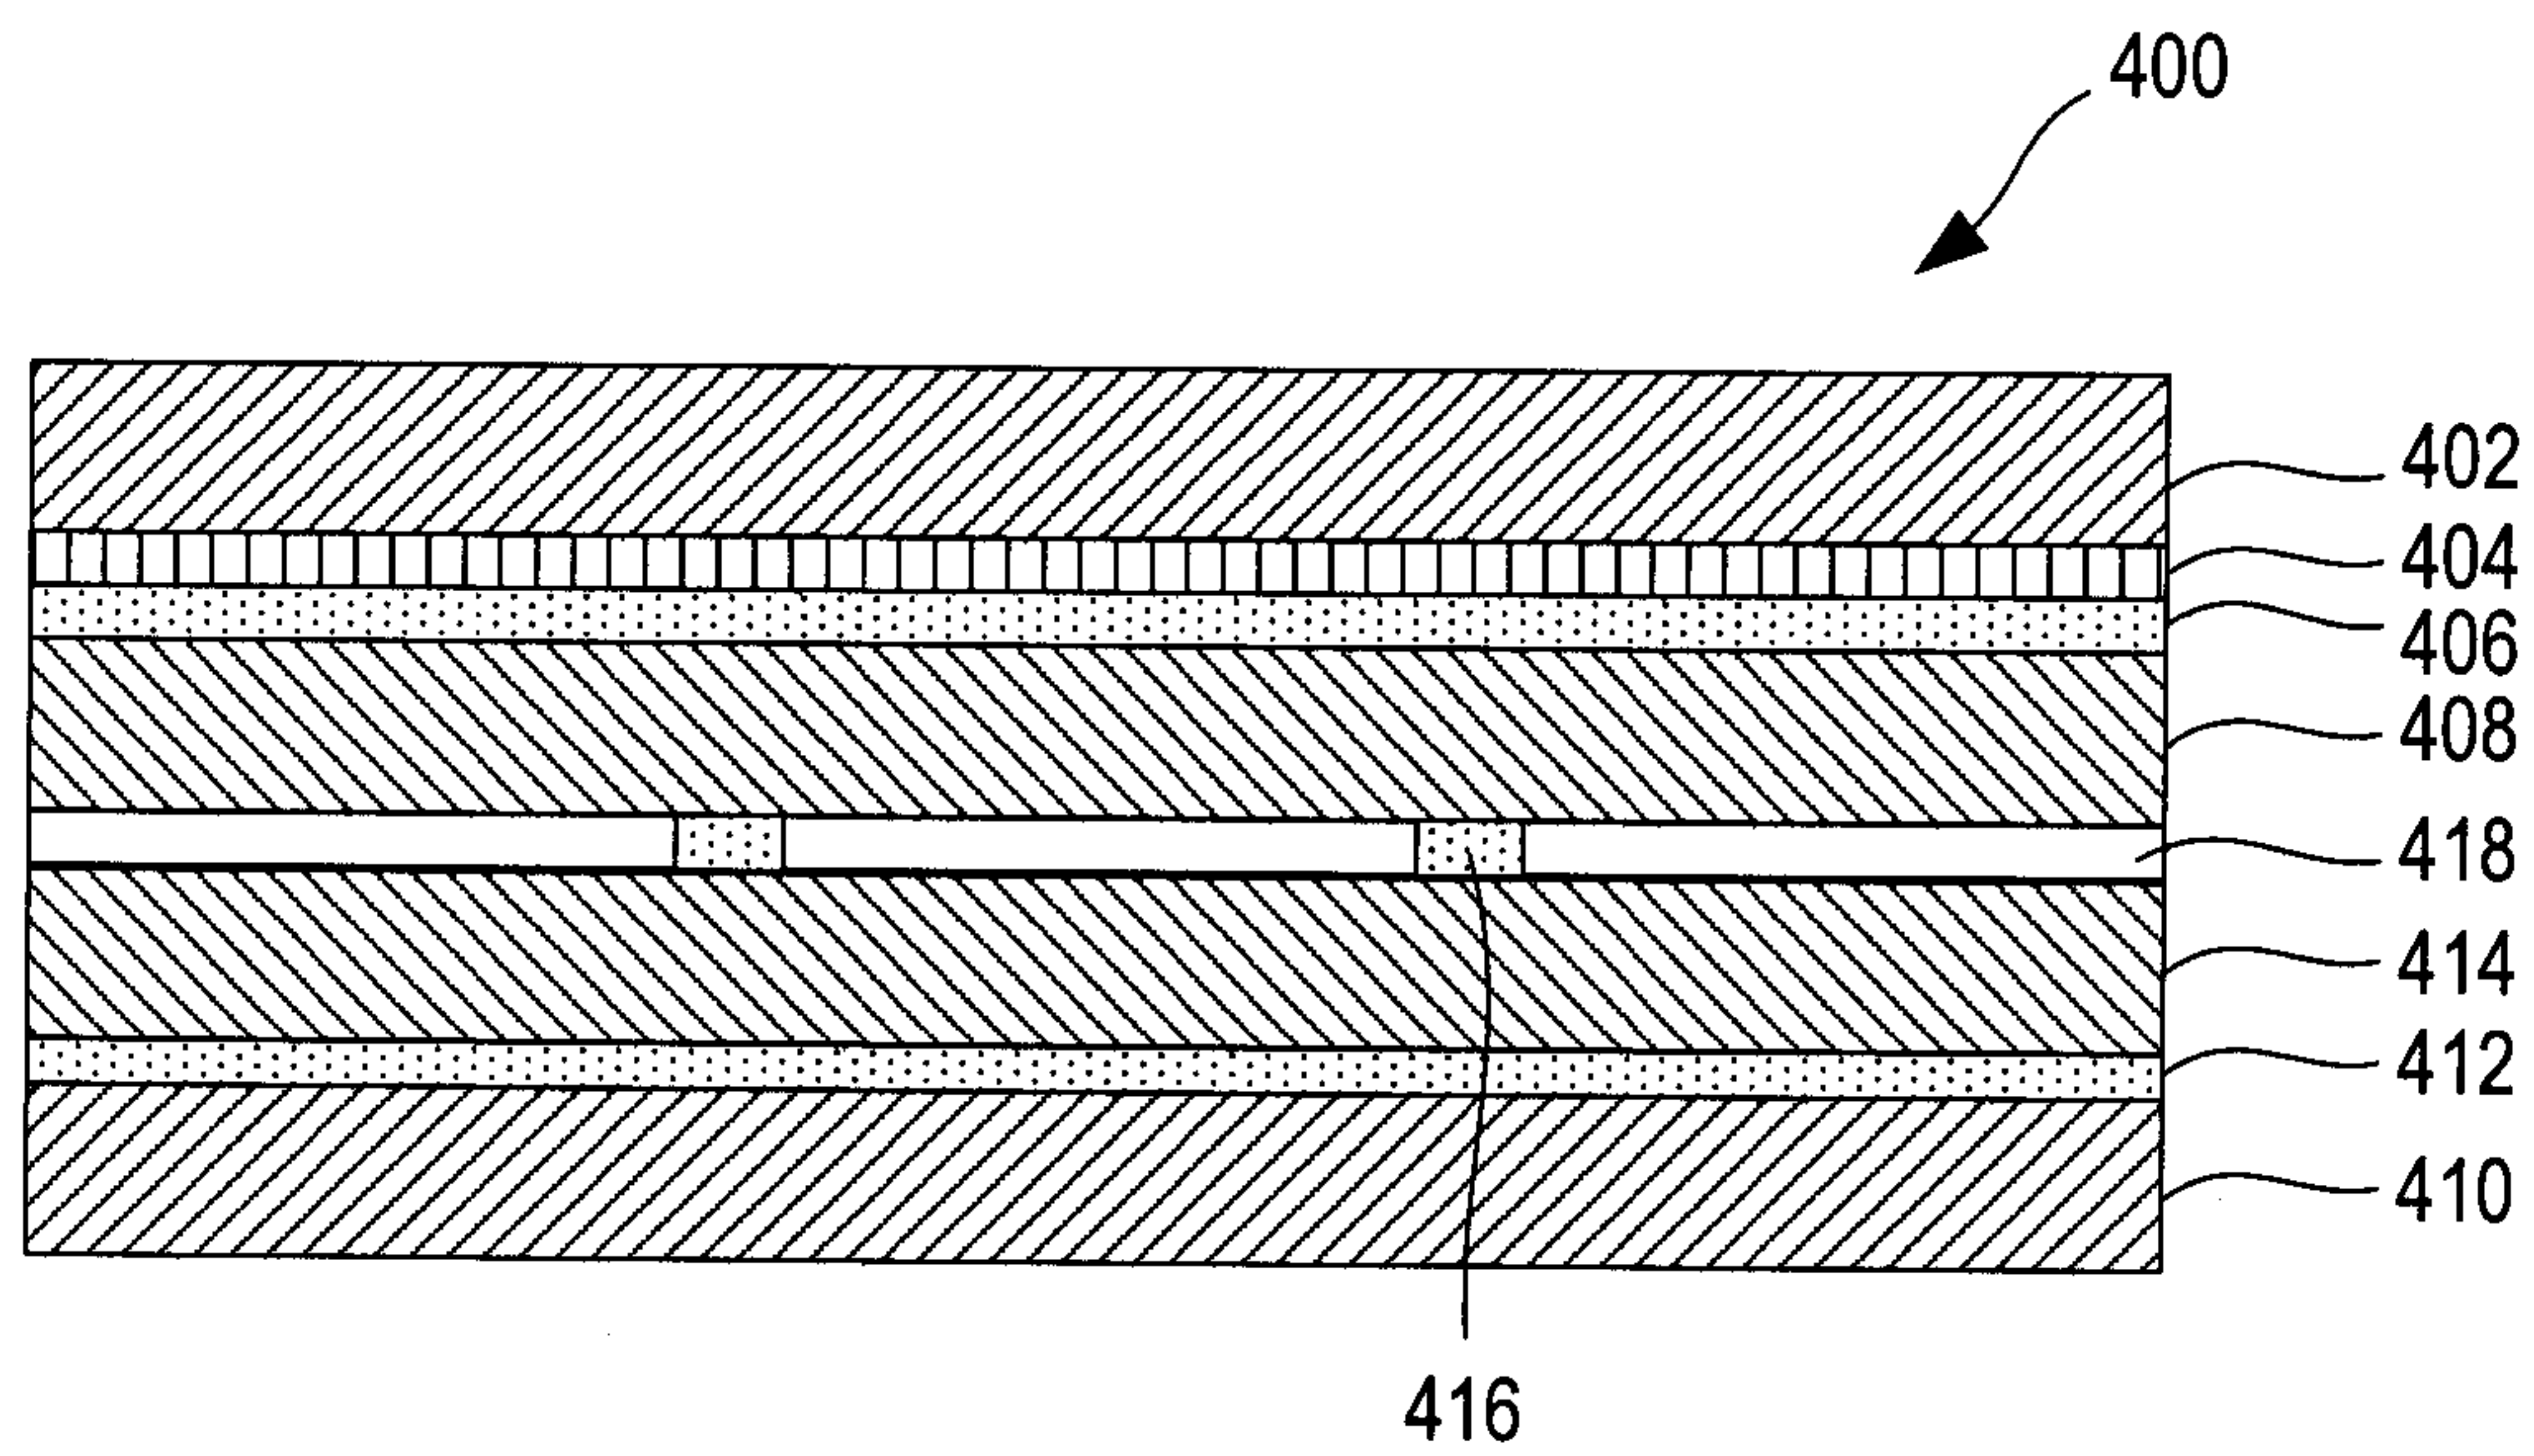


FIG. 4

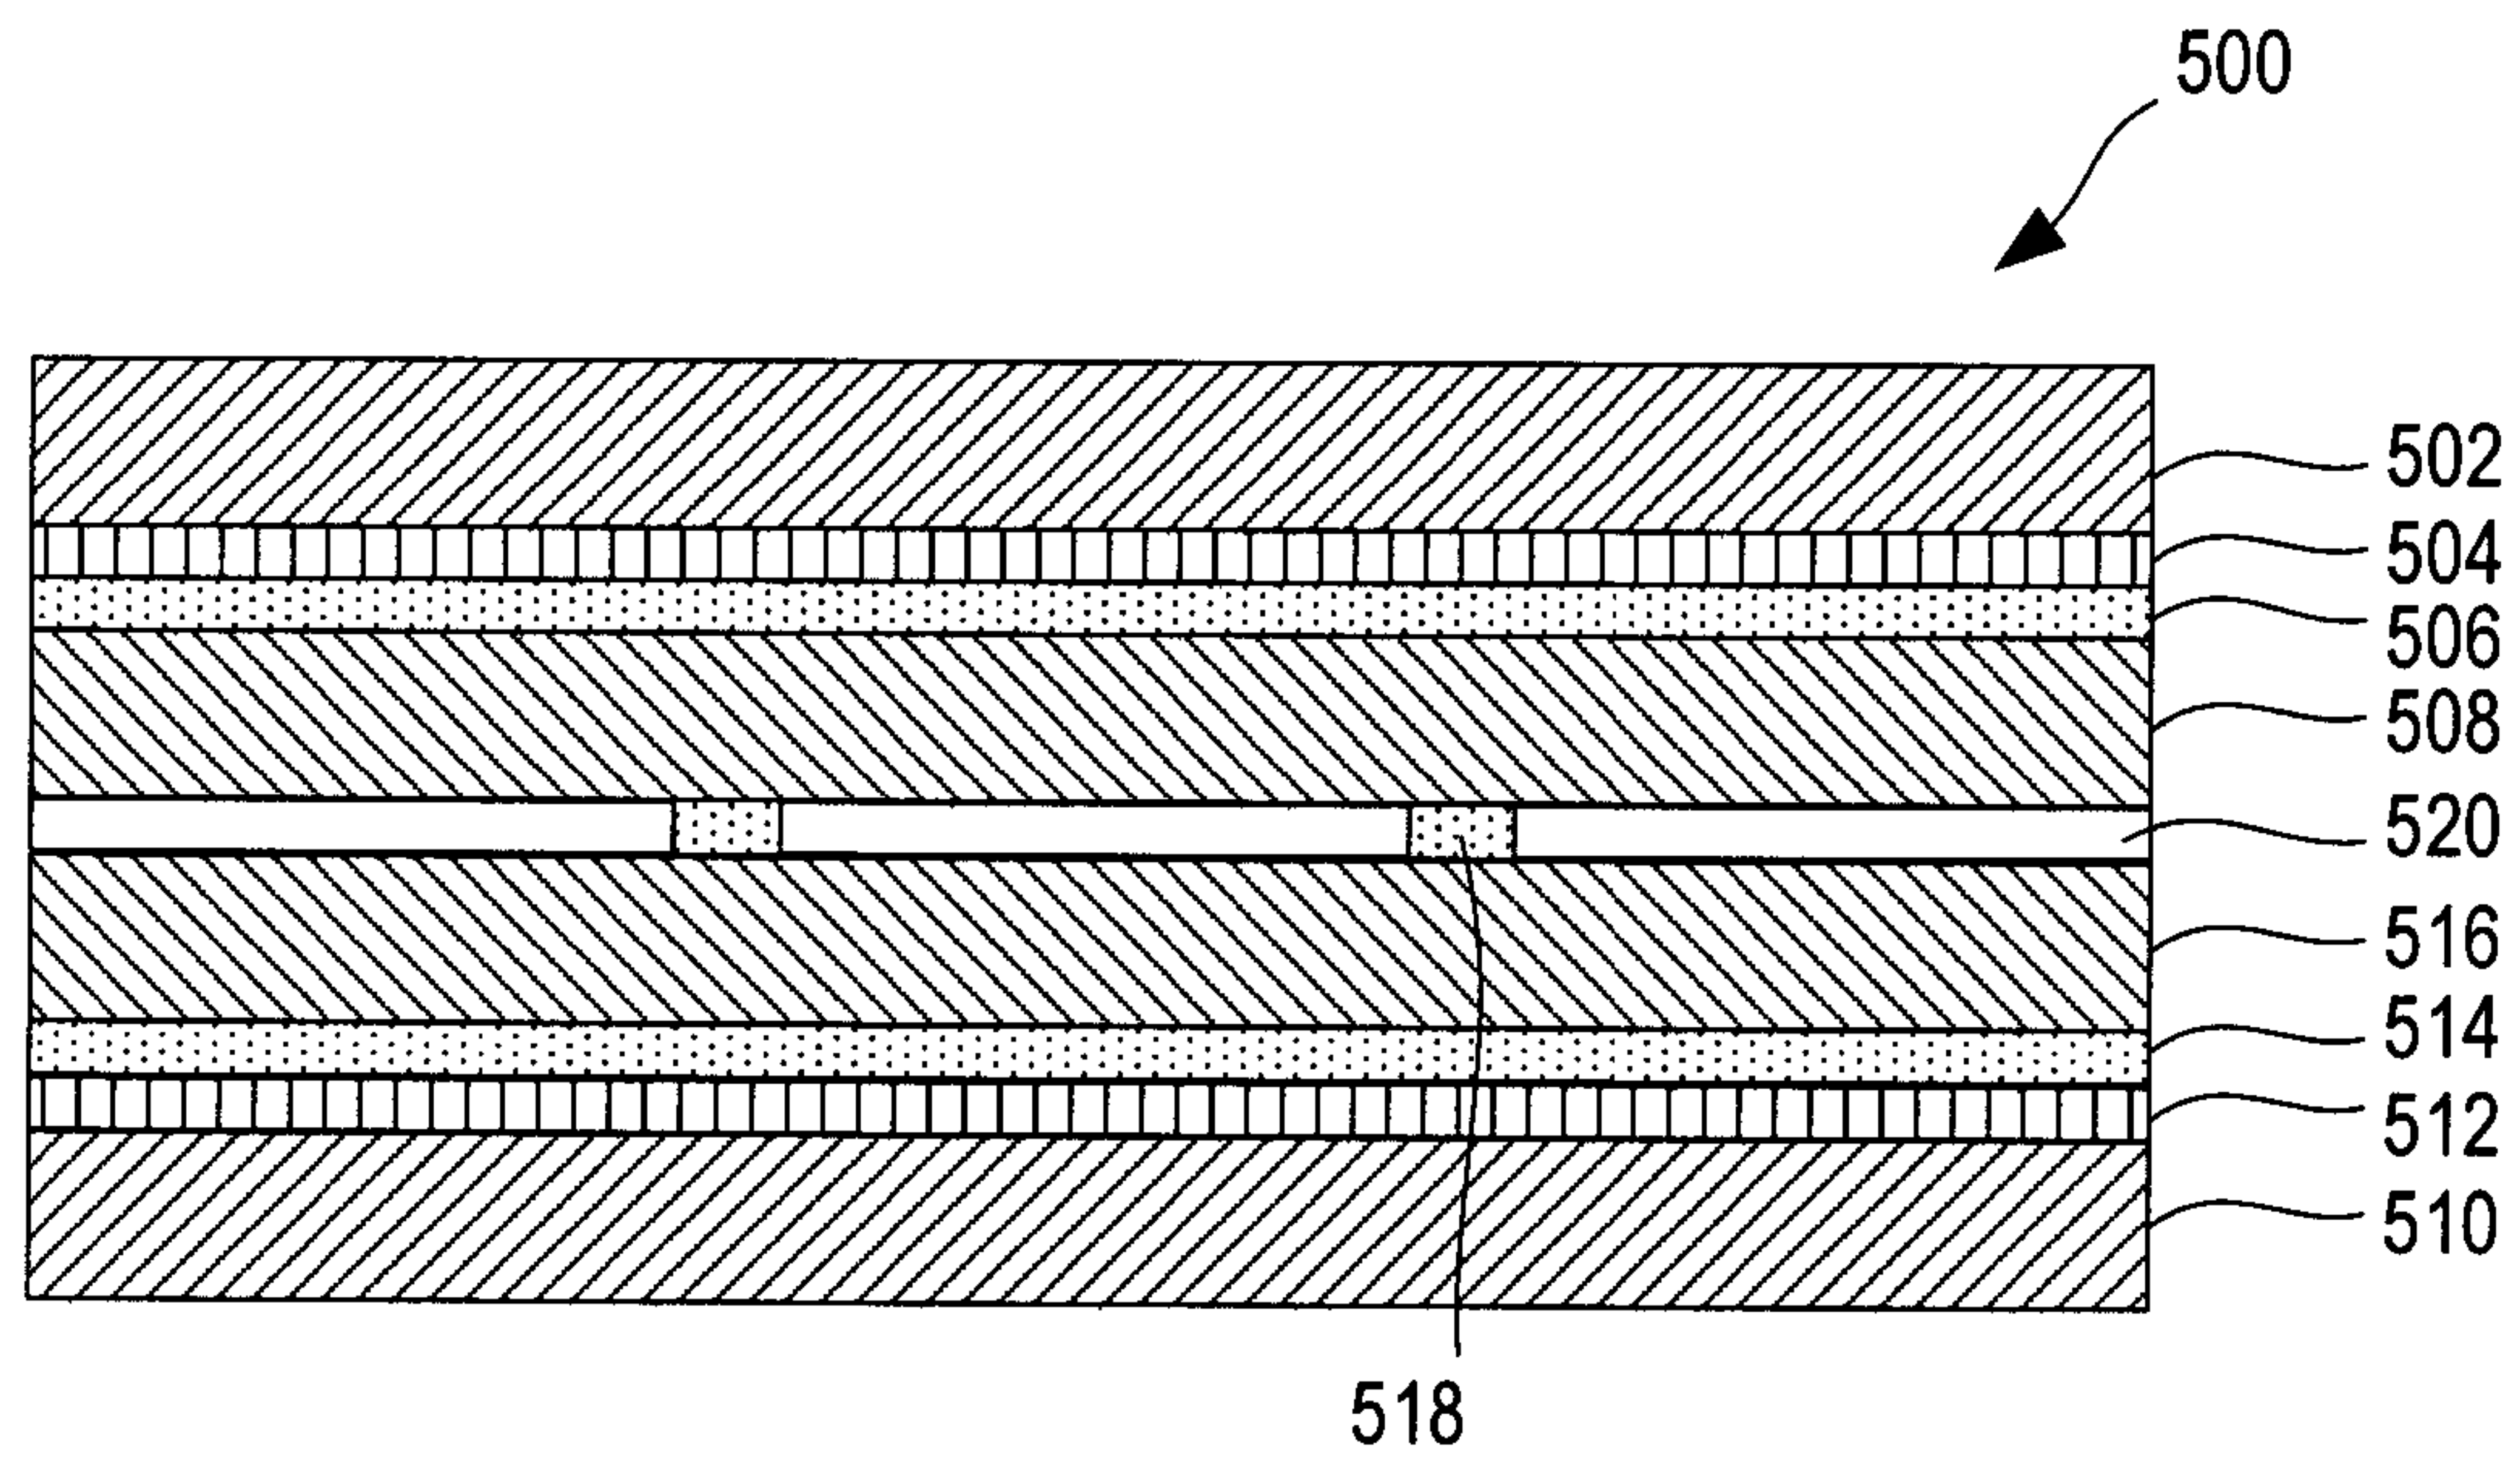


FIG. 5

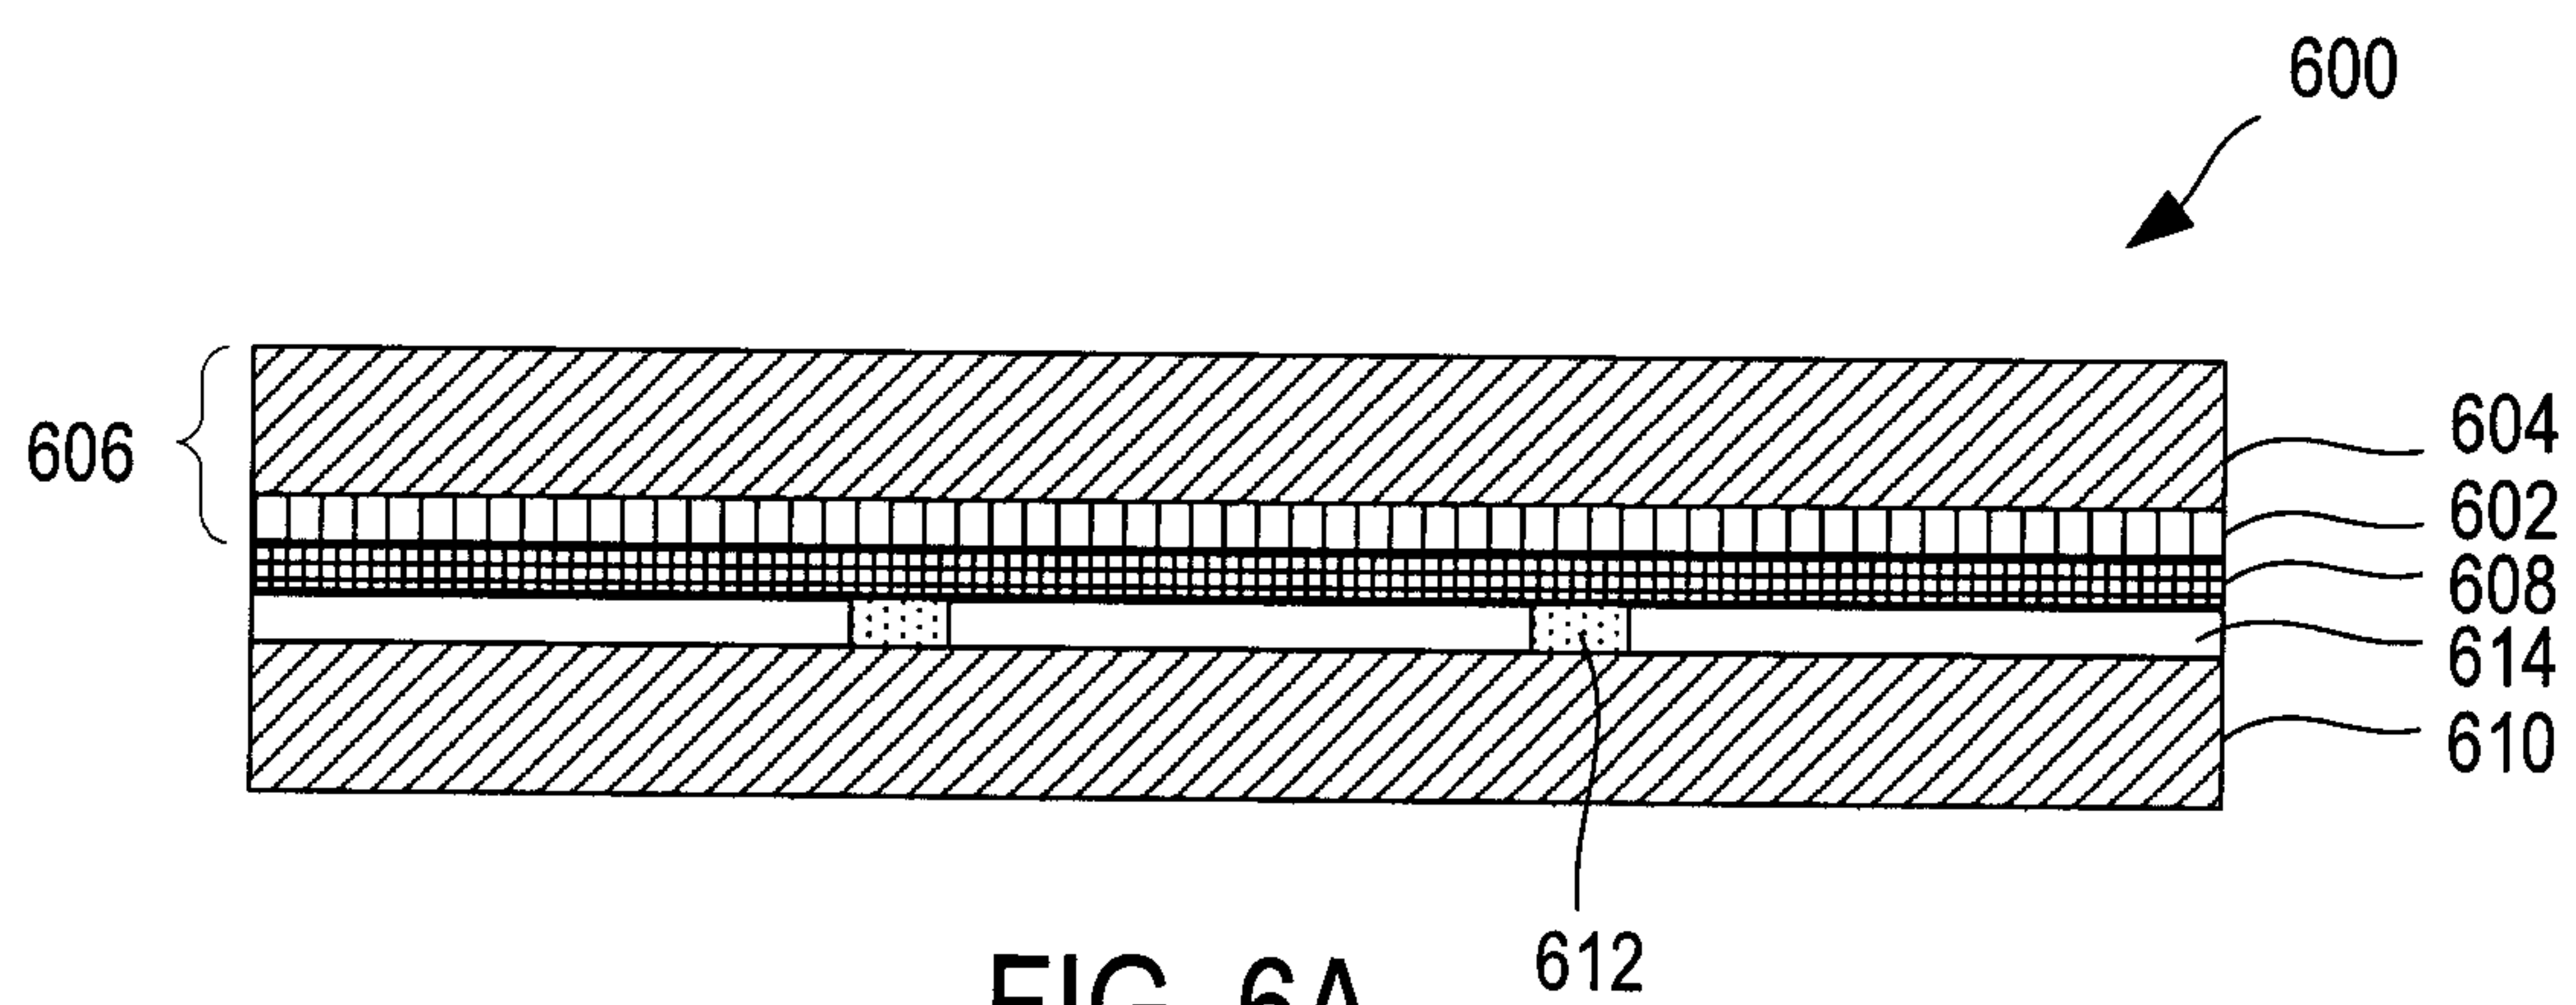


FIG. 6A

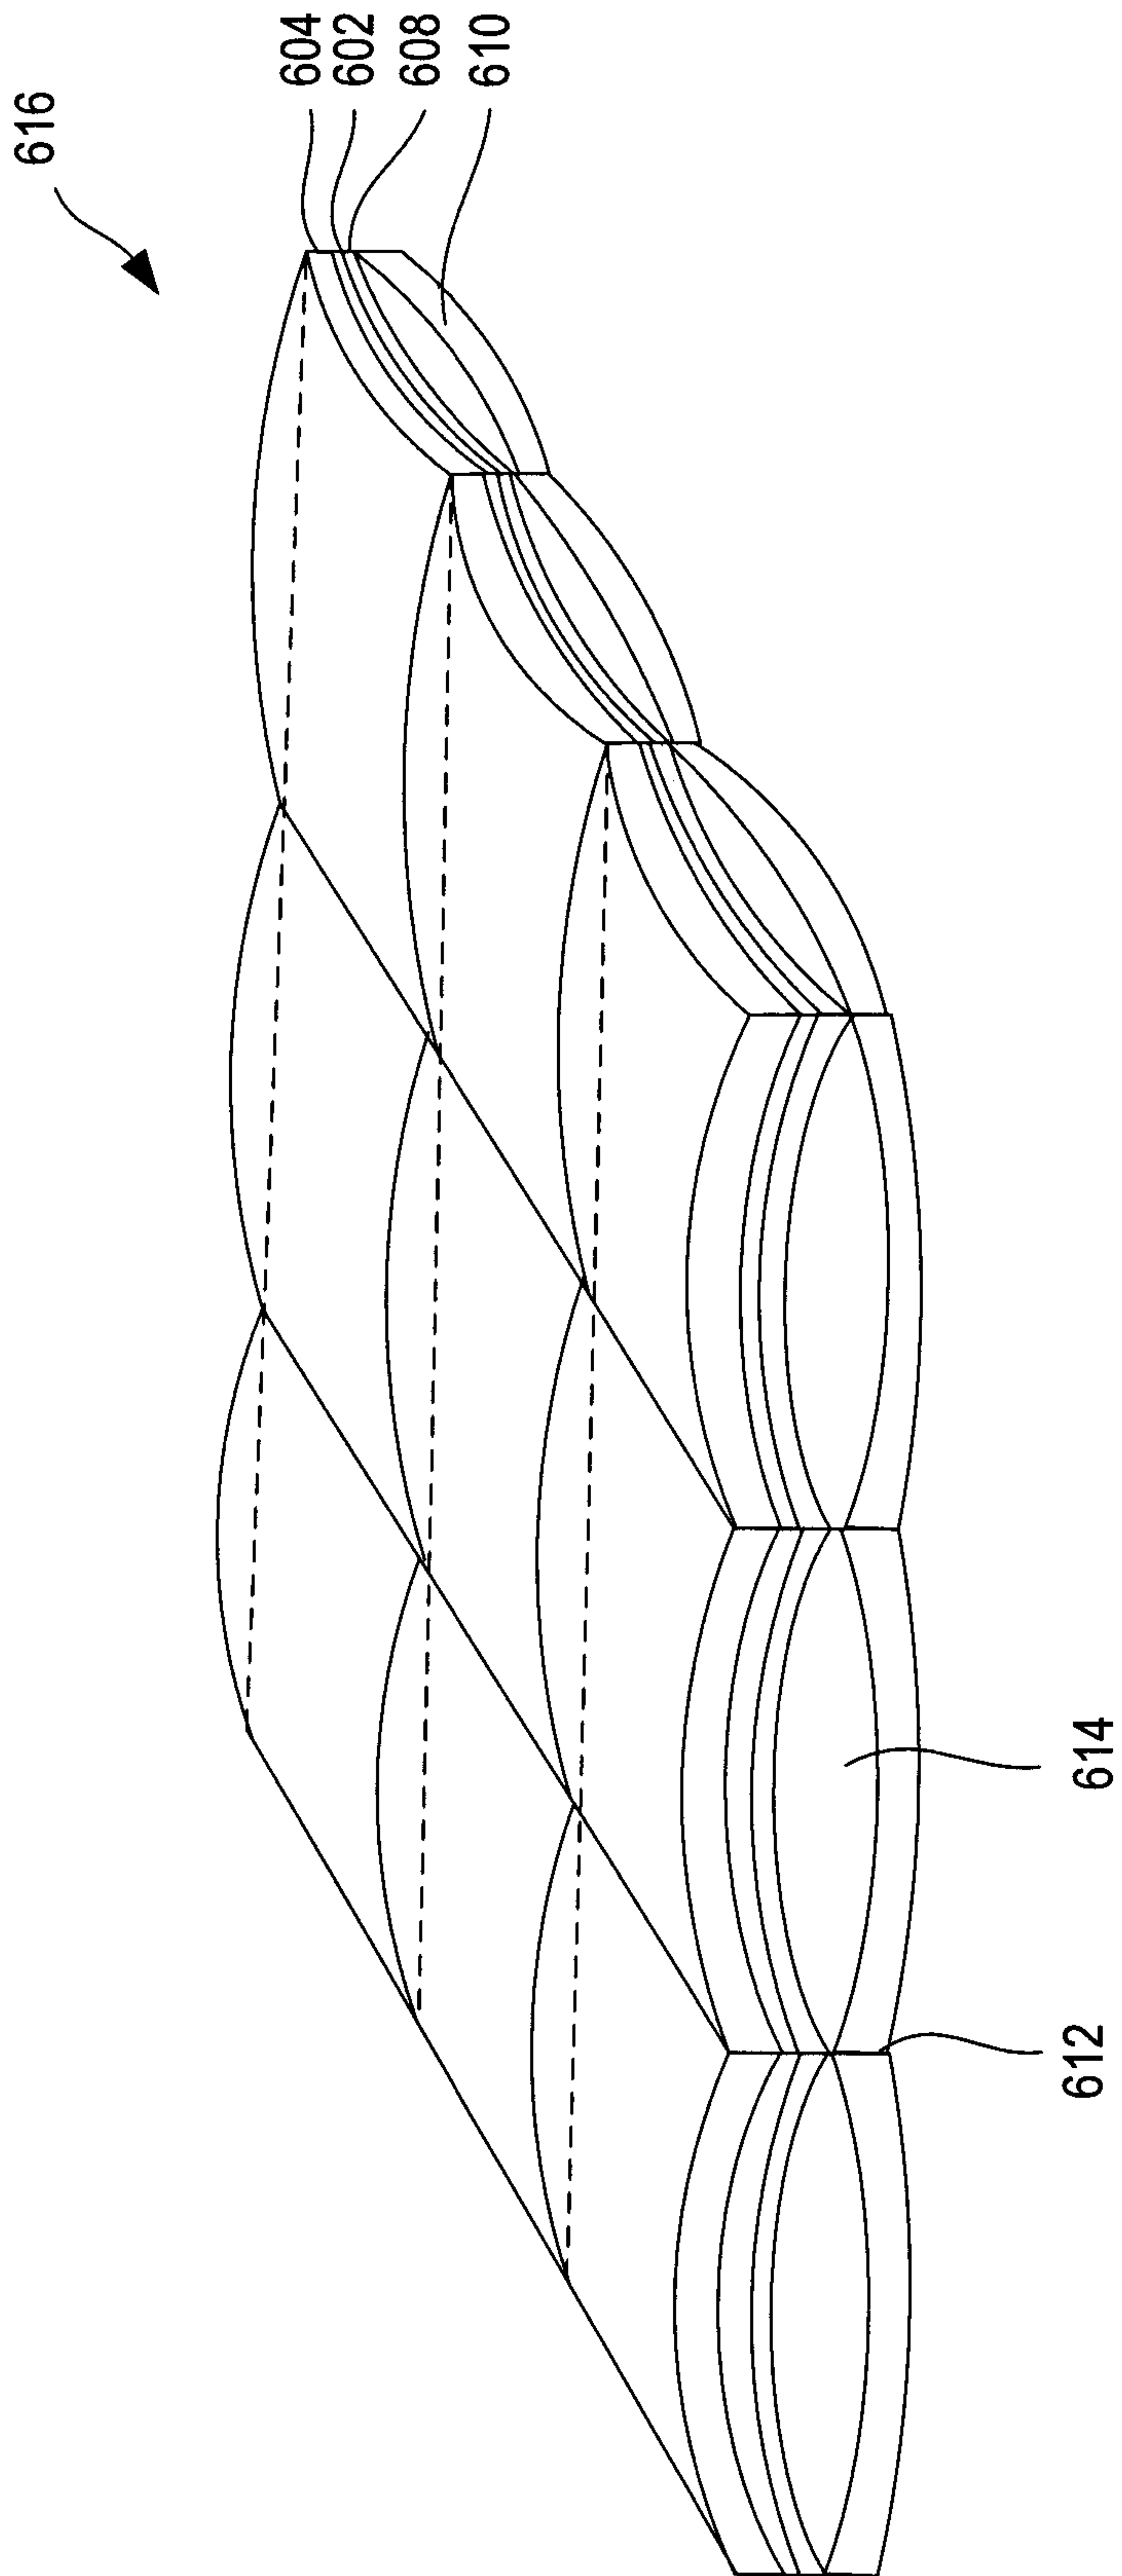


FIG. 6B

