



US00RE47470E

(19) **United States**
 (12) **Reissued Patent**
Hovda et al.

(10) **Patent Number:** **US RE47,470 E**
 (45) **Date of Reissued Patent:** **Jul. 2, 2019**

(54) **VERTEBRAL BODY PLACEMENT AND METHOD FOR SPANNING A SPACE FORMED UPON REMOVAL OF A VERTEBRAL BODY**

(71) Applicant: **Simplify Medical Pty Ltd**, Paddington (AU)

(72) Inventors: **David Hovda**, Mountain View, CA (US); **Yves Arramon**, Sunnyvale, CA (US)

(73) Assignee: **Simplify Medical Pty Ltd** (AU)

(21) Appl. No.: **15/191,385**

(22) Filed: **Jun. 23, 2016**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **8,758,441**
 Issued: **Jun. 24, 2014**
 Appl. No.: **12/255,737**
 Filed: **Oct. 22, 2008**

U.S. Applications:

(60) Provisional application No. 60/981,665, filed on Oct. 22, 2007.

(51) **Int. Cl.**
A61F 2/44 (2006.01)
A61F 2/30 (2006.01)
A61B 17/86 (2006.01)

(52) **U.S. Cl.**
 CPC **A61F 2/30771** (2013.01); **A61F 2/4465** (2013.01); **A61B 17/86** (2013.01);
 (Continued)

(58) **Field of Classification Search**
 None

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,867,728 A 2/1975 Stubstad et al.
 4,309,777 A 1/1982 Patil
 (Continued)

FOREIGN PATENT DOCUMENTS

DE 3023353 A1 4/1981
 DE 3023353 A1 4/1981
 (Continued)

OTHER PUBLICATIONS

Chadwick et al., Radiolucent Structural Materials for Medical Applications, Jun. 1, 2001, MDDI, p. 1, <http://www.mddionline.com/article/radiolucent-structural-materials-medical-applications>.*

(Continued)


Primary Examiner — Cary E Wehner

(74) *Attorney, Agent, or Firm* — Wilson Sonsini Goodrich & Rosati

(57) **ABSTRACT**

A vertebral body replacement includes first and second end plates, and a compliant connector section between the end plates having one or more helical cuts to provide limited compliance between the end plates. The compliant connector section can be provided in a separate spacer that fits between the end plates or directly in one or more of the end plates. The adjoining end plate surfaces, and/or adjoining surfaces of the spacer, include a rotational interlock to inhibit rotational motion between the surfaces and allow a modular stacking assembly of the vertebral body replacement to accommodate a wide range of patients.

27 Claims, 4 Drawing Sheets

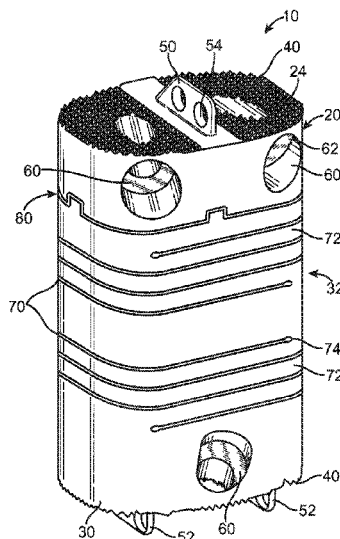

(52) U.S. Cl.

CPC *A61F 2002/30056* (2013.01); *A61F 2002/30772* (2013.01); *A61F 2002/30787* (2013.01); *A61F 2002/30884* (2013.01); *A61F 2002/30889* (2013.01); *A61F 2002/30904* (2013.01); *A61F 2002/449* (2013.01); *A61F 2250/0032* (2013.01); *A61F 2310/0088* (2013.01); *A61F 2310/00407* (2013.01); *A61F 2310/00431* (2013.01); *A61F 2310/00604* (2013.01); *A61F 2310/00796* (2013.01); *A61F 2310/00976* (2013.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

4,531,917 A 7/1985 Linkow et al.
 4,566,466 A 1/1986 Ripple et al.
 4,619,660 A 10/1986 Christiansen et al.
 4,673,407 A 6/1987 Martin
 4,759,766 A 7/1988 Buttner-Janz et al.
 4,759,769 A 7/1988 Hedman et al.
 4,834,757 A 5/1989 Brantigan
 4,863,477 A 9/1989 Monson
 4,904,261 A 2/1990 Dove et al.
 4,917,704 A 4/1990 Frey et al.
 4,932,969 A 6/1990 Frey et al.
 4,946,378 A 8/1990 Hirayama et al.
 4,997,432 A * 3/1991 Keller 623/17.11
 5,035,716 A 7/1991 Downey
 5,057,108 A 10/1991 Shetty et al.
 5,071,437 A 12/1991 Steffee
 5,122,130 A 6/1992 Keller
 5,192,327 A * 3/1993 Brantigan 623/17.11
 5,195,526 A 3/1993 Michelson
 5,258,031 A 11/1993 Salib et al.
 5,282,861 A 2/1994 Kaplan
 5,306,308 A 4/1994 Gross et al.
 5,314,477 A 5/1994 Marnay
 5,320,644 A 6/1994 Baumgartner
 5,370,697 A 12/1994 Baumgartner
 5,394,457 A 2/1995 Leibinger et al.
 5,401,269 A 3/1995 Buttner-Janz et al.
 5,415,704 A 5/1995 Davidson
 5,423,816 A * 6/1995 Lin 606/247
 5,458,642 A 10/1995 Beer et al.
 5,462,575 A 10/1995 Del Corso
 5,484,437 A 1/1996 Michelson
 5,489,307 A 2/1996 Kuslich et al.
 5,505,732 A 4/1996 Michelson
 5,507,816 A 4/1996 Bullivant
 5,534,030 A 7/1996 Navarro et al.
 5,556,431 A 9/1996 Buttner-Janz
 5,674,296 A 10/1997 Bryan et al.
 5,676,701 A 10/1997 Yuan et al.
 5,676,702 A 10/1997 Ratron
 5,683,465 A 11/1997 Shinn et al.
 5,702,450 A 12/1997 Bisserie
 5,709,683 A 1/1998 Bagby
 5,728,159 A 3/1998 Stroeve et al.
 5,741,253 A 4/1998 Michelson
 5,776,198 A 7/1998 Rabbe et al.
 5,782,832 A 7/1998 Larsen et al.
 5,797,909 A 8/1998 Michelson
 5,797,917 A * 8/1998 Boyd et al. 606/99
 5,824,094 A 10/1998 Serhan et al.
 5,836,948 A 11/1998 Zucherman et al.
 5,865,846 A 2/1999 Bryan et al.
 5,865,848 A 2/1999 Baker
 5,888,226 A 3/1999 Rogozinski
 5,895,428 A 4/1999 Berry
 5,899,901 A 5/1999 Middleton
 5,899,911 A 5/1999 Carter
 5,928,284 A 7/1999 Mehdizadeh
 5,989,251 A 11/1999 Nichols
 5,989,291 A 11/1999 Ralph et al.

6,001,130 A 12/1999 Bryan et al.
 6,019,792 A 2/2000 Cauthen
 6,022,376 A 2/2000 Assell et al.
 6,039,761 A 3/2000 Li et al.
 6,039,763 A 3/2000 Shelokov
 6,080,155 A 6/2000 Michelson
 6,083,228 A 7/2000 Michelson
 6,086,613 A 7/2000 Camino et al.
 6,096,038 A 8/2000 Michelson
 6,106,557 A * 8/2000 Robioneck et al. 623/17.15
 6,132,465 A 10/2000 Ray et al.
 6,136,031 A 10/2000 Middleton
 6,139,551 A 10/2000 Michelson et al.
 6,139,579 A 10/2000 Steffee et al.
 6,143,033 A 11/2000 Paul et al.
 6,146,421 A 11/2000 Gordon et al.
 6,156,067 A 12/2000 Bryan et al.
 6,159,211 A * 12/2000 Boriani et al. 606/279
 6,159,214 A 12/2000 Michelson
 6,162,252 A 12/2000 Kuras et al.
 6,174,311 B1 1/2001 Branch et al.
 6,176,881 B1 1/2001 Schar et al.
 6,193,757 B1 2/2001 Foley et al.
 6,224,595 B1 5/2001 Michelson
 6,224,607 B1 5/2001 Michelson
 6,231,609 B1 5/2001 Mehdizadeh
 6,235,030 B1 5/2001 Zucherman et al.
 6,261,296 B1 7/2001 Aebi et al.
 6,264,695 B1 7/2001 Stoy
 6,290,726 B1 9/2001 Pope et al.
 6,296,664 B1 10/2001 Middleton
 6,315,797 B1 * 11/2001 Middleton 623/17.16
 6,322,567 B1 11/2001 Mittelstadt et al.
 6,336,941 B1 1/2002 Subba Rao et al.
 6,348,071 B1 2/2002 Steffee et al.
 6,368,350 B1 4/2002 Erickson et al.
 6,368,351 B1 4/2002 Glenn et al.
 6,375,681 B1 4/2002 Truscott
 6,375,682 B1 4/2002 Fleischmann et al.
 6,395,032 B1 5/2002 Gauchet
 6,402,785 B1 6/2002 Zdeblick et al.
 6,409,766 B1 6/2002 Brett
 6,413,278 B1 7/2002 Marchosky
 6,416,551 B1 7/2002 Keller
 6,436,098 B1 8/2002 Michelson
 6,440,139 B2 8/2002 Michelson
 6,447,544 B1 9/2002 Michelson
 6,478,800 B1 11/2002 Fraser et al.
 6,517,544 B1 2/2003 Michelson
 6,517,580 B1 2/2003 Ramadan et al.
 6,520,967 B1 2/2003 Cauthen
 6,520,996 B1 2/2003 Manasas et al.
 6,527,804 B1 3/2003 Gauchet et al.
 6,533,817 B1 3/2003 Norton et al.
 6,537,279 B1 3/2003 Michelson
 6,554,863 B2 4/2003 Paul et al.
 6,562,047 B2 5/2003 Ralph et al.
 6,562,074 B2 5/2003 Gerbec et al.
 6,565,574 B2 5/2003 Michelson
 6,579,321 B1 6/2003 Gordon et al.
 6,582,466 B1 6/2003 Gauchet
 6,582,468 B1 6/2003 Gauchet
 6,592,624 B1 7/2003 Fraser et al.
 6,599,294 B2 7/2003 Fuss et al.
 6,607,558 B2 8/2003 Kuras
 6,607,559 B2 8/2003 Ralph et al.
 6,610,092 B2 8/2003 Ralph et al.
 6,623,525 B2 9/2003 Ralph et al.
 6,645,248 B2 11/2003 Casutt
 6,648,895 B2 11/2003 Burkus et al.
 6,652,533 B2 11/2003 O'Neil
 6,660,038 B2 12/2003 Boyer, II et al.
 6,666,866 B2 12/2003 Martz et al.
 6,669,731 B2 12/2003 Ralph et al.
 6,669,732 B2 12/2003 Serhan et al.
 6,673,113 B2 1/2004 Ralph et al.
 6,682,562 B2 1/2004 Viart et al.
 6,689,132 B2 2/2004 Biscup
 6,706,068 B2 3/2004 Ferree

Page 3

(56)

References Cited

U.S. PATENT DOCUMENTS

6,709,439 B2

3/2004

Rogers et al.

6,712,819 B2

3/2004

Zucherman et al.

6,712,825 B2

3/2004

Aebi et al.

6,719,794 B2

4/2004

Gerber et al.

6,723,097 B2

4/2004

Fraser et al.

6,726,720 B2

4/2004

Ross et al.

6,726,721 B2

4/2004

Stoy et al.

6,733,532 B1

5/2004

Gauchet et al.

6,740,118 B2

5/2004

Eisermann et al.

6,740,119 B2

5/2004

Ralph et al.

6,752,832 B2

6/2004

Neumann

6,755,841 B2

6/2004

Fraser et al.

6,764,512 B2

7/2004

Keller

6,764,515 B2

7/2004

Ralph et al.

6,770,095 B2

8/2004

Grinberg et al.

6,790,233 B2

9/2004

Brodke et al.

6,793,678 B2

9/2004

Hawkins

6,814,737 B2

11/2004

Cauthen

6,821,298 B1

11/2004

Jackson

6,827,740 B1

12/2004

Michelson

6,830,570 B1

12/2004

Frey et al.

6,835,206 B2

12/2004

Jackson

6,846,328 B2

1/2005

Cauthen

6,852,126 B2

2/2005

Ahlgren

6,863,673 B2

3/2005

Gerbec et al.

6,875,213 B2

4/2005

Michelson

6,896,680 B2

5/2005

Michelson

6,899,735 B2

5/2005

Coates et al.

6,936,071 B1

8/2005

Marnay et al.

6,936,132 B2

8/2005

Topolnitsky

6,964,686 B2

11/2005

Gordon

A61F 2/442

623/17.14

6,966,929 B2

11/2005

Mitchell

6,966,931 B2

11/2005

Huang

6,986,788 B2

1/2006

Paul et al.

6,989,011 B2

1/2006

Paul et al.

6,994,727 B2

2/2006

Khandkar et al.

7,011,684 B2

3/2006

Eckman

7,022,138 B2

4/2006

Mashburn

7,025,787 B2

4/2006

Bryan et al.

7,044,972 B2

5/2006

Mathys et al.

7,044,983 B1

5/2006

Cheng

7,056,344 B2

6/2006

Huppert et al.

7,060,073 B2

6/2006

Frey et al.

7,066,958 B2

6/2006

Ferree

7,081,120 B2

7/2006

Li et al.

7,083,651 B2

8/2006

Diaz et al.

7,087,055 B2

8/2006

Lim et al.

7,097,648 B1

8/2006

Globerman et al.

7,115,132 B2

10/2006

Errico et al.

7,118,580 B1

10/2006

Beyersdorff et al.

7,147,665 B1

12/2006

Bryan et al.

7,153,325 B2

12/2006

Kim et al.

7,169,182 B2

1/2007

Errico et al.

7,179,294 B2

2/2007

Eisermann et al.

7,182,784 B2

2/2007

Evans et al.

7,198,644 B2

4/2007

Schultz et al.

7,207,991 B2

4/2007

Michelson

7,214,244 B2

5/2007

Zubok et al.

7,217,291 B2

5/2007

Zucherman et al.

7,235,082 B2

6/2007

Bartish et al.

7,235,101 B2 *

6/2007

Berry et al.

7,235,103 B2

6/2007

Rivin

7,250,060 B2

7/2007

Trieu

7,255,714 B2

8/2007

Malek

7,261,739 B2

8/2007

Ralph et al.

7,267,688 B2

9/2007

Ferree

7,270,679 B2

9/2007

Istephanous et al.

7,270,682 B2

9/2007

Frigg et al.

7,303,582 B2

12/2007

Brady

7,303,583 B1

12/2007

Schär et al.

7,309,358 B2 *

12/2007

Berry et al.

7,318,839 B2

1/2008

Malberg et al.

7,326,250 B2

2/2008

Beaurain et al.

623/17.11

623/17.16

623/17.13

623/17.13

623/17.13

623/17.13

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/17.16

623/

US RE47,470 E

Page 4

(56)

References Cited

U.S. PATENT DOCUMENTS

2004/0024410	A1	2/2004	Olson et al.	2006/0200239	A1	9/2006	Rothman et al.
2004/0030391	A1	2/2004	Ferree	2006/0200240	A1	9/2006	Rothman et al.
2004/0034426	A1	2/2004	Errico et al.	2006/0200242	A1	9/2006	Rothman et al.
2004/0054411	A1	3/2004	Kelly et al.	2006/0200243	A1 *	9/2006	Rothman A61F 2/442
2004/0059318	A1	3/2004	Zhang et al.				623/17.13
2004/0073307	A1	4/2004	Keller	2006/0224241	A1 *	10/2006	Butler et al. 623/17.15
2004/0073311	A1	4/2004	Ferree	2006/0235426	A1	10/2006	Lim et al.
2004/0073312	A1	4/2004	Eisermann et al.	2006/0235525	A1	10/2006	Gil et al.
2004/0093087	A1	5/2004	Ferree et al.	2006/0235527	A1	10/2006	Buettner-Janz et al.
2004/0097928	A1	5/2004	Zdeblick et al.	2006/0241641	A1	10/2006	Albans et al.
2004/0098131	A1	5/2004	Bryan et al.	2006/0241766	A1	10/2006	Felton et al.
2004/0117021	A1	6/2004	Biedermann et al.	2006/0259144	A1	11/2006	Trieu
2004/0143270	A1	7/2004	Zucherman et al.	2006/0259146	A1	11/2006	Navarro et al.
2004/0143332	A1	7/2004	Krueger et al.	2006/0265068	A1	11/2006	Schwab
2004/0143334	A1	7/2004	Ferree	2006/0265077	A1	11/2006	Zwirkoski
2004/0167626	A1	8/2004	Geremakis et al.	2006/0276902	A1	12/2006	Zipnick et al.
2004/0176843	A1	9/2004	Zubok et al.	2006/0287728	A1	12/2006	Mokhtar et al.
2004/0186569	A1	9/2004	Berry	2006/0293752	A1	12/2006	Moumene et al.
2004/0215342	A1	10/2004	Suddaby	2006/0293753	A1	12/2006	Thramann
2004/0225295	A1	11/2004	Zubok et al.	2006/0293754	A1	12/2006	de Villiers et al.
2004/0225365	A1	11/2004	Eisermann et al.	2007/0010826	A1	1/2007	Rhoda et al.
2004/0230307	A1	11/2004	Eisermann et al.	2007/0021837	A1	1/2007	Ashman et al.
2004/0236426	A1	11/2004	Ralph et al.	2007/0032875	A1	2/2007	Blacklock et al.
2004/0243238	A1	12/2004	Arin et al.	2007/0067035	A1	3/2007	Falahee
2004/0254644	A1	12/2004	Taylor	2007/0067036	A1	3/2007	Hudgins et al.
2005/0015094	A1	1/2005	Keller	2007/0073398	A1	3/2007	Fabian et al.
2005/0015095	A1	1/2005	Keller	2007/0093898	A1	4/2007	Schwab et al.
2005/0015152	A1	1/2005	Sweeney	2007/0100453	A1	5/2007	Parsons et al.
2005/0021145	A1	1/2005	de Villiers et al.	2007/0100454	A1	5/2007	Burgess et al.
2005/0021146	A1	1/2005	de Villiers et al.	2007/0100456	A1	5/2007	Dooris et al.
2005/0027360	A1	2/2005	Webb et al.	2007/0123903	A1	5/2007	Raymond et al.
2005/0038515	A1	2/2005	Kunzler	2007/0123904	A1	5/2007	Stad et al.
2005/0043800	A1	2/2005	Paul et al.	2007/0135923	A1	6/2007	Peterman et al.
2005/0085917	A1	4/2005	Marnay et al.	2007/0162133	A1	7/2007	Doubler et al.
2005/0107881	A1	5/2005	Alleyne et al.	2007/0168033	A1	7/2007	Kim et al.
2005/0113842	A1	5/2005	Bertagnoli et al.	2007/0168036	A1	7/2007	Ainsworth et al.
2005/0113928	A1	5/2005	Cragg	2007/0179615	A1	8/2007	Heinz et al.
2005/0143824	A1	6/2005	Richelsoph et al.	2007/0213821	A1	9/2007	Kwak et al.
2005/0149189	A1	7/2005	Mokhtar et al.	2007/0233077	A1	10/2007	Khalili
2005/0154463	A1	7/2005	Trieu	2007/0233247	A1	10/2007	Schwab
2005/0165408	A1	7/2005	Puno et al.	2007/0233248	A1	10/2007	Schwab et al.
2005/0171604	A1	8/2005	Michalow	2007/0233251	A1	10/2007	Abdou
2005/0187634	A1 *	8/2005	Berry 623/17.15	2007/0270956	A1	11/2007	Heinz
2005/0192586	A1	9/2005	Zucherman et al.	2007/0270970	A1	11/2007	Trieu
2005/0192670	A1	9/2005	Zubok et al.	2007/0282449	A1	12/2007	de Villiers et al.
2005/0197706	A1	9/2005	Hovorka et al.	2007/0299521	A1	12/2007	Glenn et al.
2005/0216081	A1	9/2005	Taylor	2008/0015698	A1	1/2008	Marino et al.
2005/0216084	A1	9/2005	Fleischmann et al.	2008/0015701	A1	1/2008	Garcia et al.
2005/0234553	A1	10/2005	Gordon	2008/0021557	A1	1/2008	Trieu
2005/0251260	A1	11/2005	Gerber et al.	2008/0051900	A1	2/2008	de Villiers et al.
2005/0251261	A1	11/2005	Peterman	2008/0051901	A1	2/2008	de Villiers et al.
2005/0261772	A1	11/2005	Filippi et al.	2008/0125864	A1	5/2008	de Villiers et al.
2005/0267580	A1	12/2005	Suddaby	2008/0125865	A1	5/2008	Abdelgany
2005/0267581	A1	12/2005	Marnay et al.	2008/0133011	A1	6/2008	de Villiers et al.
2006/0004377	A1	1/2006	Keller	2008/0154301	A1	6/2008	de Villiers et al.
2006/0004453	A1	1/2006	Bartish et al.	2008/0154305	A1	6/2008	Foley et al.
2006/0015183	A1	1/2006	Gilbert et al.	2008/0154382	A1	6/2008	de Villiers et al.
2006/0020342	A1	1/2006	Ferree et al.	2008/0161926	A1 *	7/2008	Melkent et al. 623/17.16
2006/0025862	A1	2/2006	Villiers et al.	2008/0215155	A1	9/2008	de Villiers et al.
2006/0030862	A1	2/2006	de Villiers et al.	2008/0221696	A1	9/2008	de Villiers et al.
2006/0036325	A1	2/2006	Paul et al.	2008/0228274	A1	9/2008	de Villiers et al.
2006/0041313	A1	2/2006	Allard et al.	2008/0228277	A1	9/2008	de Villiers et al.
2006/0041314	A1	2/2006	Millard	2008/0294259	A1	11/2008	de Villiers et al.
2006/0052870	A1	3/2006	Ferree	2009/0043391	A1	2/2009	de Villiers et al.
2006/0064169	A1	3/2006	Ferree et al.	2009/0048674	A1	2/2009	Zubok et al.
2006/0069439	A1	3/2006	Zucherman et al.	2009/0048677	A1	2/2009	McLeod et al.
2006/0116768	A1	6/2006	Krueger et al.	2009/0076614	A1	3/2009	Arramon A61F 2/4425
2006/0136061	A1	6/2006	Navarro et al.				623/17.16
2006/0142858	A1	6/2006	Colleran	2009/0105833	A1	4/2009	Hovda et al.
2006/0142862	A1	6/2006	Diaz et al.	2009/0105834	A1	4/2009	Hovda et al.
2006/0155378	A1	7/2006	Eckman	2009/0105835	A1	4/2009	Hovda et al.
2006/0167549	A1	7/2006	Mathys et al.	2009/0118836	A1 *	5/2009	Cordaro A61F 2/4455
2006/0178744	A1	8/2006	de Villiers et al.				623/17.16
2006/0178746	A1	8/2006	Bartish, Jr. et al.	2009/0192617	A1	7/2009	Arramon et al.
2006/0195097	A1	8/2006	Evans et al.	2009/0205188	A1	8/2009	de Villiers et al.
				2009/0210060	A1	8/2009	de Villiers et al.
				2009/0222101	A1	9/2009	de Villiers et al.
				2009/0276051	A1	11/2009	Arramon et al.
				2009/0326656	A1	12/2009	de Villiers et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2010/0004746	A1	1/2010	Arramon	
2010/0004748	A1*	1/2010	Cordaro	A61F 2/442 623/17.16
2010/0016972	A1	1/2010	Jansen et al.	
2010/0016973	A1	1/2010	de Villiers et al.	
2010/0030335	A1	2/2010	Arramon	
2010/0049040	A1	2/2010	de Villiers et al.	
2010/0069976	A1	3/2010	de Villiers et al.	
2010/0076558	A1	3/2010	de Villiers et al.	
2010/0087868	A1	4/2010	Barr et al.	
2010/0100141	A1	4/2010	de Villiers et al.	
2010/0179419	A1	7/2010	de Villiers et al.	
2010/0268344	A1	10/2010	de Villiers et al.	
2017/0071757	A1	3/2017	Hovda et al.	

FOREIGN PATENT DOCUMENTS

DE	10035182	A1	2/2002
EP	0333990	A2	9/1989
EP	0333990	A3	5/1990
EP	0560140	A1	9/1993
EP	0560141	A1	9/1993
EP	0591712	A1	4/1994
EP	0820740	A1	1/1998
EP	1142544	A1	10/2001
EP	1153582	A2	11/2001
EP	1153582	A3	11/2001
EP	1250898	A1	10/2002
EP	1306064	A1	5/2003
EP	1344493	A1	9/2003
EP	1344506	A1	9/2003
EP	1344507	A1	9/2003
EP	1344508	A1	9/2003
EP	1417940	A1	5/2004
EP	1570813	A1	9/2005
FR	2803741	A1	7/2001
JP	61122859	A	6/1986
JP	S61122859	A	6/1986
JP	63164948	A	7/1988
JP	S63164948	A	7/1988
WO	WO-9920209	A1	4/1999
WO	WO-9930651	A1	6/1999
WO	WO-0004851	A1	2/2000
WO	WO-0035384	A1	6/2000
WO	WO-0042954	A2	7/2000
WO	WO-0042954	A3	11/2000
WO	WO-0101893	A1	1/2001
WO	WO-0115637	A1	3/2001
WO	WO-0168003	A1	9/2001
WO	WO-0211650	A2	2/2002

WO	WO-0211650	A3	9/2003
WO	WO-2004000170	A1	12/2003
WO	WO-2004000171	A1	12/2003
WO	WO-2004026187	A1	4/2004
WO	WO-2004054477	A1	7/2004
WO	WO-2005004756	A2	1/2005
WO	WO-2005004756	A3	5/2005
WO	WO-2005053580	A1	6/2005
WO	WO-2005072662	A1	8/2005
WO	WO-2005112834	A2	12/2005
WO	WO-2005112834	A3	5/2006
WO	WO-2006119092	A2	11/2006
WO	WO-2006119092	A3	12/2006
WO	WO-2007121320	A2	10/2007
WO	WO-2007121320	A3	6/2008
ZA	2003/9312		11/2003
ZA	200603171		9/2007

OTHER PUBLICATIONS

Office action dated Feb. 8, 2012 for U.S. Appl. No. 12/255,731.

Office action dated Apr. 18, 2012 for U.S. Appl. No. 12/255,733.

Office action dated Jun. 7, 2011 for U.S. Appl. No. 12/255,731.

Office action dated Aug. 26, 2011 for U.S. Appl. No. 12/255,733.

Office action dated Nov. 23, 2012 for U.S. Appl. No. 12/255,731.

Office action dated Nov. 28, 2012 for U.S. Appl. No. 12/255,733.

"Office Action dated Dec. 19, 2017 for U.S. Appl. No. 15/359,298".

International search report and written opinion dated Dec. 16, 2008 for PCT/US2008/080800.

Office action dated May 13, 2011 for U.S. Appl. No. 12/255,737.

Office action dated Jun. 19, 2012 for U.S. Appl. No. 12/255,737.

Office action dated Dec. 15, 2011 for U.S. Appl. No. 12/255,737.

Office action dated Dec. 18, 2012 for U.S. Appl. No. 12/255,737.

International Search Report and Written Opinion of PCT Application No. PCT/US08/80800, dated Dec. 16, 2008, 11 pages total.

Buttner-Janz, The Development of the Artificial Disc. Introduction, pp. 1-18, Library of Congress Catalogue No. 92-75582, ISBN 0-9635430-0-8 (1989).

Hellier, et al. Wear Studies for Development of an Intervertebral Disc Prosthesis. Spine, vol. 17 No. 6 Supplement pp. 86-96 (1992).

International search report and written opinion dated Dec. 19, 2008 for PCT/US2008/080798.

International search report and written opinion dated Dec. 29, 2008 for PCT/US2008/080804.

Lee, et al. Impact Response of the Intervertebral Disc in a Finite-Element Model. Spine. 2000; 25(19):2431-2439.

Lehuc, et al. Shock Absorption in Lumbar Disc Prosthesis. Journal of Spinal Disorders & Techniques. 2003; 16(4):346-351.

Office action dated Aug. 14, 2013 for U.S. Appl. No. 12/255,731.

* cited by examiner

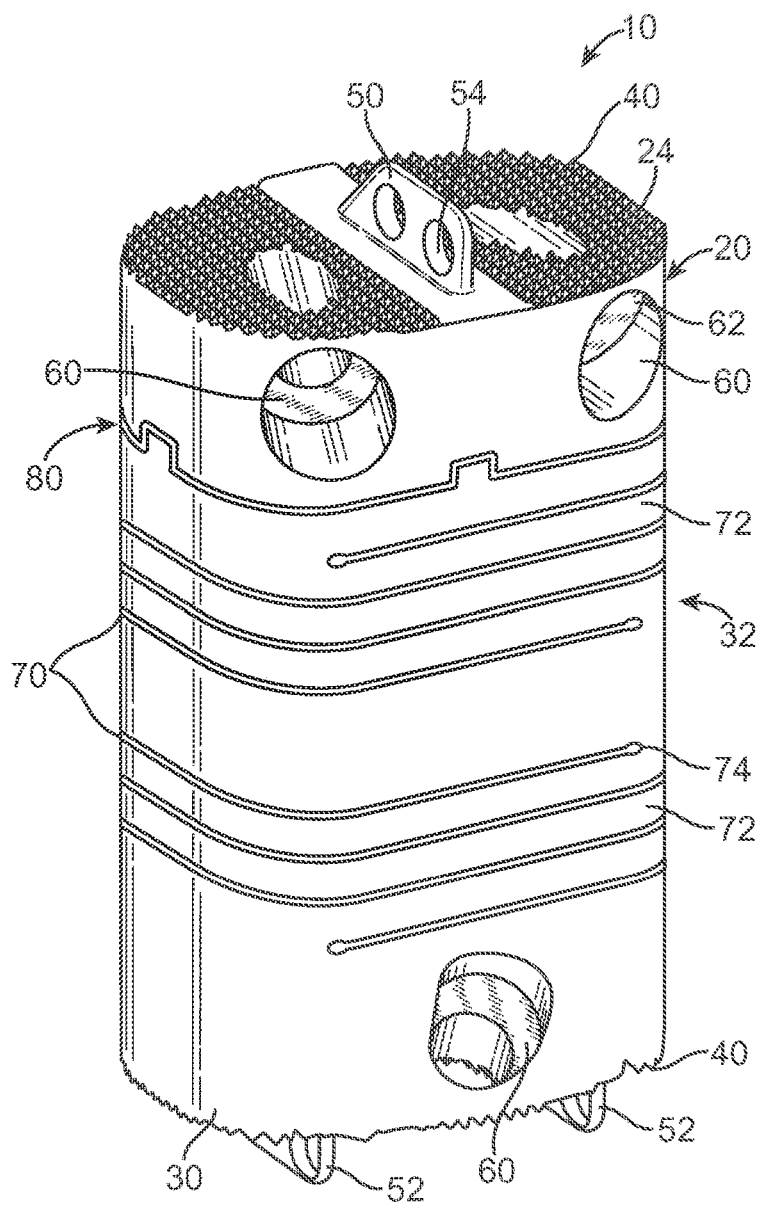


FIG. 1

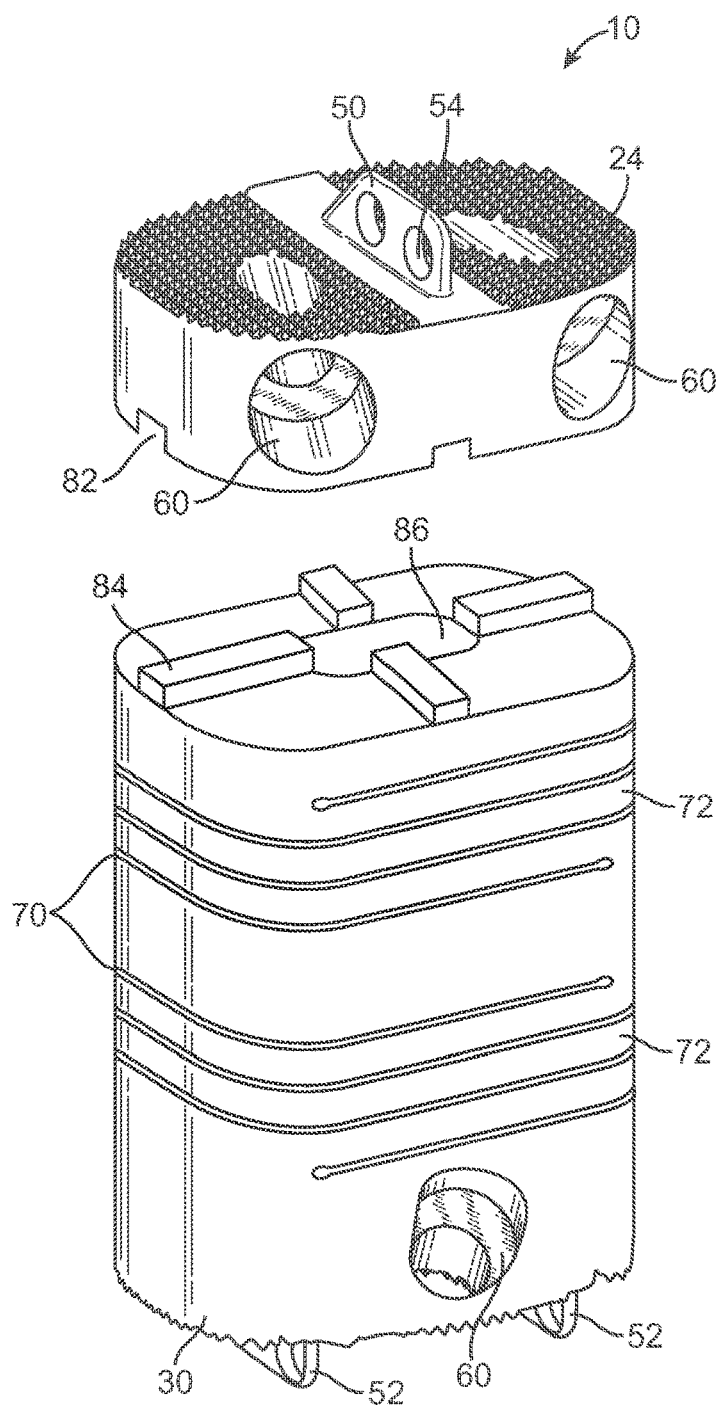


FIG. 1A

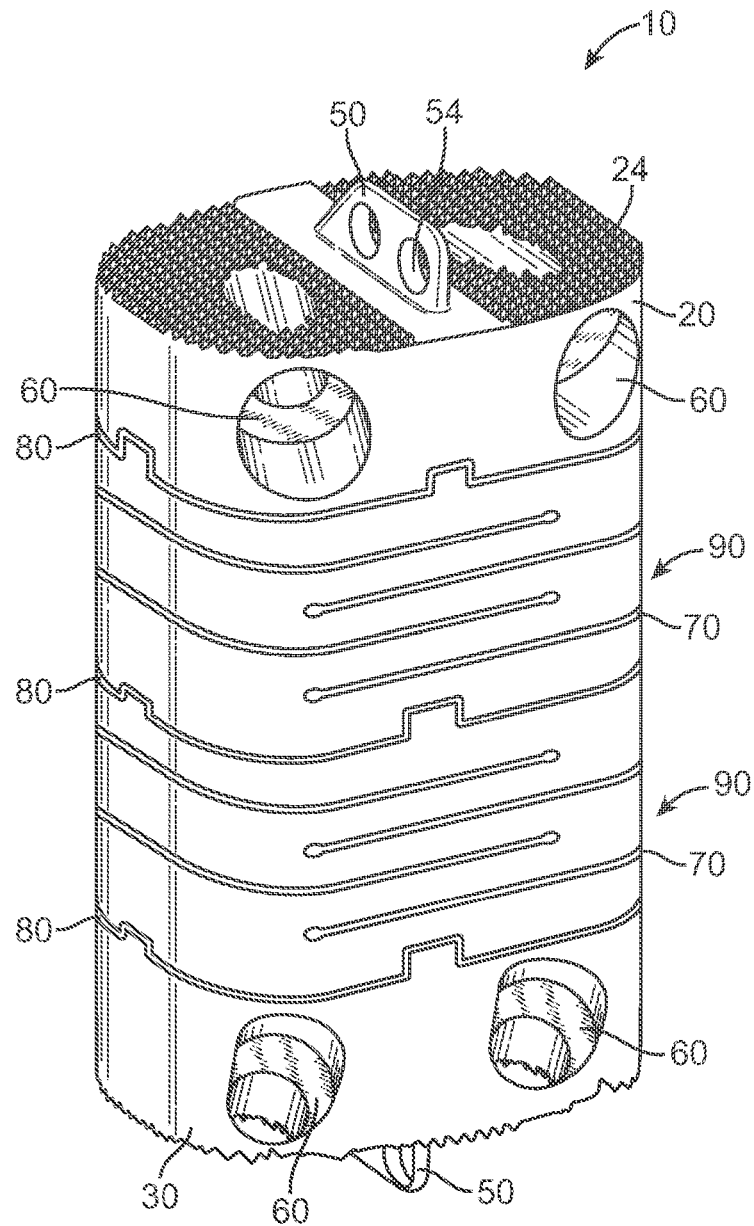


FIG. 2

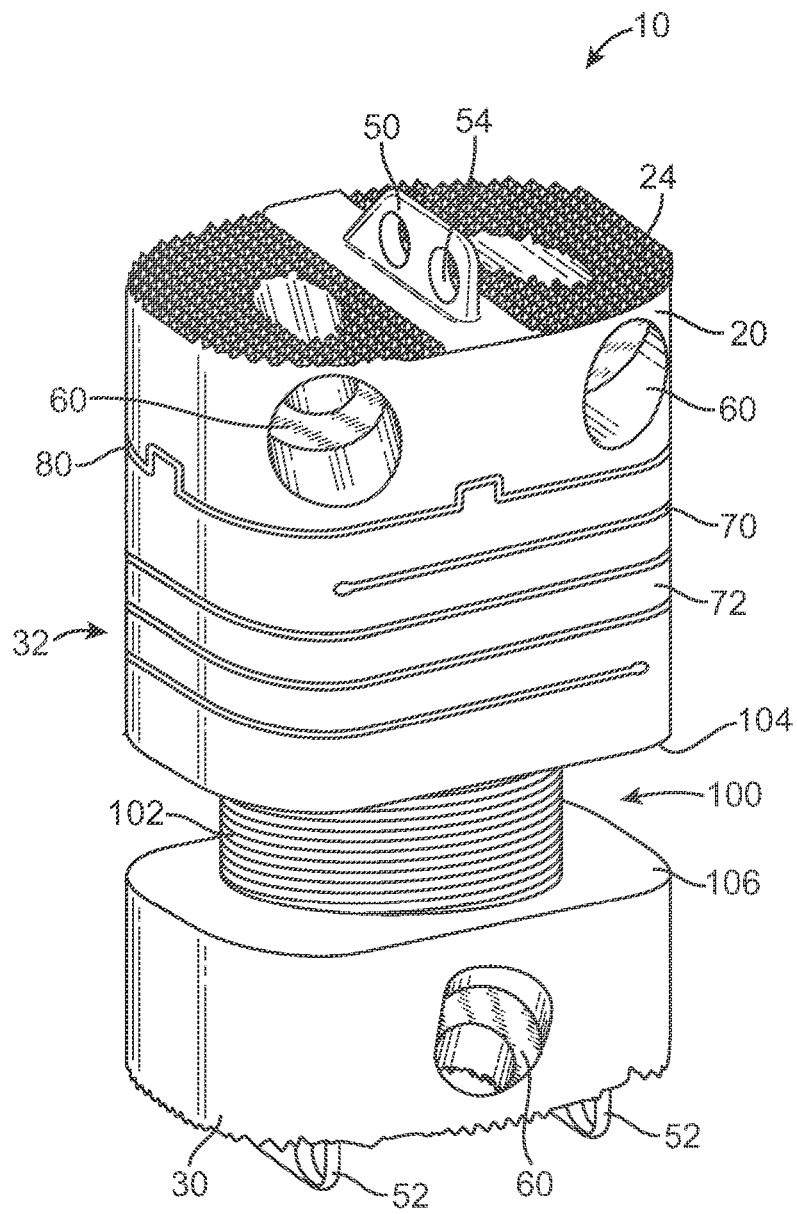


FIG. 3

1

VERTEBRAL BODY PLACEMENT AND METHOD FOR SPANNING A SPACE FORMED UPON REMOVAL OF A VERTEBRAL BODY

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS-REFERENCES TO RELATED APPLICATIONS

This application claims priority under 35 U.S.C. §119 to U.S. Provisional Application No. 60/981,665 filed Oct. 22, 2007, entitled "Method and Spacer Device Spanning Space Formed Upon Removal of an Intervertebral Disc," the full disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

The present invention relates to medical devices and methods. More specifically, the invention relates to vertebral body replacements and methods of spanning a space formed upon removal of an intervertebral disc.

Back pain takes an enormous toll on the health and productivity of people around the world. According to the American Academy of Orthopedic Surgeons, approximately 80 percent of Americans will experience back pain at some time in their life. In the year 2000, approximately 26 million visits were made to physicians' offices due to back problems in the United States. On any one day, it is estimated that 5% of the working population in America is disabled by back pain.

One common cause of back pain is injury, degeneration and/or dysfunction of one or more intervertebral discs. Intervertebral discs are the soft tissue structures located between each of the thirty-three vertebral bones that make up the vertebral (spinal) column. Essentially, the discs allow the vertebrae to move relative to one another. The vertebral column and discs are vital anatomical structures, in that they form a central axis that supports the head and torso, allow for movement of the back, and protect the spinal cord, which passes through the vertebrae in proximity to the discs.

Another form of spinal injury involves injury or deformity of the vertebra themselves. When one or more vertebrae is fracture or deformed by tumor or other causes and results in pain and discomfort, surgery is often required. Traditionally, surgical procedures for vertebral replacement have involved removal of the vertebra and fusion of the two vertebrae above and below the missing vertebra. It is necessary to replace the removed vertebra to maintain spacing of adjacent vertebrae. Oftentimes, pins, rods, screws, cages and/or the like are inserted between the vertebrae to act as support structures to hold the vertebrae and graft material in place while they permanently fuse together. These vertebral body replacement procedures generally focus on rigidly fusing the adjacent vertebrae and preventing motion.

However, it would be desirable to achieve immobilization of the vertebrae adjacent a removed vertebral body and maintain spacing between the adjacent vertebrae without the complete rigidity of traditional interbody fusion.

Another problem associated with the typical vertebral body replacement procedure is the subsidence of the cage

2

into the vertebral body. The typical vertebral body replacement cage is formed with a large percentage of open space to allow the bone to grow through and form the bridging bone which immobilizes the vertebrae. However, the large amount of open space means that the load on each segment of the cage is significantly higher than if the cage surface area was larger. This results in the cage subsiding or sinking into the bone over time and allows the space between the vertebrae to collapse.

Therefore, a need exists for improved vertebral body replacement and method for spanning a space and maintaining spacing between two vertebrae after removal of an intervertebral body. Such improved method and intervertebral body replacement would avoid the need for growth of bridging bone between the remaining vertebrae.

BRIEF SUMMARY OF THE INVENTION

Embodiments of the present invention provide a vertebral body replacement with compliance or shock absorption and methods of spanning a space formed upon removal of vertebral body.

In accordance with one of numerous aspects of the present invention, a vertebral body replacement for replacing at least one vertebral body between remaining upper and lower vertebral bodies, the vertebral body replacement comprises a first end plate having an upper surface configured to engage against a surface of the upper remaining vertebral body, and a lower surface opposite the upper surface spanning the first end plate, a second end plate having a lower surface configured to engage against a surface of the lower remaining vertebral body, and a compliant connector section between the first end plate lower surface and the second end plate lower surface, the compliant connector section comprising at least one helical cut configured and arranged to permit limited motion between the first end plate and the second end plate.

In accordance with another aspect of the invention, a method of replacing at least one vertebral body comprises removing said at least one vertebral body between two remaining vertebral bodies, placing a vertebral body replacement between said two remaining vertebral bodies, the vertebral body replacement comprising first and second end plates and a compliant connector section between the first and second end plates, the compliant connector section having at least one helical cut and configured and arranged to limit motion to less than 10 degrees between said remaining vertebral bodies, and maintaining the space between the two remaining vertebral bodies with the vertebral body replacement.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a vertebral body replacement according to one embodiment of the present invention;

FIG. 1A is an exploded, perspective view of the vertebral body replacement of FIG. 1;

FIG. 2 is a perspective view of a vertebral body replacement according to a second exemplary embodiment of the present invention; and

FIG. 3 is a perspective view of a vertebral body replacement according to a third exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Various embodiments of the present invention generally provide for a vertebral body replacement having upper and

lower plates or surfaces connected by a central connector portion which provides some limited amount of axial compliance and/or rotational motion between the upper and lower plates or surfaces. The compliant vertebral body replacement according to the present invention can maintain disc height and prevent subsidence with a large surface area while improving outcomes by allowing some limited motion and providing improved fixation. The compliance of the vertebral body replacement also functions to reduce loading on the interface between the bone and vertebral body replacement.

One example of a vertebral body replacement **10** for replacement of a vertebral body and maintaining disc height between two adjacent vertebral discs is shown in FIG. **1**. The body **10** includes at least one end plate **20** having a vertebral body contacting surface **24**, a second end plate or body end **30** opposite the end plate **20**, and a compliant connector or connector section **32** interposed between, or interconnecting, the two ends **20**, **30**. As will be described below, some limited rotational and axial motion may be provided between the two plates or sections **20**, **30** to reduce loading on the interface between the adjacent vertebral bodies and the body **10**. According to an exemplary device embodying principles of the present invention, the compliance of the connector **32**, as well as some small amount of translation and rotation, is provided by lateral cuts or slots **70** extending into the connector **32**. The body **10** when implanted between two vertebrae maintains a desirable space between the two adjacent vertebrae similar to that provided by a natural vertebra.

Although the body **10** has been shown as generally oblong in cross section, other shapes may be used, including circular, oval, elliptical, or rectangular. Although the connector section **32** has been illustrated in FIG. **1** as integral with the end section **30**, according to other embodiments, the connector can include one or more separate compliant connectors or spacers in other configurations and at other locations. By way of example, a compliant connector may be the same or substantially the same diameter, size, and shape as the plates, multiple connectors can be arranged in a rectangular pattern, or a hollow cylindrical connector can be used. Further optionally, while the surfaces **24** are illustrated being perpendicular to the vertical axis of the body **10**, one or both of the surfaces **24** can be somewhat wedge-shaped, formed with one or two lordosis angles, as well known to those of ordinary skill in the art. The modular design of the upper plate **20** and the lower plate section **30** allows the creation of a complete bodies **10** of different sizes to correspond to the particular space for each patient.

The upper plate **20** and the lower plate or plate section **30**, and connector **32**, may be constructed from any suitable metal, alloy or combination of metals or alloys, such as but not limited to cobalt chrome alloys, titanium (such as grade **5** titanium), titanium based alloys, tantalum, nickel titanium alloys, stainless steel, and/or the like. They may also be formed of ceramics, biologically compatible polymers including PEEK, UHMWPE (ultra high molecular weight polyethylene) or fiber reinforced polymers. However, when polymer is used for the body **10**, the contacting surfaces **24** may be coated or otherwise covered with metal for fixation. The upper plate **20** and the lower plate or plate section **30**, and connector **32**, may be formed of a one piece construction or may be formed of more than one piece, such as different materials coupled together. When the body **10** is formed of multiple materials, these materials are fixed together to form a unitary one piece spacer without separately moving parts.

Different materials may be used for different parts of the body **10** to optimize imaging characteristics. For example, the upper plate **20** and the lower plate or plate section **30** may be formed of titanium, while the connector **32** is formed of cobalt chromium alloy for improved imaging of the plates. Cobalt chrome molybdenum alloys, when used for the plates **20**, **30** may be treated with aluminum oxide blasting followed by a titanium plasma spray to improve bone integration. Other materials and coatings can also be used such as titanium coated with titanium nitride, aluminum oxide blasting, HA (hydroxylapatite) coating, micro HA coating, and/or bone integration promoting coatings. Any other suitable metals or combinations of metals may be used as well as ceramic or polymer materials, and combinations thereof. Any suitable technique may be used to couple materials together, such as snap fitting, slip fitting, lamination, interference fitting, use of adhesives, welding and/or the like.

In some embodiments, the outer surface **24** is planar. Oftentimes, the outer surface **24** will include one or more surface features and/or materials to enhance attachment of the body **10** to vertebral bone. For example, as shown in FIG. **1**, the outer surface **24** may be machined to have serrations **40** or other surface features for promoting adhesion of the plates **20**, **30** to a vertebra. In the embodiment shown, the serrations **40** are pyramid shaped serrations extending in mutually orthogonal directions, but other geometries such as teeth, grooves, ridges, pins, barbs or the like would also be useful. When the bone integration structures are ridges, teeth, barbs or similar structures, they may be angled to ease insertion and prevent migration. These bone integration structures can be used to precisely cut the bone during implantation to cause bleeding bone and encourage bone integration. Additionally, the outer surface **24** may be provided with a rough microfinish formed by blasting with aluminum oxide microparticles or the like to improve bone integration. In some embodiments, the outer surface may also be titanium plasma sprayed or HA coated to further enhance attachment of the outer surface **24** to vertebral bone.

The outer surfaces **24** may also carry one or more upstanding fins **50**, **52** which also extend laterally in an anterior-posterior direction. The fins **50**, **52** are configured to be placed in slots in the vertebral bodies. Preferably, the fins **50**, **52** each have a height greater than a width and have a lateral length greater than the height. In one embodiment, the fins **50**, **52** are pierced by transverse holes **54** for bone ingrowth. The transverse holes **54** may be formed in any shape and may extend partially or all the way through the fins **50**, **52**. In alternative embodiments, the fins **50**, **52** may be rotated away from the anterior-posterior axis, such as in a lateral-lateral orientation, a posterolateral-anterolateral orientation, or the like.

The fins **50**, **52** provide improved attachment to the bone and prevent rotation of the plates **20**, **30** in the bone. In some embodiments, the fins **50**, **52** may extend from the surface **24** at an angle other than 90°. For example, on one or more of the plates **20**, **22** where multiple fins **52** are attached to the surface **24**, the fins may be canted away from one another with the bases slightly closer together than their edges at an angle such as about 80-88 degrees. The fins **50**, **52** may have any other suitable configuration including various numbers angles and curvatures, in various embodiments. In some embodiments, the fins **50**, **52** may be omitted altogether. The embodiment of FIG. **1** illustrates a combination of one plate with a single fin **50** and another plate with a double fin **52**. This arrangement is useful for double level disc replace-

5

ments and utilizes offset slots in the vertebral body to prevent the rare occurrence of vertebral body splitting by avoiding cuts to the vertebral body in the same plane for multi-level implants. The combination of the single fin 50 and double fin 52 can also assist the surgeon in placement of the spacer in the correct orientation.

The body 10 has been shown with the fins 50, 52 as the primary fixation feature; however, the fins may also be augmented or replaced with one or more screws extending through the plates and into the bone. For example in the body 10 of FIG. 1, the upper fin 50 may be augmented or replaced with one or more screws (not illustrated) while the two lower fins 52 remain. The plates 20, 30 can be provided with one or a series of holes 60 to allow screws to be inserted at different locations at the option of the surgeon. However, the holes 60 should not be of such size or number that the coverage of the plate 20, 30 is decreased to such an extent that subsidence occurs. Alternately, the screws can pass laterally through one or more of the holes in the fins. When one or more screws are provided, they may incorporate a locking feature to prevent the screws from backing out. The screws may also be provided with a bone integration coating.

Some limited holes may also be provided in the plate to allow bone ingrowth. However, if the outer surfaces 24 have holes therein, the holes advantageously cover less than 40 percent of the outer surface 24 which contacts the bone to prevent subsidence of the plates into the vertebral bodies. Preferably the holes will cover less than 25 percent, and more preferably less than 10 percent of the outer bone contacting surfaces. At the option of the surgeon, when the small holes are present in the plates 20, 30, bone graft can be placed in the holes to allow bone to grow through the plates. The embodiments illustrated in FIGS. 1-3 also illustrate the optional inclusion of countersunk screw holes 60 extending between a lateral surface of the plates 20, 30 and the end surfaces 24, in which bone screws may optionally be inserted to further stabilize the body 10. The holes 60 can alternatively extend vertically through the end plates, or the end plates can include combinations of vertical and angled holes.

The vertebral body replacement 10 shown herein is configured for placement in the vertebral column from an anterior approach. It should be understood that other approaches can be used, and the particular shape of the vertebral body replacement would be modified depending on the approach. For example, for a lateral approach, the vertebral body replacement may be formed in a more elongated, kidney bean, or banana shape with a transversely oriented fin.

As shown in FIG. 1, the vertebral body replacement 10 is provided with shock absorption or some other limited motion between the two plates 20, 30 by providing a compliant connector 32. The limited motion provided by the compliant connector 32 is designed to reduce forces on the interface between the outer surfaces 24 and the bone to improve long term fixation of the spacer. The compliance of the connector 32 allows motion between the vertebral bodies to be accommodated by the compliance in the body 10 rather than causing one or both of the vertebral bodies to pull away from the plates 20, 30. The compliant connector 32 provides limited relative motion between the plates, which may include compliance in a vertical direction of up to about 6 mm, rotation in an anterior/posterior direction, lateral direction, or axial rotation of less than about 10 degrees, and/or translation of up to about 1 mm.

6

In the vertebral body replacement 10 of FIG. 1, the compliance, as well as some small amount of translation and rotation, is provided by the cuts or slots 70 extending into the connector 32. In the embodiment of FIG. 1, the slots 70 are spiral slots, however, other shaped slots may also be used. The compliant connector 32 is advantageously formed as a unitary member with at least one lateral cut or slot 70 positioned between the upper and lower plates 20, 30, permitting the plates to move resiliently toward and away from each other. The replacement 10 can also be formed as multiple parts where different properties are desired from the different parts, such as different radiopacities, different strengths, or different flexibility properties and for flexibility in creating the size and configuration of spacer suited to the patient. The lateral cuts 70 in the connector 32 allow the connector to function as a compliant member without affecting the function of the upper and lower plates of the body 10.

FIG. 2 illustrates an alternative embodiment of a body 10 having multiple parts including end plates 20, 30 and spacers 90. The spacers 90 include lateral cuts 70 in place of the spiral cuts of FIG. 1. The material remaining after the cuts 70 are made is called a column. A shallow cut, that is, one that extends laterally into the connector a relatively small distance, and a large column provides a stiffer spacer, while a deeper cut and smaller column provides a more compliant spacer. In the embodiment shown in FIG. 2, the cuts 70 are at least 60% of the way through the spacer width or diameter, and preferably at least 75% of the way through the connector width.

Optionally, a variable stiffness shock absorbing connector 32 (FIG. 1) or spacer 90 (FIG. 2) can be constructed with lateral cuts 70 with tapering widths. For cuts with such tapering widths, the cut 70 is smallest where the cut terminates adjacent the column and is largest at the edge of the connector 32 furthest from the column. In this version, each of the lateral cuts 70 causes the connector 32 to act as a non linear spring providing progressively stiffer behavior upon larger compression. This is due to the fact that progressively more material on the sides of the cuts 70 is in contact as the connector 32 or spacer 90 is compressed. The non-linear spring can be incorporated in any of the other embodiments described herein to provide a softer stop to the compliant action of the core. The tapered width cuts 70 can provide the additional benefit of providing a flushing action during operation that moves any accumulated material out of the cuts.

The cuts 70 also advantageously include a stress relief 74 at the end of the cuts which increases the fatigue life of the device by reducing the stress concentration at the ends of the slots.

In the exemplary embodiments illustrated herein, a shock absorbing connector 32 includes either one or more planar cuts 70 (FIG. 2), or alternatively one or more spiral or helical cuts 70 (FIG. 1) to form one or more continuous spring coil elements 72 which provide compliance to the connector. Although the spiral cut connector 32 is illustrated in FIG. 1 with two spiral cuts, only one, or three or more spiral cuts may also be employed. For example, two or more spiral cuts 70 arranged in opposite directions can be formed in the connector 32, as illustrated in FIG. 1. Furthermore, when more than one spiral cut 70 is provided, the cuts can optionally be nested one inside the other (not illustrated), as in the manner of a multi-start thread, and/or can include combinations of both nested and adjacent cuts (such as those illustrated in FIGS. 1-2). The compression of a spiral cut connector 70 can result in some small amount of relative rotation between the upper and lower surfaces 20, 30. In

cases where it is desirable to eliminate this rotation, a connector **32** having multiple spiral cuts in opposite directions can be used. For example, a connector **32** can be formed with a first spiral cut **70** at a top of the connector in a first direction and a second spiral cut **70** at a bottom of the core in an opposite second direction. The first and second spiral cuts can offset rotation of each other resulting in a non rotating compliant connector. The double spiral embodiment of the connector is also more stable in shear than the single coil. Furthermore, coils **74** provide significantly more surface area between the adjoining surfaces of the cuts **70** than do planar cuts, which can be advantageous to allow limited rotational motion. The spiral cuts **70** can be made parallel to the end surfaces of the body **10** or can be angled, as in a cone shape. When the spiral cuts **70** are angled to form a cone shaped spring the cone shaped surfaces can limit the translational movement of the spring.

In each of the shock absorbing connectors described herein, the interconnected sections within the connector and the plate(s) are designed for minimal or no motion between contacting parts to prevent particulate generation. However, since the plates and connectors are made entirely of hard materials such as metals, some minimal rubbing contact may be accommodated. In the exemplary embodiments illustrated in figures herein, a rotational interlock **80** is provided between the lower surface of the end plate **20** and the adjoining upper surface of the connector section **32** of the end plate **30**. With reference to FIG. 2, the exemplary interlock **80** includes complementary portions **82**, **84**, formed on the adjoining faces of the end plate **20** and the connector section **32**, in the exemplary body **10**, taking the shape of simple raised portions or ribs **84** which mate with correspondingly sized and shaped recesses **82**. The rotational interlock **80** is not limited to the particular shapes or orientations illustrated in the drawing figures, and can take any shape or orientation which resists, and advantageously prevents, the plate **20** and the connector section **32** from rotating relative to each other. The rotational interlock **80** on the top and bottom surface of a spacer **90** can be different to allow the complete body **10** to be assembled only in a particular desired configuration.

Further optionally, as illustrated in FIG. 1A, the body **10** can include one or more blind cavities **86** extending vertically through the connector section **32**, which provides the interior side of the spiral cut **70**. The blind cavities **86** can also vary in cross sectional size and shape to tailor the rigidity of the connector section **32** in different directions. More specifically, the cavity or cavities **86**, only one of which is illustrated in FIG. 1A, when left hollow, provides a less rigid connector **32**. To increase the rigidity of the connector section **32**, other material can be used to partially or completely fill the cavity **86**, such as pins or rods (not illustrated) inserted in the cavity.

When implanted between vertebrae, the shock absorbing connector **32** can resiliently absorb shocks transmitted vertically between upper and lower vertebrae of the patient's spinal column. This shock absorption is related to the material properties, design, and dimensions of the connector. In general, an increased number and width of the cuts **70** will increase absorption of shocks, with more elastic, or springy compression between the vertebrae.

Preferably the connector **32** is made of metal such as titanium, cobalt chromium alloy, stainless steel, tantalum, nickel titanium or a combination thereof. These materials also can be designed to provide a device which is deformable in the elastic region of the stress/strain curve and will not plastically deform during compression.

In the embodiments illustrated herein, the number, pitch, lead, lead angle, handedness, and total vertical length of each of the spiral cuts or slots **70**, as well as the combination of multiple cuts if provided, can be varied to change the amount of compliance of the connector **32**. When a load is applied to the upper and lower plates **20**, **30**, the connector **32** will compress with each of the cuts **70** closing and the total amount of compression possible depending on the number, arrangement, and height of the cuts. The cuts **70** form spiral coils **74** between the ends of the cut, which function like springs to allow the connector **32** to be compressed. The cuts **70** may be modified to be non-uniform to provide preferential deflection in one or more bending directions. Preferential deflection is useful to provide increased anterior-posterior compliance and less lateral compliance, or the other way around.

According to one embodiment of the invention, the cuts **70** in the shock absorbing connector **32** according to any of the embodiments described herein may be manufactured by wire EDM (electrical discharge machining), molding, laser cutting, or the like. A number of cuts **70** can vary from 1 to about 50, preferably about 6 to about 20, for a vertebral body replacement. A width of the lateral cuts **70** in the direction of the height of the body **10** is about 0.01 mm to about 2 mm, preferably about 0.05 to about 1 mm.

In one embodiment of the present invention, for a cervical application, the maximum deformation of the shock absorbing body is about 0.5 to about 4 mm, and is preferably about 1 to about 2 mm. For a lumbar application, the maximum deformation of the shock absorbing body is about 1 to about 6 mm, and is preferably about 1 to about 3 mm.

Although motion between the plates **20**, **30** of the body **10** has been described herein as provided by cuts **70**, it should be understood that this motion can be provided in a number of other known manners, such as use of resilient materials, or movable joints as long as the motion is limited to the small amount of motion allowable in a patient requiring a fusion procedure including compliance or vertical motion between the plates of up to about 6 mm, rotation between the plates of less than 10 degrees, and translation between the plates of up to about 1 mm.

The body **10** can be provided in different sizes, with different plate sizes, angles between plates, lordosis angles, and heights for different patients or applications. In addition, the shock absorbing connector section **32** can be provided in different compliances for different patients. In addition, the compliance and/or height of the body **10** can be adjustable, such as by rotating an adjustment screw before or after implantation, and/or bonding portions of one or more of the portions of a coil **74**. The body **10** preferably is sized to provide substantial coverage of the vertebral surfaces. For example, in an anterior procedure, the plates **20**, **30** are preferably sized to cover at least 50 percent of the vertebral surface. In posterior or lateral procedures, the coverage of the vertebral surface may be somewhat smaller due to the small size of the access area, i.e., the posterior or lateral spacers may cover about 40 percent or more of the vertebral surface with a one or two part spacer.

Turning now to FIG. 2, a second exemplary embodiment of a body **10**, adhering to principles of the present invention, is illustrated. In contrast to the embodiment illustrated in FIGS. 1 and 1A, the body **10** illustrated in FIG. 2 includes one or more separate compliant connector spacers **90** positioned between plates **20**, **30**, rather than a connector section **32** of a plate **30**. Each of the spacers **90** includes one or more cuts **70**, which can be either planar cuts or forming one or more coils, as described above with reference to the embodi-

ment of FIGS. 1 and 1A. The adjoining surfaces of the plates 20, 30 and the spacers 90 are also provided with rotational interlocks 80, as described herein; while FIG. 2 suggests that the interlocks 80 are the same, differently configured interlocks can alternatively be provided for different non-adjoining surfaces, for example to prevent the spacers 90 from being assembled in a way other than that designed for a body 10 configured for the particular patient. By way of non-limiting example, a first rotational interlock, formed of rectangular ribs and recesses on adjoining surfaces of the end plates and/or the spacers, as illustrated in FIG. 1A, can be provided on the adjoining surfaces of the plate 20 and the adjacent first spacer 90; a second rotational interlock, formed of vertically oriented cylindrical pins, can be provided on the opposite face of the first spacer 90 and the adjoining surface of the adjacent spacer or plate 30. Because the two interlocks 80 are incompatible and do not mate, there is only a single configuration of the pieces that will permit them to be assembled into a body 10.

FIG. 3 illustrates a third exemplary embodiment of a body 10, adhering to principles of the present invention. In addition to the features previously described with reference to FIGS. 1-2, the embodiment illustrated in FIG. 3 includes a vertical adjustment mechanism 100 for fine tuning of the vertical size of the body 10, either prior to or after implantation of body 10 into a patient. While numerous configurations of the adjustment mechanism 100 can be provided, one exemplary embodiment includes a threaded post or tube 102 extending from either an upper surface 106 of the end plate 30 or a lower surface 104 of the section 32, which mates with a correspondingly configured and threaded hole or post in the other of the end plate 30 and section 32. Rotation of the post 102 causes the two portions of the body 10 to move toward or away from each other, and thus decreases or increases the vertical size of the body 10, respectively. According to one version of the adjustable height vertebral body replacement an adjustment mechanism with oppositely threaded ends is inserted in the upper and lower parts 104, 106 and is adjustable after positioning in the patient.

According to one exemplary method adhering to principles of the present invention, a patient in need of a vertebral body replacement is prepped and surgical access is made to the particular vertebral body to be removed. Access to the surgical site is generally made anteriorly through the abdominal cavity for a lumbar procedure. One or more target vertebral body or bodies is removed in one of numerous manners known to those of ordinary skill in the art, between upper and lower remaining vertebral bodies in the patient's spine, and a vertebral body replacement 10, embodying principles of the present invention, is selected based on the measurement of the spacing for proper spinal alignment. The vertebral body replacement 10 is assembled and implanted in the space created by removal of the original vertebral body or bodies. Optionally, one or more spacers 90 are assembled into the body 10, prior to installation of the body 10 into the patient, and/or the vertical length of the body 10 is adjusted to better fit in the space. Further optionally, when the body 10 includes one or more cavities 86, additional material is inserted into the cavity, prior to implantation of the body, to tailor the rigidity of the body 10, or for other purposes.

While the exemplary embodiments have been described in some detail, by way of example and for clarity of understanding, those of skill in the art will recognize that a variety of modifications, adaptations, and changes may be

employed. Hence, the scope of the present invention should be limited solely by the appended claims.

What is claimed is:

1. A vertebral body replacement for replacing at least one vertebral body between remaining upper and lower vertebral bodies, the vertebral body replacement comprising:

a first end plate having an upper surface configured to engage against a surface of the upper remaining vertebral body, and a lower surface opposite the upper surface spanning the first end plate;

a second end plate having a lower surface configured to engage against a surface of the lower remaining vertebral body;

a compliant connector section between the first end plate lower surface and the second end plate lower surface, the compliant connector section comprising a plurality of separate stackable spacers each having at least one helical cut configured and arranged to permit limited rotation between the first end plate and the second end plate in an anterior/posterior direction and a lateral direction; and

a rotational interlock on the first end plate lower surface and an upper surface of at least one of the spacers, the rotational interlock being configured and arranged to inhibit rotational motion between the first end plate lower surface and the at least one spacer upper surface, wherein the rotational interlock comprises a first raised elongate portion extending in the anterior/posterior direction or the lateral direction on one of the first end plate lower surface or the at least one spacer upper surface and a first complementary elongate recess in the opposite surface.

2. The vertebral body replacement of claim 1, wherein the second end plate includes an upper surface opposite the second end plate lower surface and spanning the second end plate, the compliant connector section located between the second end plate lower and upper surfaces.

3. The vertebral body replacement of claim 2, wherein said rotational interlock is a first rotational interlock, and further comprising a second rotational interlock on the first end plate lower surface and the second end plate upper surface, the second rotational interlock configured and arranged to at least inhibit rotational motion between the first end plate lower surface and the second end plate upper surface.

4. The vertebral body replacement of claim 1, wherein the compliant connector section is configured and arranged to limit motion to less than 10 degrees between said remaining vertebral bodies.

5. The vertebral body replacement of claim 1, wherein the at least one helical cut in each of the separate stackable spacers are oppositely oriented.

6. The vertebral body replacement of claim 1, wherein said rotational interlock is a first rotational interlock, wherein the at least one spacer has a lower surface spanning the at least one spacer, wherein the second end plate has an upper surface spanning the second end plate, and further comprising:

a second rotational interlock on the second end plate upper surface and the at least one spacer lower surface, the second rotational interlock configured and arranged to at least inhibit rotational motion between the second end plate upper surface and the at least one spacer lower surface,

wherein the second rotational interlock comprises a second raised elongate portion extending in the anterior/posterior direction or the lateral direction on one of the

11

second end plate upper surface or the at least one spacer lower surface and a second complementary elongate recess in the opposite surface.

7. The vertebral body replacement of claim 6, wherein the first and second rotational interlocks are different.

8. The vertebral body replacement of claim 1, further comprising:

an adjustment mechanism between the first and second end plates, the adjustment mechanism configured and arranged to selectively move the first and second end plates towards and away from each other.

9. The vertebral body replacement of claim 1, further comprising at least one bone ingrowth hole in at least one of the first and second end plates.

10. The vertebral body replacement of claim 1, wherein each of the first and second end plates comprise a lateral surface, and wherein the at least one bone ingrowth hole extends between said lateral surface and said surface configured to engage against a surface of a remaining vertebral body.

11. The vertebral body replacement of claim 1, wherein the vertebral body replacement is sized and shaped to replace one or more entire vertebral bodies of the human spine.

12. A vertebral body replacement for replacing at least one vertebral body between remaining upper and lower vertebral bodies, the vertebral body replacement comprising:

a first end plate having an upper surface configured to engage against a surface of the upper remaining vertebral body, and a lower surface opposite the upper surface spanning the first end plate;

a second end plate having a lower surface configured to engage against a surface of the lower remaining vertebral body;

a compliant connector section between the first end plate lower surface and the second end plate lower surface, the compliant connector section comprising a plurality of separate stackable spacers each having at least one helical cut configured and arranged to form a continuous spring coil element; and

a rotational interlock on the first end plate lower surface and an upper surface of at least one of the spacers, the rotational interlock being configured and arranged to inhibit rotational motion between the first end plate lower surface and the at least one spacer upper surface,

wherein the rotational interlock comprises a raised elongate portion extending in the anterior/posterior direction or the lateral direction on one of the first end plate lower surface or the at least one spacer upper surface and a complementary elongate recess in the opposite surface.

13. The vertebral body replacement of claim 12, wherein the vertebral body replacement is sized and shaped to replace one or more entire vertebral bodies of the human spine.

14. A vertebral body replacement for replacing at least one vertebral body between remaining upper and lower vertebral bodies, the vertebral body replacement comprising:

a first end plate having an upper surface configured to engage against a surface of the upper remaining vertebral body, and a lower surface opposite the upper surface spanning the first end plate;

a second end plate having a lower surface configured to engage against a surface of the lower remaining vertebral body and an upper surface;

a compliant connector section between the first end plate lower surface and the second end plate lower surface,

12

the compliant connector section comprising a plurality of separate stackable spacers each having at least one helical cut configured and arranged to form a continuous spring coil element; and

a rotational interlock on the second end plate upper surface and a lower surface of at least one of the spacers, the rotational interlock being configured and arranged to inhibit rotational motion between the second end plate upper surface and the at least one spacer lower surface,

wherein the rotational interlock comprises a raised elongate portion extending in the anterior/posterior direction or the lateral direction on one of the second end plate upper surface or the at least one spacer lower surface and a complementary elongate recess in the opposite surface.

15. The vertebral body replacement of claim 14, wherein the vertebral body replacement is sized and shaped to replace one or more entire vertebral bodies of the human spine.

16. A vertebral body replacement for replacing at least one vertebral body between remaining upper and lower vertebral bodies, the vertebral body replacement comprising:

a first end plate having an upper surface configured to engage against a surface of the upper remaining vertebral body, and a lower surface opposite the upper surface spanning the first end plate;

a second end plate having a lower surface configured to engage against a surface of the lower remaining vertebral body and an upper surface opposite the lower surface and spanning the second end plate;

a compliant connector section between the first end plate lower surface and the second end plate lower surface, the compliant connector section comprising a plurality of separate stackable spacers each having at least one helical cut configured and arranged to permit limited rotation between the first end plate and the second end plate in an anterior/posterior direction and a lateral direction; and

a rotational interlock on the second end plate upper surface and a lower surface of at least one of the spacers, the rotational interlock being configured and arranged to inhibit rotational motion between the second end plate upper surface and the at least one spacer lower surface,

wherein the rotational interlock comprises a raised elongate portion extending in the anterior/posterior direction or the lateral direction on one of the second end plate upper surface or the at least one spacer lower surface and a complementary elongate recess in the opposite surface.

17. The vertebral body replacement of claim 16, wherein the compliant connector section is located between the second end plate lower and upper surfaces.

18. The vertebral body replacement of claim 16, wherein the compliant connector section is configured and arranged to limit motion to less than 10 degrees between said remaining vertebral bodies.

19. The vertebral body replacement of claim 16, wherein the at least one helical cut in each of the separate stackable spacers are oppositely oriented.

20. The vertebral body replacement of claim 16, wherein said rotational interlock is a first rotational interlock, and further comprising a second rotational interlock on the first end plate lower surface and the second end plate upper surface, the second rotational interlock configured and

13

arranged to at least inhibit rotational motion between the first end plate lower surface and the second end plate upper surface.

21. The vertebral body replacement of claim 16, further comprising:

an adjustment mechanism between the first and second end plates, the adjustment mechanism configured and arranged to selectively move the first and second end plates towards and away from each other.

22. The vertebral body replacement of claim 16, further comprising at least one bone ingrowth hole in at least one of the first and second end plates.

23. The vertebral body replacement of claim 16, wherein each of the first and second end plates comprise a lateral surface, and wherein the at least one bone ingrowth hole extends between said lateral surface and said surface configured to engage against a surface of a remaining vertebral body.

24. The vertebral body replacement of claim 16, wherein the vertebral body replacement is sized and shaped to replace one or more entire vertebral bodies of the human spine.

25. *A vertebral body replacement for replacing at least one vertebral body between remaining upper and lower vertebral bodies, the vertebral body replacement comprising:*

a first end plate having an upper surface configured to engage against a surface of the upper remaining ver-

14

tebral body and at least one elongated fin on the upper surface configured to enter a slot cut in the upper remaining vertebral body;

a second end plate having a lower surface configured to engage against a surface of the lower remaining vertebral body and at least one elongated fin on the lower surface configured to enter a slot cut in the lower remaining vertebral body;

a compliant connector section between the first end plate and the second end plate, the compliant connector section comprising a plurality of separate stackable spacers each having at least one helical cut configured and arranged to permit limited rotation between the first end plate and the second end plate in an anterior/posterior direction and a lateral direction, wherein the compliant connector section is configured and arranged to limit motion to less than 10 degrees between said remaining vertebrae.

26. *The vertebral body replacement of claim 25, wherein the upper and lower surfaces have less than 10 percent comprising holes.*

27. *The vertebral body replacement of claim 25, further comprising one or more holes in the first and second end plates configured to receive screws extending through the plates and into the bone.*

* * * * *