



(22) Date de dépôt/Filing Date: 1999/09/17

(41) Mise à la disp. pub./Open to Public Insp.: 2000/03/23

(45) Date de délivrance/Issue Date: 2004/04/06

(30) Priorité/Priority: 1998/09/23 (09/159,059) US

(51) Cl.Int.⁶/Int.Cl.⁶ F16J 3/02, B29C 45/14, B32B 25/08


(72) Inventeurs/Inventors:
FINGAR, RICHARD E., JR., US;
BENDER, MICHAEL J., US

(73) Propriétaire/Owner:
SAINT-GOBAIN PERFORMANCE PLASTICS
CORPORATION, US

(74) Agent: GOWLING LAFLEUR HENDERSON LLP


(54) Titre : DIAPHRAGME DE POMPE ET METHODE DE FABRICATION CONNEXE

(54) Title: PUMP DIAPHRAGM AND METHOD FOR MAKING THE SAME

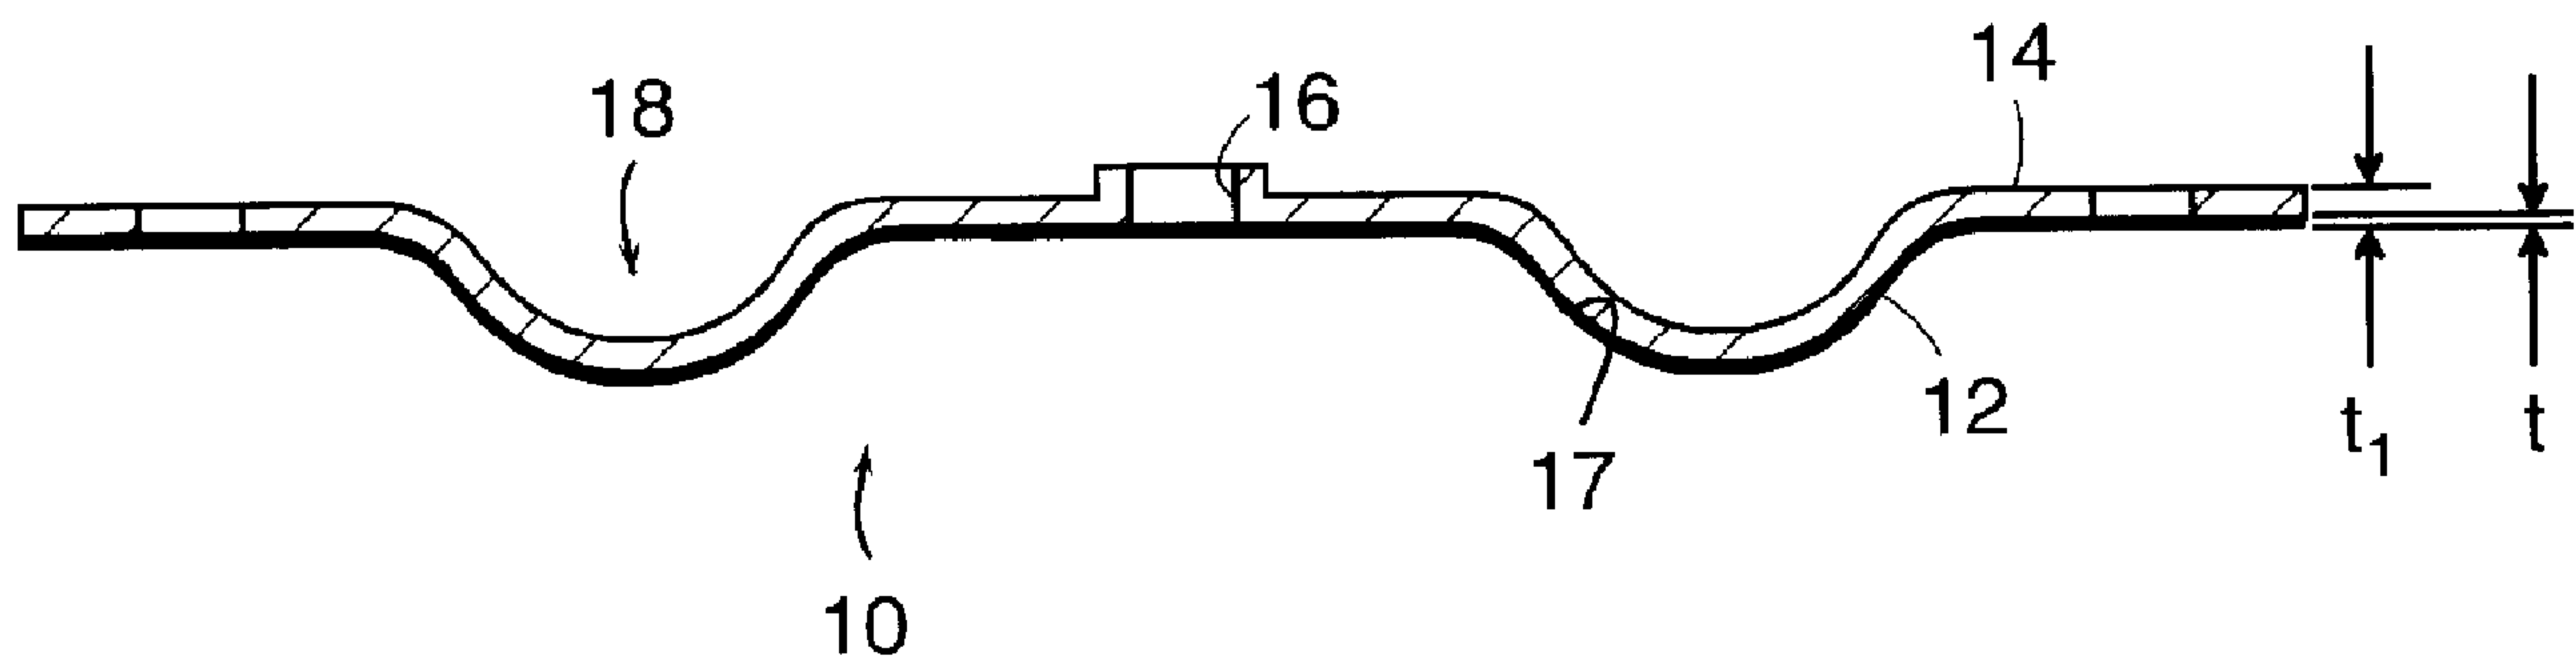

(57) Abrégé/Abstract:

A composite pump diaphragm 10 includes a layer 12 fabricated from annealed polytetrafluoroethylene (PTFE) bonded to a layer 14 fabricated from an unreinforced thermoplastic elastomer including ethylene-propylene terpolymer (EPDM) and polypropylene. The diaphragm 10 is fabricated by chemically etching the PTFE layer 12, coating a surface thereof with a polyurethane adhesive, superimposing the layer 14 with layer 12 under heat and pressure, and allowing the superimposed layers to cure.

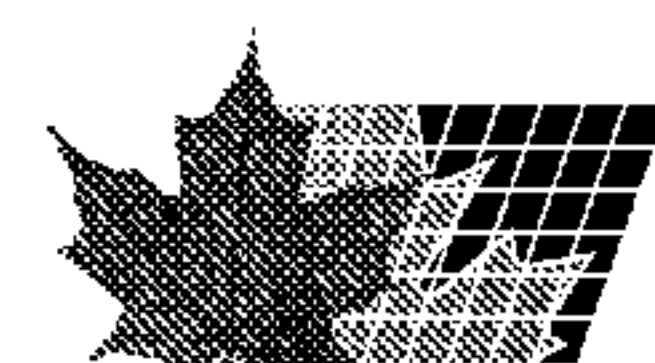

ABSTRACT

4 A composite pump diaphragm 10 includes a layer 12
fabricated from annealed polytetrafluoroethylene (PTFE)
bonded to a layer 14 fabricated from an unreinforced
thermoplastic elastomer including ethylene-propylene
8 terpolymer (EPDM) and polypropylene. The diaphragm 10 is
fabricated by chemically etching the PTFE layer 12, coating
a surface thereof with a polyurethane adhesive,
superimposing the layer 14 with layer 12 under heat and
12 pressure, and allowing the superimposed layers to cure.

25975v2

PUMP DIAPHRAGM AND METHOD FOR MAKING THE SAME

4

This invention relates to diaphragms for use in pumps and valves, and more particularly to a diaphragm including a solid
8 polytetrafluoroethylene layer adhered to a thermoplastic elastomeric layer.

Diaphragm pumps are used in pumping a wide variety of
12 materials especially when the materials are abrasive, have high viscosity, or consist of slurries that might damage other pump designs. These pumps are often air driven which is advantageous in pumping flammable liquids or in environments
16 where electrically driven equipment could otherwise be hazardous. However, electrically or otherwise mechanically driven designs also find wide utility. Due to the wide nature of different materials these pumps are used to move, a
20 correspondingly wide variety of materials are used in their construction. These include plastics and metals. For the same reason the critical driving member, i.e., the pump diaphragm, typically must be manufactured in a variety of materials.

24 Chemically resistant layers, such as those made of polytetrafluoroethylene (PTFE), are widely used in industry to protect sensitive parts of machinery or equipment from the corrosive effects of acids or other chemicals. One such use is
28 in two piece pump diaphragms commonly used with air or electrically driven diaphragm pumps. In the two piece

diaphragms, an outer PTFE overlay diaphragm is commonly used to protect an inner rubber diaphragm from materials that would cause rapid failure of the rubber part alone. In some other cases, the PTFE provides the sole material of construction of the diaphragm.

Such two piece diaphragms commonly utilize a PTFE layer and a thermoset material such as neoprene. While the PTFE layer tends to protect the diaphragm from corrosive effects of some materials, the thermoset rubber material is subject to failure due to other factors such as exposure to relatively low temperatures, tearing and abrasion. Moreover, conventional thermosetting elastomers may be relatively difficult and/or expensive to process, and provide inferior performance relative to thermoplastic elastomers or thermoplastic rubbers.

However, thermoplastic elastomers or rubbers tend to be difficult to bond to PTFE, and tend to delaminate when subjected to repeated flexure, such as experienced in pump diaphragm applications.

Thus, a need exists for a composite diaphragm and a method for making such a diaphragm, that utilizes a layer of PTFE bonded to a thermoplastic elastomer.

SUMMARY OF THE INVENTION

24

According to an embodiment of this invention, a method of fabricating a composite diaphragm includes the steps of:

(a) providing a first layer of polytetrafluoroethylene;

(b) annealing the first layer;

(c) chemically etching a surface of the first layer;

(d) applying an adhesive to the surface of the first

4 layer;

(e) providing a second layer of a thermoplastic elastomer;

(f) placing the second layer in superposed engagement with the first layer, wherein the adhesive contacts both the first

8 layer and the second layer;

(g) applying heat to the superposed first layer and second layer; and

(h) applying pressure to the superposed first layer and
12 second layer wherein the first layer is bonded to the second layer to form an integral composite diaphragm.

In a particular example of this aspect, the thermoplastic elastomer includes a blend of about 25 to 85 parts by weight of
16 crystalline thermoplastic polyolefin resin and about 75 to about 15 parts by weight of vulcanized monoolefin copolymer rubber.

In another aspect of the present invention, a composite
20 diaphragm includes a first layer of polytetrafluoroethylene; and a second layer of an unreinforced thermoplastic elastomeric blend of a thermoplastic material and a fully vulcanized thermoset elastomer.

24 The above and other features and advantages of this invention will be more readily apparent from a reading of the following detailed description of various aspects of the invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

4 Fig. 1 is a plan view of a diaphragm of the subject invention; and

 Fig. 2 is a cross-sectional view taken along 2-2 of Fig. 1.

8

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

 Referring to the figures set forth in the accompanying
12 Drawings, the illustrative embodiments of the present invention will be described in detail hereinbelow. For clarity of exposition, like features shown in the accompanying Drawings shall be indicated with like reference numerals.

16 As shown in Figs. 1 and 2, the present invention is a composite pump diaphragm 10 including a layer 12 fabricated from polytetrafluoroethylene (PTFE) bonded to a layer 14 fabricated from a thermoplastic elastomer including ethylene-
20 propylene terpolymer (EPDM) and polypropylene. The diaphragm 10 is fabricated by chemically etching the PTFE layer 12, coating a surface thereof with a bonding agent such as an adhesive sold under the trademark Chemlock® by Lord
24 Corporation of Erie PA.

 Referring now to the drawings in detail, as shown in the Figs., diaphragm 10 is a generally disk shaped device which may

be provided with substantially any geometry desired for particular pump applications. As shown in Fig. 1, the diaphragm has a substantially circular perimeter 15 of predetermined diameter, with a center hole 16 adapted for engagement with a central shaft of a pump (not shown). The diaphragm 10 also includes an annular, concavo-convex flexure or displacement portion 18 (Figs. 1 and 2). This flexure portion 18 of the diaphragm is defined as that portion of the diaphragm that reciprocally flexes as the diaphragm is used. As shown, the surfaces of each layer 12 and 14 are substantially smooth, rather than being formed with annular or radial ribs as utilized in prior art diaphragms. Moreover, layers 12 and 14 are bonded directly to one another in surface to surface engagement without the use of intermediate reinforcing layers such as fabric and the like. The present invention thus utilizes substantially smooth, unreinforced layers of PTFE and thermoplastic elastomer, which are respectively bonded directly to one another in surface to surface engagement, as will be discussed in greater detail hereinbelow. As used herein, the term "smooth" as used in conjunction with a layer of material, means a layer which is not provided with either annular or radially extending ribs. Similarly, the term "unreinforced" as used herein refers to a layer of material which is neither reinforced by ribs, nor by a fabric or cloth material laminated thereto.

As shown in Fig. 2, diaphragm 10 includes a layer 12 of PTFE which is secured to a layer 14 of a thermoplastic elastomer. The PTFE layer 12 may be a layer of dense PTFE.

4 Examples of full density PTFE include skived and sliced PTFE. The PTFE material provides the composite diaphragm with an inert outside surface to increase the durability and chemical resistance of the diaphragm 10. The solid PTFE layer has an
8 inside surface 17 which is adhered to the thermoplastic elastomer layer 14. Prior to assembly onto layer 14, layer 12 is heat-treated or annealed by heating to its gel point (i.e. approximately 620-630 degrees F (326-332 degrees C)) followed
12 by quenching. In a preferred embodiment layer 12 is heated to about 700-730 degrees F (371-387 degrees C) and then quenched in a chilled mold to resolidify the PTFE. The mold is sized and shaped to provide the layer 12 with its desired,
16 predetermined geometry, including the concavo-convex displacement portion 18. Preferred quenching temperatures are in a range of between about 50-90 degrees F (10-32 degrees C). During this quenching operation, the mold applies a pressure of
20 between about 250-750 psi (1.7-5.2 MPa). This annealing operation serves to modify the crystalline structure (i.e. reduce the crystallinity) of the PTFE to improve the flex life of layer 12.

24 As used herein, the term "anneal" is defined as any process capable of producing a directly or indirectly measurable reduction in crystallinity of PTFE layer 12, relative to untreated PTFE. One example of an indirect measure

of crystallinity is measurement of specific gravity. The crystallinity of the PTFE layer is generally proportional to the specific gravity of the material. As the crystallinity and specific gravity are reduced, the flex life of the material improves. In a preferred embodiment, the annealed PTFE layer 12 of the present invention has a specific gravity equal to or less than about 2.15, as measured by ASTM test method D-792.

Although a preferred annealing process has been disclosed, any other process capable of reducing the crystallinity of PTFE layer 12 may be utilized. For example, various parameters of the annealing process disclosed herein including the rate at which the material is cooled after heating, and/or temperature and duration of the heating step, may be modified without departing from the spirit and scope of the present invention.

The inside surface 17 of layer 12 is then etched by a suitable chemical etchant to increase the surface energy of the PTFE and thereby increase its adherence to the layer 14. Examples of suitable etchants include alkali naphthanates or ammonianates such as sodium ammonianate and sodium naphthalene. The ammonianates are preferred etchants for use in the present invention as they have been shown to provide a better bond than the naphthanates.

After etching, a bonding agent is applied to the etched surface to the PTFE layer 12. A preferred bonding agent is a mixture of 2 weight percent of amino silane monomer in methyl

Docket No.: O-3546

isobutyl ketone (MIBK) such as sold under the trademark Chemlock® 487B by Lord Corporation of Erie, PA.

Layer 14 may be substantially any thermoplastic elastomer, (thermoplastic rubber) such as styrene-butadiene block copolymers (YSBR), styrene-isoprene rubber (YSIR), vinylacetate-ethylene copolymers (YEAM), polyolefins (YEPM) and YAU, YEU and YACM. In a preferred embodiment, layer 14 is fabricated from a thermoplastic elastomeric blend of a thermoplastic material such as a thermoplastic polyolefin resin and a fully cured or vulcanized thermoset elastomer such as a vulcanized monoolefin co-polymer rubber. Such a material is disclosed in U.S. Patent No. 4,130,535.

For example, the thermoplastic elastomer may include a blend of about 25 to 85 parts by weight of crystalline thermoplastic polyolefin resin and about 75 to about 15 parts by weight of vulcanized monoolefin copolymer rubber. In a more specific example, the resin is polypropylene and the rubber is EPDM rubber, in the proportions of about 25-75 parts by weight of polypropylene and about 75-25 parts by weight of EPDM rubber.

An example of such a thermoplastic rubber is a blend of EPDM (ethylene-propylene terpolymer) and a polypropylene sold under the trademark Santoprene® registered to Monsanto Company and exclusively licensed to Advanced Elastomer Systems, L.P., of St. Louis MO. Santoprene® thermoplastic rubber is

Docket No.: O-3546

available in several grades ranging from a durometer or hardness of 55 Shore A to 50 Shore D, having flexural moduli ranging from between 7 and 350 MPa as set forth
4 in a technical bulletin entitled Santoprene® Thermoplastic Rubber, published by Advanced Elastomer Systems, L.P. Preferred grades of Santoprene® thermoplastic rubber for use in the present invention
8 range from a durometer of 73 Shore A to 40 Shore D, having flexural moduli ranging from 24 to 140 MPa, respectively.

The thermoplastic layer 14 is mated in a superimposed
12 manner with the etched and adhesive coated inside surface 17 of PTFE layer 12. Heat and pressure are then applied to the superimposed layers 12 and 14 to bond the layers to one another. The layers are preferably heated to a temperature
16 which is near or within the conventional melt processing range of the layer 14 to facilitate forming and bonding of the material. For example, where a Santoprene® thermoplastic rubber having a melt processing temperature of about 380
20 degrees F (193 degrees C) is used, the layers 12 and 14 are heated to a temperature of approximately 375 to 385 degrees F (190 degrees C to 196 degrees C) under pressure of approximately 250-500 psi (1.7-35 MPa).

24 The application of heat and pressure may be accomplished by clamping the layers between heated platens of a clamp or

press. In a similar alternative, the layers may be heated followed by compression in an unheated clamp or press.

Moreover, in a preferred embodiment, layer 14 may be
4 formed by injection molding the thermoplastic rubber onto the
etched and adhesive coated PTFE layer 12. This approach is
particularly advantageous as it tends to provide a laminant of
consistent quality nominally without air bubbles which are
8 generally problematic in other heat/pressure formed laminates.
The present invention facilitates use of this injection molding
technique by its lack of fabric or similar reinforcements,
since such reinforcement tends to complicate the injection
12 molding process.

As shown, the completed diaphragm 10 may be provided with
any suitable physical dimensions, with PTFE layer 12 having a
thickness t (Fig. 2) and thermoplastic layer 14 having a
16 thickness t_1 . Diaphragms 10 formed as described hereinabove
have been shown to be resistant to cracking and delamination to
provide a useful life which is superior to similar prior art
devices. This superior useful life is surprising since PTFE
20 has been known to crack and fail in prior art diaphragms used
in pumping applications. This superior life is particularly
surprising since the PTFE layer 12 of the present invention has
substantially smooth surfaces, as discussed hereinabove,
24 without having any radially or concentrically oriented ribs or
other reinforcement as taught in the prior art. These
advantages appear to be imparted by annealing (i.e. reducing
the crystallinity of) the PTFE prior to lamination with layer

14. Moreover, it has been found that stresses generated during flexing of conventional reinforced diaphragms tend to concentrate at the reinforcements (i.e. fibers and/or ribs), leading to stress fractures and ultimate failure of these diaphragms. Contrariwise, the present invention reduces such stress concentrations by use of the aforementioned smooth layers to effectively distribute the stresses generated by diaphragm flexure for improved flex life. Additional factors which appear to contribute to the long useful life of the present invention include the elasticity of the thermoplastic elastomer, and the bond achieved by use of the ammonianate etchant. The improved consistency provided by the injection molding process also appears to advantageously affect the useful life of the diaphragm 10.

The following illustrative examples are intended to demonstrate certain aspects of the present invention. It is to be understood that these examples should not be construed as limiting.

20

EXAMPLES

Example 1

A diaphragm 10 was fabricated substantially as shown in Figs. 1 and 2, with a perimeter 15 having a diameter of 7.75 inches (20cm), a PTFE layer 12 having a thickness t within a range of about .030 to .060 inches (0.07 to 0.15cm) and a

Santoprene® thermoplastic rubber layer 14 having a thickness t1 of .130 inches (0.33cm). The PTFE layer 12 was heated to 700 degrees F (371 degrees C) until fully gelled and then
4 quenched in a mold at 65 degrees F (18,degrees C) and 300 psi (2.0 MPa). The layer 12 was then etched and coated with Chemlock 487B and mated with layer 14. The layers 12 and 14 were heated to 350 to 400 degrees F (176-204 degrees C),
8 maintained at this temperature for between 2 and 10 minutes, and compressed at between 500-750 psi (3.4 and 5.2 MPa). The diaphragm was then allowed to cure at ambient temperature for 24 hours. The resulting diaphragm 10
12 was tested in a pumping application in which water within a range of from 105 to 112 degrees F was pumped at between 96 and 102 psi (0.66 and 0.70 Mpa) at a cycle rate of 340 to 375 cycles per minute. The diaphragm operated for 25 million
16 cycles with no rupture of the PTFE layer.

Example 2 (Control)

20 Four diaphragms were fabricated with a layer of elastomeric material other than Santoprene® with a PTFE layer mechanically fastened thereto. These samples were tested in the manner described in Example 1. All of the diaphragms
24 failed at between 8,000,000 and 9,000,000 cycles.

Example 3

A diaphragm 10 was fabricated substantially as shown in Figs. 1 and 2, with perimeter 17 having a diameter of approximately 8.125 inches (20.6cm), PTFE layer 12 having a thickness t of 0.030 inches (0.07cm), and Santoprene® layer 14 having a thickness of .110 inches (0.28cm). The PTFE layer 12 was heated to gel and then quenched in the manner described in Example 1. It was then etched with sodium ammonianate and coated with Chemlock 487B. A layer 14 was then injection molded onto layer 12 at a temperature within a range of about 375 to 385 degrees F (190 degrees C to 196 degrees C) at a conventional injection molding pressure. The layers were cured at ambient temperature for 24 hours. This diaphragm was tested in actual pumping conditions substantially as described in Example 1 and completed 30 million cycles without rupture of the PTFE layer.

16

Example 4

Four diaphragms were fabricated substantially as described in Example 3, utilizing black and naturally pigmented Santoprene® materials of Shore 73A, 80A and 87A hardnesses (i.e. Santoprene® 101-73A, 101-80A, 101-87A, 201-73A, 201-80A and 201-87A, respectively). These diaphragms were tested in actual pumping conditions substantially as described in Example 1 and completed at least 25,000,000 cycles without rupture of the PTFE layer.

24

Example 5

Two diaphragms 10 were fabricated substantially as described in Example 3, with a layer 14 fabricated from Santoprene® 203-40D (naturally pigmented with a hardness of 40 Shore D) and 271-40D (food grade material with a hardness of 40 Shore D). These diaphragms were tested in actual pumping conditions substantially as described in Example 1 and completed at least 20,000,000 cycles with no rupture of the PTFE layer.

12

Example 6

A diaphragm 10 is fabricated substantially as described in Example 3 with a perimeter 17 having a diameter of approximately 12 inches (30.5 cm). This diaphragm is expected to complete at least 20,000,000 cycles in actual pumping conditions without rupture of the PTFE layer.

Having thus described the invention, what is claimed is:

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method of fabricating a composite diaphragm
5 comprising the steps of:
 - (a) providing a first layer of polytetrafluoro-ethylene;
 - (b) annealing the first layer by heating the first
10 layer to its gel point and then quenching the first layer;
 - (c) etching a surface of the first layer;
 - (d) applying an adhesive to the surface of the first layer;
 - (e) providing a second layer of a thermoplastic
15 elastomer;
 - (f) disposing the second layer in superposed engagement with the first layer, wherein the adhesive contacts both the first layer and the second layer;
 - (g) applying heat to the superposed first layer and
20 second layer; and
 - (h) applying pressure to the superposed first layer and second layer wherein the first layer is bonded to the second layer to form an integral composite diaphragm.
- 25 2. The method of claim 1, wherein the first layer has a specific gravity less than or equal to 2.15.
3. The method of claim 1, wherein the second layer is substantially smooth.
4. The method of claim 1, wherein said steps (e)
30 and (f) further comprise the steps of injection molding the second layer onto the first layer.

5. The method of claim 1, wherein the thermo-plastic elastomer comprises a blend of a thermoplastic material and fully vulcanized thermoset elastomer.

5 6. The method of claim 5, wherein the thermo-plastic elastomer further comprises a blend of about 25 to 85 parts by weight of crystalline thermoplastic polyolefin resin and about 75 to about 15 parts by weight of vulcanized monoolefin copolymer rubber.

10 7. The method of claim 6, wherein the resin is polypropylene and the rubber is EPDM rubber, in the proportions of about 25-75 parts by weight of polypropylene and about 75-25 parts by weight of EPDM rubber.

15 8. The method of claim 1, wherein the thermoplastic elastomer has a durometer within a range of from 55 Shore A to 50 Shore D.

20 9. The method of claim 8, wherein the thermoplastic elastomer has a durometer within a range of from 73 Shore A to 40 Shore D.

10. The method of claim 1, wherein said heating step further comprises heating the first layer to a temperature of at least substantially 620 degrees F (326 degrees C).

25 11. The method of claim 10, wherein said heating step further comprises heating the first layer to 700 degrees F (371 degrees C).

12. The method of claim 1, wherein said quenching step further comprises the step of quenching the first

layer at a temperature within a range of 50-90 degrees F
(10-32 degrees C).

5 13. The method of claim 1, wherein said quenching
step further comprises the step of molding the first
layer.

14. The method of claim 1, wherein said quenching
step further comprises the step of molding the first
layer in a mold disposed at a quenching temperature, at a
pressure within a range of 1.7 to 5.2 MPa.

10 15. The method of claim 1, wherein the adhesive
comprises a composition of about 2 weight percent of
amino silane monomer and about 98 weight percent methyl
isobutyl ketone.

15 16. The method of claim 1, wherein said chemically
etching step (c) further comprises applying an alkali
ammonianate to the surface of said PTFE layer.

17. The method of claim 16, wherein the alkali
ammonianate comprises sodium ammonianate.

20 18. A composite diaphragm comprising:
a first layer of annealed polytetrafluoro-
ethylene, having been annealed by heating to its gel
temperature in a mold, and quenching; and
a second layer of an unreinforced thermoplastic
25 elastomeric blend of a thermoplastic material and a fully
vulcanized thermoset elastomer.

19. The composite diaphragm of claim 18, wherein
said first layer has a specific gravity less than or
equal to 2.15.

20. The composite diaphragm of claim 18, wherein said thermoplastic elastomeric blend further comprises a blend of about 25 to 85 parts by weight of crystalline thermoplastic polyolefin resin and about 75 to about 15 parts by weight of vulcanized monoolefin copolymer rubber.

21. The composite diaphragm of claim 20, wherein said resin is polypropylene and said rubber is EPDM rubber, in the proportions of about 25-75 parts by weight of polypropylene and about 75-25 parts by weight of EPDM rubber.

22. The composite diaphragm of claim 18, wherein said thermoplastic elastomeric blend has a durometer within a range of from 55 Shore A to 50 Shore D.

23. The composite diaphragm of claim 22, wherein said thermoplastic elastomeric blend has a durometer within a range of from 73 Shore A to 40 Shore D.

24. The composite diaphragm of claim 18, wherein said first layer is annealed by heating to a temperature within a range of from about 326 degrees C to 387 degrees C.

25. The composite diaphragm of claim 18, wherein said second layer is injection molded onto said first layer.

26. The composite diaphragm of claim 18, wherein said first layer and said second layer are bonded to one another by an adhesive.

27. The composite diaphragm of claim 26, wherein said adhesive further comprises a composition of about 2 weight percent of amino silane monomer and about 98 weight percent methyl isobutyl ketone.

5 28. The composite diaphragm of claim 18, wherein said first layer is etched with an ammonianate etchant.

29. A composite diaphragm formed by the process of:

(a) providing a first layer of polytetrafluoroethylene;

10 (b) annealing the first layer by heating the first layer to its gel point and then quenching the first layer;

(c) chemically etching a surface of said first layer;

15 (d) applying an adhesive to the surface of said first layer;

(e) providing a second layer of an unreinforced thermoplastic elastomer;

20 (f) disposing said second layer in superposed engagement with said first layer;

(g) applying heat to said superposed first layer and second layer; and

25 (h) applying pressure to said superposed first layer and second layer, wherein said first layer is bonded to said second layer to form an integral composite diaphragm.

30. A composite diaphragm comprising:

a first layer of polytetrafluoroethylene; and

30 a second layer of an unreinforced thermoplastic elastomeric blend of about 51 to 85 parts by weight of crystalline thermoplastic polyolefin resin and about 49

to about 15 parts by weight of vulcanized monoolefin copolymer rubber.

31. A composite diaphragm comprising:

a first layer of polytetrafluoroethylene;

5 a second layer of an unreinforced thermoplastic elastomeric blend of a thermoplastic material and a fully vulcanized thermoset elastomer;

10 said first layer and said second layer being bonded to one another by an adhesive including a composition of about 2 weight percent of amino silane monomer and about 98 weight percent methyl isobutyl ketone.

32. A composite diaphragm comprising:

a first layer of etched

15 polytetrafluoroethylene, having been etched with an ammonianate etchant; and

a second layer of an unreinforced thermoplastic elastomeric blend of a thermoplastic material and a fully vulcanized thermoset elastomer.

20 33. A method of fabricating a composite diaphragm comprising the steps of:

(a) providing a first layer of polytetrafluoroethylene;

(b) annealing the first layer;

25 (c) chemically etching a surface of the first layer;

(d) applying an adhesive to the surface of the first layer, the adhesive including a composition of about 2 weight percent of amino silane monomer and about 98 weight percent methyl isobutyl ketone;

30 (e) providing a second layer of a thermoplastic elastomer;

(f) disposing the second layer in superposed engagement with the first layer, wherein the adhesive contacts both the first layer and the second layer;

5 (g) applying heat to the superposed first layer and second layer; and

(h) applying pressure to the superposed first layer and second layer wherein the first layer is bonded to the second layer to form an integral composite diaphragm.

10 34. A method of fabricating a composite diaphragm comprising the steps of:

(a) providing a first layer of polytetrafluoroethylene;

(b) annealing the first layer;

15 (c) chemically etching a surface of the first layer by applying an ammonianate etchant to the surface of said PTFE layer;

(d) applying an adhesive to the surface of the first layer;

20 (e) providing a second layer of a thermoplastic elastomer;

(f) disposing the second layer in superposed engagement with the first layer, wherein the adhesive contacts both the first layer and the second layer;

25 (g) applying heat to the superposed first layer and second layer; and

(h) applying pressure to the superposed first layer and second layer wherein the first layer is bonded to the second layer to form an integral composite diaphragm.

1/1

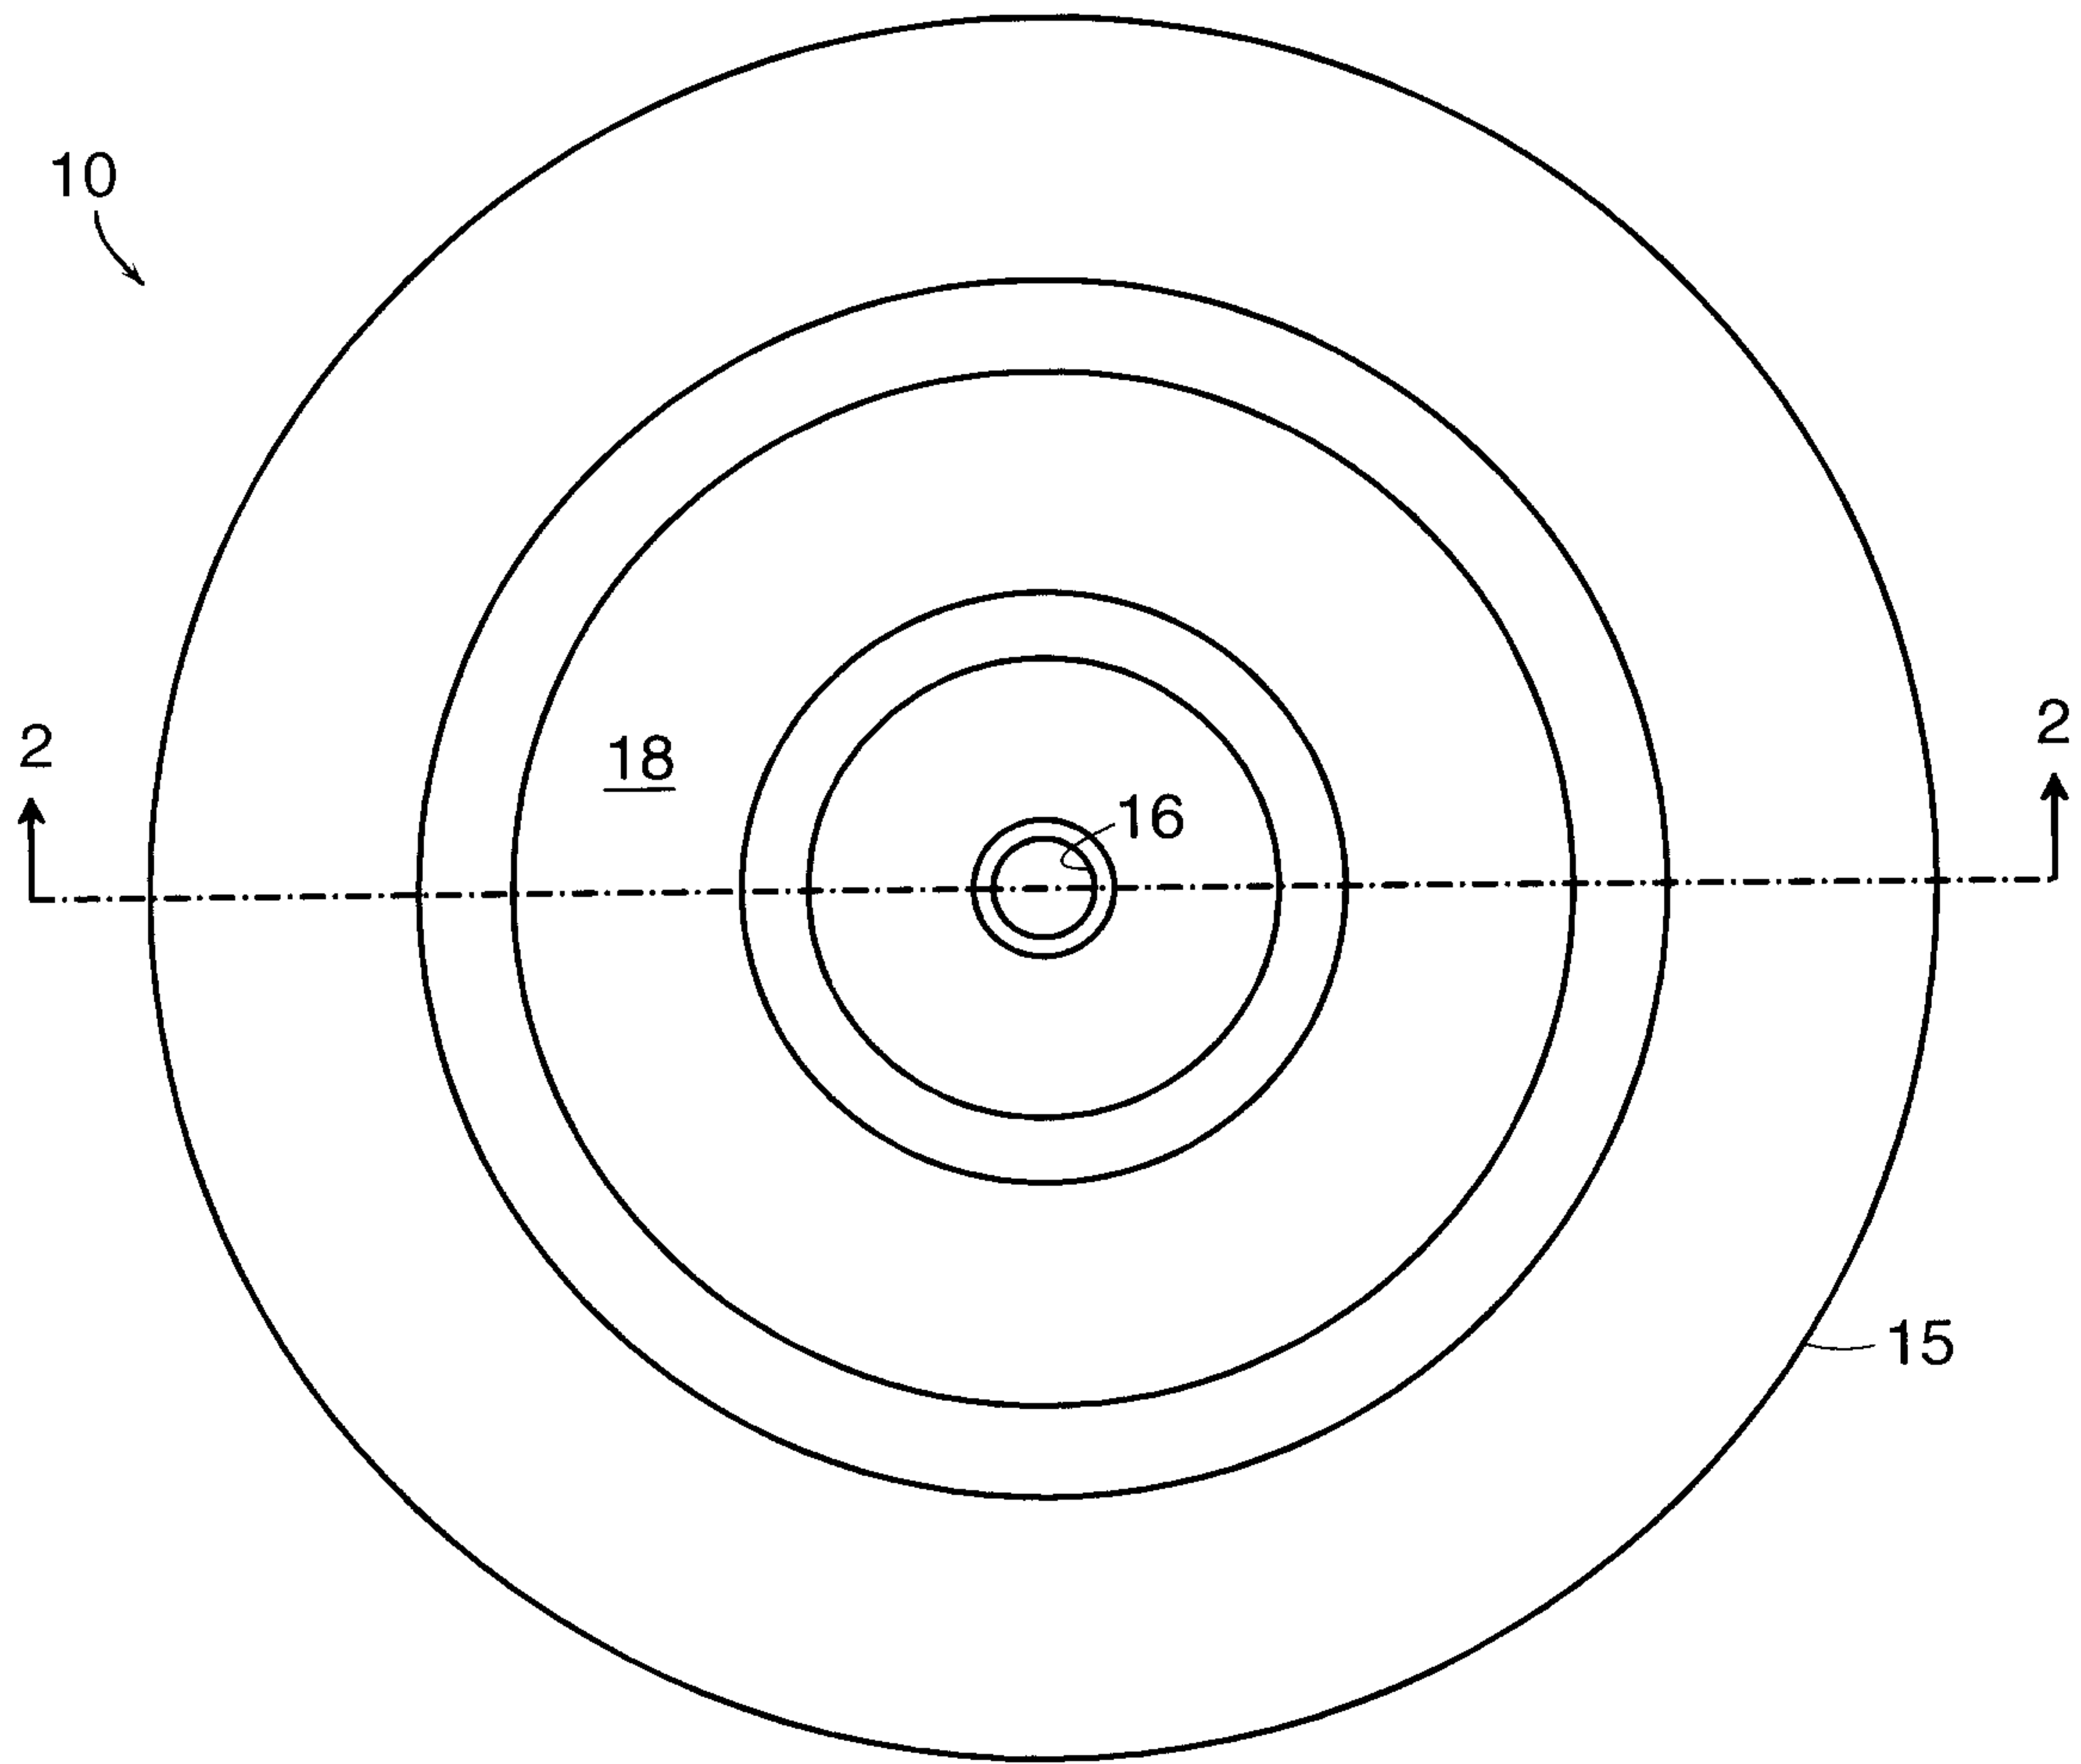


FIG. 1

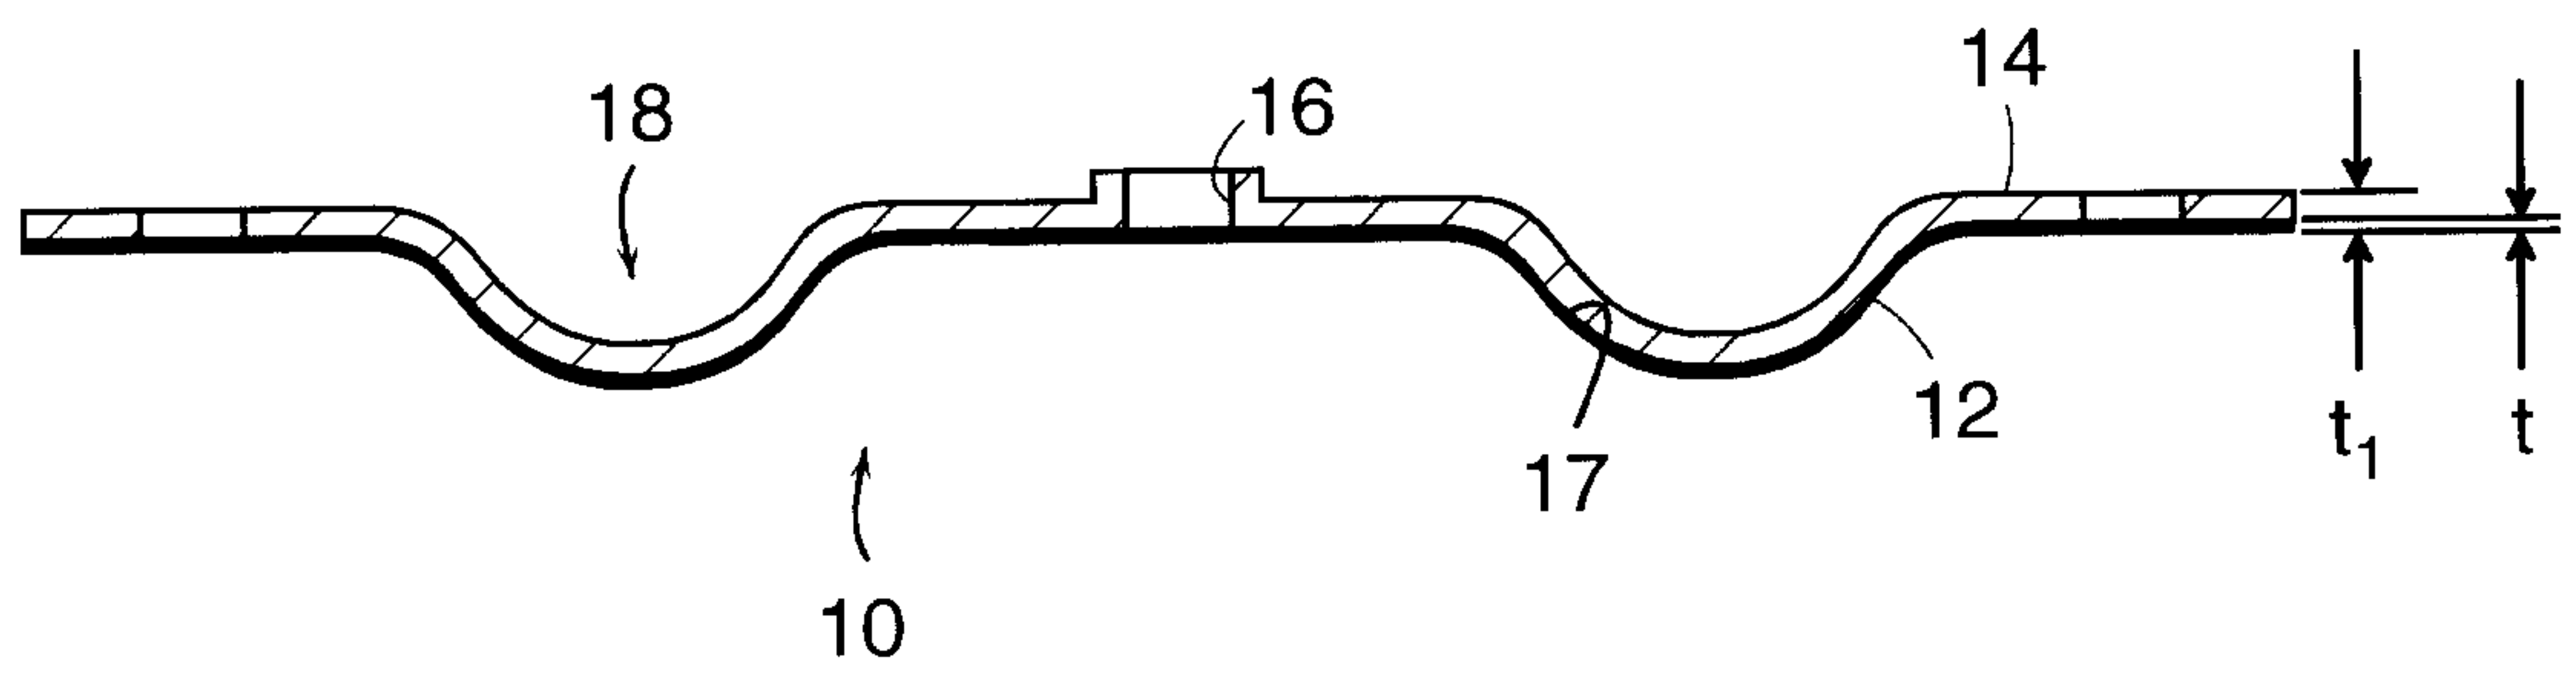


FIG. 2

