



(72) SAKAGUCHI, Masashi, JP
(72) YAMANAKA, Yoshimichi, JP
(72) CHIBA, Makoto, JP
(72) OKAMOTO, Toshihiko, JP
(72) ASAI, Yuriko, JP
(72) TAKASE, Jyunji, JP
(71) KANEKA CORPORATION, JP
(51) Int.Cl.⁶ C08L 23/22, C08L 83/05
(30) 1996/11/25 (8-313909) JP
(54) **COMPOSITION RETICULABLE**
(54) **CURABLE COMPOSITION**

(57) Composition réticulable renfermant les constituants (A), (B), (C) et (D); (A) est un polymère d'isobutylène, dont chaque molécule renferme au moins un groupe alcényle pouvant donner une réaction d'hydrosilylation; (B) est un agent de réticulation contenant au moins deux groupes hydrosilyle dans une molécule; (C) est un catalyseur d'hydrosilylation; (D) est un composé organique, dont chaque molécule renferme au moins un groupe alcényle ou alcynyle pouvant donner une réaction d'hydrosilylation. Cette composition est excellente du point de vue ouvrabilité en raison de sa faible viscosité; de plus, une fois réticulée, elle offre une très grande résistance, et enfin la perte de poids par chauffage est faible. Étant donné qu'on peut mélanger une grande quantité de charge minérale avec cette composition, il est possible d'obtenir une composition possédant une thixotropie élevée et peu d'affaissement.

(57) A curable composition comprising the components (A), (B), (C) and (D), viz. (A) an isobutylene polymer which contains in a molecule, at least one alkenyl group capable of hydrosilylation reaction; (B) a curing agent which contains at least two hydrosilyl groups in a molecule; (C) a hydrosilylation catalyst; and (D) an organic compound which contains in a molecule, at least one alkenyl or alkynyl group capable of hydrosilylation reaction. This composition is excellent in workability because of its low viscosity, and has such advantages that the cured product thereof has large strength and further that the weight loss by heating is small. Since a large amount of an inorganic filler can be blended with this composition, it is possible to obtain a composition having high thixotropy and little sagging.

1

ABSTRACT

A curable composition comprising the components (A), (B), (C) and (D), viz.

- 5 (A) an isobutylene polymer which contains in a molecule, at least one alkenyl group capable of hydrosilylation reaction;
(B) a curing agent which contains at least two hydrosilyl groups in a molecule;
(C) a hydrosilylation catalyst; and
10 (D) an organic compound which contains in a molecule, at least one alkenyl or alkynyl group capable of hydrosilylation reaction.

This composition is excellent in workability because of its low viscosity, and has such advantages that the cured
15 product thereof has large strength and further that the weight loss by heating is small. Since a large amount of an inorganic filler can be blended with this composition, it is possible to obtain a composition having high thixotropy and little sagging.

20

25

30

35

1

CURABLE COMPOSITION

FIELD OF THE INVENTION

The present invention relates to a curable composition
5 which is excellent in curability, the cured product of which
is a rubber-like material and which can be cured by
hydrosilylation reaction. The cured product obtained from
the curable composition of the present invention has an
isobutylene skeleton of a saturated hydrocarbon polymer, so
10 that it is in particular excellent in low moisture
permeability, low hygroscopicity, low gas permeability, heat
resistance, weather resistance, insulating property, vibration
damping property and chemical resistance. It can be widely
applied in many fields such as a sealant in an electric and
15 electronic component and the like, various coating materials,
gasket materials, sealing compounds, molding materials,
paints, adhesives and the like.

BACKGROUND ART

20 Currently, various curable liquid compositions have been
developed, which can form rubber-like materials by curing.
Especially, silicone rubber using hydrosilylation addition
reaction as cross-linking reaction is excellent in weather
resistance, heat resistance, water resistance; and further it
25 has such characteristic properties that shape change thereof
due to its curing reaction is small before and after curing,
that an energy consumption is small because of quick-curing at
a high temperature and that it is quite safe. This silicone
rubber is used as a silicone sealing material and a potting
30 material. However, its use is limited for such reasons that
the cost of this curing system is high, its adhesion is poor,
it easily gets moldy, and the like.

On the other hand, as a curing system which do not use
such an expensive organopolysiloxane, Japanese Kokai
35 Publication Hei-2-75644 and Japanese Kokai Publication Hei-3-

1 181565 have disclosed a curable composition characterized in
that a polymer having at least one alkenyl group in a
molecule is cross-linked by a hydrocarbon curing agent having
two hydrogen atoms bonded to silicon atom in a molecule.

5 Among these, the curable composition characterized in
that the above-mentioned polymer comprises an isobutylene
polymer of a saturated hydrocarbon is excellent in low
moisture permeability, low gas permeability, chemical
resistance and high vibration damping property, etc., in
10 addition to weather resistance and heat resistance while
these excellent properties can not be simultaneously realized
in the above-mentioned silicone systems. Thus, wide uses
thereof can be expected.

15 However, when this isobutylene polymer is treated as a
liquid composition, it sometimes becomes necessary that the
viscosity of its resin component be made low in order to blend
various additives and fillers because of its high viscosity.

20 As general means, a non-reactive plasticizer including a
process oil is used. Because these plasticizers are non-
reactive, they can not be built in cross-linking, and large
lowering of various characteristics such as mechanical
property and heat resistance is inevitable by addition of
these plasticizers. There is also the drawback that the
plasticizers evaporate at a high temperature, and in
25 particular from a point of view of heat resistance, its
improvement is desired.

SUMMARY OF THE INVENTION

30 The present invention has for its object to accomplish a
technology for making viscosity of a curable composition low,
which can reduce lowering of various characteristics such as
mechanical property and heat resistance, as compared with the
case of using conventional plasticizers, in order to improve
workability, for example, making addition of various additives
35 and fillers easily, in a curable composition capable of being

1 cured by hydrosilylation reaction and comprising an
isobutylene polymer, which is excellent in low
hydroscopicity, low moisture permeability, low gas
permeability, heat resistance, weather resistance, insulating
5 property and vibration damping property.

The inventors of the present invention have accomplished
a technology for making viscosity of a curable composition
low, which can reduce lowering of various characteristics
such as mechanical property and heat resistance, as compared
10 with the case of using conventional plasticizers, through
using a reactive diluent that can be bonded with a curing
agent by hydrosilylation reaction which is cross-linking
reaction, when a isobutylene polymer is applied to a curable
composition capable of curing by hydrosilylation reaction.

15 Thus, the present invention relates to a curable
composition comprising (A) an isobutylene polymer which
contains in a molecule, at least one alkenyl group capable of
hydrosilylation reaction; (B) a curing agent which contains at
least two hydrosilyl groups in a molecule; (C) a
20 hydrosilylation catalyst; and (D) an organic compound which
contains in a molecule, at least one alkenyl or alkynyl group
capable of hydrosilylation reaction.

DETAILED DESCRIPTION OF THE INVENTION

25 The component (A) used in the present invention is an
isobutylene polymer which contains in a molecule, at least
one alkenyl group capable of hydrosilylation reaction. The
isobutylene polymer herein means that monomer units
constructing the polymer skeleton mainly comprise isobutylene
30 units.

In this case, all monomer units may be isobutylene units
(a), or the isobutylene polymer may contain, along with
isobutylene units (a), isobutylene-copolymerizable monomer
units (b) within the range of preferably less than 50%
35 (weight %, the same hereinafter), more preferably less than

1 30%, and most preferably less than 20%. Thus, the total
weight content of repeating units originating from
isobutylene (a) is preferably not less than 50 %, more
preferably not less than 70 %, and most preferably not less
5 than 80 % in the polymer of the component (A).

In these polymer structures, it is particularly
preferable, in view of heat resistance, weather resistance
and the like, that repeating units which constitute the main
chain excluding the said alkenyl group consist of saturated
10 hydrocarbons which does not contain unsaturated carbon-carbon
bonds other than aromatic rings.

The polymer used as the component (A) in the invention
may further contain a small quantity, preferably 10 % or less
based on the weight of the component (A), of other monomer
15 units from which several double bonds may remain even after
polymerization within the range for achieving the object of
the invention, for example polyene such as butadiene,
isoprene, 1,9-decadiene, 1,5-hexadiene and the like.

As concrete example of the copolymerizable monomer unit
20 (b) constituting a skeleton of such an isobutylene polymer,
there can be mentioned 1-butene, 2-butene, 2-methyl-1-butene,
3-methyl-1-butene, pentene, 4-methyl-1-pentene, hexene,
vinylcyclohexane, methyl vinyl ether, ethyl vinyl ether,
isobutyl vinyl ether, styrene, α -methylstyrene,
25 dimethylstyrene, p-t-butoxystyrene, p-hexenyloxystyrene,
p-allyloxystyrene, p-hydroxystyrene, β -pinene, indene,
vinyltrimethoxysilane, vinyltrimethylsilane,
divinyltrimethoxysilane, divinyltrimethylsilane,
1,3-divinyl-1,1,3,3-tetramethyldisiloxane, trivinylmethyl-
30 silane, tetravinylsilane, allyltrimethoxysilane,
allyltrimethylsilane, diallyltrimethoxysilane, diallyltrimethyl-
silane, γ -methacryloyloxypropyltrimethoxysilane,
 γ -methacryloyloxypropylmethyldimethoxysilane and the like.

The alkenyl group capable of hydrosilylation reaction in
35 the polymer of the component (A) is not particularly limited

1 provided that it is a group which contains carbon-carbon
double bonds having activity for hydrosilylation reaction.

It is preferable that the alkenyl group capable of
hydrosilylation reaction is contained at an end of the polymer
5 of the component (A).


As the alkenyl group, there can be mentioned, for
example, an aliphatic unsaturated hydrocarbon group such as
vinyl, allyl, methylvinyl, propenyl, butenyl, pentenyl and
hexenyl; a cyclic unsaturated hydrocarbon group such as
10 cyclopropenyl, cyclobutenyl, cyclopentenyl, cyclohexynel; and
the like. In the present invention, it is desirable that the
component (A) has 1 to 10 alkenyl groups in a molecule.

The number average molecular weight of the aforementioned
isobutylene polymer is preferably about 500 to 100,000 (GPC
15 method, converted based on polystyrene), and the isobutylene
polymer is especially preferably a liquid or a fluid having
molecular weight of about 1,000 to 40,000 in view of easiness
of handling, etc.


A method for producing the component (A) in the present
20 invention is described in Japanese Kokai Publication Hei-8-
134220.

As the curing agent of the component (B) in the
invention, there is no limit in particular provided that at
least two hydrosilyl groups are contained in a molecule.
25 Herein, one hydrosilyl group shows one Si-H group.
Accordingly, when two hydrogen atoms are bonded to the
identical Si atom, it is reduced that there are two hydrosilyl
groups.


As the component (B), organohydrogenpolysiloxane is
30 preferable by taking into accounts simplicity of its
synthesis and stability. The said organohydrogenpolysiloxane
herein means a polysiloxane whose Si atoms are bonded to
hydrocarbon groups or hydrogen atoms, and its concrete
structure can be chain or ring as shown by, for example,

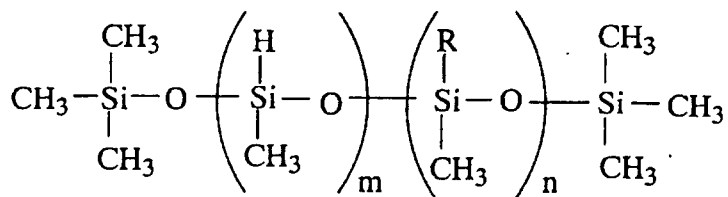

(wherein m and n satisfy the condition that $2 \leq m + n \leq 50$, $2 \leq m$, and $0 \leq n$; and R is a hydrocarbon group with 2 to 20 carbon atoms and may contain one or more aromatic rings)

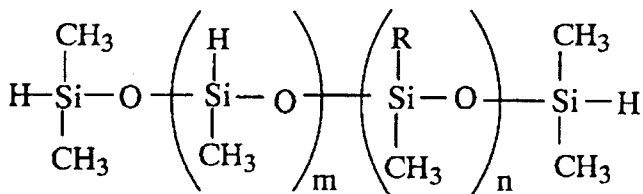


(wherein m and n satisfy the condition that $0 \leq m + n \leq 50$, $0 \leq m$, and $0 \leq n$; and R is a hydrocarbon group with 2 to 20 carbon atoms and may contain one or more aromatic rings)

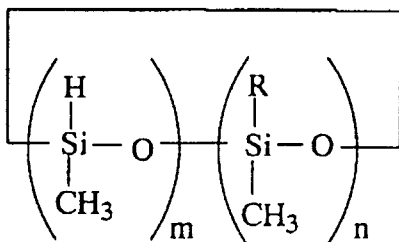

(wherein m and n satisfy the condition that $2 \leq m + n \leq 20$, $2 \leq m \leq 20$, and $0 \leq n \leq 18$; and R is a hydrocarbon group with 2-20 carbon atoms and may contain one or more aromatic rings).

Among the above-mentioned various hydrosilyl-containing polysiloxanes, the below-described is especially preferable by taking into account the fact that compatibility of the hydrosilyl-containing curing agent of the component (B) in the invention with various organic polymers such as the component (A) may hardly be reduced.

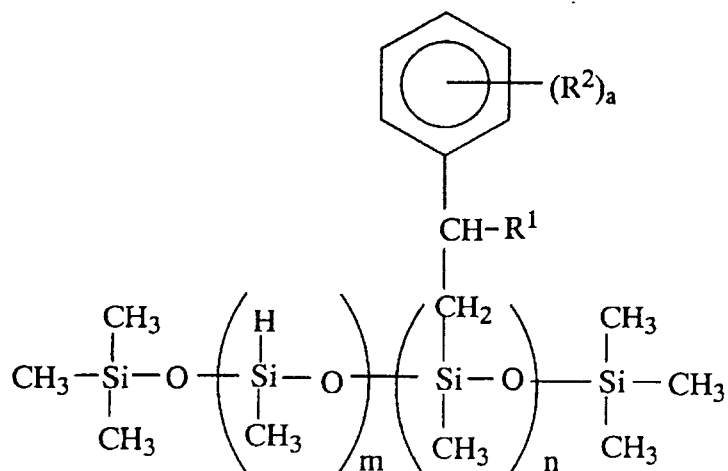

(wherein m and n satisfy the condition that $2 \leq m + n \leq 50$, $2 \leq m$, and $0 \leq n$, R^1 represents a hydrogen atom or methyl, R^2 represents an alkyl group with 1-4 carbon atoms and plural R^2 's may be the same or different. a is 0 or an integer of 1 to 5)

The number of these hydrosilyl groups contained in the component (B) can be at least two in a molecule, but 2 to 40 are preferable. If it is less than 2 when the composition of the present invention is subjected to cure by using hydrosilylation reaction, the curing reaction progresses slowly and the product may often be cured insufficiently. Conversely, if it exceeds 40, stability of the curing agent of the component (B) is reduced, and further reactivity of the hydrosilyl groups become lower and the unreacted hydrosilyl groups remain in the cured products, thus causing generation of voids and cracks.



The curing agent of the component (B) is used in an amount of 0.5 to 1,000 parts by weight, preferably 0.5 to 100 parts by weight, more preferably 1 to 50 parts by weight, relative to 100 parts by weight of the component (A).

As the hydrosilylation catalyst of the component (C) of the invention, there are no special limits and an arbitrary hydrosilylation catalyst can be used.


A concrete example thereof can be given by a

1 chloroplatinic acid, a simple body of platinum or a solid
platinum supported on a carrier such as alumina, silica,
carbon black and the like;


platinum-vinylcyloxane complex (e.g.



platinum-phosphine complex (e.g.



platinum-phospite complex (e.g.



(wherein Me represents methyl, Bu represents butyl, Vi
represents vinyl and Ph represents phenyl, and each of n and
m is an integer); $\text{Pt}(\text{acac})_2$; platinum-hydrocarbon complex
described in the specification of US Patents No.3159601 and
15 No.3159662 by Ashby; and platinum-alcoholate catalyst
described in the specification of US Patents No.3220972 by
Lamoreaux.

Besides, as examples of the catalyst other than platinum
compounds, there can be mentioned $\text{RhCl}(\text{PPh}_3)_3$, RhCl_3 ,
20 $\text{Rh}/\text{Al}_2\text{O}_3$, RuCl_3 , IrCl_3 , FeCl_3 , AlCl_3 , $\text{PdCl}_2 \cdot 2\text{H}_2\text{O}$, NiCl_2 ,
 TiCl_4 or the like.

These catalysts can be used alone or in combination. In
view of catalytic activity, chloroplatinic acid, platinum-
olefin complex, platinum-vinylsiloxane complex, $\text{Pt}(\text{acac})_2$, and
25 the like are preferable.

There are no special limits on an amount of the catalyst
(c), but it can be used in an amount of 10^{-1} to 10^{-8}
mole relative to one mole of the alkenyl group contained in
the component (A). More preferable range is 10^{-2} to 10^{-6}
30 mole. The hydrosilylation catalysts are generally expensive
and corrosive, and a large quantity of hydrogen gas may often
generate to foam the cured product, so that it is not
preferable that more than 10^{-1} mole of this catalyst is used.

The component (D) of the present invention, the organic
35 compound which contains in a molecule, at least one alkenyl

1 or alkynyl group capable of hydrosilylation reaction, is a
compound which lower viscosity of the said composition and
which can be bonded to Si-H groups contained in the curing
agent of the component (B) by hydrosilylation reaction to
5 thereby be taken in the cured product through chemical bonds.

Therefore, there are no limits on these organic compounds
provided that they are a low-molecule-weight organic compound
having in a molecule, at least one alkenyl or alkynyl group
capable of hydrosilylation reaction, but they are desirable
10 to be a hydrocarbon compound having low polarity in view of
excellent compatibility with the component (A) of the
invention. The molecular weight thereof is preferably 400 or
less.

In view of heat resistance, weather resistance and the
15 like which are characteristic of the composition according to
the invention, the component (D) is more preferably a
hydrocarbon compound having substantially no carbon-carbon
unsaturated bonds which have low activity for hydrosilylation
reaction, other than aromatic rings.

20 Moreover, a hydrocarbon compound with 8 and more carbon
atoms is most preferable because a compound having a low
boiling point capable of evaporating during curing and aging
can have some problems in the shape change before and after
curing and in an environmental side.

25 As a concrete example of the component (D), α -olefin
having 6 to 20 carbon atoms, more preferably 8 to 20 carbon
atoms, α, ω -diene having 8 to 20 carbon atoms,
 α -methylstyrene, styrene, divinylbenzene, bisphenol aryl
ether or the like can be given, but it is not limited to these
30 examples. Among these, α -olefin having 8 to 20 carbon
atoms are most preferable.

When the above-mentioned components (D) are used, it is
better to pay the following attentions. The mechanical
property of the cured product obtained from the composition
35 of the invention strongly depends on the number of functional

1 groups contained in the component (D). As the number of the
contained alkenyl or alkynyl groups increases, modulus of the
cured product becomes high and elongation of the cured product
becomes small. When low modulus and high elongation are
5 demanded, it is desirable to select a compound containing only
one alkenyl or alkynyl group in a molecule as the component
(D). Besides, the mechanical property thereof are also
strongly controlled by addition level of the component (D).

10 On the other hand, there are no special limits in
addition level of the component (D), provided that it does
not prevent formation of a three-dimensional crosslinked
structure by the hydrosilylation reaction of the isobutylene
polymer of the component (A) with the curing agent of the
component (B). When the component (D) is excessively added,
15 the SiH groups of the component (B) may be consumed by
hydrosilylation reaction with the unsaturated groups of the
component (D), thus causing the formation of the three-
dimensional crosslinked structure of the component (A) to be
insufficient.

20 The organic compound of the component (D) is preferably
used in an amount of 0.1 to 100 parts by weight, more
preferably 0.5 to 70 parts by weight, and most preferably 1
to 50 parts by weight, relative to 100 parts by weight of the
component (A).

25 Various inorganic fillers can further be added to the
curable composition of the invention according to a purpose
thereof. Since the component (D) becomes nonvolatile by
being bonded to the polymer, a compound having low molecular
weight and low viscosity can be used as the component (D).
30 When the component (D) having low viscosity is used, a larger
amount of the inorganic filler can be added, compared with
the case when a plasticizer having high viscosity is used, to
obtain a composition having high thixotropy and low sagging
property.

35 As the inorganic filler, a general inorganic filler such

1 as calcium carbonate, talc, silica, carbon black etc. can be
used. However, since the curable composition of the
invention is cured by utilizing hydrosilylation reaction, when
the inorganic filler is used, it must be taken into account
5 possibility of inhibition to hydrosilylation reaction, for
example, possibility that side reactions may happen during the
curing reaction if much water is contained in the
composition.

10 In addition, a storage stability-improving agent can be
used in order to improve storage stability of the curable
composition of the present invention.

15 As the storage stability-improving agent, a general
stabilizer known as a storage stabilizer for the component
(B) of the invention can be used, and there are no special
limits provided that expected purposes are achieved.

As concrete examples, a compound containing aliphatic
unsaturated bonds, an organophosphorus compound, an
organosulfur compound, a nitrogen-containing compound, a tin
compound, an organoperoxide or the like can be suitably used.

20 As more concrete examples, there can be mentioed
2-benzothiazolylsufide, benzothiazole, thiazole,
dimethylacetylenedicarboxylate, diethylacetylene-
dicarboxylate, BHT, butylhydroxyanisole, vitamin E,
2-(4-morpholozynyldithio)benzothiazole, 3-methyl-1-butene-3-ol,
25 organosiloxane containing acetylenically unsaturated groups,
acetylene alcohol, 3-methyl-1-butyl-3-ol, diallyl fumalate,
diallyl malate, diethyl malate, diethyl malate, dimethtl
malate, 2-pentenitrile, 2,3-dichloropropene and the like.
Among them, thiazole and benzothiazole are specially
30 preferable in view of compatibility of pot life with quick-
curing, but they are not limited to these examples.

35 Additionally, to the curable compound of the invention
can appropriately be added other fillers, antioxidants,
ultraviolet absorbents, pigments, surfactants and the like, if
necessary. As a concrete example of these fillers, titanium

1 oxide, hydrozincite, barium sulfate and the like can be given.

2 In the curable composition capable of being cured by
3 hydrosilylation reaction using an isobutylene polymer which is
4 excellent in low moisture permeability, low hygroscopicity,
5 low gas permeability, heat resistance, weather resistance,
6 insulating property and vibration damping property, the
7 organic compound which can be bonded to the curing agent by
8 the aforementioned hydrosilylation reaction is used instead of
9 conventional plasticizers used for technologies for lowering
10 viscosity, thus making it possible to prevent lowering various
11 characteristics resulting from use of conventional
12 plasticizers.

13 In the composition of the present invention, the compound
14 containing an alkenyl or alkynyl group is used as a reactive
15 diluent instead of conventional non-reactive plasticizers such
16 as paraffinic process oil. Thus, the composition of the
17 invention is excellent in workability because of its low
18 viscosity, and it has such advantages that the cured product
19 thereof has large strength and further that the weight loss by
20 heating is small. Since a large amount of an inorganic
21 filler can be blended with the composition of the invention,
22 it is possible to obtain a composition having high thixotropy
23 and little sagging. The cured product obtained from the
24 composition of the invention is an elastomer excellent in
25 various characteristics such as low moisture permeability,
26 low hygroscopicity, low gas permeability, heat resistance,
27 weather resistance, insulating property and vibration damping
28 property, and particularly it is improved in heat resistance
29 compared with the case of using conventional non-reactive
30 plasticizers.

BEST MODE FOR CARRYING OUT THE INVENTION

31 The following examples are further illustrative of the
32 present invention but are by no means limitative of the scope
33 of the invention.
34
35

1 Example 1

As the component (A), A1 (analytical values of which are shown in Table 1) selected from A (A1 and A2) was used. It was synthesized by the method mentioned in Japanese Kokai Publication Hei-08-134220 and its structure is shown below.


Table 1

Analysis item	Measurement method	Measured value; Compound	
		A1	A2
Number average molecular weight (Mn)	GPC	5,400	10,600
Weight average molecular weight (Mw)	GPC	7,200	12,400
Degree of dispersion	GPC	1.3	1.2
Number of terminal functional groups	¹ H-NMR	2.0	1.9

Note 1) The measured value by GPC is converted on a polystyrene weight basis.


Note 2) The number of terminal functional groups by ¹H-NMR measurement shows the number of terminal functional groups relative to the residues of initiator.

Compound A:

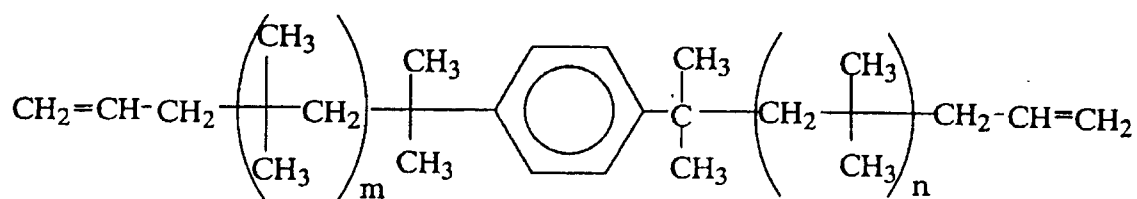

(wherein each of m and n represents an integer.)

At first, 10 parts by weight of octadecene as the component (D) (made by Wako Pure Chemicals Co., Ltd.) was mixed with 100 parts by weight of the component (A), and the viscosity of the mixture was measured with E type viscometer.

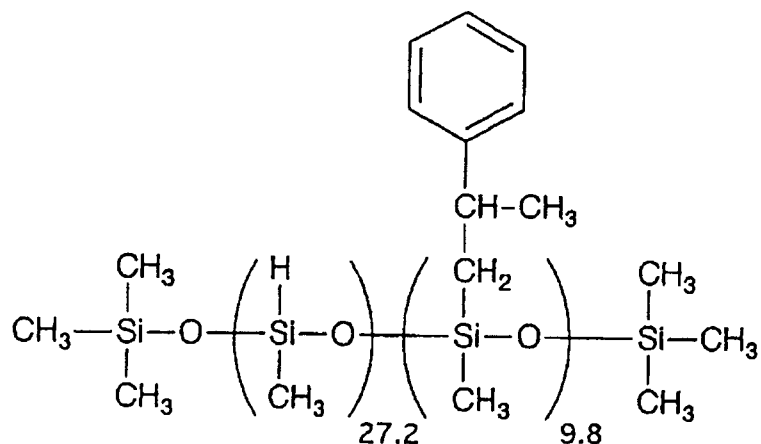

Example 2

14

the component (D) was added relative to 100 parts by weight of the component (A). Its viscosity and elongating property of the dumbbell were measured.

Example 3


Example 1 was repeated except that 40 parts by weight of the component (D) was added relative to 100 parts by weight of the component (A) and that the component (B) was added in such an amount that a molar ratio of alkenyl groups in the component (A) to Si-H groups in the component (B) is 1:8. Its viscosity and elongating property of the dumbbell were measured.

Comparative Example 1

Example 1 was repeated except that 25 parts by weight of paraffinic process oil (made by Idemitsu Petro. Co.: trade name, PS-32) was added relative to 100 parts by weight of the component (A) as a plasticizer instead of the component (D).

Its viscosity was measured. In preparing a specimen, a compound C, the structure of which is shown below, was used as the component (B) in such an amount that a molar ratio of alkenyl groups in the component (A) to Si-H groups in the component (B) is 1:2.

Compound C:

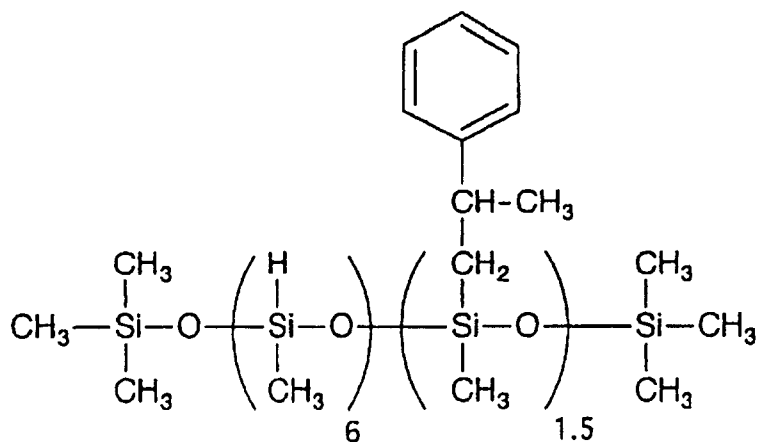

1 Comparative Example 2

Comparative Example 1 was repeated except that 50 parts by weight of paraffinic process oil (made by Idemitsu Petro. Co.: trade name, PS-32) was added relative to 100 parts by weight of the component (A) as a plasticizer instead of the component (D). Its viscosity and elongating property were measured.

Comparative Example 3

10 Comparative Example 1 was repeated except that 100 parts by weight of paraffinic process oil (made by Idemitsu Petro. Co.: trade name, PS-32) was added relative to 100 parts by weight of the component (A) as a plasticizer instead of the component (D). Its viscosity and elongating property were measured.

Example 4

Example 1 was repeated except that the compound A2 was used as the component (A). Its viscosity and elongating property of the dumbbell were measured.

Example 5

Example 1 was repeated except that the compound A2 was used as the component (A); 20 parts by weight of the component (D) was added relative to 100 parts by weight of the component (A); and that the component (B) was added in such an amount that a molar ratio of alkenyl groups in the component (A) to Si-H groups in the component (B) is 1:6. Its viscosity and elongating property of the dumbbell were measured.

Comparative Example 4

Comparative Example 1 was repeated except that A2 was used as the component (A). Its viscosity and elongating property of the dumbbell were measured.

1 Comparative Example 5

Comparative Example 2 was repeated except that A2 was used as the component (A). Its viscosity and elongating property of the dumbbell were measured.

5 Each blended ratio is shown in Table 2.

Table 2

10

15

20

25

30

35

			Example					Comparative Example			Example			Comparative Example		
			1	2	3	1	2	3	4	5	1	2	3	4	5	6
Component (A)	Compound A1	g	100	100	100	100	100	100			4	5				
	Compound A2	g							100	100	100	100	100	100	100	
Component (D)	Octadecene	g	10	20	40				10	20						
Plasticizer	PS-32	g				25	50	100						25	50	
Component (B)	Compound B	g	19	19	38				9	17						
	Compound C	g				9	9	9						4	4	
Component (C)	Pt-vinylsiloxane complex	μ l	220	220	220	220	220	220	107	107	107	107		107	107	
Storage stability-improving agent	Dimethyl maleate	mg	80	80	80	80	80	80	36	36				36	36	
Antioxidant	Irganox 1010	g	1	1	1	1	1	1	1	1	1	1	1	1	1	

1 Example 6

The above-mentioned compound A1 was used as the component (A), and 10 parts by weight of octadecene (made by Wako Pure Chemicals Co., Ltd.) as the component (D). One part by weight
5 of Irganox 1010 as the antioxidant (made by Chiba-Gaigi) and 50 parts by weight of talc as the inorganic filler (Japan talc, trade name, MS) were weighed relative to 100 parts by weight of the component (A) and kneaded three times with a roll. The viscosity of the mixture was measured with BS type
10 viscometer. Following this, the compound B of the component (B), the structure of which is shown above, was weighed in such an amount that a molar ratio of alkenyl groups of the component (A) to Si-H groups of the component (B) is 1:4 and mixed with this mixture. In addition, 3 mole of dimethyl
15 maleate as a storage stability-improving agent was weighed relative to one mole of platinum, and bis(1,3-divinyl-1,1,3,3-tetramethyldisiloxane)-platinum complex catalyst (8.3×10^{-5} mmol/ μ l, xylene solution) as the component (C) were weighed in such an amount that platinum in the complex is $5 \times$
20 10^{-4} mole per mole of alkenyl groups in the component (A), and then mixed uniformly. The composition was poured in a die of 10 cm X 10 cm and was subjected to cure under a pressure of about 1 MPa at 130°C for 30 minutes. A sheet of the cured product thus obtained was punched in a dumbbell type. Its
25 elongating property was measured (the measurement was in accordance with JIS K6301).

Example 7

Example 6 was repeated except that 20 parts by weight of
30 the component (D) was added relative to 100 parts by weight of the component (A). Its viscosity and elongating property of the dumbbell were measured.

Comparative example 6

35 Example 6 was repeated except that 25 parts by weight of

1 paraffinic process oil (made by Idemitsu Petro. Co.: trade
name, PS-32) was added relative to 100 parts by weight of the
component (A) as a plasticizer instead of the component (D) to
measure its viscosity. In preparing a specimen, the compound
5 C mentioned above was used as the component (B) in such an
amount that a molar ratio of alkenyl groups of the component
(A) to Si-H groups of the component (B) is 1:4.

Comparative Example 7

10 Comparative Example 6 was repeated except that 50 parts
by weight of paraffinic process oil (made by Idemitsu Petro.
Co.: trade name, PS-32) was added instead of the component (D)
as the plasticizer relative to 100 parts by weight of the
component (A). Its viscosity and elongating property were
15 measured.

Each blending ratio is shown in Table 3.

Table 3

		Example			Comparative Example		
		6	7		6	7	
Component (A)	Compound A1	g	100	100	100	100	100
Component (D)	Octadecene	g	10	20			
Plasticizer	PS-32	g			25	50	50
Inorganic filler	Talc MS	g	50	50	50	50	50
Component (B)	Compound B	g	19	19			
	Compound C				10	10	10
Component (C)	Pt-vinylsiloxane complex	μ l	223	223	223	223	223
Storage stability-improving agent	Dimethyl maleate	mg	80	80	80	80	80
Antioxidant	Irganox 1010	g	1	1	1	1	1

The results of the above-mentioned measurements are shown in Table 4.

Table 4

		Example			Comparative Example			Example		Comparative Example	
		1	2	3	1	2	3	4	5		
Viscosity	Pa·S	105	26	4	92	27	6	253	66	231	61
	M50	0.5	0.4	0.2	0.4	0.3	0.2	0.3	0.2	0.2	0.2
M100	MPa	-	-	-	-	-	-	0.5	0.4	0.3	0.3
Tmax	MPa	0.5	0.6	0.4	0.6	0.4	0.2	0.8	0.7	0.5	0.4
Emax	%	85	85	97	90	81	67	179	216	185	157

		Example		Comparative Example	
		6	7	6	7
Viscosity (2 rpm)	Pa·S	740	170	420	90
Viscosity (10 rpm)	Pa·S	450	100	320	70
Ratio of viscosity (2 rpm / 10 rpm)		1.6	1.7	1.3	1.3
M50	MPa	2.2	1.4	1.5	0.9
Tmax	MPa	2.6	1.8	2.0	1.1
Emax	%	69	68	75	67

1 Example 8

 In order to examine heat resistance of the cured product obtained by the present invention, each of sample pieces of the cured products which were prepared in the above-mentioned
5 Examples 6 and 7 and Comparative Examples 6 and 7 was allowed to stand at 150 °C for about 30 days. Its weight change was then measured.

 The results are shown in Table 5.

10

Table 5

		Example		Comparative Example	
		6	7	6	7
Weight loss	(%)	< 1	< 1	13	23

15

20

25

30

35

 It is clear from the results shown in Tables 4 and 5 that the compound using the reactive diluent of the present invention can reveal, at the same viscosity, higher strength concerning compatibility with the said saturated hydrocarbon and revealed strength, as compared with compounds using conventional plasticizers. Moreover, in a heat-resistant test, little weight loss by heating is observed in the compound using the reactive diluent of the present invention, as compared with the compounds using conventional
25 plasticizers which evaporate slowly at 150 °C, so that it can be confirmed the compound of the present invention shows excellent heat resistance.

1

CLAIMS

1. A curable composition comprising the components (A), (B), (C) and (D) described below:

5 (A) an isobutylene polymer which contains in a molecule, at least one alkenyl group capable of hydrosilylation reaction;

(B) a curing agent which contains at least two hydrosilyl groups in a molecule;

(C) a hydrosilylation catalyst; and

10 (D) an organic compound which contains in a molecule, at least one alkenyl or alkynyl group capable of hydrosilylation reaction.

2. The curable composition according to Claim 1, wherein
15 the alkenyl group capable of hydrosilylation reaction is contained at an end of the polymer of the component (A).

3. The curable composition according to Claim 1 or 2, wherein the total weight content of repeating units
20 originating from isobutylene is not less than 50 % in the polymer of the component (A).

4. The curable composition according to Claim 1 or 2, wherein the total weight content of repeating units
25 originating from isobutylene is not less than 80% in the polymer of the component (A).

5. The curable composition according to Claim 1, 2 or 3, wherein the curing agent of the component (B) is
30 organohydrogenpolysiloxane which contains at least two hydrosilyl groups in a molecule.

6. The curable composition according to Claim 1, 2, 3, 4 or 5, wherein molecular weight of the alkenyl groups-
35 containing organic compound of the component (D) is 400 or

1 less.

7. The curable composition as claimed in Claim 1, 2, 3,
4, 5 or 6, wherein the alkenyl groups-containing organic
5 compound of the component (D) is α -olefin having 6 to 20
carbon atoms.

10

15

20

25

30

35