

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 May 2006 (11.05.2006)

PCT

(10) International Publication Number
WO 2006/048735 A1


- (51) International Patent Classification:
B60K 6/04 (2006.01) **B60W 20/00** (2006.01)
- (21) International Application Number:
PCT/IB2005/003269
- (22) International Filing Date:
1 November 2005 (01.11.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2004-319165 2 November 2004 (02.11.2004) JP
- (71) Applicant (for all designated States except US): **NISSAN MOTOR CO., LTD.** [JP/JP]; 2, Takara-cho, Kanagawa-ku, Yokohama-shi, Kanagawa 221-0023 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **OHNO, Takeshi** [JP/JP]; 267-30-201 Kamayacho, Hodogaya-ku, Yokohama-shi, kanagawa 240-0063 (JP).
- (74) Agent: **SIEFFERT, Kent, J.**; Shumaker & Sieffert, P.A., 8425 Seasons Parkway, Suite 105, St. Paul, MN 55125 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN ENGINE START CONTROL DEVICE AND METHOD FOR A HYBRID VEHICLE

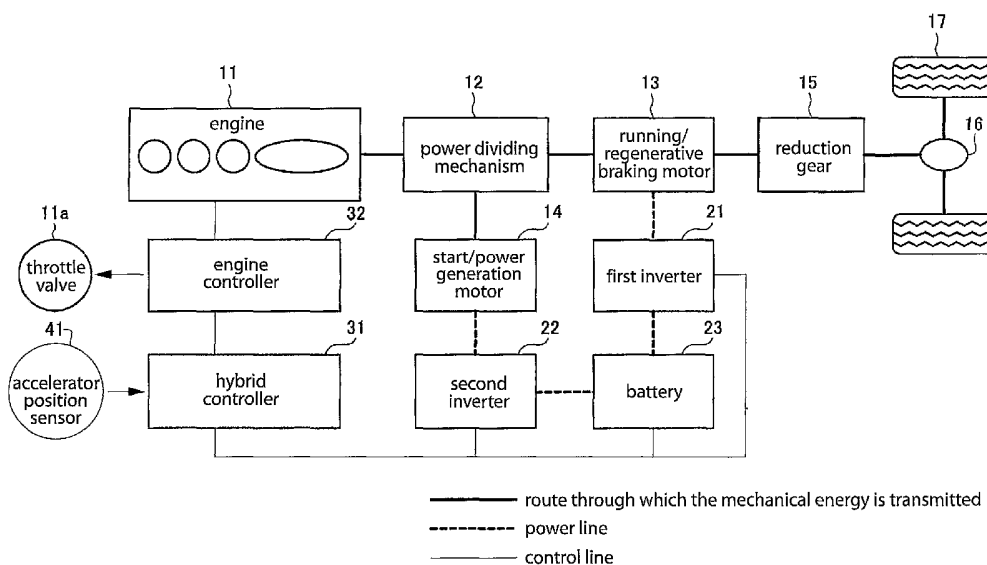

(57) Abstract: An engine start control device for a hybrid vehicle equipped with an electric motor (13) and an engine (11) with an induction system, including a hybrid controller (31) that performs an engine start determination to determine whether the engine (11) should be started while the electric motor (13) is running; an acceleration position sensor (41) that detects an acceleration demand during the engine start determination; and a start/power generation motor (14) that starts the engine (11), wherein the start/power generation motor (14) controls the pressure in the induction system based on acceleration demand, in particular by operating a throttle valve (11a).

WO 2006/048735 A1

AN ENGINE START CONTROL DEVICE AND METHOD FOR A HYBRID VEHICLE

TECHNICAL FIELD

[0001] The present invention relates to an engine start control device for a hybrid vehicle which is equipped with a motor and an engine.

BACKGROUND

[0002] A hybrid vehicle having both a motor and an engine is powered only by a motor when the vehicle is under a small load. When the load increases, the hybrid vehicle starts the engine to provide additional driving force. When the hybrid vehicle shifts from running only with a motor to using the engine as well, it is necessary to rapidly start the engine. If it takes a long time to start the engine, the driving force cannot be smoothly controlled, which deteriorates vehicle performance.

[0003] Therefore, the time required to start the engine may be reduced by controlling the action timing of the induction system at the time the engine starts. However, when the engine start time is shortened as described above, the engine torque is applied immediately after the complete combustion of the engine start, which results in an engine start shock. The driver tends to feel the engine start shock, particularly when the vehicle is accelerated slowly.

SUMMARY

[0004] In general, the present disclosure is directed to an engine start control device for a hybrid vehicle which may prevent the shock that the driver feels during slow acceleration and also provides good throttle response when rapid acceleration is required.

[0005] In one aspect, the present disclosure is directed to an engine start control device for a hybrid vehicle equipped with an electric motor and an engine with an induction system, including a hybrid controller that performs an engine start determination to determine whether the engine should be started while the electric motor is running, an acceleration position sensor that detects an acceleration demand during the engine start determination, and a start/power generation motor that starts the engine, wherein the start/power generation motor controls the pressure in the induction system based on acceleration demand.

[0006] In another aspect, the present disclosure is directed to a method including determining whether an engine should be started while a motor is running, wherein the engine includes an induction system, detecting an acceleration demand of a driver during an engine start determination, and starting the engine after controlling the pressure in the induction system based on the acceleration demand.

[0007] In yet another aspect, the present disclosure is directed to an engine start control device for a hybrid vehicle equipped with an electric motor and an engine, including means for performing an engine start determination while the electric motor is running, means for detecting acceleration demand of the driver during said engine start determination, and means for controlling the induction pressure of the induction system to start the engine based on said acceleration demand.

[0008] The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF DRAWINGS

[0009] FIG. 1 is a schematic block diagram illustrating the structure of an embodiment of the engine start control device for a hybrid vehicle.

[0010] FIG. 1A is a schematic diagram illustrating the driveline of a hybrid vehicle.

[0011] FIG. 1B is a plot showing the relationship between the components of a planetary gear mechanism.

[0012] FIG. 1C is a plot showing the relationship between the components of a planetary gear mechanism.

[0013] FIG. 2 is a main flowchart indicating the operation of the engine start control device for a hybrid vehicle.

[0014] FIG. 3 is a flowchart of the target setting routine.

[0015] FIG. 4 is a graph indicating target gate opening TV01 of the throttle valve versus the amount of pressure on the accelerator pedal.

[0016] FIG. 5 is a graph indicating target delay time T_a for the fuel injection versus the amount of pressure on the accelerator pedal.

[0017] FIG. 6 is a graph indicating target delay time T_b for the fuel injection versus the rate of the pressure on the accelerator pedal.

[0018] FIG. 7 is a time chart of the case where the amount of pressure on the accelerator pedal is small ($AP0 \leq AP01$).

[0019] FIG. 8 is a time chart of the case where the amount of pressure on the accelerator pedal is large ($AP0 > AP01$).

DETAILED DESCRIPTION

[0020] The embodiments of the present invention will be described in detail below by referring to the drawings, but the present invention is not limited to this embodiment.

[0021] FIG. 1 is a block diagram illustrating an embodiment of the engine start control device for a hybrid vehicle. In FIG. 1, the thick solid line indicates the route through which mechanical energy is transmitted, the dashed line indicates the electric power line, and the thin solid line indicates the control line.

[0022] Referring to FIG. 1, a hybrid vehicle 10 includes an engine 11, a planetary gear mechanism 12, a running/regenerative braking motor 13, a start/power generation motor 14, a reduction gear 15, a differential arrangement 16, drive wheels 17, a first inverter 21, a second inverter 22, a battery 23, a hybrid controller 31 and an engine controller 32.

[0023] The running/regenerative braking motor 13 is connected to engine 11 through the planetary gear mechanism 12, which functions as a power divider. The running/regenerative braking motor 13 is used for driving (power running) and braking (regenerative braking) of the vehicle. The running/regenerative braking motor 13 is an alternator such as, for example, a three-phase synchronized motor and three-phase induction motor.

[0024] Referring to FIG. 1A, the planetary gear mechanism 12 includes a sun gear 12a which is a first rotating element connected to start/power generation motor 14, ring gear 12b which is a third rotating element connected to driving wheels 17 and a plurality of pinion gears 12c which are engaged in the outer circumference of sun gear 12a and the inner circumference of ring gear 12b, which are concentrically placed. Planetary gear mechanism 12 rotatably supports the plurality of pinion gears 12c and has carrier 16d which is a second rotating element connected to engine 11.

[0025] The running/regenerative braking motor 13 is placed in the driving force transmitting path which is located among ring gear 12b, reduction gear 15 and differential arrangement 16. According to the present embodiment, running/regenerative braking motor 13 is serially connected to the input axes of reduction gear 15 and differential arrangement 16. That is, ring gear 12b which is the gear element connected to

running/regenerative braking motor 13 is connected to the driving force transmitting path connected to driving wheels 17. When running/regenerative braking motor 13 and start/power generation motor 14 are driven to increase rotation, that is, when a positive torque is output during the positive rotation, or when a negative torque is outputted during the negative rotation, they function as motors and consume electric power from the battery through an inverter. Also, when running/regenerative braking motor 13 and start/power generation motor 14 are driven to decrease rotation, that is, when a negative torque is output during the positive rotation, or when a positive torque is outputted during the negative rotation, they function as power generating machines and charge the battery through an inverter.

[0026] The driving force needed to run the vehicle is mainly outputted by engine 11 and motor 12. Typically, in the idling area which does not have good engine efficiency, low-speed area and moderate to high speed and low loaded area, the vehicle is driven by motor where only motor 12 is the source for driving the vehicle. When the demanded driving force of the vehicle cannot be obtained only by the output of engine 11, electric power is supplied from battery 24 to drive motor 12 and the generated motor torque is added (assisted) to the engine torque. Motor 12 collects the speed reduction energy by conducting the regenerative driving when the speed of the vehicle is reduced and can charge the battery through an inverter or can be driven as a power generating machine when the vehicle is running by the engine.

[0027] Next, the operation of planetary gear mechanism 12 will be described. When the number of the teeth of ring gear 12b is Z_r , that of sun gear 12a is Z_s , the gear ratio of ring gear 12b and sun gear 12a is λ , $\lambda = Z_s/Z_r$. When the number of rotations of ring gear 12b is N_r , that of sun gear 12a is N_s and that of carrier 16d is N_c , the relationship of these numbers and gear ratio λ is formula (1) below:

$$N_r + \lambda N_s = (1 + \lambda) N_c \dots (1)$$

[0028] FIGS. 1B and 1C are collinear diagrams indicating the relationship among the numbers of rotations of each element of planetary gear mechanism 12. According to the collinear diagrams, sun gear 12a and ring gear 12b which are the elements of both sides, are connected to start/power generation motor 14 and running/regenerative braking motor 13 respectively and carrier 16d which is the element of the inside, is connected to engine 11. Number of rotations N_r of the ring gear which corresponds to the number of rotations of the input of differential arrangement 16, changes in accordance with the shift

transmission ratio of the speed of the vehicle, reduction gear 15 and differential arrangement 16. In a situation wherein the shift transmission ratio of reduction gear 15 and differential arrangement 16 is maintained at a minimum such as in the case where the vehicle is running at a high speed, the number of rotations N_r of the ring gear changes based on the speed of the vehicle. Therefore, as shown in the collinear diagram of FIG.1B, by adjusting and controlling the number of rotations of sun gear 12a (number of rotations of start/power generation motor 14), it is possible to change or control the number of rotations of carrier 16d, that is, the number of rotations of the engine, with a high degree of accuracy. When the two gears of planetary gear mechanism 12 are fixed, $N_r = N_s = N_c$ and they are driven at a gear ratio of 1. Therefore, when ring gear 12b and carrier 16d are attached by lock-up clutch 28, three rotating elements 16a, 16b and 16d which constitute planetary gear mechanism 12 are integrally rotated.

[0029] The start/power generation motor 14 is connected to engine 11 through power the planetary gear mechanism 12. The start/power generation motor 14 cranks engine 11 when the engine is started. Furthermore, after the engine is started, start/power generation motor 14 generates electric power by using one part of the power of engine 11 that is distributed by the planetary gear mechanism 12. The start/power generation motor 14 is also an alternator such as, for example, a three-phase synchronized motor and three-phase induction motor.

[0030] When the vehicle is running at a low speed, it is powered by the running/regenerative braking motor 13. When the pressure on the accelerator pedal is increased by the driver and the driving force demand is increased, the engine 11 is started by start/power generation motor 14 and the vehicle is powered by the engine 11 and running/regenerative braking motor 13. Then, by using a portion of the engine output, start/power generation motor 14 generates electric power. The driving force of engine 11 and running/regenerative braking motor 13 is transmitted to driving wheels 17 through reduction gear 15 and differential arrangement 16.

[0031] The first inverter 21 electrically connects running/regenerative braking motor 13 to battery 23. When the vehicle is running, first inverter 21 converts the direct current that is produced by battery 23 into an alternate current and supplies this alternating current to running/regenerative braking motor 13. Furthermore, during braking, first inverter 21 converts the regenerative alternate current of running/regenerative braking motor 13 into a direct current, which is then used to charge battery 23. Here, when a direct current electric motor is used as running/regenerative braking motor 13, a DC/DC

converter may be used as substitute for the inverter. Examples of suitable batteries 23 include various types of rechargeable batteries such as nickel hydride, lithium ion and lead acid, as well as a power capacitor such as an electric double layer capacitor.

[0032] The second inverter 22 connects start/power generation motor 14 to battery 23. When the vehicle is started, second inverter 22 converts the direct current produced by battery 23 into an alternating current and supplies this alternating current to start/power generation motor 14. Furthermore, when the vehicle is running, second inverter 22 converts the alternating current generated by start/power generation motor 14 into a direct current which is then used to charge battery 23. Again, if a direct current electric motor is used as start/power generation motor 14, a DC/DC converter may be used as substitute for the inverter.

[0033] The hybrid controller 31 calculates the target driving force based on acceleration demand, which depends, for example, on the amount of pressure on the acceleration pedal. The acceleration demand is detected by an accelerator position sensor 41. Hybrid controller 31 controls running/regenerative braking motor 13 and start/power generation motor 14 through first inverter 21 and second inverter 22. Furthermore, hybrid controller 31 is connected to engine controller 32 by a CAN communication and controls engine 11 through engine controller 32. Moreover, hybrid controller 31 is connected to the battery 23 by a control line. Also, hybrid controller 31 includes an SOC detecting means, which detects the state of charge (SOC) of battery 23. When the SOC is low, hybrid controller 31 initiates start/power generation motor 14 to start engine 11 and charges battery 23 with electric power, which is generated by the driving force of engine 11 at start/power generation motor 14.

[0034] The engine controller 32 receives a signal from hybrid controller 31 and controls the injection time and injected amount of fuel which is supplied to engine 11, as well as the amount that a throttle valve 11a is opened. The throttle valve 11a, which is positioned within the induction system of the engine 11, may be opened or closed as necessary by the hybrid controller 31 to control the air flow rate and pressure within the induction system, as well as the flow of an air/fuel mixture into the engine 11.

[0035] When transitioning from running with the motor alone to running with the engine, if it takes time to start the engine, the driving force may not be smoothly controlled, which adversely affects driving performance. Therefore, it is preferable to shorten the time for starting the engine. However, when the engine is started, a shock may be

generated, which the driver easily detects as a jolt or a jerking movement of the vehicle powertrain, particularly when the vehicle is accelerated slowly.

[0036] When acceleration demand is small, i.e. when the pressure on the accelerator pedal exerted by the driver is small, the shock caused by the engine start may be decreased by injecting fuel when a pressure droop is detected inside the induction system. In addition, the throttle valve 11a may optionally be closed. Alternatively, the cranking time may be extended instead of, or in addition to, injecting fuel. By doing so, it may be possible to decrease the shock at the time the engine starts and smooth the acceleration.

[0037] As used herein the term pressure drop refers to a drop in the pressure over a given time interval of the gas flowing in the induction system of the engine of the vehicle.

[0038] On the other hand, when acceleration demand is great, i.e. the pressure on the accelerator pedal exerted by the driver is large, if the same procedure is applied, the acceleration response may deteriorate. Under these conditions the throttle valve 11a is opened and the fuel is injected prior to the detection of a pressure drop inside the induction system by starting the fuel injection earlier. This procedure may prevent deterioration of the acceleration response.

[0039] The control logic of engine controller 32 will be more practically described below by referring to the flowchart of FIG. 2.

[0040] FIG. 2 is a flowchart describing exemplary operation of the engine start device for a hybrid vehicle. In step S1, after receiving the engine start signal from hybrid controller 31, engine controller 32 moves on to step S2 and subsequent steps.

[0041] In step S2, engine controller 32 determines whether or not the vehicle was previously started by the engine (that is, whether or not this is the first time the vehicle has been started by the engine). If the vehicle was not previously started by the engine, engine controller 32 proceeds to step S3 and, if the vehicle was previously started by the engine, it proceeds to step S8.

[0042] In step S3, engine controller 32 re-sets timer T. In step S4, engine controller 32 sets the target. The content of the target setting routine will be more practically described later. In step S5, engine controller 32 starts cranking by start/power generation motor 14 through hybrid controller 31.

[0043] In step S6, engine controller 32 determines whether or not timer T exceeds target time T1 which is set by target setting routine S4. Before timer T exceeds target time T1, engine controller 32 moves on to step S7 and after timer T exceeds target time T1, engine controller 32 moves on to step S9.

[0044] In step S7, engine controller 32 sets the gate opening of throttle valve 11a to a position referred to herein as gate opening TV01, which is set by target setting routine S4. In step S8, engine controller 32 calculates timer T. In step S9, engine controller 32 starts fuel injection. In step S10, engine controller 32 resets the gate opening of throttle valve 11a from TV01 to its normal position.

[0045] FIG. 3 is a flow chart illustrating an exemplary target setting routine. The target setting routine of FIG. 3 is described with reference to FIGS. 4–6. In step S41, engine controller 32 sets target gate opening TV01 of throttle valve 11a, which will be explained in more detail below based on the graph shown in FIG. 4.

[0046] FIG. 4 indicates target gate opening TV01 of the throttle valve versus acceleration demand - the amount of pressure on the accelerator pedal, and/or the output of the acceleration sensor and the like. When the amount of pressure on the accelerator pedal APO is the predetermined value APO1 or lower, the target gate opening TV01 of the throttle valve 11a is completely opened. In this manner, when the pressure on the accelerator pedal from the driver is small and the acceleration demand is small, the throttle valve 11a is completely opened. When acceleration demand is great, i.e., the pressure on the accelerator pedal from the driver is large, and the amount of pressure on the accelerator pedal exceeds the predetermined value AP01, target gate opening TV01 of the throttle valve 11a is set. The values in FIG. 4 are determined experimentally beforehand.

[0047] In step S42, engine controller 32 sets target delay time Ta for the fuel injection based on the amount of pressure on the accelerator pedal. More practically, target delay time Ta is determined based on the graph shown in FIG. 5. FIG. 5 indicates target delay time Ta for the fuel injection versus the amount of pressure on the accelerator pedal, which is determined experimentally beforehand. As may be seen from FIG. 5, as the pressure on the accelerator pedal exerted by the driver increases, target delay time Ta decreases and as the pressure on the accelerator pedal exerted by the driver decreases, target delay time Ta increases. Especially when the amount of pressure on the accelerator pedal exerted by the driver is small, the required driving force may be small. In this case, for example, it is assumed that it is necessary to start engine 11 since the SOC of battery 23 is small. Therefore, target delay time Ta is extended to alleviate shock at the time of the engine start.

[0048] In step S43, engine controller 32 may set target delay time T_b for the fuel injection based on the rate of the pressure on the accelerator pedal. More practically, target delay time T_b may be determined based on the graph shown in Figure 6. FIG. 6 indicates target delay time T_b for the fuel injection versus the rate of the pressure on the accelerator pedal, which is determined experimentally beforehand. As may be seen from FIG. 6, as the rate of the pressure on the accelerator pedal exerted by the driver increases, target delay time T_b decreases and as the rate of the pressure on the accelerator pedal exerted by the driver decreases, target delay time T_b increases.

[0049] In step S44, engine controller 32 compares the size of target delay times T_a and T_b . When $T_a \leq T_b$, engine controller 32 moves on to step S45 and sets T_a as target delay time T_1 . When $T_a > T_b$, engine controller 32 moves on to step S46 and sets T_b as target delay time T_1 .

[0050] FIG. 7 is a time chart illustrating the case where the amount of pressure exerted by the driver on the accelerator pedal is small ($AP_0 \leq AP_{01}$). Until time t_{11} , the amount of pressure on the accelerator pedal from the driver is small (Figure 7(F)) and the vehicle runs only by running/regenerative braking motor 13 (Figure 7(E) and (G)).

[0051] At time t_{11} when the amount of pressure on the accelerator pedal exerted by the driver increases (Figure 7(F)), the torque of running/regenerative braking motor 13 increases (Figure 7(G)).

[0052] At time t_{12} when the amount of pressure on the accelerator pedal exceeds standard value AP_{02} (Figure 7(F)), the control shown in the flowchart of Figure 2 is started (step S1 \rightarrow S2 of Figure 2).

[0053] After timer T is re-set (step S3 of Figure 2), the target value is set (step S4 of Figure 2). Here, the amount of pressure on the accelerator pedal AP_0 is predetermined value AP_{01} or less and target gate opening TV_{01} of the throttle valve 11a is completely closed. Also, target delay time T_1 is the smaller of target delay time T_a for the fuel injection, which is set based on the amount of pressure on the accelerator pedal, or target delay time T_b for the fuel injection, which is set based on the rate of the pressure on the accelerator pedal.

[0054] Next, cranking of engine 11 is started by start/power generation motor 14 (Figure 7(A) and step S5 of Figure 2) and the gate opening of the throttle valve 11a becomes TV_{01} (Figure 7(B) and step S7 of Figure 2).

[0055] Then, at time t_{13} when timer T goes beyond target delay time $T1$ (Yes in step $S6$ of Figure 2), the fuel injection is started (Figure 7(D) and step $S9$ of Figure 2) and at the same time the gate opening of throttle valve 11a is changed back from $TV01$ to the normal gate opening (Figure 7(B) and step $S10$ of Figure 2). By doing so, engine 11 generates torque (Figure 7(E)). In this way, throttle valve 11a is completely closed and a pressure drop develops inside the induction system of the engine 11 (Figure 7(C)).

Therefore, it is possible to reduce the shock at the time of the engine start.

[0056] FIG. 8 is a time chart indicating the case where the amount of pressure on the accelerator pedal is large ($AP0 > AP01$). Until time t_{21} , the amount of pressure on the accelerator pedal exerted by the driver is small (Figure 8(F)), and the vehicle runs only by running/regenerative braking motor 13 (Figure 8(E) and (G)).

[0057] At time t_{21} when the amount of pressure on the accelerator pedal exerted by the driver is increased (Figure 8(F)), the torque of running/regenerative braking motor 13 is increased (Figure 8(G)). At time t_{22} when the amount of pressure on the accelerator pedal exceeds standard value $AP02$ (Figure 8(F)), the control logic shown in the flowchart of Figure 2 is started (step $S1 \rightarrow S2$ of Figure 2).

[0058] After timer T is re-set (step $S3$ of Figure 2), the target value is set (step $S4$ of Figure 2). Here, amount of pressure on the accelerator pedal $AP0$ is larger than predetermined value $AP01$ and target gate opening $TV01$ is determined based on Figure 2. Also, target delay time $T1$ is the smaller of target delay time Ta for the fuel injection, which is set based on the amount of pressure on the accelerator pedal, or target delay time Tb for the fuel injection, which is set based on the rate of the pressure on the accelerator pedal.

[0059] Next, cranking of engine 11 is started by start/power generation motor 14 (Figure 8(A) and step $S5$ of Figure 2) and the gate opening of the throttle valve 11a is set at $TV01$ (Figure 8(B) and step $S7$ of Figure 2).

[0060] Then, at time t_{23} when timer T goes beyond target delay time $T1$ (Yes in step $S6$ of Figure 2), the fuel injection is started (Figure 8(D) and step $S9$ of Figure 2) and at the same time the gate opening of throttle valve 11a is changed to the normal gate opening (Figure 8(B) and step $S10$ of Figure 2). By doing so, engine 11 generates torque (Figure 8(E)). In this way, throttle valve 11a has a gate opening of $TV01$ and the pressure drop is not developed inside the induction system (Figure 8(C)). Therefore, engine 11 generates significant torque and it is possible to sufficiently increase speed.

[0061] The engine start control device for a hybrid vehicle that is described above prevents the shock that the driver feels when acceleration demand is small and the vehicle is accelerated slowly. In addition, the engine start control device makes it possible to accelerate the vehicle with a good throttle response when acceleration demand is great and the vehicle is rapidly accelerated.

[0062] The present invention is not limited to the above described embodiment and can be changed to a variety of forms within the scope of its technological idea. Various embodiments of the invention have been described. These and other embodiments are within the scope of the following claims.

CLAIMS:

1. An engine start control device for a hybrid vehicle equipped with an electric motor and an engine with an induction system, comprising:
 - a hybrid controller that performs an engine start determination to determine whether the engine should be started while the electric motor is running;
 - an acceleration position sensor that detects an acceleration demand during the engine start determination; and
 - a start/power generation motor that starts the engine, wherein the start/power generation motor controls a pressure in the induction system based on acceleration demand.
2. The engine start control device for a hybrid vehicle as set forth in claim 1, wherein the hybrid controller determines whether the engine should be started based on the acceleration demand of the driver.
3. The engine start control device for a hybrid vehicle as set forth in claim 1, wherein the acceleration position sensor detects the acceleration demand of the driver based on an amount of pressure on an accelerator pedal.
4. The engine start control device for a hybrid vehicle as set forth in claim 1, wherein the hybrid controller, which is equipped with a SOC detector to detect a state of battery charge, determines whether the engine should be started based on the state of battery charge.
5. The engine start control device for a hybrid vehicle as set forth in one of claim 1, wherein the start/power generation motor cranks the engine with a throttle valve opening based on the acceleration demand and the hybrid controller starts the engine by starting a fuel injection a predetermined time after the cranking starts.

6. The engine start control device for a hybrid vehicle as set forth in one of claims 1, wherein the start/power generation motor controls the induction system pressure drop so that as the acceleration demand decreases, the induction system pressure drop increases.
7. The engine start control device for a hybrid vehicle as set forth in one of claims 5, wherein the start/power generation motor encloses the throttle gate opening when the acceleration demand falls below a predetermined demand.
8. The engine start control device for a hybrid vehicle as set forth in one of claims 5, wherein the start/power generation motor makes the throttle gate opening as wide as the acceleration demand is large when the acceleration demand is greater than a predetermined demand.
9. The engine start control device for a hybrid vehicle as set forth in one of claims 5, wherein the start/power generation motor extends the time from the start of the cranking to the start of the fuel injection as the acceleration demand decreases.
10. The engine start control device for a hybrid vehicle as set forth in one of claims 5, wherein the time from the start of the cranking to the start of the fuel injection spent by said start/power generation motor is the lesser of the first delay time calculated based on the amount of pressure on the accelerator pedal and the second delay time calculated based on the rate of the pressure on the accelerator pedal.
11. A method comprising:
 - determining whether an engine should be started while a motor is running,
 - wherein the engine comprises an induction system;
 - detecting an acceleration demand of a driver during an engine start determination;
 - and
 - starting the engine after controlling a pressure in the induction system based on the acceleration demand.
12. The method of claim 11, further comprising determining whether the engine should be started based on the acceleration demand of the driver.

13. The method of claim 11, wherein detecting an acceleration demand of the driver comprises detecting the acceleration demand of the driver based on an amount of pressure on an accelerator pedal.
14. The method of claim 11, further comprising:
 - detecting a state of battery charge; and
 - determining whether the engine should be started based on the state of battery charge.
15. The method of claim 11, further comprising:
 - cranking the engine with a throttle gate opening based on the acceleration demand; and
 - starting the engine by starting a fuel injection a predetermined time after the cranking starts.
16. The method of claim 11, further comprising controlling the induction system pressure drop so that as the acceleration demand decreases, the induction system pressure drop increases.
17. The method of claim 15, further comprising enclosing the throttle gate opening when the acceleration demand falls below a predetermined demand.
18. The method of claim 15, further comprising making the throttle gate opening as wide as the acceleration demand is large when the acceleration demand is greater than a predetermined demand.
19. The method of claim 15, further comprising extending the time from the start of the cranking to the start of the fuel injection as the acceleration demand decreases.
20. The method of claim 15, wherein the time from the start of the cranking to the start of the fuel injection is the lesser of the first delay time calculated based on the amount of pressure on the accelerator pedal and the second delay time calculated based on the rate of the pressure on the accelerator pedal.

21. An engine start control device for a hybrid vehicle equipped with an electric motor and an engine, comprising:
- means for performing an engine start determination while the electric motor is running;
 - means for detecting an acceleration demand of a driver during the engine start determination; and
 - means for controlling an induction pressure of an induction system to start the engine based on the acceleration demand.

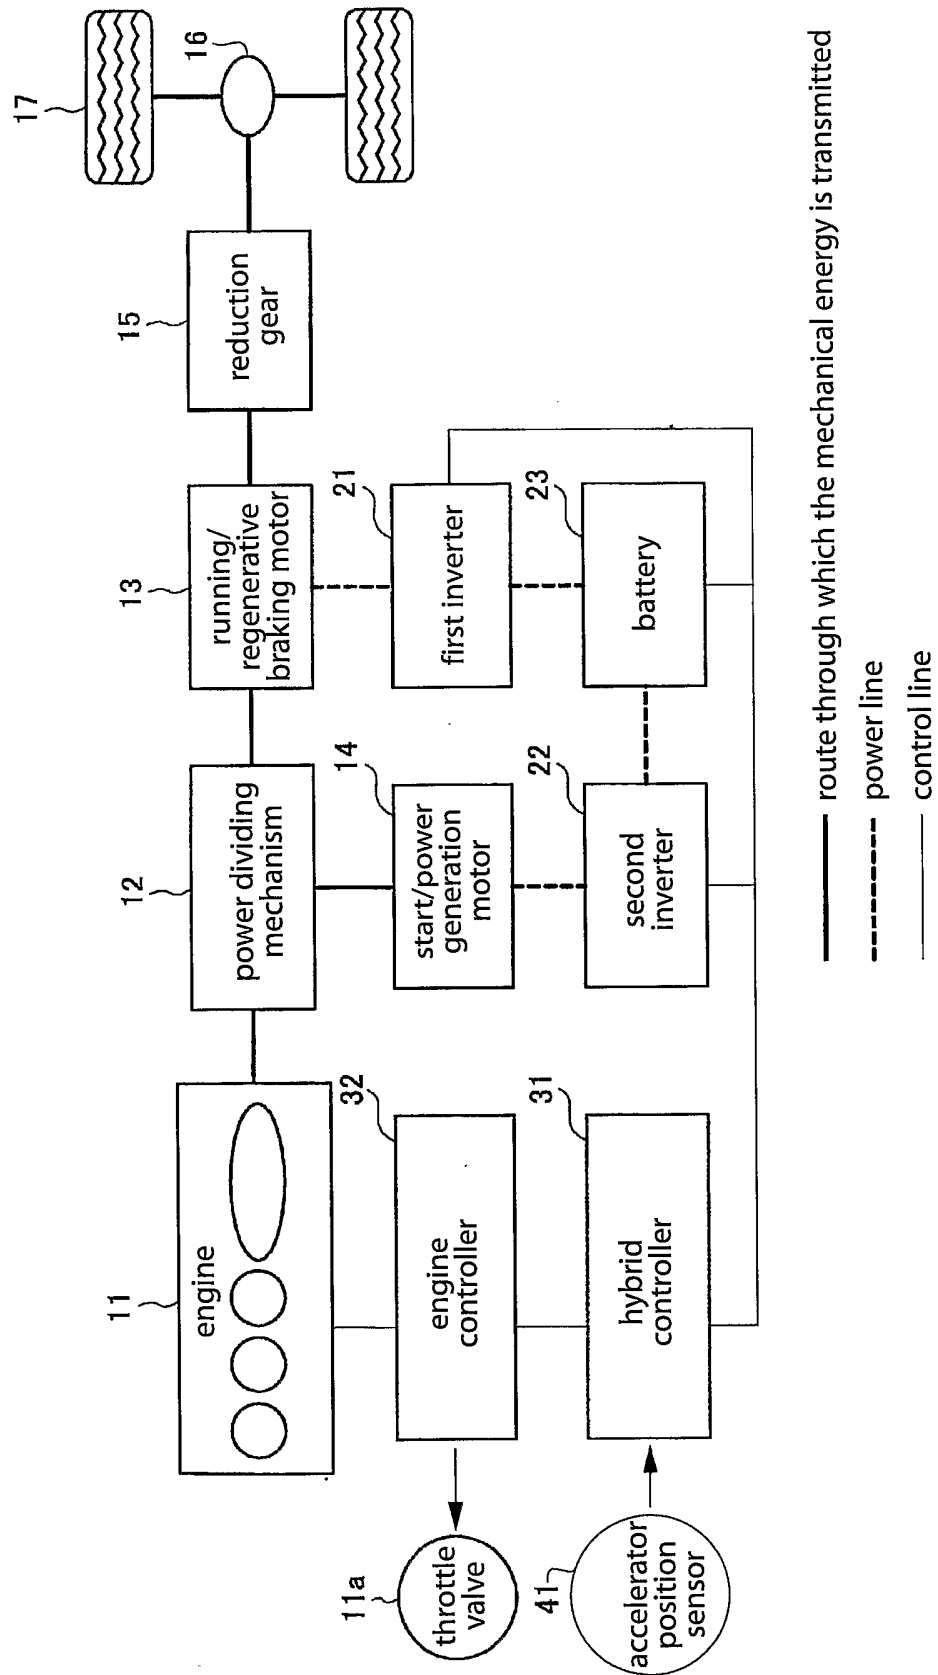


FIG. 1

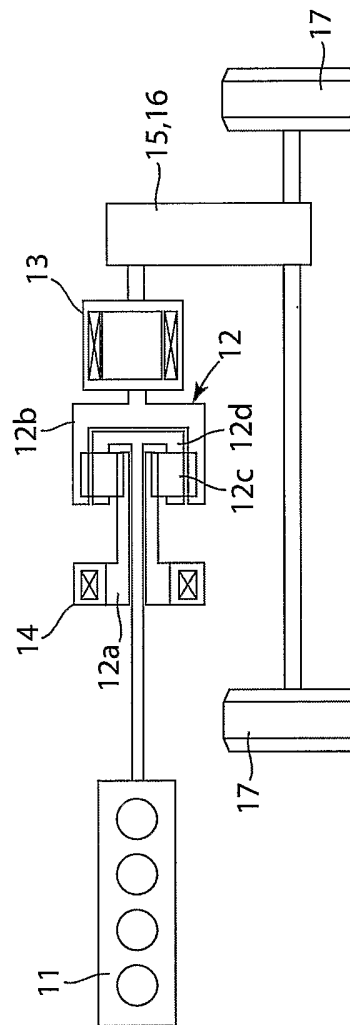


FIG. 1A

3/10

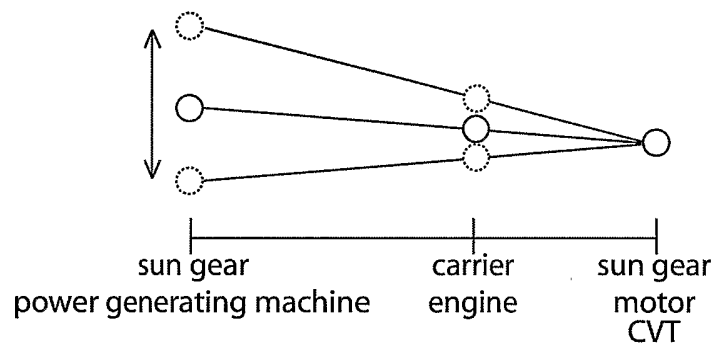


FIG. 1B

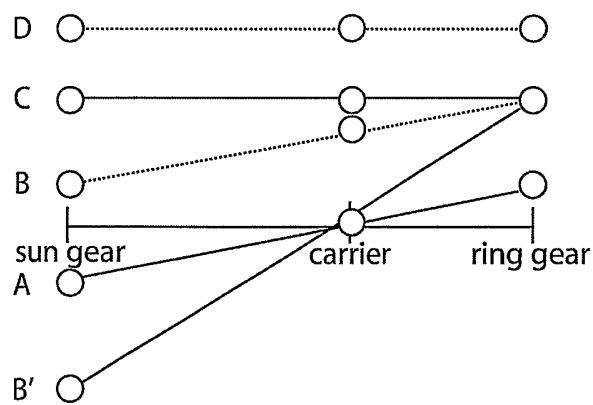


FIG. 1C

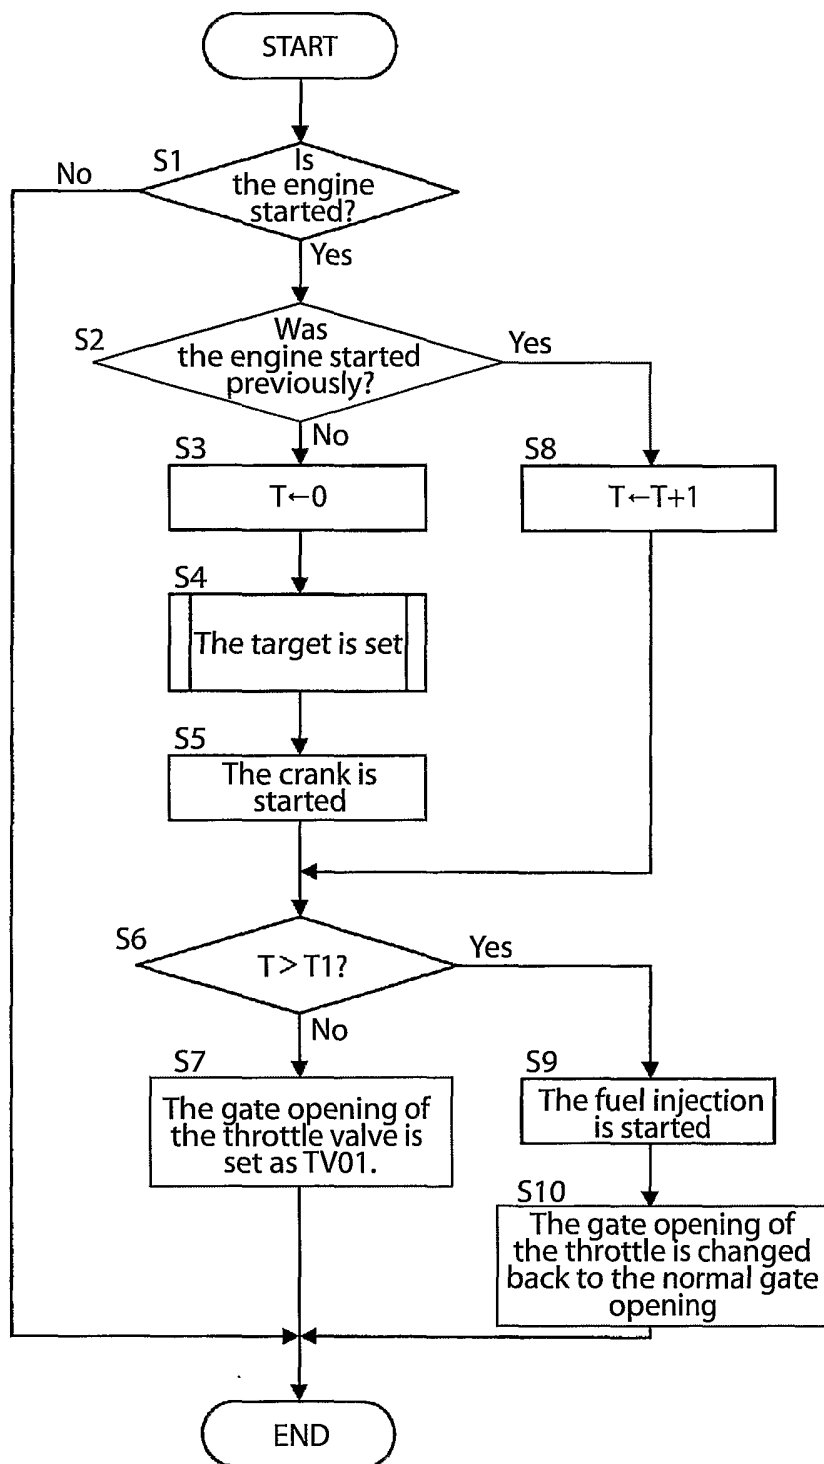


FIG. 2

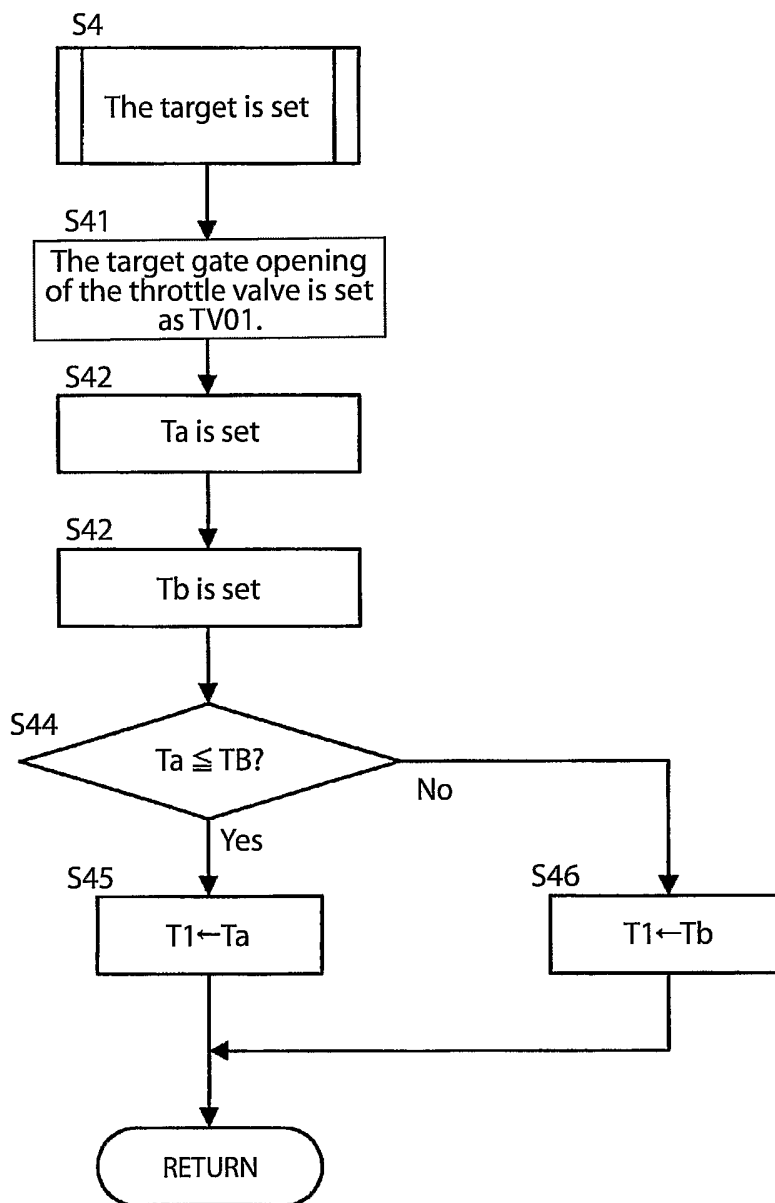


FIG. 3

6/10

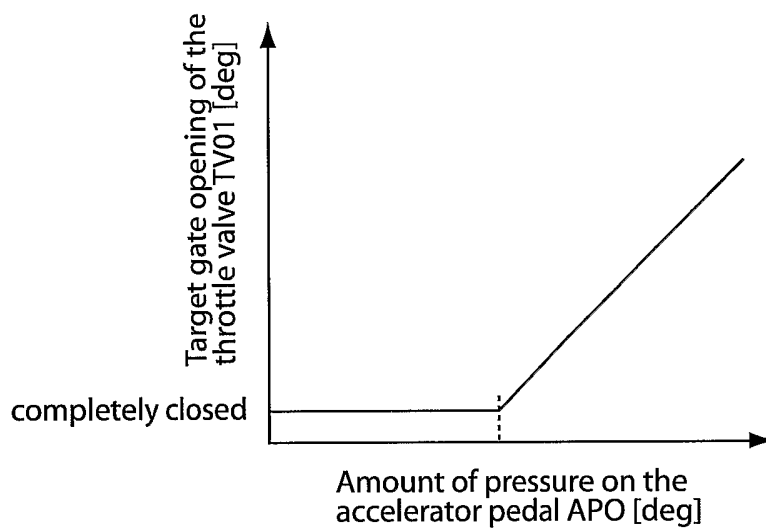


FIG. 4

7/10

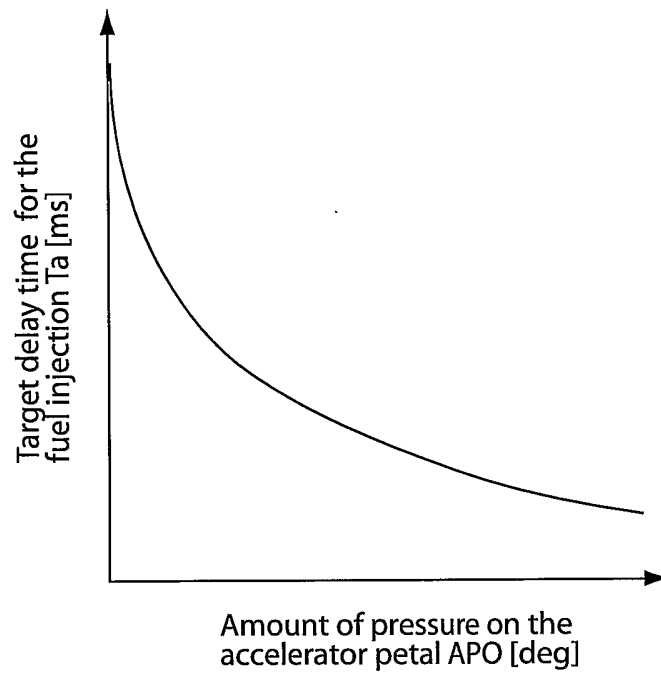


FIG. 5

8/10

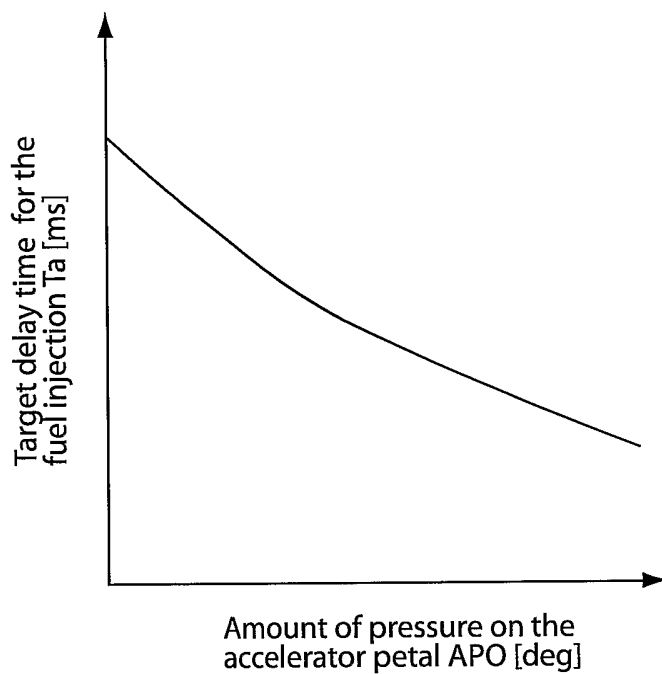


FIG. 6

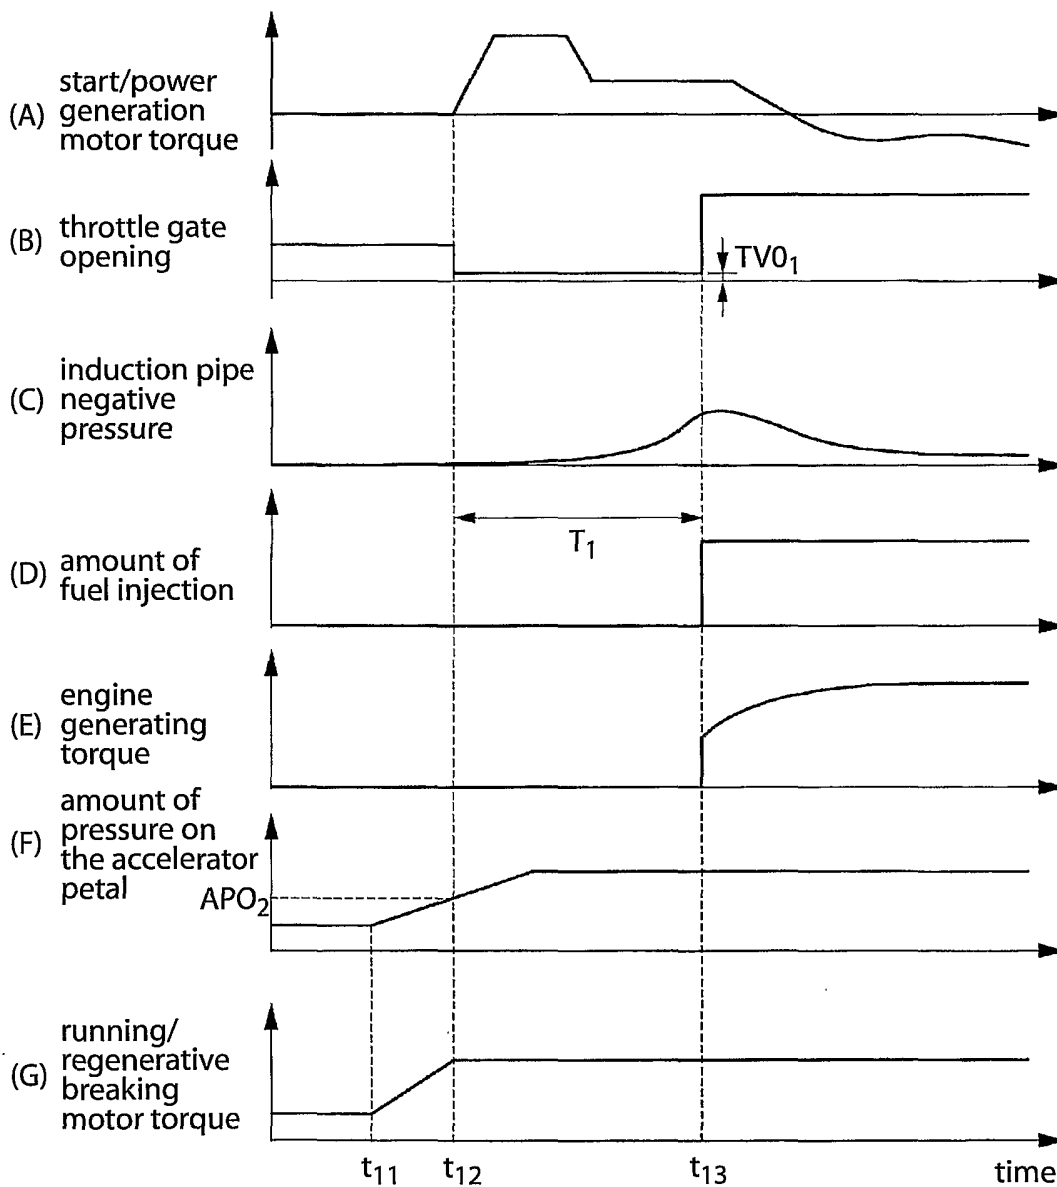


FIG. 7

10/10

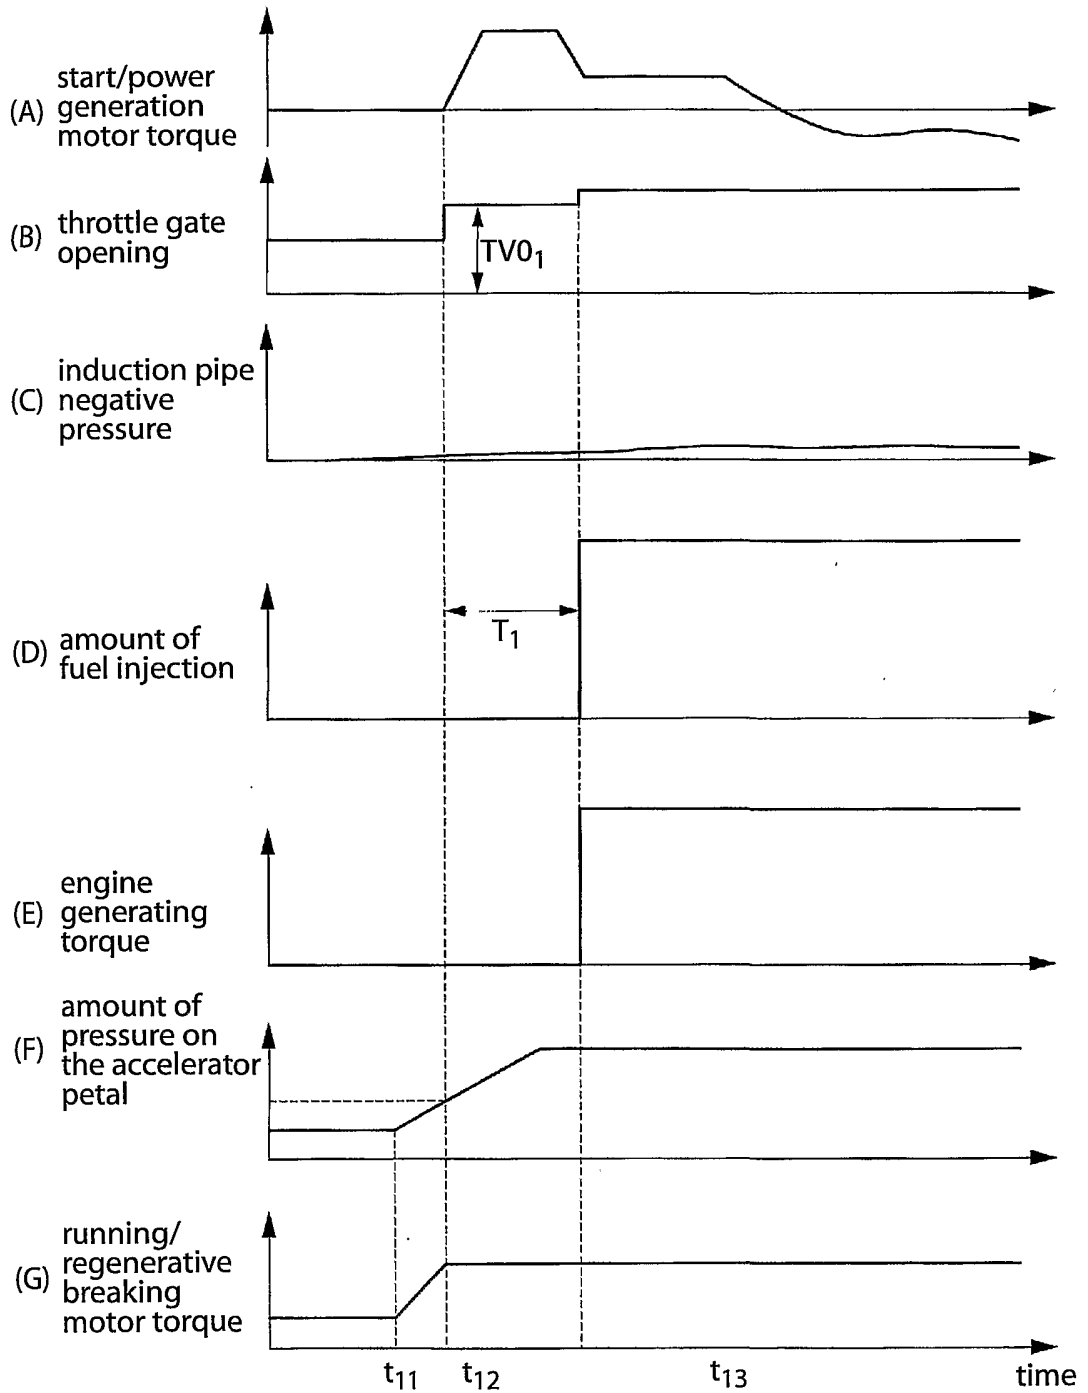


FIG. 8

INTERNATIONAL SEARCH REPORT

IB2005/003269

A. CLASSIFICATION OF SUBJECT MATTER
 B60K6/04 B60W20/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 B60K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/063002 A1 (LASSON ANDERS) 30 May 2002 (2002-05-30) the whole document	1-25
X	US 6 290 012 B1 (MATSUBARA ATSUSHI ET AL) 18 September 2001 (2001-09-18) the whole document	1, 11, 25
X	US 2002/179351 A1 (SHIMABUKURO EIJIRO ET AL) 5 December 2002 (2002-12-05) the whole document	1, 11, 25

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

10 February 2006

Date of mailing of the international search report

24/02/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Plenk, R

INTERNATIONAL SEARCH REPORT

IB2005/003269

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002063002	A1	30-05-2002	NONE
US 6290012	B1	18-09-2001	DE 10037184 A1 22-02-2001 JP 3560863 B2 02-09-2004 JP 2001045608 A 16-02-2001
US 2002179351	A1	05-12-2002	DE 10224189 A1 05-12-2002 JP 3712684 B2 02-11-2005 JP 2003048460 A 18-02-2003