



(11) **EP 1 549 581 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
10.09.2008 Bulletin 2008/37

(21) Application number: **03798940.7**

(22) Date of filing: **12.09.2003**

(51) Int Cl.:
B66B 1/20 (2006.01)

(86) International application number:
PCT/FI2003/000665

(87) International publication number:
WO 2004/031062 (15.04.2004 Gazette 2004/16)

(54) **ELEVATOR GROUP CONTROL METHOD**

GRUPPENSTEUERVERFAHREN FÜR AUFZUG

LOGIQUE DE COMMANDE DE GROUPE D'ASCENSEURS

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **01.10.2002 FI 20021746**

(43) Date of publication of application:
06.07.2005 Bulletin 2005/27

(73) Proprietor: **Kone Corporation**
00330 Helsinki (FI)

(72) Inventors:
• **SIKONEN, Marja-Liisa**
FIN-00200 Helsinki (FI)

• **YLINEN, Jari**
FIN-05800 Hyvinkää (FI)

(74) Representative: **Zipse Habersack Kritzenberger**
Patentanwälte
Wotanstraße 64
80639 München (DE)

(56) References cited:
EP-A- 0 356 731 **FI-A- 972 937**
US-A- 5 305 198 **US-A- 5 780 789**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method as defined in the preamble of claim 1 for controlling the elevators in an elevator group.

[0002] The invention relates to an elevator group control method in which destination floor call input is used.

[0003] Prior art is described in EP patent specification 356731 (B66B 1/20), which discloses an elevator group control system using immediate allocation of destination calls, wherein, immediately after the input of a call, the operating costs corresponding to the waiting times of passengers are computed merely for the input floor and the destination floor of the new call. After this, a comparison of these costs is performed, whereupon the call is assigned to the elevator with the smallest operating costs.

[0004] Prior art is also described in FI application document 972937 (B66B 1/20), which discloses an elevator group control system in which the control of the elevators is optimized on the basis of the traffic situation, i.e. the currently prevailing type and intensity of traffic. The prevailing traffic situation is identified and the elevator group is controlled on the basis of a predetermined so-called expert rule corresponding to the aforesaid traffic situation.

[0005] A problem with solutions according to the present state of the art using normal control and zoning for controlling the elevators in an elevator group is that, in quiet traffic conditions, congestion occurs in the elevator lobby when optimization is exclusively applied to the transportation capacity or the traveling times. To provide room for the passengers in the elevator lobby, it would be necessary to build a larger elevator lobby, which again would be too expensive in large buildings.

[0006] Another source of problems is the fact that, when normal control is used in elevator group control, empty elevators often pass by a floor where passengers are waiting for an elevator, which is annoying to the waiting passengers. This is a problem especially in the case of elevators with glass walls, because passengers waiting in the lobby can see the empty elevators passing by.

[0007] The US 5,305,198 discloses an allocation method where the operating costs of allocation solution is established wherein the cost function includes different cost factors e.g. riding time and waiting time of the passengers. These individual cost factors can be weighted to adapt the function profile of the elevator to a demanded function profile.

[0008] The object of the present invention is to overcome the drawbacks encountered in the above-mentioned prior art.

[0009] A specific object of the invention is to reduce waiting times in an elevator lobby under quiet traffic intensity conditions of an elevator group. Congestion of the elevator lobby is thus avoided and the need to build a larger elevator lobby for the waiting passengers is obviated. In addition, the present invention aims at reducing

the lengths of waiting queues in the elevator lobby.

[0010] For example, by using the elevator group control method of the present invention, the queues during quiet traffic will be of the same order as when a conventional, normal and continuous allocation method is used, while in an intensive up-peak traffic situation the transportation capacity of the elevator group will exceed the capacity of an elevator group control system using a conventional, normal and continuous allocation method by about 70 - 100 %.

[0011] In precise terms, the method of the invention for the control of the elevators in an elevator group is characterized by what is disclosed in the characterization part of claim 1. The features of some preferred embodiments of the invention are disclosed in the subclaims.

[0012] As compared with prior art, the method of the invention provides significant advantages.

[0013] The most important advantage achieved by the present invention is that the Method significantly improves passenger service and reduces passenger waiting times in the entrance lobby. In particular, the method of the invention reduces passenger waiting times in the entrance lobby of the elevator group when the traffic intensity for the elevator group is low. Therefore, the queues of passengers waiting for elevators in the elevator lobby are significantly shortened during quiet traffic conditions.

[0014] According to the invention, zoning is applied to destination floor calls issued from the lobby, and when the zone limits are taken from traffic forecasts, dynamic zoning is employed in the elevator group control during busy traffic. It is further possible that dynamic zoning with zone limits taken from traffic forecasts is used in the optimization in the elevator group control during busy traffic when equal numbers of people leave the elevator in each zone. Further according to an embodiment of the invention one or more of the elevators in the aforesaid elevator group are used to serve two or more zones depending on the transportation need.

[0015] In busy traffic conditions, the present invention affords the advantage of increasing the passenger transportation capacity of the elevator group.

[0016] The present invention concerns a method for controlling the elevators in an elevator group when destination floor call input is used and the traffic within the elevator group is to be optimized. According to the most preferred embodiment of the present invention, based on traffic intensity and traffic type, a cost function is optimized by changing the number of cost criteria from one to several and back and weighting the criteria in different ways in the aforesaid cost function.

[0017] According to a second embodiment of the present invention, one or more of the following cost criteria of the cost function to be optimized are optimized: waiting time of passengers, traveling time of passengers, energy consumption, car load factor, transportation capacity and time of arrival of the elevator at floors where passengers are waiting. This optimization method utiliz-

ing several optimization criteria to be optimized in the cost function is more generally called multiobjective optimization, which allows considerably better results to be achieved than when only one optimization objective is used in the cost function.

[0018] Further, according to a preferred embodiment of the invention, the cost criteria of the aforesaid cost function to be optimized are weighted by different coefficients depending on traffic intensity.

[0019] In addition, in a preferred embodiment of the invention, it is possible that, in quiet traffic conditions, only one of the cost criteria of the aforesaid cost function to be optimized is optimized, which criterion, according to a preferred embodiment of the invention, is the waiting time of passengers.

[0020] Further according to the method of the present invention, the criteria for the aforesaid quantity to be optimized are changed in the cost function in a manner such that, in low traffic intensity conditions, the waiting time is optimized, while in a more intensive traffic situation the traveling time is optimized, the latter being equal to the passenger waiting time plus the time the passenger stays onboard the elevator.

[0021] Further according to an embodiment of the invention, the cost criteria of the aforesaid quantity to be optimized are changed in the aforesaid cost function in a manner such that, when the traffic grows more intensive, the weighted cost function is optimized so that the weighting of the waiting time decreases while the weighting of the traveling time increases in the aforesaid cost function.

[0022] According to the invention, in the aforesaid elevator group, using a destination floor call input device the one of the elevators in the elevator group allocated for each passenger is indicated by the group control system of the elevator group.

[0023] In the following, the invention will be described in detail with reference to the attached drawings wherein

Fig. 1 represents the method of the invention in diagrammatic form,

Fig. 2A and 2B visualize two different embodiments according to the present invention when dynamic zoning is used for optimizing the passenger flow carried by an elevator group in a building,

Fig. 3 shows average waiting times in an up-peak traffic situation in an elevator group in the cases of dynamic zoning, multiobjective optimization and destination-multiobjective optimization.

[0024] The diagram in Fig. 1 visualizes the method of the invention, wherein the input of calls to the elevators in the elevator group is implemented using destination floor call input and the traffic within the elevator group is optimized using as a control method either multiobjective optimization or dynamic zoning, depending on the inten-

sity and type of the traffic. The elevator group is controlled by a computer configured for this purpose.

[0025] Information for use by the group control system of the elevator group is obtained from traffic forecasts regarding the current traffic type and intensity. In forecast statistics, information is collected e.g. from car load weighing devices and/or light cells and/or destination floor call buttons, which can be utilized expressly in connection with destination control. From destination call buttons, preferably information representing traffic arrival times and passengers' floors of arrival and departure is obtained. Thus, the elevator group control system has information available regarding the passengers' floors of destination and departure. Likewise, the car load weighing device and light cells can be used to measure other values descriptive of the traffic, such as movements of people. In this case, the elevator group control system has information available regarding passengers entering the elevator and passengers leaving the elevator as well as the load of the elevators and the traveling directions of the passengers on the elevators. In addition, the energy consumed by the elevators can be measured. The aforesaid traffic type of the elevator group has four categories: low traffic, normal traffic, busy traffic and intensive traffic.

[0026] On the basis of the above-described information, the currently prevailing traffic type and traffic intensity are determined for the elevator group control system. When multiobjective optimization is utilized in the control, the cost factors to be used in the cost function in each case as well as suitable weightings for them can be selected using the aforesaid traffic type and intensity data.

[0027] As an inventive step in the method according to the present invention, the cost function is optimized according to traffic intensity by changing the number of cost functions from one to several and back and weighting them in different ways in the aforesaid cost function.

[0028] In the method of the invention, the cost factors of the cost function to be optimized include one or more of the following: waiting time of passengers, traveling time of passengers, energy consumption, car load factor, transportation capacity, elevator arrival time at floors where passengers are waiting.

[0029] Likewise on the basis of information available to the elevator group control system, the traffic type is determined. When it is established that the traffic type prevailing in the elevator group is intensive traffic, dynamic zoning is adopted as an optimization method in the optimization process. When a low or normal traffic type prevails, the aforesaid multiobjective optimization method is used. After identifying the traffic type and making a decision regarding the control, the elevator group control system carries out elevator group control actions to control the elevators in a manner as optimal as possible.

[0030] When dynamic zoning is adopted in the group control of the elevator group in a busy traffic situation, the zone limits are obtained from traffic forecasts. Zoning

is implemented for destination floor calls issued from the elevator lobby. Likewise, zoning can be activated when equal numbers of passengers leave the elevator in each zone.

[0031] According to an embodiment of the invention, dynamic zoning is used for optimizing the passenger flow of the elevator group in the group control of the elevator group in a busy traffic situation so that passengers entering from the entrance floor are assigned to zones comprising adaptive zone limits when equal numbers of passengers leave the elevator in each zone.

[0032] According to another embodiment, dynamic zoning is used for optimizing the passenger flow of the elevator group in the group control of the elevator group in a busy traffic situation so that passengers entering from congested floors are assigned to zones comprising adaptive zone limits when equal numbers of passengers leave the elevator in each zone.

[0033] One of the basic ideas in the method described above is that in low traffic conditions the waiting times are optimized and in more intensive, i.e. normal traffic conditions passengers' traveling times are optimized, while in busy traffic conditions dynamic zoning is used. When the elevator group is controlled according to this method, the queues during low traffic will be of the same order as when normal allocation methods are used, while in a busy traffic situation the transportation capacity of the elevator group is increased by about 70 % over the group control of an elevator group using normal allocation methods.

[0034] Fig. 2A visualizes an embodiment of the invention when dynamic zoning is used for optimizing the passenger flow handled by an elevator group in a building. When zoning is implemented for destination floor calls issued from the lobby, i.e. from the entrance floor, and when the zone limits are taken from traffic forecasts, dynamic zoning is used in the elevator group control for optimizing the passenger flow in the elevator group in a busy traffic situation when the traffic intensity of the passenger flow exceeds a given preset limit value.

[0035] In the situation illustrated in Fig. 2A, dynamic zoning is used in the elevator group control in the building for optimizing the passenger flow in the elevator group in a busy traffic situation so that passengers entering from the entrance floor are assigned to zones comprising adaptive zone limits v_r when equal numbers of passengers leave the elevator in each zone. In the example presented in the figure, 40 passengers enter the elevator group from the entrance floor and their destination floors are distributed equally between two different zones (zone 1 & zone 2). In other words, equal numbers of passengers leave the elevator in each zone (zone 1 & zone 2), although the aforesaid zones (zone 1 & zone 2) comprise different numbers of floors, while the number of passengers leaving the elevator at these floors varies according to the traffic situation determined by the destination floor calls.

[0036] The zone limits v_r of the aforesaid zones (zone

1 & zone 2) are distributed adaptively so that the zone limits v_r vary in the building, allowing floor-specific optimization of the passenger traffic in the elevator group of the building. This enables the elevators of the elevator group to serve the most congested entrance floors in an optimal way in busy traffic conditions. These aforesaid zone limits v_r are obtained from the traffic forecasts.

[0037] In the situation illustrated in Fig. 2B, in which passengers enter the elevator group from certain congested floors in the building, dynamic zoning is used in the elevator group control for optimizing the passenger flow in the elevator group in a busy traffic situation so that the passengers entering from said certain congested floors are assigned to zones comprising adaptive zone limits v_r when equal numbers of passengers leave the elevator in each zone.

[0038] This figure visualizes a traffic situation where, in a zoned building, there are three entrance floors with heaviest traffic, with ten (10) passengers on two of said floors and (20) passengers on one of them waiting to enter the elevator group. The passengers of the elevator group are distributed equally between two zones (zone 1 & zone 2) formed from the passengers' destination floors so that equal numbers (20) of passengers leave the elevator in each zone (zone 1 & zone 2).

[0039] In the situations presented in the aforesaid figures 2A and 2B, one or more of the elevators in the elevator group are used to serve two or more zones, depending on the transportation need.

[0040] Fig. 3 shows the average waiting times in up-peak traffic conditions in the elevator group as a function of traffic intensity when the group control method used to control the elevator group is dynamic zoning or multi-objective optimization or traditional control based on up/down call buttons. The results presented in the figure have been obtained by utilizing an elevator traffic simulator in a building.

[0041] From this figure we can see that, as elevator group control methods, both dynamic zoning and multi-objective optimization are of equal efficiency in busy traffic conditions from a certain traffic intensity limit value upwards. At a certain traffic intensity value, equal waiting times are achieved by both elevator group control methods.

[0042] From Fig. 3 it can also be seen that, when the traffic intensity in the elevator group is below the above-mentioned certain traffic intensity value, the waiting times of the passengers of the elevator group differ from each other when dynamic zoning or multiobjective optimization is used as the group control method of the elevator group. Multiobjective optimization here yields considerably shorter passenger waiting times as compared with mere dynamic zoning. In other words, at low traffic intensity values, when multiobjective optimization is used as the group control method of the elevator group, considerably shorter passenger waiting times are achieved as compared with dynamic zoning. Comparing traditional control based on up/down buttons to multiobjective opti-

mization at low traffic intensity values, the waiting times are equally short. In traditional control, the waiting times start increasing steeply when the transportation capacity limit of the control system is exceeded. Via multiobjective optimization, in low traffic conditions short waiting times are obtained, but also a much greater transportation capacity is achieved than with traditional control. Thus, based on the above comparison, multiobjective optimization allows shorter waiting times to be achieved at all traffic intensity values, thereby also significantly shortening the queues of passengers in elevator lobbies.

[0043] In the foregoing, the invention has been described by way of example with reference to the attached drawings while different embodiments of the invention are possible in the scope of the inventive concept defined in the claims.

Claims

1. Method for controlling the elevators in an elevator group whereby destination floor call input is used and the traffic within the elevator group is to be optimized, wherein, based on traffic intensity and traffic type, a cost function is optimized by changing the number of cost criteria from one to several and back and weighting the criteria in different ways in the aforesaid cost function, **characterized in**

- **that** when the traffic intensity of the passenger flow exceeds a given present limit value, the passengers are assigned to zones (zone 1, zone 2) having adaptive zone limits (vr), so that the passengers are distributed equally between the zones.

2. Method according to claim 1, **characterized in that** the zone limits (vr) are obtained from traffic forecasts.
3. Method according to claim 1 or 2, **characterized in that**, one or more of the following cost criteria of the aforesaid cost function to be optimized are optimized: waiting time of passengers, travelling time of passengers, energy consumption, car load factor, transportation capacity and time of arrival of the elevator at floors where passengers are waiting.
4. Method according to claim 3, **characterized in that** the cost criteria of the aforesaid cost function to be optimized are weighted by different coefficients depending on traffic intensity.
5. Method according to any one of the preceding claims, **characterized in that**, in quiet traffic conditions, only one of the cost criteria of the aforesaid cost function to be optimized is optimized.
6. Method according to claim 5, **characterized in that**,

in quiet traffic conditions, of the cost criteria of the aforesaid cost function to be optimized, the waiting time of passengers is optimized.

7. Method according to any one of the preceding claims, **characterized in that** the criteria for the aforesaid quantity to be optimized are changed in the aforesaid cost function in a manner such that, in low traffic intensity conditions, the waiting time is optimized, while a more intensive traffic situation the travelling time is optimized.
8. Method according to any one of the preceding claims, **characterized in that** the cost criteria of the aforesaid quantity to be optimized are changed in the aforesaid cost function in a manner such that, when the traffic grows more intensive, the weighted cost function is optimized so that the weighting of the waiting time decreases while the weighting of the travelling time increases in the aforesaid cost function.
9. Method according to any one of the preceding claims, **characterized in that** one or more of the elevators in the aforesaid elevator group are used to serve two or more zones (zone 1, zone 2) according to the transportation need.
10. Method according to any one of the preceding claims, **characterized in that** in the aforesaid elevator group, using a destination floor call input device, the one of the elevators in the elevator group allocated for each passenger is indicated by the group control system of the elevator group.

Patentansprüche

1. Verfahren zum Steuern der Aufzüge in einer Aufzugsgruppe, wobei eine Zielrufeingabe verwendet wird und der Verkehr innerhalb der Gruppe zu optimieren ist, wobei basierend auf der Verkehrsstärke und dem Verkehrstyp eine Kostenfunktion optimiert wird, indem die Anzahl der Kostenkriterien von einem zu mehreren und zurück geändert wird, und indem die Kriterien auf unterschiedliche Weise in der vorstehenden Kostenfunktion gewichtet werden, **dadurch gekennzeichnet, dass** wenn die Verkehrsintensität des Passagierflusses einen gegebenen Grenzwert überschreitet, die Passagiere Zonen (Zone 1, Zone 2) zugeordnet werden, die anpassbare Zonengrenzen (vr) haben, sodass die Passagiere gleichmäßig zwischen den Zonen verteilt werden.
2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** die Zonengrenzen (vr) aus Verkehrsvorhersagen erhalten werden.

3. Verfahren nach Anspruch 1 oder 2,
dadurch gekennzeichnet, dass eine oder mehrere der folgenden Kostenkriterien der zu optimierenden Kostenfunktion optimiert werden: Wartezeit der Passagiere, Fahrzeit der Passagiere, Energieverbrauch, Kabinenbelastungsfaktor, Transportkapazität und Ankunftszeit der Aufzüge an Stockwerken, wo Passagiere warten. 5
4. Verfahren nach Anspruch 3,
dadurch gekennzeichnet, dass die Kostenkriterien der oben genannten zu optimierenden Kostenfunktion gewichtet werden durch unterschiedliche Koeffizienten in Abhängigkeit von der Verkehrsdensität. 10
5. Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet, dass bei ruhigen Verkehrsverhältnissen lediglich einer der Kostenkriterien der oben genannten zu optimierenden Kostenfunktion optimiert wird. 15
6. Verfahren nach Anspruch 5,
dadurch gekennzeichnet, dass unter ruhigen Verkehrsbedingungen die Wartezeit der Passagiere als Kostenkriterium der oben genannten zu optimierenden Kostenfunktion optimiert wird. 20
7. Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet, dass die Kriterien für die oben genannte zu optimierende Quantität geändert wird in der oben genannten Kostenfunktion in einer Weise, dass bei geringem Verkehrsaufkommen die Wartezeit optimiert wird, und bei stärkerem Verkehrsaufkommen die Fahrzeit optimiert wird. 25
8. Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet, dass die Kostenkriterien der oben genannten zu optimierenden Quantität in der oben genannten Kostenfunktion in einer Weise geändert werden, dass wenn der Verkehrsstrom intensiver wird, die gewichtete Kostenfunktion optimiert wird, sodass die Gewichtung der Wartezeit abnimmt, während die Gewichtung der Fahrzeit in der oben genannten Kostenfunktion zunimmt. 30
9. Verfahren nach einem der vorhergehenden Ansprüche,
dadurch gekennzeichnet, dass einer oder mehrere der Aufzüge in der oben genannten Aufzugsgruppe verwendet werden, um zwei oder mehr Zonen (Zone 1, Zone 2) entsprechend den Transportbedürfnissen zu bedienen. 35
10. Verfahren nach einem der vorhergehenden Ansprüche 40

che,
dadurch gekennzeichnet, dass in der vorgenannten Aufzugsgruppe unter Verwendung einer Zielfeingeabe-Einrichtung derjenige Aufzug durch das Gruppensteuerungssystem der Aufzugsgruppe angezeigt wird, der von der Aufzugsgruppe für jeden Passagier ausgewählt wurde. 45

10 Revendications

1. Logique de commande d'ascenseurs dans un groupe d'ascenseurs, la saisie d'appel de l'étage de destination étant utilisée et le trafic au sein du groupe d'ascenseur devant être optimisé, dans laquelle, basée sur l'intensité du trafic et le type de trafic, une fonction de coût est optimisée en modifiant le nombre de critères de coût de un à plusieurs et inversement et en pondérant les critères de différentes manières dans la fonction de coût susmentionnée, **caractérisée par le fait que** quand l'intensité de trafic du flux de passagers dépasse une valeur limite donnée prédéfinie, les passagers sont affectés à des zones (zone 1, zone 2) ayant des limites de zone réglables (vr) de telle sorte que les passagers sont répartis de manière égale entre les zones. 50
2. Logique selon la revendication 1, **caractérisée par le fait que** les limites de zone (vr) sont obtenues à partir de prévisions relatives au trafic. 55
3. Logique selon la revendication 1 ou 2, **caractérisée par le fait qu'un** ou plusieurs des critères de coût suivants de la fonction de coût susmentionnée devant être optimisés sont optimisés : temps d'attente des passagers, temps de déplacement des passagers, consommation d'énergie, facteur de charge de la cabine, capacité de transport et moment d'arrivée de l'ascenseur aux étages où les passagers attendent. 60
4. Logique selon la revendication 3, **caractérisée par le fait que** les critères de coût de la fonction de coût susmentionnée devant être optimisés sont pondérés par différents coefficients en fonction de l'intensité du trafic. 65
5. Logique selon l'une quelconque des revendications précédentes, **caractérisée par le fait que**, dans des conditions de trafic calmes, seul un des critères de coût de la fonction de coût susmentionnée devant être optimisé est optimisé. 70
6. Logique selon la revendication 5, **caractérisée par le fait que**, dans des conditions de trafic calmes, parmi les critères de coût de la fonc- 75

tion de coût susmentionnée devant être optimisés,
le temps d'attente des passagers est optimisé.

7. Logique selon l'une quelconque des revendications précédentes, 5
caractérisée par le fait que les critères relatifs à la quantité susmentionnée devant être optimisés sont modifiés dans la fonction de coût susmentionnée de telle manière que, dans des conditions de faible intensité de trafic, le temps d'attente est optimisé tandis que, dans une situation de trafic plus intense, le temps de déplacement est optimisé. 10

8. Logique selon l'une quelconque des revendications précédentes, 15
caractérisée par le fait que les critères de coût de la quantité susmentionnée devant être optimisés sont modifiés dans la fonction de coût susmentionnée de telle manière que, quand le trafic augmente d'intensité, la fonction de coût pondérée est optimisée de telle sorte que la pondération du temps d'attente diminue tandis que la pondération du temps de déplacement augmente dans la fonction de coût susmentionnée. 20

9. Logique selon l'une quelconque des revendications précédentes, 25
caractérisée par le fait qu'un ou plusieurs des ascenseurs dans le groupe d'ascenseurs susmentionné sont utilisés pour desservir deux zones ou plus (zone 1, zone 2) selon les besoins de transport. 30

10. Logique selon l'une quelconque des revendications précédentes, 35
caractérisée par le fait que, dans le groupe d'ascenseurs susmentionné, utilisant un appareil de saisie de l'étage de destination, l'ascenseur parmi le groupe d'ascenseur attribué à chaque passager est indiqué par le système de commande de groupe du groupe d'ascenseurs. 40

45

50

55

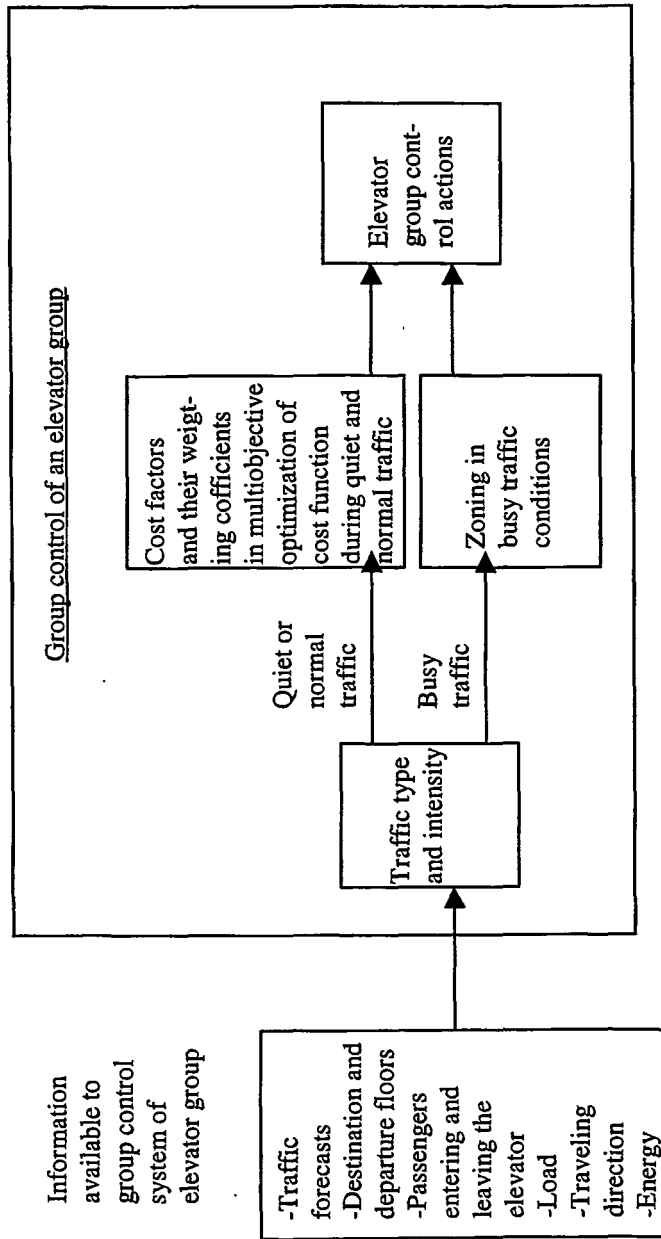


Fig. 1

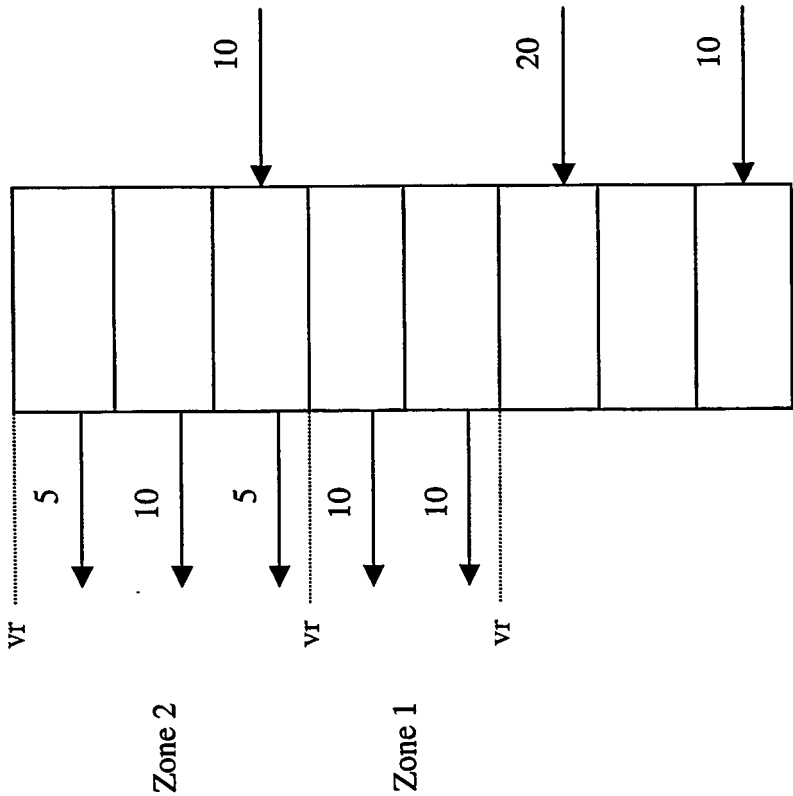


Fig. 2 A


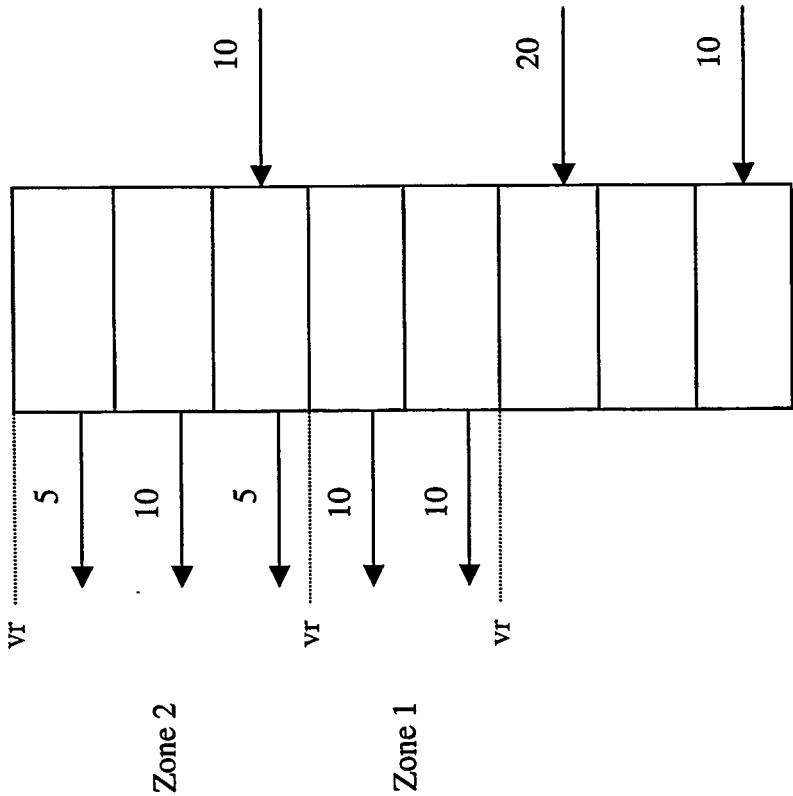


Fig. 2 B

Average waiting time during upheak

Average waiting times in up-peak conditions

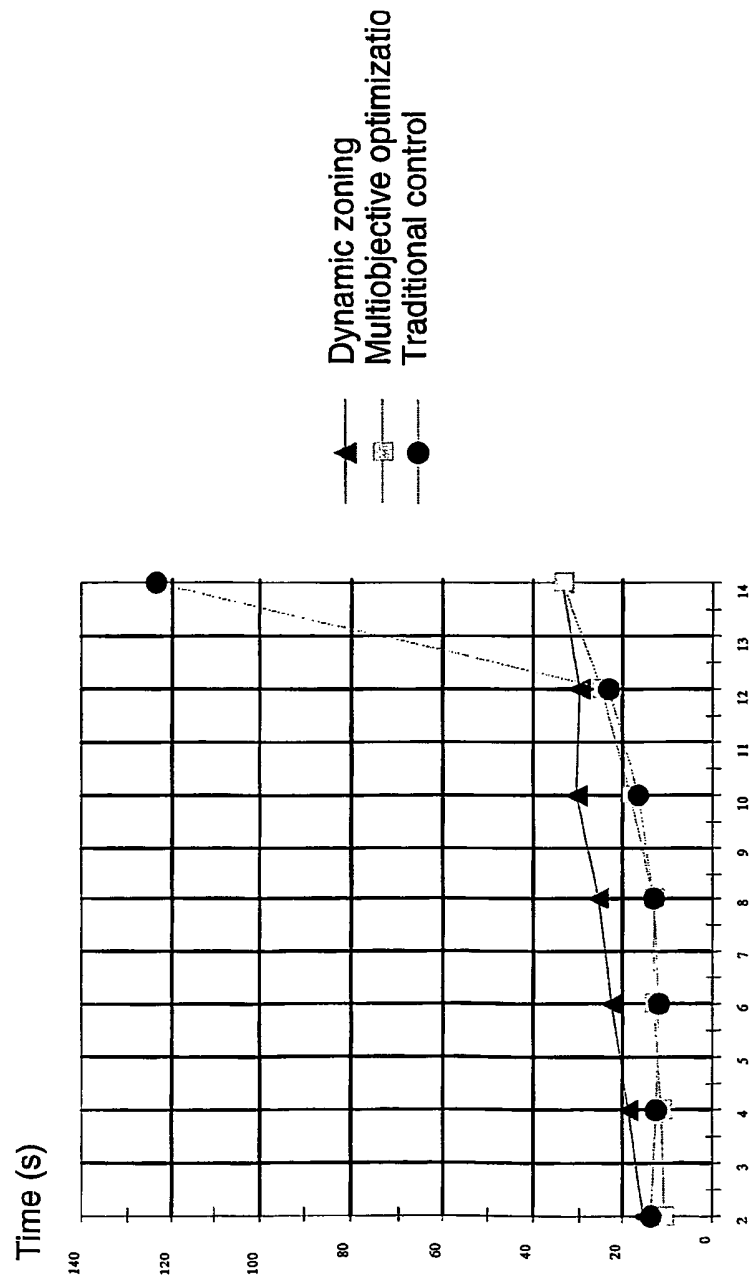

Intensity [% of the number of inhabitants in the building / 300s]

Fig. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 356731 A [0003]
- FI 972937 [0004]
- US 5305198 A [0007]