



(43) International Publication Date
13 September 2012 (13.09.2012)

(51) International Patent Classification:

C08J 7/04 (2006.01) *C08K 3/00* (2006.01)
C08J 7/06 (2006.01)

(21) International Application Number:

PCT/US2012/027957

(22) International Filing Date:

7 March 2012 (07.03.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/451,317 10 March 2011 (10.03.2011) US

(71) Applicant (for all designated States except US): **AVERY DENNISON CORPORATION** [US/US]; 150 N. Orange Grove Blvd., Pasadena, CA 91103 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHI, Ming, Kun** [US/US]; c/o Avery Dennison Corporation, 150 N. Orange Grove Blvd., Pasadena, CA 91103 (US). **LI, Kai** [CA/US]; c/o Avery Dennison Corporation, 150 N. Orange Grove Blvd., Pasadena, CA 91103 (US).

(74) Agents: **BEMBENICK, Brian, G.** et al.; Avery Dennison Corporation, 8080 Norton Parkway, 22-D, Mentor, OH 44060 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: SURFACE TREATED FILM AND/OR LAMINATE

(57) Abstract: A surface treatment for a protective plastic film and/or laminate is disclosed. Suitably, the surface treatment includes coating a major surface of the plastic film or laminate with a curable coating formulation wherein the one or more of the coating ingredients are diffused or migrated at least partially into the plastic film or plastic laminate. The migration of coating ingredients creates a gradual transition layer from the plastic film to the coating layer and leads to unique properties. Optionally, the surface treated plastic film is laminated to a release liner coated with a pressure sensitive adhesive (PSA) to form the aforementioned laminate.



WO 2012/122206 A1

SURFACE TREATED FILM AND/OR LAMINATE**Cross-Reference to Related Application**

[0001] The present application claims the benefit of U.S. Provisional Patent Application No. 61/451,317 filed March 10, 2011, which is incorporated herein by reference in its entirety.

Background of the Invention

[0002] The present inventive subject matter relates generally to the art of protective films and/or laminates. Particular relevance is found in connection with adhesive sheets useful for protecting various surfaces to which the adhesive sheets are applied, e.g., such as the surfaces of automotive bodies, consumer electronics, and accordingly the present specification makes specific reference thereto. However, it is to be appreciated that aspects of the present inventive subject matter are also equally amenable to other like applications. Relevance is also found in connection with films and/or laminates that exhibit anti-microbial properties.

[0003] Protective films and/or laminates of various types are generally known. For example, U.S. Patent No. 6,383,644 to Fuchs discloses one such multilayer sheet. Additionally, the published U.S. Patent Application of McGuire (US Publ. No. 2008/0286576 A1) also discloses a multilayer protective sheet. Both of the foregoing references are incorporated by reference herein in their entirety.

[0004] Notwithstanding prior attempts to develop protective films and/or laminates, there remains a desire for a protective film and/or laminate which performs suitably in accordance with one

or more evaluation criteria, e.g., such as: good chemical resistance, good scratch and impact resistance, non-stick and non-wetting properties, good stain resistance, and anti-fouling properties, good weather resistance, a low degree of yellowing over time, good optical clarity for see-through applications, a high degree of flexibility for conforming to non-planar surfaces, etc.

[0005] Additionally there remains a desire in the marketplace to develop a protective film and/or laminate that possess anti-microbial properties. Anti-microbial substances kill or inhibit the growth of microorganisms including bacteria, fungi, or protozoa's. Anti-microbial properties are desirable because bacterial related infections are a major source of cross-contamination. Bacteria are easily transferable from human to human and from one surface to another. Thus, hospital-related bacterial infections are estimated to be the 5th leading cause of death in the United States, after heart disease, cancer, stroke, and pneumonia or flu.

[0006] Long-lasting antimicrobial products that inhibit the growth of harmful bacteria, mold and fungi on any surface or textile for a continued period of time is needed and is currently missing from the marketplace. A protecting film having anti-microbial properties can be used to minimize the presence of harmful microbes in a variety of industries including but not limited to health care, education, sports, veterinary medicine, hospitals, consumer electronics, home appliances etc.

[0007] Accordingly, a new and/or improved protective film and/or laminate is disclosed which addresses the above-referenced problem(s) and/or others.

Summary of the Invention

[0008] In accordance with one embodiment, a surface treated film having anti-microbial properties.

[0009] In accordance with another embodiment, a method for constructing protective film or laminate with a coating composition comprising an anti-microbial agent is provided.

[0010] Numerous advantages and benefits of the inventive subject matter disclosed herein will become apparent to those of ordinary skill in the art upon reading and understanding the present specification.

Brief Description of the Drawings

[0011] The inventive subject matter disclosed herein may take form in various components and arrangements of components, and in various steps and arrangements of steps. The drawings are only for purposes of illustrating preferred embodiments and are not to be construed as limiting. Further, it is to be appreciated that the drawings may not be to scale.

[0012] FIGURE 1 is a diagrammatic illustration showing an exemplary construction of a surface treated film and/or laminate in accordance with aspects of the present inventive subject matter.

[0013] FIGURE 2 is a graph showing measured 60 degree gloss values for each of several tested sample films treated with exemplary treatment solutions prepared in accordance with the present inventive subject matter and comparative examples.

[0014] FIGURE 3 is a graph showing measured b values for each of several tested sample films treated with exemplary treatment solutions prepared in accordance with the present inventive subject matter and comparative examples after exposure to a used motor oil test.

[0015] FIGURE 4 is a graph showing measured b values for each of several tested sample films treated with exemplary treatment solutions prepared in accordance with the present inventive subject matter and comparative examples after exposure to a used motor oil test.

[0016] FIGURE 5 is a graph showing measured tensile stress at 100% elongation for each of several tested sample films treated with exemplary treatment solutions prepared in accordance with the present inventive subject matter and comparative examples.

[0017] FIGURE 6 is a graph showing measured delta b and delta E values for each of several tested sample films treated with exemplary treatment solutions prepared in accordance with the present inventive subject matter and comparative examples after exposure to weatherometer testing.

[0018] FIGURE 7 is a graph showing the pencil hardness and stretchability of different plastic films with and without a hard coat.

[0019] FIGURE 8 is a graph showing measured b values for each of several tested sample films treated with exemplary treatment solutions prepared in accordance with the present inventive subject matter and comparative examples after exposure to a used motor oil test.

[0020] FIGURE 9 is a graph showing measured tensile stress at 100% elongation for each of several tested sample films treated with exemplary treatment solutions prepared in accordance with the present inventive subject matter and comparative examples.

[0021] FIGURE 10 is a photomicrograph showing a comparative sample film treated with an exemplary treatment solution prepared in accordance with the present inventive subject matter.

[0022] FIGURE 11 is a photomicrograph showing an exemplary sample film treated with an exemplary treatment solution prepared in accordance with the present inventive subject matter.

[0023] FIGURE 12 is a graph showing the relative intensity of a spectral analysis peak associated with an exemplary treatment solution prepared in accordance with the present inventive subject matter as a function of depth into an exemplary film receiving the treatment.

Detailed Description of the Embodiment(s)

[0024] For clarity and simplicity, the present specification shall refer to structural and/or functional elements, relevant standards and/or protocols, and other components that are commonly known in the art without further detailed explanation as to their configuration or operation except to

the extent they have been modified or altered in accordance with and/or to accommodate the preferred embodiment(s) presented herein.

[0025] In general, the present specification discloses a new protective film or laminate that has at least one major surface of a plastic substrate treated with a suitable material possessing an anti-microbial agent which enhances the properties of the protective film or laminate while retaining a sufficient portion of the pristine plastic substrate property, such as flexibility and/or extensibility and preventing and/or inhibiting the growth of particular microorganisms. In particular, the surface treatment proposed herein is distinguished from an otherwise conventional top coating in that a substantial portion of the material having at least one anti-microbial agent applied during the surface treatment may ultimately remain extending above or sitting on top or proud of the upper surface of the underlying film or laminate so treated. That is to say, rather than forming a largely distinct layer with a well defined boundary on top of the underlying film or laminate, the coating material applied during the surface treatment significantly penetrates the matrix of the underlying film/laminate and/or fills valleys or depressions on the rough surface of the underlying film/laminate. The coating material used in the surface treatment generally includes a solvent based coating solution or dispersion. A coating solution refers to a clear liquid where the coating ingredients are either totally soluble in an organic solvent or water, or their size is smaller than the visible wavelength of light and do not scatter light. Nano-sized particles generally fall into this latter category. A coating dispersion refers to a coating liquid that appears cloudy either because the coating ingredients are not totally soluble in an organic solvent or water, or their size is larger than the visible wavelength of light and scatter light.

[0026] In a preferred embodiment of the present invention, the surface treatment comprises at least one anti-microbial agent. During the treatment process, the at least one anti-microbial agents may partially diffuse into the treated substrate. The present invention also contemplates that the anti-microbial agent may not diffuse into the treated substrate and ultimately

may remain extending above or sitting on top or proud of the upper surface of the underlying film or laminate so treated. A wide range of anti-microbial agents are suitable for the present invention include penicillin, tetracycline, anti-fungal drugs, anti-parasitic medications, and a wide range of chemical and natural compounds. Anti-microbial agents of the present invention can be used to prevent and/or inhibit the continual growth of microorganisms including but not limited to *Campylobacter jejuni*, *Salmonella enteritidis*, *Escherichia coli*, *Staphylococcus aureus* and *Listeria monocytogenes*. Limiting the growth of such bacteria would be beneficial to the food industry in order to prevent illnesses and contaminated food associated with such bacteria.

[0027] In one embodiment of the present invention, the surface treatment comprises more than one anti-microbial agent in order to prevent and/or inhibit the growth of more than one type of microorganism.

[0028] In another embodiment the antimicrobial agent may be an additive that can be added to the surface treatment. By utilizing an antimicrobial as an additive this allows for the utilization of various surface treatments that are already pre-existing. Therefore the present invention contemplates that any existing surface treatment can be altered to comprise an anti-microbial agent. The present invention contemplates that if an anti-microbial agent is utilized as an additive it can be added to the surface treatment before or after the substrate has been treated with the surface treatment.

[0029] In another embodiment, the antimicrobial agent is in a solution and the solution itself serves as the surface treatment.

[0030] In practice, the solvent operates to expand the matrix of the underlying film or substrate material to facilitate penetration of one or more coating ingredient(s) into the film or substrate. Suitably, the solvent is selected to be compatible with the chosen film or substrate material in this fashion, and the coating materials are likewise chosen, e.g., based on physical size and/or other

appropriate properties, to achieve the desired penetration in view of the film material and selected solvent. Preferably, in addition to the solvent, the coating materials used in the surface treatment include one or more of the following curable ingredients: monomer and oligomer, such as radiation curable (electron beam, gamma irradiation or ultraviolet including both free radical or cationic) or thermally curable monomer and oligomer, additives such as surfactant and defoamer, and small particles of organic compound, inorganic compound or hybrid organic-inorganic compound. These materials are small in size and easily penetrate into the matrix of the plastic film or laminate. Preferably the size of the monomer or oligomer or particle is less than 10 μ m, more preferably less than 5 μ m, and even more preferably less than 1 μ m.

[0031] In one particularly suitable embodiment, the coating material used in the surface treatment comprises POSS (Polyhedral Oligomeric Silsesquioxanes) or other like nano-structured organic-inorganic hybrid material. For example, suitable silsesquioxane derivatives are disclosed in U.S. Patent No. 7,235,619 issued June 26, 2007 to Morimoto, et al. and U.S. Patent No. 7,053,167 issued May 30, 2006 to Ito, et al., both of which are incorporated herein by reference in their entirety. POSS materials with various functionalities are available from Hybrid Plastics Inc. (Hattiesburg, MS).

[0032] In one embodiment, the surface treatment proposed herein comprises a POSS material having at least one anti-microbial agent applied to the underlying substrate or film in the form of a solvent based, UV (ultraviolet) curable solution. More specifically, in accordance with a first example treatment material, this solution contains a silsesquioxane compound dissolved in MIBK (Methyl Isobutyl Ketone) solvent with a 40% solid loading. For example, one such suitable solution is made by Chisso Corporation (Osaka, Japan) and is sold under the trade name Sila-MaxTM. A surface treated with such a solution exhibits a low surface energy (e.g., approximately 21.8 mN/cm), which leads to good chemical resistance while providing added properties such as non-stick and non-wetting properties, and anti-fouling properties and a low coefficient of friction which also contributes to good

scratch and impact resistance. The first example treatment material possesses excellent optical clarity, e.g., with less than approximately 1% haze, which is advantageous for applications that call for see-through properties. For example, when coated to a film with low porosity such as polyester or polycarbonate, the first example treatment material also possesses a high surface hardness (e.g., around 3H pencil hardness), which makes it highly impact resistant and well suited for surface protection, e.g., of automotive bodies, consumer electronics, and other products.

[0033] The present invention also contemplates that a surface treated with the solution of the present invention wherein the solution has an anti-microbial agent may exhibit low surface energy.

[0034] When a suitable, extensible polymeric film is surface treated as described herein (e.g., using the first example treatment material), such as by gravure coating, spray, flexography, slot die coating, roll coating or other suitable methods, the film or the laminate largely retains significant extensibility with improved optical clarity due to smoothing of the film surface by the treatment materials. Additionally, dramatic improvement is observed in chemical resistance, e.g., such as the resistance to used motor oil and to chemicals used for automotive body cleaning. These properties make the treated film and/or laminate very useful for applications in which the film or laminate is applied to objects having curved surfaces and/or other complex geometries (i.e., non-planar surfaces). For example, when the surface treated film or laminate is used as a protective sheet applied to the surface of an automobile body (e.g., to protect the paint or finish thereon against scratches and staining), a more pleasing appearance and/or other benefits are generally achieved when the film or laminate conforms to the contour of the automobile body. Of course, in alternate embodiment, other coating materials, e.g., as described herein, may also optionally be used for the surface treatment.

[0035] Optionally, the surface treatment described herein can be applied to any suitable substrates, e.g., including both rigid and flexible or extensible substrates. Examples substrates include but are not limited to plastics, glass, metal, ceramics, woods, composites, etc. Nevertheless, for

application as a protective sheet to be applied to complex geometries, curved surfaces and/or other application which generally benefit from high conformability (e.g., such as a protective sheet for an automotive body surface), a flexible plastic film substrate is advantageous. Such plastic films include but are not limited to, e.g., polyurethanes, polyvinyl chloride, polyolefins, polyesters, polyamides, polyacrylates, polysilicones, etc. In one embodiment, a polyurethane (PU) film of about 150 to 200 μ m in thickness is particularly suitable for such applications. For example, polyurethane films made by Deerfield Urethane, Inc. (Whately, Massachusetts) and sold under the trade name Dureflex® (referred to herein as the first sample or exemplary film material) and polyurethane films made by Argotec, Inc. (Greenfield, Massachusetts) and sold under the trade name ARGOTHANE® (referred to herein as the second sample or exemplary film material), have been found acceptable. Notably, the elastic property of the polyurethane film also provides additional cushion that benefits the impact resistance of the final film or laminate.

[0036] FIGURE 1 illustrates a suitable construction in accordance with aspects of the present inventive subject matter. In the illustrated embodiment, a plastic film 10 is laminated to a release liner 12 coated with a pressure sensitive adhesive (PSA) 14. As shown, reference numeral 16 identifies a surface created via surface treatment of the plastic film 10 with the coating material as disclosed herein. Suitably, as discussed above, the film 10 is optionally a PU film. As can be seen from FIGURE 1, suitably the surface treatment comprising at least one anti-microbial agent of the film 10 creates a surface 16 which is not a distinct layer with respect to the film 10. That is to say, there is no strictly defined border between the surface 16 and the film 10 which separates the two into otherwise distinct layers. Rather, the surface 16 is formed by a chemical treatment of the film 10 such that the material composition gradually transitions from one material to the next.

[0037] The gradual transitioning nature of the coating materials contributes largely to the retention of the film flexibility/extensibility. In general, two mechanisms can be used to explain this

gradual transition. First, the coating solvent is selected to have good compatibility with the polyurethane film. Accordingly, the solvent swells the polyurethane film and carries the solid coating materials from the surface treatment inside the matrix of the polyurethane film. The inclusion of the coating solids from the treatment in the PU film matrix increases the density of the sub-surface. Second, the outermost surface of the PU film, like all plastic materials, is generally rough on a nano-meter scale. Upon treatment with the coating material, the valley areas are filled with the coating materials, which also beneficially leads to a smoother surface. In any event, at least in part due to these two effects, as visible under magnification, the thickness and/or amount of the coating material from the treatment which remains above or proud of the top surface of the underlying substrate material is relatively small in view of the coating weight used to apply the treatment material – in fact, in some embodiments it may even be unperceivable.

[0038] The ability of a coating ingredient diffusing or migrating into a plastic film depends on many factors such as the physical size of the coating ingredient, the compatibility with the plastic film, etc. A coating ingredient of smaller size and/or having good affinity with the plastic film will diffuse faster than the ingredient that is larger and/or having poor affinity. Since a typical coating formulation contains several ingredients that are different in size and/or in affinity/compatibility with the plastic film, the composition of the coating materials that have diffused/migrated into the plastic film may be substantially different from the composition of the starting formulation. This in turn leads to a new composition for the coating layer that remains above the plastic film, different from the composition of the starting coating formulation as well.

[0039] Suitably, the surface treatment in one embodiment includes applying the surface treatment material at a dry coating thickness in the range of about 0.1 to 25 μ m. In another embodiment, the surface treatment includes applying the surface treatment material at a dry coating thickness in the range of about 1 to 15 μ m. In yet another example, the surface treatment includes

applying the surface treatment material at a dry coating thickness in the range of about 4 to 10 μ m. In any event, the resulting thickness of the coating material which is distinguishable from and/or remains extending above or sitting proud of the top surface of the substrate material is substantially less than the applied coating volume.

[0040] In one embodiment the surface treatment that comprises at least one anti-microbial agent is coated at a wet thickness of approximately 20 μ m.

[0041] Again, the two effects described above lead at least in part to the relatively thin thickness of the surface treatment material which remains above the top surface of the underlying substrate. Accordingly, this relatively thin thickness along with the graduation transitioning nature contribute to the fact that the flexibility and/or extensibility of the treated film or laminate is largely retained even though the treatment materials (e.g., such as the Silia-MaxTM) are only more generally known for rigid surface applications due to their relatively high surface hardness. For example, in one embodiment, the treated film or laminate disclosed herein withstands at least 20% elongation without failing (i.e., cracking, breaking, clouding, etc.). In yet another embodiment, the treated film or laminate disclosed herein withstands at least 50% elongation without failing. And in still another embodiment, the treated film or laminate disclosed herein withstands at least 80% elongation without failing. However, depending on the coat-weight of the material used for the surface treatment, the amount and/or type of curing, the composition of the underlying base film, and other factors, elongations of up to about 150% or even 300% may be achieved without failure of the treated laminate/film. In general, lower coat weight and/or higher penetration into the plastics film leads to higher extensibility. As used in this regard, failing refers to the start of loss of clarity and/or increase in haze, e.g., as exhibited by cracking, hazing or whitening.

[0042] Both the aforementioned effects also tend to enhance the surface reflectivity and gloss level of the resulting construction, e.g., as illustrated by a reduction in haze% (see Table 1) and an

increase in the gloss value (see FIGURE 2) for a 150µm thick Dureflex® PU film treated with the first exemplary treatment solution. The haze% measurements were taken on a PU film after peeling off the PET carrier. For the gloss measurements, the PU film remained on the PET carrier.

[0043] Table 1

Samples	Haze%
150µm thick 1 st sample film untreated (Control)	2.77
150µm thick 1 st sample film treated with 5µm coat weight of 1 st exemplary treatment solution	2.03
150µm thick 1 st sample film treated with 10µm coat weight of 1 st exemplary treatment solution	1.91
150µm thick 2 nd sample film untreated (Control)	1.70
150µm thick 2 nd sample film treated with 10µm coat weight of 1 st exemplary treatment solution	1.59

[0044] FIGURE 2 illustrates gloss value measurements with illumination applied at a 60 degree angle of incidence. The listed samples represent 150µm thick 1st sample films treated with the 1st exemplary treatment solution applied at the respective coat weights indicated. The listed control sample was untreated.

[0045] The gradual transition of the treatment material also acts to “hardens” the surface, which in turn may help eliminate the appearance of the “orange peel” effect frequently observed on flexible films.

[0046] In one exemplary experiment, a test for antimicrobial activity was conducted. The bacteria utilized in this particular experiment as the test bacteria inoculums was *Staphylococcus aureus*. There are over 30 types of *Staphylococcus* but particularly *Staphylococcus aureus* is the cause of the majority of staph infections including but not limited to skin infections, pneumonia, food poisoning, toxic shock syndrome, and blood poisoning. First, the test bacteria inoculums were diluted with 1/500

Nutrient Broth to that the number of bacteria was 2.5 to 10×10^5 cells/ml. Next each test piece was placed in a sterilized Petri dish. Exactly 0.4 ml of the bacteria test inoculums was taken with a pipet and instilled into each test piece in the petri dish. The Petri dishes containing the test piece inoculated with the test inoculums were incubated at a temperature of 35°C for $24\text{h}+\text{h}$. Next, the inoculated test bacteria were washed with 10 ml SCDLP broth. One ml of the washing in SCDLP broth were taken with a pipette and placed in a test tube containing 9.0 mL of phosphate buffered physiological saline and this procedure was repeated in order to prepare 10 -fold serial dilutions. One ml each of the washing and each dilution were put into two sterilized Petri dishes and to each Petri dish, 15 ml to 20 ml of the plate count agar at 46°C to 48°C . After solidifying the culture medium, the petri dishes are inverted and incubated at $35^\circ\text{C} \pm ^\circ\text{C}$ for 40h to 48h . The results of the testing are illustrated by Table 2:

[0047] Table 2

Samples	Results
Positive Control	2.3×10^5 CFU
Negative Control (Broth only)	<1 CFU
J-0712-16 PU	6×10^3 CFU
J-0712-15 PU	<1 CFU
J-0712-14 PU	30×10^2 CFU
J-0712-13	<1 CFU
J-0712-13 PET	<1 CFU
J-0712-12 PU	<1 CFU
J-0712-11 PU	<1 CFU
J-0712-10	7×10^3 CFU

[0048] In one exemplary experiment, a 150 μ m thick 1st sample film laminated to a (PSA) on a release liner was surface treated with a 5 μ m and a 15 μ m (wet thickness) coat weight of the 1st exemplary treatment material disclosed herein, i.e., the Sila-MaxTM coating material. The surface treated samples were dried in a thermal oven at about 80°C for about 3 to 5 minutes and further cured by UV irradiation using a mercury lamp with 206mJ/cm² irradiation energy, at a speed of 100 feet/min. After curing, the release liner was removed and the surface treated PU films were attached to aluminum (Al) plates via the PSA layer. To emulate the exposure to airborne motor oil and dirt from the pavement of the driving environment, the Al plates carrying the prepared samples were dipped in used motor oil (Pennzoil, 10W30) for 48 hours along with currently available commercial products for comparison. After the 48 hour test period, the samples were taken out of the used motor oil and thoroughly cleaned with detergent and water. The surface treated film samples were inspected and compared with the current commercial products to evaluate any changes in color (yellowing) as a result of the used motor oil test. FIGURE 3 illustrates measured b values of the samples on an L a b color scale after subjecting the samples to the aforementioned used motor oil test. The listed samples represent 150 μ m PU film treated with the 1st exemplary treatment solution applied at the respective coat weights indicated. The listed control sample was untreated. Also listed are commercially available products labeled Product-1, Product-2 and Product-3 for comparison. While pronounced color change (i.e., yellowing and/or staining) was observed for the commercial products and the untreated PU film, little color change was observed for the PU film treated with the 1st exemplary treatment solution.

[0049] In another experiment, 150 μ m thick samples of the 1st and 2nd exemplary films were treated with the 1st exemplary treatment solution, with wet thicknesses coating weights from 15 μ m down to 5 μ m. The samples were then dried at about 80°C for about 3 to 5 minutes and further cured by UV using a mercury lamp with 206mJ/cm² irradiation energy, at a speed of 100 feet/min. The treated samples were again tested in the used motor oil following the same procedure. The b values for both

the control and treated PU samples are shown in FIGURE 4. The control samples of the 1st and 2nd exemplary films have comparable b values, which were significantly reduced after the treatment with the 1st exemplary treatment solution. The treated samples performed much better than the commercial products tested, even with 5µm wet coating thickness. The b values decrease slightly by increasing the coating thickness from 5µm to 10µm, which has almost the same b value as the 15µm sample FIGURE 4 illustrates measured b values of the samples on a Lab color scale after subjecting the samples to the aforementioned used motor oil test. The listed samples represent 150µm thick film in accordance with exemplary films 1 and 2 as indicated treated with the 1st exemplary treatment solution applied at the respective coat weights indicated. The listed control samples were untreated.

[0050] The flexibility of a 150µm thick 1st exemplary film having, on the bottom surface, a 50µm thick PSA layer, was treated with 15µm wet coat weight of the 1st exemplary treatment solution. After treatment, the tensile stress at 100% elongation was measured to evaluate its conformability. For comparison, the tensile properties of commercial products were also measured and are plotted in FIGURE 5. The results for the commercial products are labeled Product-1, Product-2 and Product-3, and the result for an untreated 150µm thick 1st exemplary film (i.e., the Control) is also shown.

[0051] Due to its high flexibility and thin coating thickness, the surface treated film sample in accordance with aspects of the present inventive subject matter shows a stress at 100% elongation which is (i) comparable to that of the commercially available comparison sample Product-1, (ii) slightly lower than that of the commercially available comparison sample Product-2, and (iii) slightly higher than that of the commercially available comparison sample Product-3.

[0052] The impact resistance of the surface treated 1st exemplary film having a PSA layer on the bottom surface was also evaluated using an appropriate testing method – namely a modified ASTM D968-93 established by ASTM International, originally known as the American Society for Testing and Materials (ASTM). More specifically, samples were prepared and tested as follows. The release liner of

the laminate was first removed and the surface treated PU film was laminated to an Al panel through the PSA layer. To emulate the exposure to airborne stones and debris of the driving environment, the Al panel was firmly mounted on a heavy metal holder. Five pounds of a sand mixture with 3/8 to 1/2 inch in diameter particle size was used as the impact material. The sand mixture was poured from the top of a 3 meter long and 0.5 inch diameter stainless steel tube. The sand particles gained speed and upon exiting the tube, impacted on the sample carrying Al panel which was located at 3 inch from the bottom of the tube and positioned at a 45 degree angle. After all the sand mixture flowed out from the tube, the Al panel was removed from the heavy metal holder. After blowing off any loosely attached dust and/or other particles, the impacted area of the sample was inspected and compared to a currently available commercial product that had undergone the same testing. The result suggests that the impact resistance of the surface treated sample is comparable to the commercially available product.

[0053] Additionally, conventional gravelometer testing was conducted on film and/or laminate samples that were surface treated in accordance with one or more of the embodiments disclosed herein. The samples passed this testing conducted in accordance with industry accepted standards.

[0054] Additionally, to emulate exposure to sunlight, UV Xenon weatherometer tests were performed on a 150 μ m thick sample of the 1st exemplary film treated with 15 μ m wet coating weight of the 1st exemplary treatment solution. Commercial products (i.e., Product-1, Product-2 and Product-3) were also tested along with an untreated sample of the 1st exemplary film (i.e., the Control). The changes in the b* values (Δb^*) and in the total color (ΔE) were measured before and after exposure to the testing. As shown in FIGURE 6, very little changes are observed for all the samples after 2000 hours. In fact, any color variation that is below 1.0 is nearly unperceivable if at all by human eyes.

[0055] The first exemplary treatment solution (i.e., the Sila MaxTM coating) has 3H pencil hardness according to technical data from the manufacturer. The 1st and 2nd exemplary PU films, on the

other hand, have a pencil hardness of about 3B, which is several grades lower than the aforementioned coating. Yet, when the PU film was treated with the 1st exemplary coating solution, the treated PU film substantially retains its flexibility and remains stretchable. Such contradictory properties are largely unexpected and/or unseen in the prior art. In FIGURE 7 is compared the hardness and the stretchability of different plastic films with or without a hard coat. Here the term “stretchability” means that the plastic film can be elongated at room temperature by hands without failing. Commercially available stretchable plastic films such as PU, polyvinyl chloride, rubbers, and polyolefins all have very soft surfaces. Plastic films with harder surfaces such as acrylic and polycarbonate are not stretchable. The treated PU film in accordance with aspects of the present inventive subject matter effectively combines a very hard surface with a very soft plastic core, which is a result of gradual transition from the soft PU to a very hard coating. The penetration of coating materials into the plastic film or laminates also leads to other desired benefits, such as strong adhesion. The adhesion is particularly important when the coated film is subject to bending or has to conform to irregular surfaces, with or without stretching.

[0056] In yet another embodiment, the PU film surface was treated with treatment solutions that are thermally curable. These solutions each contained two parts, namely, a resin solution with 10% solids in a co-solvent of MEK (methyl ethyl ketone) and IPA (isopropyl alcohol), and a corresponding curing agent. The resin solution for the first thermally curable treatment solution had a viscosity of 0.90mPa.S and the resin solution for the second thermally curable treatment solution had a viscosity of 0.93mPa.S. Both curing agents were white solid powders. The thermal curable coating solutions were prepared by mixing 0.5wt parts of the curing agent in 100wt parts of the resin solution. To obtain a coating with high optical clarity, it is recommended that the dry thickness of the coating be less than 1µm, as thicker coatings lead to a higher haze%.

[0057] 150µm thick samples of the 1st and 2nd exemplary films were treated with both the thermally curable treatment solutions described above with a 10µm wet coating thickness. The samples

were then initially dried at about 60°C for about 3 to 5 minutes to eliminate the solvent, followed by thermal curing at about 120°C for about 1 minute. The surface treated films along with untreated control samples were evaluated for resistance to the used motor oil and for conformability. The results are shown in Table 2.

[0058] Table 3

Samples	Tensile strength @100% elongation [N/mm²]	Appearance at 100% elongation	b value (after used motor oil test)
1 st Exemplary Film Untreated (Control)	9.4	Clear	26.0
1 st Exemplary Film Treated with 1 st Thermally Curable Treatment Solution	6.0	Clear	4.7
1 st Exemplary Film Treated with 2 nd Thermally Curable Treatment Solution	5.9	Clear	13.0
2 nd Exemplary Film Untreated (Control)	10.2	Clear	26.0
2 nd Exemplary Film Treated with 1 st Thermally Curable Treatment Solution	6.2	Clear	1.4
2 nd Exemplary Film Treated with 2 nd Thermally Curable Treatment Solution	5.6	Clear	2.1

[0059] As shown in Table 2, the tensile strength at 100% elongation is significantly reduced by treatment with both the thermally curable treatment solutions, which leads to an improvement in the conformability. No change in the optical clarity was noticeable after 100% elongation. The resistance to staining, as evidenced by their performance in the used motor oil test, for both exemplary films is significantly improved after treatment with both thermally curable treatment solutions, more so for the 2nd exemplary film than for the 1st exemplary film.

[0060] The PU film treated with the 1st exemplary treatment solution also showed a significant reduction in the surface energy as shown in Table 3, due to the low surface energy of the treatment materials. In fact, one of the properties of the 1st exemplary treatment solution is that the treated surface exhibits a concentration gradient across the thickness for the nano-particles, with more nano-particles being located on the outermost surface rather than in the sub-surface. It is theorized that during the coating process, the nano-particles migrate to the top surface prior to curing and are locked in place upon curing. The migration of the low surface energy components to the surface is associated with the natural force that has the tendency to minimize the surface energy. The low surface energy of the PU film created by the surface treatments described herein provides an excellent release surface.

[0061] Table 4

Samples	Total surface energy [mN/cm]	Polar component [mN/cm]	Non-polar component [mN/cm]
2 nd Exemplary Film Untreated (Control)	40.1	34.6	5.5
2 nd Exemplary Film Treated with a 10 μ m wet coat weight of the 1 st Exemplary Treatment Solution	22.1	21.0	1.1

[0062] The surface energy shown in Table 3 was obtained through contact angle measurements. The measurements were conducted on a NRL Contact Angle Goniometer and using D.I. water and Tricresylphosphate (TCP) testing liquids. The surface energy values were calculated using the Geometric Mean Model. The control PU film has a total surface energy of 40.1mN/cm with a polar component of 34.6mN/cm and non-polar component of 5.5mN/cm. The total surface energy was significantly reduced after treatment with the 1st exemplary treatment solution, more so for the polar component than for the non-polar component.

[0063] The low surface energy property allows the treated film to be a self-wound, tape like laminate comprising a surface created via the surface treatment, a plastic substrate and a PSA layer. In this manner, the release liner or backing sheet is eliminated from the construction, e.g., shown in FIGURE 1. Accordingly, this both reduces the cost and eliminates the waste of a release liner or other like backing materials.

[0064] In another embodiment, the surface treatment comprises a composite of the 1st exemplary treatment solution and an aliphatic urethane acrylate. In one example, a treatment solution was made by mixing the 1st exemplary treatment solution with an aliphatic urethane diacrylate in different weight ratios [w/w]. Mixing the 1st exemplary treatment solution with the urethane acrylate can significantly reduces the cost of the surface treatment solution (with the same amount of coating materials) and/or increases the solid content (i.e., the 1st exemplary treatment solution has 40% solid loading, while the acryate has 100% solid loading). Higher solid content is advantageous for coating a thicker film.

[0065] For example, a suitable urethane diacrylate is available from Sartomer Company, Inc. (Exton, PA) and sold under the product designation CN2285. Without adding a new or additional photoinitiator, the mixture of the 1st exemplary treatment solution and the foregoing urethane diacrylate can be UV cured at the same rate (i.e., at 100 feet/min. using a mercury lamp with 206mJ/cm² irradiation energy) with up to about 75% wt of the urethane diacrylate in the formulation. Suitably, the photo curing agent contained in the 1st exemplary treatment solution is sufficient to cure the composite. Additional photoinitiator may be added upon further increase in the urethane diacrylate content in order to maintain the same curing rate.

[0066] In one example, a 15µm wet coating weight or thickness of the aforementioned coating solutions (i.e., mixture of the 1st exemplary treatment solution and aliphatic urethane diacrylate) were used to surface treat a 200µm thick sample of the 1st exemplary film. The samples were then dried

at about 80°C for about 3-5 min followed by UV curing at about 100 feet/min using a mercury lamp with about 206mJ/cm² irradiation energy. The resistance to the used motor oils and the tensile stress at 100% elongation were evaluated and shown in FIGURE 8 and FIGURE 9, respectively. An untreated sample (i.e., the Control) was also tested and the results are likewise reported here.

[0067] As shown in FIGURE 8, excellent stain resistance was obtained with up to 50% aliphatic urethane diacrylate (w/w) in the composition formulation, outperforming all commercial products shown in FIGURE 3. The performance however became worse with further increases in the acrylate component.

[0068] FIGURE 9 shows that the PU film treated with the composite coating of (aliphatic urethane diacrylate):(the 1st exemplary treatment solution) = 25:75 weight ratio has comparable tensile stress as the untreated film. The tensile stress however decreases with further increase in this ratio, which will lead to improved conformability.

[0069] In yet another embodiment, the PU film surface was treated with another treatment solution comprising a different POSS material (i.e., a 2nd exemplary treatment solution). In this example, the coating solution was obtained from Hybrid Plastics (Hattiesburg, MS) and sold under the product designation POSS® Coat MA2310. This coating solution comprises a mixture of POSS nanoparticles and acrylates. It is a 100% solid, irradiation curable solution. Again, a sample was prepared by surface treating a 200µm thick sample of the 1st exemplary film with a 15µm wet thickness coating of the foregoing solution and UV cured at 100 feet/min using a fusion lamp with 206mJ/cm² irradiation energy. The resistance to the used motor oil of the PU film treated with the 2nd exemplary treatment solution showed a b value of 8.2, which is significantly better than the uncoated PU film (see, e.g., FIGURE 4).

[0070] In practice, the coating or treatment solution formulation may contain inorganic particles, inorganic-organic hybrid particles and/or polymeric particles. Suitable inorganic particles

include, for example, calcium carbonate, titanium dioxide, silica, alumina, zinc sulfide, zinc oxide, antimony oxide, barium sulfate, etc. Suitable organic-inorganic particles include materials derived from silsesquioxane compounds. For example, many organic-inorganic hybrid particles of Polyhydra Oligomeric Silsesquioxane (POSS) materials with a vast variety of functionalities are commercially available. Suitable organic particles include, for example, polyolefin, polyamide, polyester, and polyurethane particles. These particles can be used alone or in combinations.

[0071] In one example, an optically clear stretchable film was obtained via a treatment prepared by mixing a UV curable POSS containing material (available from Hybrid Plastics (Hattiesburg, MS) under the product designation Acrylo POSS® Cage Mixture (MA0736) with an aliphatic urethane acrylate (available from Sartomer Inc. under the product designation (CN2285)) as shown in Table 4. The treatment solution was applied to a 200µm thick sample of the 2nd exemplary PU film with 10µm wet thickness. The coated PU film was dried at 80°C for 5min and UV cured using a mercury lamp at 200mJ/cm² irradiation energy.

[0072] Table 5

Components	%
MEK	46.5
Aliphatic urethane acrylate	46.5
POSS containing material	4.6
Benzophenone	2.4
Total	100

[0073] The thus coated polyurethane film can be stretchable to more than 100% without noticeable change in the optical clarity. This result, compared to the PU film treated with POSS® Coat

MA2310 described above, suggests that the presence of an organic solvent is important for the coating ingredients to penetrate into and maintain the flexibility of the treated PU film. The b value of the coated polyurethane film after dipping in a used motor oil for 2 days changed from 1.77 to 5.23.

[0074] In another example, a matte finish stretchable protective film was obtained by treatment with a solvent based dispersion comprising a polyamide based polymeric particle. In particular, the treatment included: MEK as the solvent; an ultra-fine polyamide powder having an average particle size of 5 μ m (available under the designation Orgasol® 2001 UD Nat 2 from Arkema Inc.); a UV curable aliphatic urethane acrylate (i.e., CN2285 available from Sartomer Inc.); a UV curable POSS material (i.e., Acrylo POSS® Cage Mixture (MA0736) obtained from Hybrid Plastics Inc.); and, Benzophenone (available from Sigma-Aldrich) as photoinitiator. The composition of each component is listed in Table 5.

[0075] **Table 6**

Components	%
MEK	41.0
Aliphatic urethane acrylate	41.0
Ultra-fine polyamide powder	11.8
POSS containing material	4.1
Benzophenone	2.1
Total	100

[0076] The coating dispersion was applied to a 2mil Melinex™ PET substrate and a 200 μ m 1st exemplary PU film with 15 μ m wet thickness. The samples were dried at 80°C for 5min and UV cured

using a mercury lamp at 200mJ/cm² irradiation energy the 60deg gloss and the stretchability of the coated film samples were measured and listed in Table 6.

[0077] Table 7

PU		PET	
60 degree gloss	Stretchability	60 degree gloss	Stretchability
4.3	>300%	13	Not stretchable

[0078] The 60deg gloss of the coating applied to the PU film is substantially lower than the same coating applied to the PET substrate, and the coated PU film remains stretchable up to more than 300% without cracking. It is theorized that the lower gloss value for the coating applied to the PU film is associated with the migration of the coating components into the PU film. When the coating is applied to the PU film, the solvent and other smaller molecules such as POSS® MA0736 and CN2285 quickly diffuse into the PU film. The polyamide particle, which is relatively large, is left behind. This leads to a coating layer with higher concentration of polyamide particles than in the starting coating composition. On the other hand, when the coating is applied to the PET film where little or no diffusion occurred, the coating layer remains uniform with the same concentration as the initial coating composition. This “concentrating” or “filtering” effect enabled by a non-uniform, differentiated diffusion of different coating ingredients into the plastic film allows to maximize surface related coating properties such as abrasion resistance, low gloss, anti-glare, chemical resistance, etc. On the other hand, a desired concentration of particles on the coating surface can be obtained using a coating formulation having lower concentration of particles than on the coating surface. As a result, the amount of particles in the coating formulation can be reduced and the coating formulation can be made with a lower viscosity.

[0079] In yet another example, a treatment solution was prepared with a 10% acrylic polymer (available under the designation Plexiglas V825 from Arkema Inc.) in 1-Methoxy-2-Propanol solvent. The solution was coated onto a 200µm thick 2nd exemplary PU film with 15µm wet thickness

and dried at 80°C for 5min. The coated PU film thus obtained was optically clear. However, upon stretching, the treated PU film becomes hazy and cracks instantly. It is theorized that because of the large size of the acrylic polymer chain, the acrylic material was not able to diffuse into the PU film and consequently, the coating becomes hazy and cracks upon stretching.

[0080] With reference now to FIGURES 10 and 11, photomicrographs show penetration or migration of the treatment solution into various films as indicated. In both cases, the same wet coating weight of the 1st exemplary treatment solution was applied to a 2nd exemplary PU film and to a Melinex™ PET film for comparison. Notably, as shown in FIGURE 10, a significant distinct layer (i.e., of about 7μm) forms on and/or over the surface of the PET film. However, as shown in FIGURE 11, a substantially less thick layer (i.e., of about 0.5μm) is so formed on and/or over the surface of the PU film. As can be appreciated, this is due to the significant migration or penetration of the treatment below the surface of the PU film in the latter example. Here more than 90% of the coating ingredients have diffused into the PU film. Optionally, layer formed on and/or over the surface of the PU film is less than or equal to about 2 microns. Alternately, the thickness of the coating which remains on the surface of the PU film is between about 0.5μm and about 3μm. In still a further embodiment, the coating which remains on the surface of the PU film is between about 0.5μm and about 1.0μm.

[0081] With further reference to FIGURE 12, FTIR imaging analyses were performed to study the penetration, diffusion and/or migration of the 1st exemplary treatment solution into the treated PU film shown in FIGURE 11. The samples were cut into slices of about 15 to 20μm thick and analyzed by an ATR Imaging system (Perkin Elmer Spotlight 400) with a pixel size 1.56μm. The FTIR images were collected with a spectral resolution of 4cm⁻¹ and a spatial resolution of about 3μm. For 400x400μm² image dimension, 2 scans were average at each point, while for 25x85μm² image dimension, 32 scans were average at each point in order to obtain better quality spectra. The IR absorption peak at 810cm⁻¹ associated with the unreacted double bond from the Sila Max™ treatment

solution is used as representative of the Sila Max™ coating materials. The IR absorption peak at 779cm^{-1} associated with the C-H out of plane bending deformation is used to represent the PU materials.

[0082] As shown in FIGURE 12, the relative peak intensity of 810cm^{-1} to 779cm^{-1} falls off gradually with increased depth but remains visible up to at least $25\mu\text{m}$. Accordingly, this indicates that the treatment solution penetrates, diffuses or migrates into the PU film to a depth of at least $25\mu\text{m}$ with a concentration that gradually decrease from the surface of the PU film to deeper within the PU film.

[0083] In accordance with one exemplary embodiment, it is suitable that the surface treatment penetrates, diffuses or migrates as much as $25\mu\text{m}$ into the film. In yet another suitable embodiment, the surface treatment penetrates, diffuses or migrates as much as $50\mu\text{m}$ into the film. Suitably, the treatment solution migrates into or penetrates the film such that it has a concentration gradient that gradually decreases with the depth of penetration into the film.

[0084] Referring now again to FIGURE 1, in use, the release liner 12 is removed from the construction and the PSA layer 14 is used to adhere the treated film 10 to the surface of a desired object with the treated surface 16 of the film 10 facing outward therefrom. For example, the film is optionally applied in this manner to an auto body surface or other like surface one wishes to protect. Significantly, due to the fact that stretchability, flexibility and/or extensibility is maintained, the film 10 can be readily and smoothly be applied to complex geometries and/or otherwise curved surface. Optionally, alternate means can be used to adhere or otherwise stick the film 10 to a desired surface. For example, in one alternate embodiment, an optionally adhesive free functional layer may be employed. In particular, a layer of silicone material with weak cohesion and/or low surface tension (i.e., excellent wettability) may be used. Accordingly, the functional layer easily spreads and/or conforms onto the surface of the object to which it is applied, and as air is squeezed out from between the functional layer and the object surface, a vacuum is created therebetween. This vacuum and/or the external air pressure act to hold the

film 10 to the surface of the object. Of course, other adhesive free options known in the art may also be employed, e.g., such a gecko-mimetic functional material.

[0085] In any event, it is to be appreciated that in connection with the particular exemplary embodiment(s) presented herein certain structural and/or function features are described as being incorporated in defined elements and/or components. However, it is contemplated that these features may, to the same or similar benefit, also likewise be incorporated in other elements and/or components where appropriate. It is also to be appreciated that different aspects of the exemplary embodiments may be selectively employed as appropriate to achieve other alternate embodiments suited for desired applications, the other alternate embodiments thereby realizing the respective advantages of the aspects incorporated therein.

[0086] The present invention also provides a method for constructing a protective sheet having anti-microbial properties. First, a film is provided. In one embodiment the film is plastic. Second, the film is treated with a surface treatment. The present invention contemplates that the surface treatment may be a solution comprising the antimicrobial agent. In another embodiment, after the substrate is treated with the surface treatment an anti-microbial agent additive is added to the coating composition. The present invention also contemplates that the anti-microbial agent additive is added to the coating composition prior to application to the substrate.

[0087] It is also to be appreciated that particular elements or components described herein may have their functionality suitably implemented via hardware, software, firmware or a combination thereof. Additionally, it is to be appreciated that certain elements described herein as incorporated together may under suitable circumstances be stand-alone elements or otherwise divided. Similarly, a plurality of particular functions described as being carried out by one particular element may be carried out by a plurality of distinct elements acting independently to carry out individual functions, or certain individual functions may be split-up and carried out by a plurality of distinct elements acting in concert.

Alternately, some elements or components otherwise described and/or shown herein as distinct from one another may be physically or functionally combined where appropriate.

[0088] The laminate shown in FIGURE 1 can be manufactured in different ways. In one embodiment, a 150 μ m thick 2nd exemplary PU film extruded onto a 2mil thick polyester carrier is obtained from Argotec Inc. The PU film has the 1st and 2nd major surfaces. The 1st major surface is exposed and the 2nd major surface is attached to the polyester carrier. The 1st exemplary Sila MaxTM treatment solution was obtained from Chisso Corp. A solvent based PSA solution was also made. The PSA solution was first coated onto the 1st major surface of the PU film and the solvent was eliminated by drying at high temperatures. The PSA coated PU film was subsequently laminated to a polyester release liner 12 as shown in FIGURE 1 and the polyester carrier was peeled off. The 2nd major surface of the PU film is now exposed. The Sila-MaxTM treatment solution was applied to the 2nd major surface of the PU film, dried at high temperatures to eliminate the solvent and subsequently cured using a mercury UV lamp.

[0089] Optionally, the treatment may include thermal and/or radiation curing. Suitably, since the treatment solution diffuses into the underlying PU or other film 10, it is desirable that film 10 be at least partially transparent to the curing radiation so that the material diffused into the film receives and/or is otherwise exposed to the curing radiation.

[0090] In short, the present specification has been set forth with reference to preferred embodiments. Obviously, modifications and alterations will occur to others upon reading and understanding the present specification. It is intended that the invention be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

Claims

What is claimed is:

1. A protective sheet comprising:
a film, and
a surface treatment including at least one anti-microbial agent applied as a coating formulation to a major surface of said plastic film.
2. The protective sheet of claim 1, wherein said plastic film is extensible/stretchable at room temperature.
3. The protective sheet of claim 2, wherein the plastic film is a polyurethane (PU) film.
4. The protective sheet of claim 2, wherein the plastic film is a polyvinyl chloride (PVC) film.
5. The protective sheet of claim 1, wherein the coating formulation is radiation curable.
6. The protective sheet of claim 1, wherein the coating formulation is thermally curable.
7. The protective sheet of claim 1, wherein the coating formulation is both radiation and thermally curable.

8. The protective sheet of claim 1, wherein the protective sheet is laminated to a release liner coated with a pressure sensitive adhesive (PSA).

9. The protective sheet of claim 1, wherein the protective sheet is self-wound and has no release liner.

10. The protective sheet of claim 1, wherein the protective sheet is laminated to a substantially adhesive free functional layer for securing the laminate to a surface of an object.

11. The protective sheet of claim 1, wherein the coating formulation contains nano-sized particles including at least one of nano-sized organic particles, nano-sized inorganic particles, or nano-sized organic-inorganic hybrid particles.

12. A protective sheet comprising:
a plastic film, and
a surface treatment including at least one antimicrobial agent applied as a coating formulation to a major surface of said plastic film, wherein said one or more coating ingredients diffuses at least partially into the plastic film; and

wherein the coating formulation contains nano-sized particles including at least one of nano-sized organic particles, nano-sized inorganic particles, or nano-sized organic-inorganic hybrid particles.

13. The protective sheet of claim 12, wherein the coating ingredient that diffuses at least partially into the plastic film is the at least one antimicrobial agent.

14. The protective sheet of claim 12, wherein the coating formulation contains a material derived from a silsesquioxane compound.

15. The protective sheet of claim 12, wherein following the surface treatment a defined boundary does not exist which divides the coating and film into separate distinct layers.

16. The protective sheet of claim 12, wherein at least 10% of the coating ingredients diffuse into the plastic film.

17. The protective sheet of claim 12, wherein at least 20% of the coating ingredients diffuse into the plastic film.

18. The protective sheet of claim 12, wherein at least 30% of the coating ingredients diffuse into the plastic film.

19. The protective sheet of claim 12, wherein at least 40% of the coating ingredients diffuse into the plastic film.

20. The protective sheet of claim 12, wherein at least 50% of the coating ingredients diffuse into the plastic film.21.

21. A laminate constructed from the protective sheet of claim 1.

22. A laminate constructed from the protective sheet of claim 12.

23. A method of constructing a protective sheet having anti-microbial properties including the steps of:

providing a film, a surface treatment, and at least one anti-microbial agent additive;


coating the film with the surface treatment wherein the anti-microbial agent additive may be added to the surface treatment before or after the film has been coated with the surface treatment.

24. A method of constructing a protective sheet having anti-microbial properties including the steps of:

providing a film and a surface treatment comprising at least one anti-microbial agent in solution;

coating the film with the surface treatment.

1/10

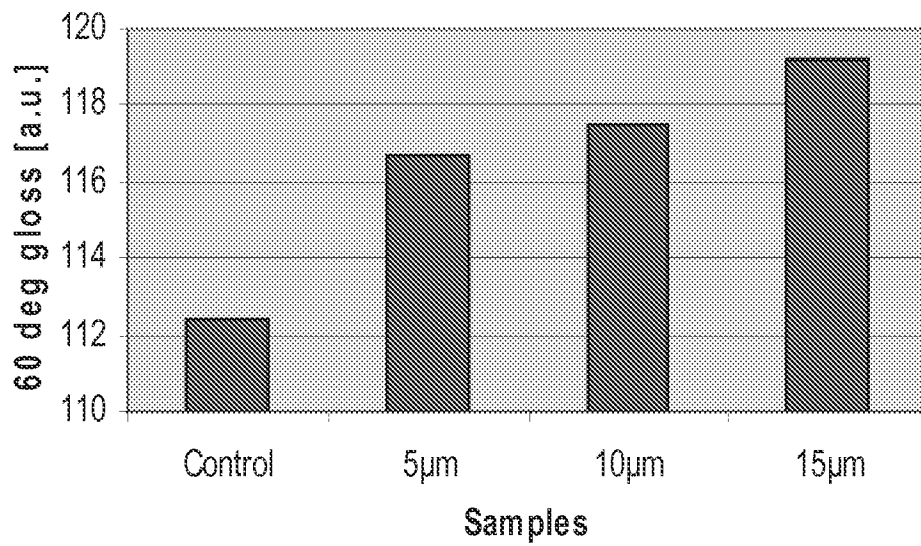**FIGURE 1****FIGURE 2**

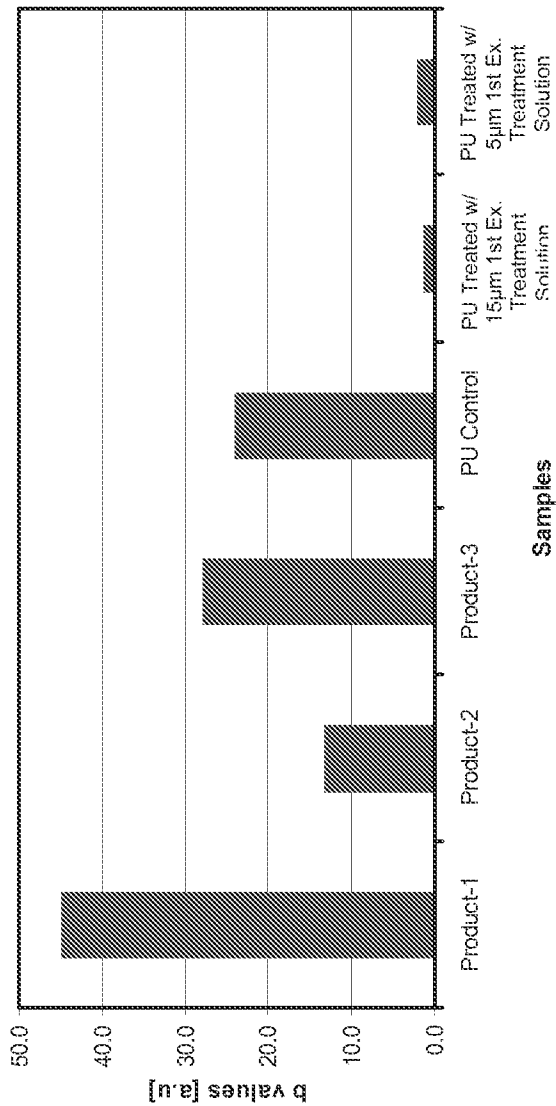


FIGURE 3

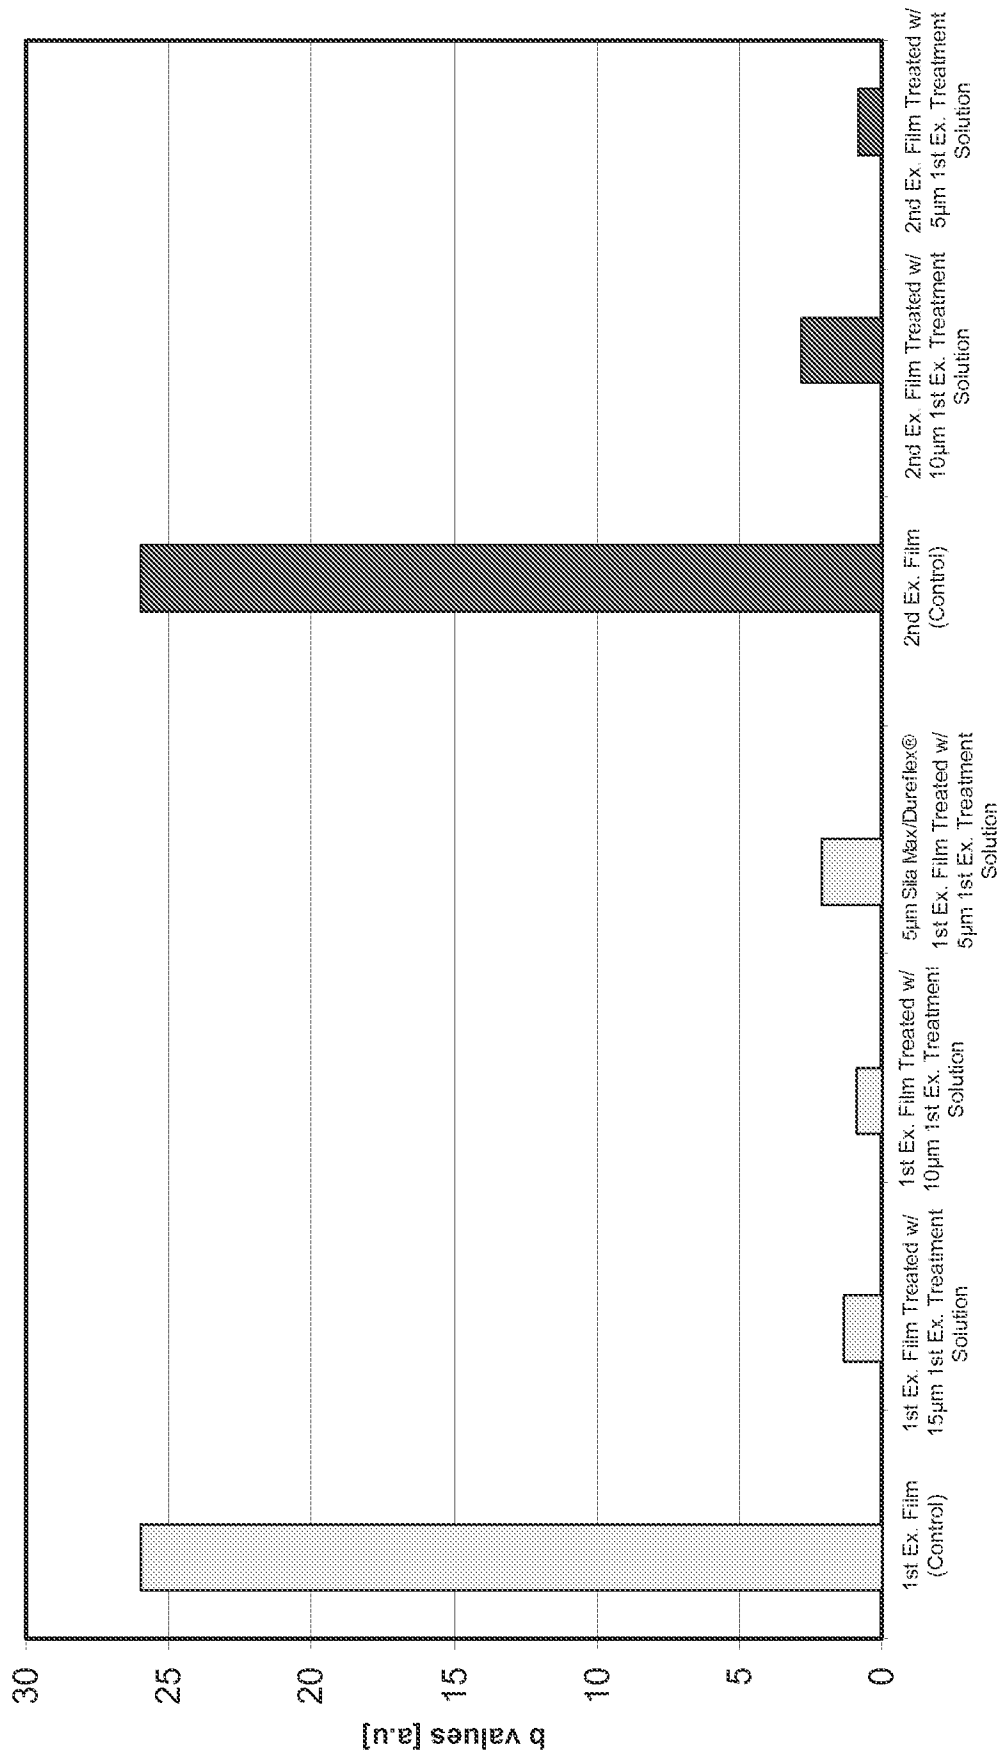
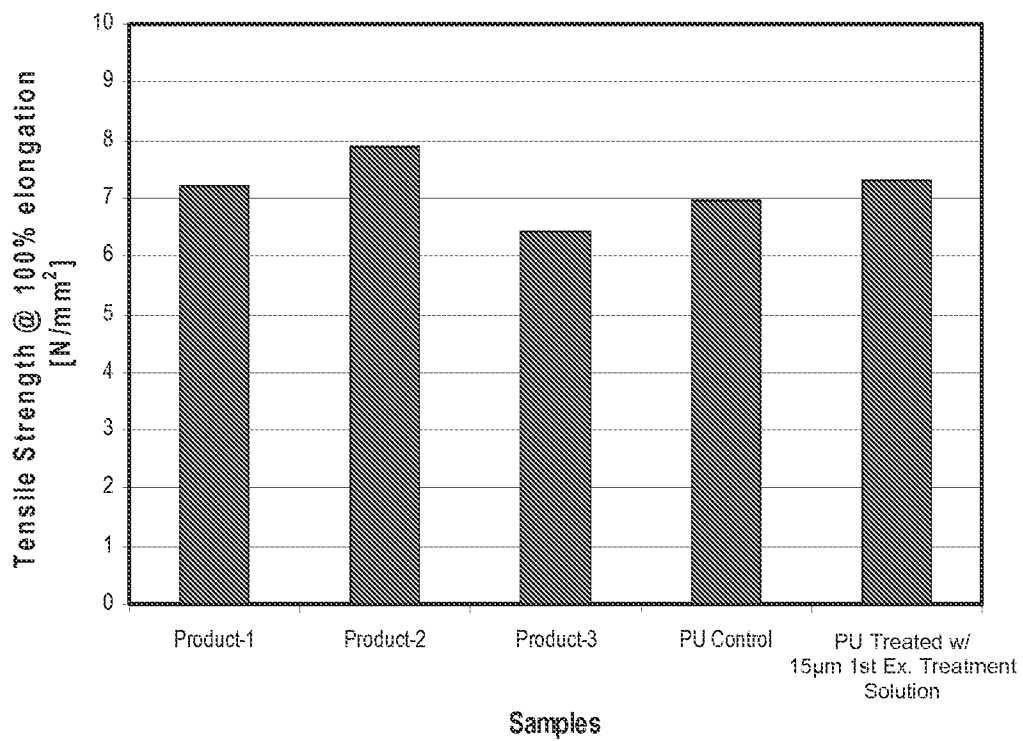


FIGURE 4

4/10

**FIGURE 5**

5/10

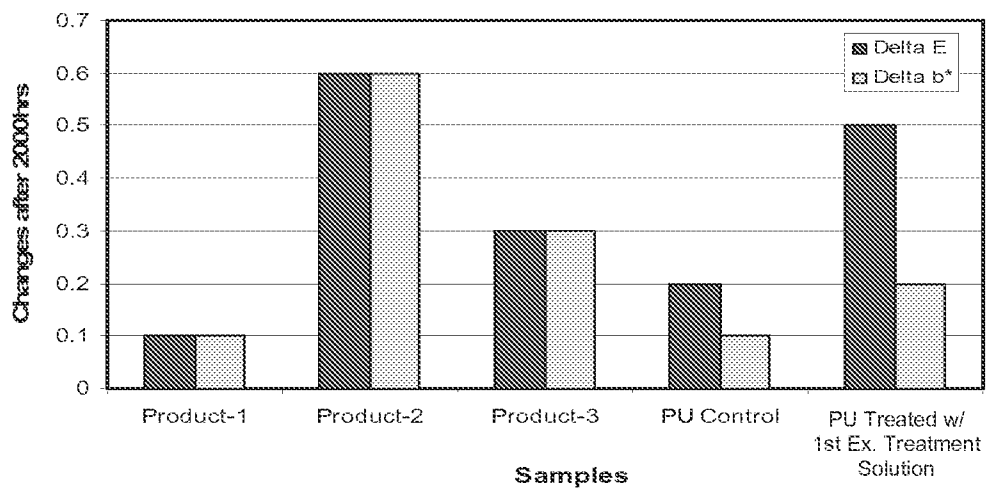


FIGURE 6

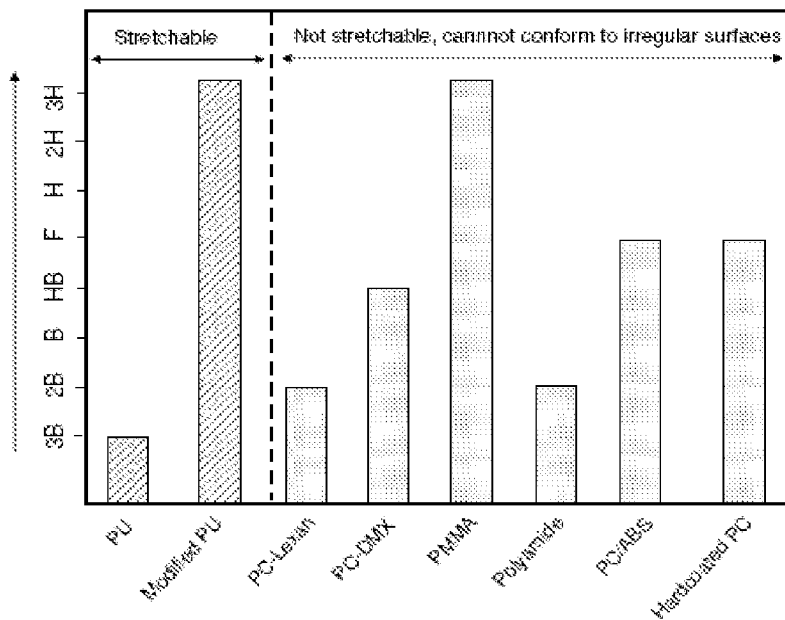
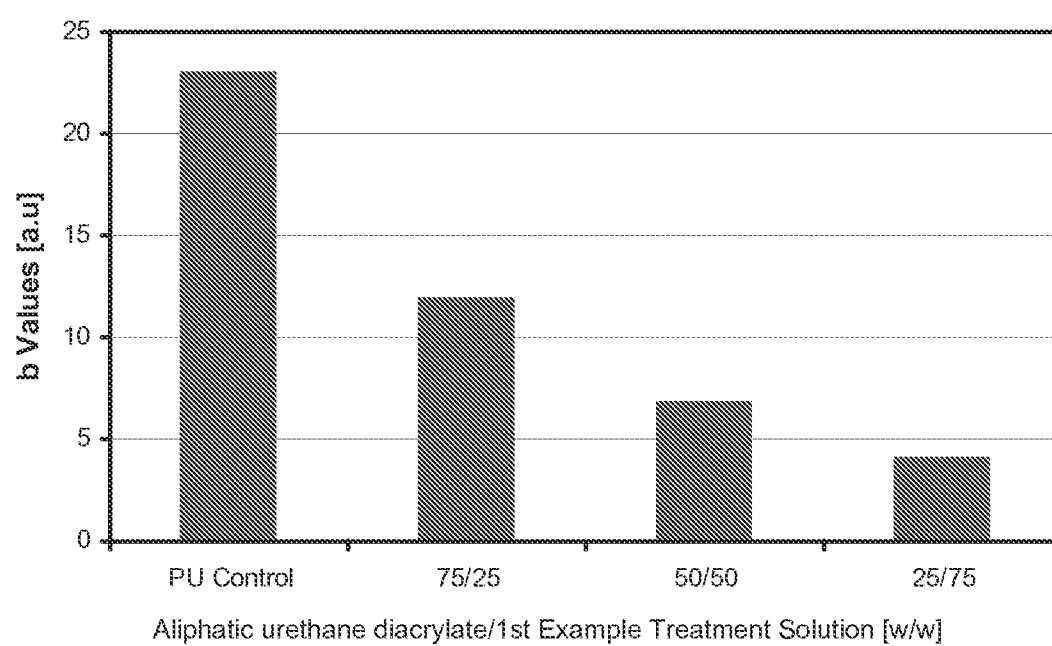
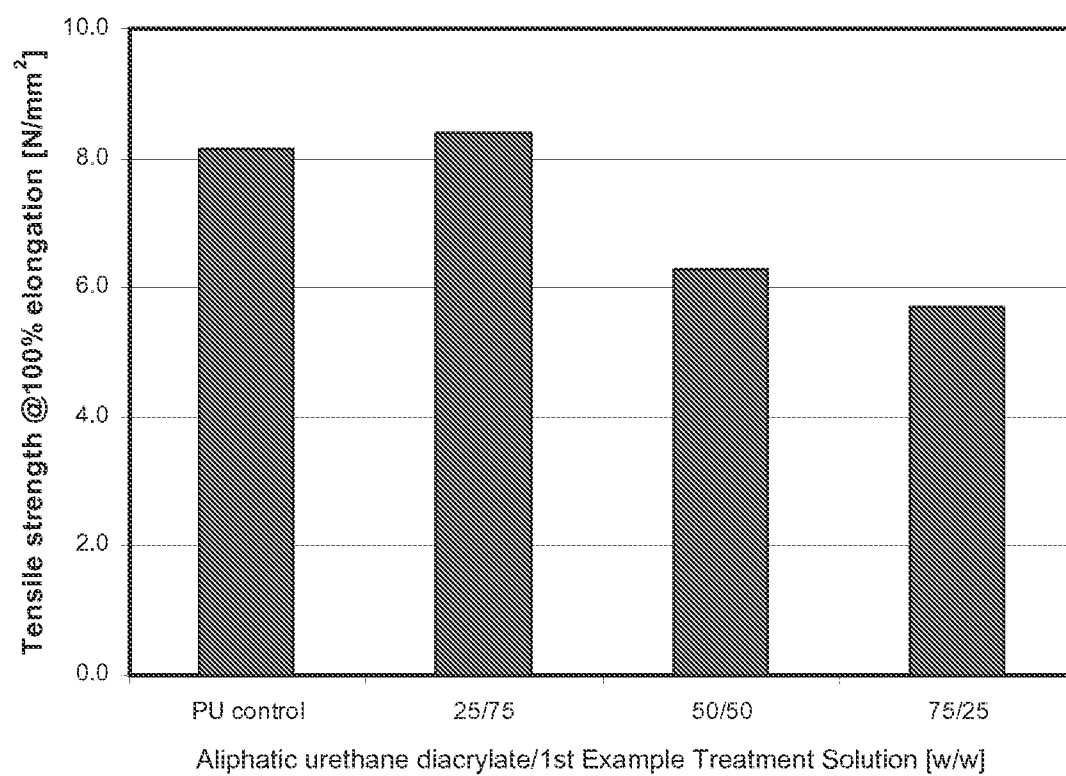


FIGURE 7

6/10


**FIGURE 8**

7/10

**FIGURE 9**


8/10

Scale: 20 microns

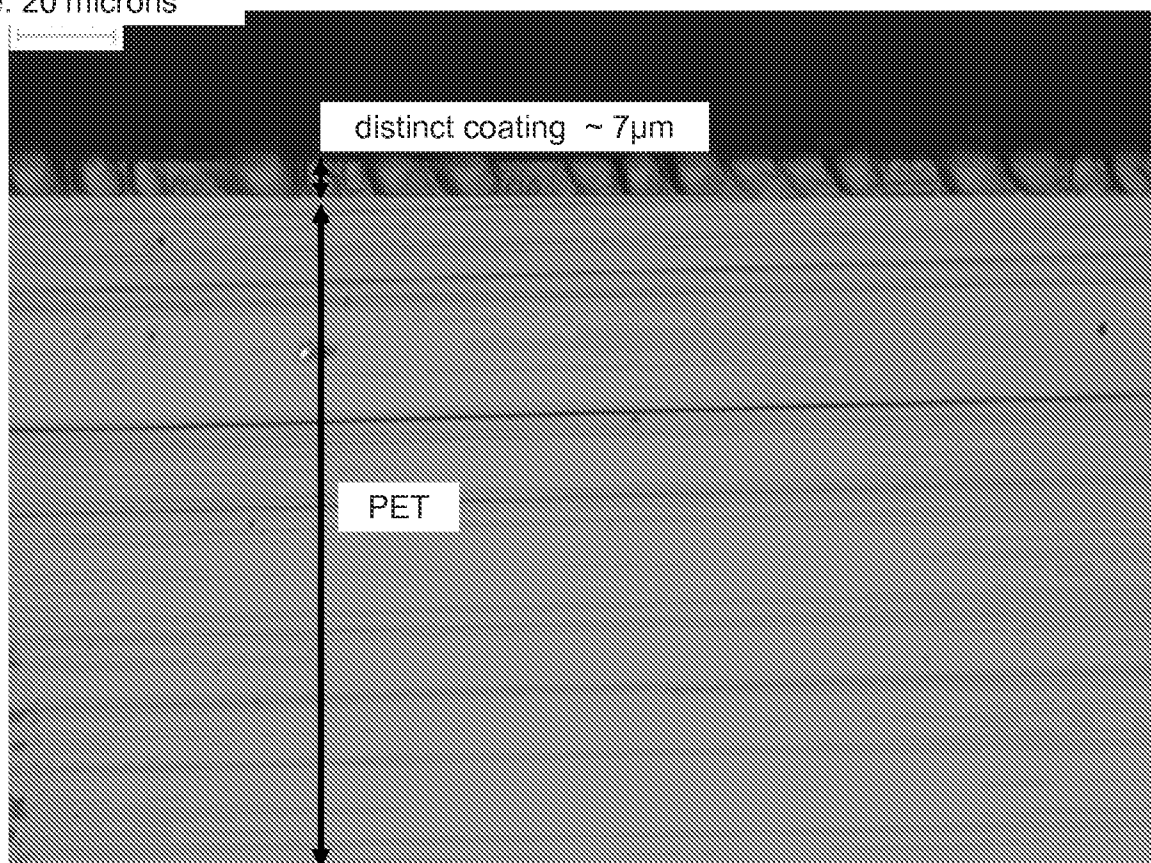
**FIGURE 10**

9/10

Scale: 10 microns

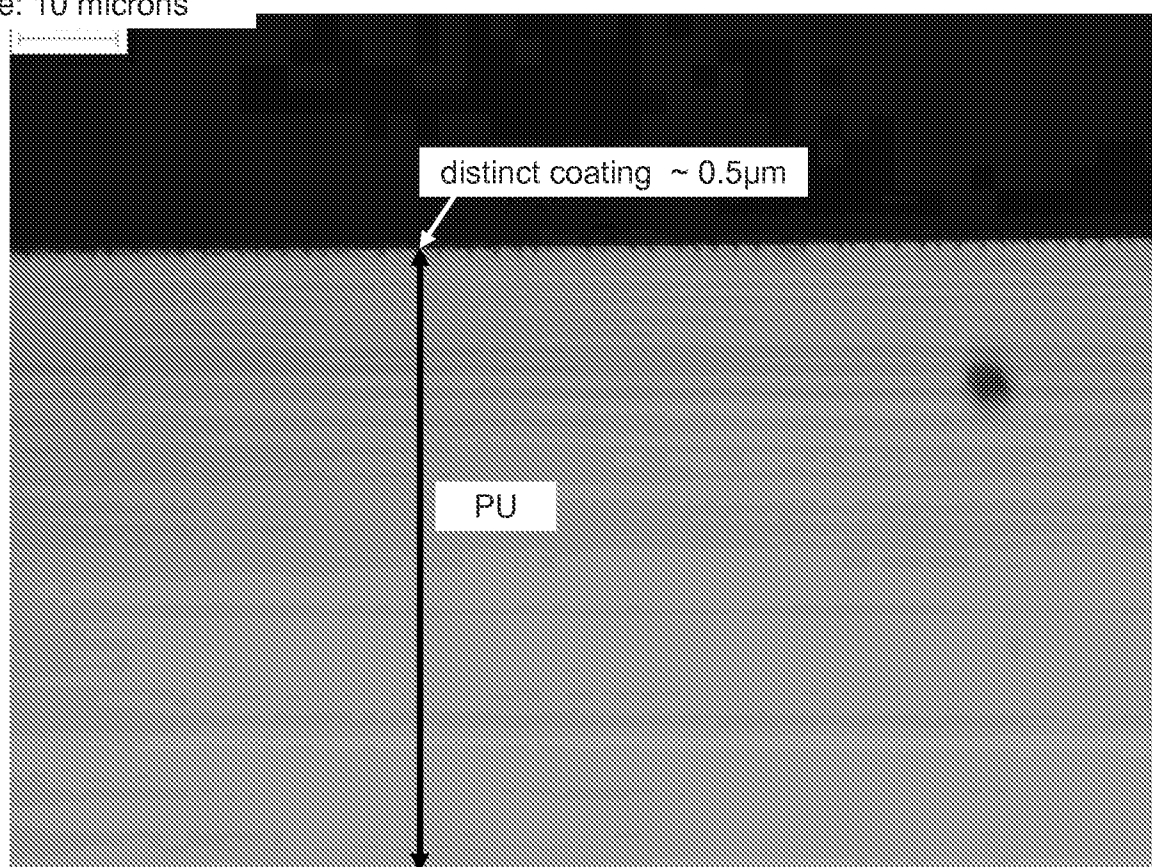**FIGURE 11**

10/10

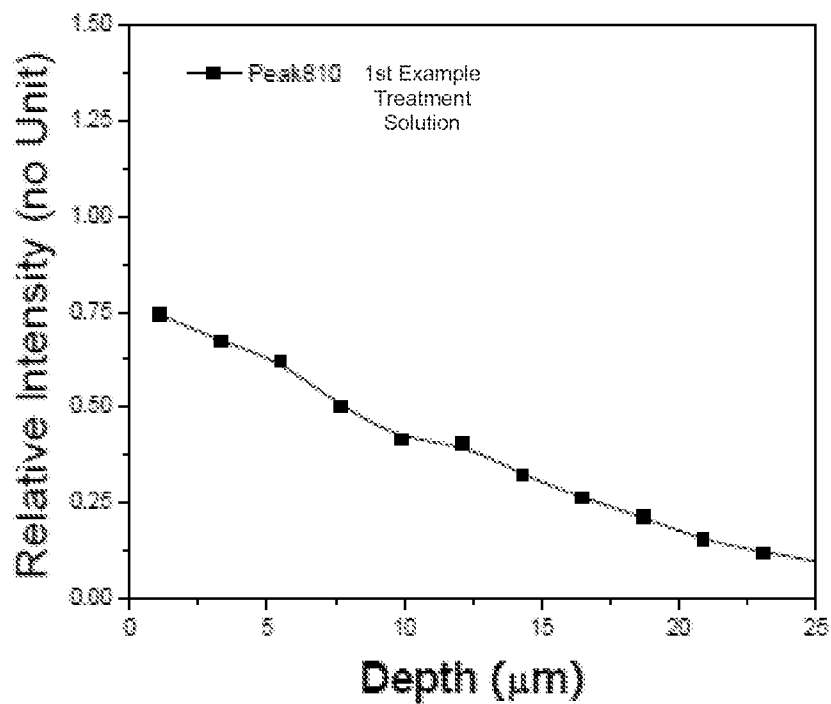**FIGURE 12**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/027957

A. CLASSIFICATION OF SUBJECT MATTER
INV. C08J7/04 C08J7/06 C08K3/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C08J C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, CHEM ABS Data, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/324536 A1 (SUN YUYU [US] ET AL) 31 December 2009 (2009-12-31)	1,2,5-7, 24
Y	paragraphs [0034], [0072], [0121] - [0125]; claims	14
X	US 2009/286878 A1 (ELDER STEWART TODD [US] ET AL) 19 November 2009 (2009-11-19)	1,2,5-7, 21-24
Y	paragraphs [0014], [0127], [0128], [0158] - [0170], [0174], [0177], [0179], [0181], [0233]; claims	14
X	US 2009/324738 A1 (KRONGAUZ VADIM V [US]) 31 December 2009 (2009-12-31)	1,2,5-7, 11-13, 15-24
Y	paragraphs [0013], [0014], [0016], [0021]; claims; examples	14
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 May 2012

Date of mailing of the international search report

06/06/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Frison, Céline

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/027957

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	SANCHEZ-GARCIA, M. D. ET AL: "Novel polycaprolactone nanocomposites containing thymol of interest in antimicrobial film and coating applications", JOURNAL OF PLASTIC FILM & SHEETING, 24(3-4), 239-251 CODEN: JPFSEH; ISSN: 8756-0879, 2008, XP009159154, abstract Introduction; Preparation of Nanocomposites -----	1,2, 11-13, 15-20, 23,24
Y	DATABASE CA [Online] CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; YAMAMOTO, IKUO ET AL: "Fluorine-containing silsesquioxane polymers with excellent repellency, preparation thereof, and their uses", XP002675472, retrieved from STN Database accession no. 2005:1074007 abstract & JP 2005 272506 A (DAIKIN INDUSTRIES, LTD., JAPAN) 6 October 2005 (2005-10-06) -----	14
Y	US 2010/297376 A1 (SHI MING KUN [US] ET AL) 25 November 2010 (2010-11-25) paragraphs [0024], [0025]; claims; examples -----	14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/027957

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009324536 A1	31-12-2009	CA 2728286 A1 CN 102131836 A EP 2303936 A2 US 2009324536 A1 WO 2009158285 A2	30-12-2009 20-07-2011 06-04-2011 31-12-2009 30-12-2009
US 2009286878 A1	19-11-2009	AU 2009248234 A1 CA 2723024 A1 CN 102131394 A EP 2315528 A2 JP 2011520825 A KR 20110006681 A US 2009286878 A1 WO 2009138341 A2	19-11-2009 19-11-2009 20-07-2011 04-05-2011 21-07-2011 20-01-2011 19-11-2009 19-11-2009
US 2009324738 A1	31-12-2009	AU 2009265079 A1 CA 2724698 A1 EP 2304077 A2 US 2009324738 A1 WO 2010002524 A2	07-01-2010 07-01-2010 06-04-2011 31-12-2009 07-01-2010
US 2010297376 A1	25-11-2010	US 2010297376 A1 WO 2011146188 A1	25-11-2010 24-11-2011