

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
10 April 2003 (10.04.2003)


PCT

(10) International Publication Number  
WO 03/029111 A2

- (51) International Patent Classification<sup>7</sup>: **B65G**
- (21) International Application Number: PCT/US02/29720
- (22) International Filing Date:  
19 September 2002 (19.09.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/966,284 28 September 2001 (28.09.2001) US
- (71) Applicant: **SEALY TECHNOLOGY, LLC** [US/US];  
One Office Parkway, Trinity, NC 27370 (US).
- (72) Inventors: **HAUBERT, Thomas D.**; 274 Winthrop Road, Columbus, OH 43214 (US). **BULLEN, Lawrence, C.**; 5711 County Road 13, Centerbury, OH 43011 (US). **SCOTT, Bryan, K.**; 541 Hackberry Drive, Westerville, OH 43081 (US). **SCHLUER, Larry**; 22768 Cemetary Road, Sugar Grove, OH 43155 (US). **DEMOSS, Larry**; 3204 Peninsula Drive, Jamestown, NC 27282 (US).
- (74) Agent: **SCOTT, James**; Arter & Hadden, LLP, 1100 Huntington Building, 925 Euclid Avenue, Cleveland, OH 44115 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CONVEYANCE SYSTEM FOR INTERFACE WITH COMPONENT PRODUCTION AND ASSEMBLY EQUIPMENT

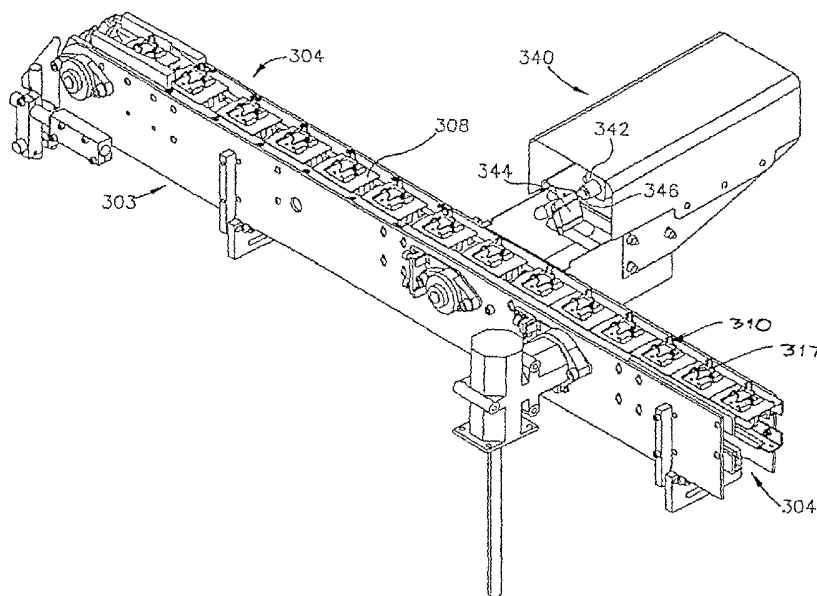

(57) Abstract: Machinery for automated manufacture of formed wire structures such as innerspring assemblies for mattresses and seating and flexible support structures includes one or more coil formation devices configurable to produce helical spring coils having a terminal convolution which extends beyond an end of the coil; includes a conveyor system having a plurality of flights slidably mounted upon a continuous track and connected to a chain and driven by an index driver, the flights being connected to a drive system which enables variable spacing between the flights so that the conveyor can be loaded with articles at one spacing interval and be unloaded at a different interval.



WO 03/029111 A2



**Published:**

— *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

### **Title of the Invention**

## **CONVEYANCE SYSTEM FOR INTERFACE WITH COMPONENT PRODUCTION AND ASSEMBLY EQUIPMENT**

5

### **Related Applications**

This application is a continuation-in-part of U.S. application serial no. 09/723,668,  
filed November 28, 2000, which is a continuation-in-part of U.S. application serial no.

10 09/151,872, filed September 11, 1998, now U.S. Patent No. 6,155,310.

### **Field of the Invention**

The present invention pertains generally to automated production processes and  
machinery and, more particularly, to machinery for automated manufacture and assembly of  
15 multiple components into a subassembly or finished product.

### **Background of the Invention**

Innerspring assemblies, for mattresses, furniture, seating and other resilient structures,  
were first assembled by hand by arranging coils or springs in a matrix and interconnecting  
20 them with lacing or tying wires. The coils are connected at various points along the axial  
length, according to the innerspring design. Machines which automatically form coils have  
been mated with various conveyances which deliver coils to an assembly point. For example,  
U.S. Patent Nos. 3,386,561 and 4,413,659 describe apparatus which feeds springs from an  
automated spring former to a spring core assembly machine. The spring or coil former  
25 component is configured to produce a particular coil design. Most coil designs terminate at  
each end with one or more turns in a single plane. This simplifies automated handling of the  
coils, such as conveyance to an assembler and passage through the assembler. The coil  
forming machinery is not easily adapted to produce coils of alternate configurations, such as  
coils which do not terminate in a single plane.

30 The timed conveyance of coils from the former to the assembler is always  
problematic. Automated production is interrupted if even a single coil is misalign in the  
conveyor. The conveyor drive mechanism must be perfectly timed with operation of the coil

former and a transfer machine which picks up an entire row of coils from a conveyor and loads it into the innerspring assembler.

The spring core assembly component of the prior art machines is typically set up to accommodate one particular type of spring or coil. The coils are held within the machine with the base or top of the coil fit over dies or held by clamping jaws, and tied or laced together by a helical wire or fastening rings. This approach is limited to use with coils of particular configurations which fit over the dies and within the helical lacing and knuckling shoes. Such machines are not adaptable to use with different coil designs, particularly coils with a terminal convolution which extends beyond a base or end of the coil. Also, these types of machines are prone to malfunction due to the fact that two sets of clamping jaws, having multiple small parts and linkages moving at a rapid pace, are required for the top and bottom of each coil.

### Summary of the Invention

The present invention overcomes these and other disadvantages of the prior art by providing novel machinery for complete automated manufacture of formed wire innerspring assemblies from wire stock. In accordance with one aspect of the invention, there is provided an automated innerspring assembly system for producing innerspring assemblies having a plurality of wire form coils interconnected in an array, the automated innerspring assembly system having at least one coil formation device operative to form wire stock into individual coils configured for assembly in an innerspring assembly, and operative to deliver individual coils to a coil conveyor, a coil conveyor associated with the coil formation device and operative to receive coils from the coil formation device and convey coils to a coil transfer machine, a coil transfer machine operative to remove coils from the coil conveyor and present coils to an innerspring assembler, an innerspring assembler operative to receive and engage a plurality of coils arranged in a row, to position a received row of coils parallel and closely adjacent to a previously received row of coils, to fixedly compress two adjacent rows of coils in a fixed position and interconnect the adjacent rows of coils with fastening means, and to advance interconnected rows of coils out of the assembler and receive and engage a subsequent row of coils.

In accordance with another aspect of the invention, there is provided a system for automated manufacture of innerspring assemblies having a plurality of generally helical coils interconnected in a matrix array, the system having a coil formation device operative to

produce individual coils for an innerspring assembly, the coil formation device having a pair of rollers for drawing wire stock into a coil forming block, a cam driven forming wheel which imparts a generally helical shape to the wire stock fed through the coil forming block, a guide pin which sets a pitch to the generally helical shape of the coil, and a cutting device which cuts a formed coil from the wire stock, the coil forming block having a cavity in which a terminal convolution of a coil having a diameter less than a body of the coil fits during formation of the coil, and into which the cutting device extends to cut the coil from the wire stock at an end of the terminal convolution, at least one coil head forming station having one or more punch dies for forming non-helical shapes in coils, the coil head forming station having a jig which accommodates a terminal convolution of a coil which extends beyond a portion of the coil to be formed in a non-helical shape by the coil head forming station, a tempering device which passes an electrical current through a coil, and a geneva having a plurality of arms, each arm having a gripper operative to grip a coil from the coil forming block, advance the coil to a coil head forming station and to the tempering device, and from the tempering device to a coil conveyor; a coil conveyor operative to convey coils from the coil formation device to a coil transfer machine, the coil conveyor having a plurality of flights slidably mounted upon a track which extends along upper and lower sides of the conveyor, each flight connected to a main chain mounted upon sprockets at each end of the coil conveyor, each flight having a clip configured to engage a coil, an indexer flight drive mechanism operative to advance the flights along the conveyor tracks, a coil orientation device operative to uniformly orient each of the coils in the flight clips, and a braking mechanism for retarding the advance of flights along the conveyor tracks; a coil transfer machine having a plurality of arms, each arm having a gripper operative to grip a coil and remove it from a flight clip of the conveyor, and present the gripped coil to an innerspring assembler, the coil transfer movably mounted proximate to the conveyor and to the innerspring assembler; an innerspring assembler operative to interconnect rows of coils presented by the coil transfer machine, the innerspring assembler having two sets of upper and lower coil-engaging dies mounted upon carrier bars, whereby rows of coils can be inserted into the innerspring assembler between upper and lower coil-engaging dies by the coil transfer machine, the innerspring assembler further comprising an elevator assembly operative to vertically translate the carrier bars toward and away from terminal ends of coils in the innerspring assembler, and an indexer assembly operative to horizontally translate the carrier bars, whereby the two sets of upper and lower coil-engaging dies and corresponding

produce individual coils for an innerspring assembly, the coil formation device having a pair of rollers for drawing wire stock into a coil forming block, a cam driven forming wheel which imparts a generally helical shape to the wire stock fed through the coil forming block, a guide pin which sets a pitch to the generally helical shape of the coil, and a cutting device which cuts a formed coil from the wire stock, the coil forming block having a cavity in which a terminal convolution of a coil having a diameter less than a body of the coil fits during formation of the coil, and into which the cutting device extends to cut the coil from the wire stock at an end of the terminal convolution, at least one coil head forming station having one or more punch dies for forming non-helical shapes in coils, the coil head forming station having a jig which accommodates a terminal convolution of a coil which extends beyond a portion of the coil to be formed in a non-helical shape by the coil head forming station, a tempering device which passes an electrical current through a coil, and a geneva having a plurality of arms, each arm having a gripper operative to grip a coil from the coil forming block, advance the coil to a coil head forming station and to the tempering device, and from the tempering device to a coil conveyor; a coil conveyor operative to convey coils from the coil formation device to a coil transfer machine, the coil conveyor having a plurality of flights slidably mounted upon a track which extends along upper and lower sides of the conveyor, each flight connected to a main chain mounted upon sprockets at each end of the coil conveyor, each flight having a clip configured to engage a coil, an indexer flight drive mechanism operative to advance the flights along the conveyor tracks, a coil orientation device operative to uniformly orient each of the coils in the flight clips, and a braking mechanism for retarding the advance of flights along the conveyor tracks; a coil transfer machine having a plurality of arms, each arm having a gripper operative to grip a coil and remove it from a flight clip of the conveyor, and present the gripped coil to an innerspring assembler, the coil transfer movably mounted proximate to the conveyor and to the innerspring assembler; an innerspring assembler operative to interconnect rows of coils presented by the coil transfer machine, the innerspring assembler having two sets of upper and lower coil-engaging dies mounted upon carrier bars, whereby rows of coils can be inserted into the innerspring assembler between upper and lower coil-engaging dies by the coil transfer machine, the innerspring assembler further comprising an elevator assembly operative to vertically translate the carrier bars toward and away from terminal ends of coils in the innerspring assembler, and an indexer assembly operative to horizontally translate the carrier bars, whereby the two sets of upper and lower coil-engaging dies and corresponding

carrier bars can converge and retract relative to rows of coils in the innerspring assembler, and can laterally exchange positions to advance rows of coils out of the innerspring assembler, the innerspring assembler further comprising a lacing wire feeder operative to feed a lacing wire through an opening formed by adjacent coil-engaging dies and about portions of  
5 coils engaged in the dies to thereby interconnect rows of coils.

These and other aspects of the invention are herein described in particularized detail with reference to the accompanying Figures.

### Brief Description of the Figures

10 In the accompanying Figures:

FIG. 1 is a plan view of the machinery for automated manufacture of formed wire innerspring assemblies of the present invention;

FIG. 2 is an elevational view of a coil former machine of the present invention;

15 FIG. 3A is a perspective view of a conveyance device of the present invention;

FIG. 3B is a perspective view of the conveyance device of FIG. 3A;

FIG. 3C is a cross-sectional side view of the conveyance device of FIG. 3A;

FIG. 3D is a sectional view of the conveyance device of FIG. 3D;

FIG. 3E is a sectional view of the conveyance device of FIG. 3E;

20 FIG. 3F is a perspective view of a conveyance device of an alternative embodiment;

FIG. 3G is a cross-sectional side view of the conveyance device of FIG. 3F;

FIG. 3H is a perspective view of a conveyance member of FIG. 3F;

FIG. 3I is a sectional view of the conveyance device of FIG. 3F;

FIG. 3J is a top view of a conveyance member of FIG. 3F;

25 FIG. 4A is a side elevation of a coil transfer machine used in connection with the machinery for automated manufacture of formed wire innerspring assemblies of the present invention;

FIG. 4B is an end elevation of the coil transfer machine of FIG. 4A;

30 FIG. 5 is a perspective view of an innerspring assembly machine of the present invention;

FIG. 6A is an end view of the innerspring assembly machine of FIG. 5;

FIG. 6B is a perspective view of a knuckler die attachable to the innerspring assembler;

FIGS. 7A-7I are schematic diagrams of coils, coil-receiving dies, and die support pieces as arranged and moved within the innerspring assembly machine of FIG. 5;

FIGS. 8A and 8B are cross-sectional and top views of a coil-engaging die of the present invention;

5 FIGS. 9A and 9B are end views of the innerspring assembly machine of FIG. 5;

FIG. 10A is an end view of the innerspring assembly machine of FIG. 5;

FIG. 10B is an isolated perspective view of an indexing subassembly of the innerspring assembly machine of FIG. 5;

10 FIG. 11 is an isolated elevational view of a clamp subassembly of the innerspring assembly machine of FIG. 5;

FIG. 12 is a partial plan view of an innerspring assembly producible by the machinery of the present invention;

FIG. 13 is a partial elevational view of the innerspring assembly of FIG. 11;

FIG. 14A is a profile view of a coil of the innerspring assembly of FIG. 11;

15 FIG. 14B is an end view of a coil of the innerspring assembly of FIG. 11;

FIGS. 15A-15D are cross-sectional views of a belt-type coil conveyance system of the present invention;

FIG. 16 is a top view of a chain winder version of a coil conveyance system of the present invention;

20 FIGS. 17A-17G are elevational views of an alternate coil connecting mechanism of the present invention;

FIGS. 18A-18G are elevational views of an alternate coil connecting mechanism of the present invention, and

25 FIGS. 19A-19F are elevational views of an alternate coil connecting mechanism of the present invention.



### Detailed Description of Preferred and Alternate Embodiments

The described machinery and methods can be employed to produce innerspring assemblies 1, including mattress or furniture or seating innerspring assemblies, in a general form as depicted in FIGS. 12 and 13. The innerspring assembly 1 includes a plurality of springs or coils 2 in an array such as an orthogonal array, with axes of the coils generally parallel and ends 3 of the coils generally co-planar, defining resilient support surfaces of the innerspring assembly 1. The coils 2 are "laced" or wirebound together in the array by, for example, generally helical lacing wires 4 which run between rows of the coils and which wrap or lace around tangential or overlapping segments of adjacent coils as shown in FIG. 13. Other means of coil fastening can be employed within the scope of the invention.

The coils formed by the coil formation components of the machinery may be of any configuration or shape formable from steel wire stock. Typically, innerspring coils have an elongated coil body with a generally helical configuration, terminating at the ends with a planar wire form which serves as a base or head of the coil to which loads are applied. Other coil forms and innerspring assemblies not expressly shown are nonetheless producible by the described machinery and are within the scope of the invention.

The following machinery and method descriptions are made with reference to a particular mattress innerspring with a particular type of coil 2 shown in isolation in FIGS. 14A and 14B. An example of this type of coil is described and claimed in U.S. Patent No. 5,013,088. The coil 2 has a generally helical elongate coil body 21 which terminates at each end with a head 22. Each head 22 includes a first offset 23, second offset 24, and third offset 25. A generally helical terminal convolution 26 extends from the third offset 25 axially beyond the head. A force responsive gradient arm 27 may be formed in a segment of the helical body 21 leading or transitioning to the coil head 22.

As shown in FIG. 14B, the first offset 23 may include a crown 28 which positions the offset a slightly greater distance laterally from the longitudinal axis of the coil. The second and third offsets 24 and 25 are also outwardly offset from the longitudinal axis of the coil. As shown in Figure 13, the first and third offsets 23 and 25 of each coil overlap the offsets of adjacent coils and are laced together by the helical lacing wires 4, and the terminal convolutions 26 extend beyond (above and below) the points of laced attachment of the coil head offsets.

FIG. 1 illustrates the main components of the automated innerspring manufacturing system 100 of the invention. Coil wire stock 110 is fed from a spool 200 to one or more coil former machines 201, 202 which produce coils such as shown in FIGS. 14A, 14B or any other types of generally helical coils or other discrete wire form structures. The coils 2 are loaded into one or more coil conveyors 301, 302 which convey coils to a coil transfer machine 400. The coil transfer machine 400 loads a plurality of coils into an innerspring assembly machine 500 which automatically assembles coils into the described innerspring array by attachment with, for example, a helical formed lacing wire stock 510 spool-fed to the assembler through a helical wire former and feeder 511, also referred to as a coil interconnection device.

Each of the main components of the system 100 are now described individually, followed by a description of the system operation and the resulting wire form structure innerspring assembly. Although described with specific reference to the automated formation and assembly of a particular innerspring, it will be appreciated that the various components of the invention can be employed to produce any type of wire form structure.

#### Coil Formation

The coil formers 201, 202 may be, for example, a known wire formation machine or coiler, such as a Spuhl LFK coiler manufactured by Spuhl AG of St. Gallen, Switzerland. As shown schematically in FIG. 2, the coil formers 201, 202 feed wire stock 110 through a series of rollers to bend the wire in a generally helical configuration to form individual coils. The radius of curvature in the coils is determined by the shapes of cams (not shown) in rolling contact with a cam follower arm 204. The coil wire stock 110 is fed to the coiler by feed rollers 206 into a forming block 208. As the wire is advanced through a guide hole in the forming block 208, it contacts a coil radius forming wheel 210 attached to an end of the cam follower arm 204. The forming wheel 210 is moved relative to the forming block 208 according to the shapes of the cams which the arm 204 follows. In this manner, the radius of curvature of the wire stock is set as the wire emerges from the forming block.

A helix is formed in the wire stock after it passes the forming wheel 210 by a helix guide pin 214 which moves in a generally linear path, generally perpendicular to the wire stock guide hole in the forming block 208, in order to advance the wire in a helical path away from the forming wheel 210.

Once a sufficient amount of wire has been fed through the forming block 208, past the forming wheel 210 and the helix guide pin 214, to form a complete coil, a cutting tool 212 is advanced against the forming block 208 to sever the coil from the wire stock. The severed coil is then advanced by a geneva 220 to subsequent formation and processing stations as further described below.

As shown in FIG. 14B, the coil 2 has several different radii of curvature in the helical coil body. In particular, the radius or total diameter of the terminal convolution 26 is significantly less than that of the main coil body 21. Furthermore, the wire terminates and must be severed at the very end of the terminal convolution 26. This particular coil structure presents a problem with respect to the forming block 208 which must be specifically configured to accommodate the terminal convolution 26, allow the larger diameter coil body to advance over the forming block, and allow the cutting tool 212 to cut the wire at the very end of the terminal convolution.

Accordingly, as shown in FIG. 2, the forming block 208 of the invention includes a cavity 218 dimensioned to receive a terminal convolution of the coil. The cutting tool 212 is located proximate to the cavity 218 in the forming block 208 to sever the wire at the terminal convolution.

A geneva 220 with, for example, six geneva arms 222, is rotationally mounted proximate to the front of the coiler. Each geneva arm 222 supports a gripper 224 operative to grip a coil as it is cut from the continuous wire feed at the guide block 208. The geneva rotationally indexes to advance each coil from the coiler guide block to a first coil head forming station 230. Pneumatically operated punch die forming tools 232 are mounted in an annular arrangement about the first coil head forming station 230 to form the coil offsets 23-25, the force responsive gradient arm 27, or any other contours or bends in the coil head at one end of the coil body. The geneva then advances the coil to a second coil head forming station 240 which similarly forms a coil head by punch dies 232 at an opposite end of the coil. The geneva then advances the coil to a tempering station 250 where an electrical current is passed through the coil to temper the steel wire. The next advancement of the geneva inserts the coil into a conveyer, 301 or 302, which carries the coils to a coil transfer machine as further described below. As shown in FIG.1, one or more coil formation machines may be used simultaneously to supply coils in the innerspring assembly system.

#### Coil Conveyance

As shown in FIG. 1, coils 2 are conveyed in single file fashion from each of the coil formation machines 201, 202 by respective similarly constructed coil conveyors 301, 302 to a coil transfer machine 400. Although described as coil conveyors in the context of an innerspring manufacturing system, it will be appreciated that the conveyance systems of the invention are readily adaptable and applicable to any type of system or installation wherein conveyance of any type of object or objects is required from one point to another, or along and path or route. As further shown in FIGS. 3A-3E, conveyor 301 includes a box beam 303 which extends from the geneva 220 to a coil transfer machine 400. Each beam 303 includes upper and lower tracks 304 formed by opposed rails 306, mounted upon side walls 307. The overall structure of the beam 303, tracks 304 and guide rails 306, and equivalent structures, is also referred to simply as a "guide rail" or "rail". A plurality of conveyor members or flights 308 are slidably mounted between rails 306. Each flight 308 has an article engagement device 310, which in this particular embodiment includes a clip 317 (also referred to as a flight clip), configured to engage a portion of a coil, such as two or more turns of the helical body of a coil, as it is loaded by the geneva 220 to the conveyor. As further shown in FIGS. 3C and 3E, each flight 308 has a body 309 with opposed parallel flanges 311 which overlap and slide between rails 306. A bracket 312 depends from the body 309 of each flight. Each bracket is attached to a pair of adjacent pins 313 of links 314 of a main chain 315, with additional links 314 between each of the flights. The total length of the links 314 between two adjacent flights is greater than the distance between the brackets 312 of the adjacent flights when they are abutted end-to-end. This enables adjacent flights to be separated at variably spaced intervals, as shown in FIG. 3G. This provides a flexible conveyance system which can interface with different types of systems which may load or unload articles to and from each of the flights of the conveyor system. The main chain 315 extends the length of the beam 302 and is mounted on sprockets 316 at each end of each beam. The flights 308 are thus evenly spaced along the main chain 315. The described chain attachment structure of the flights is just one embodiment of what is generally referred to as the drive line which moves/translates the flights along the guide rail.

To translate the flights 308 in an evenly spaced progression along track 304, an indexer 320, operatively connected to the chain 315, is mounted within the box beam 303. The index 320 includes two parallel indexer chains 321 which straddle the main chain 315 and ride on co-axial pairs of sprockets 322. The sprockets 322 are mounted upon shafts 324. The chains 321 carry attachments 323 at an equidistant spacing, equal to the spacing of the

flights 308 when the main chain 315 is taut. Once the main chain is no longer driven by the indexer, the main chain goes slack and the flights begin to stack against one another, as shown at the right side of FIGS. 3A, 3B, 3F and 3G. Now the pitch between flights is no longer determined by the distance between attachments on the main chain, but by the length  
5 of the flight bodies 309 which abut. This allows the conveyor to be loaded at one pitch, and unloaded at a different pitch.

The conveyor is further provided with a brake mechanism. As shown in FIG. 3D, a brake mechanism includes a linear actuator 331 with a head 332 driven by an air cylinder 330 or equivalent means to apply a lateral force to a flight positioned next to the actuator, thus  
10 pinching the flight against the interior side of the track 304. By controlling the air pressure in the air cylinder 330, the degree and timing of the resulting braking action of flights along the conveyor can be selectively controlled.

Alternatively, as shown in FIG. 3E, a fixed rate spring 334 may be incorporated into the horizontal flange of a track 304 where it is passed by each flight and applies a constant  
15 braking force to each of the flights. The size or rate of the spring can be selected depending upon the amount of drag desired at the brake point along the conveyor track.

Associated with each coil conveyor is a coil straightener, shown generally at 340 in FIGS. 3A and 3B. The coil straightener 340 operates to uniformly orient each coil within a flight clip 310 for proper interface with coil transfer machinery described below. Each  
20 straightener 340 includes a pneumatic cylinder 342 mounted adjacent beam 303. An end effector 344 is mounted upon a distal end of a rod 346 extending from the cylinder 342. The pneumatic cylinder is operative to impart both linear and rotary motion to the rod 346 and end effector 344. In operation, as a coil is located in front of the straightener 340 during passage of a flight, the end effector 344 translates out linearly to engage the presented end of the coil  
25 and simultaneously or subsequently rotates the coil within the flight clip to a uniform, predetermined position. The helical form of the coil body engaged in the flight clip allows the coil to be easily turned or "screwed" in the clip 310 by the straightener. Each coil in the conveyors is thereby uniformly positioned within the flight clips downstream of the straightener.

Further inventive aspects and alternate embodiments of the conveyance system of the invention are now described with reference to FIGS. 3F-3J. FIGS. 3F and 3G show the respective conveyor system structures depicted in FIGS. 3A-3C in operational contact with  
30 coils 2, as an example of a particular type of component which can be conveyed by the

system.. Although shown in the context of conveying coils, it is understood that the conveyance system is able to be employed for conveyance of any type of component or part which is engageable with the flights. As shown in FIGS. 3F-3J, each flight 308 is dedicated to the transport of a single coil 2 or other articles to be conveyed. A drive system, e.g. the main chain 315, is provided for translating the conveyance members or flights 308. The structure which establishes the spacing between the flights is the same as in the embodiment of FIGS. 3A-3E, in order to define: a first equidistant spacing between conveyance members 308, to define one pitch or spacing between articles to be conveyed (preferably corresponding to a loading position); and another pitch or spacing between conveyance members 308.

One pitch enables a machine operation to be performed on the articles, for example operation of the coil straightener 340 to uniformly orient the coils 2 to a desired orientation for unloading, while another pitch is available for a different production or transport operation, such as transfer of the coils off of the conveyor. This dynamically variable spacing of the flights upon the conveyor, without interruption of production flow, is especially desirable in multiple task production systems.

The flights 308 include a flight clip 317 for holding the coil in place. A special feature of this embodiment is a non-skid contact surface on each flight for positive gripping of components being conveyed. In the case of coils, this serves to hold each respective coil in place and resist movement of the coil relative to the clip 310, and in particular to resist rotation and disorientation of the coil relative to the flight. The non-skid contact surface is in one form a friction plate 370 for resisting rotational or translational movement of the coil within the clip. Preferably, the friction plate 370 is coated with an abrasive material of for example 80 grit and is connected to the flight clip 317 by a hinge 372 which is preferably integrally formed with the friction plate 370. The non-skid arrangement also includes a spring 374 for biasing the friction plate 370 about the hinge 372 into engagement with the flight clip 310, for resisting motion of the coil. As illustrated, the spring 374 can be a coil spring, but it can also be a leaf spring or any other type of biasing member.

As with the embodiment of FIGS. 3A-3E, the conveyor system shown in FIGS. 3F-3J also includes a support structure with having opposed rails 306, so as to allow the plurality of flights 308 to be slidably mounted between the rails 306. The rails can be formed of a low friction material to allow smooth sliding contact between the rails 306 and the opposed parallel flanges 311 of the flight body. The low friction material is preferably a polymeric

material selected from a group including "Teflon" and "Nylon" or other engineered plastic bearing materials.

The described coil conveyance can also be accomplished by certain alternative mechanisms which are also a part of the invention. As shown in FIGS. 15A-15D, an alternate device for conveying coils from a coil former to a coil transfer station is a belt system, indicated generally at 350, which includes a pocketed flap belt 352 and an opposing belt 354. Coils 2 are positioned by a geneva to extend axially between the belts 352 and 354, as shown in FIG. 15A. The flap belt 352 has a primary belt 353 and a flap 355 attached to the primary belt 353 along a bottom edge. As shown in FIG. 15B, a fixed opening wedge 356 spreads the flap 355 away from the primary belt 353 to facilitate insertion of the coil head into the pocket formed by the flap and primary belt. An automated insertion tool may be used to urge the coil heads into the pocket. As shown in FIG. 15C, a straightening arm 358 is configured to engage a portion of the coil head, and driven to uniformly orient the coils within the pocket. Once inserted into the pocket and correctly oriented, the coils are held in position relative to the belts by a compressing bar 360 against which the exterior surface of flap 355 bears. The compressing bar 360 is movable at the region where the coils are removed from the belt by a coil transfer machine, to release the pressure on the flap to allow removal of the coils from the pocket. As further shown, the primary belt 353 and opposing belt 354 are each attached to a timing belt 362, a flexible plastic backing 364, and a backing plate 366 which may be steel or other rigid material. This construction gives the belt the necessary rigidity to securely hold the coils between them, and sufficient flexibility to be mounted upon and driven by pulleys, and to make turns in the conveyance path.

FIG. 16 illustrates pairs of spring winders 360 which can be employed as alternate coil conveyance mechanisms in connection with the system of the invention. Each spring winder 360 includes a primary chain 361 and secondary chain 362 driven by sprockets 364 to advance at a common speed from a respective coil former to a coil transfer station or assembler as further described below. Coil engaging balls 366, dimensioned to fit securely within the terminal convolutions of the coils, are mounted at equal spacings along the length of each chain. The chains are timed to align the balls 366 in opposition for engagement of a coil presented by the geneva. Each chain may be selectively controlled to change the relative angle of the coils as they approach the coil transfer stage, as shown at the right side of FIG. 16. Magnets may be used in addition to or in place of balls 366 to hold the coils between the sets of chains.

### Coil Transfer

As shown in FIGS. 1 and 4A and 4B, each conveyor 301, 302 positions a row of coils in alignment with a coil transfer machine 400. The coil transfer machine includes a frame 402 mounted on rollers 404 on tracks 406 to linearly translate toward and away from conveyors 301, 302 and the innerspring assembler 500. A linear array of arms 410 with grippers 412 grip an entire row of coils from the flights 304 of one of the conveyors and transfer the row of coils into the innerspring assembler. The number of operative arms 410 on the coil transfer machine is equal to a number of coils in a row of an innerspring to be produced by the assembler. By operation of a drive linkage schematically shown at 416, in combination with linear translation of the machine upon tracks 406. The coil transfer machine lifts an entire row of coils from one of the conveyors (at position A) and inserts them into an innerspring assembly machine 500. Such a machine is described in U.S. Patent No. 4,413,659, the disclosure of which is incorporated herein by reference. The innerspring assembler 500 engages the row of coils presented by the transferor as described below. The coil transfer machine 400 then picks up another row of coils from the other parallel conveyor (301 or 302) and inserts them into the innerspring assembly machine for engagement and attachment to the previously inserted row of coils. After the coils are removed from both of the conveyors, the conveyors advance to supply additional coils for transfer by the coil transfer machine into the innerspring assembler.

### Innerspring Assembler

The primary functions of the innerspring assembler 500 are to:

(1) grip and position at least two adjacent parallel rows of coils in a parallel arrangement; (2) connect the parallel rows of coils together by attachment of fastening means, such as a helical lacing wire to adjacent coils; and

(3) advance the attached rows of coils to allow introduction of an additional row of coils to be attached to the previously attached rows of coils, and repeat the process until a sufficient number of coils have been attached to form a complete innerspring assembly.

As shown in FIGS. 5, 6, 9-10, the innerspring assembler 500 is mounted upon a stand 502 of a height appropriate to interface with the coil transfer machine 400. The innerspring assembler 500 includes two upper and lower parallel rows of coil-receiving dies, 504A and 504B which receive and hold the terminal ends of each of the coils, with the axes of the coils in a vertical position, to enable insertion or lacing of fastening means such as a helical wire



between the coils, and to advance attached rows of coils out of the innerspring assembler. The dies 504 are attached side-by-side upon parallel upper and lower carrier bars 506A, 506B which are vertically and horizontally (laterally) translatable within the assembler. The innerspring assembler operates to move the carrier bars 506 with the attached dies 504 to clamp down on two adjacent rows of coils, fasten or lace the coils together to form an innerspring assembly, and advance attached rows of coils out of the assembler to receive and attach a subsequent row of coils. More specifically, the innerspring assembler operates in the following basic sequence, described with reference to FIGS. 7A-7I:

- 1) a first upper and lower pair of carrier bars 506A (with the attached dies 504A) are vertically retracted to allow for introduction of a row of coils from the coil transfer machine (FIG. 7A);
- 2) the first upper and lower pair of carrier bars 506A are vertically converged upon a newly inserted row of coils (FIG. 7C);
- 3) adjacent rows of coils clamped between the upper and lower dies 504 are attached by fastening or lacing through aligned openings in the adjacent dies (FIG. 7D);
- 4) the second upper and lower pair of carrier bars 506B are vertically retracted to release a preceding row of coils from the dies (FIG. 7E),
- 5) the upper and lower carrier bars 506A are laterally translated to the position previously occupied by upper and lower carrier bars 506B, to advance the attached rows of coils out of the assembler (FIG. 7I), and
- 6) carrier bars 506B are laterally translated opposite the direction of translation of carrier bars 506A, to swap positions with carrier bars 506A to position the dies to receive the next row of coils to be inserted (FIG. 7I).

In FIG. 7A coils are presented to the innerspring assembler by the coil transfer machine in the indicated direction. Upper and lower rows of dies 504A, mounted upon upper and lower carrier bars 506A, are vertically retracted to allow the entire uncompressed length of the coils to be inserted between the dies. A previously inserted row of coils is compressed between upper and lower dies 504B, mounted upon upper and lower carrier bars 506B positioned laterally adjacent to carrier bars 506A (FIG. 7B). The upper and lower dies 504A are converged upon the terminal ends of the newly presented coils to compress the coils to an extent equal to the preceding coils in dies 504B (FIG. 7C). The horizontally adjacent carrier bars 506A and 506B are held tightly together by back-up bars 550 (schematically represented in FIG. 7D), actuated by a clamping mechanism described below. With the dies clamped

together, the adjacent rows of coils compressed between the upper and lower adjacent dies 504A and 504B are fastened together by insertion of a helical lacing wire 4 through aligned cavities 505 in the outer abutting side walls of the dies, and through which a portion of each coil in a die passes (FIG. 7E). The lacing wire 4 is crimped at several points to secure it in place upon the coils. When the attachment of two adjacent rows of coils within the dies is complete, clamps 550 are released (FIG. 7F) and the upper and lower dies 504B are vertically retracted (FIG. 7G). The upper and lower dies 504A and 504B are then laterally translated or indexed in the opposite directions indicated (in FIG. 7I) or swapped, to laterally exchange positions, whereby one row of attached coils are advanced out of the innerspring assembler, and the empty dies 504B are positioned for engagement with a newly introduced row of coils. The described cycle is then repeated with a sufficient number of rows of coils interconnected to form an innerspring assembly which emerges from the assembler onto a support table 501, as shown in FIGS. 1 and 5.

As shown in FIGS. 8A and 8B, the coil-engaging dies 504 are generally rectangular shaped blocks having tapered upward extending flanges 507 contoured to guide the head 22 of the coil 2 about the exterior of the die to rest upon a top surface 509 of side walls 511 of the die. As shown in FIG. 8A, two of the offsets of the coil head 22 extend beyond the side walls 511 of the die, next to an opening 505 through which the helical lacing wire 4 is guided to interconnect adjacent coils. A cavity 513 is formed in the interior of the die, within walls 511, in which a tapered guide pin 515 is mounted. The guide pin 515 extends upward through the opening to cavity 513, and is dimensioned to be inserted into the terminal convolution 28 of the coil which fits within cavity 513. The dies 504 of the present invention are thus able to accommodate coils having a terminal convolution which extends beyond a coil head, and to interconnect coils at points other than at the terminal ends of the coils.

The mechanics by which the innerspring assembler translates the carrier bars 506 with the attached dies 504 in the described vertical and lateral paths are now described with continuing reference to FIGS. 7A-7I, and additional reference to FIGS. 9A and 9B, 10 and 11. The carrier bars 506 (with attached dies 504) are not permanently attached to any other parts of the assembler. The carrier bars 506 are thus free to be translated vertically and laterally by elevator and indexer mechanisms in the innerspring assembler. Dependent upon position, the carrier bars 506 and dies 504 are supported either by fixed supports or retractable supports. As shown in FIGS. 9A and 9B, the lowermost carrier bar 506A rests on a clamp assembly piece supported by a lower elevator bar 632B. The uppermost carrier bar 506A is supported

by pneumatically actuated pins 512 which are extended directly into bores in a side wall of the bar, or through bar tabs attached to the top of the carrier bar and aligned with the pins 512. Actuators 514, such as for example pneumatic cylinders, are controlled to extend and retract pins 512 relative to the carrier bars. The pins 512 on the coil entry side of the innerspring assembler are also referred to as the lag supports. The pins 512 on the opposite or exit side of the assembler (from which the assembled innerspring emerges) are alternatively referred to as the lead supports. On the exit side of the assembler (right side of FIGS. 9A and 9B, left side of FIG. 10A), the upper carrier bar 506B (in a position lower than upper carrier bar 506A) is supported by fixed supports 510, and the lower carrier bar 506B is supported by lead support pins 512.

As shown in FIG. 10A, a chain driven elevator assembly, indicated generally at 600, is used to vertically retract and converge the upper and lower carrier bars 506A and 506B through the sequence described with reference to FIGS. 7A-I. The elevator assembly 600 includes upper and lower sprockets 610, mounted upon axles 615, and upper and lower chains 620 engaged with sprockets 610. The opposing ends of the chains are connected by rods 625. Upper and lower chain blocks 630A and 630B extend perpendicularly from and between the rods 625, toward the center of the assembler. Lower axle 615 is connected to a drive motor (not shown) operative to rotate the associated sprocket 610 through a limited number of degrees sufficient to vertically translate the chain blocks 630A and 630B in opposite directions, to coverage or diverge, upon rotation of the sprockets. When the sprockets 610 are driven in a clockwise direction as shown in FIG. 10A, chain block 630A moves down, and chain block 630B moves up, and vice versa.

The chain blocks 630A and 630B are connected to corresponding upper and lower elevator bars 632A and 632B which run parallel to and substantially the entire length of the carrier bars. The upper and lower elevator bars 632A and 632B vertically converge and retract upon the described partial rotation of sprockets 610. The upper lead and lag support pins 512 and associated actuators 514 are mounted on the upper elevator bar 632A to move vertically up or down with the elevator assembly.

The two parallel sets of upper and lower carrier bars, 506A and 506B, are laterally exchanged (as in FIG. 7I) by an indexer assembly indicated generally at 700 in FIG. 10A. The indexer assembly includes, at each end of the assembler, upper and lower pairs of gear racks 702, with a pinion 703 mounted for rotation between each the racks. One of each of the pairs of racks 702 is connected to a vertical push bar 706, and the other corresponding rack is

journalled for lateral translation. The right and left vertical push bars 706 are each connected to a pivot arm 708 which pivots on an index slide bar 710 which extends from a one end of the assembler frame to the other, between the pairs of indexer gear racks. A drive rod 712 is linked to vertical push bar 706 at the intersection of the push bar with the pivot arm. The drive rod 712 is linearly actuated by a cylinder 714, such as a hydraulic or pneumatic cylinder. Driving the rod 712 out from cylinder 714 moves the vertical push bar 706 and the attached racks 702. The translation of the racks 702 attached to the vertical push bar 706 causes rotation of the pinions 703 which induces translation in the opposite direction of the opposing rack 702 of the rack pairs.

As further shown in FIG. 10B, for each pair of racks 702, one of the racks 702 carries or is secured to a linearly actuatable pawl 716, dimensioned to fit within an axial bore at the end of a carrier bar 506 (not shown). The corresponding opposing rack 702 carries or is attached to a guide 718 having an opening with a flat surface 719 dimensioned to receive the width of a carrier bar 506, flanked by opposed upstanding tapered flanges 721. As shown in FIG. 10A, on the lower half of the assembler, the lower rack 702 of the opposed rack pairs carries a guide 718 in which a lower carrier bar 506B (not shown) is positioned. The opposed corresponding rack 702 carries pawl 716 engaged in an axial bore in lower carrier bar 506A (not shown). An opposite arrangement is provided with respect to the upper pairs of racks 702. With the carrier bars 506 thus in contact with the indexer assembly, linear actuation of the drive rods 712 causes the carrier bars 506A and 506B to horizontally translate in opposite directions and exchange vertical plane positions (i.e. to swap), to accomplish the process step previously described with reference to the FIG. 7I.

The innerspring assembler of the invention further includes a clamping mechanism operative to laterally compress together the adjacent pairs of dies 504A and 504B (or carrier bars 506) when they are horizontally aligned (as described with reference to FIG. 7D), so that the coils in the dies are securely held together as they are fastened together by, for example, a helical lacing wire. As shown in FIG. 5 (and schematically depicted in FIGS. 7A-7I), the innerspring assembler includes upper and lower back-up bars 550 which are horizontally aligned with the corresponding carrier bars 506 during the described inter-coil lacing operation. Each back-up bar 550 is intersected by or otherwise operatively connected to arms 562, 564 of a clamp assembly shown in FIG.11. The clamp assembly 560 includes a fixed clamp arm 562, and a moving clamp arm 564, connected by linkage 566. A shaft 570 extending from a linear actuator 568, such as an air or hydraulic cylinder, is connected at a

lower region to linkage 566. Extension of shaft 570 from actuator 568 causes the distal end 565 of the moving clamp arm 564 to laterally translate away from the adjacent carrier bar 506 to an unclamped position. Conversely, retraction of the shaft 570 into the actuator 568 causes the distal end 565 of the moving clamp arm 564 to move toward the adjacent carrier bar 506, clamping it against the horizontally adjacent carrier bar 506, and against the adjacent carrier bar 506 which backs up against the fixed clamp bar 562. The clamp assemblies 560 on the upper half of the assembler are mounted upon the assembler frame and does not move with the carrier bars and dies. The clamp assemblies 560 on the lower half of the assembler are mounted on the elevator bar 632B to move with the carrier bars. Thus by operation of actuator 568 the clamp assemblies either hold adjacent rows of dies/carrier bars tightly together, or release them to allow the described vertical and horizontal movements.

One or more of the dies 504 may be alternately configured to crimp and/or cut each of the helical lacing wires once it is fully engaged with two adjacent rows of coils. For example, as shown in FIG. 6B, a knuckler die 504K is attachable to a carrier bar at a selected location where the helical lacing wire is to be crimped or “knuckled” to secure it in place about the coils. The knuckler die 504K has a knuckle tool 524 mounted upon a slidable strike plate 525 which biased by springs 526 so that the tip 527 of the knuckle tool 524 extends beyond an edge of the die. In the assembler, a linear actuator (not shown) such as a pneumatically driven push rod, is operative to strike the strike plate 525 to advance the knuckle tool 524 in the path of the strike plate to bring the tool into contact with the lacing wire. Where upper and lower knuckler dies 504K are installed on the upper and lower carrier bars of the assembler, the linear actuator is provided with a fitting which contacts both the upper and lower strike plates of the knuckler dies simultaneously.

The invention further includes certain alternative means of lacing together rows of coils within the innerspring assembly machine. For example, as shown in FIGS. 17A-17G, lacer tooling 801 includes a guide ramp 802 upon which the terminal end of coils 2 are advanced into position by a finger 804 which positions the coil ends within partable tooling 806. As shown in FIG. 17C, the downward travel of the finger 804 positions segments of the adjacent coils heads within complementary tools 806 which then clamp to form a lacing channel for insertion of a helical lacing wire. Once laced together, the tools 806 part and the connected coils are advanced to allow for introduction of a subsequent row of coils. FIG. 17B illustrates a starting position, with the coil heads of a new row of coils at left and a preceding row of coils engaged by the finger 804. In FIG. 17C, the finger is actuated

downward to draw the coil head segments in between the parted tools 806. In FIG. 17D, the finger 804 then returns upward as the coil heads are laced together within the tools 806 which are placed tightly together about overlapping segments of the adjacent coil heads. In FIG. 17E, the tools 806 open to release the now connected coils which recoil upward to contact finger 804 (as in FIG. 17F), and the connected coils are indexed or advanced to the right in FIG. 17G to allow for introduction of a subsequent row of coils.

FIGS. 18A-18G illustrate still another alternative means and mechanism for lacing or otherwise connecting adjacent rows of coils. The coils are similarly advanced up a guide ramp 802 so that overlapping segments of adjacent coil heads are positioned directly over extendable tools 812. As shown in FIG. 18B, the tools 812 are laterally spread and, in FIG. 18C, extend vertically to straddle the overlapping coil segments, and clamp together thereabout as in FIG. 18D to securely hold the coils as they are laced together. The tools 812 then part and retract, as in FIGS. 18E and 18F, and the connected coils are indexed or advanced to the right in FIG. 18G and the process repeated.

FIGS. 19A-19F illustrate still another mechanism or means for lacing or interconnecting adjacent coils. Within the innerspring assembler are provided a series of upper and lower walking beam assemblies, indicated generally at 900. Each assembly 900 includes an arm 902 which supports dual coil-engaging tooling 904, mounted to articulate via an actuator arm 906. The tooling 904 includes cone or dome shaped fittings 905 configured for insertion into the open axial ends of the terminal ends of the coils. This correctly positions a pair of coils between the upper and lower assemblies for engagement of lacing tools 908 with segments of the coil heads (as shown in FIG. 19C). Once the lacing or attachment is completed, the assemblies 900 are actuated to laterally advance the attached coils to the right as shown in FIG. 19D. The assemblies 900 then retract vertically off the ends of the coils, and then retract laterally (for example to the left in FIG. 19F to receive the next row of coils.

The coil formers, conveyors, coil transfer machine and innerspring assembler are run simultaneously and in synch as controlled by a statistical process control system, such as an Allen-Bradley SLC-504 programmed to coordinate the delivery of coils by the genevas to the conveyors, the speed and start/stop operation of the conveyors the interface of the arms of the coil transfer machine with coils on the conveyors, and the timed presentation of rows of coils to the innerspring assembler. and operation of the innerspring assembler.

Although the invention has been described with reference to certain preferred and alternate embodiments, it is understood that numerous modifications and variations to the different component could be made by those skilled in the art which are within the scope of the invention and equivalents.

5

## CLAIMS

What is claimed is:

1. A conveyor system comprising:  
5 a plurality of conveyance members for supporting a respective plurality of articles to be conveyed, each conveyor member having laterally opposed flanges and mounted for sliding translation upon laterally opposed guide rails, each conveyor member being connected to a common drive mechanism operative to translate the conveyor members along the guide rails, each conveyor member having a common length dimension defining a  
10 conveyor pitch wherein the conveyor members are in end-to-end abutment; and  
an article engagement device attached to one or more conveyor members.
2. The conveyor system of claim 1 wherein the conveyor members are connected to the common drive mechanism at a spacing greater than a length of the conveyor members.  
15
3. The conveyor system of claim 1 wherein the common drive mechanism is attached to the conveyor members between the guide rails.
4. The conveyor system of claim 1 wherein the common drive mechanism is  
20 attached to a bottom side of the conveyor members.
5. The conveyor system of claim 1 wherein the article engagement device is attached to a top surface of a conveyor member.
- 25 6. The conveyor system of claim 1 wherein the conveyor members are generally rectangular, with the laterally opposed flanges formed in first opposed sides and fore and aft ends formed in second opposed sides.
7. The conveyor system of claim 1 wherein the fore and aft ends of the second  
30 opposed sides are configured for abutment with adjacent conveyor members mounted on the guide rails.



8. The conveyor system of claim 1 wherein the article engagement device is attached to the conveyor member by a fitting which holds the article engagement device in a particular orientation.

5 9. The conveyor system of claim 1 wherein the common drive mechanism is a sprocket- driven chain.

10. The conveyor system of claim 9 wherein the sprocket-driven chain is attached to a conveyor member by a fitting which joins two links of the chain.

10

11. The conveyor system of claim 1 further comprising an articulated component in cooperation with the article engagement device operative to maintain orientation of an article engaged by the article engagement device.

15 12. The conveyor system of claim 9 wherein the common drive mechanism further comprises an indexer for maintaining tension on the chain to achieve spacing of the conveyor members at distances greater than a length dimension of the conveyor members.

20 13. The conveyor system of claim 1 further comprising a brake mechanism operative to brake one or more conveyor members on the guide rails.

14. The conveyor system of claim 13 wherein the brake mechanism comprises a linear actuator operative to engage a conveyor member.

25 15. The conveyor system of claim 1 further comprising upper and lower sets of laterally opposed guide rails, and a reversible path by which conveyor members move from the upper guide rails to the lower guide rails, the common drive mechanism extending along the upper and lower guide rails.

30 16. The conveyor system of claim 1 wherein the article engagement device comprises a spring-biased assembly which bears against an article engaged by the article engagement device.

17. The conveyor system of claim 16 comprising a hinge-mounted plate which is spring biased against the article engagement device to bear against an article engaged by the article engagement device.

5 18. The conveyor system of claim 17 further comprising a frictional surface on the hinge-mounted plate.

19. The conveyor system of claim 17 wherein a spring extends from a surface of the conveyor member to the plate.

10

20. A conveyor system comprising:

a longitudinal guide rail;

multiple flights mounted to slide upon the guide rail;

15

a drive mechanism operative to move the flights along the guide rail, the drive mechanism connected to each flight with available slack between each flight to enable variable spacing between the flights on the guide rail.

20 21. The conveyor system of claim 20 wherein each of the flights further comprises an article engagement device.

22. The conveyor system of claim 20 wherein the drive mechanism includes a drive line connected to each of the flights.

25 23. The conveyor system of claim 22 wherein a length of the drive line between first and second adjacent flights is greater than a distance from a point of connection of the drive line to the first flight to a point of connection of the drive line to the second flight when the first and second flights are in end-to-end abutment.

30 24. The conveyor system of claim 22 further comprising an indexer in connection with the drive line operative to control tension on the drive line.

25. The conveyor system of claim 21 wherein an article engagement device further comprises a spring-biased engagement device.

26. The conveyor system of claim 21 wherein an article engagement device further  
5 comprises a frictional contact element.

27. The conveyor system of claim 20 wherein the flights are generally in the form of rectangular blocks having a planar top surface to which an article engagement device is attached.  
10

28. The conveyor system of claim 20 wherein the article engagement device comprises a clip configured to engage an article.

29. The conveyor system of claim 21 wherein the article engagement device  
15 comprises a spring-biased member.

30. A conveyor system for conveying articles from a first point to a second point, the conveyor system comprising  
a track for slidably supporting a plurality of conveyance members, the track  
20 extending from a first point to a second point,  
each conveyance member having an article engagement device configured to engage an article to be conveyed;  
each conveyance member being attached to a drive mechanism, the drive mechanism having an extendable length between the conveyance members whereby spacing  
25 of the conveyance members on the track is variable.

31. The conveyor system of claim 30 wherein the conveyance members are in the form of flights mounted to slide upon the track, each flight having a mounting surface upon which an article engagement device is mounted.  
30

32. The conveyor system of claim 30 wherein the article engagement device is configured to exert a gripping force on an article engaged by the article engagement device.

33. The conveyor system of claim 32 wherein the article engagement device includes a wire form configured to clip on to an article to be engaged.

5 34. The conveyor system of claim 30 wherein the article engagement device includes a frictional surface for contacting an article engaged by the article engagement device.

10 35. The conveyor system of claim 34 wherein the frictional surface is spring biased.

36. The conveyor system of claim 30 further comprising a clip configured to engage an article, and a spring-biased member mounted to place pressure upon an article engaged by the clip.

15

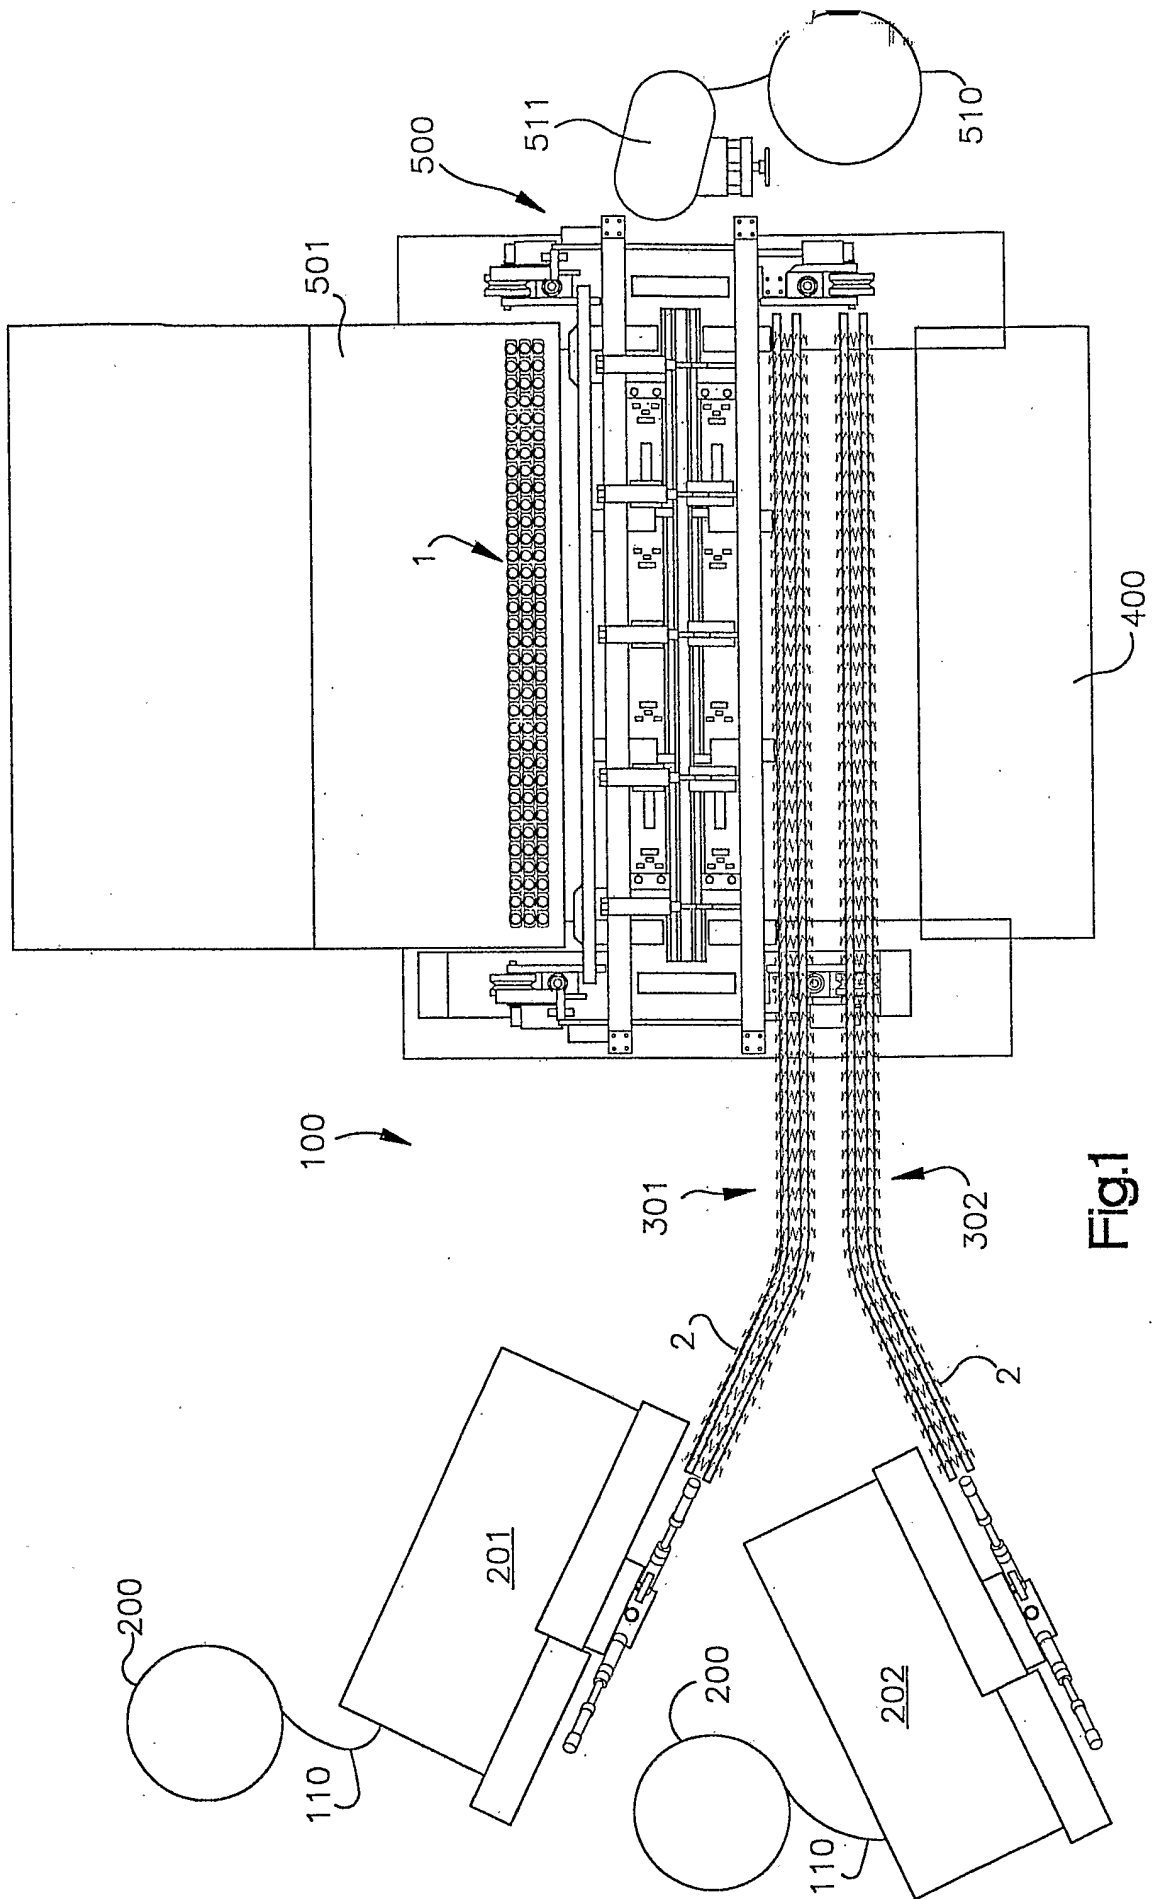


Fig.1

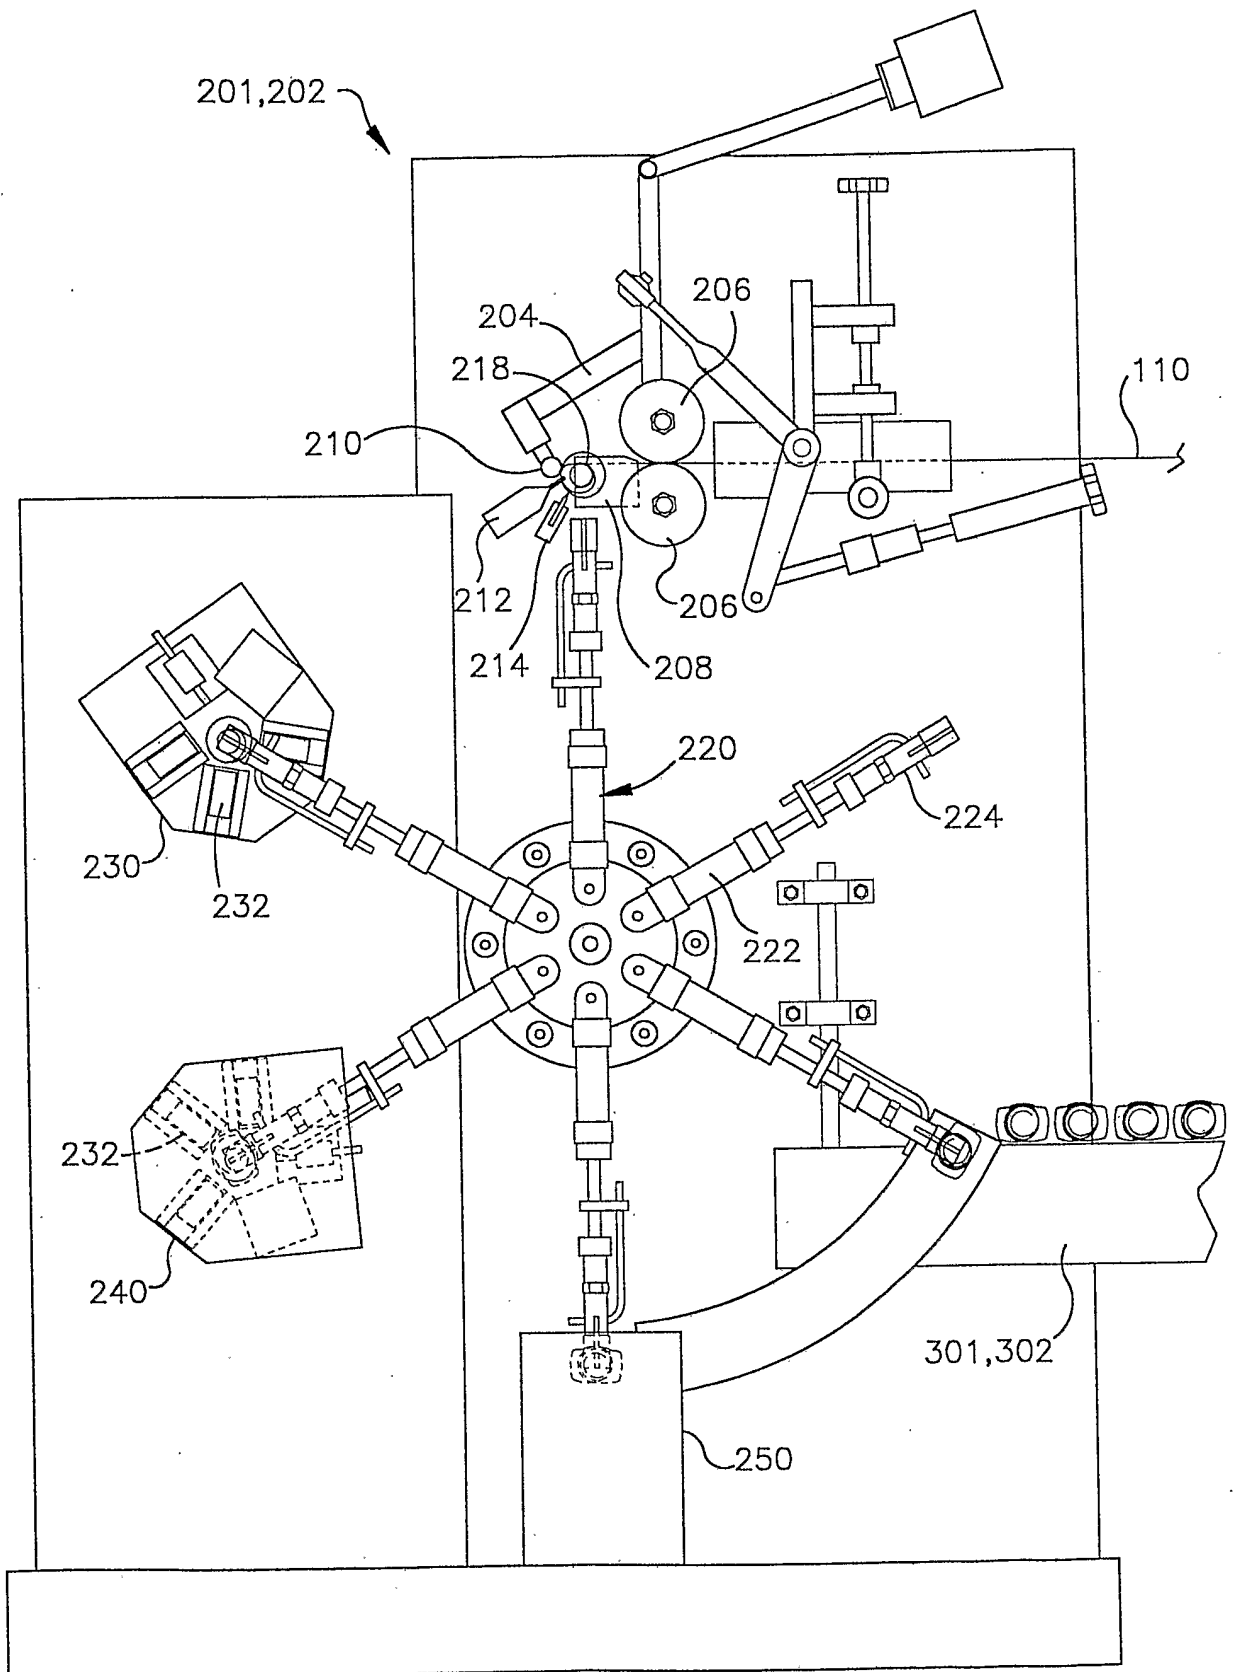


Fig.2

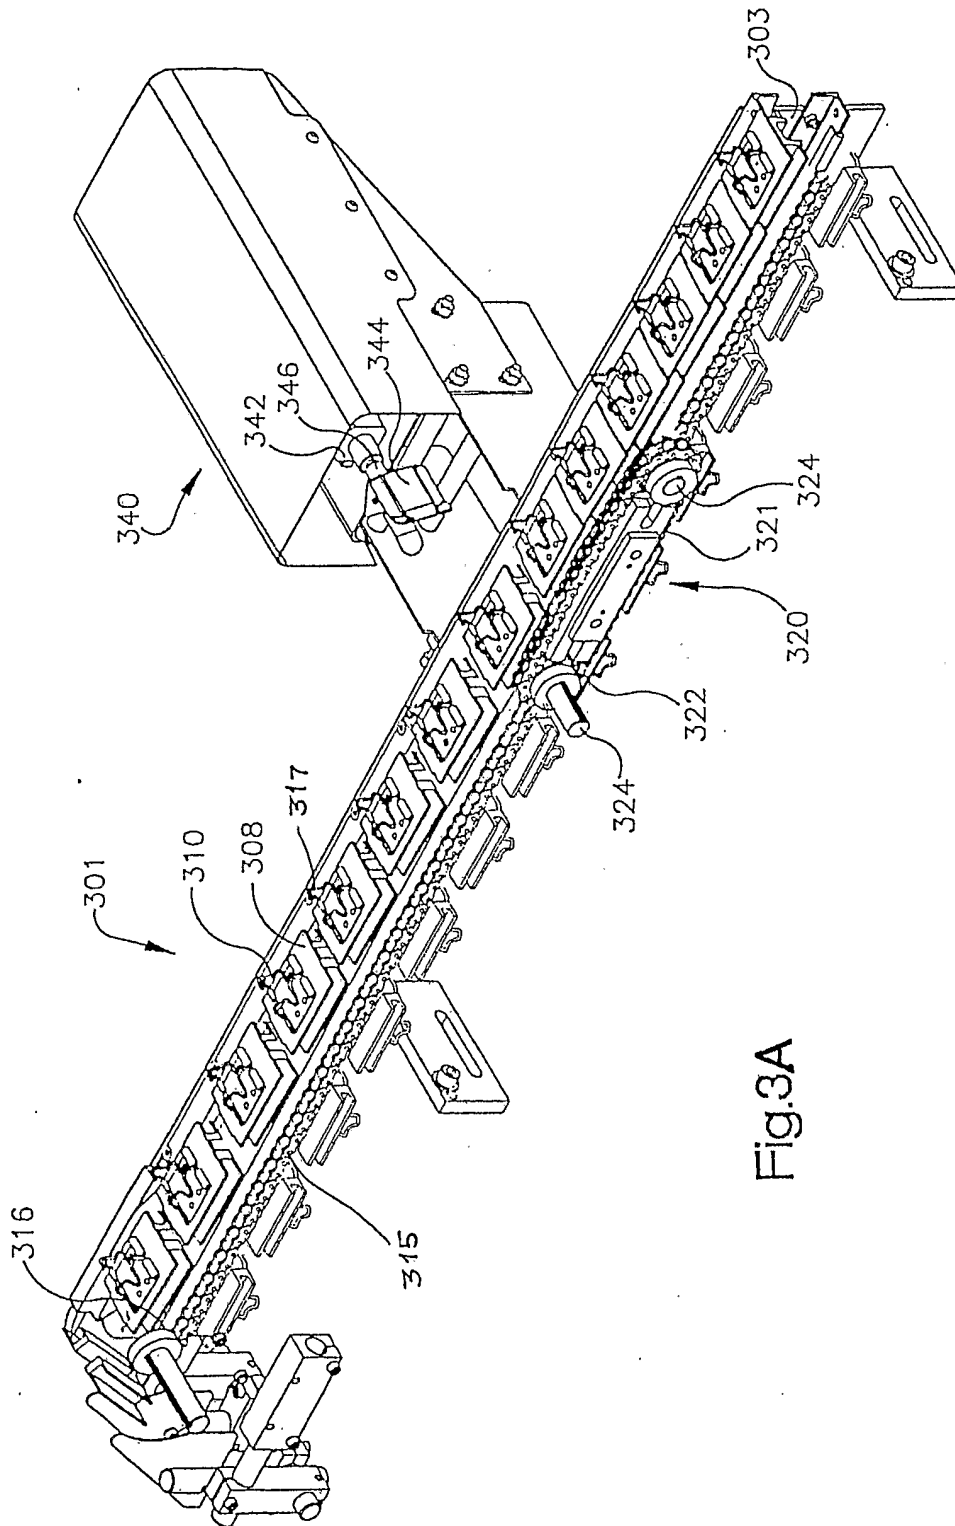


Fig.3A

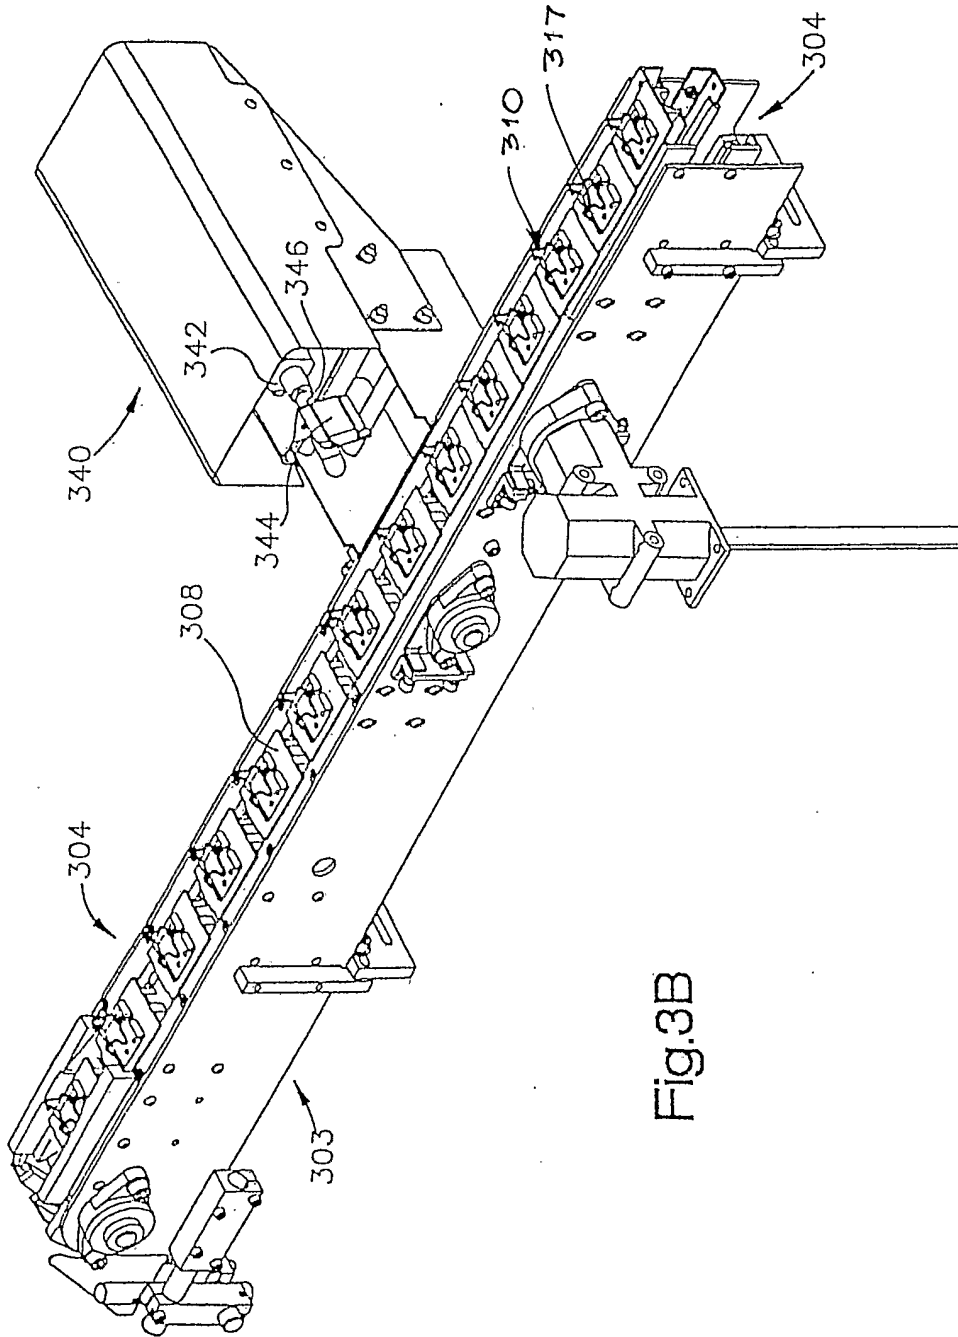


Fig.3B



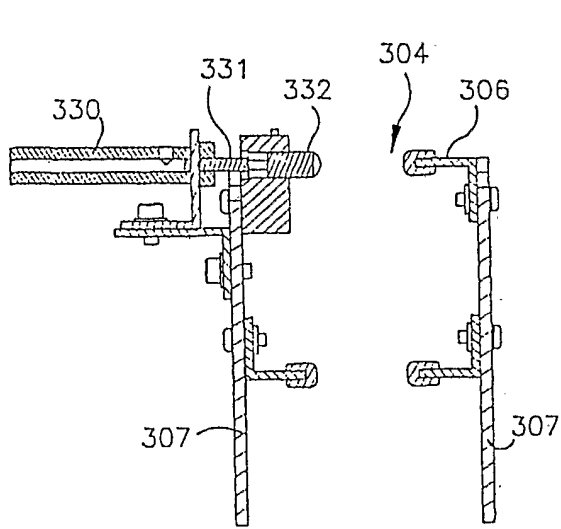


Fig.3D

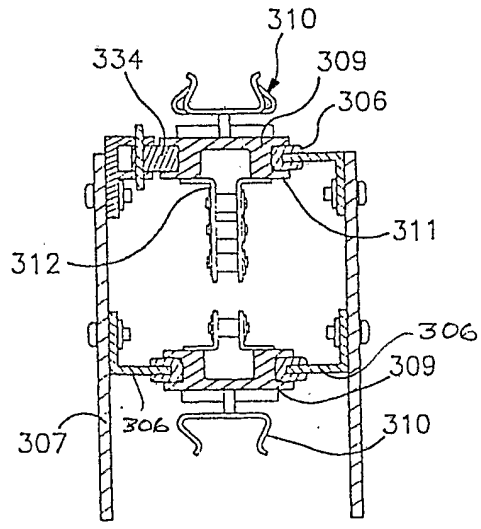


Fig.3E

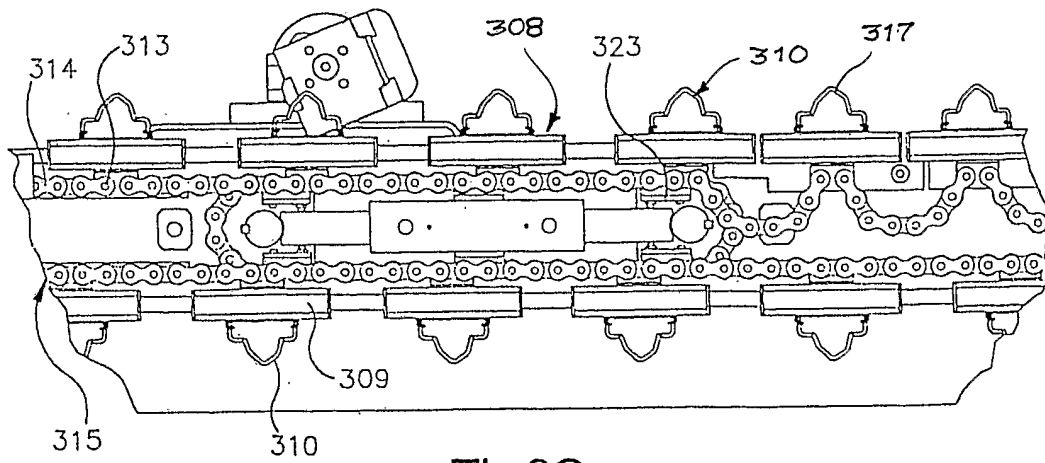


Fig.3C

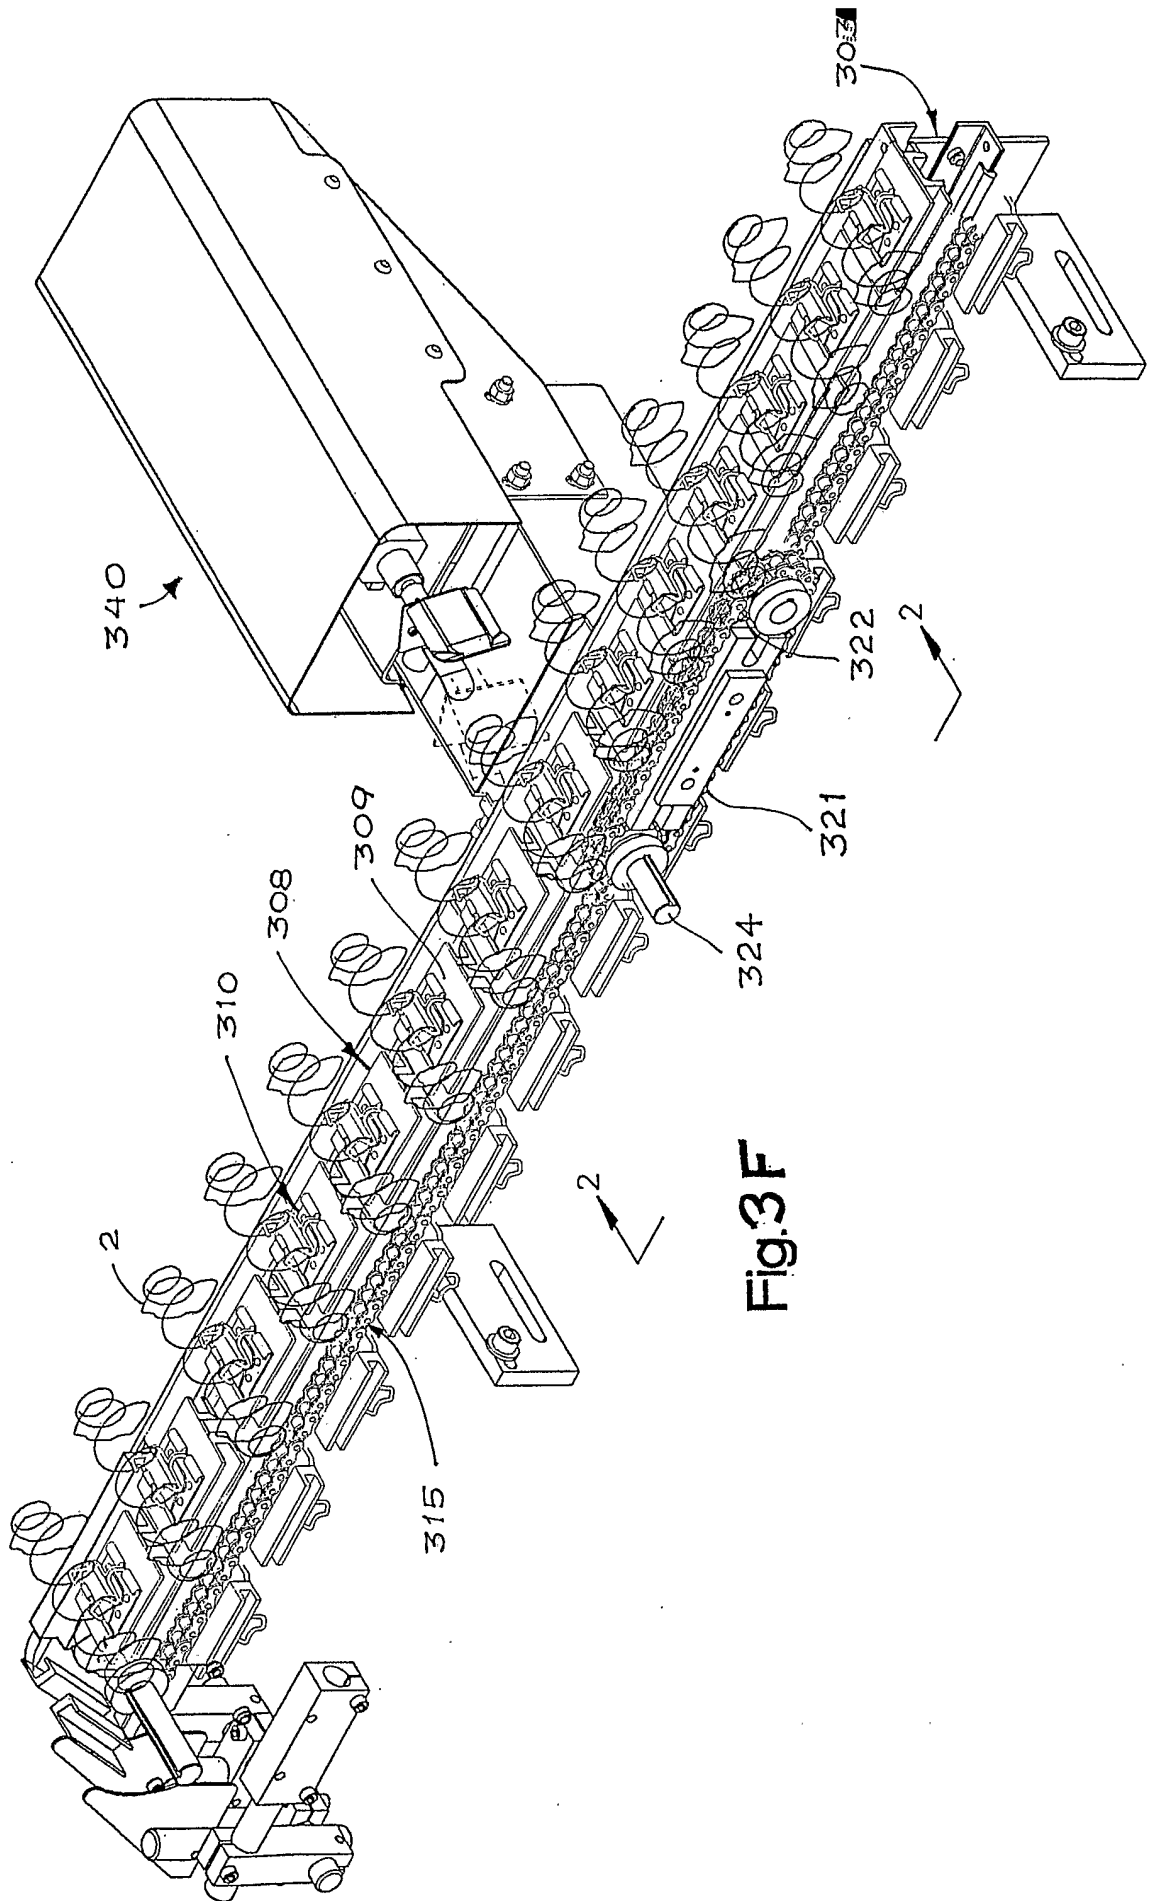


Fig.3F

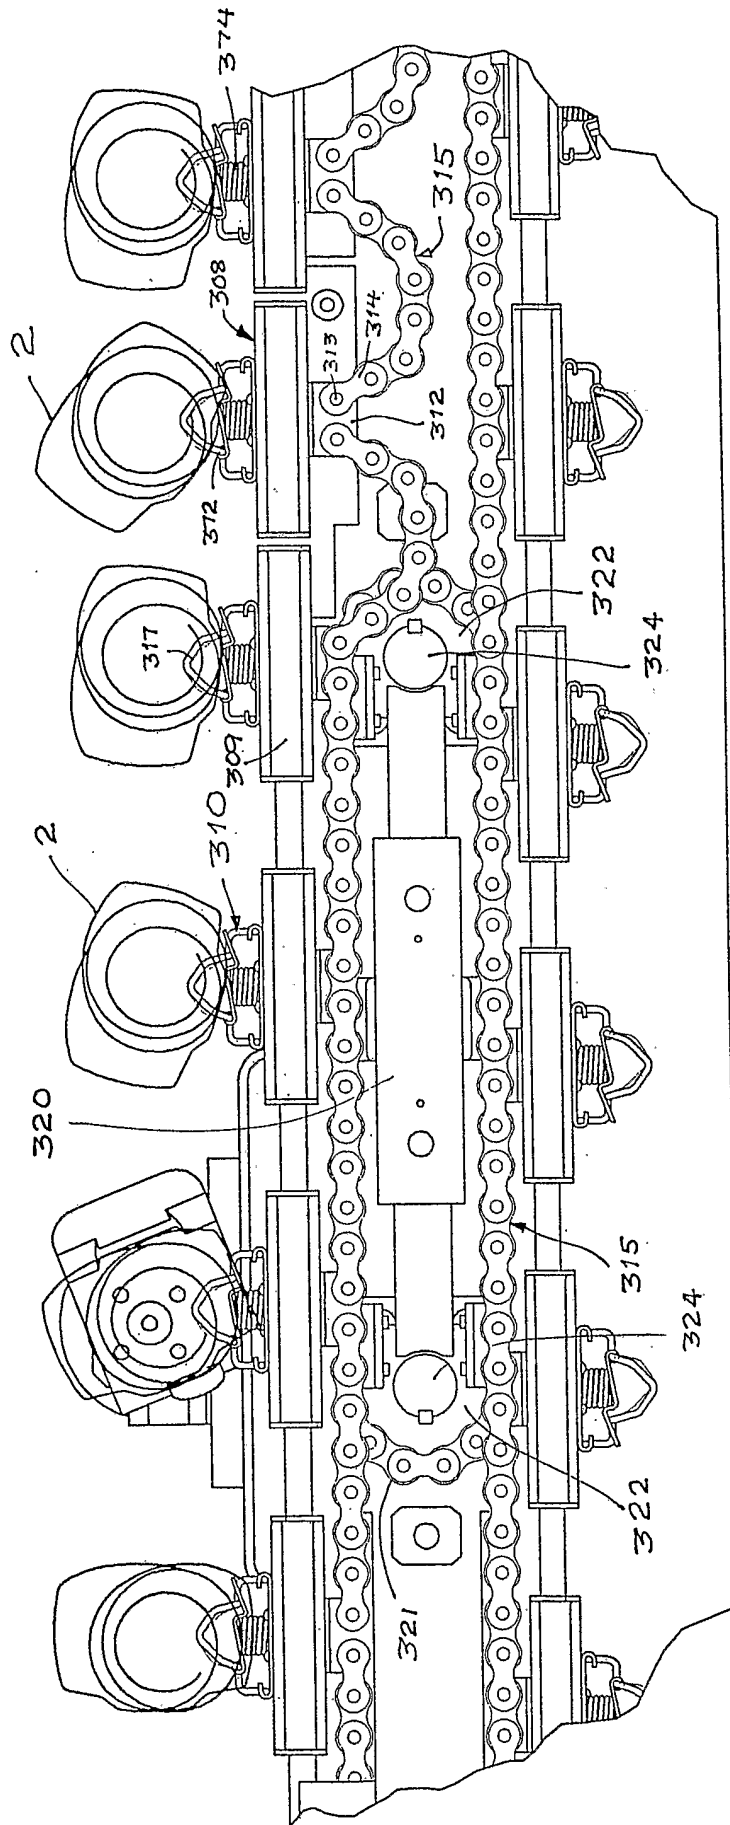


Fig. 3 G

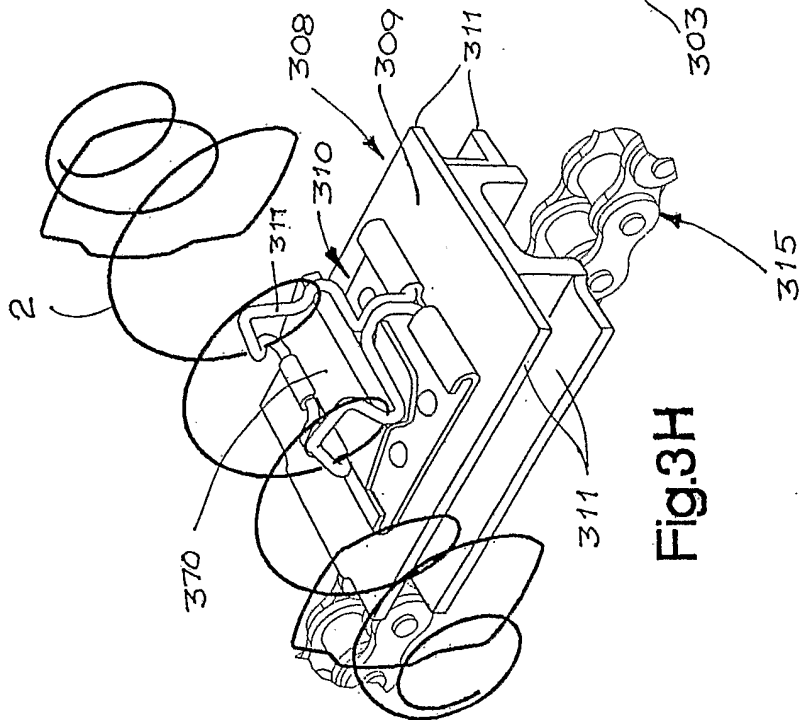


Fig. 3H

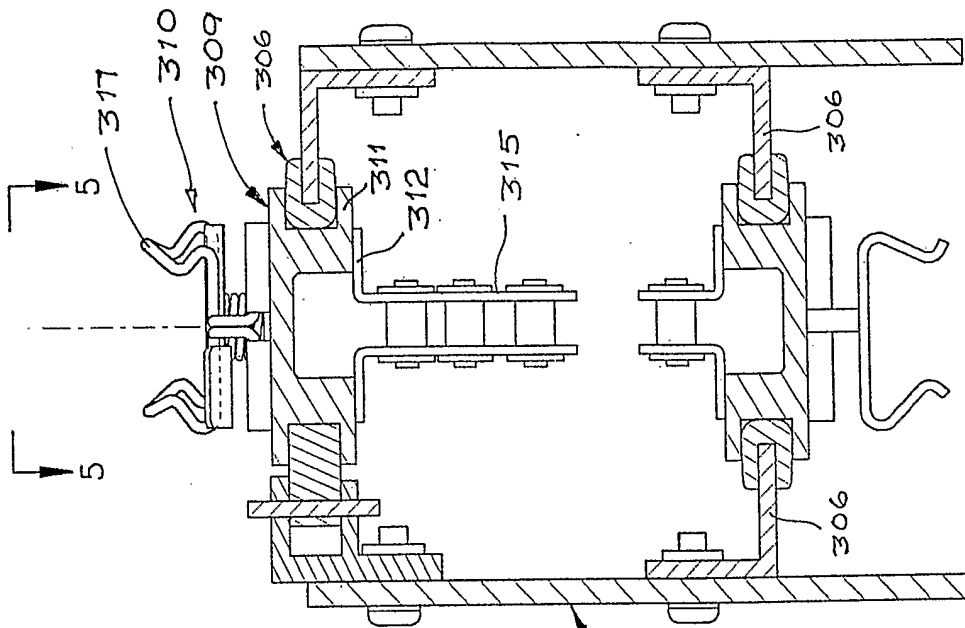


Fig. 3I

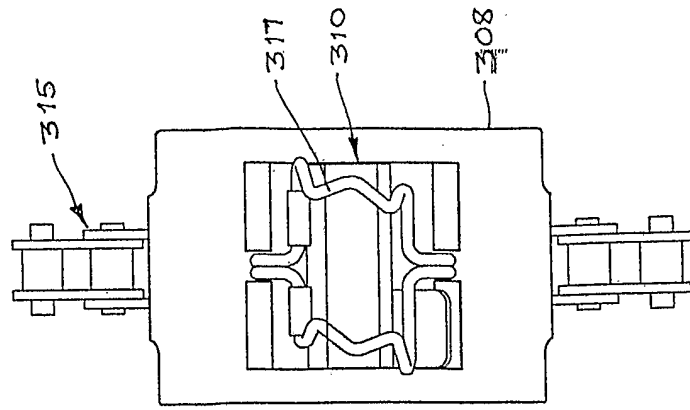


Fig. 3J

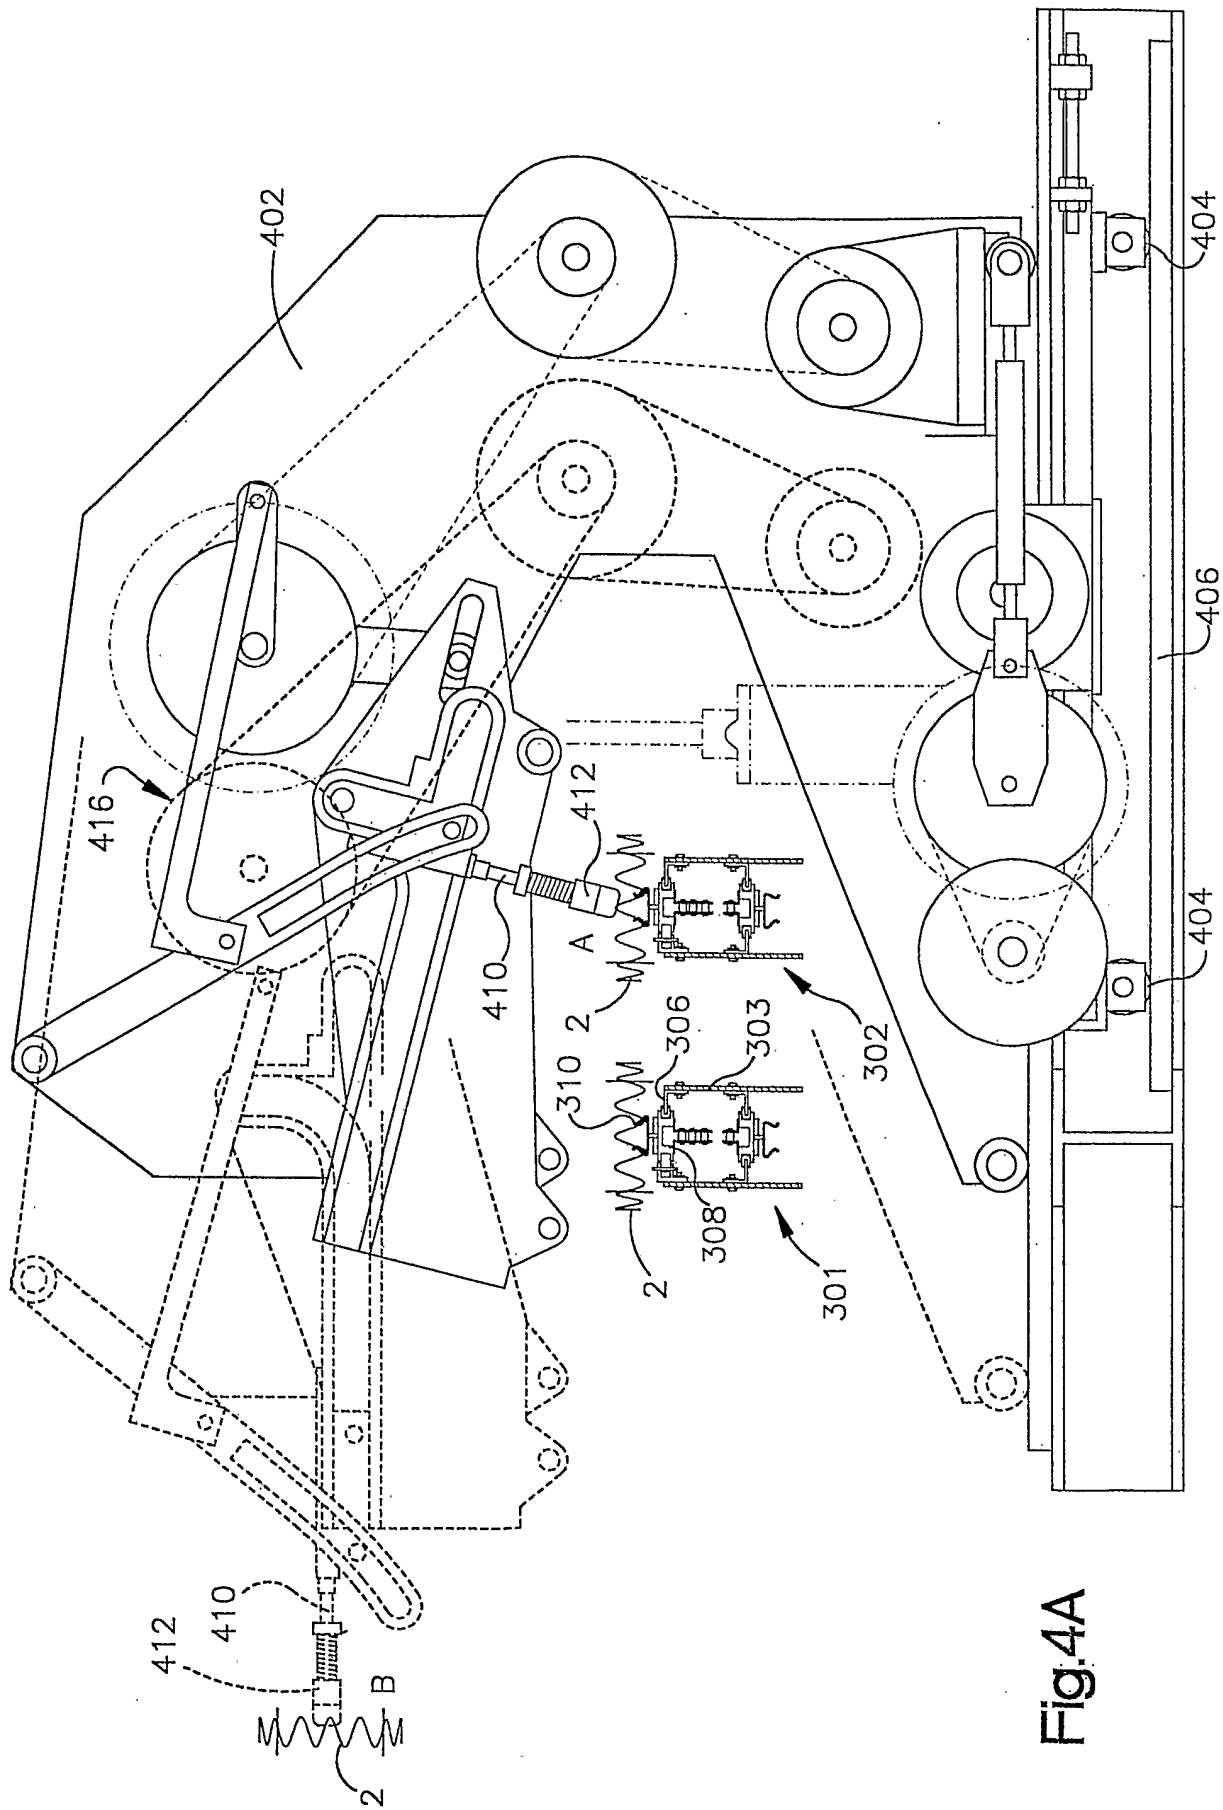


Fig.4A

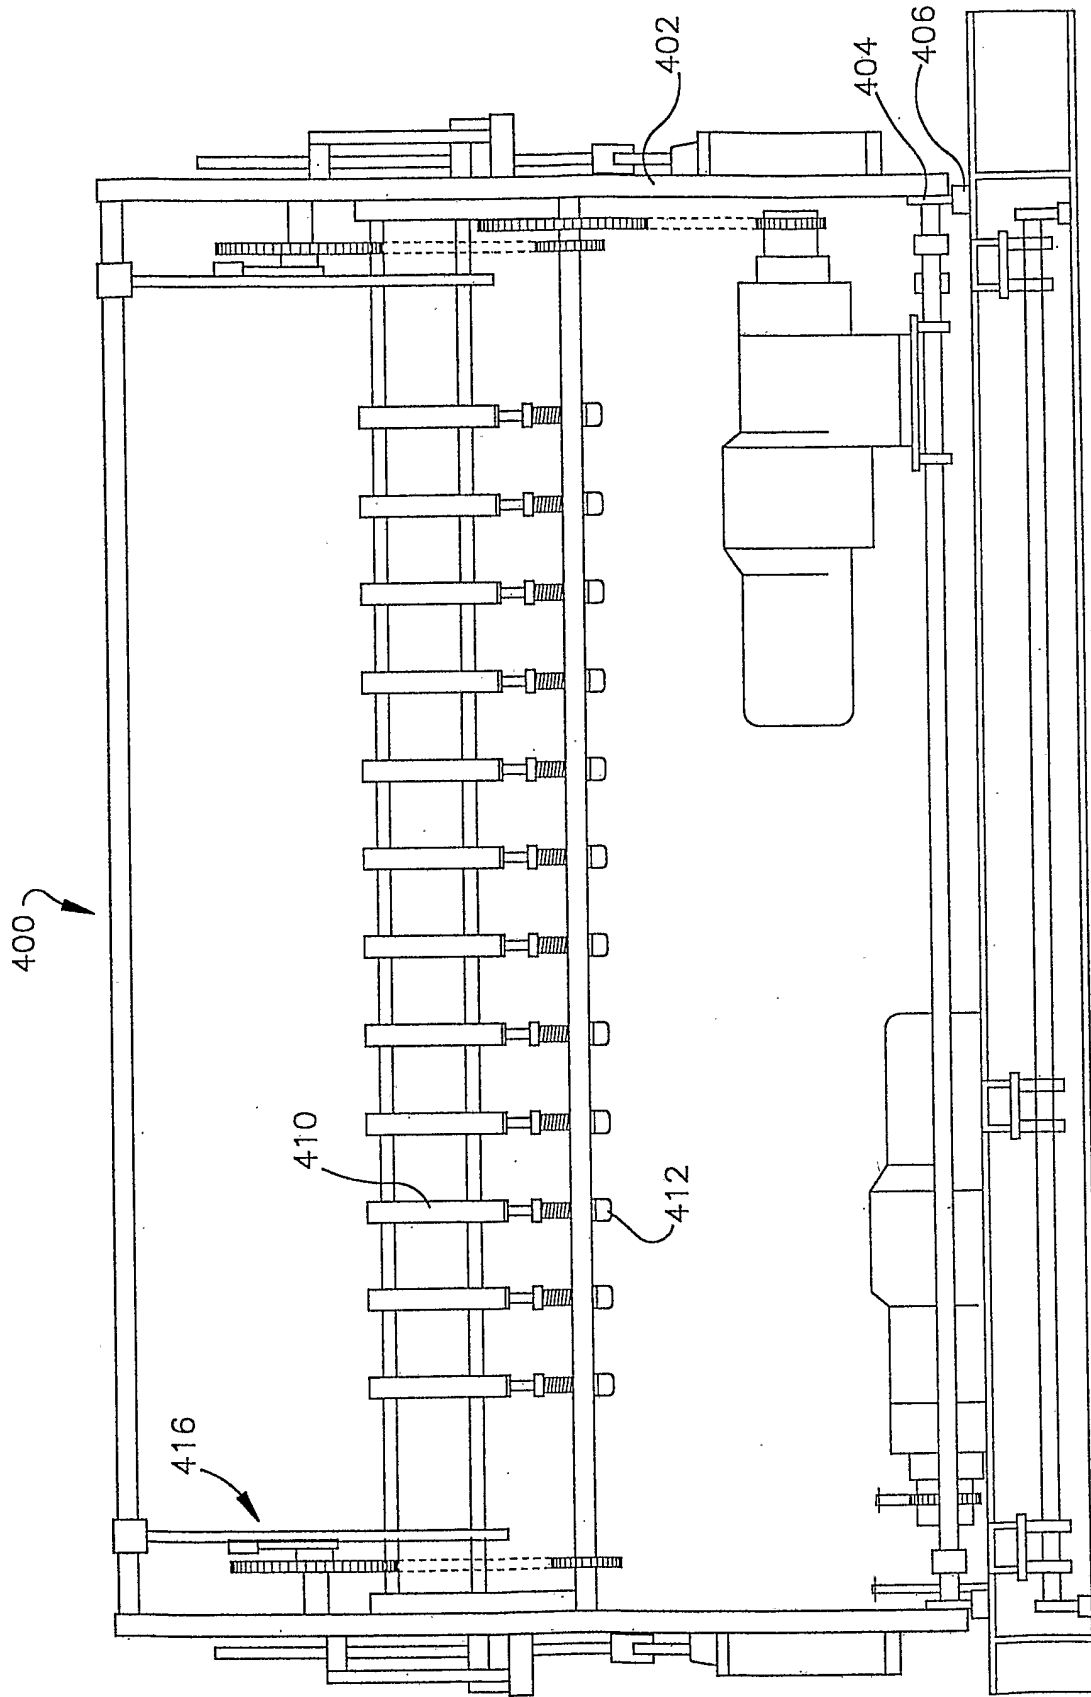


Fig.4B

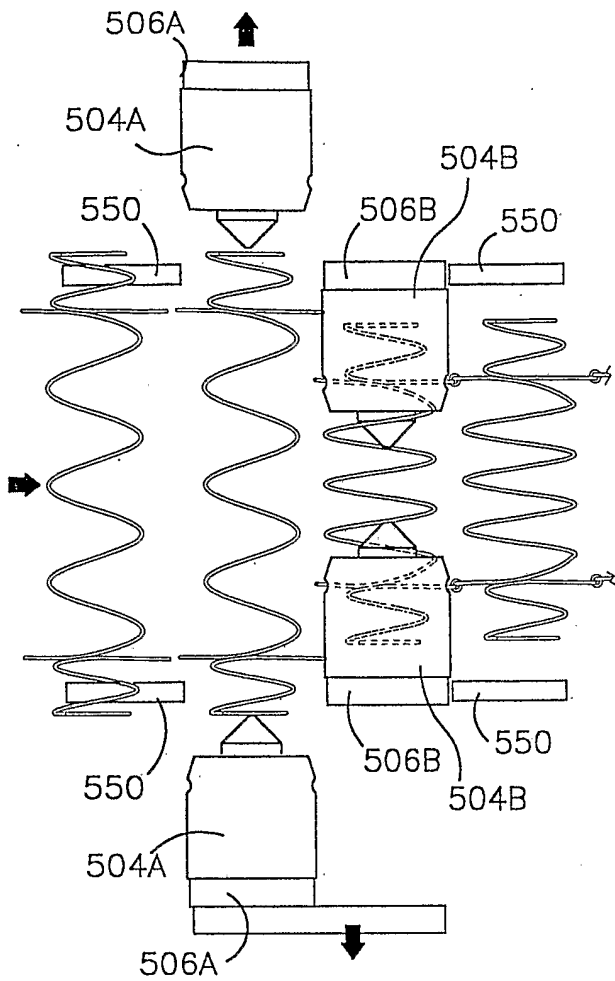


Fig.7A

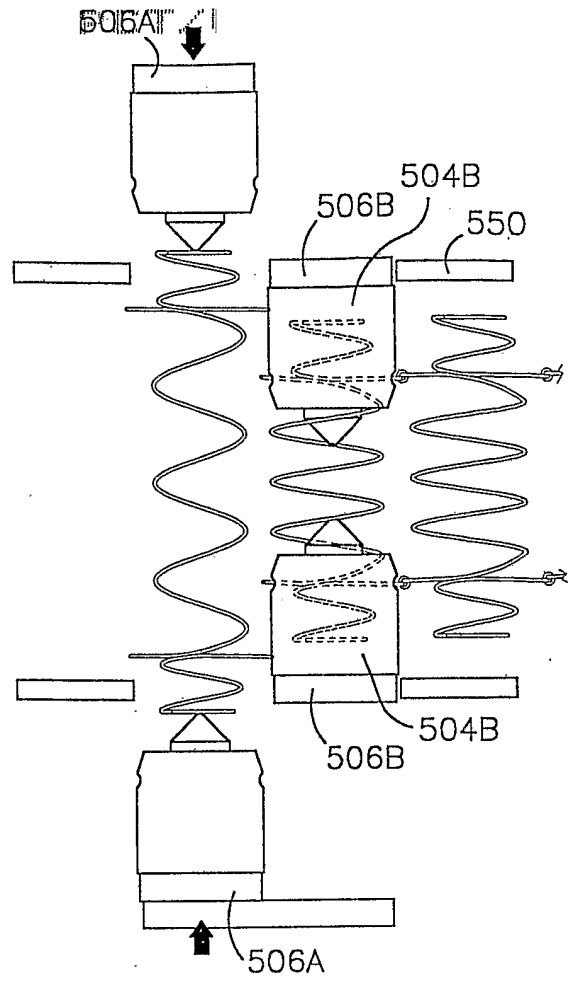


Fig.7B

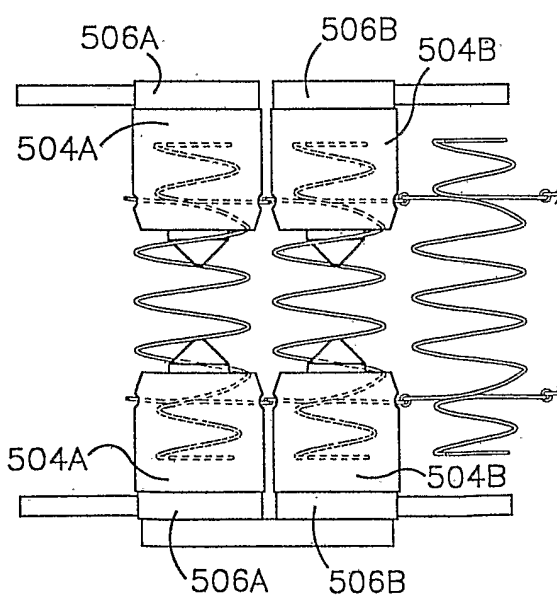


Fig.7C

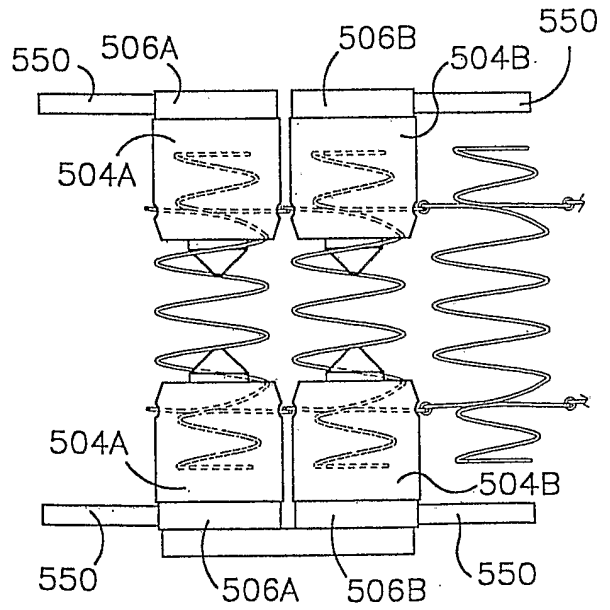


Fig.7D

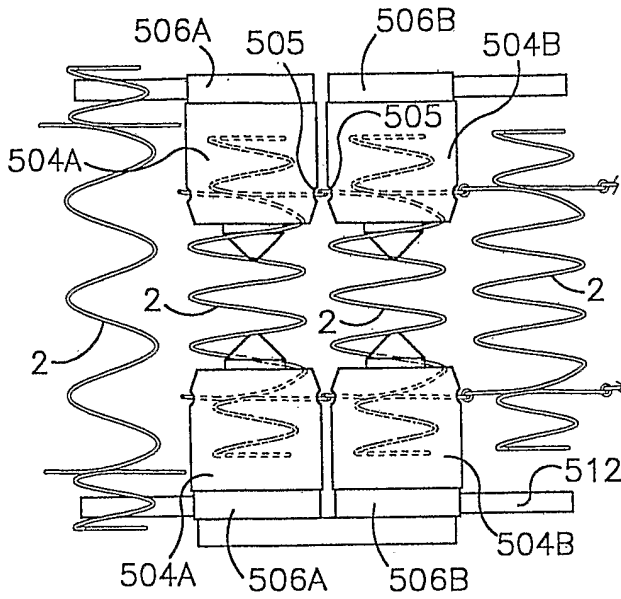


Fig.7E

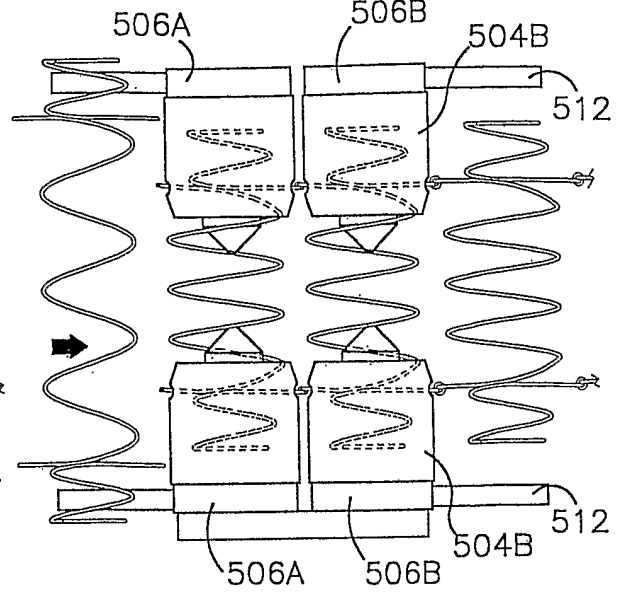


Fig.7F

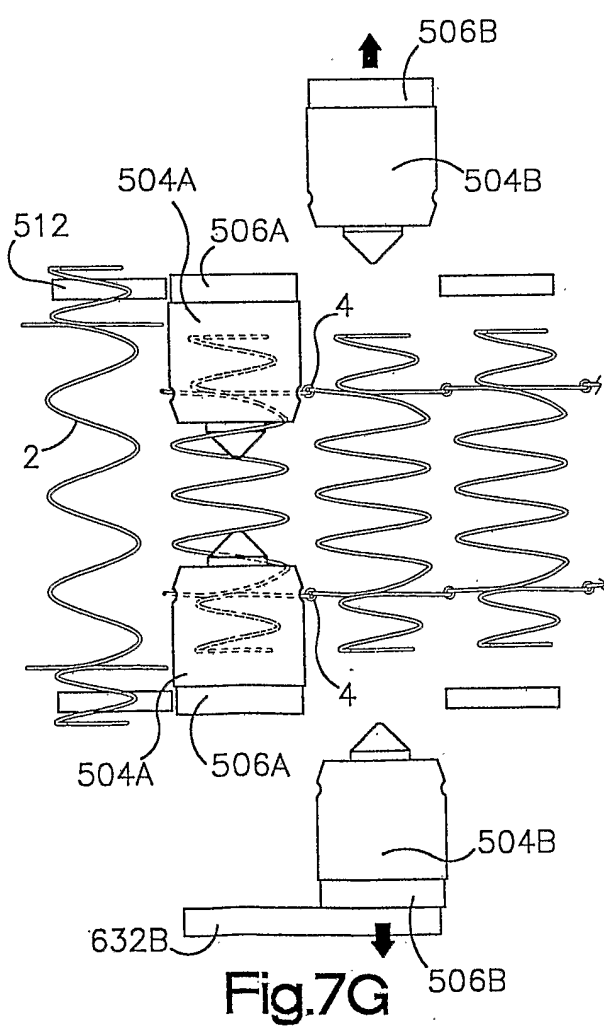


Fig.7G

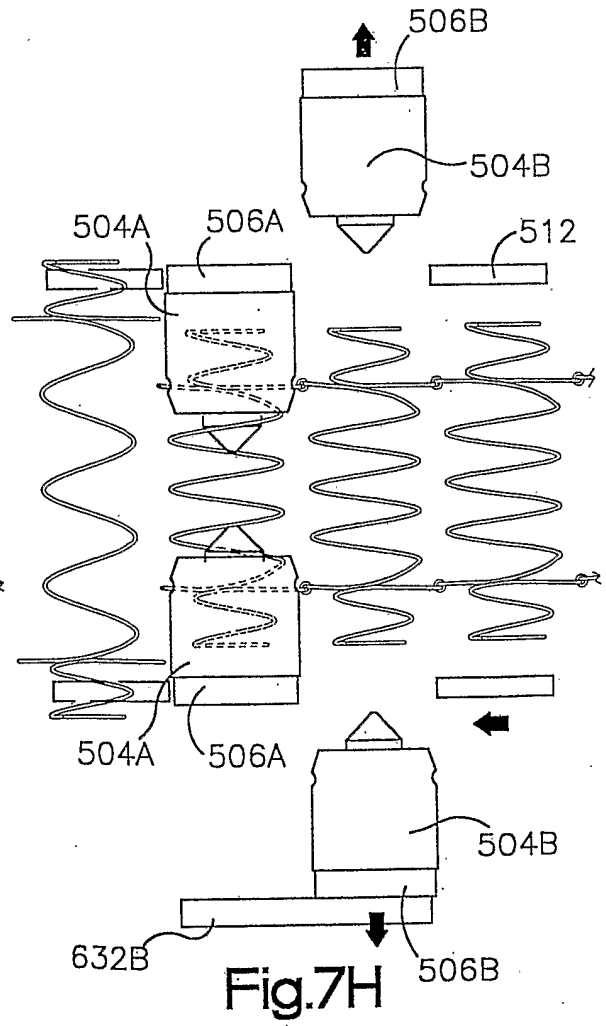


Fig.7H



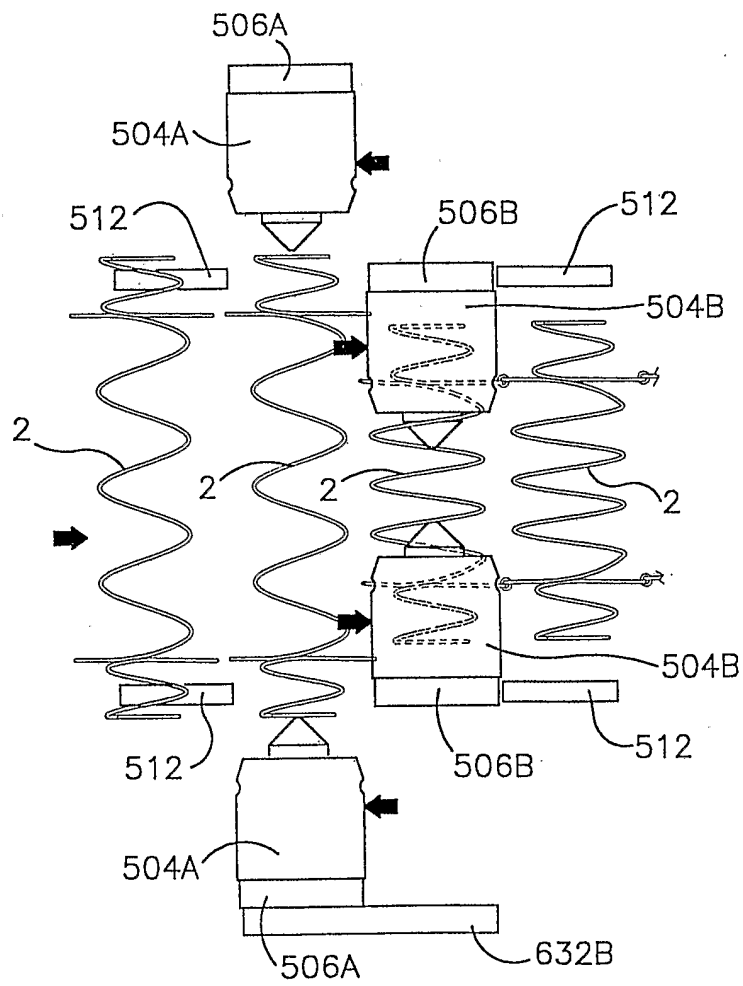
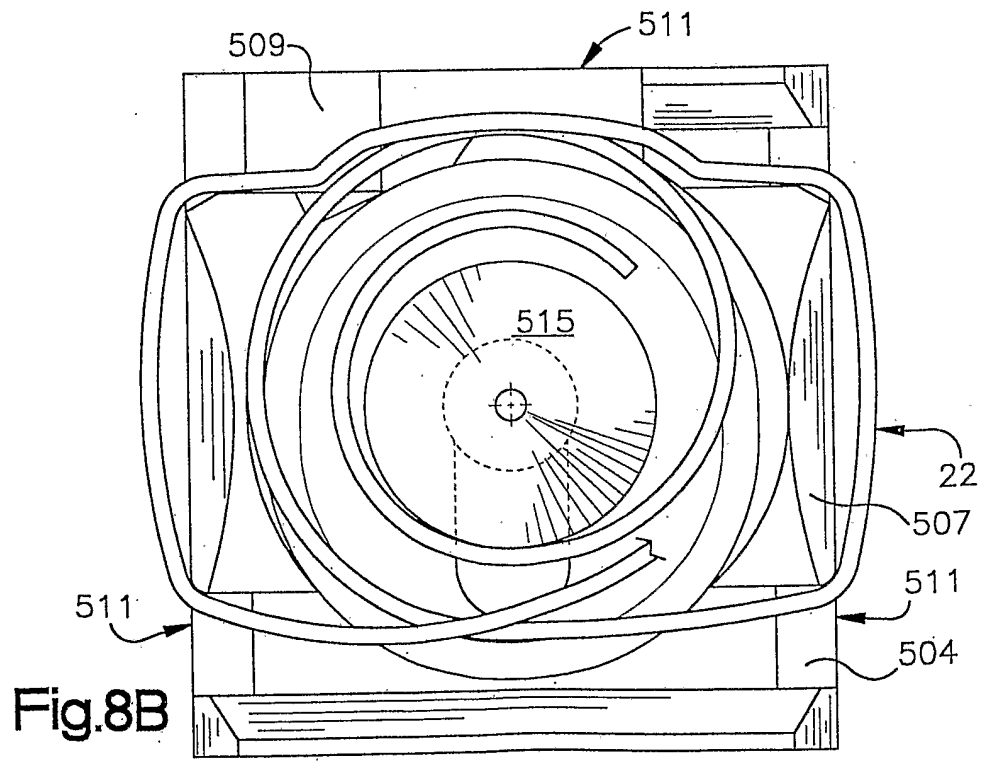
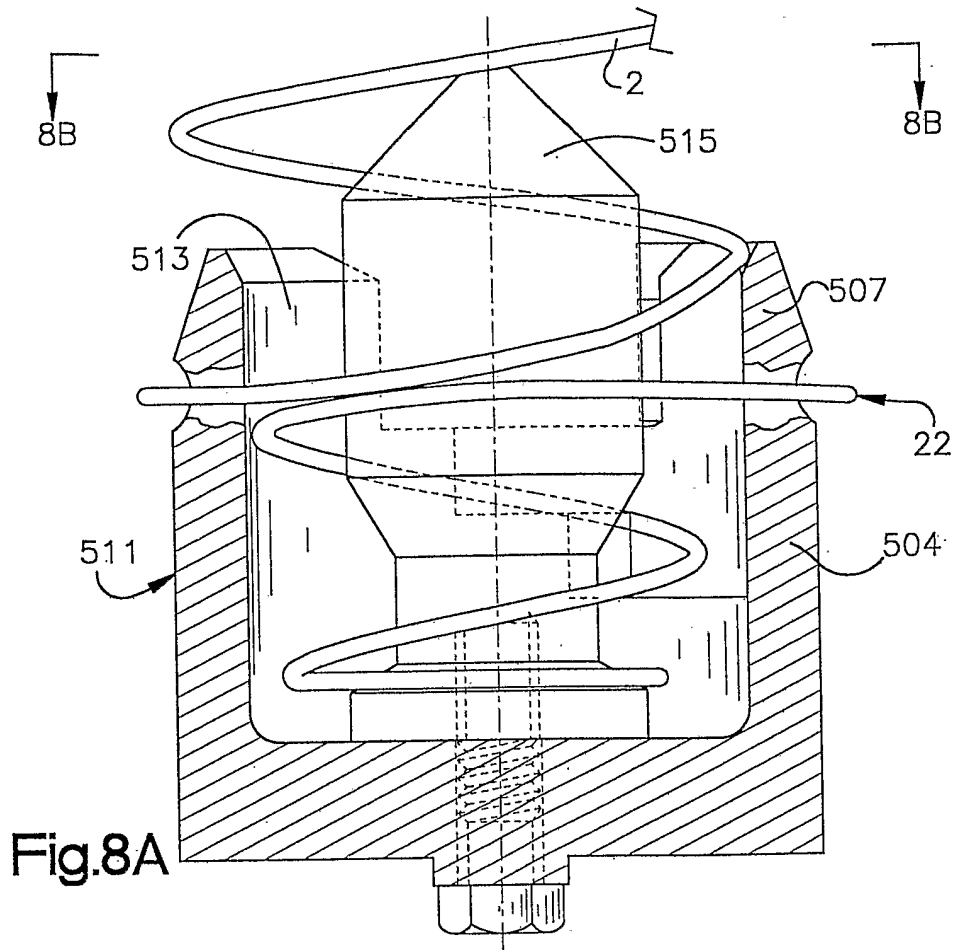


Fig.7I



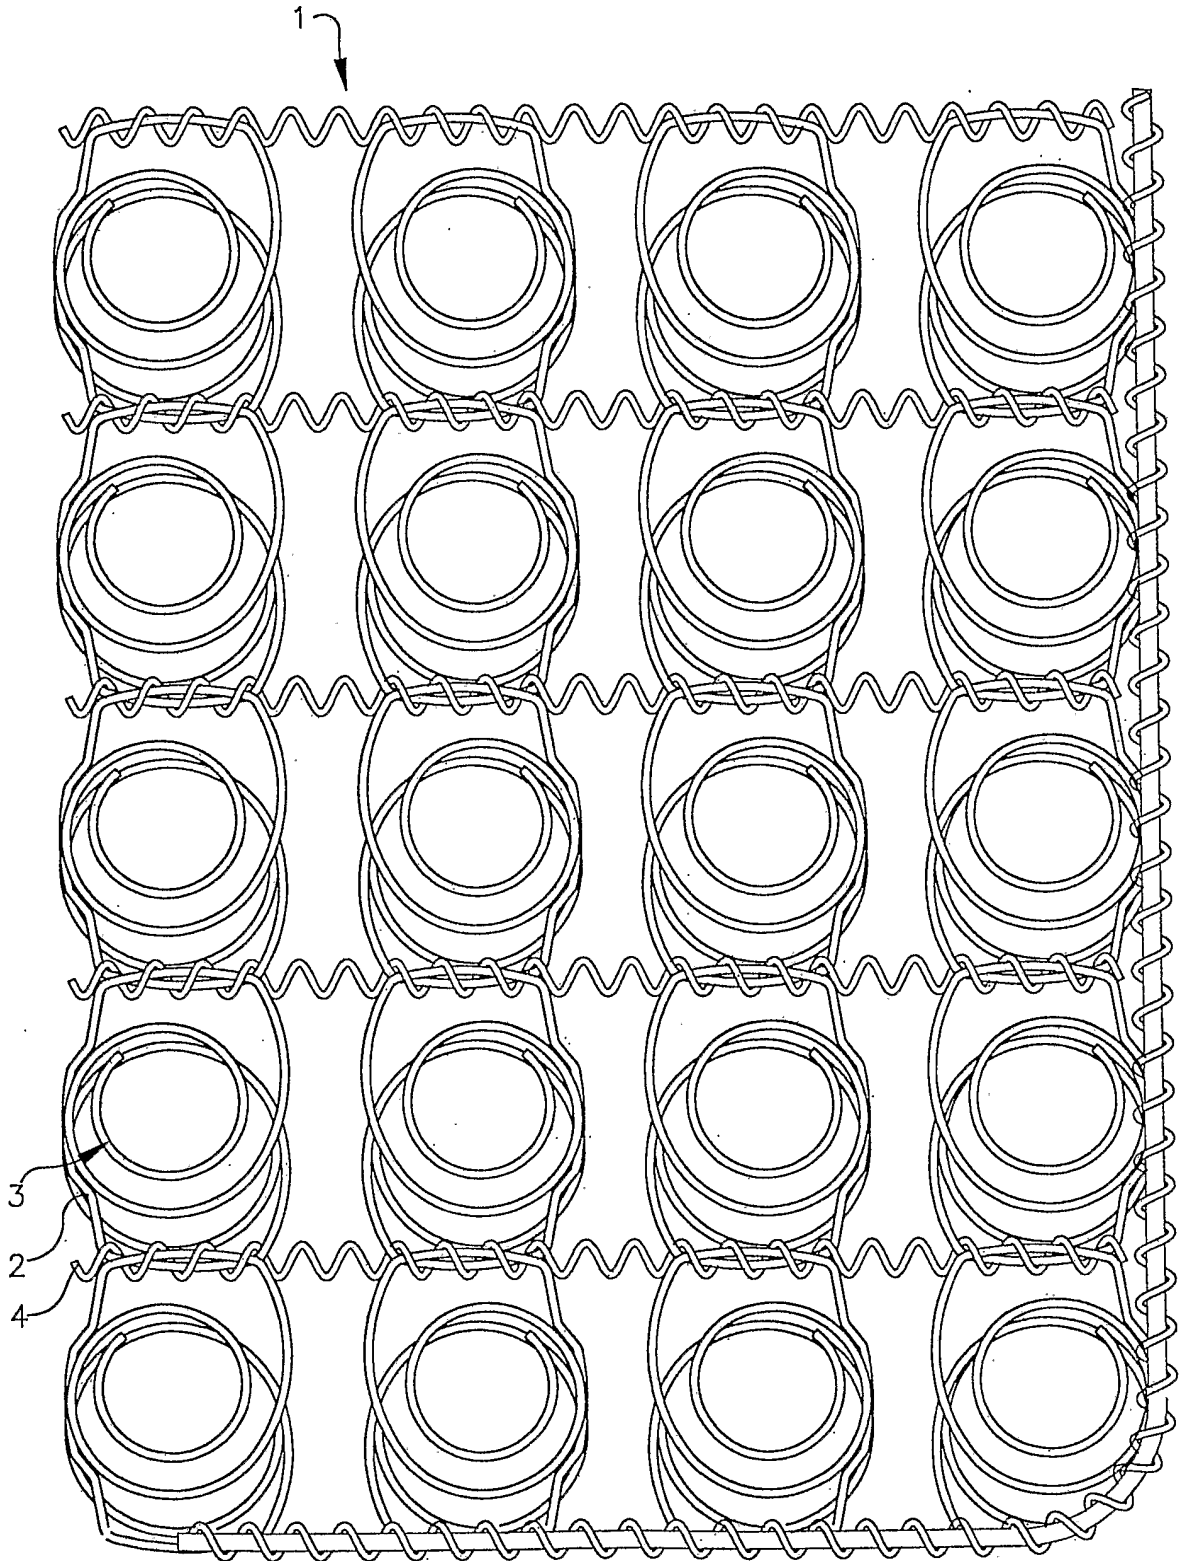


Fig.12

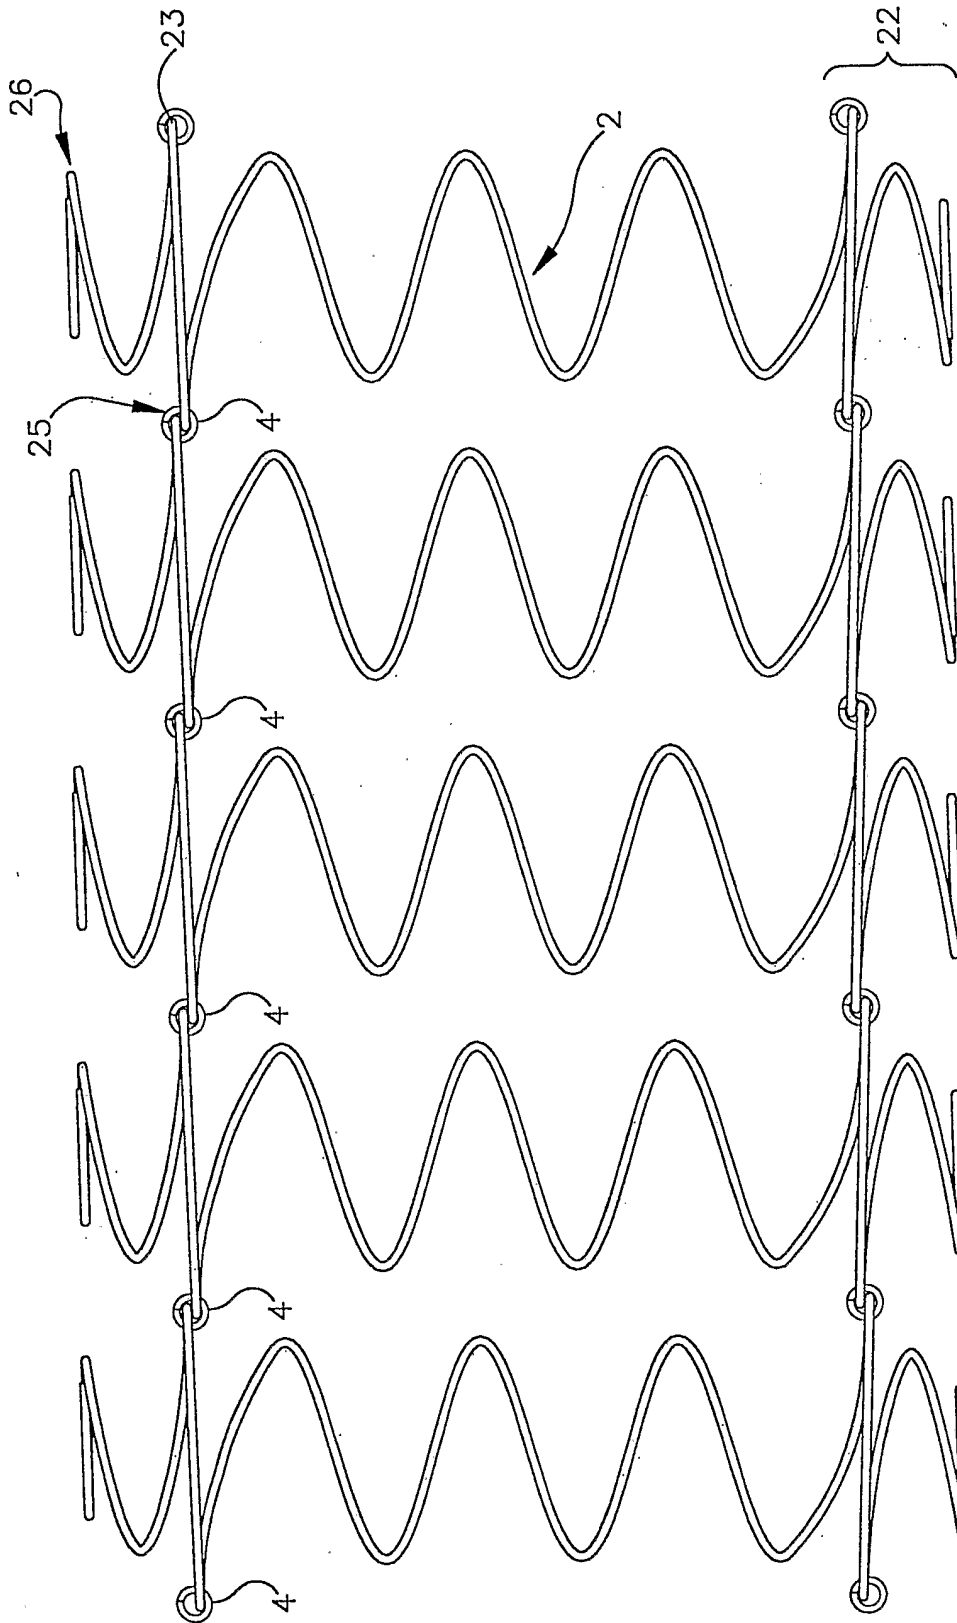


Fig.13

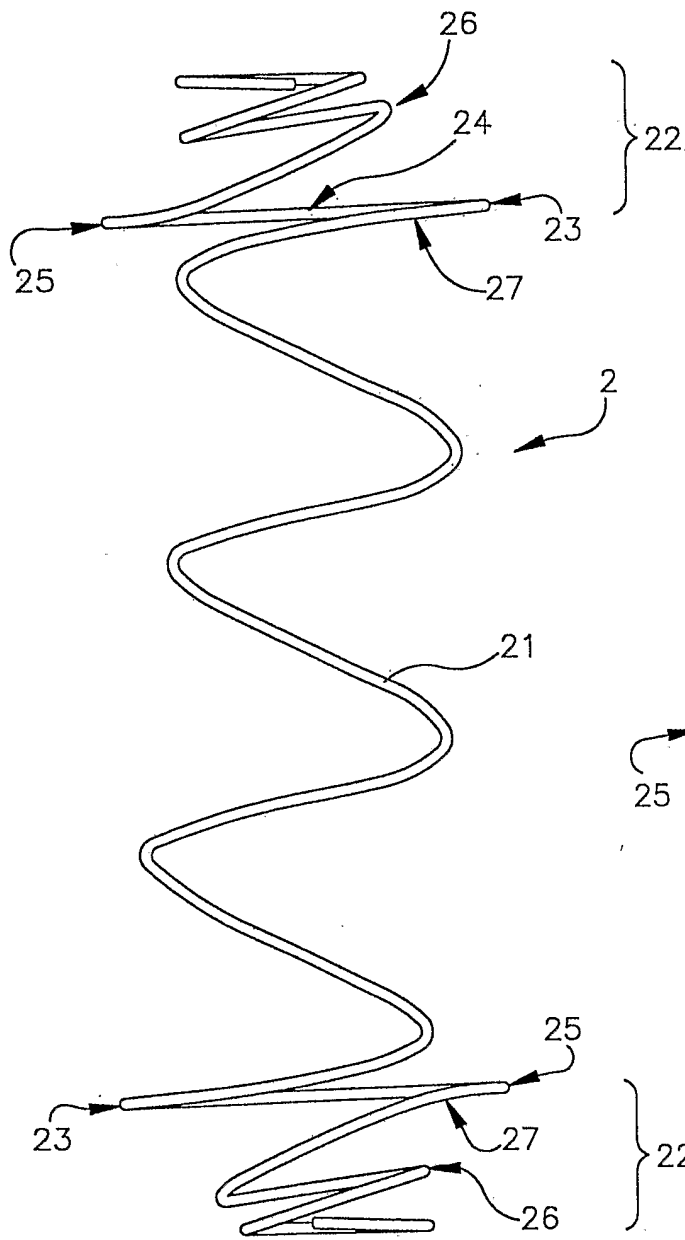


Fig.14A

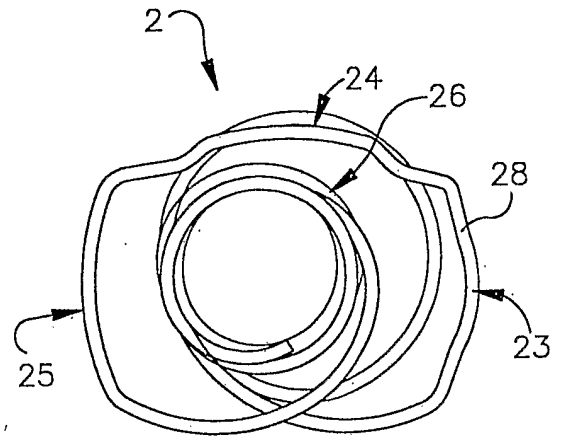


Fig.14B

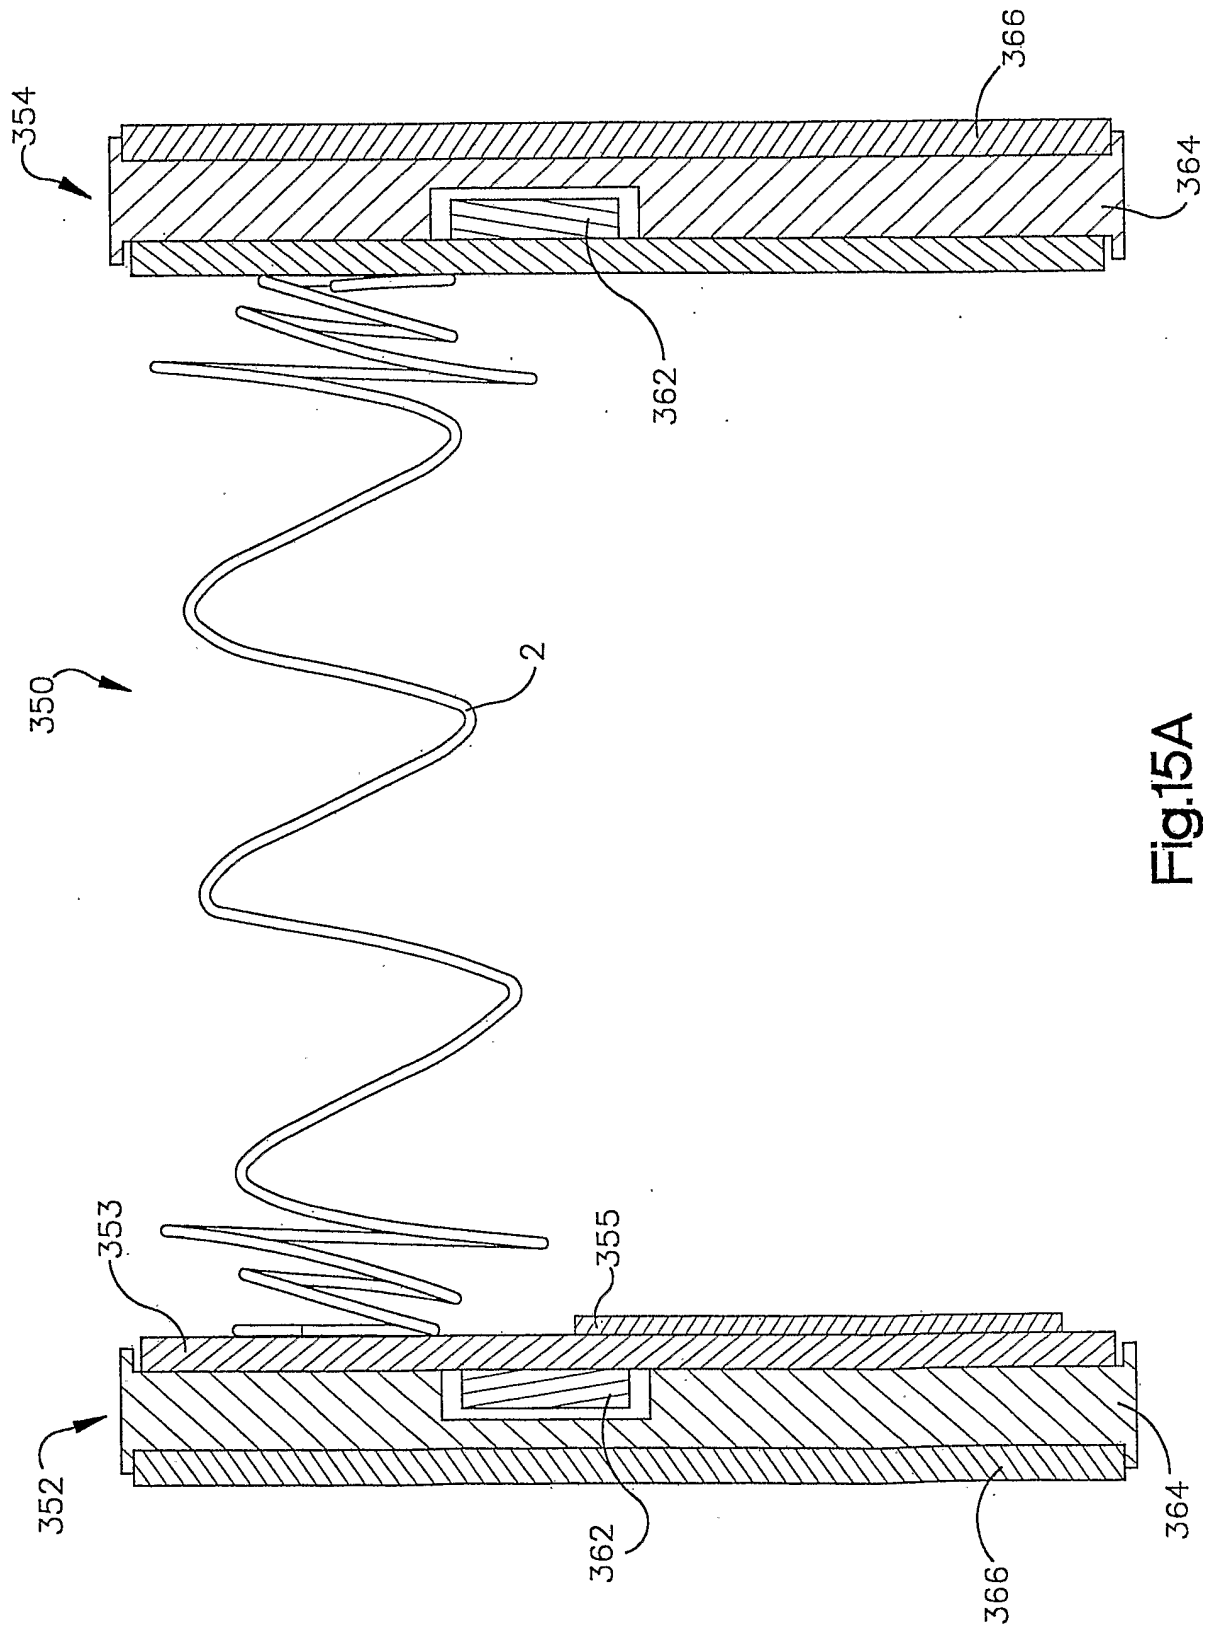


Fig.15A

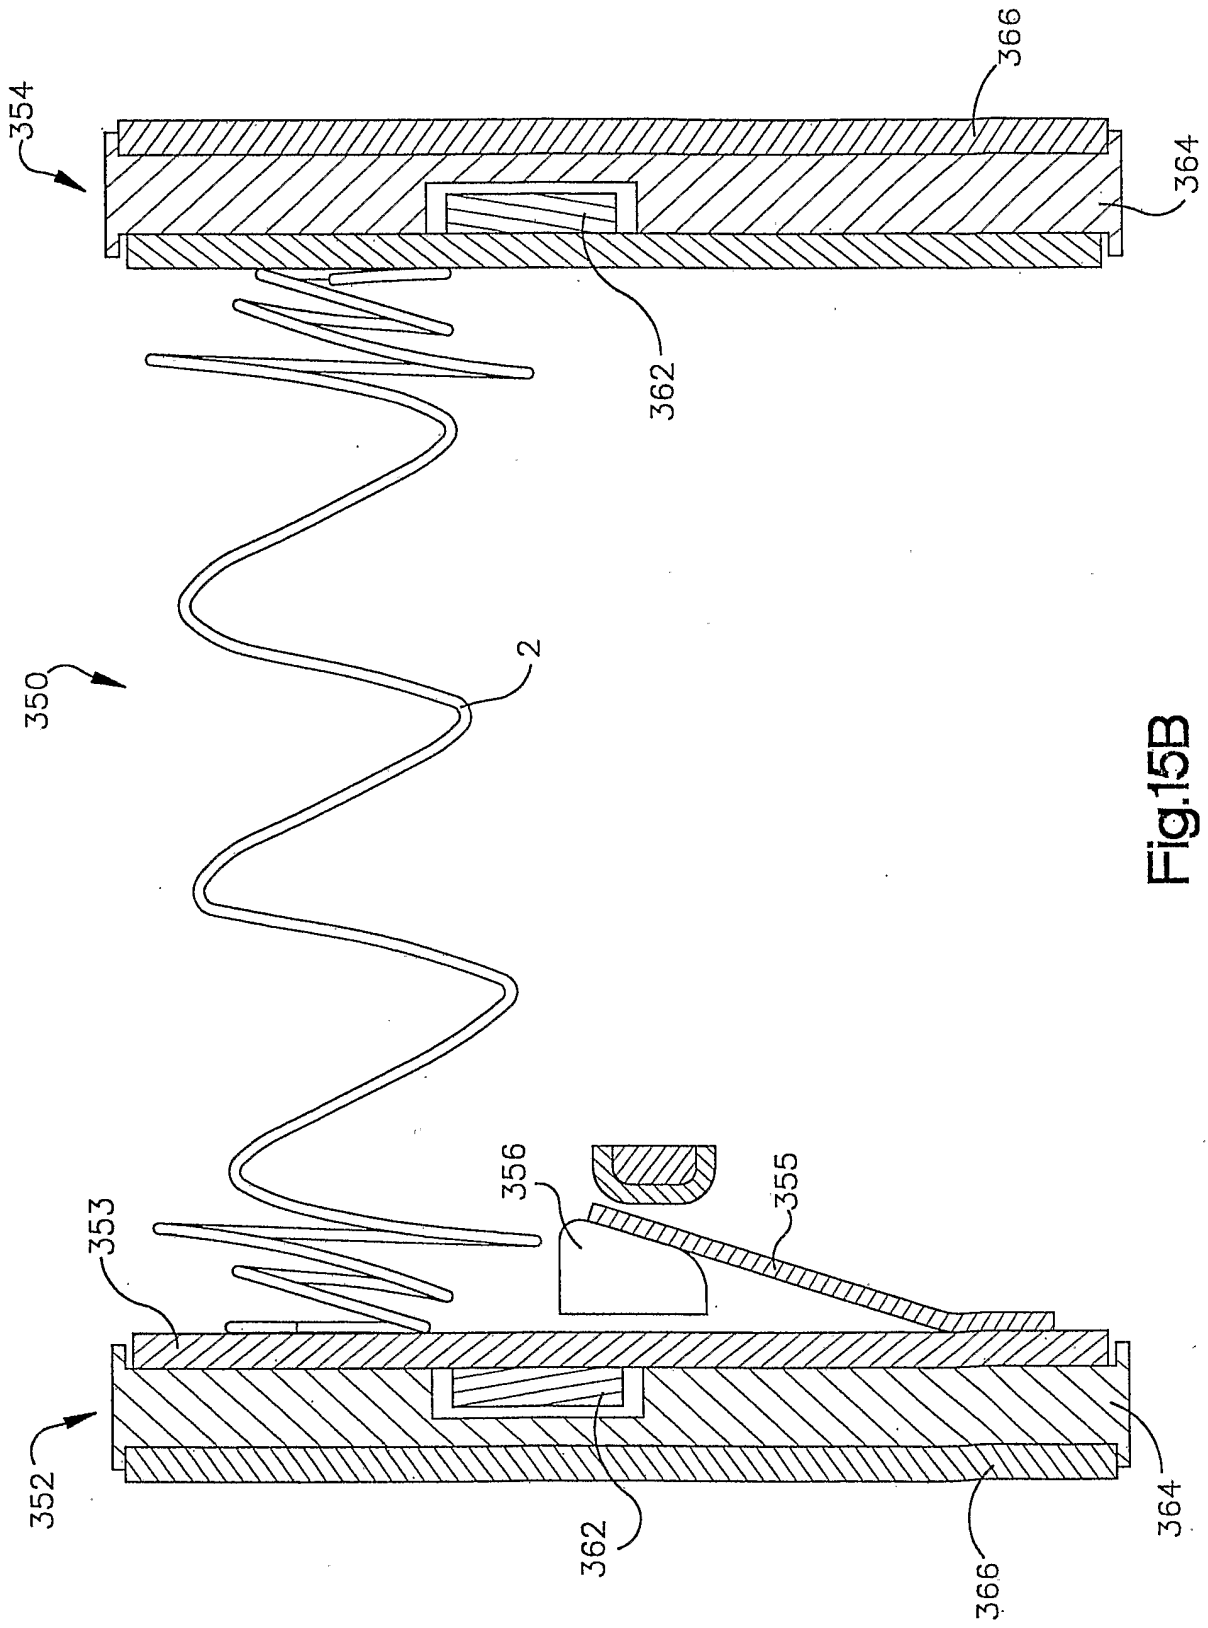


Fig.15B

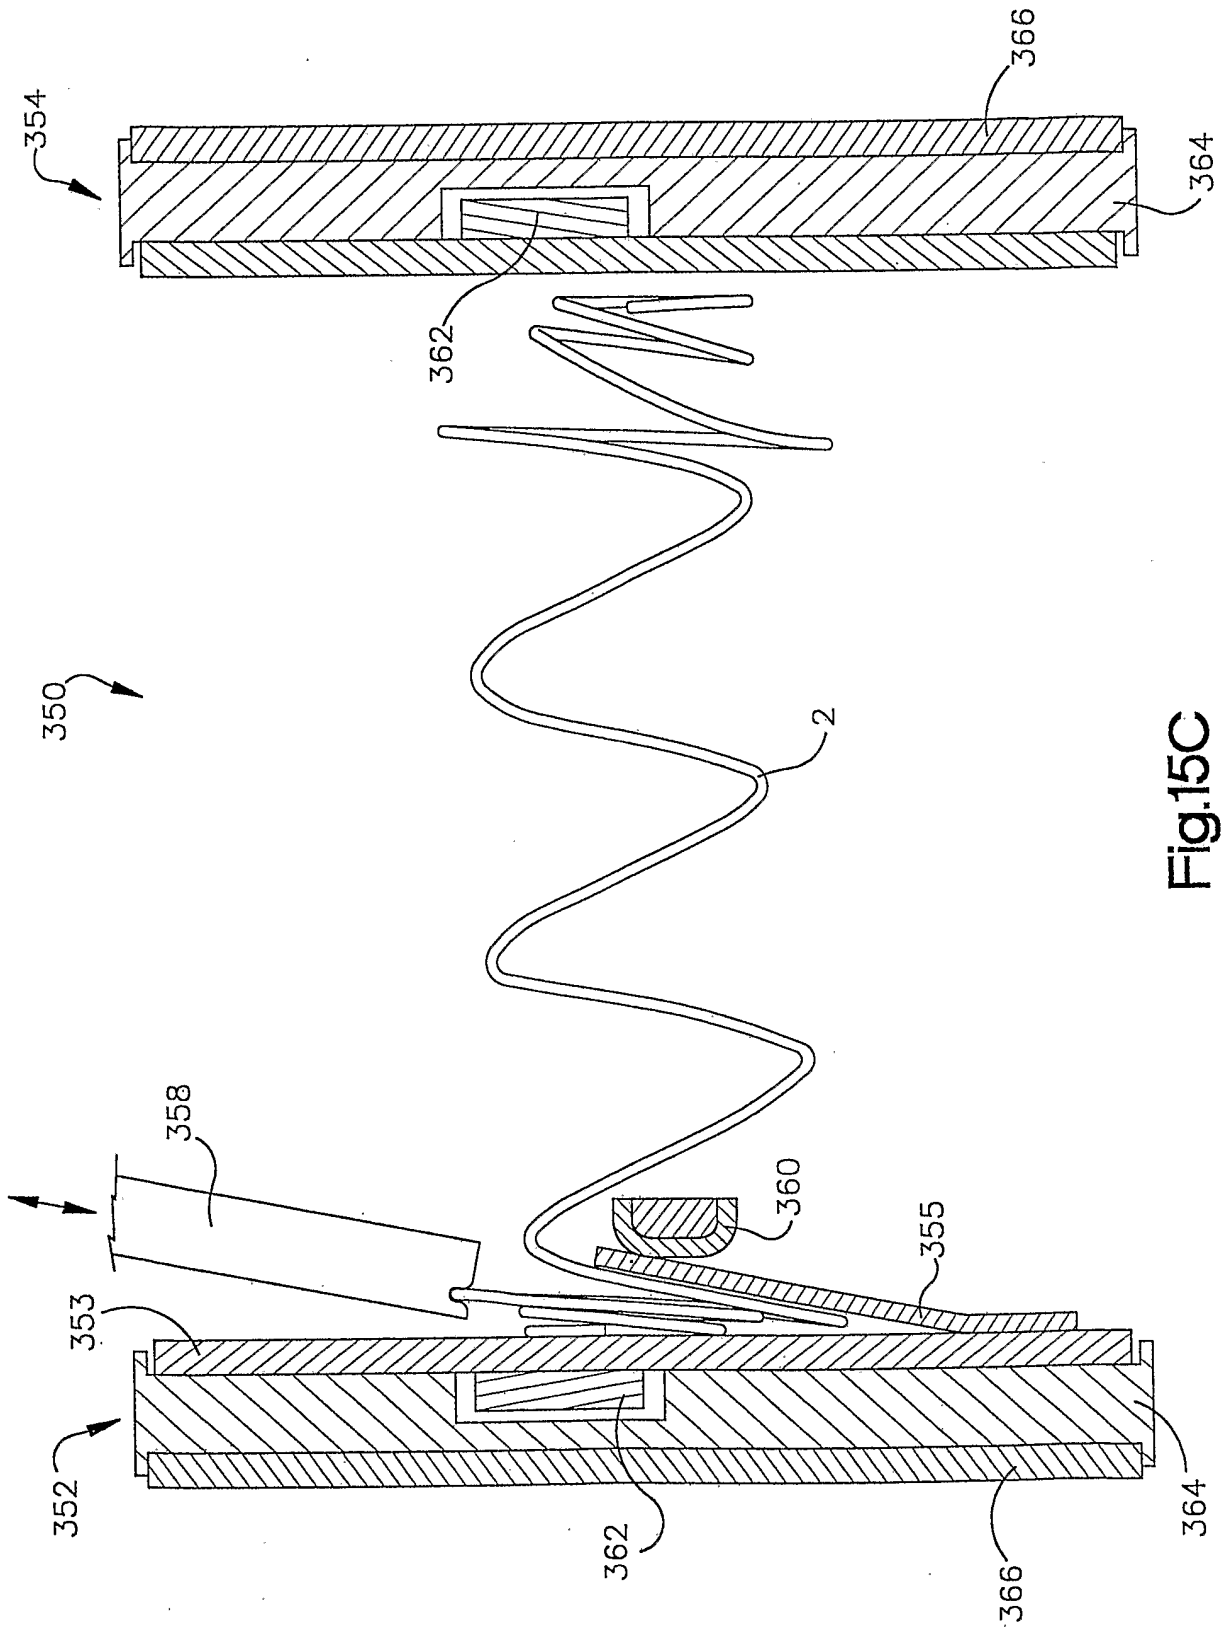


Fig.15C



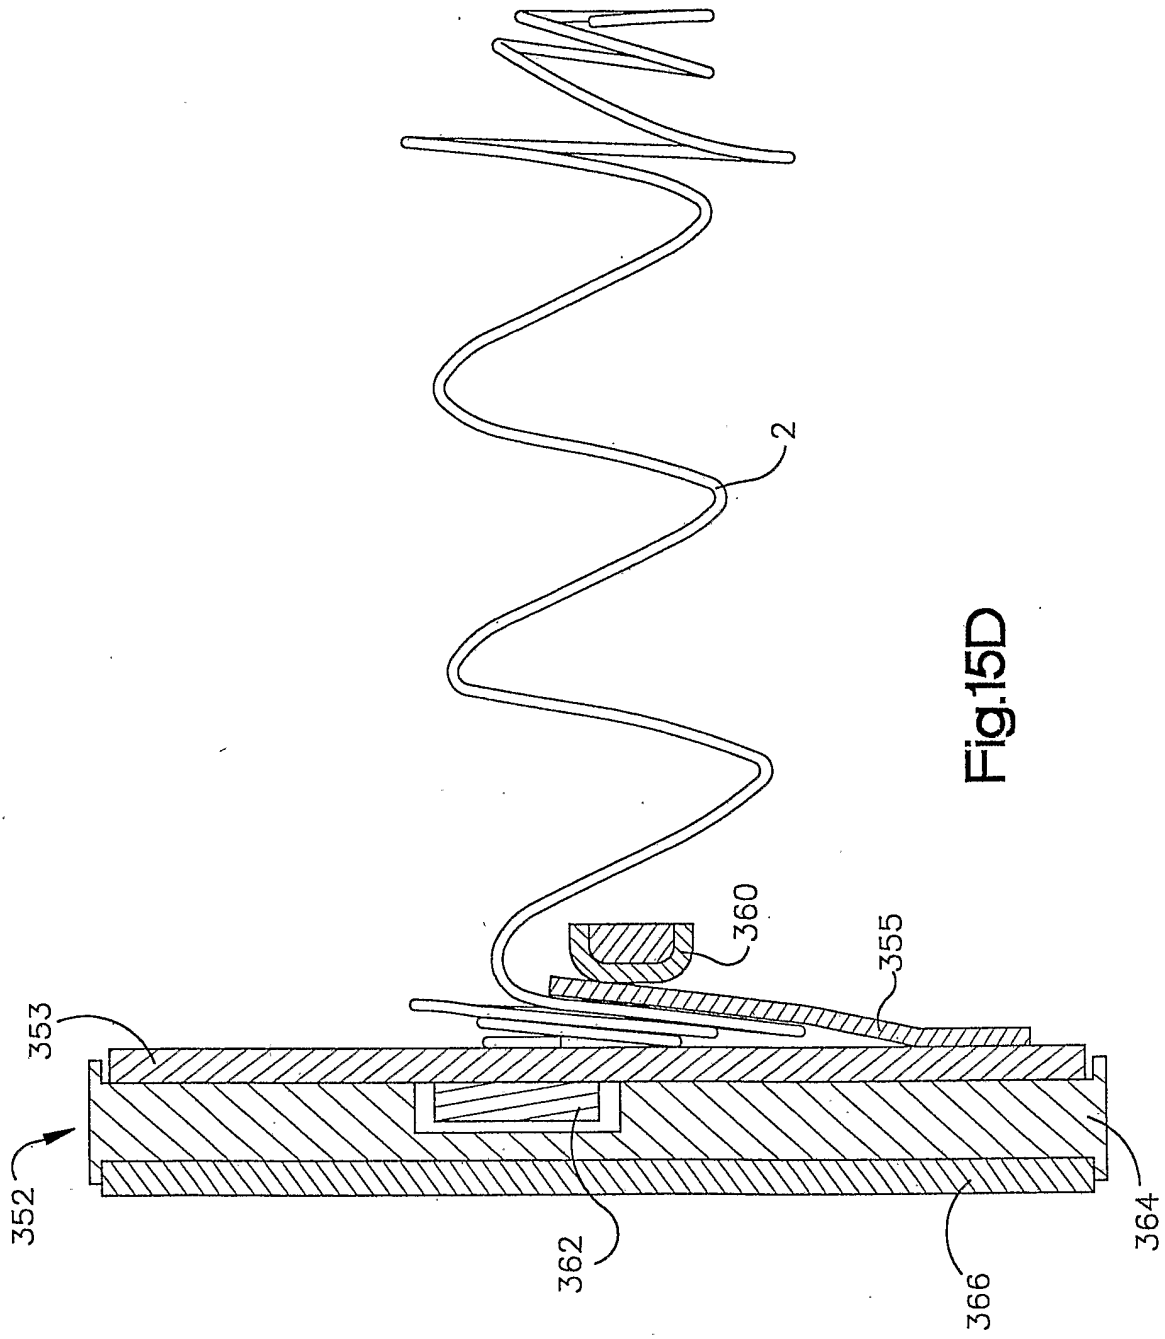


Fig.15D

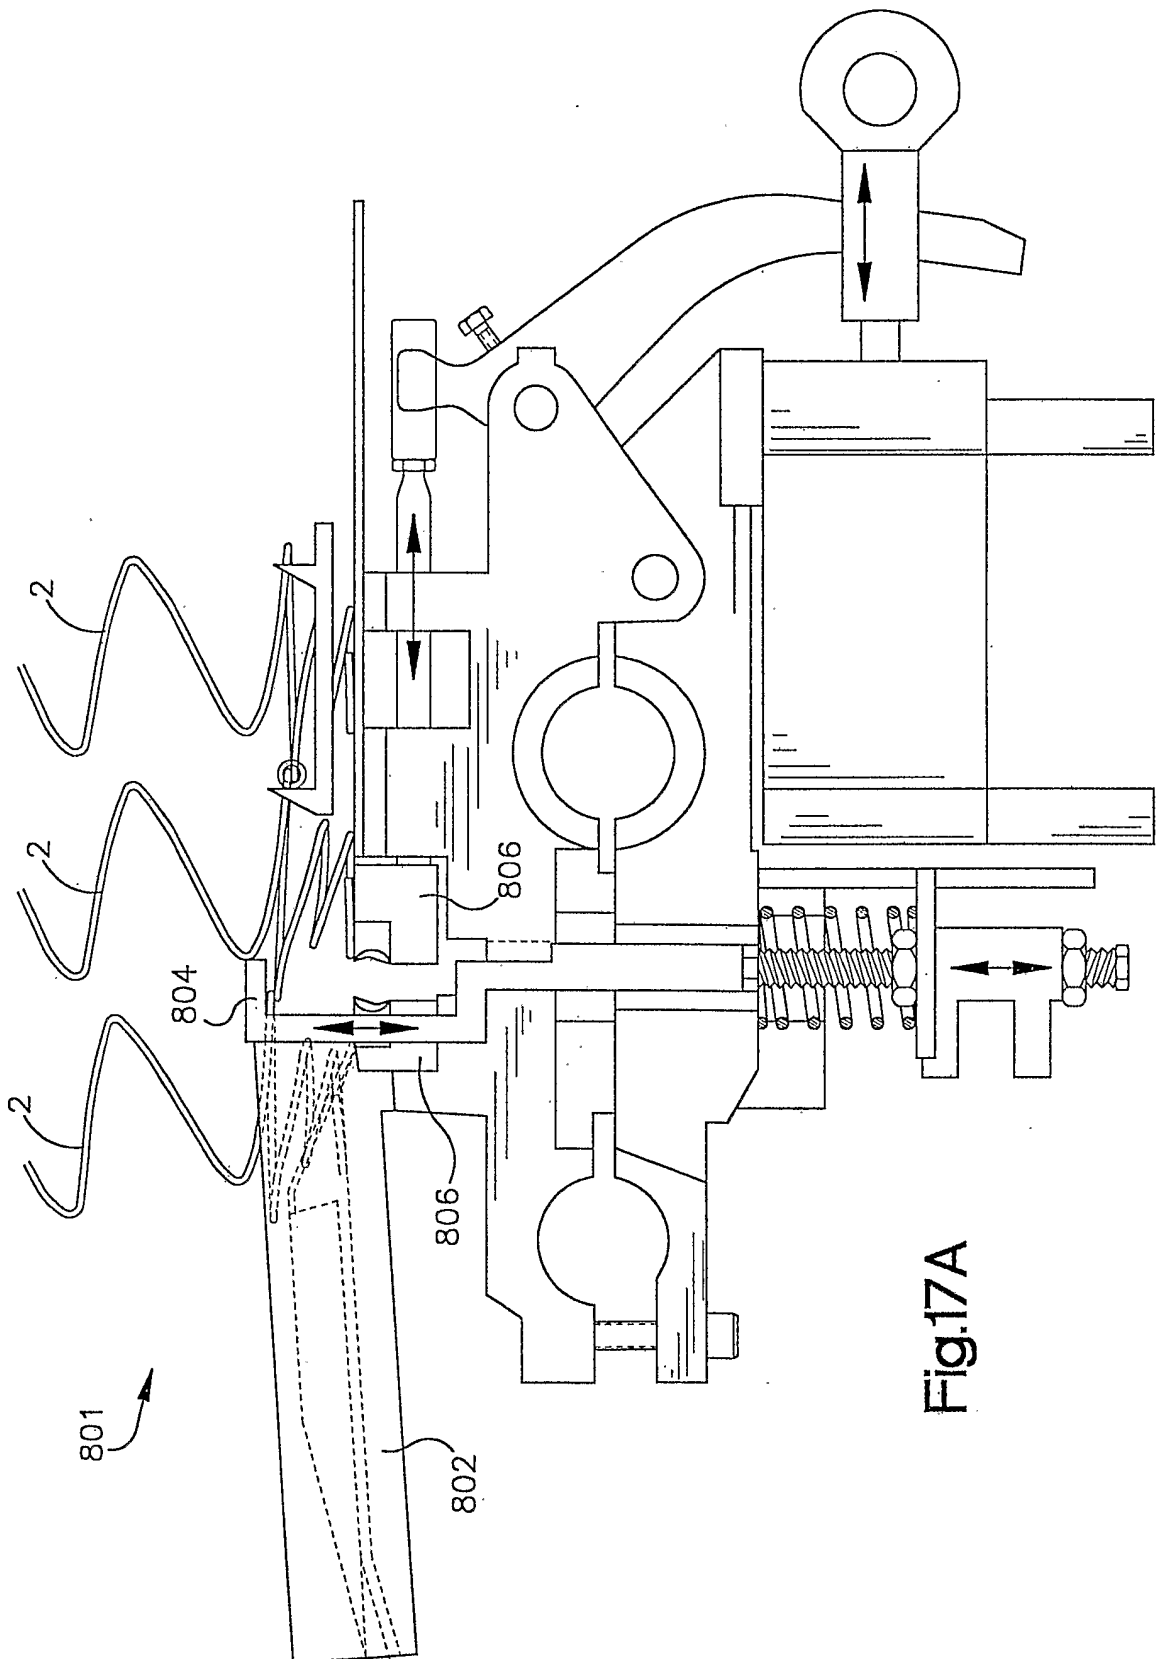


Fig.17A

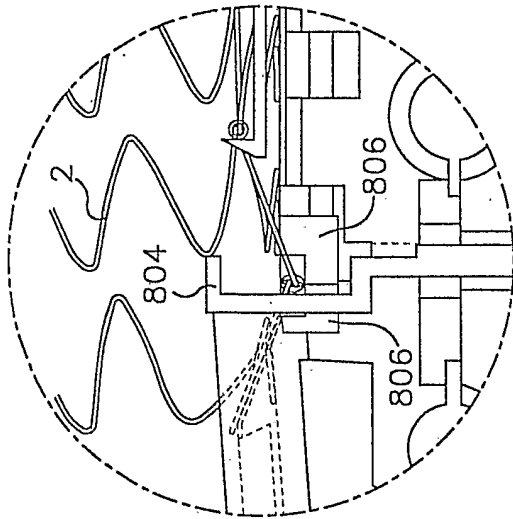


Fig.17D

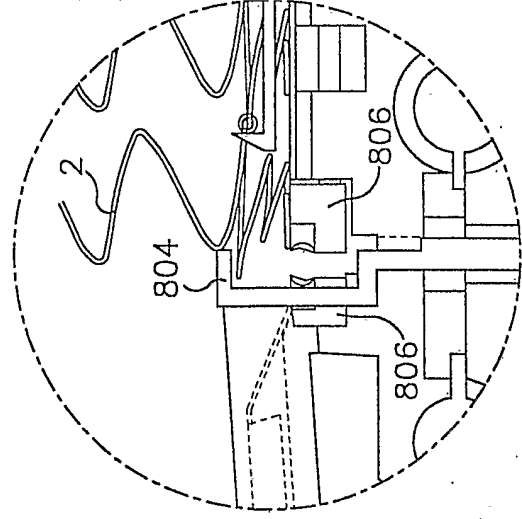


Fig.17G

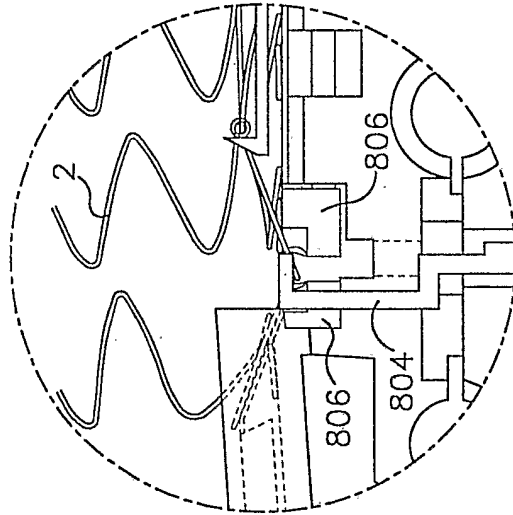


Fig.17C

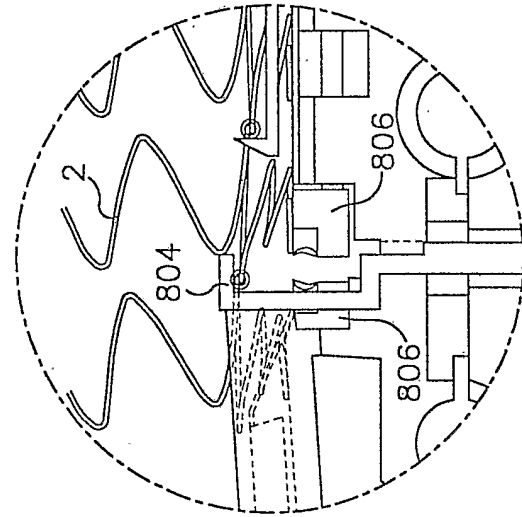


Fig.17F

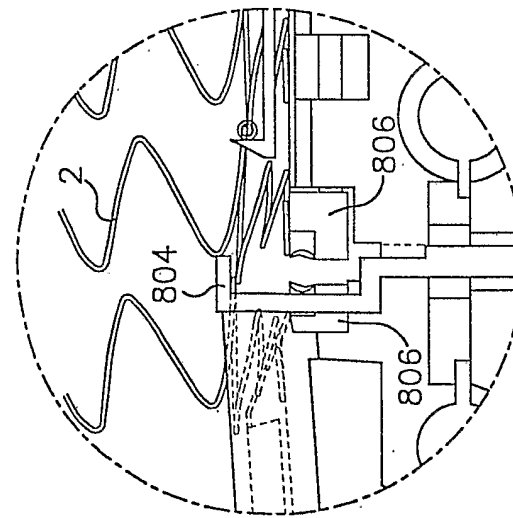


Fig.17B

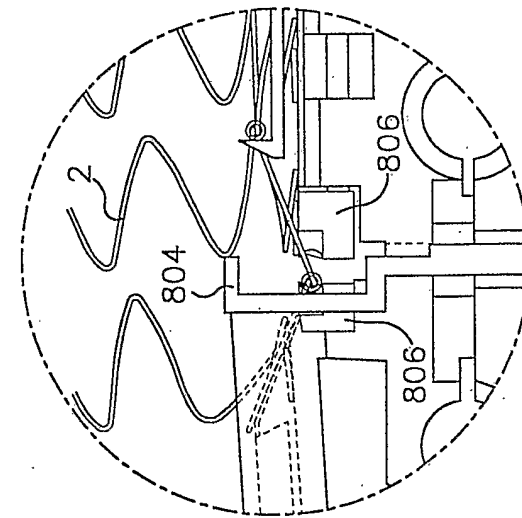


Fig.17E

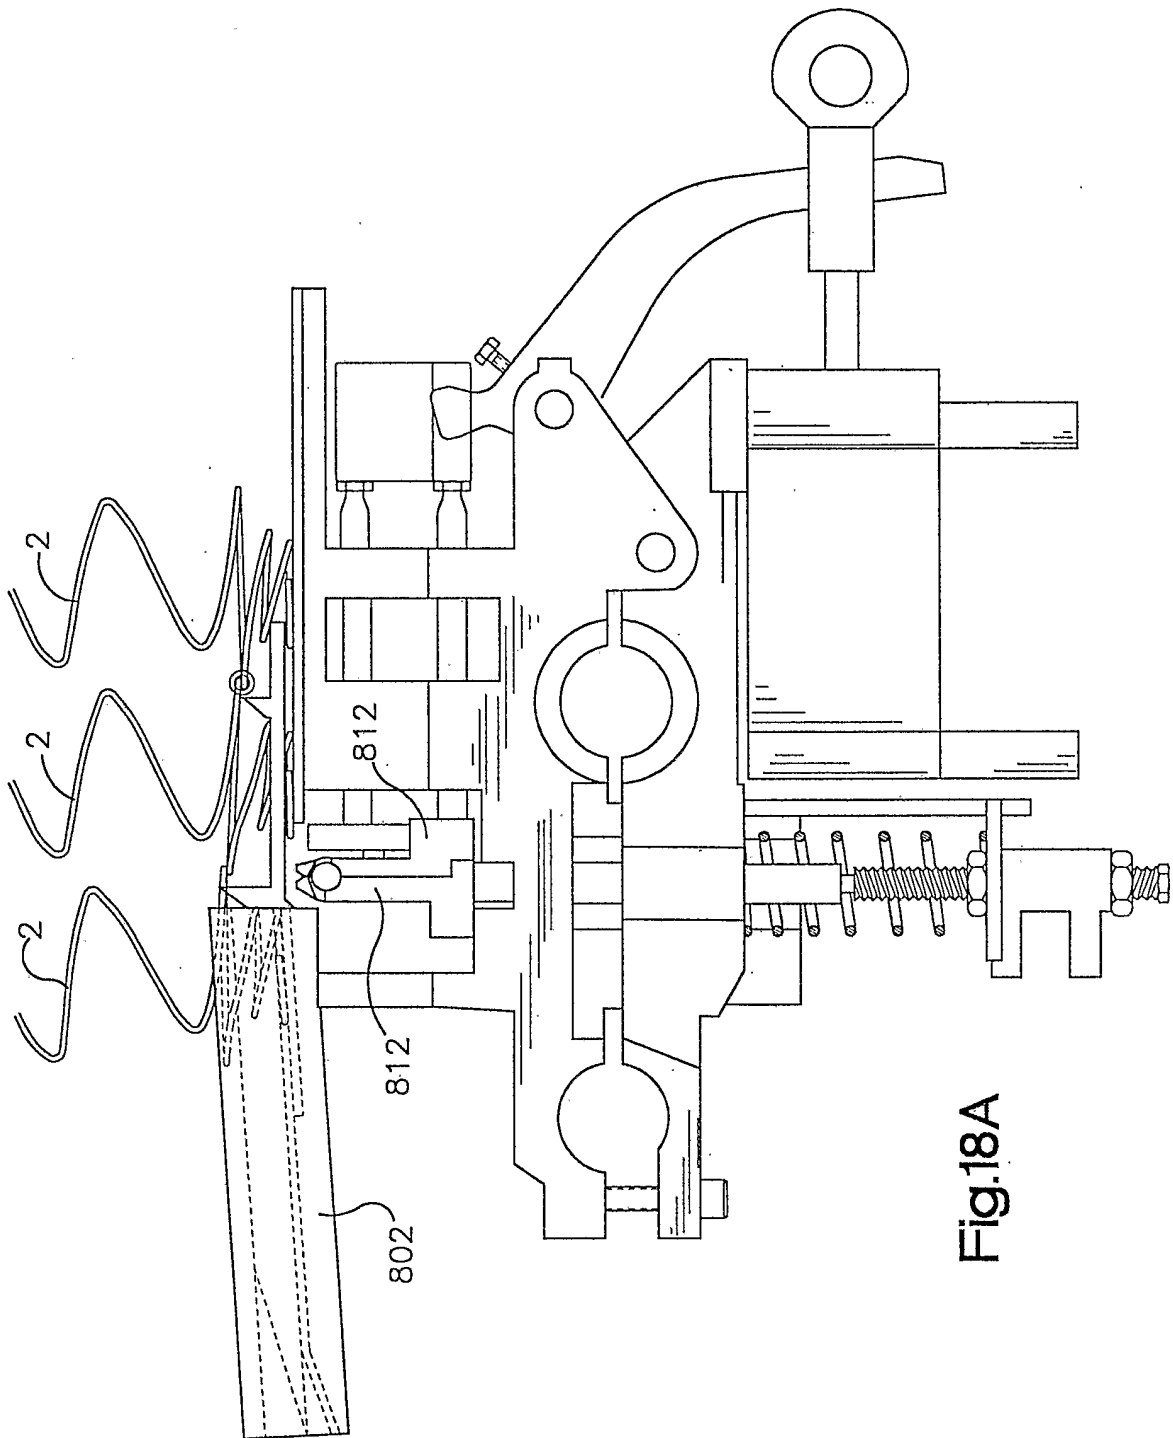


Fig.18A

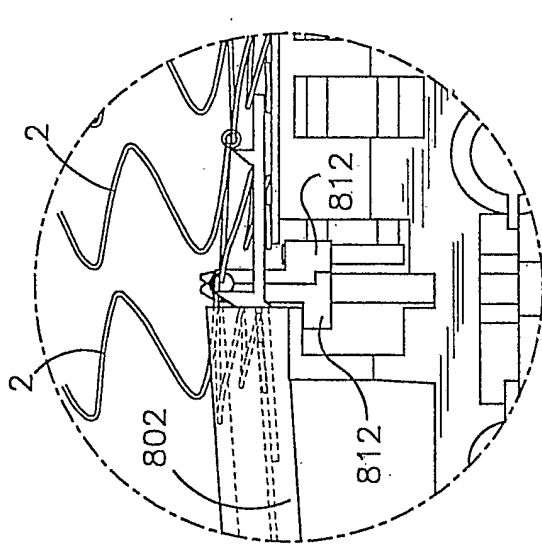


Fig.18D

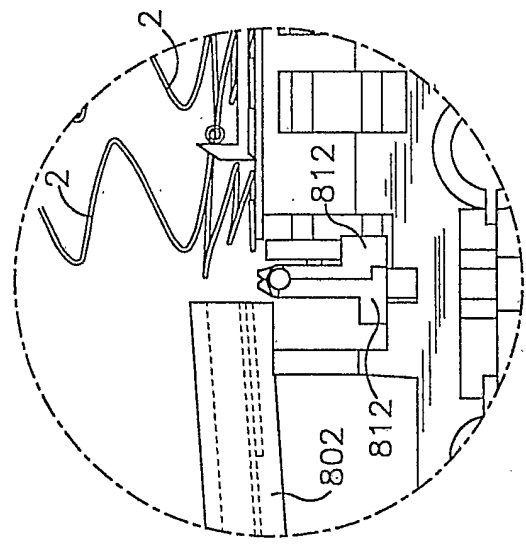


Fig.18G

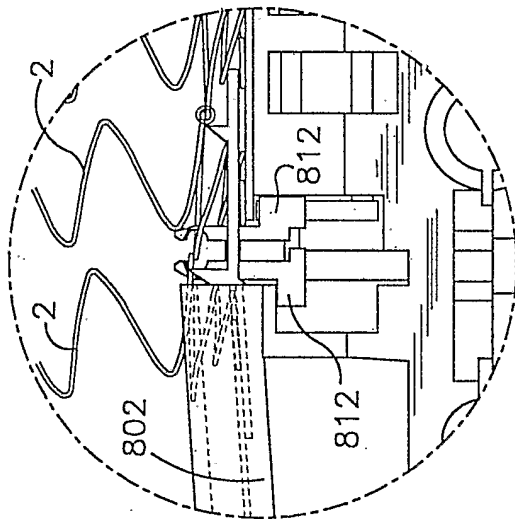


Fig.18C

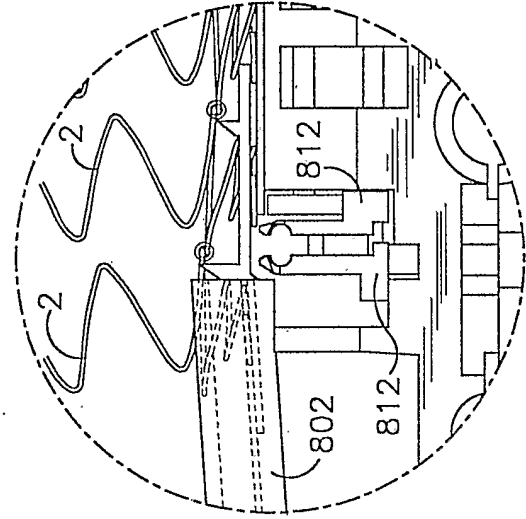


Fig.18F

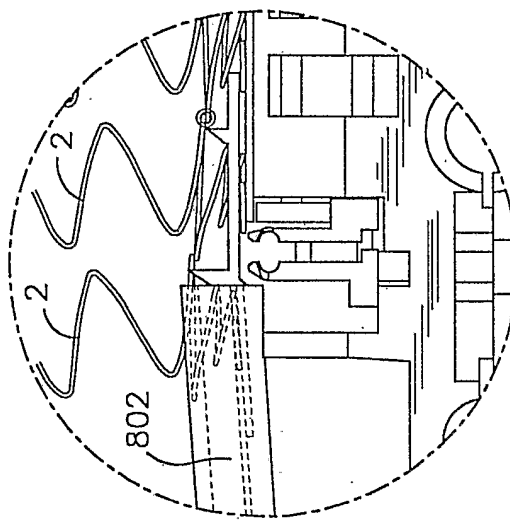


Fig.18B

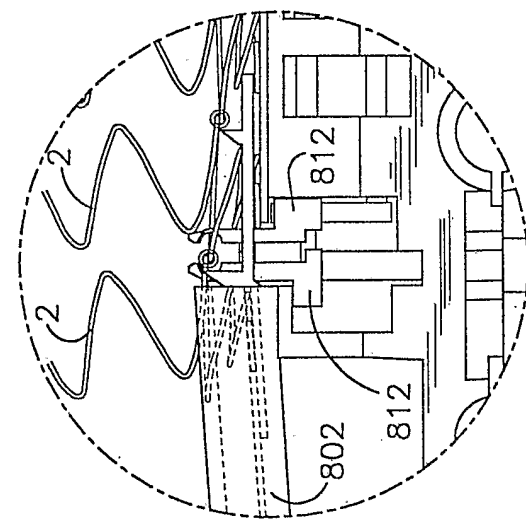
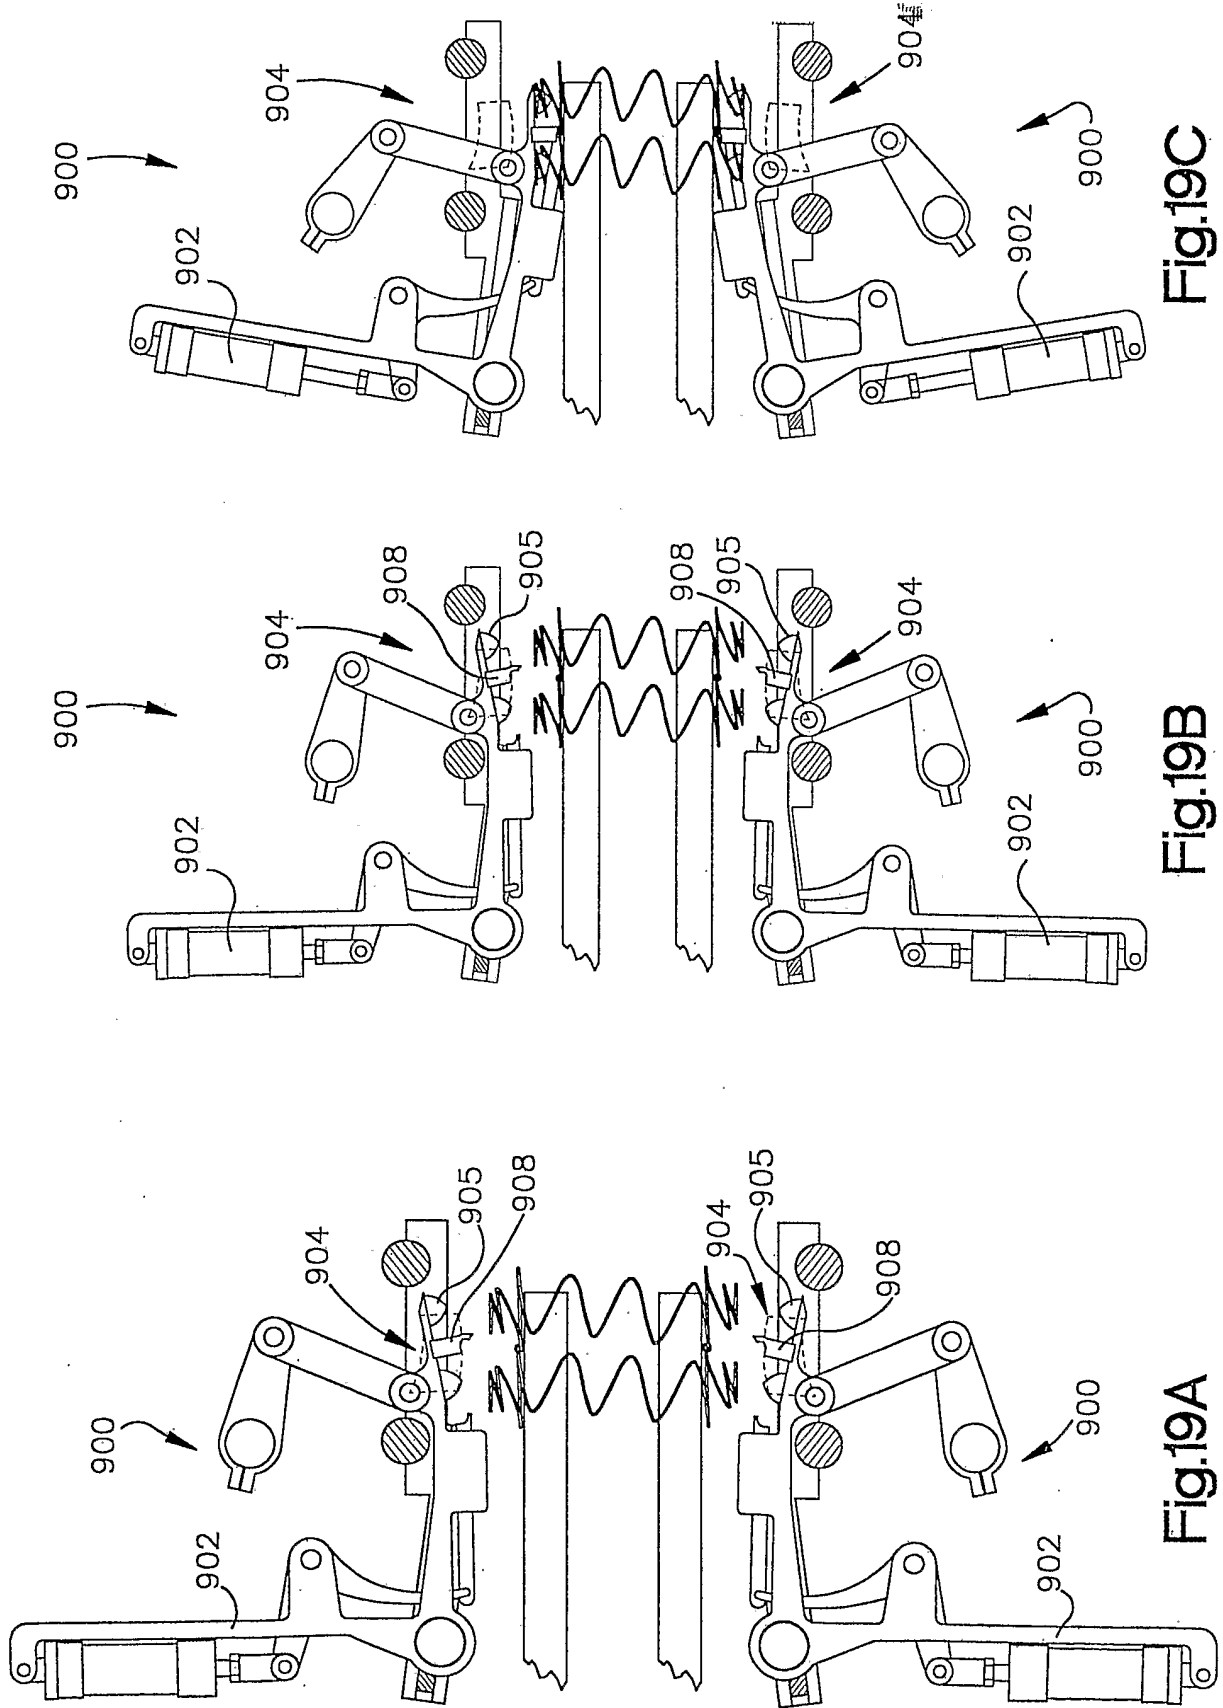


Fig.18E



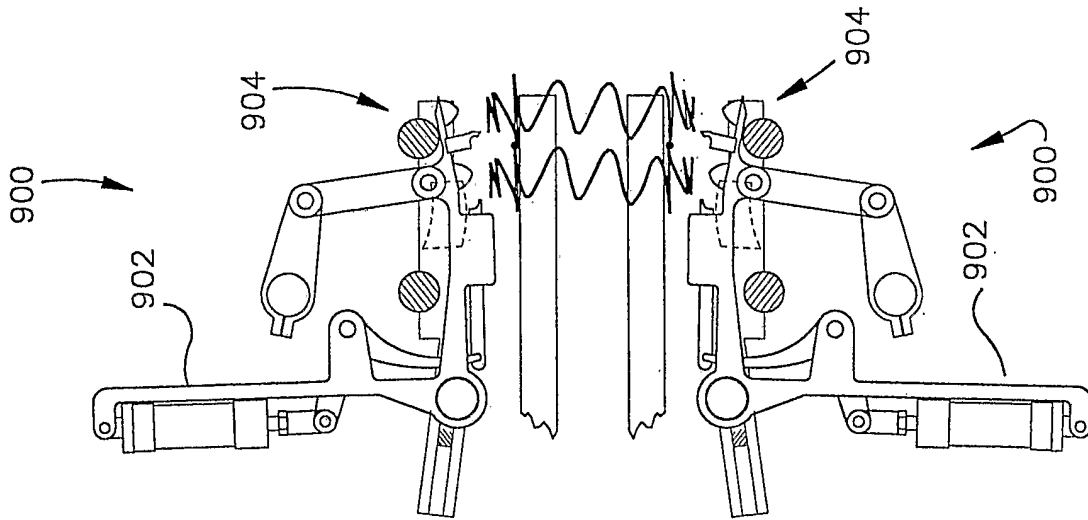


Fig.19D

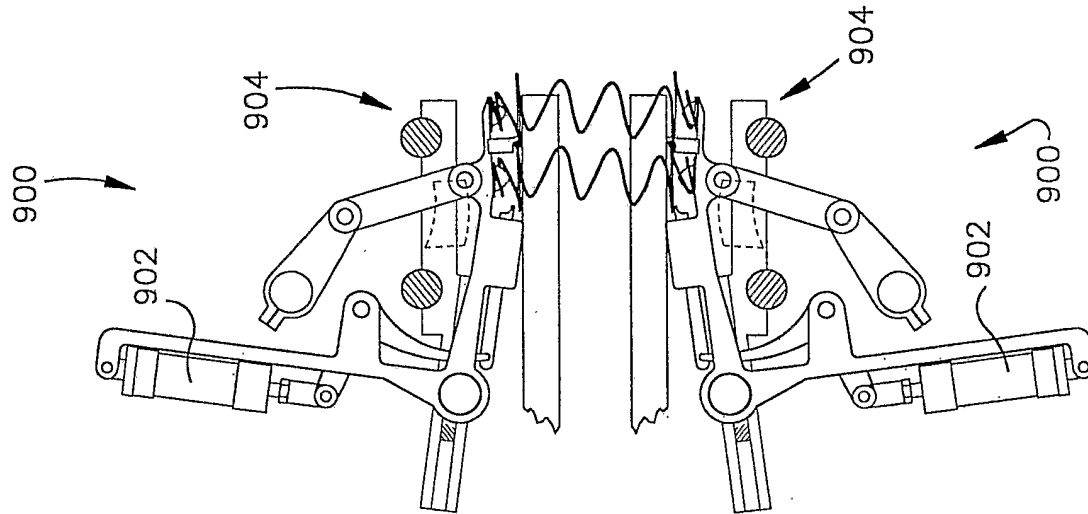


Fig.19E

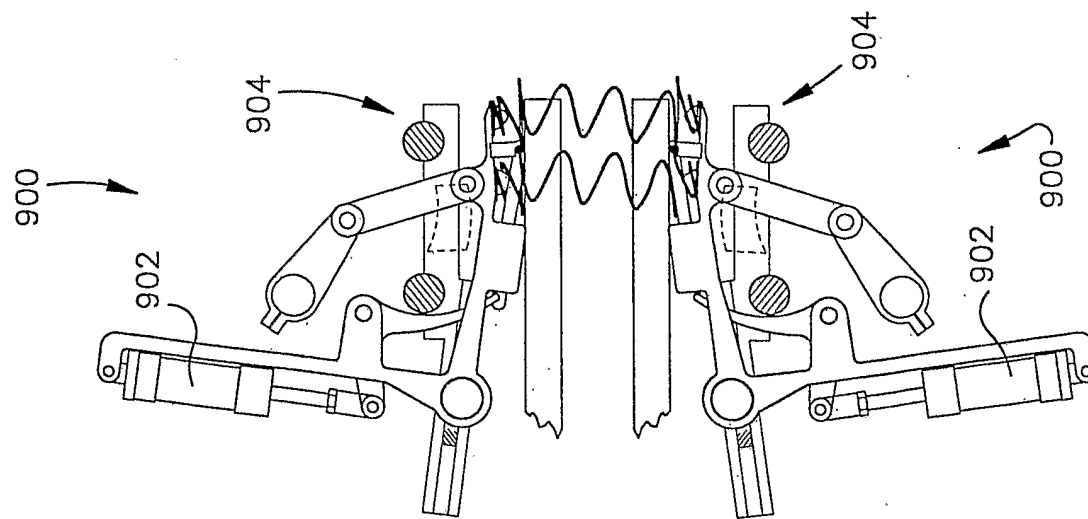


Fig.19F