

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199750057 B2
(10) Patent No. 736860

(54) Title
Aligned web in a container

(51)⁷ International Patent Classification(s)
B65D 035/22

(21) Application No: **199750057**

(22) Application Date: **1997.10.30**

(87) WIPO No: **WO98/19929**

(30) Priority Data

(31) Number	(32) Date	(33) Country
08/740970	1996.11.05	US

(43) Publication Date : **1998.05.29**

(43) Publication Journal Date : **1998.07.23**

(44) Accepted Journal Date : **2001.08.02**

(71) Applicant(s)
Colgate-Palmolive Company

(72) Inventor(s)
Ramon Armando Mejia; Patrick Andre Connan

(74) Agent/Attorney
F.B. RICE and CO.,139 Rathdowne Street,CARLTON VIC 3053

(56) Related Art
US 5628429
US 3788520
US 1894115




(51) International Patent Classification 6 : B65D 35/22	A1	(11) International Publication Number: WO 98/19929 (43) International Publication Date: 14 May 1998 (14.05.98)
(21) International Application Number: PCT/US97/19785 (22) International Filing Date: 30 October 1997 (30.10.97) (30) Priority Data: 08/740,970 5 November 1996 (05.11.96) US (71) Applicant: COLGATE-PALMOLIVE COMPANY [US/US]; 300 Park Avenue, New York, NY 10022 (US). (72) Inventors: MEJIA, Ramon, Armando; 33 Baker Circle, Hillsborough, NJ 08876 (US). CONNAN, Patrick, Andre; 19 Chrystal Drive, Lebanon, NY 08833 (US). (74) Agent: McGREAL, Michael, J.; Colgate-Palmolive Company, 909 River Road, Piscataway, NJ 08855-1343 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: ALIGNED WEB IN A CONTAINER

(57) Abstract

The web (26) for a dual chamber tubular container (10) can be maintained in an alignment across the container by providing one or more longitudinal modified areas (30) on the web so that the web will yield and fold in the areas of the modified material. The modification will be a thinning or weakening of the web to produce yield points, such as fold points. This thinning or weakening can be produced mechanically or chemically. Mechanically, a pinch or other shaped roll can be used to thin or weaken an area. Thermally, heat can be applied. The result is a web that remains in an alignment across a tubular chamber rather than in close contact with the sidewall.

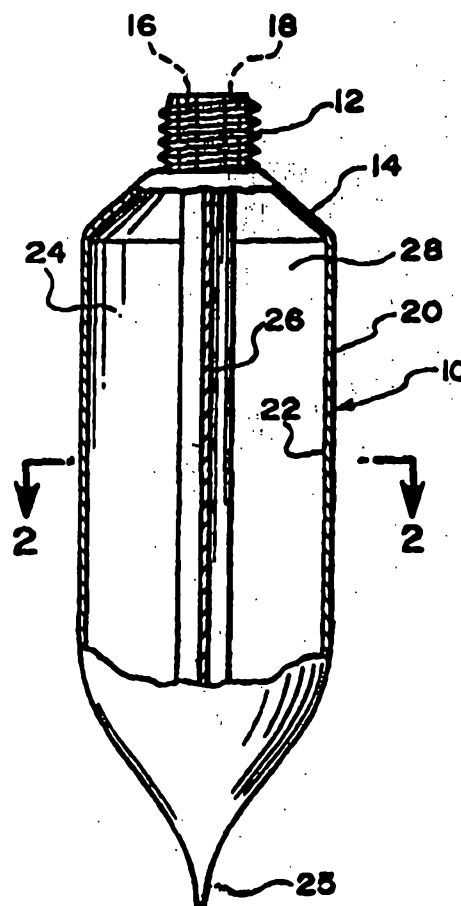

ALIGNED WEB IN A CONTAINER

Field of the Invention

5

This invention relates to a tubular chamber with an aligned web which divides the tubular chamber into a plurality of subsidiary chambers. This invention further relates to a method of aligning a web within a tubular chamber. Additionally, this invention relates to a tubular container comprised
10 of a tubular chamber with an aligned web.

Background of the Invention

15

Dual chamber tubular containers have been available for use for several decades. These are tubes that are generally circular or elliptical in shape and which have a web that divides the tubular container into two or more separate chambers. Usually these tubular containers are crimp sealed on the lower end in the same manner as conventional single chamber tubular containers and
20 have one or more dispensing shoulders and nozzles attached to an upper end. The chamber forming web and the sidewalls are attached to this dispensing shoulder so that the chambers are separate from the crimp seal through the dispensing opening of the tubular container.

25

Usually in dual chamber tubular containers the chamber forming web will have a width greater than the major cross-sectional axis of the tubular container. For a circular tubular container this would be a width greater than the diameter of the tubular container. One reason for this need is that it is desired in many uses to crimp seal the tubular container with the web
30 disposed linearly in the crimp seal. In this way this will be a three layer seal. If the web is not so disposed in the crimp seal then the web overlaps in areas with an uneven three to five layer crimp seal. Usually, this will result in a weak crimp seal. When disposed in the crimp seal, the web will have to be about one half the circumference of the tubular container when the tubular
35 container is of a round shape.

One problem with the web in such dual chamber tubular containers is that it tends to contact and follow the shape of the chamber sidewall. It does not stay disposed diametrically across the tube structure. This presents problems in making the tubular containers and in filling the tubular
 5 containers. The problem is that it can be difficult to attach the web to a dispensing shoulder and to put a filling head into each chamber in order to simultaneously fill the two chambers of the tubular container. When the web is contacting the tubular container sidewall, or in close proximity to the sidewall, it is difficult to manipulate the web. The present invention is
 10 directed to techniques for keeping the web positioned in a more diametric manner across the tubular container. The web is kept away from the container sidewalls.

The prior art of dual chamber containers where a partition web is
 15 attached to a container sidewall is illustrated by U.S. Patent 1,894,115; U.S. Patent 3,506,157; U.S. Patent 3,788,520 and U.S. Patent 5,244,120. U.S. Patent 1,894,115 discloses a dual chamber tube where the dividing web can be of a length greater than the diameter of the tube. However, the web as shown is not sufficiently wide to be within the crimp seal. To be within the
 20 crimp seal, the web would have to have a width of at least one half the circumference of the tube for a tube with a circular cross-section. U.S. Patent 3,506,157 discloses a tube with two or three chambers. U.S. Patent 3,788,520 discloses a tube with a web that has a corrugated-like fold. U.S. Patent 5,244,120 discloses a dual chamber tube where the dividing web has a width
 25 greater than the diameter of the tube. However, this is not a sufficient length to be disposed in the crimp seal of the tubular container. These webs are not one half the circumference of the containers. In relation to the diameter d of the tube, the web should be $\frac{1}{2}d$. A web that has a length of at least $\frac{1}{2}d$ will have a sufficient width for dual tube construction. U.S. Patent 5,628,429
 30 discloses a partition insert in a tube container where this partition insert is not attached to the sidewall, but only in a contacting relationship. Also, the partition insert is relatively thick.



Brief Summary of the Invention

- 5 In dual chamber and other multiple chamber tubes the web dividing wall or walls, will in most instances, have a width dimension greater than or equal to the cross-sectional dimension of the tubular container. For a circular tubular container this will be a width dimension greater than the diameter of the tubular container. In most instances, the width of the web will be at least

1508

100000



about one half the circumference of the tube. In mathematical terms this would be $1/2 \pi (d)$ where d is the diameter of the tube or about $1.57 (d)$. That is, the web should have a width of about one half again the diameter of the tubular container. A thin, flexible web having a width of $1.57 (d)$ or greater presents problems in a dual chamber tubular container. The web has a tendency to fall into contact with the inner surface of the sidewall. This can be due to the electrostatic attraction of the web for the sidewall or some other reason. The result, however, is that it is difficult to manipulate the web during the manufacture of the dual chamber tubular container and when filling the dual chamber tubular container. In the manufacture of the dual chamber tubular container, the web has to be manipulated when the dispensing end is attached. It has to be manipulated again when the tubular container is filled.

This problem of keeping a thin, flexible web aligned across the tubular container is solved by providing one or more longitudinal modified areas such as thinned or weakened areas to cause the thin, flexible web to have at least one fold point. Such a fold point can be at the center of the web or within about 80% of the of the distance of the center point of the web to the edge of the web at the sidewall. When there is such a fold point, the web material will gather more transversely across the tubular container rather than along the inner surface of a sidewall of the tubular container. Thus, at least one or more thinned or weakened modified areas can be an area of decreased thickness, or can be recess in the film that acts as a hinge or can be a treatment which makes the area more flexible. This area of decreased thickness can be from about a groove recess to about 50%, and preferably to about 25% of the width of the web. When a recess it will be about 0.1mm to about 2mm in width. The thickness of the thin, flexible web will be about .015mm to about 0.2mm.

The thinned or weakened modified areas can be created by running the web film through pinch rolls or other shaped rolls which splay the plastic to produce a thinned region. This can be from about 5% to about 50% of the thickness of the web. A wider thinned or weakened region will allow for a decreased thinning or weakening while a recess will need a greater thinning or weakening but at a more concentrated location. The thinned or weakened modified areas can also be created by heating, irradiation or a chemical treatment of the plastic surface to decrease the thickness or to otherwise affect the web material to selectively make it more flexible.

This creating a thinned area solves the problem of disposing the web across the tubular chamber and out of contact with the sidewalls of the tubular container. There is created a fold point so that the web is disposed more diametrically across the tubular chamber.

5

Throughout this specification the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated element, integer or step, or group of elements, integers or steps, but not the exclusion of any other element, integer or step, or group of elements, integers or steps.

10

Brief Description of the Drawings

Figure 1 is an elevational, sectional view of the present dual chamber tubular container with a web having a thinned area.

15

Figure 2 is a cross-sectional view of the web of the tubular container with no thinned area.

Figure 3 is a cross-sectional view of the web of the tubular container with a thinned area.

Figure 4 is a cross-sectional view of a common position of a web having a constant thickness.

20

Figure 5 is a cross-sectional view of the position of a web that has a centrally located recess thinned area.

Figure 6 is a cross-sectional view of a web with one wide thinned area.

Figure 7 is a cross-sectional view of a web with two thinned areas.

25

Detailed Description of the Invention

The present invention will be disclosed in more detail with reference to the drawings. In Figure 1 there is shown a dual chamber tube 10 having a shoulder 14 and a dispensing end 12. The dispensing end carries apertures 16 and 18 for the dispensing of products from chambers 24 and 28 respectively. Web 26 separates the tubular container 10 into the two chambers formed by the web and sidewall 20. A crimp 25 seal the bottom of

35



the tubular container. The web 26 is disposed in the crimp 25. This will keep the web disposed across the tubular container.

Figure 2 is a cross-sectional view of the tubular container of Figure 1. Web 26 is attached to sidewall 20 at 32 and 34. The web has a thinned area at 30. This thinned area is essentially at a mid-point of the web. This is one preferred position. However, it is very effective if the modified thinned area is within about the central 80% of the lateral dimension of the web. That is, the thinned area is about ten percent of the distance from each of the sidewalls. This is shown as being between points of A and B in Figure 2.

Figure 3 is a cross-sectional view of the web of the tubular container with no thinned area for the dispensing of products from chambers 24 and 28 respectively. Web 36 separates the tubular container 10 into the two chambers formed by the web 26 and sidewall 20. A crimp 25 seals the bottom of the tubular container. The web 26 is disposed in the crimp 25. The web is attached to the sidewall at 38 and 40. The web in this embodiment adjusts to a point adjacent to sidewall 20.

Figure 4 is an elevational view of a web that has a recess 42 in one side. This is shown more clearly in Figure 5. This area 42 is a narrow thinned area with this area 42 acting as a hinge around which the web 40 can bend. There can be more than one recess 42. Figure 6 is a cross-sectional view of a web 44 where there is a thinned area 46 between points A and B. Points A and B are about one quarter of the distance in from the ends of the web 44. This thinned area is in contrast to the recess shown in Figure 5. Figure 7 shows two thinned areas 52 and 54 in web 50.

The weakening or thinning can be accomplished mechanically, thermally or chemically. It is preferred to accomplish the thinning or weakening mechanically. In this embodiment a pinch roll, or some other shaped roll, is passed in contact with the film at a pressure of about 1 kg/cm² to about 6 kg/cm². This force splays the plastic and produces a weakened area. This step can be a part of making the film where the weakened areas are formed just prior to the film being placed onto rolls. However, the film also can be mechanically modified just prior to the film being used. In this embodiment as the film is being unwound, one or more longitudinal weakened

or thinned areas are produced. Thermally, heat can be provided to thin an area by flowing some of the plastic to another area. Chemically, some of the film surface can be leached away.

5 This invention is directed to the use of thin walled webs. These are thin flexible webs having a thickness of about .015mm to 0.2mm, and preferably from about .025mm to .015mm. The thinned area can be one or more recesses or thinned areas. This thinned area can be located at the center point of the web to any point to about 10% of the distance from the
10 sidewall.

 The web will be attached to the sidewalls by heat bonding, although adhesives would be used. The web material can be of essentially any plastic, with thermoplastics being preferred. These preferred plastics include
15 polyethylene, polypropylene, copolymers of polyethylene and of polypropylene, ethylene vinyl alcohol, ethylene vinyl acetate, polyethylene terephthalate, polyvinyl chloride and polyvinylidene chloride.

 Any discussion of documents, acts, materials, devices, articles or the like which has been included in the present specification is solely for the
20 purpose of providing a context for the present invention. It is not to be taken as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present invention as it existed in Australia before the priority date of each claim of
25 this application.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A method of aligning a web in an elongated tubular chamber comprising

5

providing a sidewall web and a partition web, said partition web having width greater than the cross-sectional diameter of the tubular chamber;

10

overlaying at least a part of said sidewall web with said partition web and attaching the edges of said partition web to said sidewall web; and

15

overlaying the longitudinal edges of said sidewall web and attaching said longitudinal edges to form said elongated tubular chamber;

20

characterized in that said partition web has a thickness of 0.015mm to 0.2mm and an area of modified thickness is placed longitudinally along said partition web.

2. A method as in claim 1 wherein said partition web has a width of at least about one-half the circumference the elongated tubular chamber.

25

3. A method as in claim 1 or claim 2 wherein there are at least two longitudinal areas of modified thickness along said partition web.

30

4. A method according to any one of claims 1 to 3 wherein said at least one area of modified thickness is located at about a midpoint of said partition web.

5. A method as in claim 4 wherein said at least one area of modified thickness is located from said midpoint of said partition web to a point about 10% of the distance to a sidewall of said tubular chamber.



6. A method according to any one of claims 1 to 5 wherein said at least one area of modified thickness is an area of decreased thickness.
- 5 7. A method according to any one of claims 1 to 6 wherein said sidewall has a thickness of 0.25mm to 2mm.
8. A method according to any one of claims 1 to 7 wherein a dispensing shoulder is attached to one end of said partition web and said sidewall web of said elongated tubular chamber, said dispensing shoulder and
10 said elongated tubular chamber forming two continuous separate chambers.
9. A method of aligning a web as in claim 8 wherein an other end of said elongated tubular chamber is sealed, the partition web being disposed
15 in the seal.
10. An elongated tubular chamber with an aligned partition web comprising an elongated tubular chamber having an inner surface and open at each end, a partition web having two longitudinal edges within
20 said elongated tubular chamber, each of said longitudinal edges attached to the inner surface of said elongated tubular chamber, characterized in that said web has a thickness of 0.015mm to 0.2mm and at least one longitudinally extending area of decreased thickness.
- 25 11. An elongated tubular chamber as in claim 10 wherein said at least one longitudinally extending area of modified thickness is as about a midpoint of said web.
12. An elongated tubular chamber as in claim 11 wherein said at least one
30 longitudinally extending area of modified thickness is located from said midpoint of said web to a point about 10% of the distance to the inner surface of said elongated tubular chamber.
13. An elongated tubular chamber according to any one of claims 10 to 12 wherein a sidewall web has a thickness of 0.25mm to 2mm.



14. A tubular container comprising an elongated tubular chamber closed at one end and having a dispensing opening at another end, said elongated tubular chamber having an inner surface and a partition web having two longitudinal edges within said elongated tubular chamber, each of said longitudinal edges attached to the inner surface of said elongated tubular chamber, said web has a thickness of 0.015mm to 0.2mm and at least one longitudinally extending area of modified thickness.
15. A tubular container as in claim 14 wherein said at least one longitudinally extending area of modified thickness is from about the center point of said web to about 10 percent of the distance to the inner surface of said elongated tubular chamber.
16. A tubular container as in claim 14 or claim 15 wherein said area of modified thickness is an area of decreased thickness.
17. A tubular container according to any one of claims 14 to 16 wherein there are up to three areas of modified thickness.
18. A tubular container according to any one of claims 14 to 17 wherein a sidewall web has a thickness of 0.25mm to 2mm.

Dated this eighteenth day of June 2001

Colgate-Palmolive Company
Patent Attorneys for the Applicant:

F B RICE & CO



FIG. 1

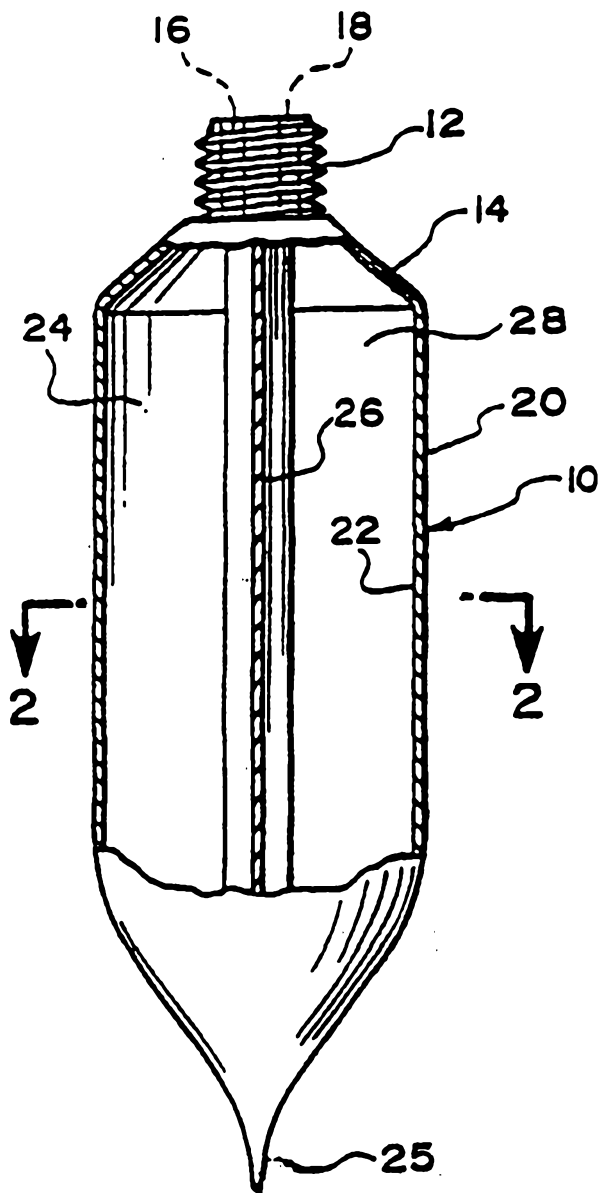


FIG. 3

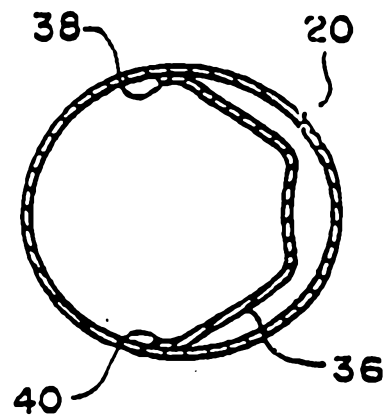


FIG. 2

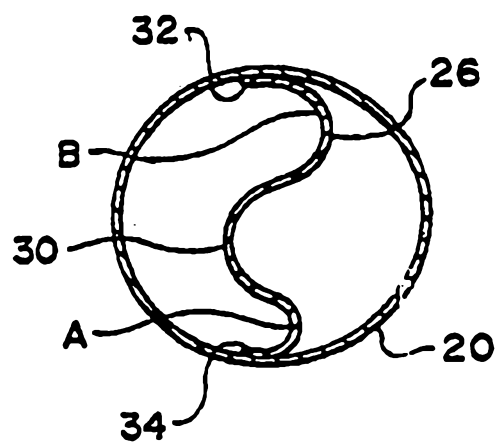


FIG. 4

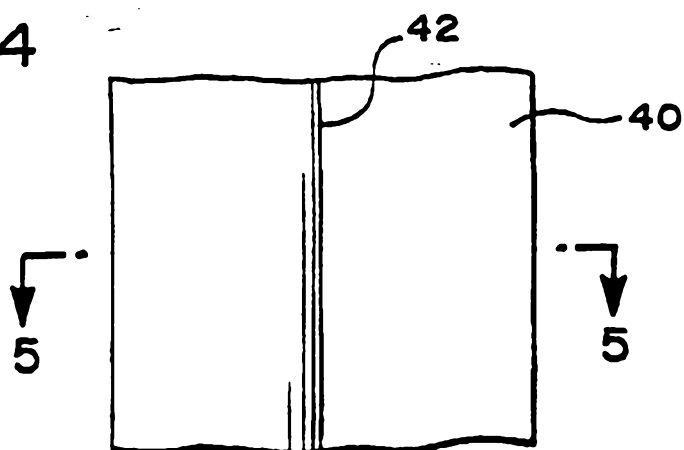


FIG. 5



FIG. 6

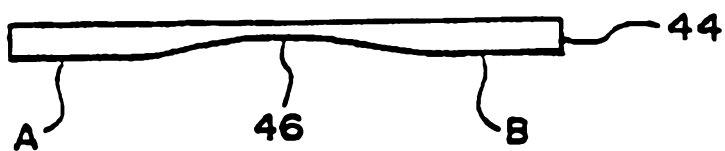


FIG. 7

