

(51) International Patent Classification:
H01L 21/321 (2006.01) *C09G 1/02* (2006.01)(21) International Application Number:
PCT/EP2010/052093(22) International Filing Date:
19 February 2010 (19.02.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/415,406 31 March 2009 (31.03.2009) US(71) Applicant (for all designated States except US): **INTERNATIONAL BUSINESS MACHINES CORPORATION** [US/US]; New Orchard Road, Armonk, New York 10504 (US).(71) Applicant (for MG only): **IBM UNITED KINGDOM LIMITED** [GB/GB]; PO Box 41, North Harbour, Portsmouth, Hampshire PO6 3AU (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MCDEVITT, Thomas, Leddy** [US/US]; IBM Corporation, MD 975A, 1000 River Street, Essex Junction, Vermont 05452-4299 (US). **SHAH, Eva** [US/US]; IBM Corporation, MD PLB, 1000 River Street, Essex Junction, Vermont 05452-4299 (US). **TIERSCH, Matthew, Thomas** [US/US]; IBM Corporation, MD 975C, 1000 River Street, Essex Junction, Vermont 05452-4299 (US). **BATES, Graham, Matthew** [US/US]; IBM Corporation, MD 975A, 1000River Street, Essex Junction, Vermont 05452-4299 (US). **WHITE, Eric, Jeffrey** [US/US]; IBM Corporation, MD 975A, 1000 River Street, Essex Junction, Vermont 05452-4299 (US).(74) Agent: **BURT, Roger, James**; IBM United Kingdom Limited, Intellectual Property Law, Hursley Park, Winchester, Hampshire SO21 2JN (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CMP METHOD

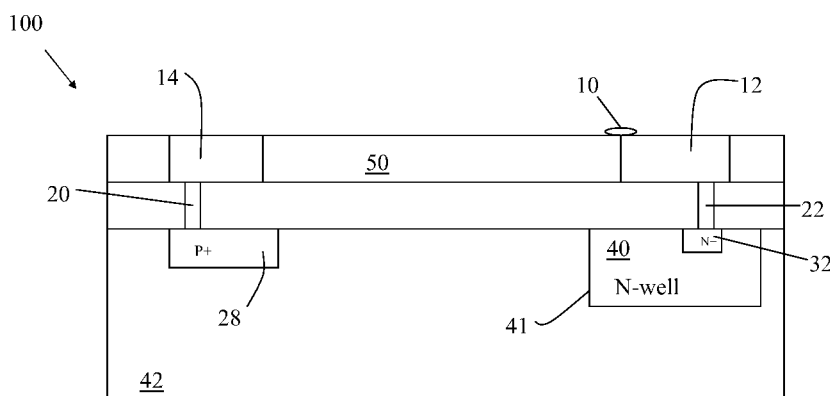


Figure 1

(57) Abstract: The instant invention is a method of polishing a substrate including contacting a substrate having at least one metal layer including copper with a chemical-mechanical polishing composition. The CMP composition includes an abrasive, a surfactant, an oxidizer, an organic acid including polyacrylic acid or polymethacrylic acid, a corrosion inhibitor, and a liquid carrier. A portion of the copper in the metal layer is abraded to polish the substrate. A second CMP composition contacts the abraded substrate, the second acrylate free composition including an abrasive, a surfactant, an oxidizer, and a corrosion inhibitor, and a liquid carrier. Any dendrites that may have formed on the substrate are removed through abrasion.

Published:

— with international search report (Art. 21(3))

CMP METHOD

TECHNICAL FIELD

5 The disclosure relates methods of chemically-mechanically polishing (CMP) of substrates having a metal layer containing copper.

BACKGROUND OF THE INVENTION

10 Under some circumstances, dendrites and/or nanoparticles of conductive material may be formed between metal or other conductive material interconnects during fabrication of a semiconductor device. For example, where copper lines are formed by a damascene process, a polishing step is utilized to planarize the surface of the layer holding the damascene-formed lines. Typically, the polishing step involves a slurry or solution incorporating a grinding compound and/or chemical. The polishing process accordingly will produce small particles of the material being ground away which will remain suspended in the slurry.

15 Consequently, the interconnect being polished will be immersed in a slurry having conductive particles suspended therein.

20 Under certain conditions, a voltage potential may appear across some or all of the interconnects. This voltage potential, in conjunction with chemical activity associated upon the interconnects in the slurry may cause a dendrite of conductive material to form on at least one of the interconnects. Additionally, such a dendrite may grow towards another interconnect and ultimately, make electrical contact with the other interconnect.

25 The interconnect towards which the dendrite grows will have a voltage potential opposite to the voltage potential of the interconnect producing the dendrite. The voltage potential on each interconnect driving the dendrite growth is produced by, for example, the structure of the device to which the interconnects are connected, and may not be necessarily directly related to the process at the device's surface.

30 A dendrite growth control circuit is disclosed in US Pat. 7,109,584. This solution to control dendrite growth requires installation of an additional circuit in the semiconductor device.

US Pat. 6,218,290 provides a solution to dendrite formation by chemically removing a portion of the surface of the semiconductor device after CMP.

SUMMARY

5 A method of polishing a substrate including contacting a substrate having at least one metal layer including copper with a chemical-mechanical polishing composition is disclosed. The CMP composition includes an abrasive, a surfactant, an oxidizer, an organic acid including polyacrylic acid or polymethacrylic acid, a corrosion inhibitor, and a liquid carrier. A portion of the copper in the metal layer is abraded to polish the substrate. A second CMP
10 composition contacts the abraded substrate, the second composition includes an abrasive, a surfactant, an oxidizer, and a corrosion inhibitor, and a liquid carrier. The second composition is free of acrylates. Any dendrites that may have formed on the substrate are removed through abrasion.

15 An alternate method includes contacting and abrading a substrate including at least one metal layer including copper with a continuous supply of a chemical-mechanical polishing composition. The CMP composition initially includes an abrasive, a surfactant, an oxidizer, an organic acid including polyacrylic acid or polymethacrylic acid, a corrosion inhibitor, and a liquid carrier. The amount of organic acid is reduced to zero during the abrading whereby
20 dendrite formation on the substrate is reduced.

The illustrative aspects of the present disclosure are designed to solve the problems herein described and/or other problems not discussed.

BRIEF DESCRIPTION OF THE DRAWINGS

25 These and other features of this disclosure will be more readily understood from the following detailed description of the various aspects of the disclosure taken in conjunction with the accompanying drawings that depict various embodiments of the disclosure, in which:

30 Fig. 1 is an illustration of a semiconductor device used to explain dendrite growth.

Fig. 2 is a schematic of representation of an embodiment of an apparatus used to implement the invention.

Fig. 3 (a) shows dendrite formation in a conventional CMP process, and FIG. 3 (b) shows dendrite formation in embodiments of the process of the present invention.

It is noted that the drawings of the disclosure are not to scale. The drawings are intended to depict only typical aspects of the disclosure, and therefore should not be considered as limiting the scope of the disclosure.

DETAILED DESCRIPTION

Embodiments of the invention relate to, for example, a method for minimizing or preventing dendrite growth between interconnects during semiconductor fabrication. Copper (Cu) interconnects formed by a damascene method, including a chemical-mechanical polishing (CMP) process, are susceptible to electrochemical reactions. Dendrite formation is an electrochemical redeposition of Cu^{+2} ions on negatively charged sites. Modern CMP slurries employ organic acids containing acrylates to control CMP rates and selectivities of materials. Polymers adsorb to different materials at different concentrations, modifying surface potential and electrostatic interaction with the abrasive particles.

FIG. 1 is an illustration of a semiconductor device 100 and is used to explain the mechanism of dendrite growth. The semiconductor device 100 includes a substrate 42 having an N-well 40 therein. A P^+ contact 28 is formed in the substrate 42 and an N^+ contact 32 is formed in N-well 40 and substrate 42. A diffusion barrier layer, such as Ta or TaN, is shown as 50. Semiconductor device 100 includes a metal line 22 leading to an interconnect 12 is attached to N^+ contact 32. Interconnect 14 is attached to P^+ contact 28 through metal line 20. These features are all formed using standard fabrication processes as should be well known in the art, and, as such, a detailed discussion of the fabrication process is not required to understand and practice this invention.

In this and other examples, the semiconductor junction has a driving force equal to the potential difference between interconnect 14 and 12. Accordingly, charge is formed with negative charge being generated on the N-well 40 side of an interface 41 and positive charge being generated on substrate 42 side of interface 41. Negative charges may distribute themselves along current flow path which passes through N-well 40, N^+ contact 32, second

metal line 20 to second interconnect 14. Additionally, the positive charges may be allowed to distribute themselves along the current flow path along substrate 42, P⁺ contact 28, first metal line 22 and first interconnect 12. With charge being generated at the semiconductor junction 41, and being allowed to freely move along the current flow paths, opposite charges
5 collect at the first and second interconnects, 12 and 14, respectively. With charge collected at the first and second interconnects, 12 and 14, a dendrite 10 may form on interconnect 12 while the semiconductor device is being polished. Dendrite 10 is formed by Cu⁺² ions precipitating out of the CMP solution at the negatively charged interconnect 12. Embodiments of the present invention provide a way to control this occurrence.

10 The following components are used in a CMP solution: an oxidizer, an abrasive, a surfactant, an organic acid, such as polyacrylic acid or polymethacrylic acid and a corrosion inhibitor. These components are dispersed in a liquid carrier. It has been found that polyacrylates of the organic acid promote formations of dendrites on metal/dielectric surfaces in the presence
15 of an electrochemical driving force. Not to be bound by theory, it is thought that the CMP composition provides a polymeric layer containing Cu⁺² ions which accumulates on the surfaces of and provides the source for dendrite deposition and growth. This process is accelerated by a negative potential on the surface which attracts Cu⁺² ions and this attraction is stronger in the presence of a polyacrylic acid.

20 Embodiments of the instant invention include a method of polishing a substrate including contacting a substrate having at least one metal layer including copper with a chemical-mechanical polishing composition. The CMP composition includes an abrasive, a surfactant, an oxidizer, an organic acid including polyacrylic acid or polymethacrylic acid, a
25 corrosion inhibitor, and a liquid carrier. A portion of the copper in the metal layer is abraded to polish the substrate. A second CMP composition contacts the abraded substrate, the second composition including an abrasive, a surfactant, an oxidizer, and a corrosion inhibitor, and a liquid carrier with no organic acid. Any dendrites that may have formed on the substrate are removed through abrasion. In a preferred embodiment the second CMP
30 composition would be used between 10 and 20 % of the total CMP process. The most preferred embodiment would be use of the second CMP composition for 15% of the total CMP process, based on time.

An alternate method of the present invention includes contacting and abrading a substrate including at least one metal layer including copper with a continuous supply of a chemical-mechanical polishing composition. Fig. 2 is a schematic representation of a way to implement this method. The CMP composition includes an abrasive, a surfactant, an oxidizer, an organic acid including polyacrylic acid or polymethacrylic acid, a corrosion inhibitor, and a liquid carrier. This composition is stored or supplied as shown by element 20. A second CMP composition which includes an abrasive, a surfactant, an oxidizer, a corrosion inhibitor, and a liquid carrier without an acrylate is stored or supplied by element 22. The amount of organic acid is reduced to zero during the abrading using valve 25 which switches the slurry delivery to a platen 27 from supply 20 to supply 22 for polishing the substrate or wafer 28. If desired, a water delivery line for additional water is shown in 29. Dendrite formation on the substrate is reduced using this method.

Embodiments of a CMP solution of the invention include an abrasive. The abrasive can be in any suitable form (e.g., abrasive particles). The abrasive is typically in particulate form and suspended in the liquid carrier. The abrasive as well as any other components suspended in the liquid carrier, form the polishing compositions of the CMP systems.

The abrasive typically has a mean primary particle size of about 100 nm or greater (e.g., about 105 nm or greater, about 110 nm or greater, or even about 120 nm or greater). Typically, the abrasive has a mean primary particle size of about 500 nm or less (e.g., about 250 nm or less, or even about 200 nm or less). Preferably, the abrasive has a mean primary particle size of about 100 nm to about 250 nm (e.g., about 105 nm to about 180 nm). The abrasive can be substantially free of aggregated abrasive particles such that the mean particle size is about the same as the mean primary particle size. The abrasive can be any suitable abrasive, for example, an inorganic metal oxide abrasive selected from the group consisting of alumina (e.g., α -alumina, γ -alumina, δ -alumina, and fumed alumina), silica (e.g., colloidally dispersed condensation-polymerized silica, precipitated silica, fumed silica), ceria, titania, zirconia, germania, magnesia, co-formed products thereof, and combinations thereof. The metal oxide abrasive can be electrostatically coated with an oppositely-charged polyelectrolyte. The abrasive also can comprise a cross-linked polymer abrasive. Preferably, the abrasive is a silica abrasive or a polyelectrolyte-coated alumina abrasive

(e.g., polystyrenesulfonic acid-coated alumina abrasive).

Silica abrasives and polymer-coated alumina abrasives are particularly desirable when polishing soft metal layers such as copper which can easily be scratched by hard abrasives such as alumina abrasives. The abrasive typically has a mean primary particle size of about 20 nm or greater (e.g., about 30 nm or greater, or even about 50 nm or greater). The mean primary particle size preferably is about 1 micron or less (e.g., about 500 nm or less). The abrasive in the second embodiment additionally can have the characteristics of the abrasive in the first embodiment, and vice versa.

The abrasive described herein is colloidally stable. The CMP compositions typically include about 0.1 wt. % to about 20 wt. % (e.g., about 0.5 wt. % to about 15 wt. %, or about 1 wt. % to about 10 wt. %) abrasive, based on the weight of the liquid carrier and any components dissolved or suspended therein.

The surfactant of the CMP composition or solution in embodiments of this invention is used to promote wetting. For the purposes of this invention, surfactant can be sodium octyl sulfate, ammonium lauryl sulfate or sodium lauryl sulfate. The polishing systems typically comprise about 0.1 wt. % or less surfactant, based on the weight of the liquid carrier and any compounds dissolved or suspended therein. Preferably, the polishing system comprises about 0.001 wt. % to about 0.06 wt. % (e.g., about 0.01 wt. % to about 0.04 wt. %) surfactant, based on the weight of the liquid carrier and any compounds dissolved or suspended therein.

The chemical oxidizing agent can be any suitable oxidizing agent. Suitable oxidizing agents include inorganic and organic per-compounds, bromates, nitrates, chlorates, chromates, iodates, iron and copper salts (e.g., nitrates, sulfates, ethylenediaminetetraacetic acid (EDTA), and citrates), rare earth and transition metal oxides (e.g., osmium tetroxide), potassium ferricyanide, potassium dichromate, iodic acid, and the like. A per-compound (as defined by Hawley's Condensed Chemical Dictionary) is a compound containing at least one peroxy group ($--O--O--$) or a compound containing an element in its highest oxidation state. Examples of compounds containing at least one peroxy group include but are not limited to

hydrogen peroxide and its adducts such as urea hydrogen peroxide and percarbonates, organic peroxides such as benzoyl peroxide, peracetic acid, and di-tert-butyl peroxide, monopersulfates (SO_5^{2-}), dipersulfates ($\text{S}_2\text{O}_8^{2-}$), and sodium peroxide. Examples of compounds containing an element in its highest oxidation state include but are not limited to periodic acid, periodate salts, perbromic acid, perbromate salts, perchloric acid, perchlorate salts, perboric acid, perborate salts, and permanganates. The oxidizing agent preferably includes hydrogen peroxide. The CMP composition typically includes about 0.1 wt. % to about 15 wt. % (e.g., about 0.2 wt. % to about 10 wt. %, about 0.5 wt. % to about 8 wt. %, or about 1 wt. % to about 5 wt. %) oxidizing agent, based on the weight of the liquid carrier and any compounds dissolved or suspended therein.

The organic acid in the initial CMP composition includes polyacrylic acid or polymethacrylic acid. The amount of organic acid used in the polishing system typically is about 0.01 to about 5 wt. %, preferably about 0.05 to about 3 wt. %.

The corrosion inhibitor (i.e., a film-forming agent) or passivant can be any suitable corrosion inhibitor. Typically, the corrosion inhibitor is an organic compound containing a heteroatom-containing functional group. For example, the corrosion inhibitor may include a heterocyclic organic compound with at least one 5- or 6-member heterocyclic ring as the active functional group, wherein the heterocyclic ring contains at least one nitrogen atom, for example, an azole compound. Preferably, the corrosion inhibitor includes a triazole; more preferably, 1,2,4-triazole, 1,2,3-triazole, or benzotriazole. The amount of corrosion inhibitor used in the polishing system typically is about 0.0001 to about 3 wt. %, preferably about 0.001 to about 2 wt. %.

A liquid carrier is used to facilitate the application of the abrasive and any components dissolved or suspended therein to the surface of a suitable substrate to be polished (e.g., planarized). The liquid carrier is typically an aqueous carrier and can be water alone, can comprise water and a suitable water-miscible solvent, or can be an emulsion. Suitable water-miscible solvents include alcohols such as methanol, ethanol, etc. Preferably, the aqueous carrier consists of water, more preferably deionized water.

The polishing compositions can have any suitable pH, for example, the polishing compositions can have a pH of about 2 to about 12. Typically, the polishing compositions have a pH of about 3 or greater (e.g., about 5 or greater, or about 7 or greater) and a pH of about 12 or lower (e.g., about 10 or lower).

5

The CMP systems optionally can further comprise other components. Such other components may include, for example, complexing or chelating agents, biocides, anti-foaming agents, and the like.

10

The complexing or chelating agent is any suitable chemical additive that enhances the removal rate of the substrate layer being removed. Suitable chelating or complexing agents can include, for example, carbonyl compounds (e.g., acetylacetonates, and the like), di-, tri-, or polyalcohols (e.g., ethylene glycol, pyrocatechol, pyrogallol, tannic acid, and the like) and amine-containing compounds (e.g., ammonia, amino acids, amino alcohols, di-, tri-, and polyamines, and the like). The choice of chelating or complexing agent will depend on the type of substrate layer being removed in the course of polishing a substrate with the polishing composition. The amount of complexing agent used in the polishing system typically is about 0.1 to about 10 wt. %, preferably about 1 to about 5 wt. %.

15

20

The biocide can be any suitable biocide, for example isothiazolinone biocide. The amount of biocide used in the polishing system typically is about 1 to about 50 ppm, preferably about 10 to about 20 ppm.

25

The anti-foaming agent can be any suitable anti-foaming agent. For example, the anti-foaming agent can be a polydimethylsiloxane polymer. The amount of anti-foaming agent present in the polishing system typically is about 40 to about 140 ppm.

30

The CMP composition optionally can further comprise one or more components such as pH adjusters, regulators, or buffers, and the like. Suitable pH adjusters, regulators, or buffers can include, for example, sodium hydroxide, potassium hydroxide, ammonium hydroxide, sodium carbonate, potassium carbonate, sulfuric acid, hydrochloric acid, nitric acid, phosphoric acid, citric acid, potassium phosphate, mixtures thereof, and the like.

A conventional CMP process where a CMP composition of a corrosion inhibitor or passivant of benzotriazole, a surfactant, an oxidizer, an abrasive including a liquid carrier and an acrylate of polyacrylic acid was used to polish a substrate. As shown clearly in FIG 3(a) dendrites or nanoparticles are apparent. After polishing with the initial CMP composition, a
5 second CMP composition free of acrylate is used. FIG. 3(b) shows the same substrate polished using the two step process described and it is clear that dendrites are absent from the substrate.

The terminology used herein is for the purpose of describing particular embodiments only
10 and is not intended to be limiting of the disclosure. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features,
15 integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

The corresponding structures, materials, acts, and equivalents of all means or step plus
20 function elements in the claims below are intended to include any structure, material, or act for performing the function in combination with other claimed elements as specifically claimed. The description of the present disclosure has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the disclosure in the form disclosed. Many modifications and variations will be apparent to those of
25 ordinary skill in the art without departing from the scope and spirit of the disclosure. The embodiment was chosen and described in order to best explain the principles of the disclosure and the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments with various modifications as are suited to the particular use contemplated.

CLAIMS

1. A method of polishing a substrate comprising:

5 (i) contacting a substrate comprising at least one metal layer comprising copper with a first chemical-mechanical polishing composition comprising: an abrasive, a surfactant, an oxidizer, an organic acid comprising polyacrylic acid or polymethacrylic acid, a corrosion inhibitor, and a liquid carrier;

(ii) abrading at least a portion of the metal layer comprising copper to polish the substrate;

10 (iii) contacting the abraded substrate from element (ii) with a second acrylate-free free chemical-mechanical polishing composition comprising: an abrasive, a surfactant, an oxidizer, and a corrosion inhibitor, and a liquid carrier; and

(iv) removing dendrites through abrasion that may have formed on the substrate.

15 2. The method of claim 1, wherein the abrasive in the first and second compositions is selected from the group consisting of alumina, silica, ceria, titania, zirconia, germania, magnesia and combinations thereof.

20 3. The method of claim 1, wherein the abrasive in the first and second compositions comprises a mean particle size 105 nm to about 180 nm.

4. The method of claim 1, wherein the surfactant in the first and second composition comprises sodium octyl sulfate, ammonium lauryl sulfate or sodium lauryl sulfate.

25 5. The method of claim 1, wherein the oxidizer in the first and second composition is selected from the group consisting of inorganic per-compounds, organic per-compounds, bromates, nitrates, chlorates, chromates, iodates, iron salts, copper salts, rare earth metal oxides, transition metal oxides, potassium ferricyanide, potassium dichromate and iodic acid.

30 6. The method of claim 1, wherein the liquid carrier of the first and second compositions comprises water.

7. The method of claim 1, wherein the corrosion inhibitor in the first and second composition is selected from the group consisting of benzotriazole, 6-tolyltriazole, 1,2,3-triazole, 1,2,4-triazole, and combinations thereof.

5 8. The method of claim 1, wherein the first composition has a pH of about 3 or greater.

9. The method of claim 1, wherein the contacting the abraded substrate from element (ii) with a second acrylate-free free chemical-mechanical polishing composition comprises from between 10 and 20 % of a total time of the method.

10 10. An in-situ method of polishing a substrate, the method comprising:

contacting a substrate comprising at least one metal layer comprising copper with a continuous supply of chemical-mechanical polishing composition abrading at least a portion of the metal layer wherein the chemical-mechanical polishing composition initially
15 comprises: an abrasive, a surfactant, an oxidizer, an organic acid comprising polyacrylic acid or poly methacrylic acid, a corrosion inhibitor, and a liquid carrier; and reducing the amount of organic acid to zero in the composition thereby reducing dendrite formation on the substrate.

20 11. The method of claim 10, wherein the abrasive is selected from the group consisting of alumina, silica, ceria, titania, zirconia, germania, magnesia and combinations thereof.

12. The method of claim 10, wherein the abrasive is selected from the group consisting of alumina, silica, ceria, titania, zirconia, germania, magnesia and combinations thereof.

25 13. The method of claim 10, wherein the abrasive has a mean particle size of about 105 nm to about 180 nm.

30 14. The method of claim 10, wherein the surfactant comprises sodium octyl sulfate, ammonium lauryl sulfate or sodium lauryl sulfate.

15. The method of claim 10, wherein the oxidizer is selected from the group consisting of

inorganic per-compounds, organic per-compounds, bromates, nitrates, chlorates, chromates, iodates, iron salts, copper salts, rare earth metal oxides, transition metal oxides, potassium ferricyanide, potassium dichromate and iodic acid.

5 16. The method of claim 10, wherein the liquid carrier comprises water.

17. The method of claim 10, wherein the corrosion inhibitor is selected from the group consisting of benzotriazole, 6-tolyltriazole, 1,2,3-triazole, 1,2,4-triazole, and combinations thereof.

10

18. The method of claim 10, wherein the composition has a pH of about 3 or greater.

19. The method of claim 10, wherein the composition further comprises chelating agents, biocides and anti-foaming agents.

15

20. The method of claim 10, wherein the composition further comprises pH adjusters, regulators or buffers.

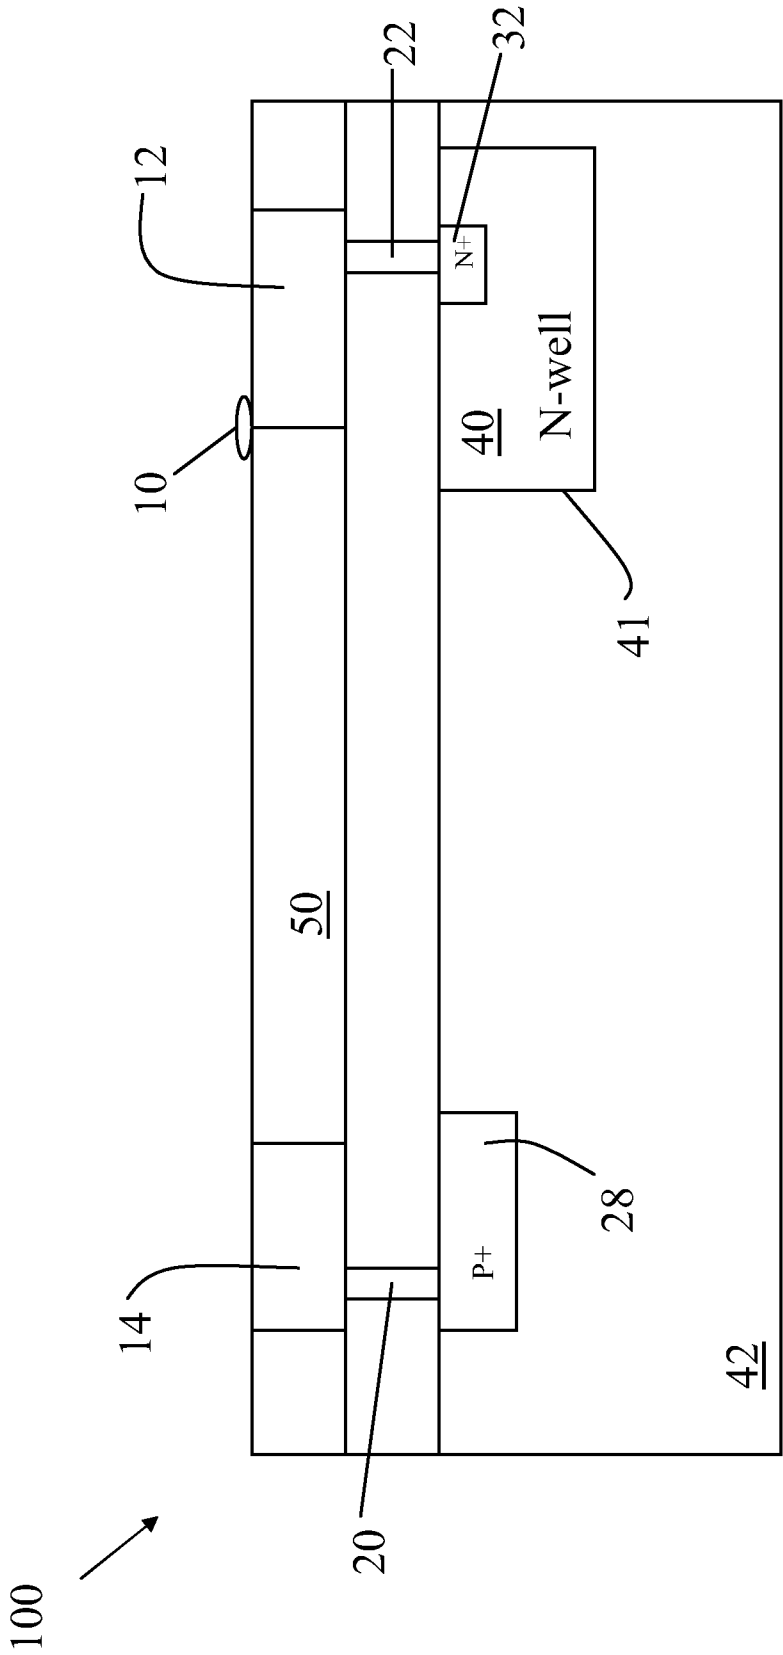


Figure 1

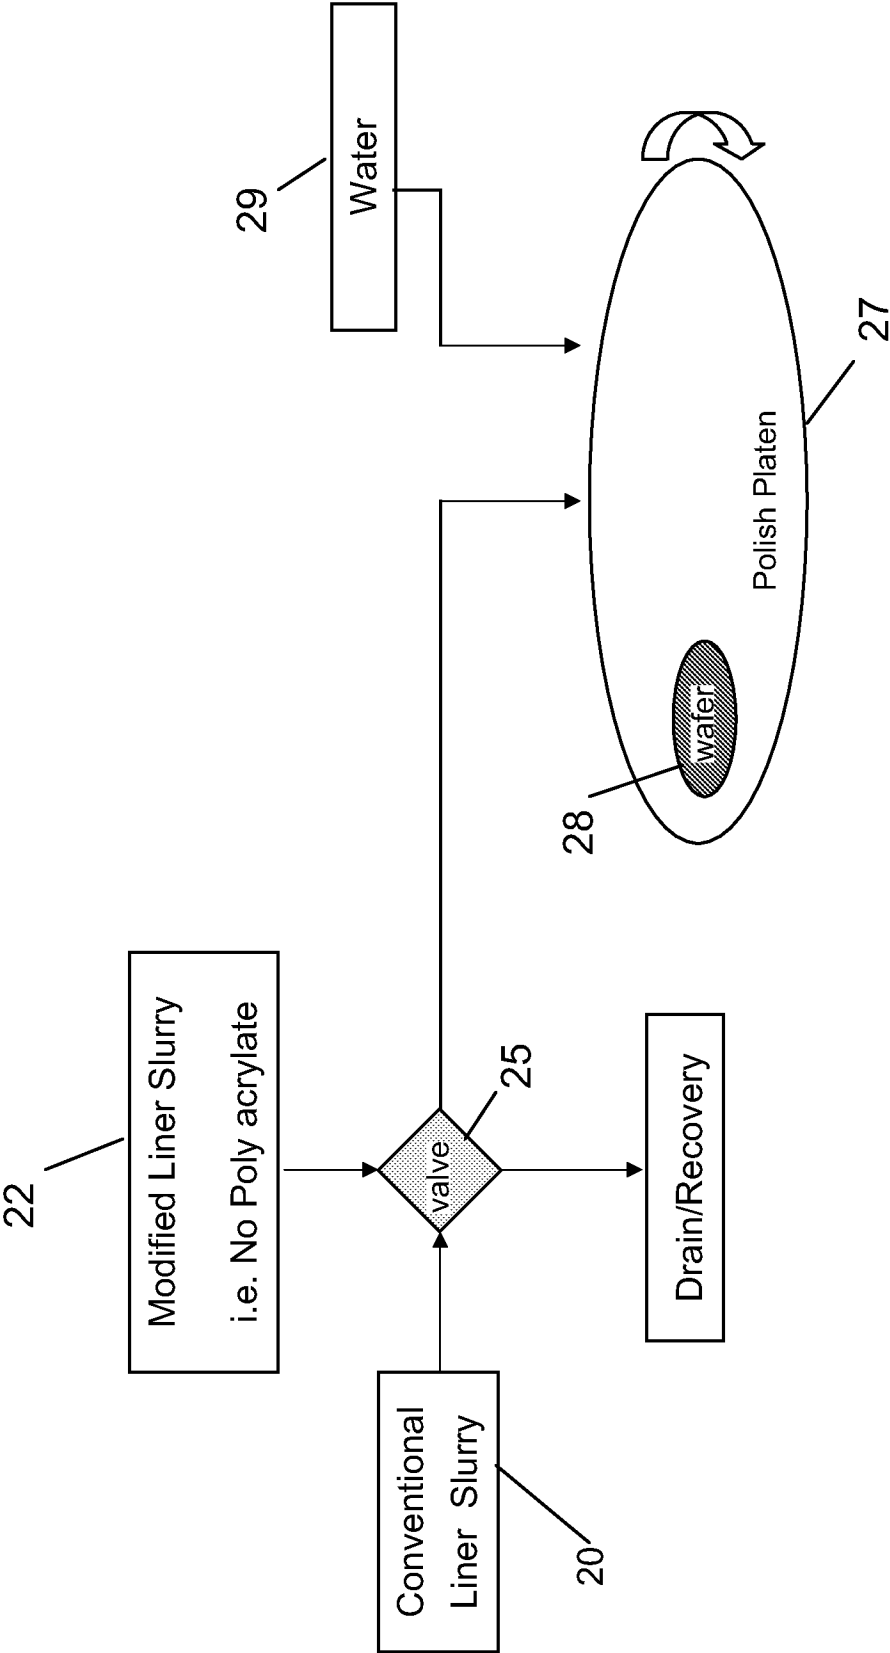


Figure 2

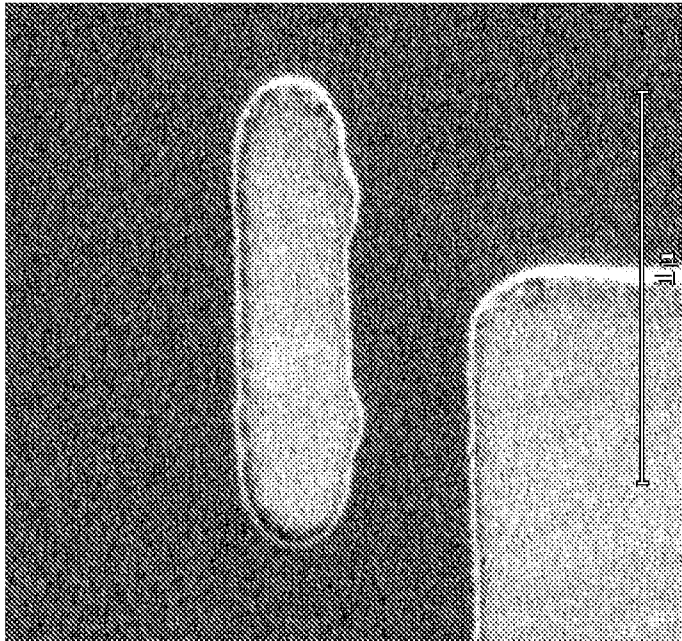


Figure 3(b)

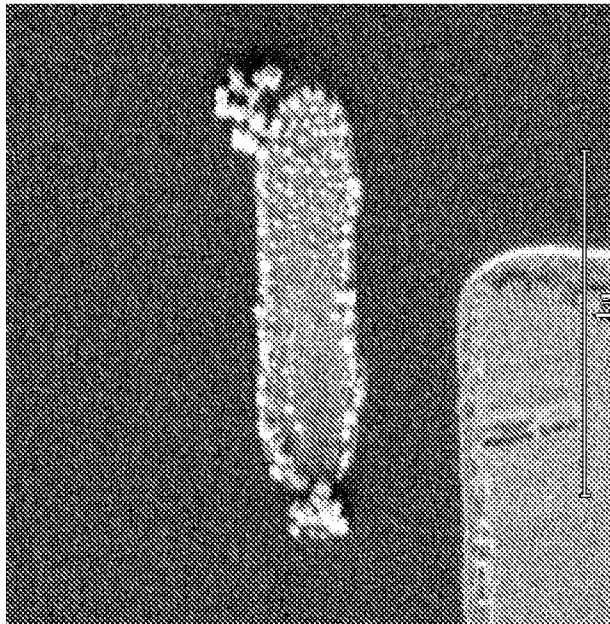


Figure 3(a)
(Prior Art)

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/052093

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01L21/321 C09G1/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L C09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004/224521 A1 (FLAKE JOHN C [FR] ET AL) 11 November 2004 (2004-11-11) paragraphs [0014] - [0026]; figures 2-5	1-20
A	US 6 348 076 B1 (CANAPERI DONALD F [US] ET AL) 19 February 2002 (2002-02-19) column 3, line 3 - column 6, line 19	1-20

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 March 2010

Date of mailing of the international search report

08/04/2010

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Szarowski, Anne

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/052093

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2004224521	A1	11-11-2004	CN 1784513 A	07-06-2006
			EP 1625247 A2	15-02-2006
			JP 2007511894 T	10-05-2007
			KR 20050120816 A	23-12-2005
			US 2008038994 A1	14-02-2008
			WO 2004102620 A2	25-11-2004
US 6348076	B1	19-02-2002	NONE	