

667633

AUSTRALIA
Patents Act 1990

PATENT REQUEST : STANDARD PATENT

We, being the person identified below as the Applicant and Nominated Person, request the grant of a patent to us for an invention described in the accompanying standard complete specification.

[70 & 71] Applicant and Nominated Person:
M J GROOTES INVESTMENTS CC

Address:
60 Sidney Road, Judith's Paarl
Johannesburg, South Africa

[54] Invention Title:
STEERING WHEEL

[72] Name of actual inventor:
CORNELIUS JOHANNES THOMAS FERREIRA

[74] Address for service in Australia:

H.R. HODGKINSON & CO.
Patent and Trade Mark Attorneys
26A Alfred Street
Milsons Point NSW 2061

Attorney Code: HK

BASIC CONVENTION APPLICATION STATUS

[31] Application No.	[33] Country Code	Country of Application	[32] Date
93/4470	ZA	South Africa	22 June 1993

Dated this 22nd day of June, 1994.

M J GROOTES INVESTMENTS CC

S 047166 220694 BY:

H.R. Hodgkinson & Co.
Attorney for the Applicant

TO: The Commissioner of Patents
COMMONWEALTH OF AUSTRALIA

AUSTRALIA

Patents Act 1990

NOTICE OF ENTITLEMENT

TO GRANT OF A PATENT,
PETTY PATENT, OR
PATENT OF ADDITION

MEIERT GROOTES OF
*I/We, M J GROOTES INVESTMENTS CC

of 60 SIDNEY ROAD, JUDITH'S PAARL, JOHANNESBURG, SOUTH AFRICA

being the applicant(s) in respect of an Application **No
for an invention entitled: "STEERING WHEEL"

state the following:

The person(s) nominated for the grant of the patent:

1. ~~is/are the actual inventor(s) of the invention~~
or
has/have entitlement from the actual inventor(s) CORNELIUS JOHANNES
THOMAS FERREIRA and the facts upon which the
person(s) nominated is/are entitled to make the application are as follows:
The inventor assigned his rights to the invention
to the applicant company by a written deed of assignment.
2. ~~** (a) is/are the applicant(s) of the application(s) listed on the patent request
form/declaration~~
or
has/have entitlement to make a request under Section 113 in relation
~~to the application(s) listed on the patent request form/declaration form by virtue of:~~

** (b) and the basic application(s) listed on the request form/declaration is/are the first
application(s), made in a convention country in respect of the invention.

Signed at SANDTON this 15th day of JUNE 19 94

Status:

MEMBER

.....
M J Grootes..... (MEIERT GROOTES).....
.....

* If completed in the name of a company,
to be executed by authorised person
** Delete where inapplicable



AU9464866

(12) PATENT ABRIDGMENT (11) Document No. AU-B-64866/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 667633

- (54) Title
STEERING WHEEL
- International Patent Classification(s)
(51)⁵ **B62D 001/04 C22C 021/02**
- (21) Application No. : **64866/94** (22) Application Date : **22.06.94**
- (30) Priority Data
- (31) Number (32) Date (33) Country
93/4470 22.06.93 ZA SOUTH AFRICA
- (43) Publication Date : **05.01.95**
- (44) Publication Date of Accepted Application : **28.03.96**
- (71) Applicant(s)
M J GROOTES INVESTMENTS CC
- (72) Inventor(s)
CORNELIUS JOHANNES THOMAS FERREIRA
- (74) Attorney or Agent
H R HODGKINSON & CO , Level 3, 20 Alfred Street, MILSONS POINT NSW 2061
- (56) Prior Art Documents
US 5,097,720
EP 292,038A2
EP 50,309A1
- (57) Claim

1. A steering wheel comprising a unitary aluminium alloy casting, said alloy including 11,5 - 14% by weight of silicon and 350 - 450 parts per million of strontium.
5. A process for the manufacture of a steering wheel, said process comprising the steps of:
 - a) preparing a rotatable mould in which the steering wheel is to be cast;
 - b) introducing a molten alloy having constituents according to claim 1 into the mould;
 - c) rotating the mould; and
 - d) allowing the alloy to cool sufficiently to enable the steering wheel to be removed from the mould.

667633

PATENTS ACT 1990

COMPLETE SPECIFICATION

ORIGINAL

Name of Applicant: M J GROOTES INVESTMENTS CC

Actual Inventor: CORNELIUS JOHANNES THOMAS FERREIRA

Address for Service: H.R. HODGKINSON & CO.
Patent and Trade Mark Attorneys
26A Alfred Street
Milsons Point NSW 2061

Invention Title: STEERING WHEEL

The following statement is a full description of this invention, including the best method of performing it known to us:

BACKGROUND TO THE INVENTION

THIS invention relates to a steering wheel, and more particularly, to an aluminium steering wheel.

Steering wheels are generally fabricated from a number of different components including a metal rim, spokes, and a central hub which connects to the steering column. The rim is generally covered with a resilient foam material or the like after the metal components have been interconnected. There are various problems with this prior art type of steering wheel including problems relating to connecting the distal ends of the spokes to the rim. Generally the point of connection between the rim and the spokes is found to be a zone of weakness for most wheels.

Steering wheels are safety critical components in most vehicles. It is important that the steering wheel is able to absorb a high impact load and preferably will deform under load rather than break. It is well known that cast materials tend to shatter rather than bend. It is also known that castings often crack and, accordingly, casting processes are not usually considered appropriate for the manufacturer of steering wheels.

Applicant is aware of certain prior art which contemplates cast aluminium steering wheels. European applications nos. EP-A-0292038, EP-A-0412605 and EP-A-0050309 all deal with the concept of cast steering wheels. However, none of the prior art specifications referred

to satisfy Applicant's requirements that the steering wheel be cast as a one piece casting, that the wheel is of high strength and relatively resilient, and that it can be made crack-free.

SUMMARY OF THE INVENTION

5 According to the invention there is provided a steering wheel which is cast as a one-piece aluminium alloy casting, said alloy including 11.5 - 14% by weight of silicon, and 350 - 450 parts per million strontium. The preferred range is 12.5 - 12.6% silicon and 380 - 420 parts per million strontium.

10 The steering wheel may be cast in a casting process which includes the step of rotating the mould about the axis of the steering wheel.

An example of an alloy for the steering wheel comprises:

		% by weight
15	Cu	0.04
	Mg	0.04
	Si	12.56
	Fe	0.38
	Mn	0.34
	Ni	0.01
	Zn	0.01
20	Ti	0.06
	Pb	0.01
	Sn	0.01
	Sr	420 ppm
	Pure aluminium	Remainder

25 It is found that a characteristic of this alloy is that the ferro-silicon hair-

like strands which are found in aluminium-silicon alloys are absent or at least are very short. It is the addition of the strontium into the alloy which gives the alloy this characteristic. The preferred alloy one where the ferro-silicon in the alloy is in the form of small, round bead-like particles. Where the ferro-silicon is in bead-like particles the alloy tends to be resilient. The long ferro-silicon strands tend to make the alloy brittle which is dangerous for steering wheels. It is thus important when selecting the exact constituents of the alloy to ensure that the strontium and silicon constituents of the alloy are carefully controlled so that formation of the ferro-silicon strands is prevented.

The material from which the mould is made is also important to ensure proper formation of the wheel within the mould during rotation of the mould. The alloy should comprise 2 to 4% by weight of copper and 5 to 7% by weight of silicon. This alloy is dimensionally relatively stable and compatible with the wheel alloy. A preferred mould alloy comprises:

		% by weight
	Cu	2.90
	Mg	0.15
20	Si	6.00
	Fe	0.55
	Mn	0.51
	Ni	0.06
	Zn	0.30
25	Ti	0.03
	Pb	0.03
	Sn	0.03
	Pure aluminium	Remainder

The mass of the mould is preferably approximately 30 times the mass of the steering wheel to be cast so that the mould is able to absorb the heat of the wheel without degradation. The material is similar to that of the wheel so that the heat loss from the wheel during cooking does not have the effect of altering the molecular structure of the alloy.

The rotational speed of the mould is important to ensure the centrifugal force on the material being moulded is optimized. The centrifugal force acting upon a rotating body is proportional to the radius of rotation and to the square of the velocity. Thus

$$F_r = mr\omega^2 = \frac{mv^2}{r}$$

Where: F_r = centrifugal force
 m = mass
 r = radius
 ω = angular velocity
 v = peripheral speed

The gravitational force on the same mass would be given by:

$$F_g = mg$$

where g is acceleration due to gravity.

Hence the factor which the normal force of gravity is multiplied by during rotation is given by:

$$Gfactor = \frac{F_r}{F_g} = \frac{r\omega^2}{g}$$

Expressed in the more convenient speed units of revolutions per

minute N the expression becomes:

$$Gfactor = \frac{r}{g} \left(\frac{\pi}{30} \right)^2 N^2 = \frac{0.011rN^2}{g}$$

5

More usefully:

$$N = \left(\frac{Gfactor \times g}{0.011r} \right)^{\frac{1}{2}} = 29.9 \left(\frac{Gfactor}{r} \right)^{\frac{1}{2}} = 42.3 \left(\frac{Gfactor}{D} \right)^{\frac{1}{2}}$$

Where D is rotational diameter expressed in meters.

10

This can also be expressed as per the graph shown in Figure 1 to determine the optimal speed of rotation for different diameters. A correction of 0.26 has been allowed for due to the specific gravity of the special material.

A component density test will determine what degree of correction will be required. A test conducted on product manufactured in accordance with the invention produced in accordance with the description herein

had a resistance to breaking of in excess of 4000 Kg. This is a safety factor of 10 over the expected maximum forces to be applied to a steering wheel under normal operating conditions.

The rotational speeds achieved by rotation according to the above formula according to the above formula will have the effect of substantially increasing the pressure in the molten alloy, particularly the material which flows into the radially outer parts of the mould to form the rim of the steering wheel. This ensures that the molecular structure of the alloy does not alter during mould rotation. The alloy thus retains its resilient characteristics and the cast product is crack-free.

A unitary construction aluminium alloy steering wheel is advantageous for a number of different reasons. These include the fact that, once the mould has been constructed the manufacture of the steering wheels thereafter will be a relatively non-labour intensive operation. The steering wheels will be light weight and will be relatively non-corrodible and thus suitable for use in marine applications.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a range of curves depicting the relationship between the rotational speed of the mould and diameter of the steering wheel;

Figure 2 shows a sectional side view of a mould for the manufacture of a steering wheel according to the invention;

Figure 3 shows the mould of Figure 2 filled with alloy;

Figure 4 shows the moulded product and mould of Figure 2 during removal of the product from the mould;

Figure 5 shows a perspective view of the moulded product after it has been removed from the mould; and

5 **Figure 6** shows a perspective view of the finished product.


DETAILED DESCRIPTION

Figure 1 depicts the rotational formula referred to in the specification in diagrammatic form. For different wheel diameters the optimal rotational speed can be selected. Thus, the dotted lines shown in the drawing depict the selected rotational speed for a 30cm diameter wheel. The set of diagonal lines shown in the diagram depict different pressures experienced by wheels moulded in rotating moulds. The uppermost curve, for example, is marked as "200g", that is, it represents a pressure of 200 times the force of gravity. Where it is found that a particular wheel configuration requires a pressure of 200g it can be calculated from the curve what the rotational speed will need to be. The dotted lines show that for a 30cm wheel to be moulded at a pressure of 200g it will need to be rotated at a speed slightly more than 1000rpm.

Generally, for any particular wheel/mould configuration, there will be a need to conduct tests on the molecular make-up of the finished product to find the optimum rotational speed. In practice, for most wheel configurations, it is found that the alloy should be pressurised by rotation to between 100g and 250g. It will be a relatively quick experimental procedure working within those limits to find the optimum rotational speed.

It is found that by increasing the pressure using rotational moulding techniques as opposed to other "artificial" pressurising techniques, the cast material has very low internal stresses and thus the cast product experiences very little distortion after being removed from the mould.

5 Also problems with porosity and associated corrosion that have been found to occur with alloys moulded under pressure applied by rams or the like are not found with this method of casting.



10 Figures 2 to 4 depict, somewhat diagrammatically, the method of manufacture. As shown, a mould 10 comprises an upper section 12 and a lower section 14. The lower section 14 is mounted on a spindle 16 and is rotatable on an axis 18. A mould cavity 20 in the form of a steering wheel is defined between the two mould halves. An alloy inlet 22 is defined on the axis 18 for introducing alloy into the cavity 20. Alloy is adapted to be introduced into the cavity by means of a ladle spout 24.

15 The mould 10 may be heated prior to the introduction of alloy into the mould cavity 20, the preferred temperature being approximately 260°C. The temperature of the alloy to be introduced into the mould cavity will be approximately 1100°C.

20 To manufacture the steering wheel the mould is clamped shut as shown in Figure 2 and is rotated on its axis as indicated by rotational arrow 26. Whilst being rotated, alloy is introduced via the spout 24 into the inlet 22 until the entire cavity is filled as shown in Figure 2. The rotational speed will be selected in accordance with the curves shown in Figure 1. The rotational speed will be such that the alloy in the rim 30 of the wheel is at a pressure significantly higher than atmospheric pressure.

25 This will ensure that the rim 30 is crack-free and that alloy properly fills all interstices of the cavity 20. It is found that a rotation time of about 20 seconds at terminal speed is satisfactory for proper casting.

As shown in Figure 4, once the alloy has cooled sufficiently so that the steering wheel is solid and stable the mould halves 12 and 14 can be separate as indicated in Figure 4 and the steering wheel 30 can be removed from the two mould halves. It is found that the whole cycle can be reduced to about 35 seconds per steering wheel. Conventionally fabricated wheels take about half an hour per wheel to manufacture.

The steering wheel as it comes out of the mould is shown in Figure 5 of the drawings. It is found in practice that virtually no machining of the steering wheel needs to be done. Generally the inlet stem 32 is cut-off and possibly minor imperfections might be cleaned up. The mould "skirt" as indicated at numeral 34 which is defined at the join between the two mould halves can be left on the rim 30 and need not be removed since that skirt 36 will generally be covered by a foam grip or leather cover and the skirt will enhance the adhesion between the foam and the rim. The finished product is shown in Figure 6 of the drawings. That product is ready for mounting to the steering column of the vehicle.

The alloys described herein have proved satisfactory for the manufacture of both the mould and the steering wheels, but variations may be made to these alloys which would still prove to be satisfactory in operation. The important criteria for the steering wheel alloy is the relative proportions of silicon and strontium to ensure the silicon does not form into long hair-like ferro-silicon strands on cooling which would result in unacceptable stiffness.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A steering wheel comprising a unitary aluminium alloy casting, said alloy including 11,5 - 14% by weight of silicon and 350 - 450 parts per million of strontium.
2. A steering wheel according to claim 1 wherein the alloy has 12.5 to 12.6% by weight of silicon.
3. A steering wheel according to either preceding claim wherein the alloy has 380 to 420 parts per million of strontium.
4. A steering wheel according to any preceding claim wherein the alloy comprises substantially of the following constituents:

	% by weight
Cu	0.04
Mg	0.04
Si	12.56
Fe	0.38
Mn	0.34
Ni	0.01
Zn	0.01
Ti	0.06
Pb	0.01
Sn	0.01
Sr	420 ppm
Pure aluminium	Remainder

5. A process for the manufacture of a steering wheel, said process

comprising the steps of:

- a) preparing a rotatable mould in which the steering wheel is to be cast;
- b) introducing a molten alloy having constituents according to claim 1 into the mould;
- c) rotating the mould; and
- d) allowing the alloy to cool sufficiently to enable the steering wheel to be removed from the mould.

6. A process according to claim 5 wherein the mould is rotated at a speed of N revolutions per minute where

$$N = 42.3 \frac{(G \text{ factor})^{\frac{1}{2}}}{D}$$

and where:

$$G \text{ factor} = \frac{rw^2}{D}, \text{ and}$$

D = diameter of the steering wheel.

7. A process according to claim 5 or 6 wherein the mould is manufactured from an aluminium alloy, said alloy including 2 - 4% by weight of copper, and 5 - 7% by weight of silicon.

8. A process according to claim 7 wherein the mould alloy comprises substantially the following constituents:

	% by weight
Cu	2.90
Mg	0.15
Si	6.00
Fe	0.55
Mn	0.51
Ni	0.06
Zn	0.30
Ti	0.03
Pb	0.03
Sn	0.03
Pure aluminium	Remainder

9. A process according to any one of claims 5 to 8 wherein the mould is rotated at a speed sufficient to induce a pressure of between 100g and 250g in the rim of the steering wheel during rotation.
10. A steering wheel manufactured as a unitary casting from an alloy substantially as hereinbefore described.
11. A process for the manufacture of a steering wheel substantially as hereinbefore described with reference to the drawings.

Dated this 22nd day of June, 1994.


BY:

M J GROOTES INVESTMENTS CC

H R H
Patent Attorney for the Applicant

ABSTRACT

A steering wheel (32) is cast as a unitary casting from an alloy which includes 11,5 - 14% by weight of silicon and 350 - 450 parts per million of strontium. The invention extends to a method of forming such a wheel the method including the step of rotating the mould (10) in which the wheel is cast. The mould is rotated at relatively high rotational speeds so that the wheel experiences a pressure of 100g to 250g during casting. The optimum rotational speed is determined using a formula disclosed in the specification.



The graph shows the relationship between Rotational Speed (RPM) and Diameter (D) for different weights. The y-axis is logarithmic, ranging from 20 to 4000 RPM. The x-axis is logarithmic, ranging from 2 to 200 cm. A vertical dashed line is drawn at D = 35 cm, and a horizontal dashed line is drawn at RPM = 1000. The curves represent weights of 1g, 10g, 25g, 50g, 100g, 150g, and 200g. The curves show that for a given weight, RPM decreases as D increases, and for a given D, RPM increases as weight increases.

D (cm)	1g (RPM)	10g (RPM)	25g (RPM)	50g (RPM)	100g (RPM)	150g (RPM)	200g (RPM)
2	300	800	1200	1800	2500	3000	3500
10	100	250	400	600	850	1000	1200
35	30	70	110	170	250	300	350
100	10	25	40	60	85	100	120
200	5	12	20	30	45	55	65

三

64866/94

FIG 2

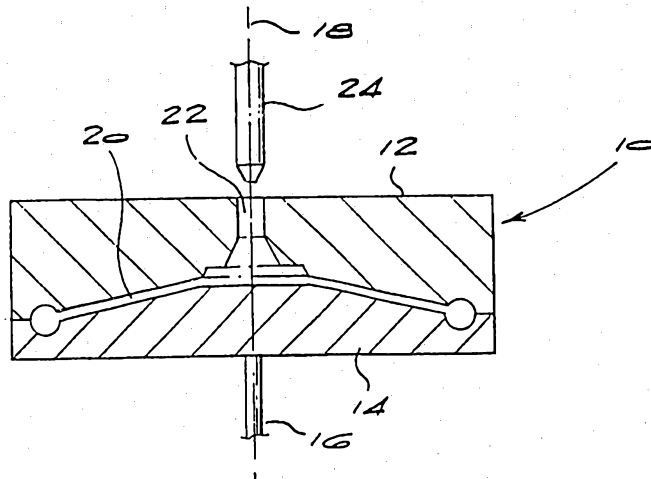


FIG 3

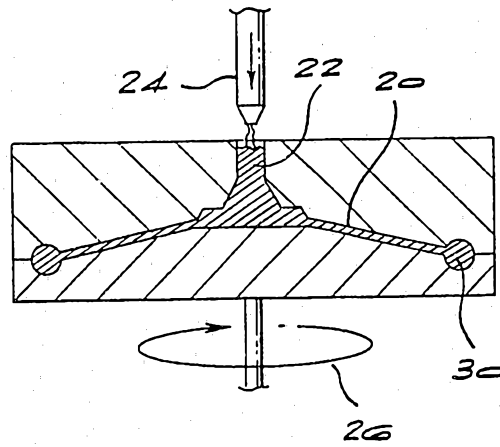


FIG 4

