




(86) Date de dépôt PCT/PCT Filing Date: 2005/07/26
 (87) Date publication PCT/PCT Publication Date: 2006/02/02
 (45) Date de délivrance/Issue Date: 2009/05/12
 (85) Entrée phase nationale/National Entry: 2007/01/05
 (86) N° demande PCT/PCT Application No.: JP 2005/013659
 (87) N° publication PCT/PCT Publication No.: 2006/011486
 (30) Priorité/Priority: 2004/07/27 (JP2004-219103)

(51) Cl.Int./Int.Cl. *A24D 3/14* (2006.01),
A24D 1/04 (2006.01), *A24D 3/16* (2006.01)
 (72) Inventeur/Inventor:
HASEGAWA, TAKASHI, JP
 (73) Propriétaire/Owner:
JAPAN TOBACCO INC., JP
 (74) Agent: ROBIC

(54) Titre : **FILTRE POUR CIGARETTES ET CIGARETTE COMPORTANT LEDIT FILTRE**
 (54) Title: **CIGARETTE FILTER AND CIGARETTE PROVIDED WITH THE SAME**

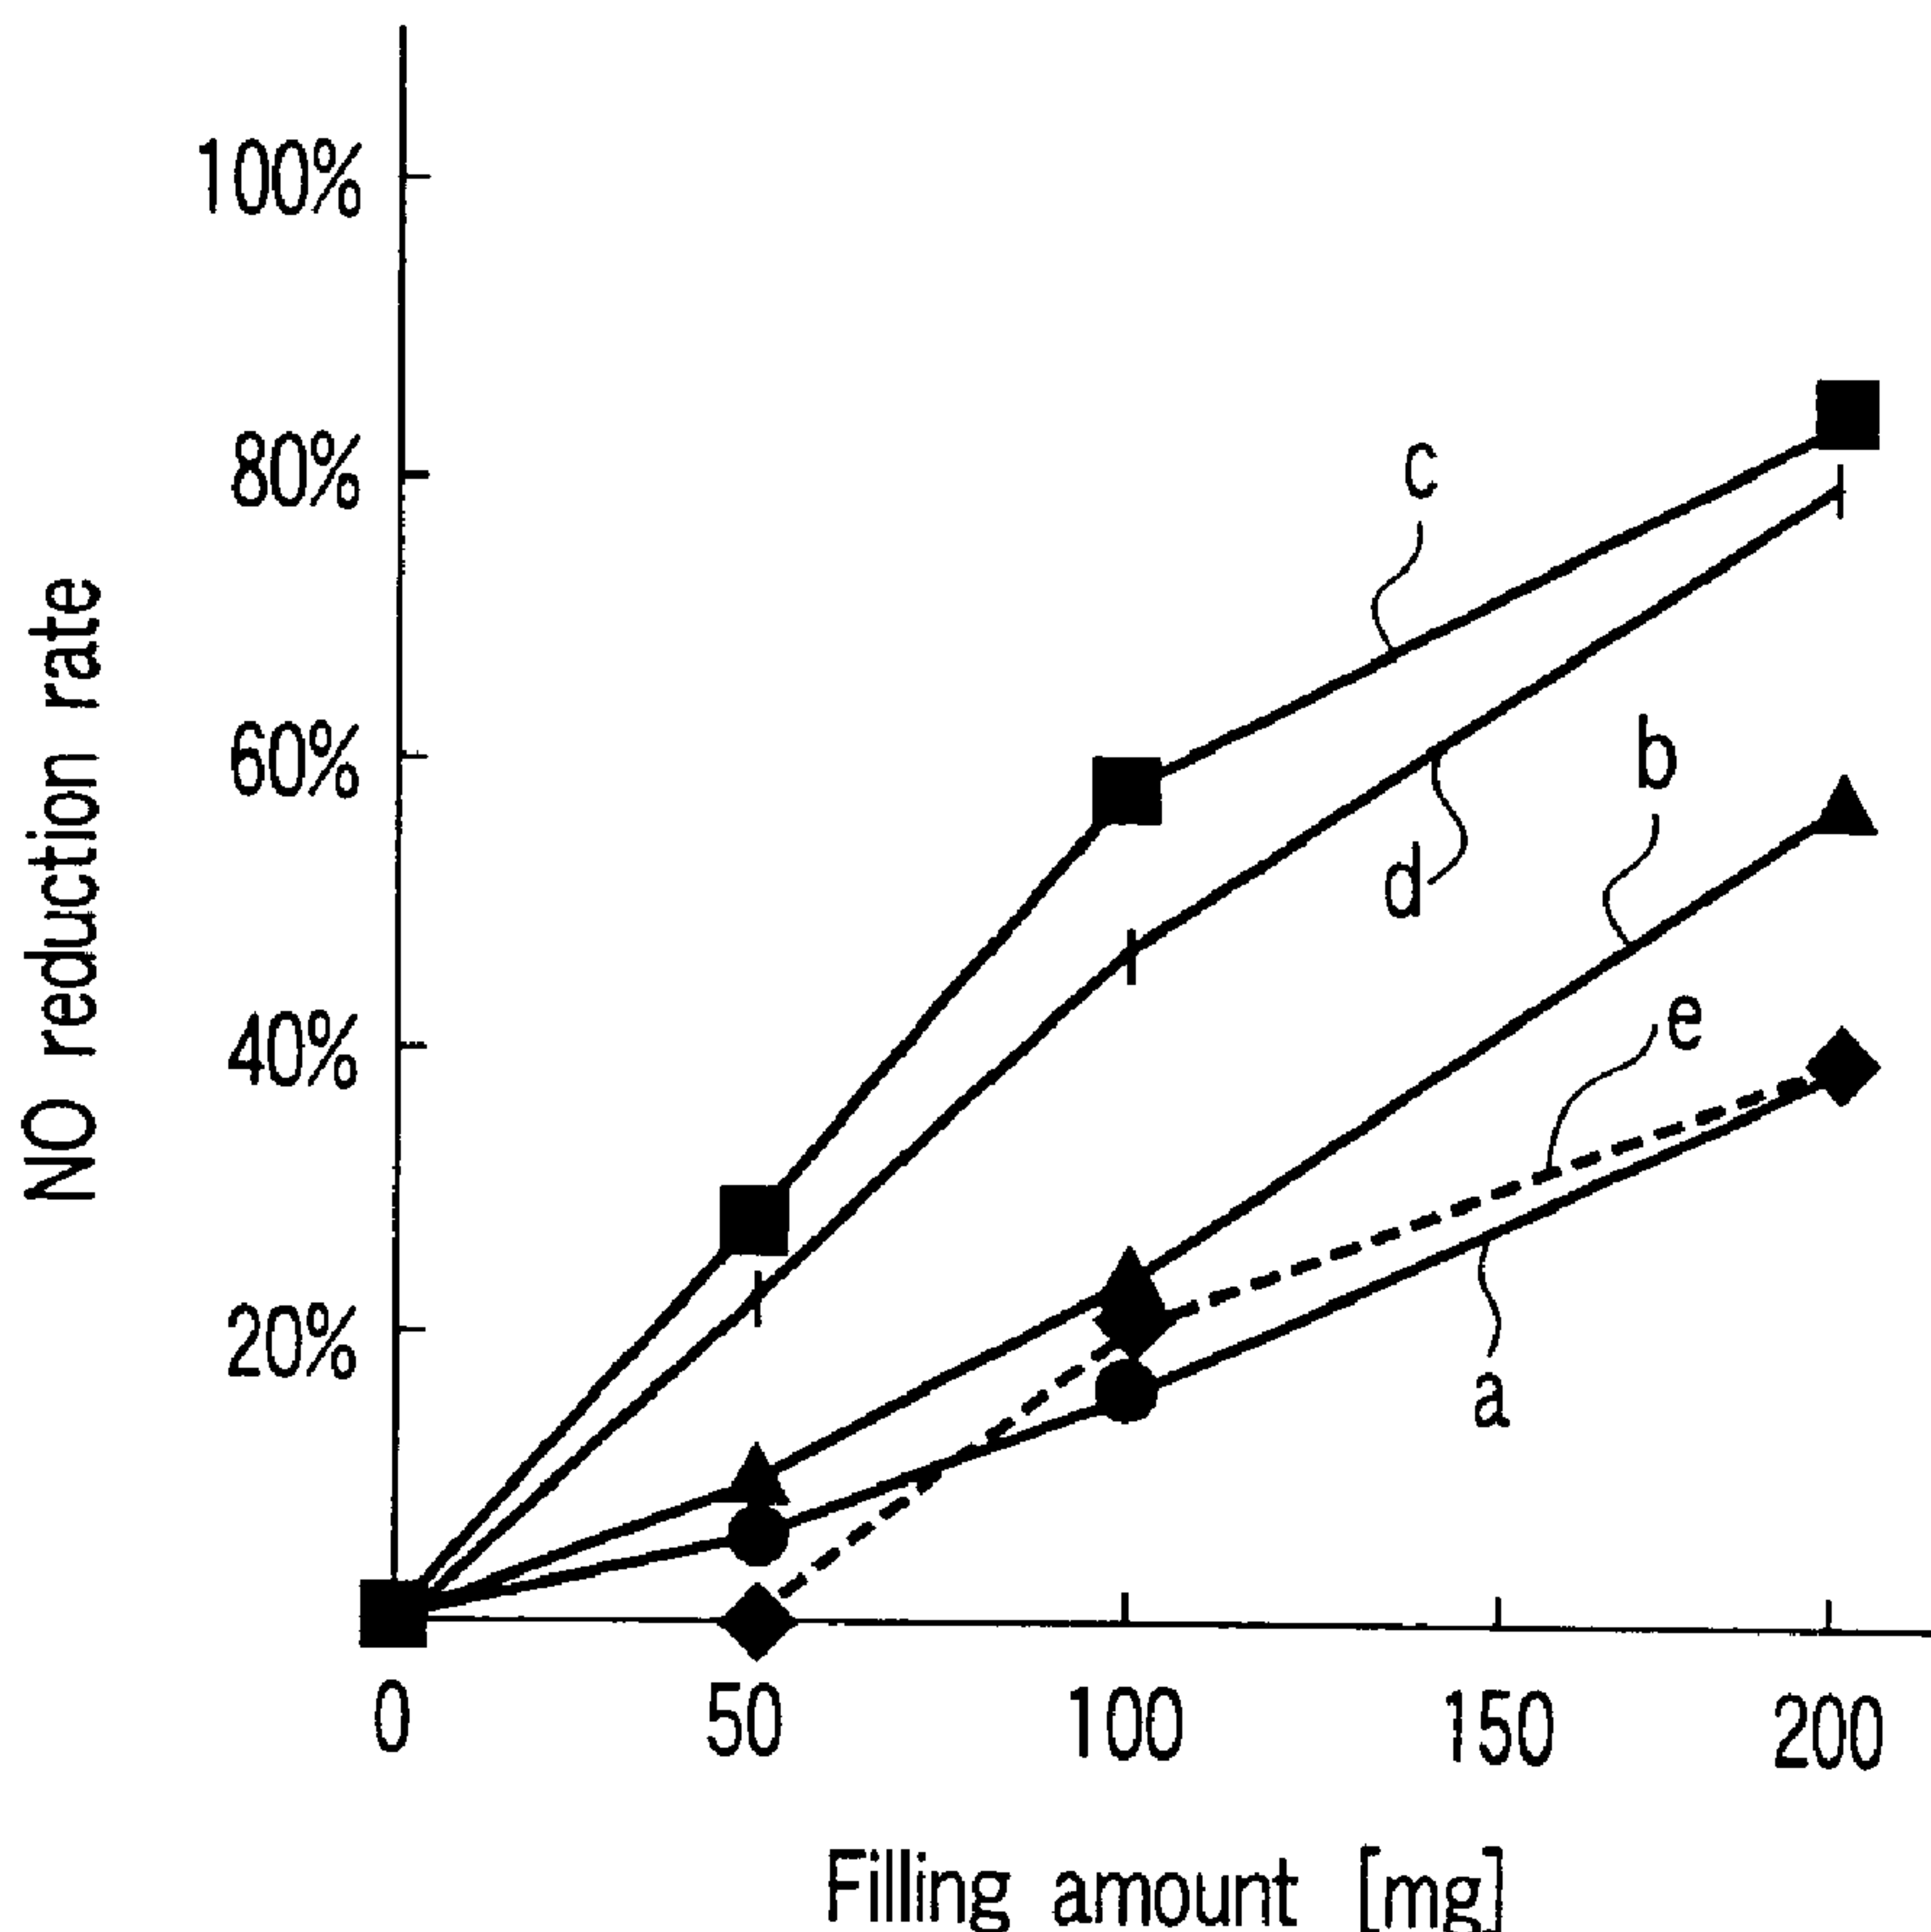

(57) **Abrégé/Abstract:**

Disclosed is a filter for cigarettes containing a filter material for cigarettes which is impregnated with 2-phenyl-4,4,5,5-tetramethylimidazoline-3-oxide-1-oxyl.

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2006年2月2日 (02.02.2006)

PCT


(10) 国際公開番号
WO 2006/011486 A1

- (51) 国際特許分類:
A24D 3/14 (2006.01) A24D 3/16 (2006.01)
A24D 1/04 (2006.01)
- (74) 代理人: 鈴江 武彦, 外(SUZUYE, Takehiko et al.); 〒1000013 東京都千代田区霞が関3丁目7番2号 鈴栄特許総合事務所内 Tokyo (JP).
- (21) 国際出願番号: PCT/JP2005/013659
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) 国際出願日: 2005年7月26日 (26.07.2005)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願2004-219103 2004年7月27日 (27.07.2004) JP
- (84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR),
- (71) 出願人 (米国を除く全ての指定国について): 日本たばこ産業株式会社 (JAPAN TOBACCO INC.) [JP/JP]; 〒1058422 東京都港区虎ノ門二丁目2番1号 Tokyo (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 長谷川 毅 (HASEGAWA, Takashi) [JP/JP].

[続葉有]

(54) Title: FILTER FOR CIGARETTE AND CIGARETTE HAVING SAME

(54) 発明の名称: シガレット用フィルタおよびそれを備えたシガレット

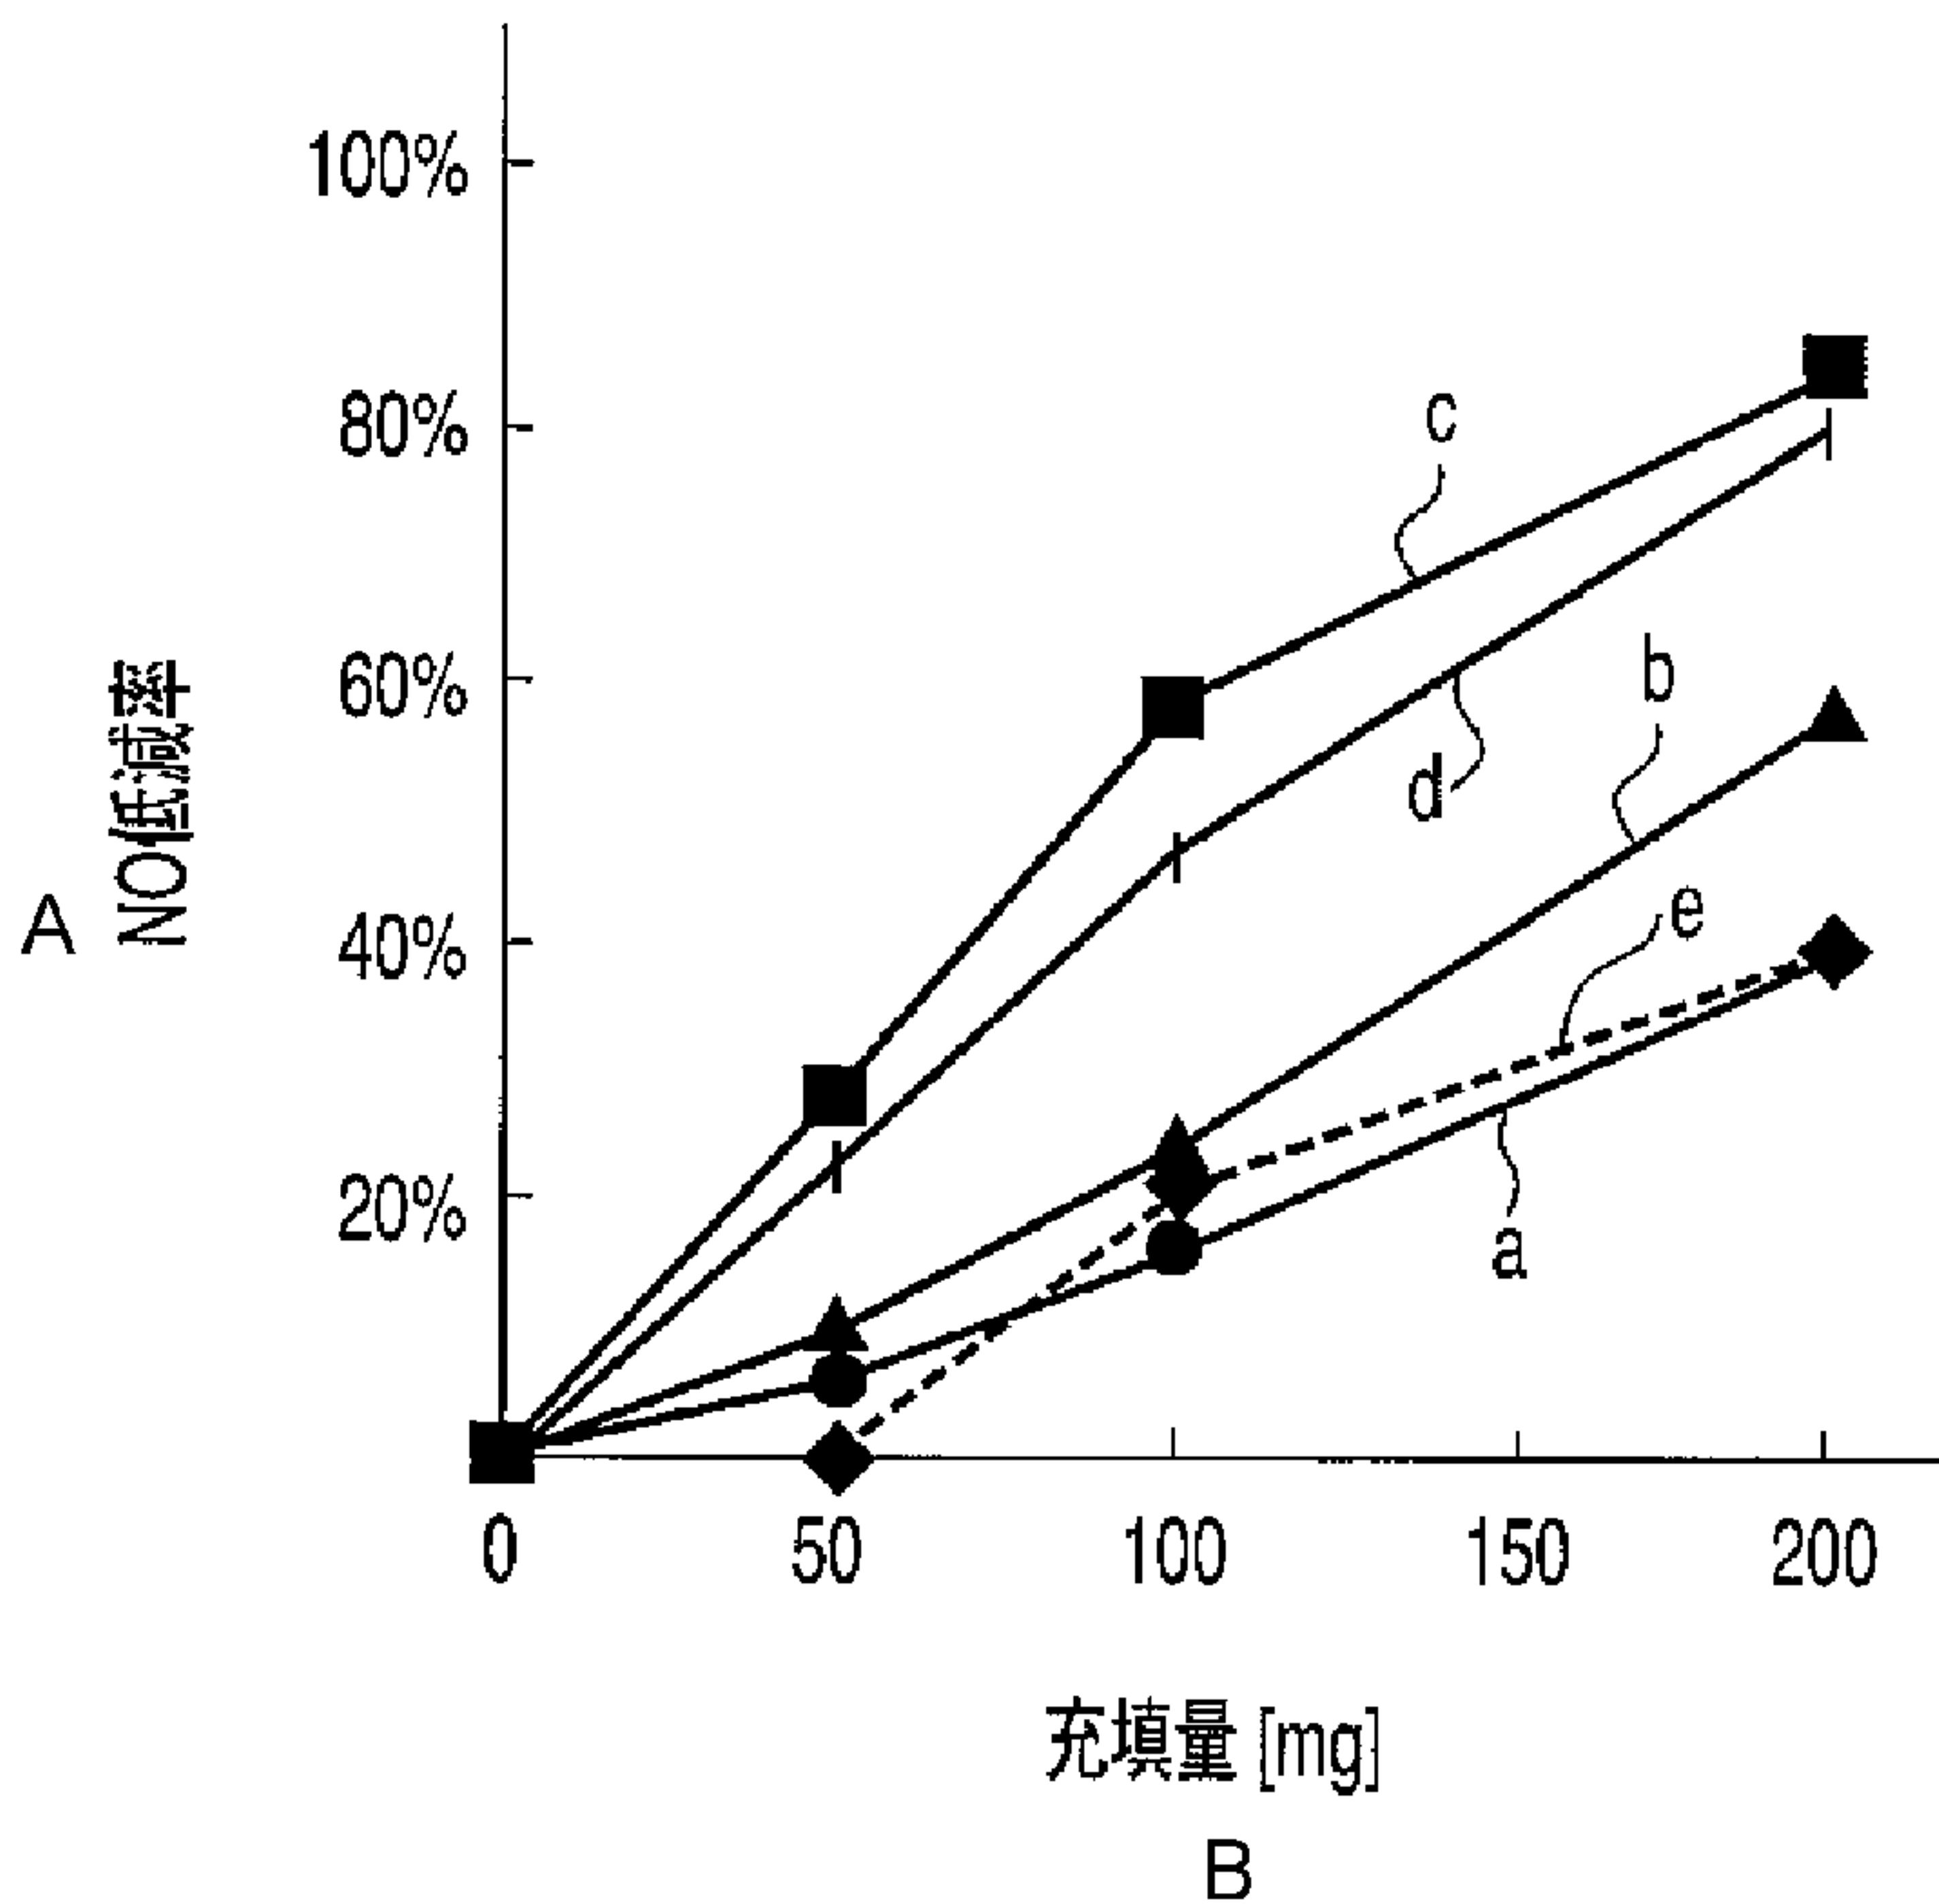

(57) Abstract: Disclosed is a filter for cigarettes containing a filter material for cigarettes which is impregnated with 2-phenyl-4,4,5,5-tetramethylimidazo-line-3-oxide-1-oxyl.

(57) 要約: シガレット用フィルタは、2-フェニル-4, 4, 5, 5-テトラメチルイミダゾリン-3-オキシド-1-オキシルが添着されたシガレット用フィルタ素材を含む。

A - NO REDUCTION RATE
B - AMOUNT FILLED [mg]

WO 2006/011486 A1

WO 2006/011486 A1



OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).

添付公開書類：
— 国際調査報告書

2文字コード及び他の略語については、定期発行される各PCTガゼットの巻頭に掲載されている「コードと略語のガイダンスノート」を参照。

D E S C R I P T I O N

CIGARETTE FILTER AND CIGARETTE PROVIDED WITH THE SAME

5

Technical Field

The present invention relates to a cigarette filter and a cigarette provided with the same, and more specifically, to a cigarette filter excellent in efficiency of removing nitrogen oxides (NOx) in the mainstream smoke and a cigarette provided with the same.

10

Background Art

Nowadays, various requirements are imposed on cigarettes, one of which is to decrease the amount of NOx in the mainstream smoke of cigarettes (Jpn. Pat. Appln. KOKAI Publication No. 2002-119270). Jpn. Pat. Appln. KOKAI Publication No. 2002-119270 discloses a tobacco filter in which a procyanidin is incorporated in filaments that form the filter.

15

20

However, it has been found that the conventional tobacco filters are not capable of removing NOx from the mainstream smoke to a satisfactory degree.

Disclosure of Invention

Thus, it is an object of the present invention to provide a cigarette filter that can efficiently remove nitrogen oxides from the tobacco mainstream smoke, and a cigarette provided with such filter.

25

According to the present invention, there is provided a cigarette filter comprising a cigarette filter material to which 2-phenyl-4,4,5,5-tetramethylimidazoline-3-oxide-1-oxyl is added.

Further, according to the present invention, there is provided a cigarette provided with a cigarette filter according to the present invention.

Brief Description of Drawings

FIG. 1 is a graph showing the reduction rate of NO in the mainstream smoke of cigarettes manufactured in Example 1, which will be described later in detail, together with that of a comparative example;

FIG. 2 is a graph showing the reduction rate of NO in the mainstream smoke of cigarettes manufactured in Example 2, which will be described later in detail, together with that of a comparative example;

FIG. 3 is a graph showing the reduction rate of NO in the mainstream smoke of cigarettes manufactured in Example 3, which will be described later in detail, together with that of a comparative example; and

FIG. 4 is a graph showing the reduction rate of NO in the mainstream smoke of cigarettes manufactured in Example 4, which will be described later in detail, together with that of a comparative example.

Best Mode for Carrying Out the Invention

The present invention will be described in more

detail below.

A cigarette filter according to the present invention comprises a cigarette filter material to which 2-phenyl-4,4,5,5-tetramethylimidazoline-3-oxide-1-oxyl (PTIO) is added.

In the cigarette filter of the present invention, PTIO, an effective ingredient for removing nitrogen oxides, is a compound known per se (see, for example, Jpn. Pat. Appln. KOKAI Publication No. 9-43153).

In the cigarette filter of the present invention, use may be made, as the filter material, of cellulose acetate fiber tow, filter paper and porous particulate carrier such as activated carbon. In the case where cellulose acetate fiber tow is used as the filter material, PTIO can be added by spraying PTIO onto the fiber tow. When filter paper is used, PTIO can be impregnated into the filter paper. The filter material thus obtained can be wrapped with a wrapper by an ordinary method, and connected to an end of a cigarette.

In the case where a porous particulate carrier such as activated carbon is used as the filter material, PTIO is impregnated in the porous particulate carrier, and then the thus obtained PTIO-carrying particles are filled in a cavity as is known in the art or added to a tow. More specifically as to the cavity filling, a plain filter is provided to either end of a

filter wrapper paper pipe. The PTIO-carrying particles are filled in the cavity between these plain filters. On the other hand, the addition to the tow is carried out by a method similar to that used for charcoal filters of commercially available cigarettes, that is, the PTIO-carrying particles are dispersed between the fibers of the acetate filter.

PTIO is added preferably in an amount of 3 to 10 parts by weight, particularly preferably, 5 to 7 parts by weight based on 100 parts by weight of the filter material. PTIO significantly reduces the amount of NO and NOx contained in the cigarette mainstream smoke even under wet conditions, which are equivalent to the actual smoking conditions.

The present invention will be described by way of Examples, but the present invention should not be limited to the Examples.

Example 1

<Preparation of PTIO-impregnated activated carbon>

10 mg, 30 mg, 50 mg and 100 mg of PTIO (available from Wako Pure Chemical Industries, Ltd.; CAS: 18390-00-6) were completely dissolved in 2490 mg, 2470 mg, 2450 mg and 2400 mg of ethanol, respectively, thus preparing PTIO ethanol solutions having a concentration of 0.4% by weight, 1.2% by weight, 2% by weight and 4% by weight, respectively. To each of the ethanol solutions, 1g of coconut shell activated carbon

(available from Japan Envirochemicals Ltd; a specific surface area: about 1200 m²/g), which was dried in advance by heating at 200°C in vacuo, was added, and stirred for 60 minutes using a test tube mixer.

5 Thereafter, the solvent ethanol was removed in a water bath of 50°C while blowing nitrogen gas into the solution, and then the resultant material was dried by heating at 120°C in vacuo. Thus, PTIO-impregnated activated carbon was obtained. It was measured that
10 the PTIO-impregnated activated carbon obtained using the ethanol solution having a PTIO concentration of 0.4% by weight was impregnated with PTIO in an amount corresponding to 1% of the weight of activated carbon (PTIO-impregnated activated carbon I), the PTIO-
15 impregnated activated carbon obtained using the ethanol solution having a PTIO concentration of 1.2% by weight was impregnated with PTIO in an amount corresponding to 3% of the weight of activated carbon (PTIO-impregnated activated carbon II), the PTIO-impregnated activated
20 carbon obtained using the ethanol solution having a PTIO concentration of 2% by weight was impregnated with PTIO in an amount corresponding to 5% of the weight of activated carbon (PTIO-impregnated activated carbon III), and the PTIO-impregnated activated carbon
25 obtained using the ethanol solution having a PTIO concentration of 4% by weight was impregnated with PTIO in an amount corresponding to 10% of the weight of

activated carbon (PTIO-impregnated activated carbon IV).

<Manufacture of Cigarette Samples>

Commercially available American blend tobacco rods
5 were used as tobacco rods. Filter plugs in which PTIO-
impregnated activated carbons obtained above were
cavity-filled were attached to one-end sides of the
tobacco rods respectively. The filter plugs had a
plain filter (made of cellulose acetate fiber tow)
10 having a length of 5 mm provided on both ends of each
plug and 0 mg, 50 mg, 100 mg and 200 mg of PTIO-
impregnated activated carbon particles were filled at
closest packing. The plugs had no ventilation holes.

<Measurements of Amount of NO and NOx>

15 The cigarette samples obtained above were set on a
smoking machine (RM 26 available from Borgwaldt GmbH),
and were burnt under the following conditions.

Smoke suction volume: 17.5 mL/puff

Puffing time: 2 seconds/puff

20 Puff interval: 58 seconds

Number of times of puffing: 7 times

For each of 7 times of puffing (smoke suction) and
an idle running puff (one time after completion of
burning), smoke having passed through the Cambridge
25 filter was diluted 20-fold (by collecting it with an
aluminum bag in which $17.5 \text{ mL} \times 19 = 332.5 \text{ mL}$ of
nitrogen gas was injected in advance). Then, the

concentrations of NO and NO_x were measured by the chemiluminescent method. The weights of NO and NO_x were calculated from the concentrations obtained above, and the calculated weight values of all the puffs and idle-running puff were summed up to obtain a delivery amount per cigarette. For comparison purpose, a similar cigarette sample was manufactured with activated carbon not impregnated with PTIO, and the delivery amount per cigarette was obtained in a similar manner. The NO and NO_x reduction rates were calculated based on the NO and NO_x delivery amounts per cigarette obtained similarly for a plain cigarette without the filter connected thereto. The NO reduction rate (%) of each sample was illustrated in FIG. 1. In FIG. 1, a line indicates the results obtained in the case where the PTIO-impregnated activated carbon I was used, a line b indicates the results obtained in the case where the PTIO-impregnated activated carbon II was used, a line c indicates the results obtained in the case where the PTIO-impregnated activated carbon III was used, a line d indicates the results obtained in the case where the PTIO-impregnated activated carbon IV was used, and a line e indicates the results obtained in the case where the activated carbon with no PTIO impregnated was used.

From the results shown in FIG. 1, it can be seen that the filters that contain PTIO-impregnated

activated carbon particles significantly reduce the amount of NO as compared to the activated carbon particles that do not contain PTIO. In particular, the activated carbons carrying 3 to 10% by weight of PTIO have a remarkably high NO reduction effect. It should be noted that the NO_x reduction rate exhibited a tendency similar to those of the above-described NO reduction rates.

Example 2

PTIO-impregnated activated carbon II prepared in Example 1 was subjected to moisture absorption until it reaches the equilibrium at a temperature of 22°C and a relative humidity of 60%, and thus moisture-absorbed PTIO-impregnated activated carbon III was obtained. Cigarettes were manufactured as in Example 1 except that the moisture-absorbed PTIO-impregnated activated carbon III was used, and the NO reduction rate in the mainstream smoke was obtained. The results were illustrated in FIG. 2. In FIG. 2, a line a indicates the results obtained in the case where the moisture-absorbed PTIO-impregnated activated carbon III was used, and a line b indicates the results obtained in the case where activated carbon obtained by similar moisture absorption except that PTIO was not impregnated. From the results shown in FIG. 2, it can be seen that when the moisture absorption is carried out, the NO reduction rate is slightly lowered as

compared to the case of the dry PTIO-impregnated
activated carbon III (Example 1); however the NO amount
is significantly reduced as compared to the case where
simple activated carbon is used, indicating that PTIO
5 will sufficiently have an effect of reducing the NO
amount, even under actual smoking (corresponding to
filter ventilation of 50%). It should be noted also
here that the NO_x reduction rate exhibited a tendency
similar to that of the NO reduction rate described
10 above.

Example 3

The cigarette samples manufactured in Example 1
were burnt under the same conditions as in Example 1
except that the smoke suction volume was changed to
15 35 mL/puff. Cigarette samples using activated carbon
not impregnated with PTIO were burnt also at a smoke
suction volume of 35 mL/puff. The NO reduction rate in
the mainstream smoke was calculated. The results are
illustrated in FIG. 3. In FIG. 3, a line a indicates
20 the results obtained in the case where the PTIO-
impregnated activated carbon III was used, and a line b
indicates the results obtained in the case where the
activated carbon without PTIO was used. From the
results shown in FIG. 3, it can be seen that when the
25 smoke suction volume is increased, the NO reduction
rate is lowered as compared to the case of Example 1;
however the samples using the PTIO-impregnated

activated carbon III exhibits a significantly higher NO reduction rate than that of the cigarette samples using the activated carbon without PTIO. It should be noted also here that the NO_x reduction rate exhibited a
5 tendency similar to that of the NO reduction rate described above.

Example 4

Cigarette samples similar to those of Example 2 (which used moisture-absorbed PTIO) were burnt under
10 the same conditions as those in Example 3, and the NO reduction rate in the mainstream smoke was calculated. With regard to cigarette samples using activated carbon not impregnated with PTIO, the NO reduction rate in the mainstream smoke was calculated. The results were
15 illustrated in FIG. 4. In FIG. 4, a line a indicates the results obtained in the case where the PTIO-impregnated activated carbon was used, and a line b indicates the results obtained in the case where the activated carbon without PTIO was used. From the
20 results shown in FIG. 4, it can be seen that when the smoke suction volume is increased, the NO reduction rate is lowered as compared to the case of Example 2; however the samples using the PTIO-impregnated activated carbon exhibits a significantly higher NO
25 reduction rate than that of the cigarette samples using the activated carbon without PTIO. It should be noted also here that the NO_x reduction rate exhibited a

tendency similar to that of the NO reduction rate described above.

As described above, the cigarette filter of the present invention can efficiently remove nitrogen
5 oxides from the tobacco mainstream smoke.

C L A I M S

1. A cigarette filter comprising a cigarette filter material to which 2-phenyl-4,4,5,5-tetramethylimidazoline-3-oxide-1-oxyl is added.

5 2. The cigarette filter according to claim 1, characterized in that the filter material comprises activated carbon particles.

10 3. The cigarette filter according to claim 1, wherein 3 to 10 parts by weight of 2-phenyl-4,4,5,5-tetramethylimidazoline-3-oxide-1-oxyl is added based on 100 parts by weight of the filter material.

4. A cigarette provided with a cigarette filter according to claim 1.

1/2

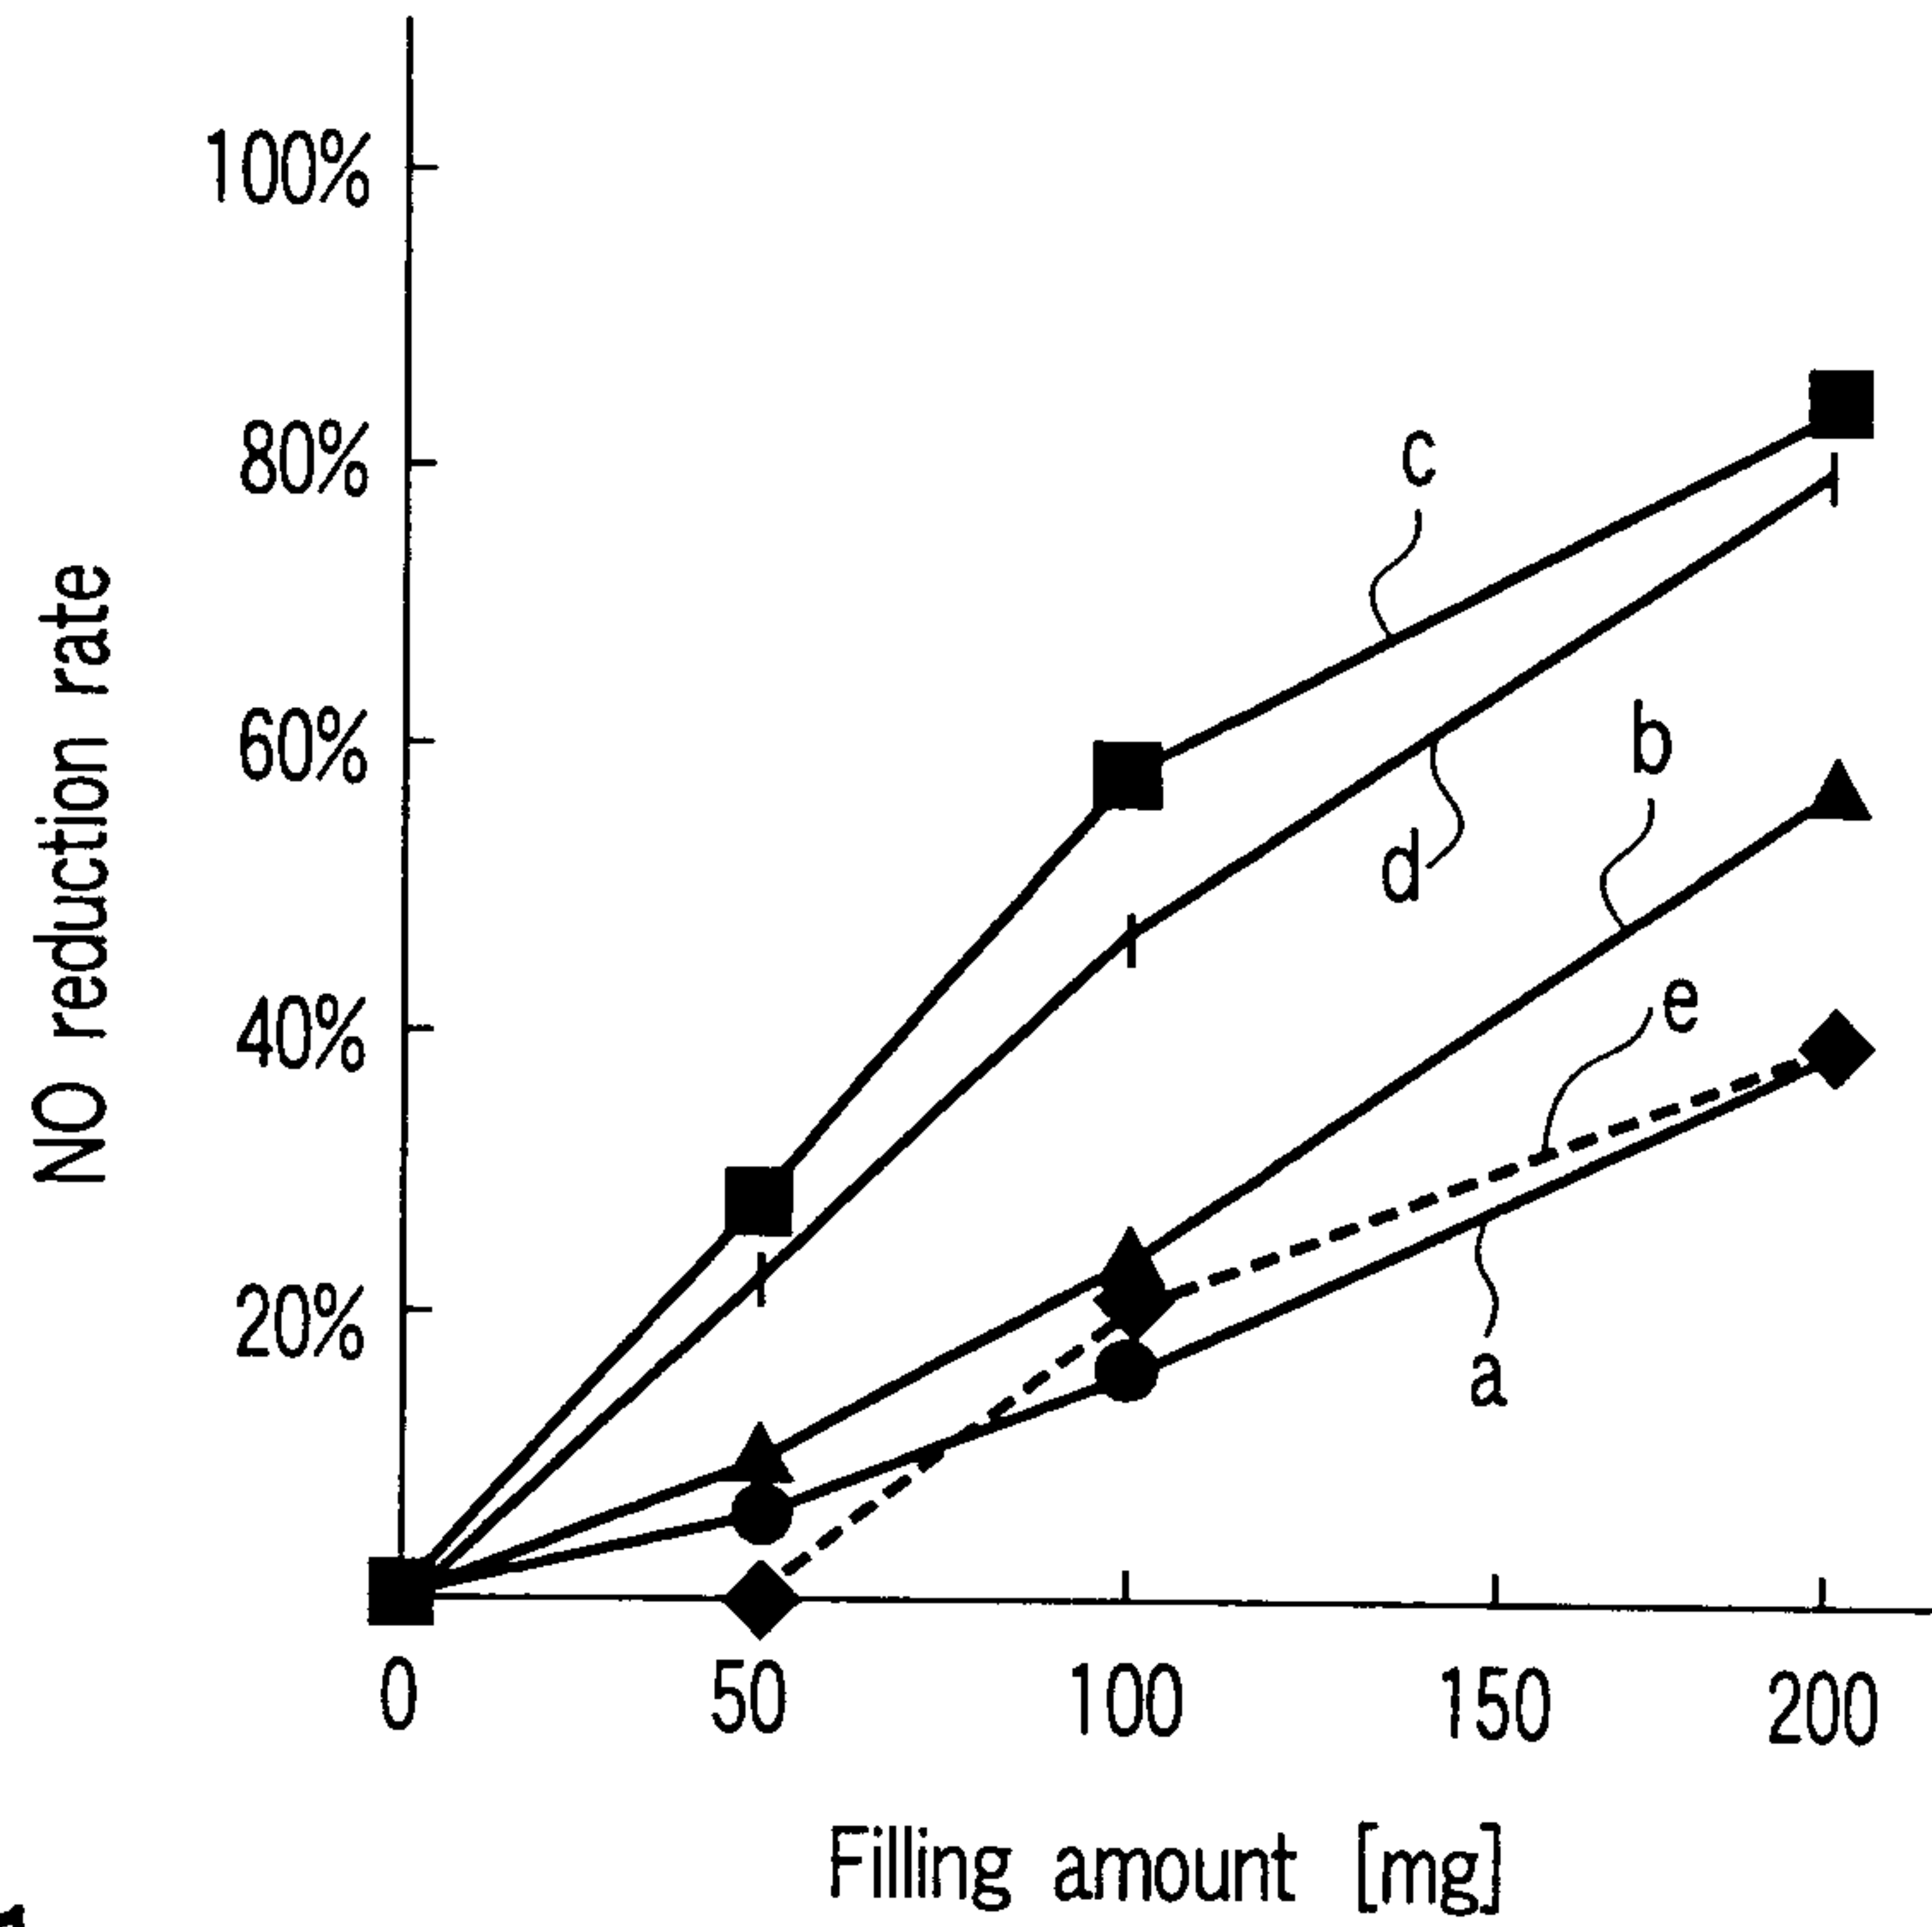


FIG. 1

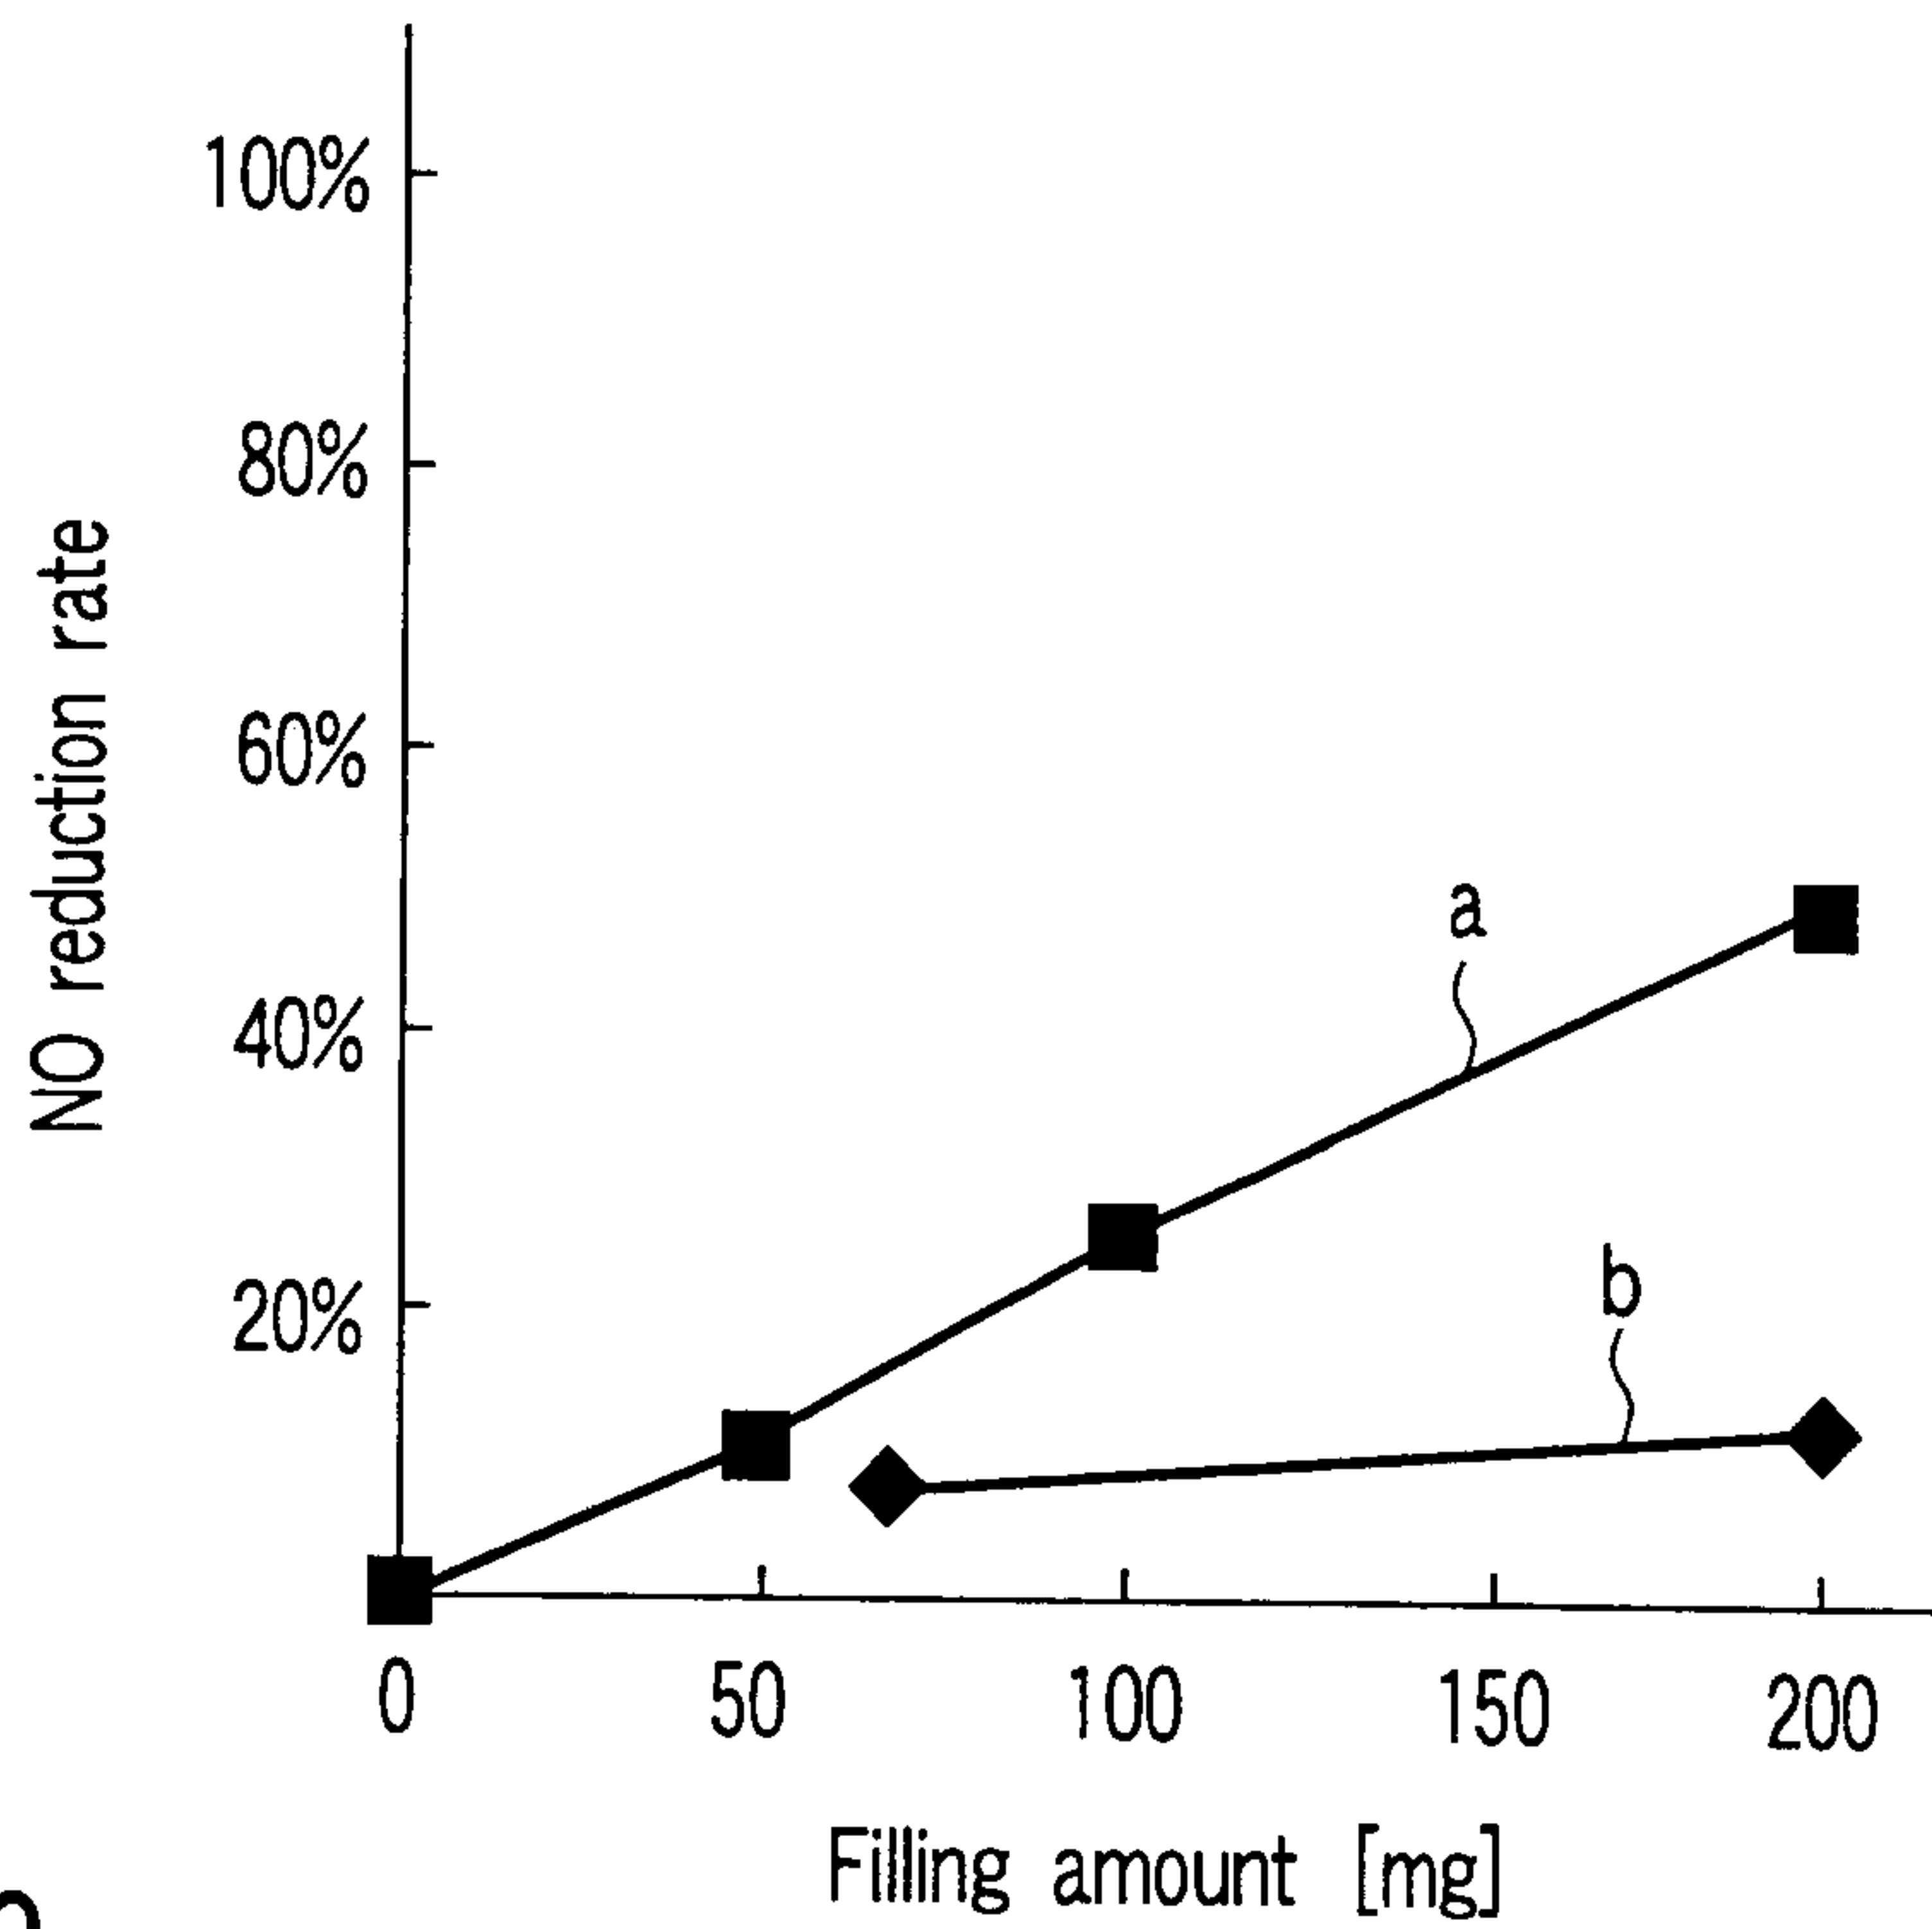


FIG. 2

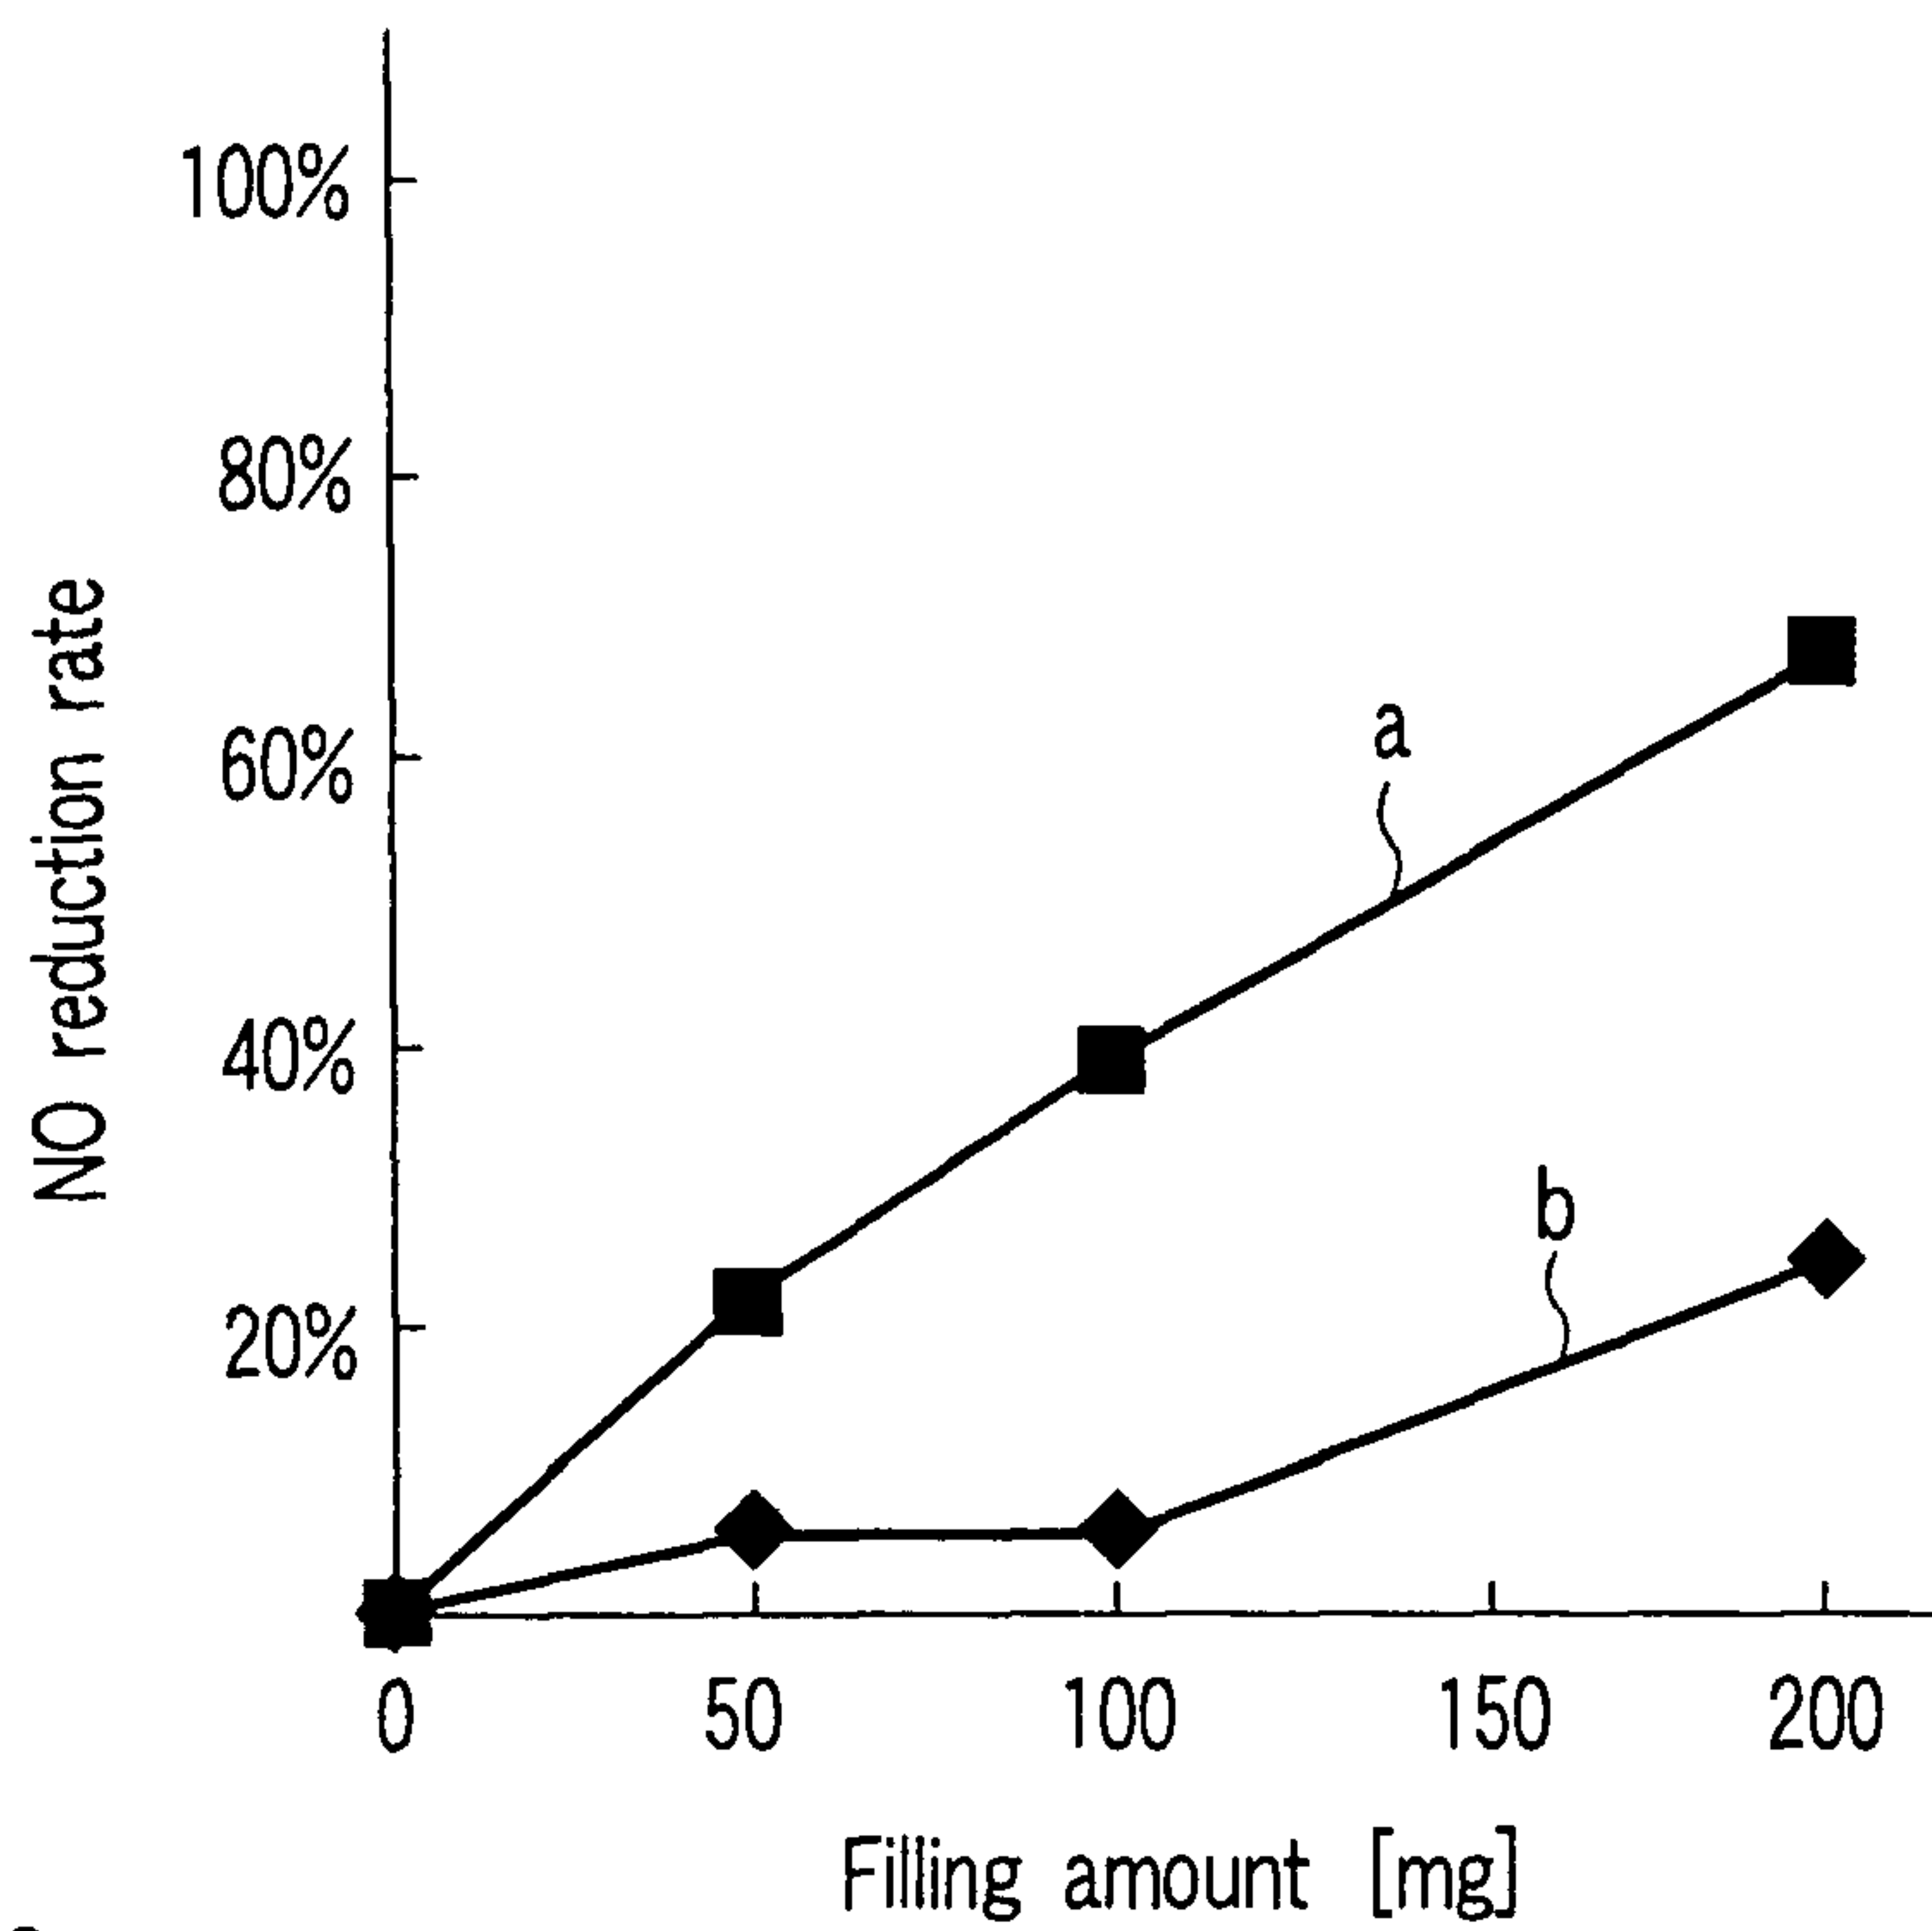


FIG. 3

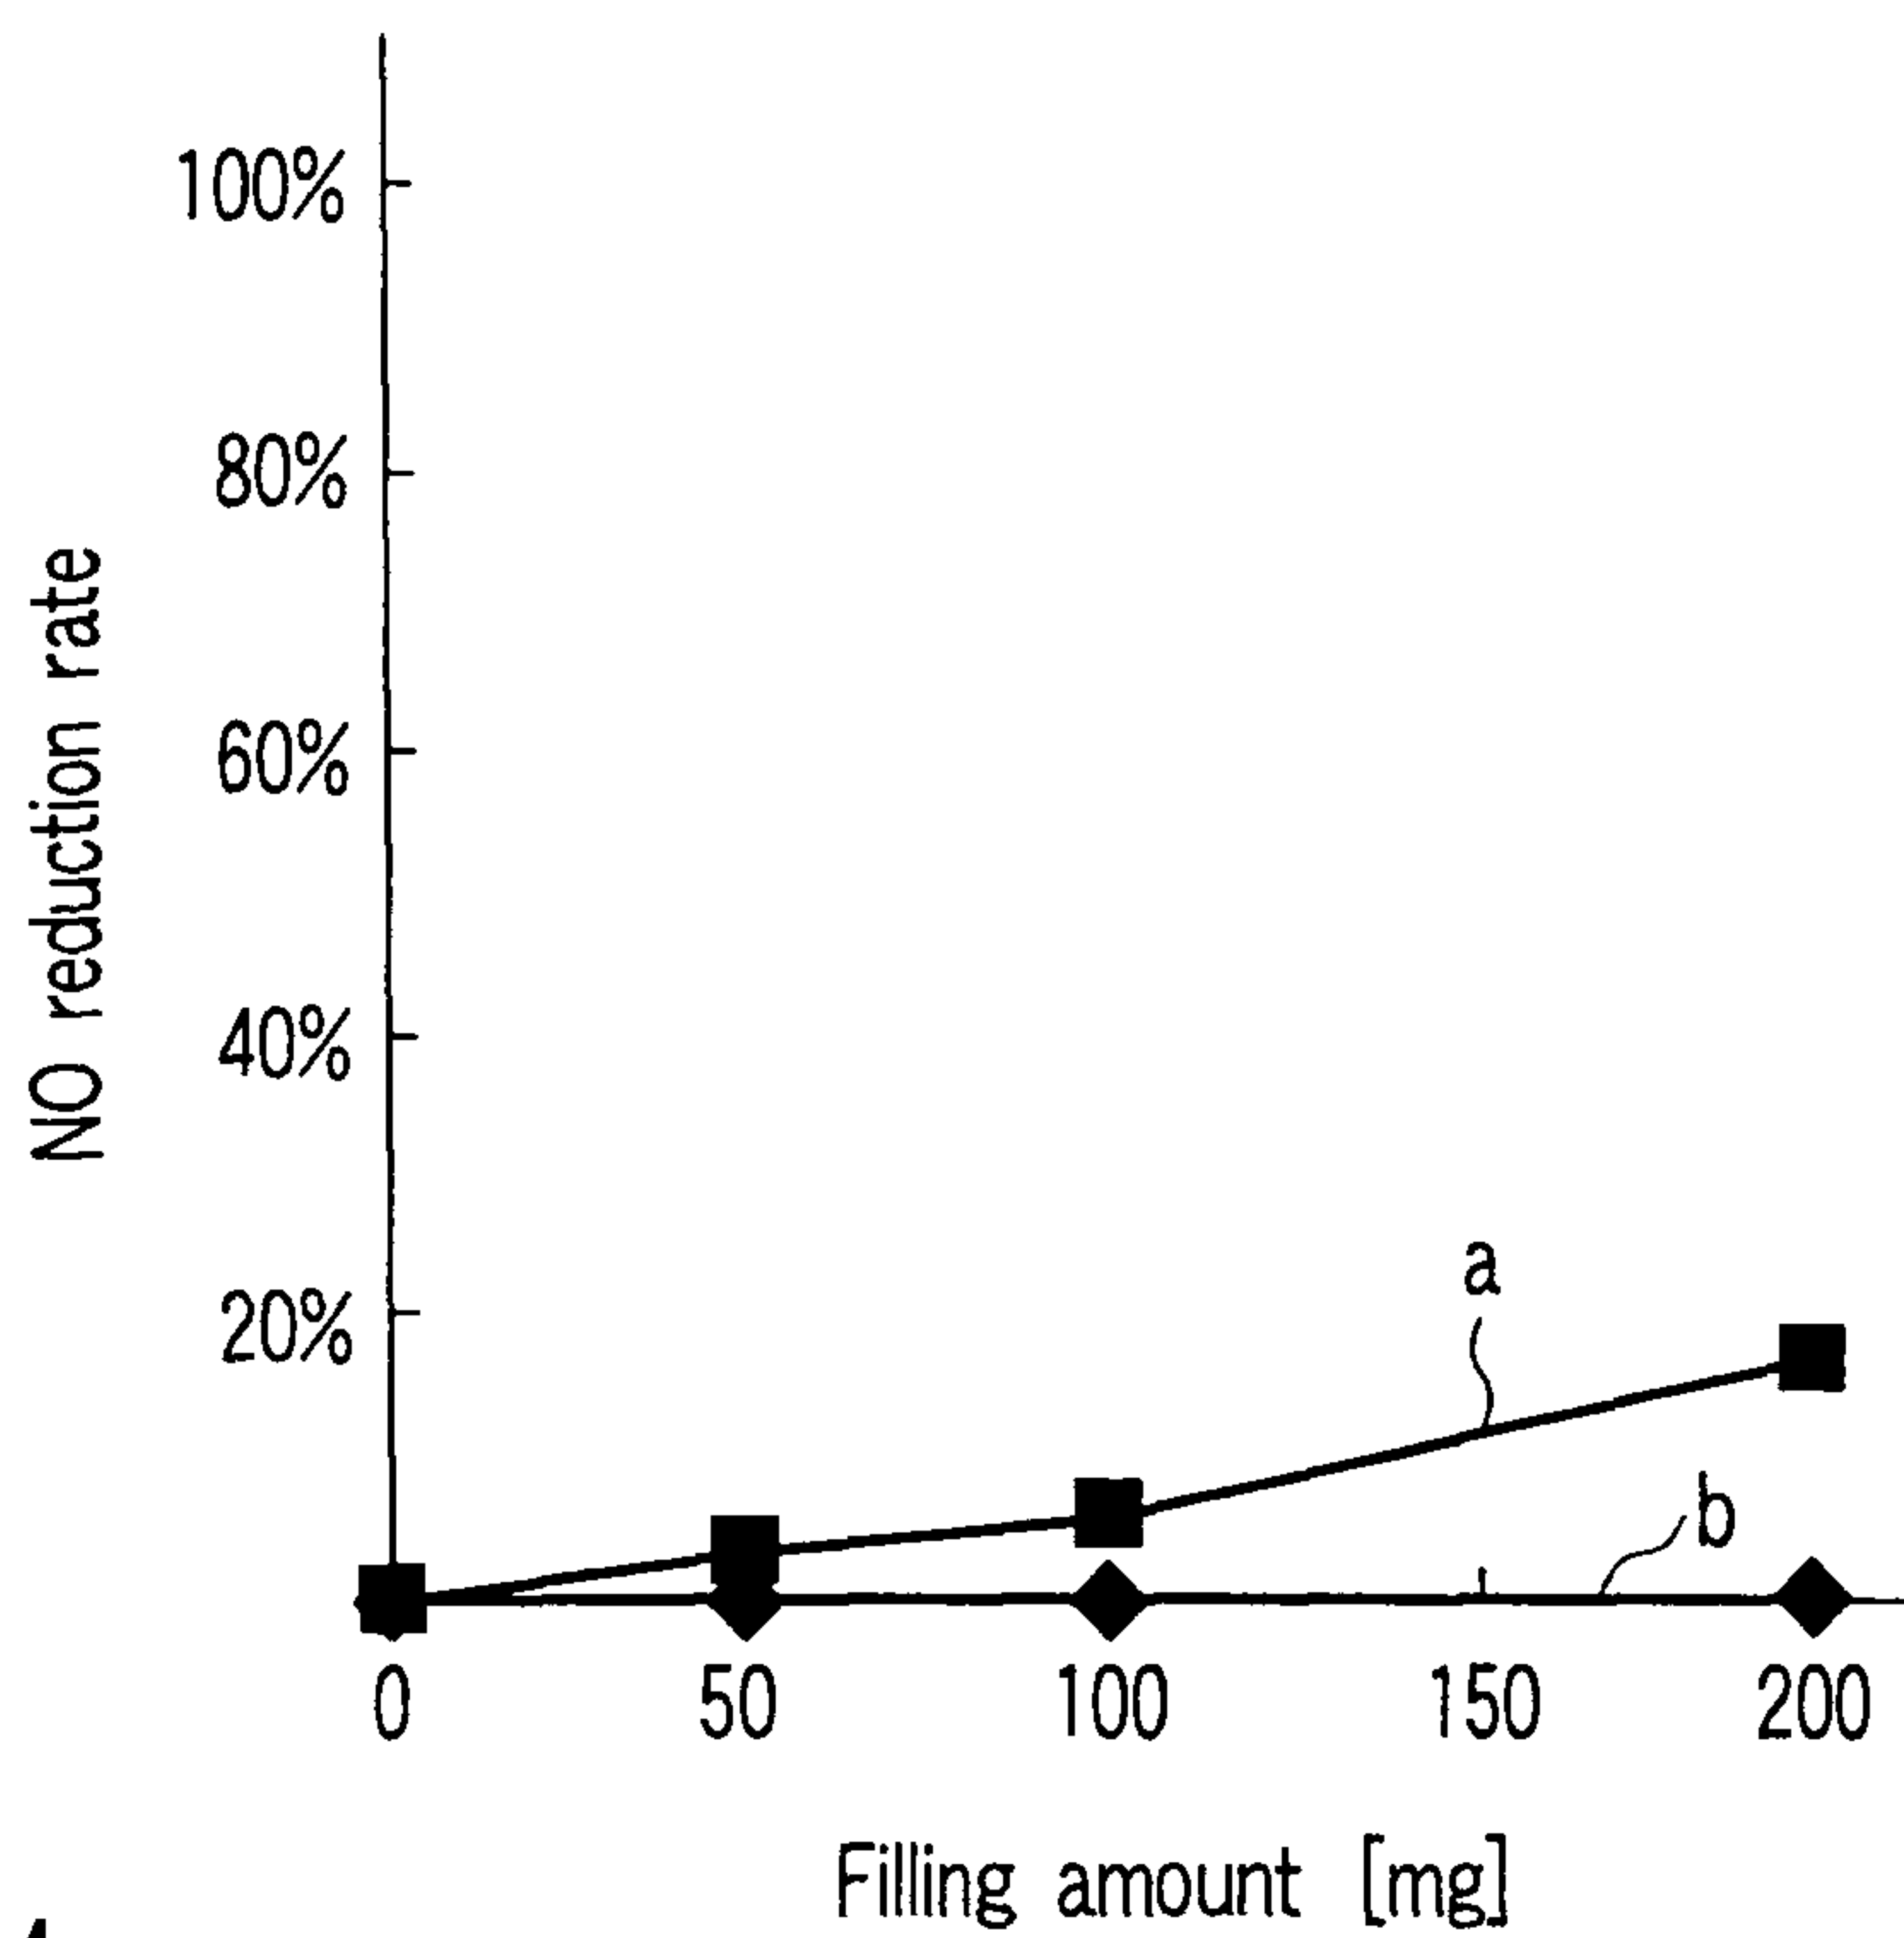


FIG. 4

