

(19) AUSTRALIAN PATENT OFFICE

(54) Title
Reinforcing bar binder, wire reel and method for identifying wire reel

(51)⁶ International Patent Classification(s)
E04G 21/12 (2006.01)20060101ALI2005100
B65B 13/02 (2006.01)⁸BMEP **B65B**
B65B 13/22 (2006.01)13/22
B65B 13/28 (2006.01)20060101ALI2005100
E04G 21/12 ⁸BMEP **B65B**
20060101AFI2005100 13/28
⁸BMEP **B65B** 20060101ALI2006072
13/02 2BMEP
PCT/JP2004/016922

(21) Application No: 2004312245 (22) Application Date: 2004 .11.08

(87) WIPO No: W005/066435

(30) Priority Data

(31) Number	(32) Date	(33) Country
2004-004816	2004 .01.09	JP

(43) Publication Date : 2005 .07.21

(71) Applicant(s)
Max Kabushiki Kaisha

(72) Inventor(s)
Kusakari, Ichiro, Nagaoka, Takahiro

(74) Agent/Attorney
Shelston IP, Level 21 60 Margaret Street, Sydney, NSW, 2000

(56) Related Art
JP 09-165918

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2005年7月21日 (21.07.2005)

PCT

(10) 国際公開番号
WO 2005/066435 A1(51) 国際特許分類: E04G 21/12, 21/16,
B25B 25/00, B65B 13/18

(21) 国際出願番号: PCT/JP2004/016922

(22) 国際出願日: 2004年11月8日 (08.11.2004)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:
特願2004-004816 2004年1月9日 (09.01.2004) JP

(71) 出願人 (米国を除く全ての指定国について): マックス株式会社 (MAX KABUSHIKI KAISHA) [JP/JP]; 〒1038502 東京都中央区日本橋箱崎町6番6号 Tokyo (JP).

(72) 発明者; および

(75) 発明者/出願人 (米国についてのみ): 長岡 孝博 (NA-GAOKA, Takahiro) [JP/JP]; 〒1038502 東京都中央区日本橋箱崎町6番6号 マックス株式会社内 Tokyo (JP).

草刈 一郎 (KUSAKARI, Ichiro) [JP/JP]; 〒1038502 東京都中央区日本橋箱崎町6番6号 マックス株式会社内 Tokyo (JP).

(74) 代理人: 高田 修治 (TAKADA, Shuji); 〒1110043 東京都台東区駒形2丁目7番5号 前川ビル7階 高田国際特許事務所 Tokyo (JP).


(81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SI, SJ, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI

[続葉有]

(54) Title: REINFORCING BAR BINDER, WIRE REEL AND METHOD FOR IDENTIFYING WIRE REEL

(54) 発明の名称: 鉄筋結束機、ワイヤリール及びワイヤリールの識別方法

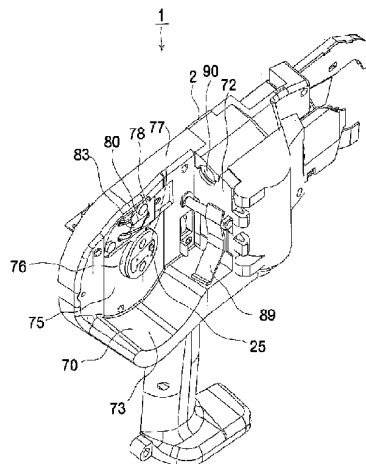

(57) Abstract: An inexpensive reinforcing bar binder having a simple structure in which the type of a wire reel is identified surely, and the feeding amount or the torsional torque of a wire wound around the wire reel can be regulated automatically. The reinforcing bar binder (1) feeds out a wire (8) while rotating a wire reel (30) attached to a storing chamber (70) and binds a reinforcing bar (3). A first detecting means (80) for detecting the rotational amount of the wire reel (30), and a second detecting means (25) for detecting the number of second parts (53) to be detected of the wire reel (30) during the rotational amount detected by the first detecting means (80) are provided in the storing chamber (70). The binder body (2) is provided with a means for controlling the feeding amount or the torsional torque of the wire (8) depending on the number of second parts (53) detected by the second detecting means (25).

(57) 要約: 構造が簡単で安価であり、確実にワイヤリールの種類を識別し、そのワイヤリールに巻かれているワイヤの送り量又は振りトルクを自動的に調節することができる鉄筋結束機を提供する。鉄筋結束機1は、収納室70に装着したワイヤリール30を回転させながらワイヤ8を送り出して、鉄筋3を結束する。収納室70には、ワイヤリール30の回転量を検出する第1の検出手段80と、第1の検出手段80によって検出された回転量の間のワイヤリール30の第2の被検出部53の数を検出する第2の検出手段25とが設けられている。結束機本体2には、第2の検出手段25によって検出された第2の被検出部53の数によってワイヤ8の送り量又はワイヤ8の振りトルクを制御する制御手段が設けられている。

WO 2005/066435 A1



(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, MI, MR, NE, SN, TD, TG).

2文字コード及び他の略語については、定期発行される各*PCI*ガゼットの巻頭に掲載されている「コードと略語のガイダンスノート」を参照。

添付公開書類:


— 国際調査報告書

VERIFICATION OF TRANSLATION

Re: PCT/JP2004/016922

I, Masayuki Higuchi, residing at 21-5, Matsubara 4-chome, Setagaya-ku, Tokyo, Japan, hereby declare that I am conversant with the Japanese and English languages and that I am the translator of the attached documents and certify that to the best of my knowledge and belief the following is a true and correct English translation of the original text of the priority document.

September 22, 2005


Masayuki Higuchi

DESCRIPTION

REINFORCING BAR BINDER, WIRE REEL AND METHOD FOR IDENTIFYING WIRE

REEL

TECHNICAL FIELD

5 The present invention relates to a reinforcing bar binder capable of identifying the type of a wire reel and automatically adjusting the amount of feeding of a wire wound around the wire reel or the twisting torque on the wire, a wire reel used therewith and a method for identifying a wire reel.

10 BACKGROUND ART

Any discussion of the prior art throughout the specification should in no way be considered as an admission that such prior art is widely known or forms part of common general knowledge in the field.

15 In a conventional reinforcing bar binder, a wire reel around which a wire is wound is retained at the rear portion thereof and, when the switch is turned on and a trigger is manipulated, the wire is drawn out and fed forward from the wire reel through a wire feeding device, discharged in a loop shape from the tip end
20 curved portion of a guide arm and wound onto a reinforcing bar and, thereafter, a twisting hook grips a portion of the loop and torsionally rotates to bind the reinforcing bar. As a configuration for automatically adjusting the wire twisting torque of such a reinforcing bar binder, there has been a configuration
25 which provides displaying means for displaying the type of a wire on the side surface of a wire reel, employs detecting means provided on the reinforcing bar binder for detecting the displaying means, identifies the type of the wire on the basis of the result of

detection from the detecting means and automatically adjusts the twisting torque, as disclosed in JP-B No. 3050369.

A conventional reinforcing bar binder employs reflective stickers as the displaying means and a plurality of photo sensors as the detecting means so that any of the plural sensors can detect the reflective stickers provided on the side surface of the wire reel to detect the type of the wire reel. However, such a reinforcing bar binder requires plural photo sensors, thus involving a complicated and expensive construction. Furthermore, the reflective stickers may be detected by photo sensors other than the photo sensors used for detecting the reflective stickers, due to the rotation speed of the wire reel and external disturbing light and the like, which has caused malfunctions in some cases.

It is therefore an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative.

In at least a preferred embodiment the present invention provides a reinforcing bar binder capable of certainly identifying the type of a wire reel and automatically adjusting the amount of feeding of the wire wound around the wire reel or the twisting torque on the wire while having a relatively simple and inexpensive construction. In at least a preferred embodiment the present invention provides a wire reel used with the reinforcing bar binder. In at least a preferred embodiment the present invention provides a method for certainly identifying a wire reel.

DISCLOSURE OF THE INVENTION

A first aspect of the present invention provides a

07 Aug 2006

2004312245

reinforcing bar binder including a storing chamber which is provided in a binder main body and mounts a wire reel around which a reinforcing-bar binding wire is wound to wind said wire around a reinforcing bar and then to twist said wire for binding
5 of said reinforcing bar, wherein the storing chamber is provided with a first detecting means for detecting the amount of rotation of the wire reel and a second detecting means for detecting the number of second to-be-detected portions on the wire reel.

A second aspect of the present invention provides a
10 reinforcing bar binder including a storing chamber which is provided in a binder main body and mounts a wire reel around which a reinforcing-bar binding wire is wound to wind said wire around a reinforcing bar and then to twist said wire for binding of said reinforcing bar while rotating said wire reel to feed
15 said wire, wherein the storing chamber is provided with a first detecting means for detecting the amount of rotation of said wire reel and a second detecting means for detecting the number of second to-be-detected portions on the wire reel during the amount of rotation detected by the first detecting means; and
20 the binder main body is provided with controlling means for controlling the amount of feeding of the wire or the twisting torque on the wire depending on the number of the second to-be-detected portions detected by the second detecting means.

A third aspect of the present invention provides that the
25 first detecting means detects first to-be-detected portions on the wire reel to detect the amount of rotation of the wire reel.

A fourth aspect of the present invention provides that the first detecting means is a contact-type sensor and the first

to-be-detected portions are convex portions or concave portions which are detected by the contact-type sensor while the second detecting means is a non-contact type sensor and the second to-be-detected portions are marks which are detected by the
5 non-contact type sensor.

A fifth aspect of the present invention provides a wire reel used in a reinforcing bar binder including a storing chamber which is provided in a binder main body and mounts a wire reel around which a reinforcing-bar binding wire is wound to wind
10 said wire around a reinforcing bar and then to twist said wire for binding of said reinforcing bar, wherein the reel main body is provided with first to-be-detected portions which are detected by a first detecting means in the reinforcing bar binder and second to-be-detected portions which are detected by a second
15 detecting means in the reinforcing bar binder

A sixth aspect of the present invention provides that the first to-be-detected portions are detected by the first detecting means to detect the amount of rotation of the wire reel and the second to-be-detected portions are detected by the second
20 detecting means to identify the type of the wire reel .

A seventh aspect of the present invention provides that the first detecting means is a contact-type sensor and the first to-be-detected portions are convex portions or concave portions which are detected by the contact-type sensor while the second
25 detecting means is a non-contact type sensor and the second to-be-detected portions are marks which are detected by the non-contact type sensor.

An eighth aspect of the present invention is a wire-reel identifying method used in a reinforcing bar binder including a storing chamber which is provided in a binder main body and mounts a wire reel around which a reinforcing-bar binding wire
 5 is wound to wind said wire around a reinforcing bar and then to twist said wire for binding of said reinforcing bar while rotating said wire reel to feed said wire, wherein the amount of rotation of the wire reel is detected and the number of to-be detected portions provided on the wire reel is detected during
 10 the detected amount of rotation of the wire reel for identifying the type of the wire reel.

A ninth aspect of the present invention provides that the amount of feeding of the wire or the twisting torque on the wire is adjusted in accordance with the identified type of the wire
 15 reel.

A tenth aspect of the present invention provides a wire-reel identifying method used in a reinforcing bar binder including a storing chamber which is provided in a binder main body and mounts a wire reel around which a reinforcing-bar binding
 20 wire is wound to wind said wire around a reinforcing bar and then to twist said wire for binding of said reinforcing bar while rotating said wire reel to feed said wire, wherein first to-be-detected portions provided on the reel main body are detected by a first detecting means for detecting the amount
 25 of rotation of the wire reel; and the number of second to-be detected portions provided on the wire reel is detected by a second detecting means during the detected amount of rotation of the wire reel for identifying the type of the wire reel.

An eleventh aspect of the present invention provides that
 30 the first detecting means is a contact-type sensor and the first

07 Aug 2006

2004312245

to-be-detected portions are convex portions or concave portions which are detected by the contact-type sensor while the second detecting means is a non-contact type sensor and the second to-be-detected portions are marks which are detected by the
5 non-contact type sensor.

BRIEF DESCRIPTION OF THE DRAWINGS

A preferred embodiment of the invention will now be described, by way of example only, with reference to the accompanying
10 drawings in which:

Fig. 1 is a general view illustrating the general outline of a reinforcing bar binder according to the present invention.

Fig. 2 is a perspective view of the reinforcing bar binder wherein the cover is removed.

15 Fig. 3 is a top view of the reinforcing bar binder wherein the cover is removed.

Fig. 4 is a top cross-sectional view of the reinforcing bar binder wherein the cover is removed.

20 Fig. 5 is a right side view of the reinforcing bar binder wherein the cover is removed.

Fig. 6 is a back side cross-sectional view of the reinforcing bar binder wherein the cover is mounted.

Fig. 7 is a perspective view of the reinforcing bar binder wherein the wire reel of Fig. 2 is removed.

25 Fig. 8 is a top view of the reinforcing bar binder wherein the wire reel of Fig. 3 is removed.

Fig. 9 is a top cross-sectional view of the reinforcing bar binder wherein the wire reel of Fig. 4 is removed.

30 Fig. 10 is an explanation view illustrating the state where the cover is mounted.

Fig. 11 is a right side view of the reinforcing bar binder wherein the wire reel of Fig. 5 is removed.

Fig. 12 is a back side cross-sectional view of the reinforcing bar binder wherein the wire reel of Fig. 6 is removed.

Fig. 13 is a left side view of the reinforcing bar binder.

Fig. 14 is a left side cross-sectional view of the reinforcing
5 bar binder.

Fig. 15 is a perspective view of the wire reel.

Fig. 16 is an explanation view of the wire reel, wherein
(a) is a front view of the wire reel, (b) is a cross-sectional
view taken along A-A of (a) and (c) is a cross-sectional view
10 taken along B-B of (a).

Fig. 17 is an explanation view of the wire reel, wherein
(a) is a back view of the wire reel, (b) is a side view and (c)
is a cross-sectional view taken along C-C of (b).

Fig. 18 is an explanation view of the state where the wire
15 reel is mounted.

Fig. 19 is a flow chart illustrating the operation of the
reinforcing bar binder.


BEST MODE FOR CARRYING OUT THE INVENTION

20 A reinforcing bar binder 1 includes a storing chamber 70
which is provided in a binder main body 2 and mounts a wire reel
30 around which a reinforcing-bar binding wire 8 is wound, as
illustrated in Fig. 1 and Fig. 2. The reinforcing bar binder
1 feeds the wire 8 while rotating the wire reel 30, winds the
25 wire 8 around a reinforcing bar 3 and then twists it to bind
the reinforcing bar 3. In the storing chamber 70, there are
provided a first detecting means 80 for detecting the amount
of rotation of the aforementioned wire reel 30 and a second
detecting means 25 for detecting the number of second
30 to-be-detected portions 53 on the wire reel 30 during the amount
of rotation detected by the first detecting means 80. In the
binder main body 2, there is provided a control means for
controlling the amount of feeding of the wire 8 or the twisting

2004312245 07 Aug 2006

torque on the wire 8, on the basis of the number of the second to-be-detected portions 53 detected by the second detecting means 25.

The first detecting means 80 detects the amount of rotation
5 of the wire reel 30 by detecting first to-be-detected portions 65 on the wire reel 30, as illustrated in Fig. 18. The first detecting means 80 may be a contact-type sensor and the first to-be-detected portions 65 may be convex portions or concave

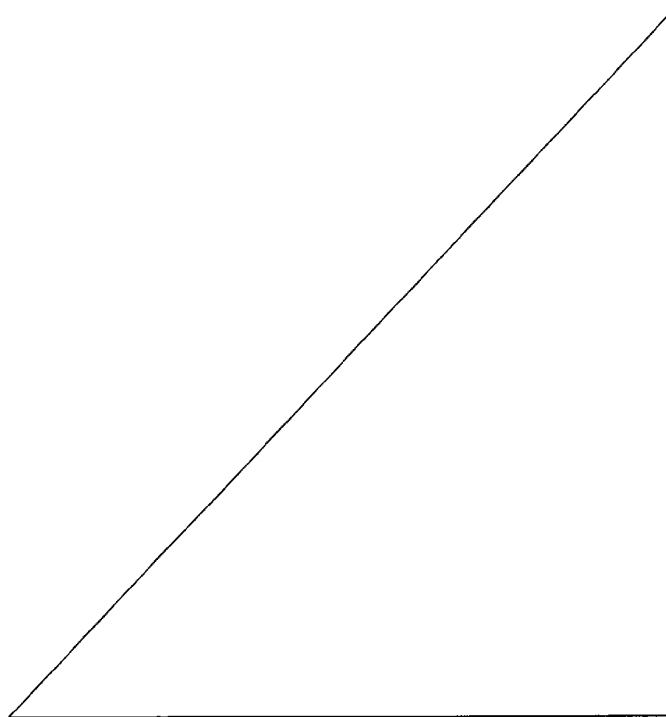

portions which can be detected by the contact-type sensor 80 while the second detecting means 25 may be a non-contact type sensor and the second to-be-detected portions 53 may be marks which can be detected by the non-contact type sensor 25.

The wire reel 30 is used in the reinforcing bar binder 1 in which the wire reel 30 around which the reinforcing-bar binding wire 8 is wound is mounted in a storing chamber 70 provided in the binder main body 2, the aforementioned wire 8 is wound around the reinforcing bar 3 and then twisted to bind the reinforcing bar 3, as illustrated in Fig. 2. The reel main body 30a is provided with the first to-be-detected portions 65 which are detected by the first detecting means 80 of the reinforcing bar binder 1 and the second to-be-detected portions 53 which are detected by the second detecting means 25 of the reinforcing bar binder 1.

The first to-be-detected portions 65 are detected by the first detecting means 80 so that the amount of rotation of the wire reel 30 is detected while the second to-be-detected portions 53 are detected by the second detecting means 25 so that the type of the wire reel 30 is identified. The first detecting means 80 may be a contact-type sensor and the first to-be-detected portions 65 may be convex portions or concave portions which can be detected by the contact-type sensor 80 while the second detecting means 25 may be a non-contact type sensor and the second to-be-detected portions 53 may be marks which can be detected by the non-contact type sensor 25.

The method for identifying the wire reel 30 is used in

the reinforcing bar binder 1 in which the wire reel 30 around which the reinforcing-bar binding wire 8 is wound is mounted in the storing chamber 70 provided in the binder main body 2, the wire 8 is fed while the aforementioned wire reel 30 is rotated, the wire 8 is wound around the reinforcing bar 3 and then twisted to bind the reinforcing bar 3, as illustrated in Fig. 7. The first to-be-detected portions 65 provided on the reel main body 30a are detected by the first detecting means 80 so that the amount of rotation of the wire reel 30 is detected while the number of the second to-be-detected portions 53 provided on the reel main body 30a is detected by the second detecting means 25 during the detected amount of rotation of the wire reel 30 so that the type of the wire reel 30 is identified.

The method for identifying the wire reel 30 enables adjusting the amount of feeding of the wire 8 or the twisting torque on the wire 8, on the basis of the identified type of the wire reel 30. The first detecting means 80 may be a contact-type sensor and the first to-be-detected portions 65 may be convex portions or concave portions which can be detected by the contact-type sensor 80 while the second detecting means 25 may be a non-contact type sensor and the second to-be-detected portions 53 may be marks which can be detected by the non-contact type sensor 25.

The reinforcing bar binder 1 will be described in detail. The reinforcing bar binder 1 includes a pair of abutting plate portions 5 which abut against the reinforcing bar 3 at the lower portion of the front end portion of the binder main body 2 which

faces the reinforcing bar 3 and further includes a twisting hook 7 having a wire-inserting groove 6 at the tip end portion thereof between the pair of abutting plate portions 5. The twisting hook 7 can be rotated by an electric motor 9. The twisting hook 7 stays at a position spaced apart from the wire 8 with the wire inserting groove 6 faced in parallel with the loop-shaped wire 8 during standby prior to the start of the rotation of the electric motor 9, in order to facilitate the insertion of the wire 8 curved in a loop shape into the wire-inserting groove 6.

The twisting hook 7 is held on the electric motor 9 through a forward/backward moving mechanism 10. The forward/backward moving mechanism 10 is constituted by a cam mechanism, for example. The forward/backward moving mechanism 10 inserts the wire 8 into the wire inserting groove 6 of the twisting hook 7 at the start of the rotation of the electric motor 9 and pulls back the twisting hook 7 to the standby position when the rotation of the electric motor 9 is stopped. Namely, when a trigger 11 is pulled to start the rotation of the electric motor 9, the twisting hook 7 extends towards the wire 8 to insert the wire 8 into the wire-inserting groove 6, rotates by a predetermined amount, and then stops to return to the original standby position.

The binder main body 2 includes a wire path 12 for passing the wire 8 therethrough. The wire path 12 extends from the rear end portion of the binder main body 2 up to a guide portion 15 which bends the wire so as to be easily wound. The guide portion 15 is curved in an arc shape and the wire path 12 forms a groove opened at the arc inner portion at the guide portion 15. A gear

17 mounted on the output shaft of a motor 16 is provided on the wire path 12 at the middle position of the binder main body 2. The gear 17 is exposed at an opening portion (not shown) which is provided in the wire path 12 and the gear 17 presses the wire 8 against the bottom portion of the wire path 12. The motor 16 and the gear 17 constitute the feeding device for the wire 8 and the wire 8 is fed forward through the normal rotation of the motor 16.

When a micro switch 20 is turned on through the trigger 11, the motor 16 is caused to rotate, thus rotating the wire feeding gear 17. Through the rotation of the wire feeding gear 17, the wire 8 wound around the wire reel 30 which is housed within the storing chamber 70 is fed to the forward portion of the binder main body 2 through the wire path 12 in the guide portion 15. Further, the normal and reverse rotation of the motor 16 may be controlled by a control circuit (not shown) incorporated in the binder main body 2 such that, for example, the wire 8 is wound around the reinforcing bar 3 in a loop shape and thereafter the wire 8 is pulled on the wire reel 30 towards the storing chamber 70 to reduce the looseness in the wire 8.

At the portion of the wire path 12 which reaches the guide portion 15, there is provided a wire gripping/cutting means 21. The wire gripping/cutting means 21 is constituted by, for example, a pair of gripping portions and a pair of cutting blades such that the wire 8 passes between the pair of gripping portions and between the pair of cutting blades. The wire gripping/cutting means 21 causes the pair of cutting blades to

contact and intersect with each other to cut the wire 8 when the feeding amount of the wire 8 reaches a predetermined amount, on the basis of the amount of the rotation of the motor 16. Thereafter, the end portion of the wire 8 is gripped by the pair of gripping portions, and the wire 8 wound around the reinforcing bar 3 in a loop shape is twisted by the twisting hook 7 with the rear end portion of the loop gripped by the pair of gripping portion to bind the reinforcing bar 3.

At the rear portion of the binder main body 2, there is formed the storing chamber 70 for housing the wire reel 30 around which the wire 8 is wound. Prior to description of the storing chamber 70, the wire reel 30 will be described on the basis of Figs. 15 to 17. The wire reel 30 is made of a plastic such as an ABS resin, polyethylene or polypropylene which has excellent resistance to wear and bending, and made of a black plastic in order to prevent the entry of external disturbing light into a hub portion 31. The wire reel 30 is constituted by the hub portion 31 for winding the wire 8 therearound and disk-shaped flanges 32 and 33 provided at the opposite sides of the hub portion 31. The hub portion 31 is formed to have a cylindrical shape and is formed integrally with the pair of flanges 32, 33. Engaging pawls 34 are formed around the outer periphery of one flange 32.

The hub portion 31 includes an inner cylinder 40, which is substantially coaxial with the hub portion 31, at the center portion thereof and a mounting hole 45 for inserting a reel mounting shaft 23 of the reinforcing bar binder 1 thereinto inside

the inner cylinder 40. The inner cylinder 40 is formed to be shorter than the hub portion 31 and one end 41 thereof is positioned near the flange 32 while the other end 42 is formed to be slightly beyond the substantial middle position of the hub portion 31. The other end 42 is coupled to the hub portion 31 through a side wall 46. The side surface 43 of the side wall 46 closer to the flange 33 and the inner surface 47 of the hub 31 define a round concave portion 49.

On the side surface 43 of the side wall 46 closer to the flange 33, there are provided a pair of fixation shafts 50, 50 protruding opposite to each other. The tip ends 51 of the fixation shafts 50 are extended to the vicinity of the flange 33 and are provided with a fitting hole 52. The marks 53 are fitted within the fitting holes 52. The marks 53 are made of a white plastic in order to increase the amount of light which is reflected and received, and are constituted by a fitting shaft 55 to be fitted in the fitting hole 52 and a reflection plate 56 formed at the tip end of the fitting shaft 55. A gently-curved concave portion 57 is formed on the surface of each of the reflection plates 56. The pair of fixation shafts 50, 50 are housed within the concave portions 49.

A ring-shaped boss portion 58 is formed on the flange 33 to surround the round concave portion 49. The boss portion 58 includes a tapered surface 60 at the outer peripheral edge 59 thereof and a stepped concave portion 62 at the inner peripheral edge 61 thereof. The stepped concave portion 62 has a depth which substantially reaches the tip ends of the aforementioned

fixation shafts 50, 50. Further, a pair of protrusions 65, 65 are formed opposite to each other on the outer peripheral edge 59 of the boss portion 58. The protrusions 65, 65 are formed to have a trapezoid shape and include inclined edges 66, 66 at their opposite sides.

While the protrusions 65, 65 are placed at substantially the same angles as the aforementioned fixation shafts 50, 50, the positional relationship between the protrusions 65, 65 and the fixation shafts 50, 50 is not limited thereto. Further, while the two fixation shafts 50, 50 are employed in the present embodiment, the number of the fixation shafts is not limited thereto and may be one, or three or more. Further, a boss portion 67 similar to that on the flange 33 is also provided on the flange 32 such that it is opposite to the aforementioned boss portion 58.

Further, a cylindrical hole 68 which enables the detection of the rotational position of the wire reel 30 is formed through the side wall 46. A light emitting device and a light receiving device may be placed within the region of the rotation of the hole 68 in the reinforcing bar binder 1 such that the hole 68 passes between the both devices to enable the determination of the condition of the rotation of the wire reel 30. There are formed substantially sector-shaped patterns, which are strengthening ribs of the thinned flanges 32, 33, around the outer peripheral edges of the flanges 32, 33.

In the flange 32, a wire-inserting opening portion 35 is formed to extend from the outer peripheral edge to the hub portion

31. The winding termination end of the wire 8 is engaged and held within the wire-inserting opening portion 35. A wire-inserting hole 36 is formed through the hub portion 31 and the inner cylinder 40. The winding starting end of the wire 8 is inserted and held within the wire-inserting hole 36. When winding the wire 8, the winding starting end of the wire 8 is inserted into the wire-inserting hole 36 and is wound within the inner cylinder 40 to prevent the winding starting end from pulling out of the wire-inserting hole 36 and, in this state, the winding of the wire around the peripheral surface of the hub 31 is started. Further, in the event that the wire 8 is subjected to a large force in the direction of winding, the tensile force can be received at the edge portion of the wire-inserting opening portion 35.

The storing chamber 70 of the reinforcing bar binder 2 can be covered with a cover member 22 which is secured to one side thereof through hinge coupling, as illustrated in Fig. 10. The cover member 22 is provided with a reel mounting shaft 23 which is freely projected and recessed and is fitted in the mounting hole 45 in the wire reel 30. The cover member 22 is provided with a reel stopper 24 which locks the reel mounting shaft 23 with the reel mounting shaft 23 protruded (set) into the storing chamber 70. The storing chamber 70 is constituted by a front wall 72, a bottom wall 73 and a side wall 75, as illustrated in Fig. 7. On the side wall 75, there is formed a round-shaped protruding portion 76 which is fitted in the step concave portion 62 of the wire reel 30. A non-contact type sensor

(optical sensor, interrupter) 25 is provided in the protruding portion 76. When the protruding portion 76 is fitted in the step concave portion 62, as illustrated in Fig. 18, the entry of light into the concave portion 49 is prevented and also the entry of external disturbing light into the interrupter 25 is avoided. The optical sensor 25 is constituted by a light emitting device and a light receiving device, and the marks 53 to be detected by the optical sensor 25 include a curved concave portion 57 at their upper ends so that light emitted from the light emitting device is concentrated to the light receiving device, which enables certain detection of the marks 53.

A sensor placing hole 77 is formed in the protruding portion 76 and the reflection-type interrupter 25 which is the aforementioned non-contact type sensor is installed as an optical sensor within the sensor placing hole 77. The optical sensor 25 is connected to the aforementioned control circuit, which feeds electricity to the interrupter 25 and receives output signals from the interrupter 25. The control circuit detects the marks 53 on the wire reel 30 from output signals from the interrupter 25. The control circuit detects the number of the marks 53 by detecting the change in the output voltage from the interrupter 25.

The contact sensor (first detecting means) 80 is provided on the side wall 75 of the storing chamber 70 above the protruding portion 76. The contact sensor 80 is a mechanical switch and is constituted by a swayable member 82 which is swayably provided on a supporting shaft 81, a contact piece 83 provided at the

tip end of the swayable member 82, an elastic member 85 which biases the contact piece 83 towards the wire reel 30, a magnet portion 86 provided at the other end of the swayable member 82 and a Hall IC 87 with which the magnet portion 86 is brought into contact by the elastic member 85.

The switch which is the contact sensor (first detecting means) 80 is provided within the binder main body 2, and the contact piece 83 is protruded from an opening portion 78 formed in the side wall 75. The protrusions (first to-be-detected portions) 65 on the reel main body 30a come into contact with the contact piece 83. In the switch which is the contact sensor (first detecting means) 80, when the protrusions (first to-be-detected portions) 65 on the reel main body 30a come into contact with the contact piece 83, the swayable member 82 is swayed against the elasticity of the elastic member 85, thereby separating the magnet portion 86 from the Hall IC 87.

The contact sensor (first detecting means) 80 is connected to the aforementioned control circuit so that electrical signals caused by the voltage change in the Hall IC 87 are sent to the control circuit. The control circuit detects the rotation of the wire reel 30 from electrical signals from the contact sensor (first detecting means) 80. When the control circuit does not detect a change in the voltage from the contact sensor (first detecting means) 80 within a predetermined time period, the control circuit determines that the wire reel 30 is not rotated and causes light emission from an LED or the like provided on the side surface of the reinforcing bar binder 1 or warning-sound

generation to inform the operator of the termination of the wire 8 on the wire reel 30.

Also, when the wire reel 30 is not normally set, such as when the setting of the reel mounting shaft 23 or the reel stopper 24 in Fig. 10 is forgotten, there is the possibility of disengagement of the wire reel 30 from the protruding portion 76 during rotation. Further, there is the possibility of falling or fling of the wire reel 30 from the storing chamber 70 depending on the orientation of the reinforcing bar binder main body 2. In this case, the contact piece 83 of the contact sensor (first detecting means) 80 can detect the disengagement of the wire reel 30 from the protruding portion 76, thus enabling informing the operator of the abnormal rotation of the wire reel 30 through light emission from an LED or the like or warning-sound generation.

Further, on the front wall 72, there is provided an elastic piece 89 which engages with the aforementioned engaging pawls 34 on the wire reel 30 to stop the rotation of the wire reel 30. The elastic piece 89 does not work during the feeding of the wire. At the completion of the feeding of wire, the elastic piece 89 acts to apply a brake to the wire reel 30 due to the activation of the electric motor 9. An opening 90 for drawing out the wire 8 is formed through the front wall 72 at the upper portion thereof. The opening 90 is communicated with the wire path 30.

In the reinforcing bar binder 1 having the aforementioned structure, the wire reel 30 is housed and mounted within the

storing chamber 70 (step 101). The step concave portion 62 of the wire reel 30 is fitted with the protruding portion 76 formed on the sidewall 75 of the storing chamber 70, and the reel mounting shaft 23 provided on the cover member 22 is protruded into the storing chamber 70 to insert the reel mounting shaft 23 into the mounting hole 45 of the reel main body 30a. At this state, the reel mounting shaft 23 is locked by the reel stopper 24. The wire 8 around the wire reel 30 is drawn out and the drawn tip end portion is fed to the wire path 30 through the opening 90 of the front wall 72 and placed on the gear 17 of the feeding device.

Since the protruding portion 76 is fitted in the step concave portion 62 of the wire reel 30, the concave portion 49 of the inner cylinder 40 is shielded from light, thus preventing the entry of external disturbing light into the interrupter (the second detecting means, the non-contact sensor) 25 within the concave portion 49. The marks (second to-be-detected portions) 53 provided on the fixation shafts 50 in the wire reel 30 rotate near the interrupter (second detecting means) 25 in the protruding portion 76 with a predetermined interval left therebetween and reflect light from the interrupter (second detecting means) 25.

After mounting the wire reel 30 in the reinforcing bar binder 1 as described above (step 101), when a main switch which is not shown is turned on (step 102), the control circuit is initialized (step 103) and the motor 16 of the feeding device is caused to rotate, thus causing the rotation of the wire feeding

gear 17 so that the tip end of the wire 8 wound around the wire reel 30 which is housed within the storing chamber 70 is fed to a predetermined position. When the micro switch 20 is turned on through the trigger 11 (step 104), the motor 16 is caused to rotate, thus causing the rotation of the wire feeding gear 17 to start measurement of the amount of feeding of the wire 8 (step 105). Through the rotation of the wire feeding gear 17, the wire 8 wound around the wire reel 30 housed within the storing chamber 70 is fed to the forward portion of the binder main body 2 through the wire path 12 in the guide portion 15. Further, the control of the rotation of the motor 16 is performed by a control circuit (not shown) which is incorporated in the binder main body 2.

While the wire 8 is fed forward, the wire reel 30 is rotated, thus bringing the protrusions (first to-be-detected portions) 65 on the reel main body 30a into contact with the contact piece 83 of the contact sensor (first detecting means) 80. When the protrusions (the first to-be-detected portions) 65 on the reel main body 30a come into contact with the contact piece 83, the swayable member 82 sways against the elasticity of the elastic member 85 to separate the magnetic portion 86 from the Hall IC 87, and consequently, pulse signals are caused by the voltage change and sent to the control circuit. The control circuit starts counting the pulses to detect the protrusions (first to-be-detected portions) 65 (step 106). The control circuit performs the detection of the protrusions (first to-be-detected portions) 65 for a set time period (step 107) and, when they

are not detected, namely when no pulse signal is sent within the set time period, the control circuit determines that the wire reel 30 is not rotated and causes light emission from the LED or the like provided on the side surface of the reinforcing bar binder 1 or warning-sound generation (step 108).

When the protrusions (the first to-be-detected portions) 65 are detected within the set time period, namely when pulse signals caused by the voltage change are sent to the control circuit, the control circuit recognizes that the wire reel 30 is rotated while the interrupter (second detecting means, non-contact sensor) 25 directs light thereto, detects reflected light from the marks (second to-be-detected portions) 53 provided on the fixation shafts 50 in the wire reel 30 (step 109) to detect the marks 53 and then sends detection signals to the control circuit. Thus, the control circuit counts the number of the marks 53 (step 110). After the first protrusion (first to-be-detected portion) 65 comes into contact with the contact piece 83 of the contact sensor 80, when the next protrusion (first to-be-detected portion) 65 comes into contact with the contact piece 83 of the contact sensor 80 and thus is detected (step 111), pulse signals are sent to the control circuit and then the detection is terminated (step 112). Further, the control circuit calculates the number of the marks (second to-be-detected portions) 53 which have been detected by the interrupter (second detecting means, non-contact sensor) 25 to identify the wire reel 30 (step 113).

Since the protrusions (first to-be-detected portions) 65

are provided on the reel main body 30a such that they are opposed to each other as previously described, the amount of rotation is 1/2 turn (180 degrees) and the type of the wire reel 30 is identified from the number of the marks 53 during the amount of rotation. The control circuit sets the energization time period for the motor 16 of the feeding device and the electric power supplied to the electric motor 9. When the first detecting means 80 does not detect the next protrusion (first to-be-detected portion) 65 within a predetermined time period (step 115), the control circuit determines that the wire reel 30 is not rotated and causes light emission from the LED or the like provided on the side surface of the reinforcing bar binder 1 or warning-sound generation (step 116).

After the detection of the amount of rotation of the wire reel 30, when no mark 53 has been detected during the amount of rotation (step 117) or when the number of marks 53 which have been detected during the amount of rotation is equal to or more than a predetermined value, for example, three (step 118), the control circuit causes light emission from the LED or the like provided on the side surface of the reinforcing bar binder 1 or warning-sound generation (step 119, step 120). The control circuit identifies the type of the wire reel 30 on the basis of the number of the detected marks 53 and sets the amount of feeding of the wire 8 depending on the number of rotations (the angle of rotation) of the wire feeding gear 17 and the twisting torque depending on the electric power supplied to the electric motor 9. For example, when the number of detected mark 53 is

one (step 121), the control circuit sets an amount A of feeding of the wire 8 and a twisting torque A on the wire 8 (step 122). Further, when the number of detected marks 53 is two (step 123), the control circuit sets an amount B of feeding of the wire 8 and a twisting torque B on the wire 8 (step 124).

The aforementioned detection is rapidly performed and the wire 8 is fed forward along the guide portion 15 without causing interruption of the wire 8. After the identification of the type of the wire reel 30, the marks 53 or the protrusions 65 serve as a reel rotation detecting means and the marks 53 or the protrusions 65 start the detection of rotation of the wire reel 30 (step 125). The elapsed time T1 since a mark 53 or a protrusion 65 was detected last until the next mark 53 or protrusion 65 is detected is longer than an error determination time period T2 (a set time period) (step 126), the control circuit determines that the wire reel 30 is not rotated and causes light emission from the LED or the like provided on the side surface of the reinforcing bar binder 1 or warning-sound generation (step 127).

When the aforementioned T1 is shorter than T2 (step 126), the wire 8 is fed by the amount set depending on the type of the wire reel 30 and wound around the reinforcing bar 3 in a loop shape. When the amount of wire which has been fed does not reach the set amount of feeding A or B (step 128), the process returns to the step 126. When the amount of the wire 8 which has been fed reaches the set amount of feeding A or B (step 128), the feeding of the wire is terminated (step 129) and the wire

is cut. Thereafter, the wire is twisted by the twisting torque A or B of the electric motor 9 which has been set depending on the type of the wire reel 30 and thus the reinforcing bar 3 is bound (step 130). Consequently, the reinforcing bar binder 1 can automatically adjust the amount of feeding of the wire 8 or the twisting torque thereon in accordance with the thickness, characteristics and the like of the wire 8.

While in the aforementioned embodiment the two marks 53 (second to-be-detected portions) 53 are provided on the wire reel 30, it is obvious that a single, three or more marks may be provided thereon. Further, while the marks 53 are made of a white plastic, they may be reflective stickers. While the two protrusions (first to-be-detected portions) 65 are provided on the wire reel 30, it is obvious that a single, three or more protrusions may be provided thereon.

For example, in the event that the wire reel 30 is not normally set within the storing chamber 70 in the aforementioned reinforcing bar binder 1, when the first detecting means 80 is a non-contact type sensor such as an optical sensor, the first detecting means 80 may response to light other than the reflected light from the first to-be-detected portions of the wire reel 30 and to external disturbing light, and may detect it as normal rotation. However, the reinforcing bar binder 1 which has been described in the aforementioned embodiment employs a contact-type sensor as the first detecting means 80 and, therefore, even when the wire reel 30 is not normally set within the storing chamber 70, it will not detect the wire reel 30,

thus enabling detection of the abnormal state.

Further, while the non-contact type sensor (optical sensor, interrupter) 25 for detecting the marks (second to-be-detected portions) 53 on the wire reel 30 is provided as the second detecting means within the storing chamber 70 of the binder main body 2, the second to-be-detected portions may be concave portions or convex portions instead of marks and the second detecting means may be contact sensors (switches) so that the type of the wire reel can be identified by the two contact sensors. Further, while the contact sensor (switch) 80 for detecting the protrusions (first to-be-detected portions) 65 on the wire reel 30 is provided as the first detecting means within the storing chamber 70 of the reinforcing main body 2, the first to-be-detected portions may be marks instead of convex portions and concave portions, and the first detecting means may be a non-contact type sensor (optical sensor, interrupter) so that the type of the wire reel 30 may be identified by the two non-contact type sensors.

[Effects of the Invention]

With the reinforcing bar binder 1 according to the present invention, the amount of rotation of the wire reel is detected by the first detecting means and the number of the to-be-detected portions of the wire reel is detected by the second detecting means, thus providing the advantage that the type of the wire reel can be identified and the feeding amount of the wire wound around the wire reel or the twisting torque for the wire can

be controlled. More specifically, the detection of the amount of rotation of the wire reel is performed by detecting the first to-be-detected portions on the wire reel with the first detecting means and, when the first to-be-detected portions are convex portions or concave portions, a contact-type sensor may be employed as the first detecting means, thus providing the advantage that the first to-be-detected portions can be certainly detected.

The wire reel used in the reinforcing bar binder according to the present invention includes the first to-be-detected portions which are detected by the first detecting means of the reinforcing bar binder and the second to-be-detected portions which are detected by the second detecting means of the reinforcing bar binder, wherein there are provided the advantages that the amount of rotation thereof is detected by detecting the first to-be-detected portions with the first detecting means and the type of the wire reel is detected by detecting the second to-be-detected portions with the second detecting means. More specifically, the first to-be-detected portions may be convex portions or concave portions which are detected by the contact type sensor and the second to-be-detected portions may be marks which are detected by the non-contact type sensor, which provides the advantage that the type of the wire reel can be certainly identified. Further, there is provided the advantage that a user can identify the type of the wire reel only by looking the aspect of the second to-be-detected portions (for example, the number of marks) on the wire reel.

The method for identifying a wire reel used in the reinforcing bar binder according to the present invention detects the amount of rotation of the wire reel and detects the number of to-be-detected portions provided on the wire reel during the detected amount of rotation of the wire reel, thus providing the advantage that there is no need for the wire-reel rotation speed and the wire-reel operating time as the factors for identifying the wire reel. Consequently, even if the wire reel rotates at a significantly high or low speed, it is possible to identify the wire reel. Further, there is no need for detecting the number of the to-be-detected portions within a driving time period of the wire-reel, and therefore it is possible to perform certain identification. By identifying the type of the wire reel, it is possible to automatically adjust the amount of feeding of the wire or the twisting torque for the wire, thus providing the advantage that manual adjustments are unnecessary.

[DESCRIPTION OF REFERENCE NUMERALS]

1; reinforcing bar binder, 2; binder main body, 3; reinforcing bar, 5; abutting plate portions, 6; wire-inserting groove, 7; twisting hook, 8; wire, 9; electric motor, 10; forward/backward moving mechanism, 11; trigger, 12; wire path, 15; guide portion, 16; motor (feeding device), 17; gear (feeding device), 20; micro switch, 21; wire gripping/cutting means, 22; cover member, 23; reel mounting shaft, 24; reel stopper, 25; interrupter (second detecting means, non-contact sensor), 30; wire reel, 30a; reel main body, 31; hub portion, 32; flange,

33; flange, 34; engaging pawls, 35; wire-inserting opening, 36;
 wire-inserting hole, 40; inner cylinder, 41; one end, 42; other
 end, 43; side surface, 45; mounting hole, 46; side wall, 47;
 inner surface, 49; concave portion, 50; fixation shafts, 51;
 5 tip ends, 52; mounting holes, 53; marks (second to-be-detected
 portions), 55; mounting shaft, 56; reflection plate, 57; concave
 portion, 58; boss portion, 59; outer peripheral edge, 60; tapered
 surface, 61; inner peripheral edge, 62; step concave portion,
 65; protrusions (first to-be-detected portions), 66; inclined
 10 edge, 67; boss portion, 68; hole, 70; storing chamber, 72; front
 wall, 73; bottom wall, 75; side wall, 76; protruding portion,
 77; sensor placing hole, 78; opening, 80; switch (first detecting
 means, contact sensor), 81; supporting shaft, 82; swayable member,
 83; contact piece, 85; elastic member, 86; magnet portion, 87;
 15 Hall IC, 89; elastic piece, 90; opening

INDUSTRIAL APPLICABILITY

The present invention is applicable to a reinforcing bar
 binder and a wire reel used therewith.

20 Although the invention has been described with reference
 to specific examples it will be appreciated by those skilled
 in the art that the invention may be embodied in many other forms.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A reinforcing bar binder having a storing chamber provided
in a main body of the reinforcing bar binder for mounting a wire
reel around which a wire for binding a reinforcing-bar is wound,
5 the wire is twisted for binding a reinforcing bar after it is
wound around the reinforcing bar;

wherein said storing chamber is provided with a first
detecting means for detecting the amount of rotation of said
wire reel and a second detecting means for detecting the number
10 of second to-be-detected portions on said wire reel.

2. A reinforcing bar binder having a storing chamber provided
in a main body of the reinforcing bar binder for mounting a wire
reel around which a wire for binding a reinforcing-bar is wound,
the wire is fed by rotating the wire reel and twisted for binding
15 a reinforcing bar after it is wound around the reinforcing bar;

wherein said storing chamber is provided with a first
detecting means for detecting the amount of rotation of said
wire reel and a second detecting means for detecting the number
of second to-be-detected portions on the wire reel during the
20 amount of rotation detected by the first detecting means; and

the binder main body is provided with controlling means
for controlling the amount of feeding of the wire or the twisting
torque on the wire depending on the number of the second
to-be-detected portions detected by the second detecting means.

- 25 3. The reinforcing bar binder according to Claim 1 or Claim
2, wherein the first detecting means detects first to-be-detected
portions on the wire reel to detect the amount of rotation of

the reel main body is detected by a second detecting means during the detected amount of rotation of the wire reel to identify the type of the wire reel.

11. The wire reel identifying method according to Claim 10,
5 wherein the first detecting means is a contact-type sensor and the first to-be-detected portions are convex portions or concave portions which are detected by the contact-type sensor while the second detecting means is a non-contact type sensor and the second to-be-detected portions are marks which are detected by
10 the non-contact type sensor.

12. A reinforcing bar binder having a storing chamber provided in a main body of the reinforcing bar binder for mounting a wire reel around which a wire for binding a reinforcing-bar is wound, the wire is twisted for binding a reinforcing bar after it is
15 wound around the reinforcing bar, substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings and/or examples.

13. A wire reel used in a reinforcing bar binder having a storing
20 chamber provided in a main body of the reinforcing bar binder for mounting the wire reel around which a wire for binding a reinforcing-bar is wound, the wire is twisted for binding a reinforcing bar after it is wound around the reinforcing bar, substantially as herein described with reference to any one of
25 the embodiments of the invention illustrated in the accompanying drawings and/or examples.

14. A wire-reel identifying method used in a reinforcing bar

2004312245 07 Aug 2006

binder having a storing chamber provided in a main body of the reinforcing bar binder for mounting a wire reel around which a wire for binding a reinforcing-bar is wound, the wire is fed by rotating the wire reel and twisted for binding a reinforcing
5 bar after it is wound around the reinforcing bar, substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings and/or examples.

DATED this 7th day of August 2006

10 Shelston IP

Attorneys for: **Max Kabushiki Kaisha**

ENGLISH TRANSLATION OF FIG.19

Fig. 19

START

- 101) THE REEL IS MOUNTED
- 102) MAIN SWITCH IS TURNED ON
- 103) INITIALIZATION OPERATION
- 104) TRIGGER IS TURNED ON
- 105) THE FEEDING OF WIRE IS STARTED, MEASUREMENT OF THE AMOUNT OF FEEDING IS STARTED
- 106) DETECTION OF THE PROTRUSIONS IS STARTED
- 107) PROTRUSIONS ARE DETECTED WITHIN THE SET TIME PERIOD (A FIRST TIME)
- 108) ERROR (DETERMINATION AS AN ABNORMAL REEL ROTATION)
- 109) DETECTION OF THE MARKS IS STARTED
- 110) THE NUMBER OF THE MARKS IS COUNTED
- 111) THE PROTRUSIONS ARE DETECTED (A SECOND TIME)
- 112) THE DETECTION OF THE MARKS IS COMPLETED
- 113) THE REEL IS IDENTIFIED
- 115) WITHIN THE SET TIME PERIOD ?
- 116) ERROR (DETERMINATION AS AN ABNORMAL REEL ROTATION)
- 117) MARK 0
- 118) MARKS MORE THAN 3
- 119) ERROR
- 120) ERROR
- 121) MARK 1
- 122) AN AMOUNT A OF FEEDING AND TWISTING TORQUE A
- 123) MARKS 2

- 124) AN AMOUNT B OF FEEDING AND TWISTING TORQUE B
- 125) DETECTION OF THE ROTATION OF THE REEL IS STARTED THROUGH
THE MARKS AND THE PROTRUSIONS
- 127) ERROR (DETERMINATION AS AN ABNORMAL REEL ROTATION)
- 128) THE AMOUNT OF FEEDING $\geq$ THE SET AMOUNT OF FEEDING A OR B
- 129) THE FEEDING OF WIRE IS COMPLETED
- 130) TWISTING IS STARTED WITH THE TORQUE A OR B

FIG. 1

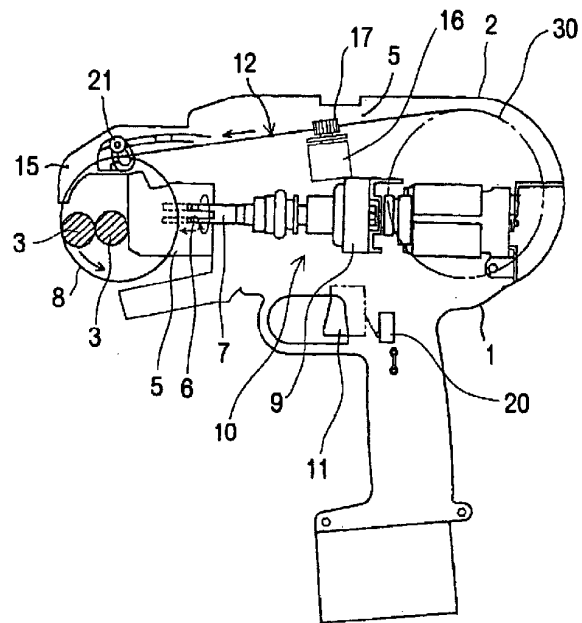


FIG. 2

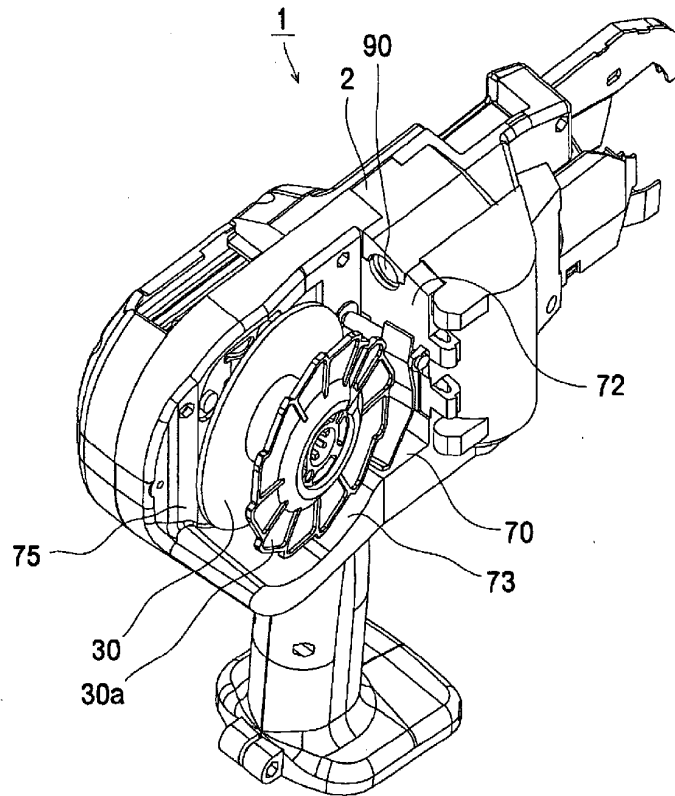


FIG. 3

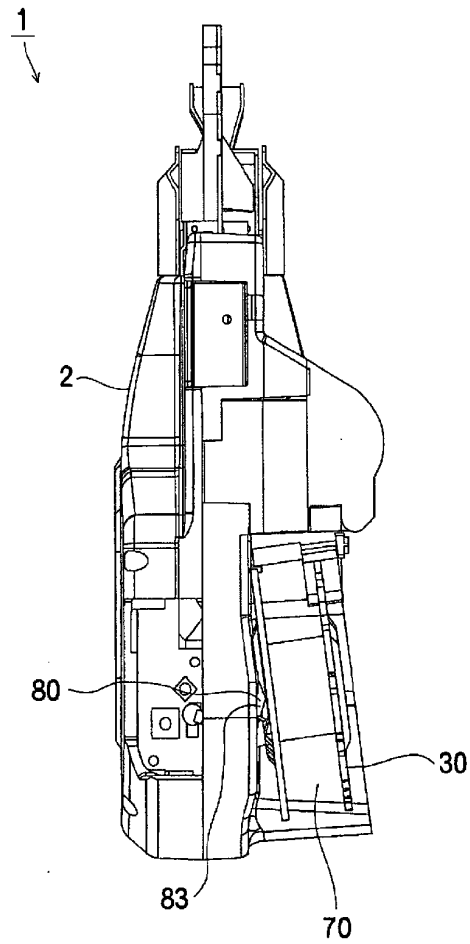


FIG. 4

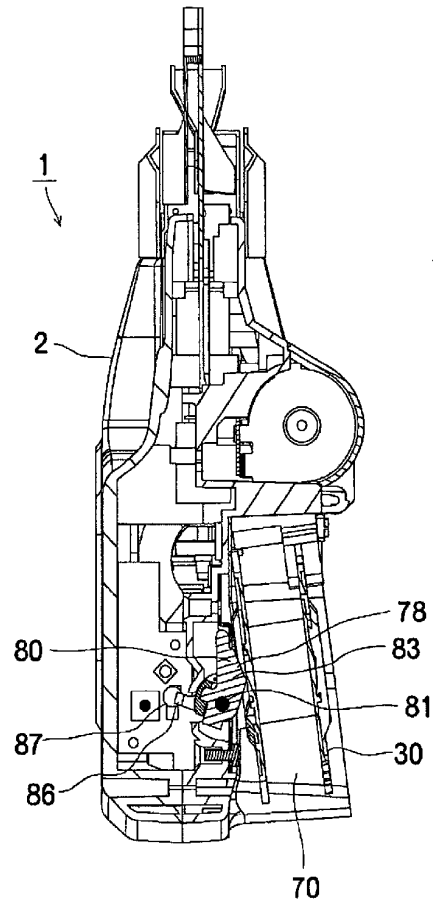


FIG. 5

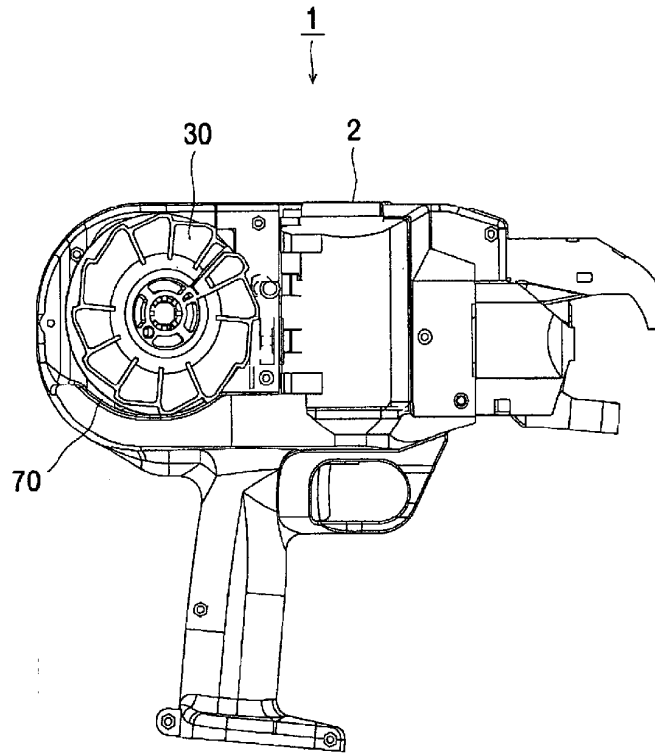


FIG. 6

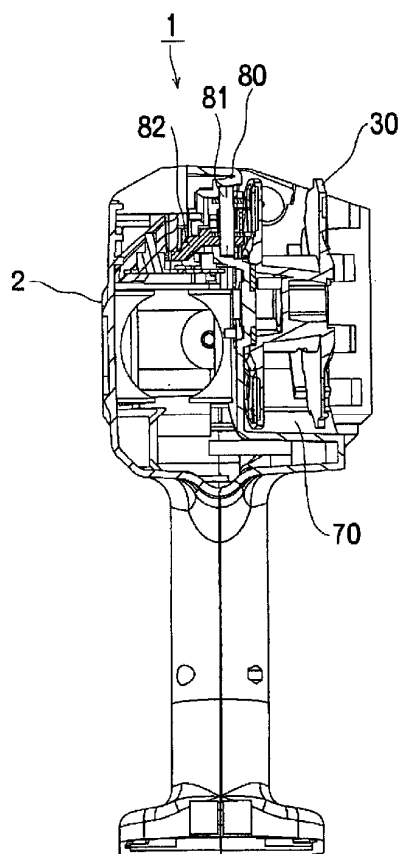


FIG. 7

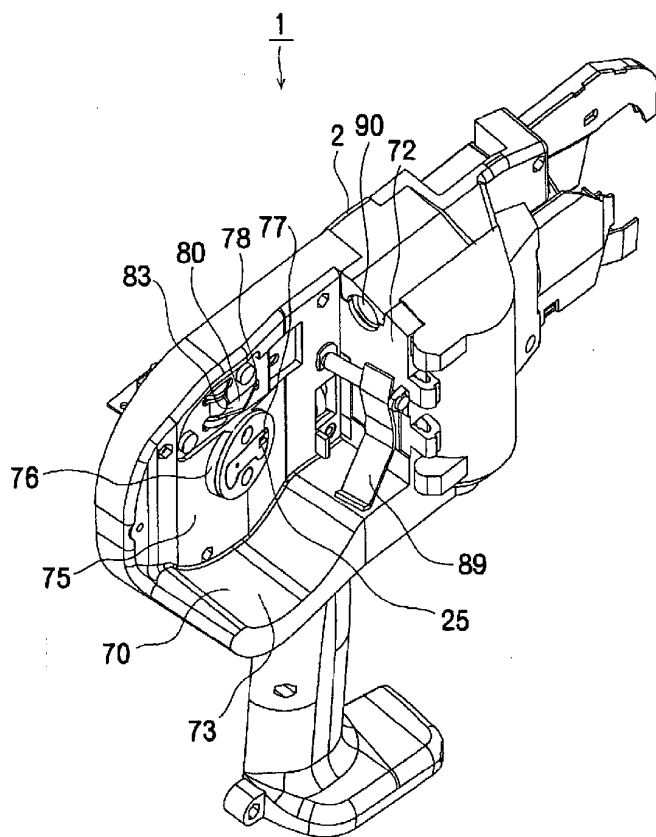


FIG. 8

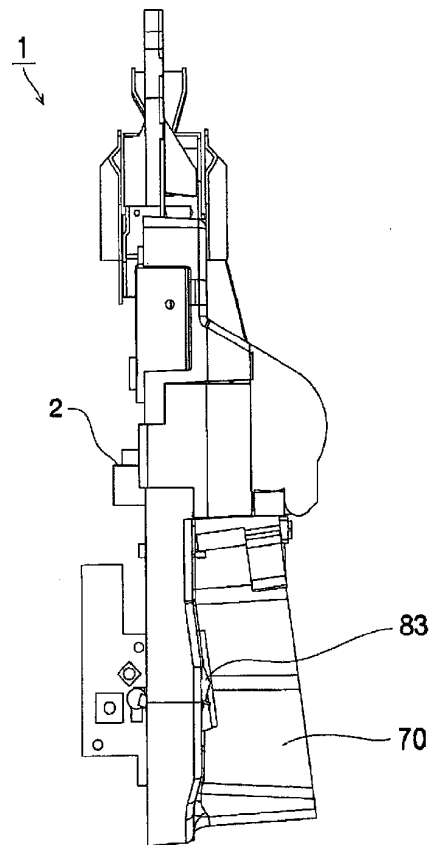


FIG. 9

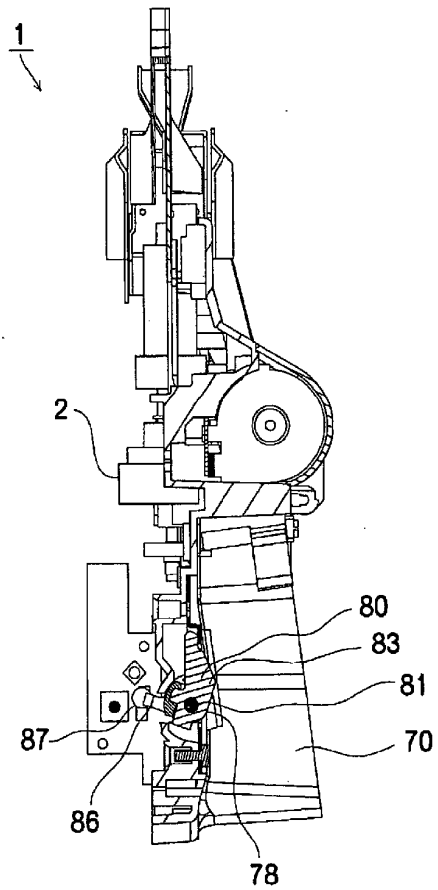


FIG. 10

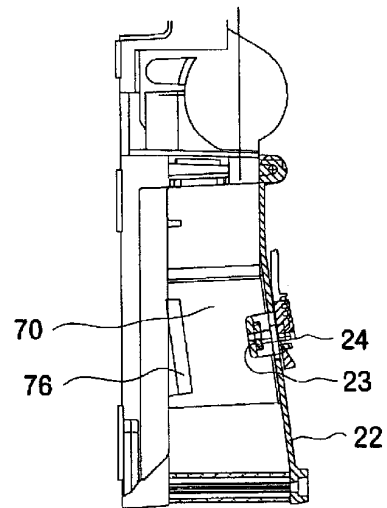


FIG. 11

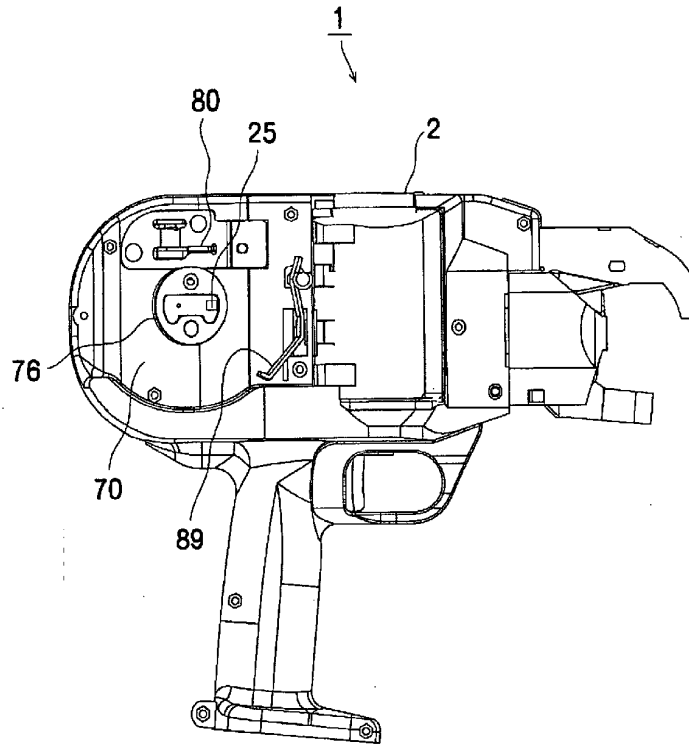


FIG. 12

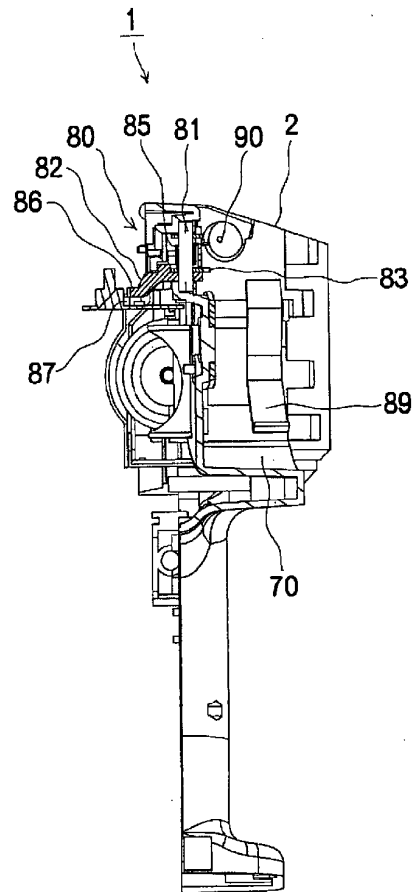


FIG. 13

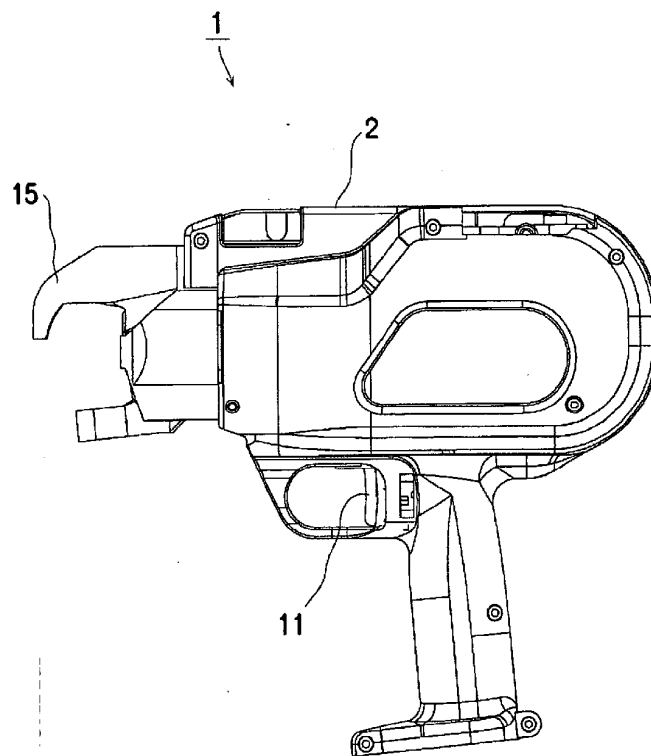


FIG. 14

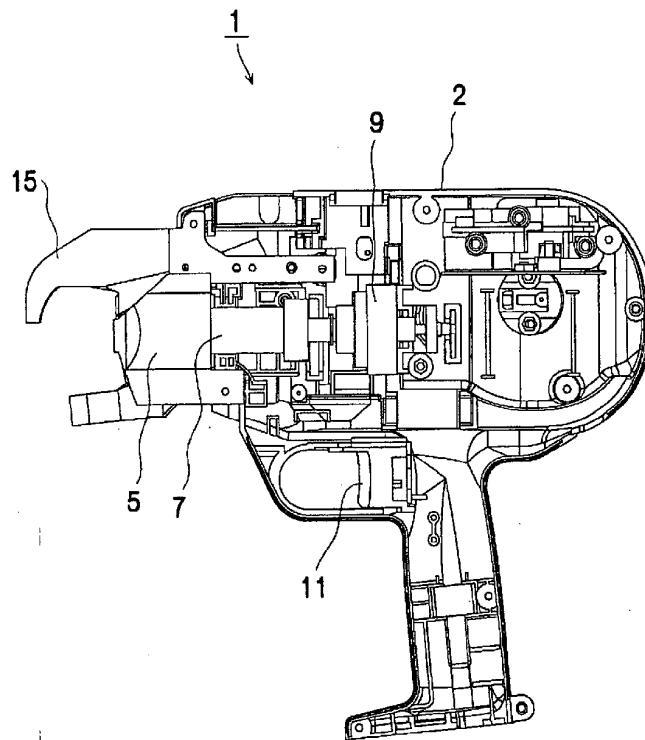


FIG. 15



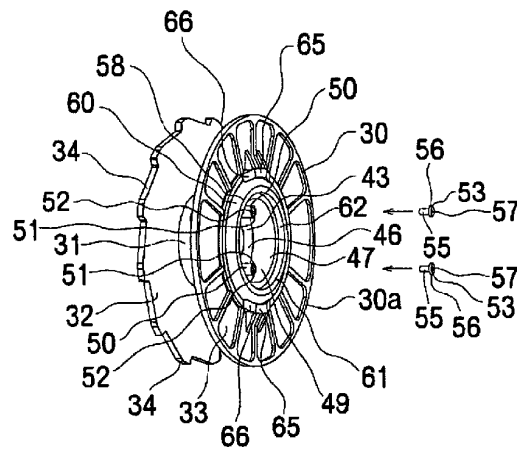


FIG. 16

(a)

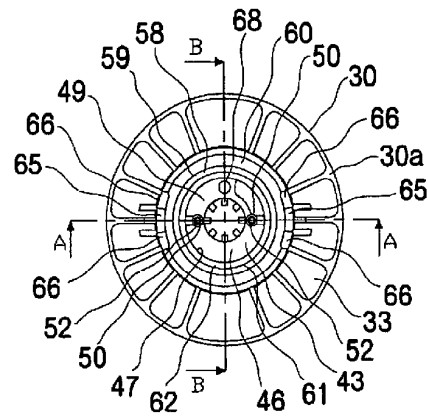

(b)

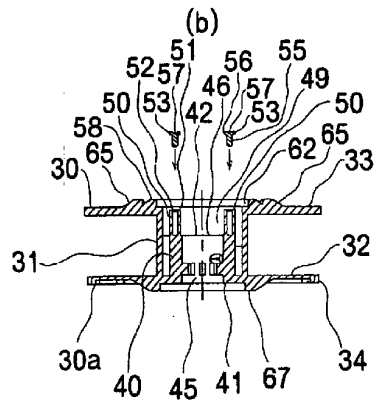

(c)




FIG. 17


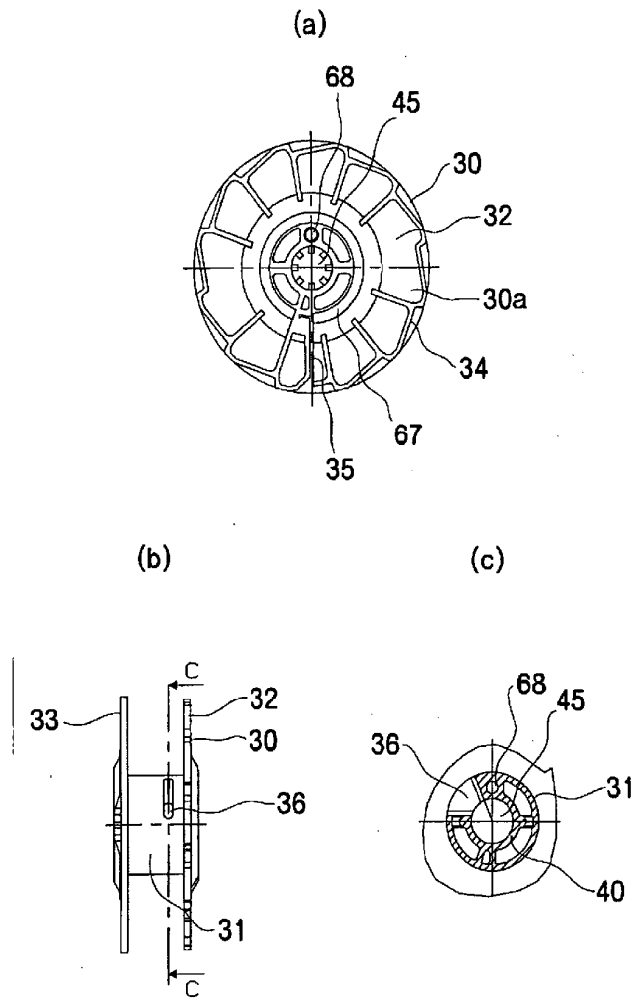


FIG. 18

(a)

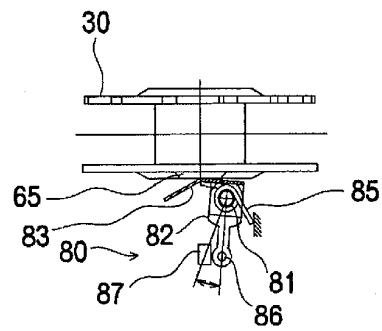

(c)

(b)

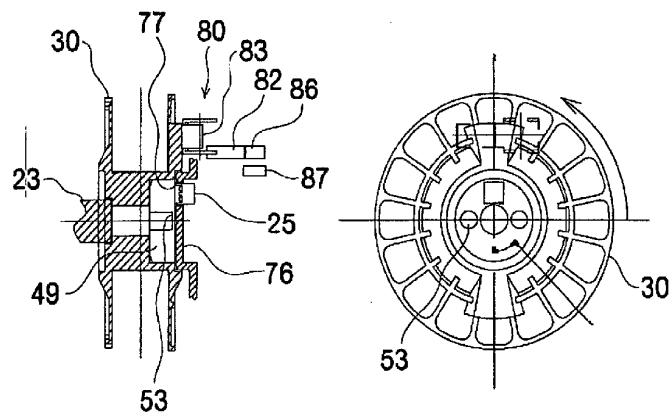


FIG. 19

