



US 20100038970A1

(19) **United States**

(12) **Patent Application Publication**  
**Cook et al.**

(10) **Pub. No.: US 2010/0038970 A1**

(43) **Pub. Date: Feb. 18, 2010**

(54) **SHORT RANGE EFFICIENT WIRELESS POWER TRANSFER**

(22) Filed: **Apr. 21, 2009**

(75) Inventors: **Nigel P. Cook**, El Cajon, CA (US);  
**Lukas Sieber**, Olten (CH);  
**Hanspeter Widmer**, Wohlenschwil (CH)

**Related U.S. Application Data**  
(60) Provisional application No. 61/046,757, filed on Apr. 21, 2008.


Correspondence Address:  
**Law Office of Scott C Harris Inc**  
**PO Box 1389**  
**Rancho Santa Fe, CA 92067 (US)**

**Publication Classification**  
(51) **Int. Cl. H02J 17/00** (2006.01)  
(52) **U.S. Cl. .... 307/104**

(73) Assignee: **NIGEL POWER, LLC**, San Diego, CA (US)

(57) **ABSTRACT**  
A device is powered wirelessly using magnetically coupled resonance, either from a short distance, e.g., on a surface, or from or on a longer distance.

(21) Appl. No.: **12/427,318**

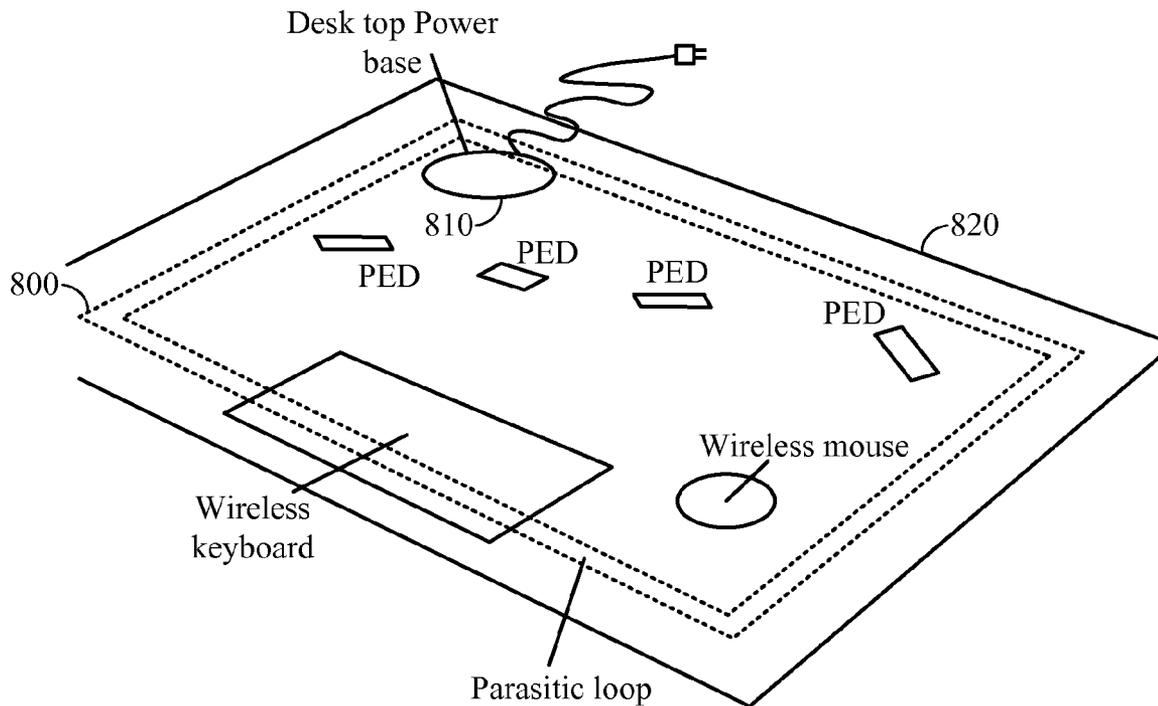

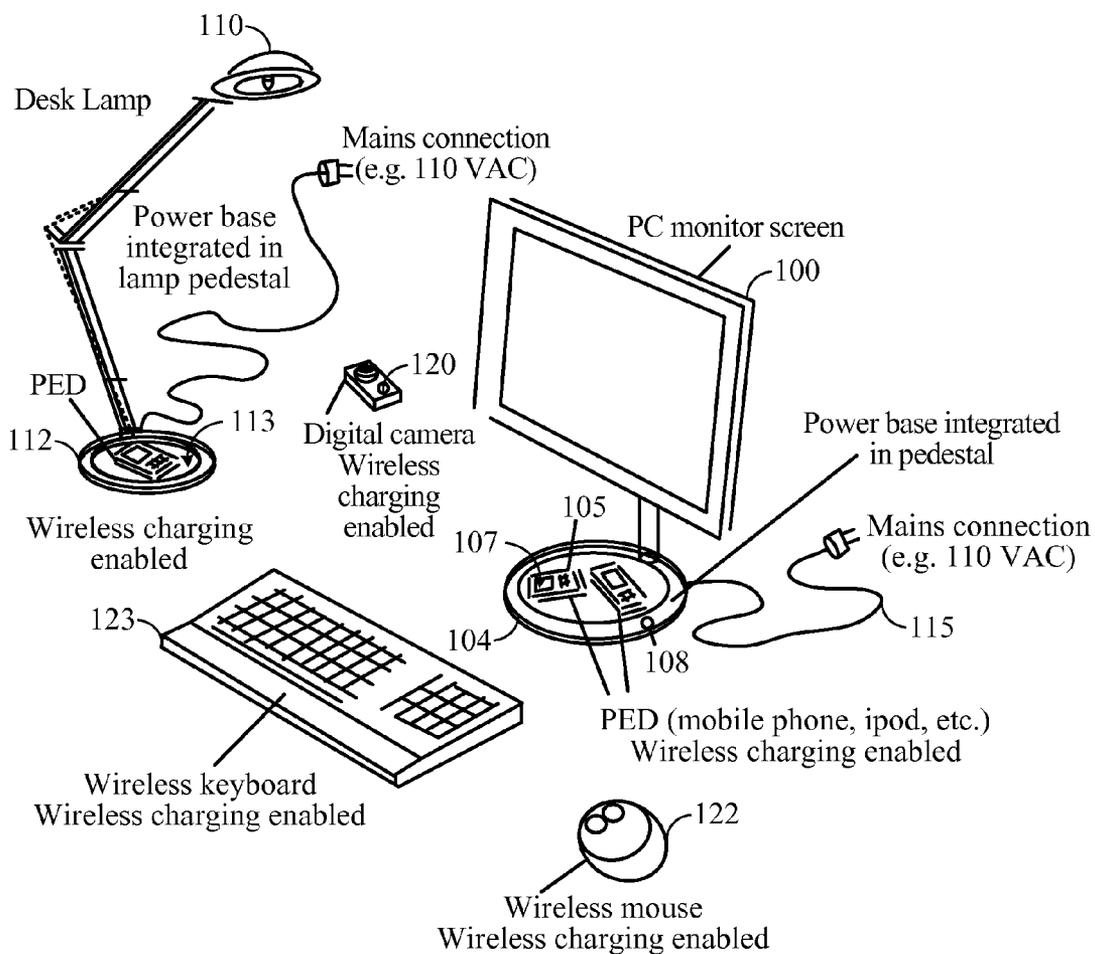


FIG. 1

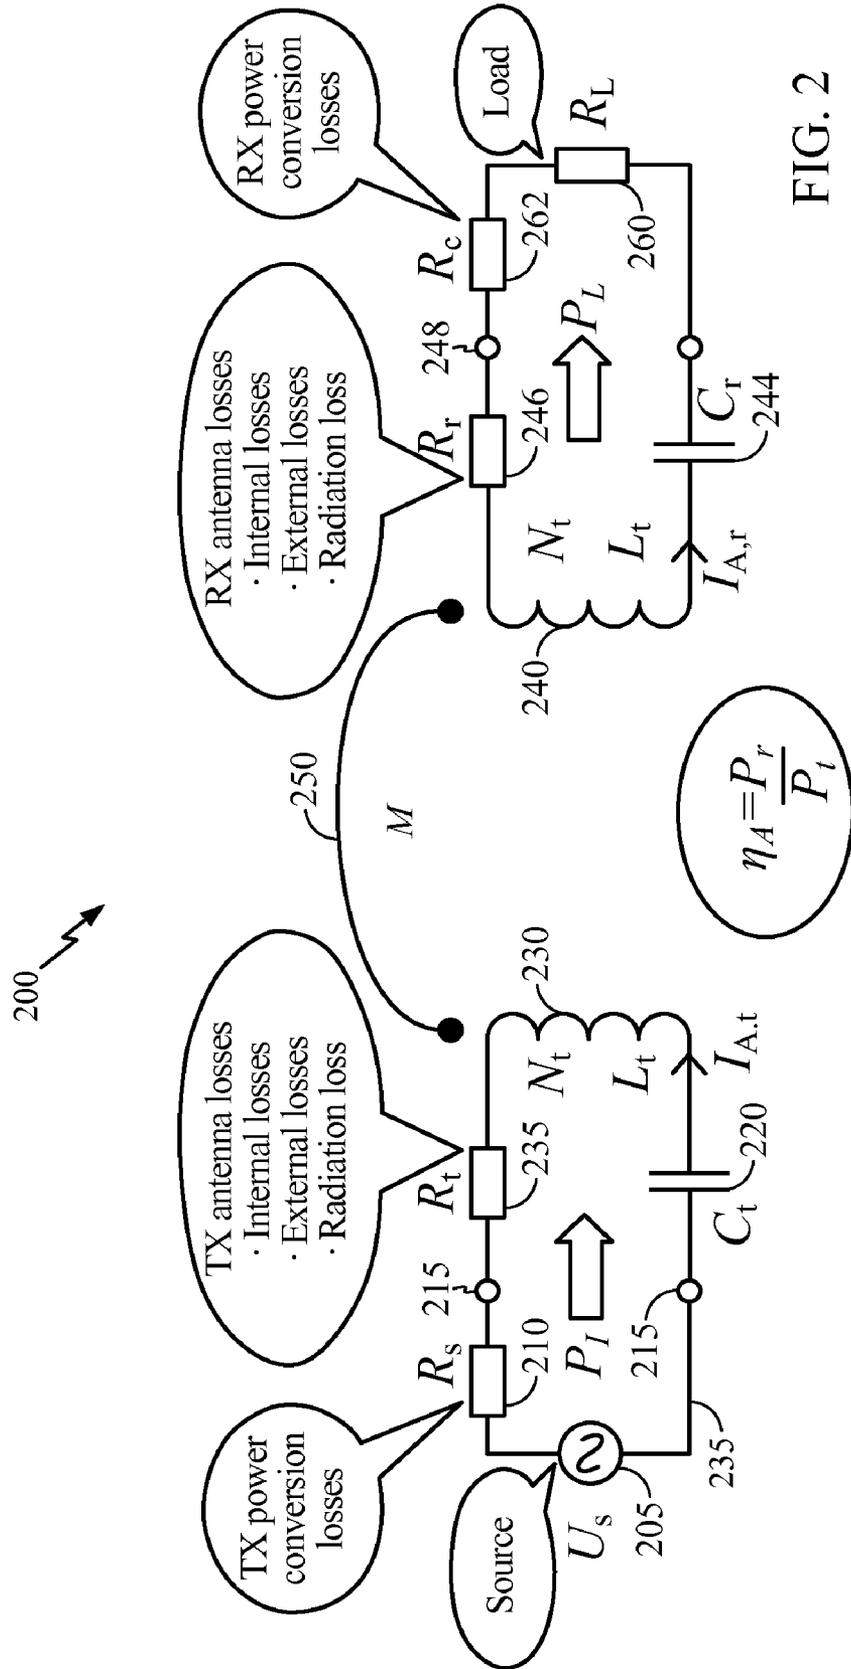


FIG. 2

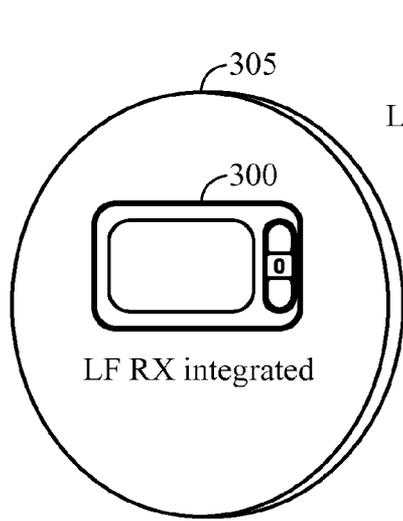


FIG. 3A

LF TX 26 cm Ø  
(Large pad)

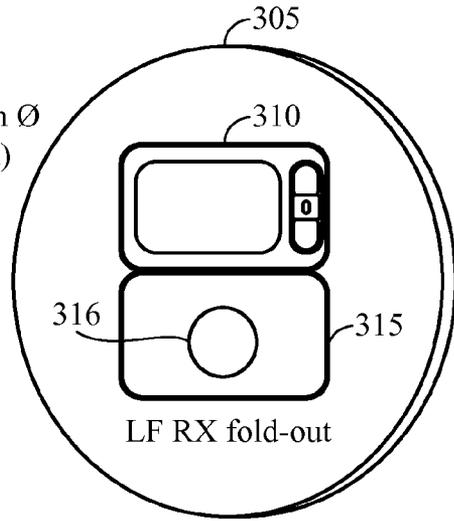


FIG. 3B




FIG. 3C

LF TX 6x9 cm  
(Small pad)


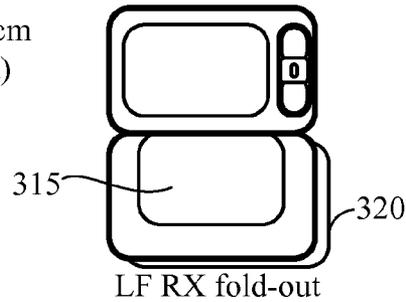



FIG. 3D

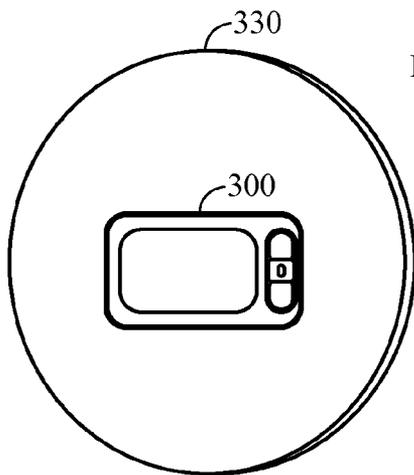

HF RX fold-out


FIG. 3E

HF TX 18 cm Ø  
(Medium pad)

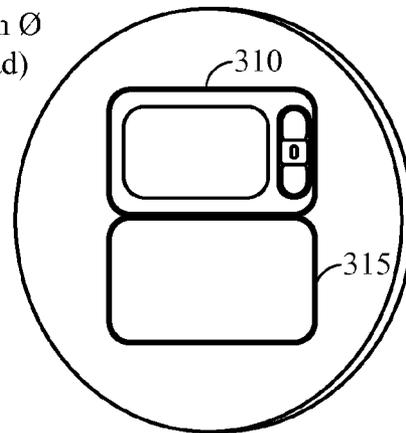


HF RX fold-out

FIG. 3F

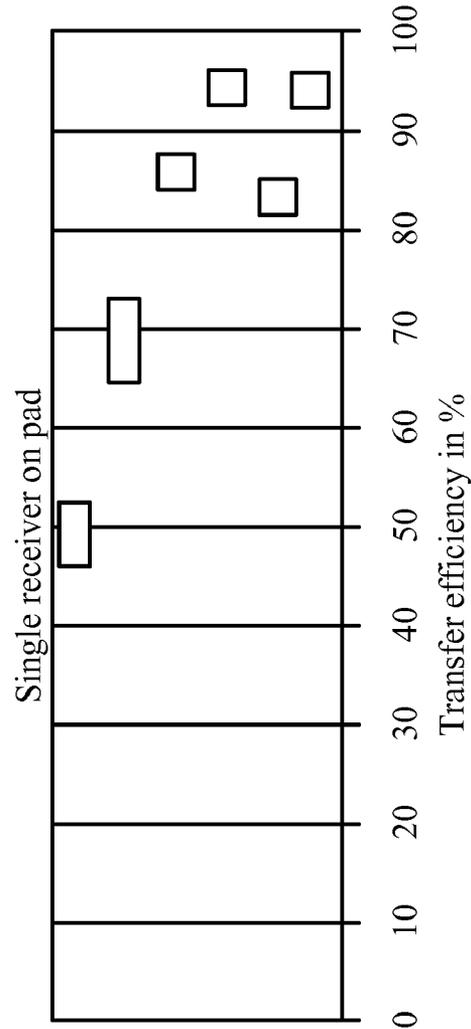

LF: TX 13 cm rad./ RX fold-out Nokia N95  
LF: TX 13 cm rad./ RX fold-out Nokia N95  
LF: TX 6x9 cm / RX integrated Nokia N95  
LF: TX 6x9 cm / RX fold-out Nokia N95  
HF: TX 8 cm rad./ RX integrated Nokia N95  
HF: TX 8 cm rad./ RX fold-out Nokia N95


FIG. 4

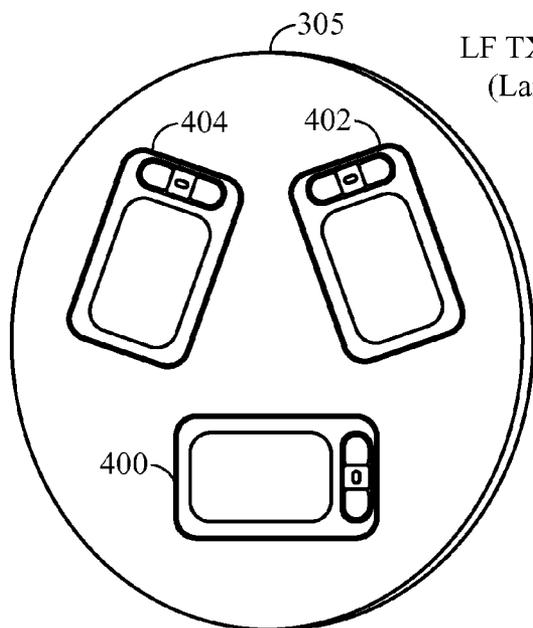

3 x LF RX integrated


FIG. 5A

LF TX 26 cm Ø  
(Large pad)

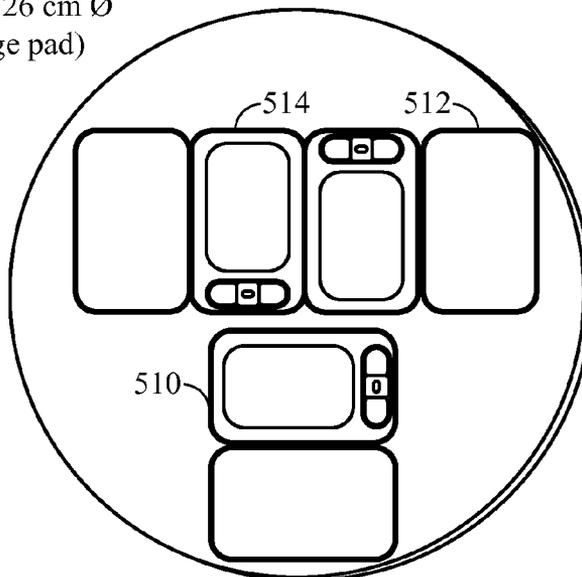

3 x LF RX fold-out


FIG. 5B

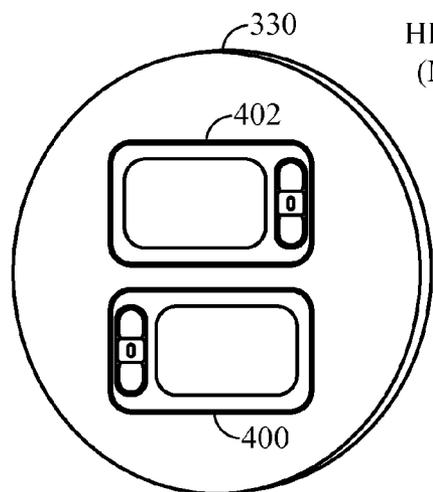

2 x HF RX integrated


FIG. 5C

HF TX 18 cm Ø  
(Medium pad)

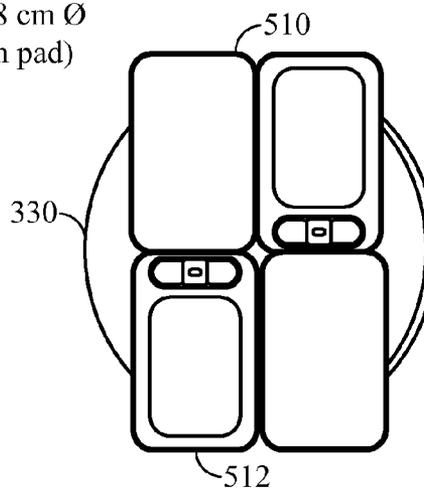

2 x HF RX fold-out

FIG. 5D

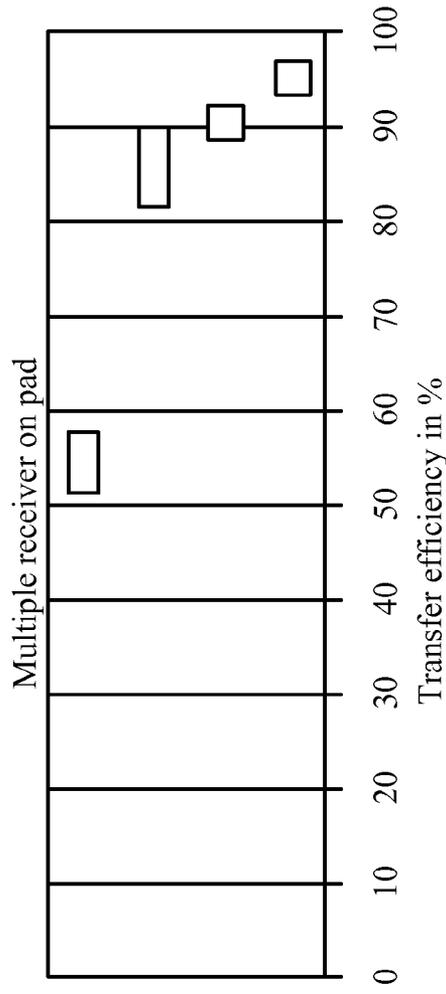

LF: TX 13 cm rad./3 x RX integrated Nokia N95

LF: TX 13 cm rad./3 x RX fold-out Nokia N95

HF: TX 8 cm rad./2 x RX integrated Nokia N95

HF: TX 8 cm rad./2 x RX fold-out Nokia N95

FIG. 6

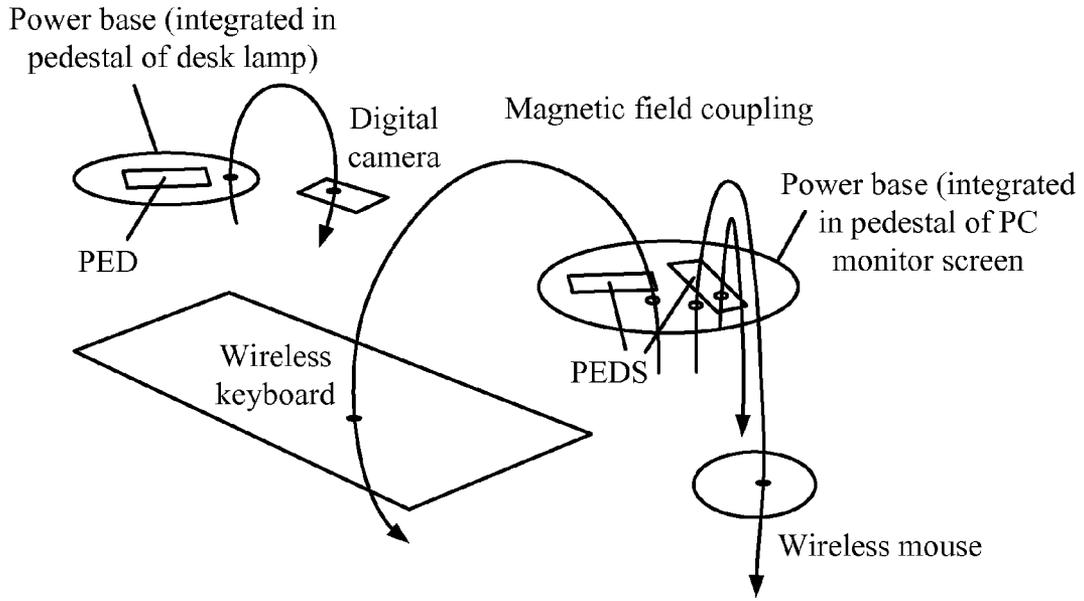


FIG. 7

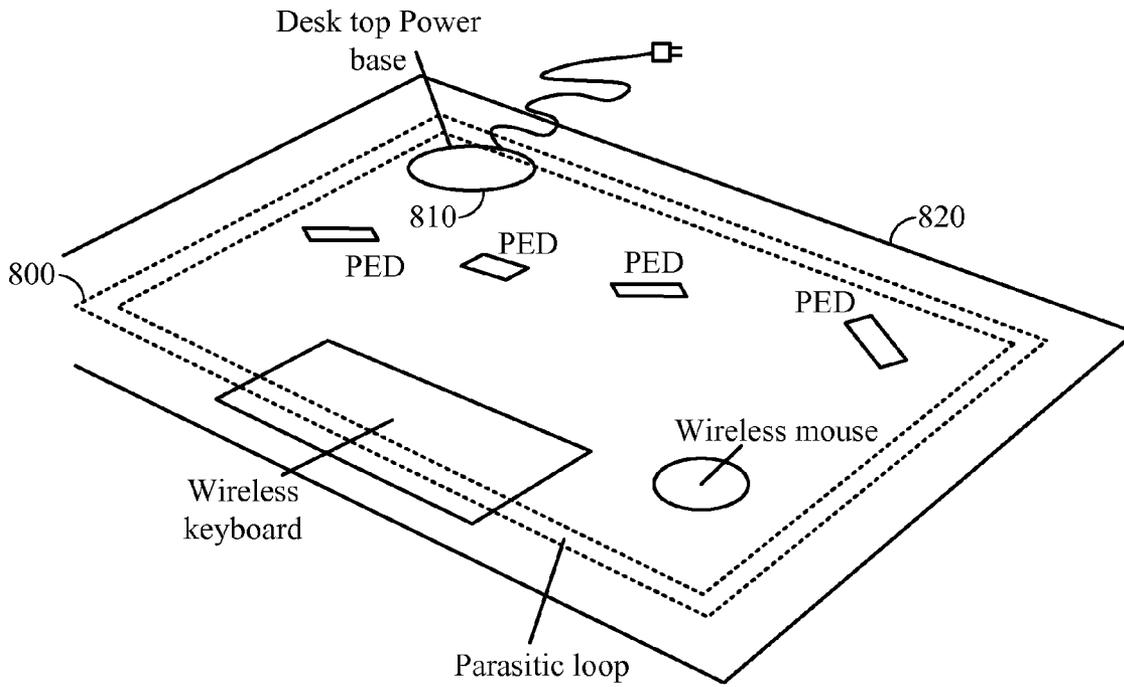


FIG. 8

## SHORT RANGE EFFICIENT WIRELESS POWER TRANSFER

[0001] This application claims priority from provisional application 61/046,757, filed Apr. 21, 2008, the entire contents of which are herewith incorporated by reference.

### BACKGROUND

[0002] Our previous applications and provisional applications, including, but not limited to, U.S. patent application Ser. No. 12/018,069, filed Jan. 22, 2008, entitled "Wireless Apparatus and Methods", the entire contents of the disclosure of which is herewith incorporated by reference, describe wireless transfer of power between a transmitter and receiver.

[0003] The transmit and receiving antennas are preferably resonant antennas, which are substantially resonant, e.g., within 10% of resonance, 15% of resonance, or 20% of resonance. The antenna may be of a small size to allow it to fit into a mobile, handheld device where the available space for the antenna may be limited. An embodiment describes a high efficiency antenna for the specific characteristics and environment for the power being transmitted and received.

[0004] One embodiment uses an efficient power transfer between two antennas by storing energy in the near field of the transmitting antenna, rather than sending the energy into free space in the form of a travelling electromagnetic wave. This embodiment increases the quality factor (Q) of the antennas. This can reduce radiation resistance ( $R_r$ ) and loss resistance ( $R_l$ ).

[0005] The inventors noticed that many of the solutions raised by this system include power delivery at a distance, for example power delivery over inches or feet from a power transmitter to a receiver. The techniques disclosed in our co-pending applications allow delivery of power at reasonable efficiencies, for example between 3 and 5 feet, for example, and efficiencies from 5 to 40%.

### SUMMARY

[0006] However, it was noticed that many users and/or manufacturers would actually prefer higher power-delivery efficiencies, and are willing to accept this power delivery at short distances. For example, many would prefer a power delivery solution which was over 90% efficient, even if that power delivery solution was less convenient to use. The inventors noticed that the resonant which have been used for delivery of power at a distance, could actually be used to produce very high efficiencies when used in a close contact situation.

[0007] An aspect describes a magnetically coupled resonance system, that includes a first pad surface against that accepts devices to be provided with power. The device uses the magnetically coupled resonance to provide power at a first efficiency of power transfer to devices on the pad surface. Power is provided at a second efficiency of power transfer, lower than said first efficiency, to other devices that are not on said first surface, e.g., devices that are remote from the pad by e.g., less than 12 inches or less than 3 feet.

[0008] The devices and pad can each use magnetically resonant circuits with antennas formed of an inductor formed by a coil, and a separate capacitor, tuned to an appropriate frequency.

[0009] The present application discloses use of these techniques to form a wireless desktop. The wireless desktop can be used to charge personal electronic devices such as communications terminals, cellular phones, or computer based peripheral devices these charged devices are either or both of powered or recharged, without wires, using a wireless energy transfer technique.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 shows a wireless desktop with wireless powered items;

[0011] FIG. 2 shows an equivalent circuit;

[0012] FIGS. 3A-3F show single receivers on pads with and without foldouts;

[0013] FIG. 4 shows efficiencies for the single receivers;

[0014] FIGS. 5A-5D show pads with multiple receivers;

[0015] FIG. 6 shows transfer efficiencies for the multiple receivers;

[0016] FIG. 7 shows coplanar field coupling using parasitic; and

[0017] FIG. 8 shows a desktop parasitic.

### DETAILED DESCRIPTION

[0018] An embodiment uses coupled magnetic resonance using magnetic field antennas. Embodiments may operate at any frequency, but two embodiments may operate either at LF (e.g. 135 kHz) or at HF (e.g. 13.56 MHz), but at short distances. One embodiment uses a loop coil in series with a capacitor as the antenna. In one embodiment, the receiver part (e.g., the portable device) is intended to be placed directly on the pad. In this embodiment, there is a relatively small, fixed distance between the transmitter and receiver. That fixed distance, for example, may be set by the thickness of the material of the pad and the material of the housing. This may be less than a centimeter or less than 10 mm, between the coils forming the transmitter and receiver. The distance will be constant, so the item is always the same distance from the antenna when pressed against the pad.

[0019] That fixed distance is dependent on the geometry of the pad and the geometry of the charged item. In the embodiment, the antenna can be tuned to have a maximum response at that constant distance. This tuning, as well as other tuning operations described in this specification, can be calculated and then optimized by trial and error, for example.

[0020] However, unlike other close-charging systems, this system can also charge items which are located at a distance, e.g., inches or feet from the antenna. The antenna is less efficient when charging at a distance, but will still provides power at that distance. That allows charging of items that are not directly placed on the charging pad - unlike pure inductive systems which provide in essence no charge at all other than at the very specific fixed distance and/or orientation.

[0021] This produces certain advantages, including the ability to use less precision in the placement of the device on the charging pad. Even if the device is placed off the pad, it will still receive charging at a lower level from proximity. The lower level charge can be, for example, between 0.05 watts and 0.25 watts, for example, even when the device is not precisely placed on the pad.

[0022] To utilize desktop space efficiently and to reduce desktop wiring, the antenna of the power transmitter/power base may be incorporated into a host device that normally exists on a desktop. Embodiments describe that host device as

including either a PC monitor or a lamp, but can be any other item, such as a printer, scanner, fax machine, telephone, router, or the like.

**[0023]** The transmitter unit may be powered directly from the 110/230 VAC supply already existing in this host device, thus not requiring an extra power cord or power connection.

**[0024]** In one embodiment, as shown in FIG. 1, the transmit antenna is embedded in the pedestal **104** of a PC monitor screen **100** or in the pedestal **112** of a desk lamp **110**. The pedestals may be disk-shaped, to house a circular wire loop antenna generating a symmetric magnetic field. This field is mostly vertically polarized at any position on the desk, in the plane of the antenna loop. This embodiment favors coplanar orientation of antenna loops integrated in wireless-power-enabled devices; that is, the best power-transfer will be obtained when a loop coil in the receiving device is oriented in a substantially parallel plane to a loop coil in the transmitting device. The surface of the charging base may be substantially parallel with the coil, so that the coplanar relationship can be maintained. FIG. 7 illustrates how the coplanar operation can extend to all the items on the desktop.

**[0025]** This coplanar orientation can be used, for example, for wire loop antennas integrated into keyboards, mouse devices, and into many other electronic devices such as mobile phones, MP3 players, PDAs, etc. if placed in the usual manner. This may, however, be used in other applications.

**[0026]** In another embodiment, there may be more than one power base on a desktop as shown in FIG. 1. Power is supplied from the base that is closest to the receiving device or from multiple different sources.

**[0027]** Each power base may also provide an area to place devices directly on the wire loop antenna, resulting in strongest coupling, thus enabling high power transfer at high efficiency. This close proximity coupling is attained by providing a surface **105**, for example, adjacent the charging coil. In this embodiment, more than one device may be placed on such a charging pad surface **105**. This has the other advantage of allowing a larger coil for the transmitting, which also provides improved efficiency.

**[0028]** Low power devices with long battery autonomy, such as a keyboard or a computer mouse, may be placed in the proximity or vicinity of a power base to charge by proximity coupling. Available power and transfer efficiency for these devices will be lower than for the fixed distance coupling. However, these devices may be constantly charged, and intermittently used. Hence, these devices do not require continuous charging. In one embodiment, the amount of charging may be reduced when other devices are additionally placed on the charging pad, because the multiple devices may more heavily load the system than a single device.

**[0029]** Magnetic field strength in the vicinity of a power base will preferably be below safety critical levels. The power base may additionally provide a function to automatically reduce magnetic field strength if a person is approaching. This function may use infrared or microwave person detection **108**. This can be a proximity detector, e.g., one that can be activated by user proximity.

**[0030]** A first embodiment actuates the proximity detector manually. Persons that feel uncomfortable in presence of magnetic fields can turn on the function. This function will also cause devices in the vicinity to stop receiving power during the time when persons are in proximity. This may use, for example, an IR detector to detect the presence of persons.

**[0031]** Another embodiment may always have the proximity detector active and automatically turn off the function when

**[0032]** Other devices such as cordless phones, digicams, etc. may be placed on a charging station. This allows the wireless power receiver and its antenna to be made an integral part of the recharging station. A charging station may provide more area and/or space to integrate an efficient power receiver other than the portable device itself. For example, this may use electrical contacts, or by using a wireless technique or a wireless parasitic antenna, as described herein. The charging station itself may be configured and used as a power relay or a parasitic antenna that improves coupling between the transmitter and the portable devices which receive the charge.

**[0033]** In an embodiment, shown in FIG. 1, there may be a number of different electrically operated devices on a user's "desktop", which may be items used by a user for work every day. One such item is a monitor **100** for a PC. This operates off power provided by a 110 V connection **102** which plugs into the AC outlet. The 110 V connection **100** provides power for both the operation of the monitor, and also provides the power for the wireless surface **104** that is integrated into the base of the monitor. The charging pad may use the techniques that are described in detail herein.

**[0034]** Wireless proximity charging may be enabled in the area **105**, which forms a flat surface on the base. According to this embodiment, the wireless proximity charging may be specifically tuned for short distance connections, although it may also operate properly over longer distance connections. Surface **105** may be sized such that devices such as cell phones and PDAs such as **107** may be rested on the surface. While charging is optimized for the area **105**, charging is still carried out in other areas.

**[0035]** In this embodiment, there is also another charging base as part of a desk lamp **110**. This forms a charging base **112** with an area **113** thereon. As in the **104** charging base, the charging is optimized for carrying out up close proximity charging of items such as **114** using magnetically coupled resonance. It may also charge items that are distant from the charging base.

**[0036]** In addition to charging items such as **114** on the charging base, either or both of the items produces magnetically resonant output power that is coupled to remote devices that are enabled for wireless charging. These remote devices, for example, may include a magnetically resonant antenna therein that is resonant to the same frequency of the transmission. In an embodiment, this may be at 13.56 MHz or at 135 KHz, or at any other frequency.

**[0037]** The charged devices can include a digital camera **121**, a wireless mouse **122**, and a wireless keyboard **123**. Each of these devices, for example, can include a battery therein, which is charged by the operation of the device.

**[0038]** An important feature is that an up close charge can be carried out at high efficiency, or a distance charge can be carried out lower efficiency.

**[0039]** FIG. 2 shows an equivalent circuit of the power transmission system, and illustrates how the efficiency can be calculated. A power source **200** portion includes a power source **205**, for example the AC socket. The power source **205** has an equivalent loss resistance **210**. The loss resistance **210** models the resistance and power conversion losses. Alternatively, the power source can include some parts of the con-

version electronics, for example in the case that the power from the power source is changed to some other frequency or some other power value.

[0040] The power source **205** is connected across terminals **215**, to antenna part **220**. Antenna includes an inductor **230** and series capacitance **235**. The LC constant of the inductor and capacitance is tuned to be substantially at the frequency of the source **205**. The antenna also has shows a loss resistance value **235**, which is a parasitic value that represents the transmit antenna losses, including internal losses, external losses, and radiation losses.

[0041] A magnetic field **250** is created in the vicinity of the antenna **230**. This is coupled to the antenna **240** of the receiver. As in the antenna **230**, the antenna **240** includes an inductor **242** capacitor **244**. The inductor and capacitor form a circuit that is resonant with the received frequency that is received.

[0042] Receive antenna losses are shown by the series resistance **246**. The input power  $P_r$  is connected via the terminals **248** to a load **260**. The load **260** also includes receive power losses **262** shown as a series resistance, which can be modeled as losses in the system.

[0043] These losses can include the power conversion losses as well as series resistance losses.

[0044] Another system can attempt to obtain maximum efficiency in various different scenarios. For example, in one scenario, the transmit antenna can be tuned by changing the capacitance to obtain resonance at the operating frequency in the presence of an unloaded receiver. In an unloaded receiver scenario, the resistance of the load is infinite. Loaded receivers change this resistance. Receiver measurements can also be carried out, by tuning the receiving antenna to change the capacitance etc. in the presence of an unloaded transmitter or in the case of multiple transmitters.

[0045] The different values can be measured. Capacitance value adjustments can be available, for example, for unloaded, moderately loaded (e.g. a single load) or highly loaded systems. Different capacitance values can be dynamically switched to create the highest efficiency value, and to operate with that value.

[0046] FIGS. **3A-3F** show different scenarios of charging. FIG. **3A** shows a conventional PDA **300** on a large charging pad **305**. In the embodiment, this may be a low-frequency charging pad which may have a **26** cm diameter. Another embodiment may use a PDA **310** which includes a foldout antenna portion **315**. The foldout antenna portion **315** may include a loop antenna that can be folded away from the body of the device to improve the coupling efficiency.

[0047] FIG. **3C** shows a small pad embodiment, where the pad **320** is substantially the same size as the PDA **300**. In this embodiment, the pad may be 6×9 cm. FIG. **3B** shows how this pad might be used with a foldout embodiment, where the flap **315** fits directly over the pad **320**. A medium pad is shown in FIGS. **3E** and **3F**. In this embodiment, the medium pad **330** includes the PDA **300** thereon, or a foldout PDA **310** with its foldout flat. The medium pad may be 18 cm in diameter in this embodiment.

[0048] The efficiency results for these devices are shown in FIG. **4**, which shows how the different size devices can be located on the different size pads. Five of the six situations have efficiencies which are greater than 80%. Even the lowest efficiency, created by a large pad with an integrated receiver in the phone, had a transfer efficiency of 50%.

[0049] Another embodiment shown in FIGS. **5A-5D** may use multiple receivers all on the same pad. Since the pads, especially the large and medium pads, have sizes that are large enough to physically hold multiple different phones, multiple different devices can be placed all on the pad.

[0050] FIGS. **5A-5D** illustrates these different embodiments. In FIG. **5A**, the pad **305** includes three PDA phones/devices thereon, shown as **400**, **402** and **404**; however, the pad may include more or fewer devices.

[0051] In the FIG. **5B** embodiment, the devices have fold-out antennas, with the devices **510**, **512** and **514** each representing a PDA on the pad, along with its foldout flat against the pad and away from the body of the phone.

[0052] FIG. **5C** shows the medium pad **330** with two phones thereon, **400**, **402**, while FIG. **5B** shows this same pad with two foldouts thereon **510**, **512**.

[0053] FIG. **6** shows the measured efficiency of this system, with again most of the efficiencies being greater than 80%.

[0054] The efficiency of the system  $\eta_a$  can be calculated as the input power across the terminals **215** divided by receive power across the terminals **248**

[0055] or  $\eta_a = P_r/P_r$ .

[0056] Another embodiment shown in FIG. **8** forms a power relay as a parasitic antenna that improves coupling between energy source and energy sink. The energy source is formed of a resonant antenna **810**, which may be a resonant capacitor and inductor. A parasitic antenna **800**, which may also be resonant at the same frequency, may be used. This parasitic antenna may be expanded to cover a large portion of the desktop area **820** as shown. Such a parasitic loop may either be mounted beneath the desk, or built into the desktop surface, or put on the desk's surface e.g. as a flat structure, such as a desk mat. The parasitic device can be excited by a single and small active power base, and can be used to dramatically improve performance and efficiency of wireless desktop powering and charging in that area.

[0057] Inductive excitation from a small power base may however be a convenient solution since it does not require integration of any part. This becomes particularly true when the parasitic antenna is invisibly integrated into the desktop. FIG. **8** illustrates a large parasitic loop thereby improving the coupling between power base and receiver devices. The parasitic loop can cover an entire desk surface, providing a hot zone throughout that desk surface. The parasitic antenna, in this embodiment, provides passive repeating of power to the entire desktop area.

[0058] The same kind of antenna, in another embodiment, may also be driven directly from a transmitter unit.

[0059] The general structure and techniques, and more specific embodiments which can be used to effect different ways of carrying out the more general goals are described herein.

[0060] Although only a few embodiments have been disclosed in detail above, other embodiments are possible and the inventors intend these to be encompassed within this specification. The specification describes specific examples to accomplish a more general goal that may be accomplished in another way. This disclosure is intended to be exemplary, and the claims are intended to cover any modification or alternative which might be predictable to a person having ordinary skill in the art.

[0061] Also, the inventors intend that only those claims which use the words "means for" are intended to be interpreted under 35 USC **112**, sixth paragraph. Moreover, no

limitations from the specification are intended to be read into any claims, unless those limitations are expressly included in the claims.

**[0062]** Where a specific numerical value is mentioned herein, it should be considered that the value may be increased or decreased by 20%, while still staying within the teachings of the present application, unless some different range is specifically mentioned. Where a specified logical sense is used, the opposite logical sense is also intended to be encompassed.

What is claimed is:

1. A system comprising: a magnetically coupled resonance system, that includes a first surface against which devices to be provided with power are located, and providing power at a first efficiency of power transfer to said devices on said first surface, and providing power at a second efficiency of power transfer, lower than said first efficiency, to other devices that are not on said first surface, each of said devices receiving said power using magnetically coupled resonance between a transmitting antenna adjacent said first surface, and a receiving antenna in at least one device.
2. A system as in claim 1, wherein said system is tuned for maximum efficiency on said first surface.
3. A system as in claim 1, wherein said transmitting antenna is tuned for a thickness of a material of said first surface.
4. A system as in claim 1, wherein said devices which are not on said first surface are inches away from said first surface.
5. A system as in claim 1, wherein said devices which are not on said first surface are feet away from said first surface.
6. A system as in claim 1, wherein said first surface is integrated into a desktop component.
7. A system as in claim 6, wherein said desktop component is a base of a monitor.
8. A system as in claim 6, wherein said desktop component is a base of a lamp.
9. A system as in claim 6, wherein said desktop component is a base of a telephone charger.
10. A system as in claim 1, wherein said first surface is parallel to a coil of an antenna in said first surface.
11. A system as in claim 1, further comprising a device which allows detecting a proximity of a person, and terminating transmission upon detecting said proximity of a person.
12. A system as in claim 11, wherein said device is switched on to detect a proximity of the person, and switched off to transmit power continuously.
13. A system comprising: a magnetically coupled resonance system, that provides power to devices using magnetically coupled resonance, a device, coupled to said magnetically coupled resonance system, which allows detecting a proximity of a person, and terminating transmission upon detecting said proximity of a person.
14. A system as in claim 13, wherein said device is switched on to detect the proximity of the person, and switched off to transmit power continuously.
15. A system in claim 13, wherein said magnetically coupled resonance system includes a first surface against which devices to be charged are located, and providing power at a first efficiency of power transfer to devices on said first

surface, each of said devices receiving said power using magnetically coupled resonance between a transmitting antenna adjacent said first surface, and a receiving antenna in at least one device.

16. A system in claim 15, wherein said magnetically coupled resonance system further provides power at a second efficiency of power transfer, lower than said first efficiency, to other devices that are not on said first surface.

17. A system as in claim 16, wherein said system is tuned for maximum efficiency on said first surface.

18. A system as in claim 16, wherein said transmitting antenna is tuned for a thickness of a material of said first surface.

19. A system as in claim 16, wherein said devices which are not on said first surface are less than 12 inches away from said first surface.

20. A system as in claim 16, wherein said devices which are not on said first surface are less than 3 feet away from said first surface.

21. A system as in claim 16, wherein said first surface is integrated into a desktop component.

22. A system as in claim 21, wherein said desktop component is a base of a monitor.

23. A system as in claim 21, wherein said desktop component is a base of a lamp.

24. A system as in claim 21, wherein said desktop component is a base of a telephone charger.

25. A system as in claim 16, wherein said first surface is parallel to a coil of an antenna in said first surface.

26. A method comprising:

first powering a first device wirelessly, using a magnetically coupled resonance system, by resting said first device against a first surface against which devices to be provided with power are located, said first powering providing power at a first efficiency of power transfer to devices on said first surface; second powering a second device wirelessly, at a second efficiency of power transfer, lower than said first efficiency, said second device not being on said first surface, each of said second devices receiving said power using magnetically coupled resonance between a transmitting antenna adjacent said first surface, and a receiving antenna in at least one device.

27. A system comprising:

a magnetically coupled resonance system, that includes a first surface against which devices to be provided with power are located, said resonance system including a repeater antenna, adjacent said surface, which repeats magnetically resonantly received power over a whole area of said first surface, thereby converting the whole desktop into a charging system.

28. A system as in claim 27, further comprising a magnetic transmitter, separated from said repeater antenna, and tuned to resonance with said repeater antenna.

29. A system as in claim 27, wherein said repeater antenna is integrated into a desktop component.

30. A system as in claim 29, wherein said desktop component is a base of a monitor.

31. A system as in claim 29, wherein said desktop component is a base of a lamp.

32. A system as in claim 29, wherein said desktop component is a base of a telephone charger.

33. A system as in claim 27, wherein said first surface is parallel to a coil of an antenna in said first surface.

34. A system as in claim 27, further comprising a device which allows detecting a proximity of a person, and terminating transmission upon detecting said proximity of a person.

35. A system as in claim 27, wherein said device is switched on to detect a proximity of the person, and switched off to transmit power continuously.

36. A system comprising:  
a magnetically coupled resonance system, that includes a first repeater antenna resonant with a first frequency, which repeats magnetically resonantly received power at said first frequency in an area of said first repeater antenna, and a second repeater antenna, spaced from said first repeater antenna and resonant with a first frequency, which repeats magnetically resonantly received power at said first frequency in an area of said second repeater antenna.

37. A system as in claim 36, further comprising a first surface against which devices to be provided with power are located, said first surface being adjacent said second repeater antenna.

38. A system as in claim 37, wherein said first surface is a desktop, and the whole desktop is used as a charging system.

39. A system as in claim 36, further comprising a magnetic transmitter, separated from said repeater antenna, and tuned to resonance with said repeater antenna.

40. A system as in claim 39, wherein said repeater antenna is integrated into a desktop component.

41. A system as in claim 40, wherein said desktop component comprises a base of a monitor.

42. A system as in claim 40, wherein said desktop component comprises a base of a lamp.

43. A system as in claim 40, wherein said desktop component comprises a base of a portable electronic device charger.

44. A system as in claim 36, wherein said first surface is parallel to a coil of an antenna in said first surface.

45. A system as in claim 36, further comprising a device which allows detecting a proximity of a person, and terminating transmission upon detecting said proximity of a person.

46. A system as in claim 36, wherein said system is switched on to detect a proximity of the person, and switched off to transmit power continuously.

47. A system as in claim 40, wherein said portable electronic device comprises a cellular communication device.

48. A system comprising:  
a magnetically coupled resonance system, that includes a transmitter antenna resonant with a first frequency, which transmits magnetically resonant power at said first frequency and a repeater antenna, spaced from said transmitter antenna and resonant with said first frequency, which repeats magnetically resonantly received power at said first frequency in an area of said repeater antenna,

wherein said transmitter antenna and said repeater antenna are the same size.

49. A system comprising:  
a magnetically coupled resonance system, that includes a transmitter antenna resonant with a first frequency, which transmits magnetically resonant power at said first frequency and a repeater antenna, spaced from said transmitter antenna and resonant with said first frequency, which repeats magnetically resonantly received power at said first frequency in an area of said repeater antenna,

wherein said transmitter antenna is larger in its overall size than said repeater antenna.

50. A system as in claim 49, wherein said transmitter antenna has a larger diameter than said repeater antenna.

\* \* \* \* \*