



US 20170298207A1

(19) **United States**(12) **Patent Application Publication**
CÔTÉ(10) **Pub. No.: US 2017/0298207 A1**(43) **Pub. Date: Oct. 19, 2017**(54) **PROCESSES FOR RECYCLING
POLYSTYRENE WASTE**(71) Applicant: **POLYSTYVERT INC.**, Anjou (CA)(72) Inventor: **Roland CÔTÉ**,
St-Antoine-sur-Richelieu (CA)(21) Appl. No.: **15/515,817**(22) PCT Filed: **Oct. 5, 2015**(86) PCT No.: **PCT/CA2015/051006**


§ 371 (c)(1),

(2) Date: **Mar. 30, 2017****Related U.S. Application Data**(60) Provisional application No. 62/059,611, filed on Oct.
3, 2014.**Publication Classification**(51) **Int. Cl.**
C08J 11/08 (2006.01)
B29B 17/02 (2006.01)**C08F 112/08** (2006.01)**C08L 25/06** (2006.01)**C08L 25/00** (2006.01)**C08J 11/00** (2006.01)(52) **U.S. Cl.**CPC **C08J 11/08** (2013.01); **C08F 112/08**(2013.01); **C08L 25/06** (2013.01); **B29B 17/02**(2013.01); **C08J 11/00** (2013.01); **C08L 25/00**(2013.01); **C08J 2325/06** (2013.01)

(57)

ABSTRACT

There are provided recycled polystyrene polymers having a melt flow index of less than about 25 g/10 min. There are provided processes for recycling polystyrene waste. The processes can comprise dissolving said polystyrene waste in p-cymene under conditions to obtain a polystyrene/p-cymene mixture, adding the polystyrene/p-cymene mixture to a hydrocarbon polystyrene non-solvent under conditions to obtain precipitated polystyrene and washing the precipitated polystyrene with additional portions of hydrocarbon polystyrene non-solvent under conditions to obtain twice-washed polystyrene. The twice-washed polystyrene can optionally be dried and formed into polystyrene pellets. There is also provided recycled polystyrene obtained from such processes for recycling polystyrene waste.

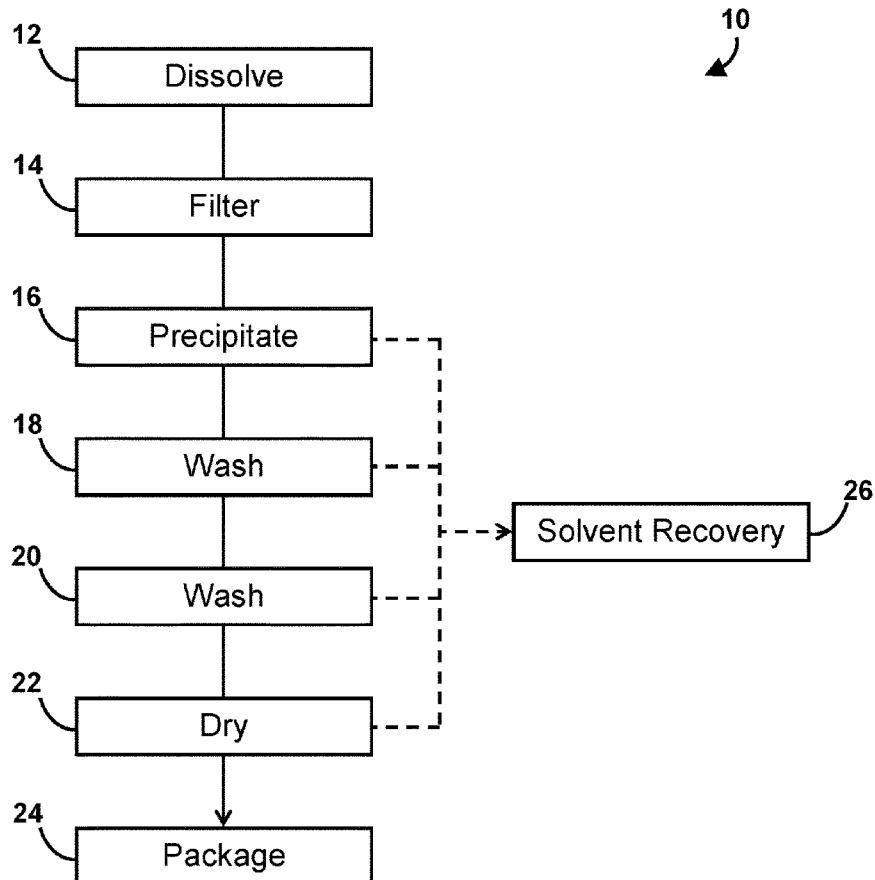

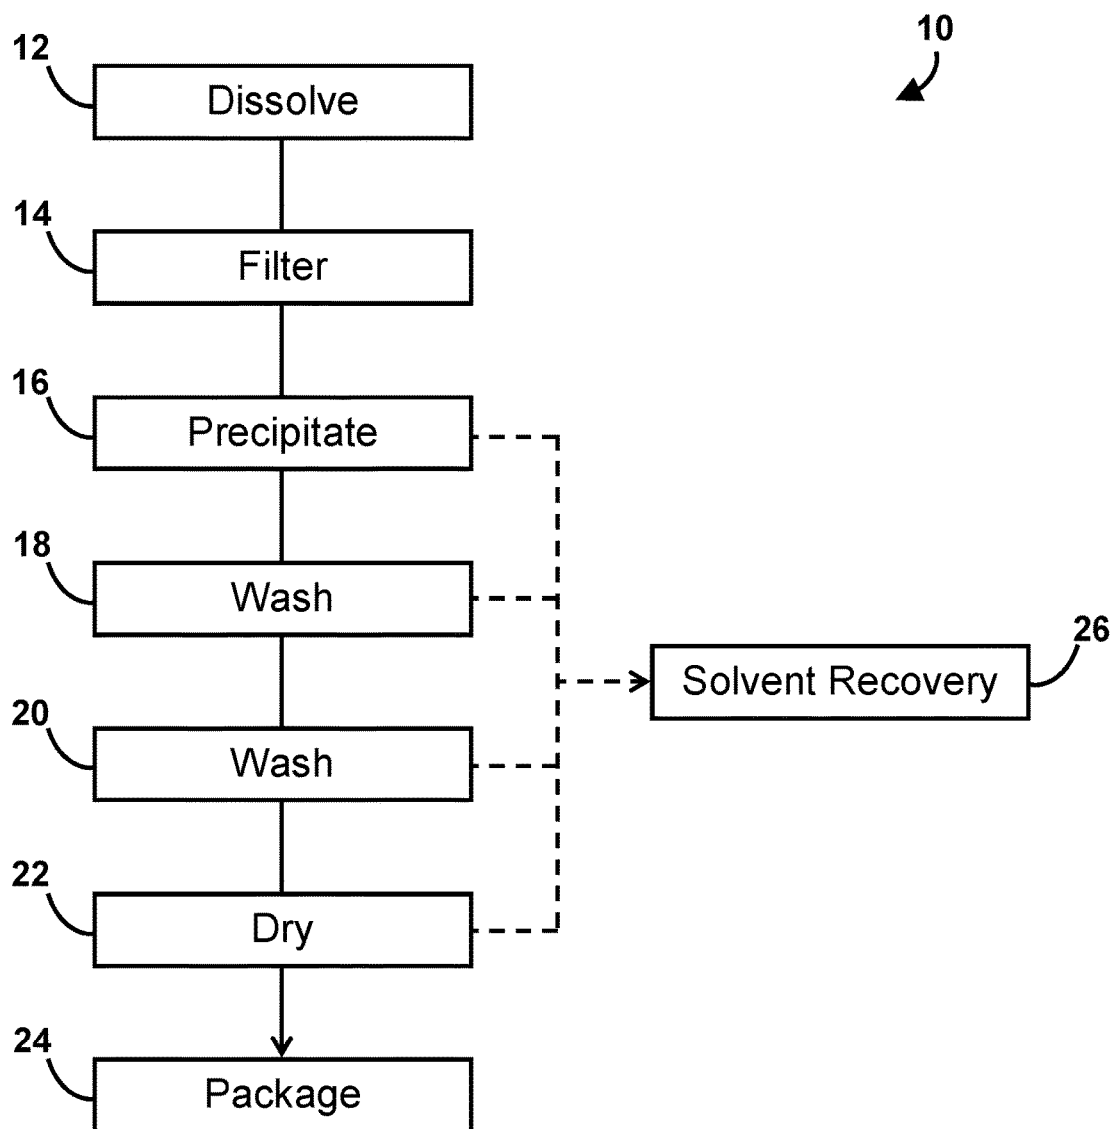


FIG. 1

PROCESSES FOR RECYCLING POLYSTYRENE WASTE

[0001] The present disclosure relates to a process for recycling polystyrene waste. For example, it relates to a process for recycling polystyrene waste comprising dissolving the polystyrene waste in a solvent such as p-cymene then precipitating and washing the polystyrene with a non-solvent.

[0002] Polystyrene waste, for example, the packaging from electronic products or furniture, food trays, commercial products and insulation can, for example, have environmental consequences.

[0003] For example, whether post-consumer or post-industrial, the majority of polystyrene waste is buried in landfills. For example, every year in Quebec more than 40,000 tons of polystyrene waste is buried. Further, more than 60,000 tons of new polystyrene is bought and consumed every year in Quebec.

[0004] Known processes for recycling polystyrene do not produce recycled polystyrene having the same properties as new polystyrene. For example, known methods of polystyrene do not prepare recycled polystyrene having a Melt Flow Index (MFI) which meets technical specifications for using the recycled polystyrene for the same uses as new polystyrene is used for. To compensate this loss of mechanical properties, the recycled polystyrene is blended with new polystyrene in a proportion that rarely can exceed 20%, even for the less stringent applications.

[0005] Most industrial polystyrene objects are not composed only of polystyrene; for example, they may contain chemicals added to a polymer to modify some physical, biological and/or chemical property. Examples of additives are: coloring agents, fillers, flame retardants, lubricants and plasticizers.

[0006] It would thus be desirable to be provided with a recycled polystyrene and a process for recycling polystyrene waste that would at least partially solve one of the problems mentioned or that would be an alternative to the known processes for recycling polystyrene waste.

[0007] Therefore according to an aspect of the present disclosure, there is provided a recycled polystyrene having a melt flow index of less than about 25 g/10 min measured according to ASTM D1238-13.

[0008] According to another aspect of the present disclosure, there is provided a recycled polystyrene having a melt flow index of less than about 25 g/10 min measured according to ASTM D1238-13 standard and an additive content of less than about 1 wt %.

[0009] According to another aspect of the present disclosure, there is provided a recycled polystyrene having a melt flow index of less than about 25 g/10 min measured according to ASTM D1238-13 standard and an ash content of less than about 1 wt %, measured according to ASTM D5630-13 standard.

[0010] According to another aspect of the present disclosure, there is provided a recycled polystyrene having a melt flow index of less than about 25 g/10 min measured according to ASTM D1238-13 standard and an ash content of less than about 0.5 wt %, measured according to ASTM D5630-13 standard.

[0011] According to another aspect of the present disclosure, there is provided a recycled polystyrene having a melt flow index of less than about 25 g/10 min.

[0012] According to another aspect of the present disclosure, there is provided a recycled polystyrene having a melt flow index of less than about 25 g/10 min, measured according to ASTM D1238-13 standard.

[0013] According to another aspect of the present disclosure, there is provided a process for recycling polystyrene waste, comprising:

[0014] dissolving the polystyrene waste in p-cymene under conditions to obtain a polystyrene/p-cymene mixture;

[0015] adding the polystyrene/p-cymene mixture to a first portion of hydrocarbon polystyrene non-solvent under conditions to obtain precipitated polystyrene and a first portion of hydrocarbon waste solution;

[0016] separating the precipitated polystyrene from the first portion of hydrocarbon waste solution;

[0017] optionally repeating the dissolving, adding and separating;

[0018] washing the precipitated polystyrene with a second portion of hydrocarbon polystyrene non-solvent under conditions to obtain washed polystyrene and a second portion of hydrocarbon waste solution;

[0019] separating the washed polystyrene from the second portion of hydrocarbon waste solution;

[0020] washing the washed polystyrene with a third portion of hydrocarbon polystyrene non-solvent under conditions to obtain twice-washed polystyrene and a third portion of hydrocarbon waste solution;

[0021] separating the twice-washed polystyrene from the third portion of hydrocarbon waste solution; and

[0022] optionally drying the twice-washed polystyrene under conditions to obtain dried polystyrene.

[0023] Therefore according to another aspect of the present disclosure, there is provided a process for recycling polystyrene waste, comprising:

[0024] dissolving the polystyrene waste in p-cymene under conditions to obtain a polystyrene/p-cymene mixture;

[0025] adding the polystyrene/p-cymene mixture to a first portion of hydrocarbon polystyrene non-solvent under conditions to obtain precipitated polystyrene and a first portion of hydrocarbon waste solution;

[0026] separating the precipitated polystyrene from the first portion of hydrocarbon waste solution;

[0027] optionally repeating the dissolving, adding and separating;

[0028] washing the precipitated polystyrene with a second portion of hydrocarbon polystyrene non-solvent under conditions to obtain washed polystyrene and a second portion of hydrocarbon waste solution;

[0029] separating the washed polystyrene from the second portion of hydrocarbon waste solution;

[0030] washing the washed polystyrene with a third portion of hydrocarbon polystyrene non-solvent under conditions to obtain twice-washed polystyrene and a third portion of hydrocarbon waste solution;

[0031] separating the twice-washed polystyrene from the third portion of hydrocarbon waste solution;

[0032] removing surplus hydrocarbon waste solution by wringing and/or compressing the twice-washed polystyrene; and

[0033] drying the twice-washed polystyrene under conditions to obtain dried polystyrene.

[0034] The present disclosure also includes recycled polystyrene prepared according to a process for recycling polystyrene waste of the present disclosure.

[0035] Polystyrene waste such as expanded polystyrene waste is typically bulky but light whereas the polystyrene/p-cymene mixture typically has a higher density which may therefore cost less to transport. Accordingly, the processes of the present disclosure may, for example, save on transportation costs if, for example, the polystyrene/p-cymene mixture is obtained at a first location and the process further comprises transporting the polystyrene/p-cymene mixture to a second location wherein subsequent steps in the process are carried out.

[0036] The process for recycling polystyrene waste of the present disclosure may, for example allow removal of most additives (for example, chemicals added to a polymer to modify some physical, biological and/or chemical property) and can produce recycled polystyrene having properties very close to that of new polystyrene. The recycled polystyrene prepared from the processes of the present disclosure may, for example, be suitable for use for the same uses as new polystyrene such as for the preparation of new polystyrene articles. For example, the recycled polystyrene prepared from the processes of the present disclosure may, for example, have an MFI within a useful range for such uses.

[0037] It was found that the recycled polystyrenes of the present disclosure and the processes for obtaining same were quite useful. In fact, it was found that such recycled polymers and processes allowed for providing recycled polystyrene having a very low content of additives (fillers and/or lubricants). That also leads to recycled polystyrene having a very low content in ash. For example, when applying these processes to white expanded or extruded polystyrene, the final product is very clear and transparent to light transmission. Such a feature of the polymers and processes of the present disclosure are very interesting since it allows for significantly increasing the life cycle of recycled polystyrene. In fact, use of recycled polystyrene is quite often limited in view of the various additives contained therein and they therefore do not meet the requirements for certain uses or applications that can be made with polystyrene. Some manufacturer will also be reluctant to use recycled polystyrene since it can have a too high content of additives and it may affect or diminish the properties of the polystyrene or products made with such recycled polystyrene. This is clearly not the case with the polymers and processes mentioned in the present disclosure. On the contrary, such very low amounts of additives and/or fillers found in the polymers of the present disclosure allow for using these recycled polystyrenes in many different applications and also to recycle them many many times since merely never reaching high quantities of additives and/or fillers since user of such products is not mandatory to recycle them and to obtain low MFI values.

[0038] Thus the polymers and processes of the present disclosure allow for increasing the life cycle of recycled polystyrene (it is possible to recycle it many many times while maintaining the required specifications and properties) and also they have a very low MFI, while avoiding the use of large quantities of additives and/or fillers.

[0039] In the following drawings, which represent by way of example only, various embodiments of the disclosure:

[0040] FIG. 1 is a schematic diagram of a process according to an embodiment of the present disclosure.

[0041] Unless otherwise indicated, the definitions and embodiments described in this and other sections are intended to be applicable to all embodiments and aspects of the present disclosure herein described for which they are suitable as would be understood by a person skilled in the art.

[0042] As used in the present disclosure, the singular forms “a”, “an” and “the” include plural references unless the content clearly dictates otherwise. For example, an embodiment including “a hydrocarbon polystyrene non-solvent” should be understood to present certain aspects with one hydrocarbon polystyrene non-solvent, or two or more additional hydrocarbon polystyrene non-solvents.

[0043] In embodiments comprising an “additional” or “second” component, such as an additional or second hydrocarbon polystyrene non-solvent, the second component as used herein is different from the other components or first component. A “third” component is different from the other, first, and second components, and further enumerated or “additional” components are similarly different.

[0044] The term “additive” as used herein refers to chemicals added to a polymer to modify at least one physical, biological and/or chemical property. Non-limitative examples of additives are: coloring agents, fillers, flame retardants, lubricants and plasticizers.

[0045] In understanding the scope of the present disclosure, the term “comprising” and its derivatives, as used herein, are intended to be open ended terms that specify the presence of the stated features, elements, components, groups, integers, and/or steps, but do not exclude the presence of other unstated features, elements, components, groups, integers and/or steps. The foregoing also applies to words having similar meanings such as the terms, “including”, “having” and their derivatives. The term “consisting” and its derivatives, as used herein, are intended to be closed terms that specify the presence of the stated features, elements, components, groups, integers, and/or steps, but exclude the presence of other unstated features, elements, components, groups, integers and/or steps. The term “consisting essentially of”, as used herein, is intended to specify the presence of the stated features, elements, components, groups, integers, and/or steps as well as those that do not materially affect the basic and novel characteristic(s) of features, elements, components, groups, integers, and/or steps.

[0046] Terms of degree such as “about” and “approximately” as used herein mean a reasonable amount of deviation of the modified term such that the end result is not significantly changed. These terms of degree should be construed as including a deviation of at least $\pm 5\%$ or at least $\pm 10\%$ of the modified term if this deviation would not negate the meaning of the word it modifies.

[0047] The term “hydrocarbon polystyrene non-solvent” as used herein refers, for example, to a hydrocarbon-based compound or a mixture thereof in which polystyrene is substantially insoluble. The selection of a suitable hydrocarbon polystyrene non-solvent for the processes of the present disclosure can be made by a person skilled in the art. For example, it will be appreciated by a person skilled in the art that most non-polar additives typically found in polystyrene waste (e.g. hexabromocyclododecane and silicone oils) and p-cymene should be substantially soluble in the hydrocarbon polystyrene non-solvent under the conditions used in the processes of the present disclosure to obtain precipitated

polystyrene as well as steps which comprise washing with the hydrocarbon polystyrene non-solvent. It will also be appreciated by a person skilled in the art that it may, for example, be useful to select a hydrocarbon polystyrene non-solvent having a boiling point that is around or slightly above the glass transition temperature (T_g) of the polystyrene waste being recycled.

[0048] The below presented examples are non-limitative and are used to better exemplify the processes of the present disclosure.

[0049] An exemplary process flow diagram for a process of the present disclosure is shown in FIG. 1. The exemplified process **10** is a process for recycling polystyrene waste. Referring to FIG. 1, in the exemplified process **10**, polystyrene waste can be dissolved **12** in p-cymene under conditions to obtain a polystyrene/p-cymene mixture. If, for example, the polystyrene/p-cymene mixture comprises insoluble material, the polystyrene/p-cymene mixture can then optionally be filtered **14** under conditions to remove the insoluble material. The polystyrene/p-cymene mixture can then be added **16** to a first portion of hydrocarbon polystyrene non-solvent under conditions to obtain precipitated polystyrene and a first portion of hydrocarbon waste solution. The precipitated polystyrene can then be separated from the first portion of hydrocarbon waste solution. The dissolving, adding and separating can optionally be repeated. Then, the precipitated polystyrene can be washed **18** with a second portion of hydrocarbon polystyrene non-solvent under conditions to obtain washed polystyrene and a second portion of hydrocarbon waste solution. The washed polystyrene can then be separated from the second portion of hydrocarbon waste solution. The washed polystyrene can then be washed **20** with a third portion of hydrocarbon polystyrene non-solvent under conditions to obtain twice-washed polystyrene and a third portion of hydrocarbon waste solution. The twice-washed polystyrene can then be separated from the third portion of hydrocarbon waste solution. Surplus hydrocarbon waste solution can then optionally be removed by wringing and/or compressing the twice-washed polystyrene. The twice-washed polystyrene can then optionally be dried **22** under conditions to obtain dried polystyrene. The dried polystyrene can then optionally be packaged **24**, for example the process can further comprise processing the dried polystyrene under conditions to obtain polystyrene pellets and the polystyrene pellets can be packaged **24**. The p-cymene and/or the hydrocarbon polystyrene non-solvent can optionally be recovered **26**, for example by a process comprising distilling the first portion of hydrocarbon waste solution, the second portion of hydrocarbon waste solution and/or the third portion of hydrocarbon waste solution under conditions to obtain p-cymene and/or hydrocarbon polystyrene non-solvent. The p-cymene can optionally be recycled for use in the dissolving **12**. The hydrocarbon polystyrene non-solvent can optionally be recycled for use in the adding **16**, the first washing **18** and/or the second washing **20**.

[0050] For example, the polystyrene/p-cymene mixture can comprise polystyrene in an amount equal to or less than about 33 wt %, based on the total weight of the polystyrene/p-cymene mixture.

[0051] For example, the polystyrene/p-cymene mixture can comprise polystyrene in an amount of from about 10 wt % to about 30 wt %, based on the total weight of the polystyrene/p-cymene mixture.

[0052] For example, the polystyrene/p-cymene mixture can comprise polystyrene in an amount of from about 14 wt % to about 28 wt %, based on the total weight of the polystyrene/p-cymene mixture.

[0053] For example, the polystyrene/p-cymene mixture can comprise polystyrene in an amount of from about 15 wt % to about 27 wt %, based on the total weight of the polystyrene/p-cymene mixture.

[0054] For example, the polystyrene/p-cymene mixture can comprise polystyrene in an amount of from about 16 wt % to about 25 wt %, based on the total weight of the polystyrene/p-cymene mixture.

[0055] For example, the polystyrene waste can be dissolved in the p-cymene in a container having a chamber containing the p-cymene and at least one opening to the chamber for adding the polystyrene waste to the p-cymene, and the process can further comprise adding the polystyrene waste to the p-cymene contained in the chamber.

[0056] For example, the container can further comprise a vent.

[0057] For example, the container can further comprise a means to impel the polystyrene waste into the p-cymene.

[0058] For example, the means to impel the polystyrene waste into the p-cymene can comprise a metallic grid inside the container.

[0059] For example, the container can further comprise a means to indicate when capacity of the chamber has been reached.

[0060] For example, the means to indicate when capacity of the container has been reached can be an indicator light.

[0061] For example, the indicator light can be connected to a float switch in the chamber.

[0062] For example, the polystyrene/p-cymene mixture can comprise insoluble material and the process can further comprise filtering the polystyrene/p-cymene mixture under conditions to remove the insoluble material prior to adding the polystyrene/p-cymene mixture to the first portion of hydrocarbon polystyrene non-solvent. For example, the insoluble material can be chosen from a polystyrene/butadiene mixture, copolymers of styrene dust, a sticker, metal, wood, plastic, contaminants and mixtures thereof. For example, the filtering can comprise a multistage filtration process from coarse to fine. For example, butadiene will be soluble in p-cymene unless it has been heavily cross linked.

[0063] For example, the conditions to obtain the precipitated polystyrene and the first portion of hydrocarbon waste solution can comprise adding the polystyrene/p-cymene mixture to the first portion of hydrocarbon polystyrene non-solvent at the boiling point of the hydrocarbon polystyrene non-solvent and agitating for a time for diffusion of the p-cymene from the polystyrene/p-cymene mixture into the hydrocarbon polystyrene non-solvent to proceed to a sufficient extent.

[0064] For example, the time can be from about 5 minutes to about 10 minutes.

[0065] For example, the agitating can comprise stirring with a mechanical stirrer.

[0066] For example, greater than about 90 wt % of the p-cymene in the polystyrene/p-cymene mixture can diffuse into the hydrocarbon polystyrene non-solvent, based on the total weight of the polystyrene/p-cymene mixture.

[0067] For example, the ratio by volume of the first portion of hydrocarbon polystyrene non-solvent to the polystyrene/p-cymene mixture can be from about 2:1 to about 4:1.

[0068] For example, the ratio by volume of the first portion of hydrocarbon polystyrene non-solvent to the polystyrene/p-cymene mixture can be about 3:1.

[0069] For example, the precipitated polystyrene can be separated from the first portion of hydrocarbon waste solution by a process comprising decanting the first portion of hydrocarbon waste solution from the precipitated polystyrene.

[0070] For example, the conditions to obtain the washed polystyrene and the second portion of hydrocarbon waste solution can comprise adding the second portion of hydrocarbon polystyrene non-solvent to the precipitated polystyrene at the boiling point of the hydrocarbon polystyrene non-solvent and agitating for a time for diffusion of the p-cymene from the precipitated polystyrene into the hydrocarbon polystyrene non-solvent to proceed to a sufficient extent.

[0071] For example, the time can be from about 1 minute to about 15 minutes. For example, the time can be about 10 minutes. For example, the time can be from about 2 minutes to about 5 minutes. For example, the agitating can comprise stirring with a mechanical stirrer.

[0072] For example, the washed polystyrene can comprise less than about 0.3 wt % p-cymene. For example, the washed polystyrene can comprise less than about 0.1 wt % p-cymene.

[0073] For example, the ratio by volume of the second portion of hydrocarbon polystyrene non-solvent to the precipitated polystyrene can be from about 1:2 to about 2:1. For example, the ratio by volume of the second portion of hydrocarbon polystyrene non-solvent to the precipitated polystyrene can be about 1:1.

[0074] For example, the washed polystyrene can be separated from the second portion of hydrocarbon waste solution by a process comprising decanting the second portion of hydrocarbon waste solution from the washed polystyrene.

[0075] For example, the conditions to obtain the twice-washed polystyrene and the third portion of hydrocarbon waste solution can comprise adding the third portion of hydrocarbon polystyrene non-solvent to the washed polystyrene at the boiling point of the hydrocarbon polystyrene non-solvent and agitating for a time for diffusion of the p-cymene from the washed polystyrene into the hydrocarbon polystyrene non-solvent to proceed to a sufficient extent.

[0076] For example, the time can be from about 1 minute to about 10 minutes. For example, the time can be about 5 minutes. For example, the agitating can comprise stirring with a mechanical stirrer.

[0077] For example, the twice-washed polystyrene can comprise less than about 0.1 wt % p-cymene. For example, the twice-washed polystyrene can comprise less than about 0.05 wt % p-cymene.

[0078] For example, the ratio by volume of the third portion of hydrocarbon polystyrene non-solvent to the washed polystyrene can be from about 1:2 to about 2:1. For example, the ratio by volume of the third portion of hydrocarbon polystyrene non-solvent to the washed polystyrene can be about 1:1.

[0079] For example, the twice-washed polystyrene can be separated from the third portion of hydrocarbon waste

solution by a process comprising decanting the third portion of hydrocarbon waste solution from the twice-washed polystyrene.

[0080] For example, after separating the twice-washed polystyrene from the third portion of hydrocarbon waste solution and prior to drying, the process can further comprise removing surplus hydrocarbon waste solution by wringing and/or compressing the twice-washed polystyrene.

[0081] For example, at least one of the first portion of hydrocarbon polystyrene non-solvent, the second portion of hydrocarbon polystyrene non-solvent and the third portion of hydrocarbon polystyrene non-solvent can comprise, consist essentially of or consist of a hydrocarbon polystyrene non-solvent having a boiling point at 1 atm of pressure of from about 98° C. to about 110° C. or about 105° C. to about 110° C.

[0082] For example, the first portion of hydrocarbon polystyrene non-solvent, the second portion of hydrocarbon polystyrene non-solvent and the third portion of hydrocarbon polystyrene non-solvent can comprise, consist essentially of or consist of a C₆-C₈ alkane or a petroleum distillate.

[0083] For example, the first portion of hydrocarbon polystyrene non-solvent, the second portion of hydrocarbon polystyrene non-solvent and the third portion of hydrocarbon polystyrene non-solvent can comprise, consist essentially of or consist of a C₆-C₈ alkane.

[0084] For example, the first portion of hydrocarbon polystyrene non-solvent, the second portion of hydrocarbon polystyrene non-solvent and the third portion of hydrocarbon polystyrene non-solvent can comprise, consist essentially of or consist of a petroleum distillate.

[0085] For example, the first portion of hydrocarbon polystyrene non-solvent, the second portion of hydrocarbon polystyrene non-solvent and the third portion of hydrocarbon polystyrene non-solvent can comprise, consist essentially of or consist of n-heptane.

[0086] For example, the first portion of hydrocarbon polystyrene non-solvent, the second portion of hydrocarbon polystyrene non-solvent and the third portion of hydrocarbon polystyrene non-solvent can all be the same hydrocarbon polystyrene non-solvent.

[0087] For example, the first portion of hydrocarbon polystyrene non-solvent, the second portion of hydrocarbon polystyrene non-solvent and the third portion of hydrocarbon polystyrene non-solvent can all be different hydrocarbon polystyrene non-solvents.

[0088] For example, the second portion of hydrocarbon polystyrene non-solvent and the third portion of hydrocarbon polystyrene non-solvent can be the same hydrocarbon polystyrene non-solvent and the first portion of hydrocarbon polystyrene non-solvent can be a different hydrocarbon polystyrene non-solvent.

[0089] For example, the second portion of hydrocarbon polystyrene non-solvent and the third portion of hydrocarbon polystyrene non-solvent can comprise, consist essentially of or consist of n-heptane and the first portion of hydrocarbon polystyrene non-solvent can comprise, consist essentially of or consist of n-hexane.

[0090] For example, the conditions to obtain the dried polystyrene can comprise drying the twice-washed polystyrene for a temperature and time for removal of remaining hydrocarbon polystyrene non-solvent to proceed to a sufficient extent. For example, the twice-washed polystyrene can

be dried at a temperature of from about 115° C. to about 125° C. For example, the twice-washed polystyrene can be dried at a temperature of about 120° C.

[0091] For example, the conditions to obtain the dried polystyrene can comprise drying the twice-washed polystyrene using an infrared dryer for a time for removal of remaining hydrocarbon polystyrene non-solvent to proceed to a sufficient extent.

[0092] For example, the polystyrene waste can comprise polar impurities and the process can further comprise washing the polystyrene waste with a polar organic solvent under conditions to remove the polar impurities.

[0093] For example, the polar organic solvent can comprise, consist essentially of or consist of methanol or ethanol. For example, the polar organic solvent can comprise, consist essentially of or consist of methanol. For example, the polar organic solvent can comprise, consist essentially of or consist of ethanol.

[0094] For example, the process can further comprise distilling the first portion of hydrocarbon waste solution, the second portion of hydrocarbon waste solution and/or the third portion of hydrocarbon waste solution under conditions to obtain p-cymene and/or hydrocarbon polystyrene non-solvent.

[0095] For example, the process can further comprise recycling the p-cymene for use in the dissolving step.

[0096] For example, the process can further comprise recycling the hydrocarbon polystyrene non-solvent for use in the adding step, the first washing step and/or the second washing step.

[0097] For example, the process can further comprise processing the dried polystyrene under conditions to obtain polystyrene pellets. For example, the conditions to obtain the polystyrene pellets can comprise extruding the dried polystyrene at a temperature of from about 140° C. to about 160° C.

[0098] For example, the process can further comprise packaging the polystyrene pellets. Suitable means to package the polystyrene pellets can be selected by a person skilled in the art.

[0099] For example, the process can further comprise adding an antioxidant during the dissolving step, the adding step, the first washing step and/or the second washing step. For example, the process can further comprise adding an antioxidant during the dissolving step.

[0100] For example, the antioxidant can comprise, consist essentially of or consist of octadecyl-3-(3,5-di-tert-butyl-4-hydroxyphenyl)-propionate.

[0101] For example, the antioxidant can be added in an amount of from about 0.1 wt % to about 2 wt %, based on the total weight of the polystyrene. For example, the antioxidant can be added in an amount of about 1 wt %, based on the total weight of the polystyrene.

[0102] For example, the antioxidant can be added in an amount of from about 0.5 wt % to about 2 wt %, based on the total weight of the polystyrene. For example, the antioxidant can be added in an amount of about 1 wt %, based on the total weight of the polystyrene.

[0103] For example, the process can further comprise adding an additive for lowering or increasing melt flow index to the polystyrene/p-cymene mixture.

[0104] For example, the additive for lowering melt flow index can comprise, consist essentially of or consist of lime, talc, silicon oxide, silicon hydroxide, aluminum oxide, alu-

minum hydroxide, or combinations thereof. For example, the additive for lowering melt flow index can comprise, consist essentially of or consist of lime. For example, the additive for lowering melt flow index can comprise, consist essentially of or consist of talc.

[0105] For example, the additive for increasing melt flow index can comprise, from about 0.0001 wt % to about 1 wt % of silicon oil. For example, silicon oil can be added from about 0.01 wt % to 0.1 wt %.

[0106] For example, the additive for lowering melt flow index can be added in an amount of from about 0.5 wt % to about 25 wt %, based on the total weight of the polystyrene. For example, the additive for lowering melt flow index can be added in an amount of about 0.5 wt % to about 5 wt %, based on the total weight of the polystyrene. For example, the additive for lowering melt flow index can be added in an amount of about 1 wt %, based on the total weight of the polystyrene.

[0107] For example, the polystyrene waste can be post-industrial waste, post-consumer waste or a combination thereof. For example, the polystyrene waste can be post-industrial waste. For example, the polystyrene waste can be post-consumer waste. For example, the polystyrene waste can be a combination of post-industrial waste and post-consumer waste.

[0108] For example, the polystyrene waste can comprise, consist essentially of or consist of expanded polystyrene. For example, the polystyrene waste can comprise, consist essentially of or consist of white, expanded polystyrene. For example, the polystyrene waste can comprise, consist essentially of or consist of compressed polystyrene.

[0109] For example, the process can further comprise grinding the polystyrene waste prior to dissolving.

[0110] For example, the polystyrene/p-cymene mixture can be obtained at a first location and the process can further comprise transporting the polystyrene/p-cymene mixture to a second location wherein subsequent steps in the process can be carried out.

[0111] The present disclosure also includes recycled polystyrene prepared according to a process for recycling polystyrene waste of the present disclosure.

[0112] For example, the waste polystyrene can comprise other copolymers. For example, it can comprise butadiene, (HIPS), be a copolymer of styrene and acrylonitrile (SAN) or acrylonitrile, butadiene and styrene (ABS).

[0113] For example, the waste polystyrene can be a polystyrene-co-butadiene copolymer.

[0114] For example, embodiments relating to the recycled polystyrene of the present disclosure can be varied as discussed herein in respect of the processes for recycling polystyrene waste of the present disclosure.

[0115] For example, the recycled polystyrene can have a melt flow index of less than about 40 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 3 to about 30 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 3 to about 25 g/10 min. For example, the recycled polystyrene can have a melt flow index of less than about 25 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 10 to about 20 g/10 min.

[0116] For example, the recycled polystyrene can have a melt flow index of less than about 40 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 5 to about 30 g/10 min. For example, the recycled

polystyrene can have a melt flow index of from about 5 to about 25 g/10 min. For example, the recycled polystyrene can have a melt flow index of less than about 25 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 10 to about 20 g/10 min.

[0117] For example, the recycled polystyrene can have a melt flow index of less than about 30 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 3 to about 25 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 1 to about 15 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 10 to about 15 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 5 to about 12 g/10 min. For example, the recycled polystyrene can have a melt flow index of from about 2 to about 12 g/10 min. For example, the recycled polystyrene can have a melt flow index of less than about 15 g/10 min. For example, the recycled polystyrene can have a melt flow index of less than about 12 g/10 min.

[0118] For example, the recycled polystyrene can have a content of additive(s) of less than about 5 wt %.

[0119] For example, the recycled polystyrene can have a content of additive(s) of less than about 3 wt %.

[0120] For example, the recycled polystyrene can have a content of additive(s) of less than about 2 wt %.

[0121] For example, the recycled polystyrene can have a content of additive(s) of less than about 1 wt %.

[0122] For example, the recycled polystyrene can have a content of additive(s) of less than about 0.5 wt %.

[0123] For example, the recycled polystyrene can have a content of additive(s) of less than about 0.1 wt %.

[0124] For example, the recycled polystyrene can have a content of additive(s) of less than about 0.05 wt %.

[0125] For example, the recycled polystyrene can have a content of additive(s) of about 0.05 wt % to about 1 wt %.

[0126] For example, the recycled polystyrene can have a content of additive(s) of about 0.1 wt % to about 1 wt %.

[0127] For example, the recycled polystyrene can have a filler content of less than about 5 wt %.

[0128] For example, the recycled polystyrene can have a filler content of less than about 3 wt %.

[0129] For example, the recycled polystyrene can have a filler of less than about 2 wt %.

[0130] For example, the recycled polystyrene can have a filler content of less than about 1 wt %.

[0131] For example, the recycled polystyrene can have a filler content of less than about 0.5 wt %.

[0132] For example, the recycled polystyrene can have a filler content of less than about 0.1 wt %.

[0133] For example, the recycled polystyrene can have a filler content of less than about 0.05 wt %.

[0134] For example, the recycled polystyrene can have a filler content of about 0.05 wt % to about 1 wt %.

[0135] For example, the recycled polystyrene can have a filler content of about 0.1 wt % to about 1 wt %.

[0136] For example, the filler can be an inorganic filler.

[0137] For example, the recycled polymer can be obtained by recycling a polystyrene waste by involving a treatment with a solvent and a non-solvent.

[0138] For example, the recycled polymer can be obtained by recycling a polystyrene waste by involving a treatment with a solvent that is p-cymene and a hydrocarbon polystyrene non-solvent that is C₆-C₈ alkane or mixtures thereof.

[0139] For example, the polystyrene waste can comprises polystyrene having an average molecular weight of about 200,000 to about 350,000 g/mol.

[0140] For example, the polystyrene waste can comprises polystyrene having an average molecular weight of about 230,000 to about 260,000 g/mol.

[0141] For example, the polystyrene waste can comprises polystyrene having an average molecular weight of about 260,000 to about 300,000 g/mol.

[0142] For example, the recycled polystyrene can be transparent.

[0143] For example, the recycled polystyrene can be clear.

[0144] For example, the recycled polystyrene can be substantially transparent.

[0145] For example, the recycled polystyrene can be at least substantially transparent.

[0146] For example, the recycled polystyrene can be obtained by any of the processes and/or methods described in the present disclosure.

[0147] There is provided the use of the recycled polystyrenes of the present disclosure for preparing a mixture comprising said recycled polystyrene and a virgin polystyrene.

[0148] There is also provided a method of using the recycled polystyrenes of the present disclosure comprising mixing the recycled polystyrene with a virgin polystyrene.

[0149] For example, the mixture can comprise at least about 10 wt %, at least about 15 wt %, at least about 20 wt %, about 1 wt % to about 50 wt %, about 5 wt % to about 50 wt %, or about 5 wt % to about 30 wt % of the recycled polystyrene.

[0150] For example, the recycled polystyrene can comprise other copolymers. For example, it can comprise butadiene (HIPS), be a copolymer of styrene and acrylonitrile (SAN) or acrylonitrile, butadiene and styrene (ABS).

[0151] For example, the recycled polystyrene can be a polystyrene-co-butadiene copolymer.

[0152] According to another aspect of the present disclosure, there is provided a method for managing recycling of polystyrene comprising:

[0153] providing a customer with at least one container for storing polystyrene waste;

[0154] providing the customer with instructions on how dissolving the polystyrene waste into the at least one container by using at least one solvent;

[0155] optionally monitoring concentration of the polystyrene waste into the at least one solvent and/or a volume of liquid and/or solid contained in the at least one container;

[0156] removing at least a portion of a liquid content contained in the at least one container and that comprises the polystyrene waste dissolved into the at least one solvent;

[0157] optionally adding a quantity of the at least one solvent into the at least one container;

[0158] transporting the at least a portion of the liquid content contained in the at least one container into a facility whereat the polystyrene waste is recycled or treated for converting the polystyrene waste into recycled polystyrene.

[0159] According to another aspect of the present disclosure, there is provided a method for storing polystyrene waste and recycling the polystyrene, the method comprising:

- [0160] dissolving a polystyrene waste into at least one container by using at least one solvent;
- [0161] optionally monitoring concentration of the polystyrene waste into the at least one solvent and/or a volume of liquid and/or solid contained in the at least one container;
- [0162] removing at least a portion of a liquid content contained in the at least one container and that comprises the polystyrene waste dissolved into the at least one solvent;
- [0163] optionally adding a quantity of the at least one solvent into the at least one container;
- [0164] transporting the at least a portion of the liquid content contained in the at least one container into a facility whereat the polystyrene waste is recycled or treated for converting the polystyrene waste into recycled polystyrene.
- [0165] For example, recycling of the polystyrene or converting of the polystyrene waste into recycled polystyrene is carried out by a method as defined in the present disclosure.
- [0166] For example, the transporting can be carried out by tank truck transportation.
- [0167] For example, the transporting can be carried out by tank train transportation.
- [0168] For example, the transporting can be carried out by means of a pipe.
- [0169] For example, the transporting can be carried out by means of a pipeline.

EXAMPLES

Example 1

Recycling of Polystyrene Waste

[0170] In the present studies, polystyrene waste was recycled in a process which included five main steps, according to the following sequence:

- [0171] 1. Solubilisation of the polystyrene in p-cymene
- [0172] 2. Filtration of the PS/p-cymene mixture to remove undissolved materials
- [0173] 3. Washing with a non-polar solvent that is a non-solvent to PS
- [0174] 4. Drying
- [0175] 5. Forming and packaging PS plastic beads

[0176] In the first step (solubilisation), polystyrene waste such as industrial post-consumption expanded polystyrene was dissolved in p-cymene (1-methyl-4-(1-methylethyl) benzene; one of the three possible isomers of cymene, and the only one that is also present in nature). The solubility limit of the polystyrene in the p-cymene is 33% (w/w) or 28.5% (v/v) at room temperature and the density of the polystyrene/p-cymene mixture reaches a value of 1.06 kg/L which is higher than the density of pure p-cymene which is 0.86 kg/L. It is possible to reach the solubility limit, but the dissolution rate is decreased by a factor of 3.

[0177] In the solubilisation step, the polystyrene loses its structural properties and a reduction of the volume it occupies occurs. Various non-polar additives including hexabromocyclododecane (HBCD) and the silicone oils used in its manufacture are dissolved in the p-cymene solvent. This step was performed in a closed, vented tank called the dissolution module. An object of the module is to maximize the amount of polystyrene that can be solubilised within a given period of time. For example, a metallic grid inside the

dissolution module can push the expanded polystyrene objects into p-cymene which can reduce, for example, dissolution time from hours to minutes.

[0178] The third step (washing) had objectives which included: (1) the precipitation of the polystyrene; (2) recovery of the p-cymene in order to reuse it in step 1; and (3) elimination of the different additives that may alter the mechanical properties of the recycled polystyrene.

[0179] This step comprised first precipitating the solubilised polystyrene with hexane, heptane or any other hydrocarbon with a suitable boiling point. While heptane was observed to provide the best results in the washing step, other hydrocarbons may also be useful. Hexane and octane were tested in the present studies. Petroleum distillates with a boiling point of from about 100° C. to about 120° C. may also be useful and may provide, for example, reduced process and/or operating costs.

[0180] For example, the solvent may have a boiling point around or slightly above the T_g for the polystyrene waste. While the T_g of polystyrene may vary, for example as a function of molecular weight, the T_g for the polystyrene waste is typically about 98° C. It will be appreciated by a person skilled in the art that there is typically only a small variation of T_g with molecular weight or polydispersity for most polystyrenes used in the fabrication of industrial polystyrene objects. Accordingly, the solvent may have a boiling point up to about 110° C., for example a boiling point of about 105° C. to about 110° C. at 1 atm pressure. A suitable hydrocarbon solvent may, for example enable more than 90% of the p-cymene to migrate into it and is a non-solvent for polystyrene.

[0181] To carry out the first washing step (i.e. precipitating the polystyrene), the mixture of solubilised polystyrene in p-cymene was slowly poured into a double wall stainless steel tank containing the hydrocarbon at its boiling temperature. In an exemplary experiment hexane at its boiling temperature (69° C.) was used for this step. In other exemplary experiments heptane at its boiling temperature (98° C.) was used for this step. The entire mixture was moderately stirred through use of a mechanical stirrer. The volume of polystyrene/p-cymene solution added to the hydrocarbon was in a polystyrene/p-cymene solution to hydrocarbon ratio by volume of 1:3. Under these conditions, the polystyrene precipitated in the form of a sticky white paste. The stirring time (from about 5 minutes to about 10 minutes) allowed for a useful amount of diffusion of the p-cymene into the hydrocarbon. Afterward, the solvent mixture supernatant was removed by a simple decantation, after which it was possible to perform a second washing of the precipitated polystyrene.

[0182] The second washing was performed in the same tank with heptane. A defined volume of heptane having a boiling temperature of 98° C. was introduced into the tank, according to a polystyrene : heptane ratio by volume of 1:1. The whole mixture was boiled at atmospheric pressure under moderate mechanical stirring over about 2 minutes to about 5 minutes. Using a different hydrocarbon in the second wash than in the first wash increased the malleability of the polystyrene which, for example, increased diffusion of the remaining p-cymene solvent out of the precipitated polystyrene and into the hydrocarbon. Thereafter, the supernatant solvent mixture was removed by a simple decantation.

According to the calculations of washing efficiency, less than 0.1% p-cymene remained in the precipitated polystyrene at this stage.

[0183] A third washing with boiling heptane was used in order to further reduce the presence of p-cymene in the polystyrene. The presence of residual solvent may, for example, affect the melt index, also called melt flow index (MFI). The degree of washing efficiency is inversely proportional to the MFI. The washing conditions used were the same as in the second washing step.

[0184] The recovered solvent mixture contained hexane, heptane, p-cymene and/or any other hydrocarbon solvent used as well as non-polar additives extracted from the PS. The proportion of p-cymene and additives was higher in the first solvent mixture than in the second and third solvent mixtures. Fractional distillation was used to separate the different products. The p-cymene was reused for the solubilisation step while hexane and heptane were reused in the washing steps. The recovered additives were considered to be waste for disposal.

[0185] The fourth step (drying) comprised drying the polystyrene paste, which contained about 5-37% heptane in a dryer at a temperature of 120° C. An objective was to remove substantially all of the remaining solvent without altering the quality of the polymer.

[0186] The fifth step (packaging) comprised cutting the dried polystyrene into small pellets suitable for the distribution of the product to customers. A pelletizer as commonly used in the industry was utilized to control the size and the shape of the final product.

[0187] In order to limit the PS degradation which is mainly due to oxidation as observed during the drying and extrusion steps, a commercial antioxidant such as Irganox™ 1076 (octadecyl-3-(3,5-di-tert.butyl-4-hydroxyphenyl)-propanoate) can be added in a proportion of about 1%, based on the weight of the polystyrene. This compound is acceptable for food applications, has a melting point of 50° C. and can be added at various times in the process: i.e. with the p-cymene, in the washing steps and/or at the final extrusion step.

[0188] Table 1 shows the results from recycling various types of waste polystyrene using steps of the above-described process.

TABLE 1^[1]

	Irganox 1076		Melt Flow Index ^[3] (g/10 min)		Product	Drying ^[4] (hours)
	(1 wt %)		Re-	Re-		
mixture ^[2]	yes	no	sult 1	sult 2	Color	
Polystyrene cooler (33 wt %)	x		25.2	—	slightly yellowish	120
Polystyrene cooler (33 wt %)		x	16.5	14.8	slightly yellowish	120
Poly(styrene-co- butadiene) (1.22 wt %)						
Polystyrene cooler (33 wt %)	x		11.6	—	white	108
Poly(styrene-co- butadiene) (1.22 wt %)						

TABLE 1^[1]-continued

	Irganox 1076		Melt Flow Index ^[3] (g/10 min)		Product	Drying ^[4] (hours)
	(1 wt %)		Re-	Re-		
mixture ^[2]	yes	no	sult 1	sult 2	Color	
PS-cymene						
Polystyrene cooler (33 wt %)		x	17.7	16.7	yellowish	120
Poly(styrene-co- butadiene) (4.86 wt %)						
Polystyrene cooler (33 wt %)	x		12.3	—	white	108
Poly(styrene-co- butadiene) (4.86 wt %)						
Poly(styrene-co- butadiene) (20 wt %)	x		13.3	—	slightly yellowish	108
Poly(styrene-co- butadiene) (20 wt %)		x	17.2	—	very yellow	108
Polystyrene regrind beads ^[5] (30 wt %)		x	6.8	—	greyish	120
Polystyrene cooler (15 wt %)		x	10.3	—	white	120
Polystyrene regrind beads (15 wt %)						
Polystyrene cooler (16.5 wt %)		x	10.6	9.9	white	120
Polystyrene cooler (16.5 wt %)	x		6.28	—	white	48
Polystyrene cooler (20 wt %)	x		10	—	white	48
Polystyrene cooler (24 wt %)	x		11.8	—	white	48
Polystyrene cooler (28 wt %)	x		11.7	—	white	48
Polystyrene black tray (100 wt %)	x		3.2	—	black	0
Polystyrene black tray (33 wt %)		x	5.5	—	black	120
Polystyrene blue insulation (33 wt %)		x	14.3	—	blue	120
Polystyrene blue insulation (33 wt %)	x		13.2	—	blue	120
Dense polystyrene log (100 wt %)		x	38.7	—	white	0
Dense polystyrene log (33 wt %)	x		6.27	6.27	white	48
wrung and granulated before drying						
Polystyrene cooler (33 wt %)	x		9.2	—	white	120
heated at 80° C. in first wash						
Polystyrene cooler (33 wt %)	x		7.98	7.6	white	48
wrung and granulated before drying						
Polystyrene cooler (100 wt %)		x	36.8	—	white	0
Polystyrene blue insulation (100 wt %)		x	20	—	blue	0
Polystyrene cooler (33 wt %)	x		8.1	—	white	48
Lime (1 wt %) ^[6]						
Polystyrene cooler (33 wt %)	x		7.06	—	white- yellow	48
Lime (5 wt %) ^[6]						
Polystyrene cooler (33 wt %)	x		6.13	—	yellowish	48
Lime (10 wt %) ^[6]						

TABLE 1^[1]-continued

	Irganox 1076		Melt Flow Index ^[3]		Product	Drying ^[4]
	(1 wt %)	Re-	Re-	Product		
mixture ^[2]	yes	no	sult 1	sult 2	Color	(hours)
Polystyrene cooler (33 wt %)	x		4.88	—	yellow	48
Lime (25 wt %) ^[6]						
Polystyrene cooler (33 wt %)	x		13.2	—	white	72
Talc (1 wt %) ^[6]						
Polystyrene cooler (33 wt %)	x		12.7	—	greyish	72
Talc (5 wt %) ^[6]						
Polystyrene cooler (33 wt %)	x		17.5	—	greyish	72
Talc (10 wt %) ^[6]						
Polystyrene cooler (33 wt %)	x		11.3	—	grey	72
Talc (25 wt %) ^[6]						
Polystyrene sample that contains HBCD (100 wt %)		x	25.2	—	white	0
Polystyrene sample that contains HBCD (20 wt %)	x		4.9	6.6	white	0

^[1]All trials were performed using three washes with heptane in ratios by volume of heptane:PS/cymene mixture of 3:1, 1:1 and 1:1, respectively using extraction times of 15 minutes, 10 minutes and 5 minutes, respectively.

^[2]The mixture for all trials also includes p-cymene to make up 100 wt % total.

^[3]ASTM D1238 standard has been used for each result.

^[4]In an oven at 120° C. using an aluminum plate having a diameter of 8 cm. The polystyrene dries with a thickness of <5 mm unless otherwise specified.

^[5]The regrind beads come from trays and have already a lower melt flow index. That quality of polystyrene decreases the melt flow index in the mixture because of this high molecular weight.

^[6]The lime and talc were added in the PS-cymene mixture before the washing.

[0189] The Irganox 1076 has the property of protection against oxidation. Many results showed a helpful effect on the product color. The addition of butadiene in styrene results in the formation of polystyrene-co-butadiene copolymer showing a much better resistance to impact than pure polystyrene. The butadiene units in polystyrene-co-butadiene could be used to create a three-dimensional matrix with the polymer chains. By creating links between the polymeric chains, the molecular weight increases and then the melt flow index must decrease. The poly(styrene-co-butadiene) polymer contains 4% of butadiene. A small amount of butadiene must be enough to see a difference on the melt flow index but the results were inconclusive.

[0190] As can be seen in Table 1, the experiments show better results when the polystyrene-cymene mixture has a lower concentration. The dilution of the mixture into the non-solvent increases the diffusion and thus the extraction of the solvent. The addition of solid particles in a polymer mixture is a common practice in the polystyrene industry to reduce cost or improve mechanical properties.

[0191] Table 2 shows the results of including the antioxidant Irganox 1076 at different steps in the process.

TABLE 2

Addition of 1 wt % Irganox 1076 in a polystyrene cooler-cymene mixture	Melt Flow Index ^[1]		Product
	(g/10 min)	Result 2	
(33 wt % polystyrene)	Result 1	Result 2	Color
Added directly in polystyrene/p-cymene mixture	7.6	8.2	white

TABLE 2-continued

Addition of 1 wt % Irganox 1076 in a polystyrene cooler-cymene mixture	Melt Flow Index ^[1]		Product
	(g/10 min)	Result 2	
(33 wt % polystyrene)	Result 1	Result 2	Color
Added to the heptane in first wash	10.6	—	white
Added to the heptane in third wash	13.5	—	white

^[1]ASTM D1238 standard has been used for each result.

[0192] As can be seen in Table 2, the product color for all samples was white. The MFI was lowest for the product produced from a process wherein the Irganox 1076 was added to the polystyrene/p-cymene mixture.

[0193] Table 3 shows the impact of a mechanical conditioning and the evolution of the drying steps. There is a difference of about 37.5% between the washed and the dry polystyrene. At this point, all the heptane has been evaporated. Also, only with a wringing and a granulating step, it is possible to eliminate 14% of the heptane from the washed polystyrene. The heptane is recovered in the process to repeat the washing treatment. The source of polystyrene does not have any significant effect in the drying step in these studies.

TABLE 3^[1]

	Mass (g)		Heptane Evapo-rated ^[3] (wt %)
	Before Mec. cond.	After Mec. Cond.	
PS-cymene mixture ^[2]			
Polystyrene cooler (33 wt %)	14.04	12.09	13.9
Compressed polystyrene log (33 wt %)	12.58	10.79	14.2
	After Drying 15 hours	After Drying 17 hours	
Polystyrene cooler (33 wt %)	—	8.81	37.3
Compressed polystyrene log (33 wt %)	7.93	—	37.0
	After Drying 22 hours	After Drying 24 hours	
Polystyrene cooler (33 wt %)	—	8.79	37.4
Compressed polystyrene log (33 wt %)	7.92	—	37.0
	After Drying 46 hours	After Drying 48 hours	
Polystyrene cooler (33 wt %)	—	8.77	37.5
Compressed polystyrene log (33 wt %)	7.89	—	37.3

^[1]All drying carried out in an oven at 120° C.

^[2]The mixture for all trials also includes p-cymene to make up 100 wt % total.

^[3]Values provided as wt % based on the total mass before granulation.

Example 2

[0194] Further tests have been made for preparing recycled polystyrene. Such tests have been made by using a process similar as previously described in Example 1 but without any addition of Irganox. These tests have been made

at a lab scale on real white expanded polystyrene used for packaging.

[0195] The results of such tests are thus provided below.

[0196] DSC (ASTM D3418): T_g=108.1° C.

[0197] IZOD Impact test (ASTM D4812): 4 tests with average Impact of 13.78 KJ/m² and 175.72 J/m and Energy=0.55 J with complete rupture.

TABLE 4

MFI tests MFI (ASTM D1238 on a Dynisco D4002 at 200° C.):	
Test	MFI (g/10 min)
1	11.44
2	11.01
3	10.70
Average	11.05

Ash Content (ASTM D5630): 0.10

TABLE 5

VICAT tests VICAT Softening Temperature (ASTM D1525):		
Test	Thickness (mm)	VICAT softening Temperature (° C.)
1	3.01	106.2
2	3.04	106.1
3	3.03	106.9

TABLE 6

VICAT tests Traction Test (ASTM D638):					
Test	Thickness (mm)	Width (mm)	Maximum stress (MPa)	Elasticity Module (MPa)	Elongation at rupture (%)
1	3.11	12.71	52.4	3095	2.4
2	3.11	12.75	52.2	2992	2.4
3	3.13	12.72	51.7	2990	2.4
4	3.11	12.72	51.7	3114	2.4
5	3.12	12.71	51.0	3029	2.2
Average			51.8	3044	2.4
Standard deviation			0.5	58	0.1

Example 3

[0198] Further tests have been made for preparing recycled polystyrene. Such tests have been made by using a process similar as previously described in Example 1. The process was carried out in continuous and a scale up was made to bring the process from a laboratory level to an industrial level. For example, the process allowed for preparing about 10 kg of recycled polystyrene per hour. It has to be noted that the limiting factors in the present case regarding the productivity of the process does not reside in the process per se but rather in certain types of equipment used for carrying out the process. By acquiring some equipment allowing for receiving larger volumes or greater quan-

tity, the overall process can easily reach about 500 to about 1000 kg recycled polystyrene per hour.

[0199] The results of such tests are thus provided below.

MFI=22 g/10 min according to ASTM D1238-13 standard.

[0200] While a description was made with particular reference to the specific embodiments, it will be understood that numerous modifications thereto will appear to those skilled in the art. Accordingly, the above description and accompanying drawings should be taken as specific examples and not in a limiting sense.

1. A recycled polystyrene having a melt flow index of less than about 25 g/10 min measured according to ASTM D1238-13 standard and a content of additive(s) of less than about 1 wt %.

2. The recycled polystyrene of claim 1, wherein said recycled polystyrene has a content of additive(s) of less than about 0.5 wt %.

3-6. (canceled)

7. The recycled polystyrene of claim 1, wherein said recycled polystyrene has a melt flow index of from about 1 to about 10 g/10 min.

8-18. (canceled)

19. The recycled polystyrene of claim 7, wherein said recycled polystyrene has an ash content of less than about 1 wt %, measured according to ASTM D5630-13 standard.

20-43. (canceled)

44. A process for recycling polystyrene waste, comprising:

dissolving said polystyrene waste in p-cymene under conditions to obtain a polystyrene/p-cymene mixture; adding said polystyrene/p-cymene mixture to a first portion of hydrocarbon polystyrene non-solvent under conditions to obtain precipitated polystyrene and a first portion of hydrocarbon waste solution; separating said precipitated polystyrene from said first portion of hydrocarbon waste solution; optionally repeating said dissolving, adding and separating;

washing said precipitated polystyrene with a second portion of hydrocarbon polystyrene non-solvent under conditions to obtain washed polystyrene and a second portion of hydrocarbon waste solution;

separating said washed polystyrene from said second portion of hydrocarbon waste solution;

washing said washed polystyrene with a third portion of hydrocarbon polystyrene non-solvent under conditions to obtain twice-washed polystyrene and a third portion of hydrocarbon waste solution;

separating said twice-washed polystyrene from said third portion of hydrocarbon waste solution; and

optionally drying said twice-washed polystyrene under conditions to obtain dried polystyrene.

45. (canceled)

46. The process of claim 44, wherein said polystyrene/p-cymene mixture comprises polystyrene in an amount of from about 10 wt % to about 30 wt %, based on the total weight of said polystyrene/p-cymene mixture.

47-56. (canceled)

57. The process of claim 44, wherein said polystyrene/p-cymene mixture comprises insoluble material and said process further comprises filtering said polystyrene/p-cymene mixture under conditions to remove said insoluble material

prior to adding said polystyrene/p-cymene mixture to said first portion of hydrocarbon polystyrene non-solvent.

58-59. (canceled)

60. The process of claim **44**, wherein said conditions to obtain said precipitated polystyrene and said first portion of hydrocarbon waste solution comprise adding said polystyrene/p-cymene mixture to said first portion of hydrocarbon polystyrene non-solvent at the boiling point of said hydrocarbon polystyrene non-solvent and agitating for a time for diffusion of said p-cymene from said polystyrene/p-cymene mixture into said hydrocarbon polystyrene non-solvent to proceed to a sufficient extent.

61-62. (canceled)

63. The process of claim **60**, wherein greater than about 90 wt % of said p-cymene in said polystyrene/p-cymene mixture diffuses into said hydrocarbon polystyrene non-solvent, based on the total weight of said polystyrene/p-cymene mixture.

64. The process of claim **44**, wherein the ratio by volume of said first portion of hydrocarbon polystyrene non-solvent to said polystyrene/p-cymene mixture is from about 2:1 to about 4:1.

65-66. (canceled)

67. The process of claim **44**, wherein said conditions to obtain said washed polystyrene and said second portion of hydrocarbon waste solution comprise adding said second portion of hydrocarbon polystyrene non-solvent to said precipitated polystyrene at the boiling point of said hydrocarbon polystyrene non-solvent and agitating for a time for diffusion of said p-cymene from said precipitated polystyrene into said hydrocarbon polystyrene non-solvent to proceed to a sufficient extent.

68-71. (canceled)

72. The process of claim **67**, wherein said washed polystyrene comprises less than about 0.3 wt % p-cymene.

73-76. (canceled)

77. The process of claim **72**, wherein said conditions to obtain said twice-washed polystyrene and said third portion of hydrocarbon waste solution comprise adding said third portion of hydrocarbon polystyrene non-solvent to said washed polystyrene at the boiling point of said hydrocarbon polystyrene non-solvent and agitating for a time for diffusion of said p-cymene from said washed polystyrene into said hydrocarbon polystyrene non-solvent to proceed to a sufficient extent.

78-80. (canceled)

81. The process of claim **77**, wherein said twice-washed polystyrene comprises less than about 0.1 wt % p-cymene.

82-86. (canceled)

87. The process of claim **44**, wherein at least one of said first portion of hydrocarbon polystyrene non-solvent, said second portion of hydrocarbon polystyrene non-solvent and said third portion of hydrocarbon polystyrene non-solvent comprises a hydrocarbon polystyrene non-solvent having a boiling point at 1 atm of pressure of from about 98° C. to about 110° C. or about 105° C. to about 110° C.

88-89. (canceled)

90. The process of claim **44**, wherein said first portion of hydrocarbon polystyrene non-solvent, said second portion of hydrocarbon polystyrene non-solvent and said third portion

of hydrocarbon polystyrene non-solvent comprise a C₆-C₈ alkane or a petroleum distillate.

91-98. (canceled)

99. The process of claim **44**, wherein said first portion of hydrocarbon polystyrene non-solvent, said second portion of hydrocarbon polystyrene non-solvent and said third portion of hydrocarbon polystyrene non-solvent comprise n-heptane.

100-113. (canceled)

114. The process of claim **44**, wherein said conditions to obtain said dried polystyrene comprise drying said twice-washed polystyrene for a temperature and time for removal of remaining hydrocarbon polystyrene non-solvent to proceed to a sufficient extent.

115. The process of claim **114**, wherein said twice-washed polystyrene is dried at a temperature of from about 115° C. to about 125° C.

116-117. (canceled)

118. The process of claim **44**, wherein said polystyrene waste comprises polar impurities and said process further comprises washing said polystyrene waste with a polar organic solvent under conditions to remove said polar impurities.

119. The process of claim **118**, wherein said polar organic solvent comprises methanol or ethanol.

120-153. (canceled)

154. The process of claim **44**, wherein said polystyrene waste is post-industrial waste, post-consumer waste or a combination thereof.

155-174. (canceled)

175. A method for managing recycling of polystyrene comprising:

providing a customer with at least one container for storing polystyrene waste;

providing said customer with instructions on dissolving said polystyrene waste into said at least one container by using at least one solvent;

optionally monitoring concentration of said polystyrene waste into said at least one solvent and/or a volume of liquid and/or solid contained in said at least one container;

removing at least a portion of a liquid content contained in said at least one container and that comprises said polystyrene waste dissolved into said at least one solvent;

optionally adding a quantity of said at least one solvent into said at least one container; and

transporting said at least a portion of said liquid content contained in said at least one container into a facility whereat said polystyrene waste is recycled or treated for converting said polystyrene waste into recycled polystyrene,

wherein recycling of said polystyrene or converting of said polystyrene waste into recycled polystyrene is carried out by a method as defined in claim **44**.

176-179. (canceled)

* * * * *