

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199728651 B2**
(10) Patent No. **724171**

(54) Title
Traffic management methods for mitigation of interference between signals of satellite systems in relative motion

(51)⁶ International Patent Classification(s)
H04B 015/00 H04B 007/185

(21) Application No: **199728651** (22) Application Date: **1997 .07 .14**

(30) Priority Data

(31) Number (32) Date (33) Country
08/684647 1996 .07 .19 US

(43) Publication Date : **1998 .01 .29**

(43) Publication Journal Date : **1998 .01 .29**

(44) Accepted Journal Date : **2000 .09 .14**

(71) Applicant(s)
ATandT Corp.

(72) Inventor(s)
Matthew J. Sherman


(74) Agent/Attorney
SPRUSON and FERGUSON,GPO Box 3898,SYDNEY NSW 2001

(56) Related Art
US 5617100
US 5640386

Traffic Management Methods for Mitigation of Interference Between Signals
of Satellite Systems in Relative Motion

ABSTRACT

5 In an environment of competing satellite systems having in part
shared bands/channel frequencies and at least one system having
non-interfering dedicated bands/channels, interference between shared
bands/channels of the two systems is mitigated by a method where,
interference probabilities are determined to see if the interference
10 criteria are met (313). Interference is minimized by making initial
channel assignments (311) to dedicated channels and assigning shared
channels in accordance with traffic controls and limits (317) are
developed so as not to violate the interference criteria.



AUSTRALIA
PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL



Name and Address
of Applicant: AT&T Corp.
32 Avenue of the Americas
New York New York 10013-2412
UNITED STATES OF AMERICA



Actual Inventor(s): Matthew J. Sherman



Address for Service: Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia



Invention Title: Traffic Management Methods for Mitigation of
Interference Between Signals of Satellite Systems in
Relative Motion

The following statement is a full description of this invention, including the
best method of performing it known to me/us:-

**Traffic Management Methods For Mitigation
Of Interference Between Signals Of
Satellite Systems
In Relative Motion**

5 Field of the Invention

This invention relates to a method of managing satellite network traffic and in particular to mitigating interference between satellite networks sharing in part some common channels or frequencies. It is particularly concerned with shared frequency interference between a satellite network using geosynchronous satellites and a satellite network using non-geosynchronous satellites, or two non-geosynchronous satellite networks.

Background of the Invention

Many proprietary communication networks use adjacent channel frequencies and in some instances share common frequency bands or channels with other communication networks. In wireless communication systems using satellite connections, where the satellites of different communication systems experience relative motion with one another, interference between shared or common channel frequencies may result from the relative motions between the satellites of the different systems as the geometric distance between two or more beamed channels is reduced. This often occurs when one system uses geosynchronous satellites and another system with a shared frequency uses non-geosynchronous satellites. Such interference can also occur between two systems each using non-geosynchronous satellites. This interference between the two systems is a pseudo-random event that produces undesirable interference between the two systems.

Such interference degrades customer service. Proposed limits for such degradation are often expressed in terms of interference to noise ratios and a % time during which the ratios may be exceeded. A set of such limits is now being developed under the auspices of the ITU (i.e., International Telecommunication Union). It is desirable to avoid such interference to maintain customer satisfaction as well as a necessity to meet standards which limits such interference.

Summary of the Invention

According to the invention, in an environment of competing satellite systems (i.e., one system using geosynchronous satellites or non-geosynchronous satellites and the other system using non-geosynchronous satellites) having in part

shared bands/channel frequencies and at least one system having non-interfering dedicated bands/channels, interference between shared bands/channels of the two systems is mitigated by a method as recited in the appended claims.

In an illustrative embodiment of the invention, interference probabilities are determined. Based on these probabilities and interference criteria, as established by managing bodies such as the ITU, network usage limits of shared channels are developed. Using these limits the interference is minimized by, in at least one system making initial channel assignments to dedicated channels and assigning shared channels so as not to violate the interference criteria.

In a specific application utilizing a cascade link band as is known to those skilled in the art, having interference in uplink bands only, downlink EIRP (ie., Effective Isotropic Radiated Power; maximum transmitted power and antenna gain) is maximized to mitigate uplink interference when uplink/downlink bands are only partially populated.

In a cascade noise analysis (ie., no signal regeneration between up and downlink signals) noise effects in the up and down link are additive. Overall link performance is achieved by keeping the sum of these effects less than a given constant. By increasing the downlink power available to a user we reduce the noise effects on the downlink. Since the sum of the noise effects must be less than a constant, decreasing the downlink noise effects allows for an increase in uplink noise effects for the same specified overall performance. This means uplink TX power can be reduced (increasing uplink noise effects) decreasing the amount of interference presented to other systems. By always dividing the available downlink power by the number of users (ie., maximizing downlink power per user) interference during periods of off peak traffic is greatly reduced. The sum of uplink "u" and downlink "d" power ratios equalling regulated "reg" power being related as:

$$\left(\left(\frac{C_o}{N_o} \right)_u^{-1} + \left(\frac{C_o}{N_o} \right)_d^{-1} \right)^{-1} = \left(\frac{C_o}{N_o} \right) \text{REG.}$$

Further mitigation, if necessary, is achieved by limitation of allowable subscriber initiated calls.

According to one aspect of the present invention there is provided a method of mitigating interference between two independent wireless systems due to traffic, a first



system including a geosynchronous satellite connection and a second system including a non-geosynchronous satellite connection and the two independent wireless systems being in relative motion with one another; the first system having dedicated channels which are non-interfering with channels of the second system and shared channels which interfere with channels of the second system due to relative motion of the synchronous and non-synchronous satellites to one another;

the method comprising the steps of:

mitigating the interference by means of traffic flow control of channels shared by the first and second systems, the method steps including:

generating traffic statistics for at least the first system;

initially assigning channel requests in the first system to dedicated channels until the dedicated channels are fully subscribed;

determining acceptable interference criteria;

limiting channel assignments in shared bands of the geosynchronous and non-geosynchronous satellites, until after full subscription of the dedicated channels to accommodate the traffic statistics and the interference criteria, by:

restricting the assignment of channel requests to shared bands to achieve a minimum limitation of blocking of connections; and

limiting the number of users assigned channel requests as subscribers during intervals of high interference probability.

According to another aspect of the present invention there is provided a method of mitigating interference between two independent wireless systems due to traffic, a first system including a geosynchronous satellite connection and a second system including a non-geosynchronous satellite connection and the two independent wireless systems being in relative motion with one another; the first system having dedicated channels which are non-interfering with channels of the second system and shared channels which interfere with channels of the second system due to relative motion of the synchronous and non-synchronous satellites to one another;

the method comprising the steps of:



mitigating the interference by means of traffic flow control of channels shared by the first and second systems, the method steps including:

- generating traffic statistics for at least the first system by entering the traffic patterns and frequency plans onto a process and entering an interference to noise ratio onto the process;
- ascertaining applicable interference criteria;
- creating limits on channel assignments based on the traffic statistics and the interference criteria by creating a traffic mask; and
- assigning channels to abide with the created limits including assigning channels to dedicated channels first and to shared channels in an absence of dedicated channels.

According to still another aspect of the present invention there is provided a method of mitigating interference between two wireless systems due to traffic each having a satellite connection between originating and terminating terminals and the satellites having relative motion with respect to one another;

the method comprising the steps of:

mitigating the interference by means of traffic flow control of channels shared by the first and second systems, the method steps including:

- generating traffic statistics for at least one of the two systems;
- initially assigning channel requests in one of the two systems to dedicated channels until the dedicated channels are fully subscribed;
- determining acceptable interference criteria;
- limiting channel assignments in shared bands, after full subscription of the dedicated channels; to accommodate the traffic statistics and interference criteria, by:
 - restricting assignment of channel requests to shared bands to achieve a minimum limitation of blocking of connections, and
 - limiting the number of assigned channel requests during intervals of high interference probability.

Brief Description of the Drawings

Fig. 1 is a schematic of two independent communication systems, each using satellites, in relative motion with one another and in which interference between channels of the two systems may occur;



Fig. 2 is a schematic block diagram of a stored program processor used for determining criteria of interference;

Fig. 3 is a flow chart of a process for determining limits on channel assignment defined by the interference criteria; and

5 Fig. 4 is a flow chart for controlling channel assignment in accord with limits defined by interference criteria.

Detailed Description

A schematic of two wireless communications systems, as shown in Fig. 1 shows one system as having a geosynchronous connecting satellite 101 and the other system as
10 having a non-geosynchronous connecting satellite 111. The geosynchronous satellite 101 interconnects two ground stations 102 and 103. The non-geosynchronous satellite 111 connects two ground stations 112 and 113. As indicated by arrow 120 the satellite 111 is in relative motion with the satellite 101. This relative motion affects the geometric separation of the air interface paths of the two systems. While at least one system has
15 dedicated air interface channels, some channels are shared by the two systems. Due to the relative motion the shared channels interfere with one another in varying degrees. Such interference will be restricted by issued standards of the ITU and other agencies. It is necessary to limit use of the shared channels in a manner that accommodates the issued standards. While the illustration shows one particular system it is to be understood that
20 the principles of the invention apply to any system where satellites, of differing systems, are in relative motion to one another.

A computing environment as shown in Fig. 2 provides a means of assessing traffic patterns and converting the patterns into a mask for controlling the assignment of channels. A stored program storage 201 is connected to the bus 205 for processing the
25 assignment of channels and the mask defining the limits developed for such assignment. Bus 205 is connected to memory 202 including the traffic statistics of the system to which channels are to be assigned. The statistics are processed by the processor 203 to generate the limits defining mask and to assign channels according to the mask. The assignments generated are transmitted over the bus to the channel assignment controller 204 which
30 outputs the information in tangible form or in a form to automatically control channel assignment.



The process of generating the limits and the mask are shown in the flow chart of FIG. 3. The terms of art specified, below, as defined by the ITU and are known to those skilled in the art. The process begins at start 301 and in block 303 the geometry of the interference, of the two systems, is entered. Interference criteria
5 defined by the appropriate administration is entered in the block 305. The frequency assignments of the two systems identifying dedicated and shared channels and are entered in the block 307. Traffic statistics of the two systems are entered in block 309. Initial traffic masks are created based on the traffic patterns in block 311. The frequency plans may be time varying in which case this process could run in real
10 time to constantly update the traffic mask.

The allowable interference to noise ratio, from the interference criteria, is referenced in the block 313 and a percentage of expected interference for these channels is calculated in the block 313 to see if the interference criteria is met. In
15 decision block 315 a determination is made as to the need for mitigation and if needed limits to attain the mitigation are determined in block 317 by modifying the initial traffic mask of block 311. These limits are achieved by reducing the initial traffic mask of the block 311 being mitigated so as to meet the interference criteria while minimizing impact on capacity and revenue. One method is to reduce all parts
20 mask is modified as per block 317 to achieve mitigation. A controlling traffic mask defining the blocking of channels is output as per block 319. The process is ended in the end terminal 321.

The process of the channel assignment control is shown in the flow chart of FIG. 4. After the start terminal 401 the traffic mask is downloaded as per block
25 403 and the channel assignment loaded as per block 405. The geometry interference is evaluated to see if it allows interference to occur in block 407. If it does (Yes) traffic is reassigned or cleared to meet the interference requirement in block 409. If geometry does not permit interference (No) the flow proceeds to block 411 which responds to requests for channel assignment in the system. Upon the receipt of a
30 channel assignment request, as determined by decision block 411 a determination is made as to availability of a dedicated channel in decision block 413. If no channel request is received (No) flow returns to block 407. If a dedicated channel is available (Yes) the assignment is made as per block 423. Flow returns to block 407 after channel assignment. In the absence of an available dedicated channel (No) a
35 least populated shared channel is located in the block 415 and possible use of this channel for assignment is tested to determine if it fits the mask of traffic channel

assignment (No) as per block 417 a channel is assigned in block 423. If the mask is exceeded (Yes) the request is refused as per block 417 and in block 419 a determination is made as to whether the geometry permits interference. If it does (yes) a channel is assigned in block 423 and if not (No) the channel assignment
5 request is rejected in block 421. Flow returns to the input of decision block 407.

In instances where the channel assignments change in time, the process may be made adaptive by running the process in FIG. 3 repetitively, and returning from blocks 409 and 415, via dotted line 424 to block 403 in FIG. 4.

The process also benefits from the inclusion of satellite ephemeris data
10 and the interference geometry. When it is known that interference is impossible traffic mask restrictions can be eliminated until such time when the potential for interference exists again.



The claims defining the invention are as follows:

1. A method of mitigating interference between two independent wireless systems due to traffic, a first system including a geosynchronous satellite connection and a second system including a non-geosynchronous satellite connection and the two independent wireless systems being in relative motion with one another; the first system having dedicated channels which are non-interfering with channels of the second system and shared channels which interfere with channels of the second system due to relative motion of the synchronous and non-synchronous satellites to one another;

10 the method comprising the steps of:

mitigating the interference by means of traffic flow control of channels shared by the first and second systems, the method steps including:

generating traffic statistics for at least the first system;

15 initially assigning channel requests in the first system to dedicated channels until the dedicated channels are fully subscribed;

determining acceptable interference criteria;

limiting channel assignments in shared bands of the geosynchronous and non-geosynchronous satellites, until after full subscription of the dedicated channels to accommodate the traffic statistics and the interference criteria, by:

20 restricting the assignment of channel requests to shared bands to achieve a minimum limitation of blocking of connections; and

limiting the number of users assigned channel requests as subscribers during intervals of high interference probability.

25 2. A method of mitigating interference between two independent wireless systems due to traffic, a first system including a geosynchronous satellite connection and a second system including a non-geosynchronous satellite connection and the two independent wireless systems being in relative motion with one another; the first system having dedicated channels which are non-interfering with channels of the second system and shared channels which interfere with channels of the second system due to relative motion of the synchronous and non-synchronous satellites to one another;

30

the method comprising the steps of:

mitigating the interference by means of traffic flow control of channels shared by the first and second systems, the method steps including:



generating traffic statistics for at least the first system by entering the traffic patterns and frequency plans onto a process and entering an interference to noise ratio onto the process;

ascertaining applicable interference criteria;

5 creating limits on channel assignments based on the traffic statistics and the interference criteria by creating a traffic mask; and

assigning channels to abide with the created limits including assigning channels to dedicated channels first and to shared channels in an absence of dedicated channels.

10

3. The method of claim 2, wherein:
the step of creating limits includes:

entering traffic patterns and frequency plans onto a process, and
entering an interference to noise ratio onto the process.

15

4. The method of claim 3, wherein:
a need for mitigation is established, and
a traffic mask is created.

20

5. The method of claim 4, wherein:
assigning channels includes assigning channels to dedicated channels first.

25

6. The method of claim 5, wherein:
assigning channels to shared channels in the absence of dedicated channels and
only if the traffic mask is not exceeded.

30

7. A method of mitigating interference between two wireless systems due to traffic each having a satellite connection between originating and terminating terminals and the satellites having relative motion with respect to one another;

the method comprising the steps of:

mitigating the interference by means of traffic flow control of channels shared by the first and second systems, the method steps including:

generating traffic statistics for at least one of the two systems;

initially assigning channel requests in one of the two systems to dedicated channels until the dedicated channels are fully subscribed;



determining acceptable interference criteria;
limiting channel assignments in shared bands, after full subscription
of the dedicated channels; to accommodate the traffic statistics and
interference criteria, by:

- 5 restricting assignment of channel requests to shared bands to
 achieve a minimum limitation of blocking of connections, and
 limiting the number of assigned channel requests during
 intervals of high interference probability.

- 10 8. The method of claim 7, wherein
 the step of generating traffic statistics includes:
 determining traffic patterns of the two systems,
 determining frequency assignment plans of the two systems; and
 determining acceptable 1/N ratios.

- 15 9. The method of claim 8, wherein generating a traffic mask for controlling channel
 assignment.

- 20 10. A method of mitigating traffic interference substantially as described herein with
 reference to the accompanying drawings.

DATED this sixth Day of July 2000

AT&T Corp.

Patent Attorneys for the Applicant

SPRUSON & FERGUSON



FIG. 1

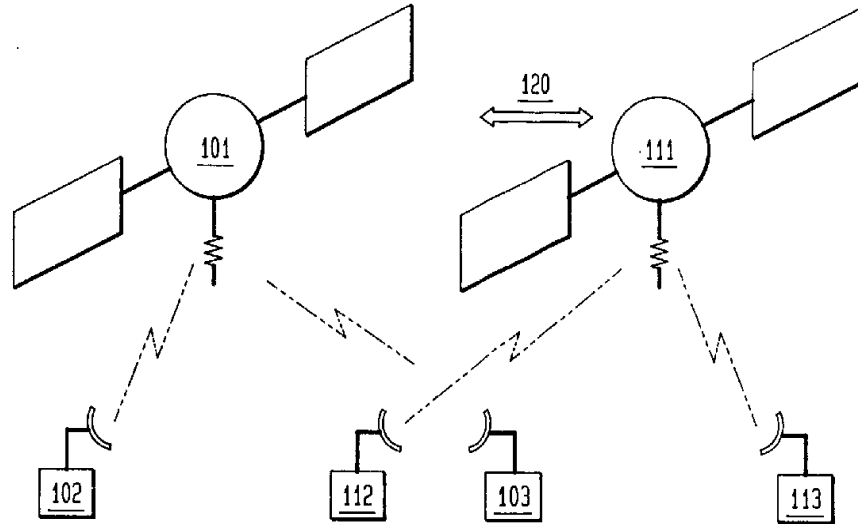


FIG. 2

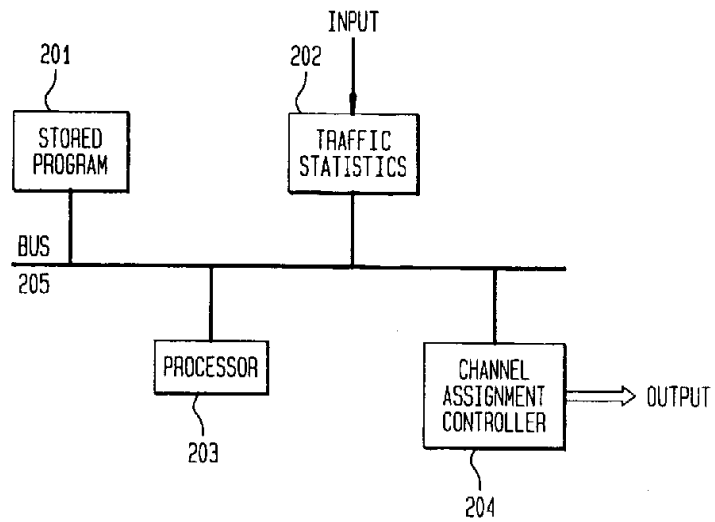


FIG. 3

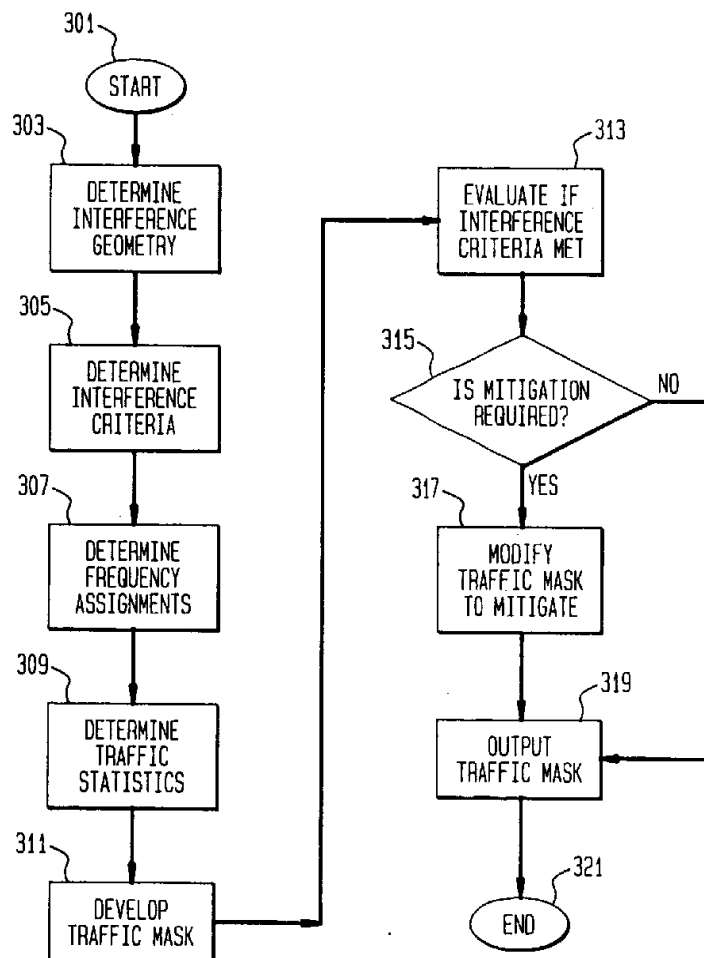


FIG. 4

