

(19) **DANMARK**

(10) **DK/EP 3005731 T3**



(12)

Oversættelse af europæisk patentskrift

Patent- og
Varemærkestyrelsen

-
- (51) Int.Cl.: **H 04 R 25/00 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2017-07-10**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2017-03-29**
- (86) Europæisk ansøgning nr.: **13726234.1**
- (86) Europæisk indleveringsdag: **2013-06-03**
- (87) Den europæiske ansøgnings publiceringsdag: **2016-04-13**
- (86) International ansøgning nr.: **EP2013061404**
- (87) Internationalt publikationsnr.: **WO2014194932**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Sonova AG, Laubisrütistrasse 28, 8712 Stäfa, Schweiz**
- (72) Opfinder: **ZURBRUEGG, Thomas, Winzerhalde 62, CH-8049 Zurich, Schweiz**
NIEDERBERGER, André, Im Wiesli 6, CH-8708 Männedorf, Schweiz
- (74) Fuldmægtig i Danmark: **Georg Pintz & Partners Patent Trademark & Law Office LLC, Pintz és Társai Kft, H-1539 Budapest, Pf. 590, Ungarn**
- (54) Benævnelse: **METODE TIL BETJENING AF ET HØREAPPARAT SAMT ET HØREAPPARAT**
- (56) Fremdragne publikationer:
WO-A1-03/073790
WO-A1-2004/021740
US-A1- 2009 010 442

DESCRIPTION

TECHNICAL FIELD

[0001] The present invention is related to a method for operating a hearing device as well as to a hearing device adapted to perform the method. In particular, the present invention is directed at detecting a hearing device user's voice activity, i.e. so-called "own-voice detection", to be used in conjunction with operating a hearing device.

BACKGROUND OF THE INVENTION

[0002] A frequent complaint of users of hearing devices, especially when they start wearing them for the first time, is that the sound of their own voice is too loud or that it sounds like they are talking into a barrel. Both effects are particularly pronounced when the ear canal (commonly also referred to as the auditory canal) is sealed, e.g. by an otoplastic. Accordingly, there exists the need to identify the presence or activity of the own voice of the user of a hearing device to be able to process the user's own voice in a different way than sound originating from other sources.

[0003] Methods for own-voice detection are commonly based on quantities that can be derived from a single microphone signal measured at an ear of a user, such as for example overall level, pitch, spectral shape, spectral comparison of auto-correlation and auto-correlation of predictor coefficients, cepstral coefficients, prosodic features, or modulation metrics. However, the degree of achieving reliable own-voice detection is rather poor when using methods based on such measures.

[0004] EP 1 956 589 A1 discloses a method for identifying the user's own voice by assessing a direct-to-reverberant ratio between the signal energy of a direct sound part and that of a reverberant sound part of at least a portion of a recorded sound. It is stated that this allows a very reliable own-voice detection. However, to achieve this a rather complex signal analysis is required.

[0005] WO 2004/077090 discloses a method for detection of own voice activity in a communication system which seeks to improve detection reliability. Hereto, own-voice detection is based on a combination of a number of individual detectors, each of which may be error-prone, whereas the combined detector is asserted to be robust. A signal processing unit is utilised to receive signals from at least two microphones worn on the user's head, which are then processed so as to distinguish as well as possible between sound from the user's mouth and sounds originating from other sources. The distinction is based on the specific characteristics of the sound field produced by own voice, which are due to the fact that the microphones are in the acoustical near-field of the hearing device user's mouth and in the far-

field of the other sources of sound, and that arise because the mouth is located symmetrically with respect of the user's head. The combined detector then detects the presence of own-voice when each of the individual characteristics of the signal are in respective ranges. This method too has a relatively high complexity.

[0006] Alternatively, a transducer which picks up vibrations within the ear canal caused by vocal activity of the user can be employed.

[0007] US 6,041,129 discloses a hearing aid which uses an accelerometer or other rigid body motion sensor attached to the surface of the hearing aid at a point where it most closely comes in contact with the solid portion of the auditory canal. In this way, the accelerometer can sense directly the conductive sound waves created by the user's own voice. Such sound waves can then be either amplified or attenuated, and subsequently mixed with air-borne sound detected by the microphone depending on the user's needs.

[0008] US 2007/0009122 A1 discloses a method of own-voice detection achieved by providing a microphone in the auditory channel whose signal level is compared with that of an external microphone.

[0009] Furthermore, WO 03/073790 A1 discloses a voice detection and discrimination apparatus in a hearing protection arrangement, and more particularly a VOX (voice operated transmission/exchange) apparatus, for determining whether an acoustic voice signal is present or absent in a hearing protection arrangement, as well as a method of detecting a voice using the voice detection and discrimination apparatus. Additionally, WO 2004/021740 A1 describes a method for counteracting the occlusion effect of an electronic device delivering an audio signal to the ear, like a hearing aid or an active ear protector. Moreover, US 2009/0010442 A1 provides a device that monitors sound directed to an occluded ear, and more particularly an earpiece and method of operating an earpiece that monitors background noise levels and processes audio.

SUMMARY OF THE INVENTION

[0010] It is an object of the present invention to provide a method for operating a hearing device which performs own-voice detection in a reliable and simple manner.

[0011] Within the context of the present invention hearing devices for instance comprise hearing aids, such as in-the-ear (ITE), completely-in-canal (CIC) or behind-the-ear (BTE) hearing aids, earphones, hearing protection devices, as well as ear-level communication, noise reduction and sound enhancement devices.

[0012] The object of the invention is achieved by the method according to claim 1 and by the hearing device according to claim 18. Specific embodiments are provided in the dependent claims.

[0013] The present invention is first directed to a method for operating a hearing device comprising at least one ambient microphone, a signal processing unit, a receiver and an ear canal microphone, the method comprising the steps of:

- picking up an ambient sound at an input of the at least one ambient microphone which provides a first audio signal at an output of the at least one ambient microphone representing the ambient sound;
- processing the first audio signal in the signal processing unit which provides a processed audio signal;
- applying the processed audio signal to an input of the receiver which outputs at an output of the receiver sound into an ear canal of a user of the hearing device;
- picking up an ear canal internal sound at an input of the ear canal microphone which provides a second audio signal at an output of the ear canal microphone representing the ear canal internal sound;
- filtering the processed audio signal with a first filter having a transfer function at least comprising a transfer function from the output of the receiver to the input of the ear canal microphone when the hearing device is turned on and being worn in an ear canal of the user, the first filter providing a filtered processed audio signal;
- computing a difference between the second audio signal and the filtered processed audio signal resulting in a third audio signal; and
- detecting a presence of own-voice of the user based on the third audio signal.

[0014] An ear canal microphone refers to any type of sound pressure sensor, including for instance a piezo sensor or an accelerometer, intended to be located within the ear canal of the user during use of the hearing device.

[0015] A transfer function $G(f)$ at least comprising a transfer function $T(f)$ from a first signal port A to a second signal port B refers to a transfer function $G(f)$ that is representative of the transfer function $T(f)$ and could possibly comprise one or more further transfer functions $T'(f)$, $T''(f)$, ..., e.g. $G(f) = T(f) \cdot T'(f) \cdot T''(f)$, f being frequency, $T'(f)$ for instance being a transfer function of a receiver, and $T''(f)$ for instance being a transfer function of an ear canal microphone, such that the transfer function $G(f)$ is representative of an overall transfer function $T_{\text{tot}}(f)$ from a third signal port C, located "upstream" from signal port A (e.g. a receiver input), to a fourth signal port D, located "downstream" from signal port B (e.g. an ear canal microphone output).

[0016] In an embodiment of the present invention the transfer function of the first filter at least comprises a transfer function from the input of the receiver to the output of the ear canal microphone when the hearing device is turned on and being worn in an ear canal of the user, i.e. the transfer function of the first filter further includes the transfer functions of the receiver and the transfer function of the ear canal microphone.

[0017] In this way an estimate of the sound component within the ear canal originating from the receiver is taken into account and removed from the second audio signal provided by the ear canal microphone. This yields a good approximation of the own-voice signal possibly present within the ear canal based upon which own-voice activity can be discerned.

[0018] In a further embodiment of the method the step of detecting is further based on the first audio signal. In this way the ambient sound component, consisting of sound from the user's environment as well as possibly of the user's voice originating from his mouth, which enters the ear canal, e.g. via a vent of the hearing device, is taken into account. By for instance additionally removing the ambient sound component from the second audio signal provided by the ear canal microphone, an improved approximation of the own-voice signal present within the ear canal can be achieved, thus yielding an improved detection of own-voice activity.

[0019] In a further embodiment the method further comprises the step of filtering the first audio signal with a second filter having a transfer function representative of a real-ear occluded gain (REOG) transfer function, the second filter providing a filtered first audio signal. A real-ear occluded gain (REOG) transfer function is defined from the output of the ambient microphone to the output of the ear canal microphone while the hearing device is inserted in the ear canal of the user. The REOG transfer function can for example be determined by comparing the output signals of the ambient microphone and the ear canal microphone when the receiver of the hearing device is turned off or muted. By doing this an improved estimate of the ambient sound component is achieved by taking into account the way the ambient sound component is affected by for instance the vent or other direct sound paths from the outside of the ear canal past the hearing device towards the ear drum (also referred to as tympanic membrane). In this way a further improved detection of own-voice activity is achieved.

[0020] In a further embodiment of the method filtering the first audio signal is carried out in the log/dB domain, e.g. by simply subtracting a magnitude expressed in decibels (and not considering phase). Since the phase of the real-ear occluded gain (REOG) transfer function is typically not known precisely, performing only frequency-dependent amplitude weighting simplifies the filtering process.

[0021] In a further embodiment of the method the second filter is adapted online, i.e. in real-time, during operation of the hearing device, for instance by means of a least mean squares (LMS) algorithm. In this way the time-variability of the REOG transfer function due to variations of the ear canal geometry for instance caused by movements of the jaw are taken into account. Moreover, different positioning/seating of the hearing device within the ear canal as well as for instance clogging of the vent with earwax (cerumen) or debris can be taken into account in this way.

[0022] In a further embodiment of the method the transfer function of the second filter is determined based on a first measurement of the REOG transfer function, the first measurement for instance being made when the hearing device is fitted to the needs of the user.

[0023] In a further embodiment of the method the transfer function of the second filter is determined based on at least one further measurement of the real-ear occluded gain (REOG) transfer function, the at least one further measurement for instance being made when the hearing device and/or the jaw of the user is positioned differently compared to that when the first measurement was made. In this way an average REOG transfer function can be determined for the user.

[0024] In a further embodiment of the method the first filter is adapted online, i.e. in real-time, during operation of the hearing device, for instance by means of a further least mean squares (LMS) algorithm. In this way the time-variability of the sound transmission within the ear canal from the receiver to the ear canal microphone due to variations of the ear canal geometry for instance caused by movements of the jaw are taken into account. Moreover, different positioning/seating of the hearing device within the ear canal as well as for instance clogging of the vent with earwax (cerumen) or debris can be taken into account in this way.

[0025] In a further embodiment of the method the transfer function of the first filter is determined based on an initial measurement of the transfer function from the output (or input) of the receiver to the input (or output) of the ear canal microphone when the hearing device is turned on and being worn in the ear canal of the user, the initial measurement for instance being made when the hearing device is fitted to the needs of the user.

[0026] In a further embodiment of the method the transfer function of the first filter is determined based on at least one additional measurement of the transfer function from the output (or input) of the receiver to the input (or output) of the ear canal microphone when the hearing device is turned on and being worn in the ear canal of the user, the at least one additional measurement for instance being made when the hearing device and/or the jaw of the user is positioned differently compared to that when the initial measurement was made. In this way an average transfer function from the receiver to the ear canal microphone can be determined for the user.

[0027] In a further embodiment of the method the step of detecting comprises determining a first power estimate of the third audio signal.

[0028] In a further embodiment of the method the step of detecting comprises determining a second power estimate of the first audio signal or of the filtered first audio signal.

[0029] In a further embodiment of the method determining the first and/or the second power estimate comprises at least one of squaring, determining an absolute value, conversion into decibels, and low-pass filtering.

[0030] In a further embodiment of the method the step of detecting the presence of own-voice comprises one of:

- comparing the first power estimate with the second power estimate;
- subtracting the second power estimate from the first power estimate.

[0031] In a further embodiment of the method the step of detecting the presence of own-voice is dependent on a "characteristic curve" / "discriminator function", such as for instance a step function, a ramp function (with a lower and an upper threshold value), a sigmoid function, or a hysteresis function. In this way for instance a binary function discerning that own-voice is either "present" or "absent" can be assigned. Frequent, uncertain toggling between these two states can be prevented by introducing a hysteresis. Alternatively, a probability, e.g. a value between 0 and 1, can be assigned to the detection of own-voice. Smoothing, averaging or low-pass filtering can also be applied as part of the step of detecting in order to avoid rapid fluctuations in the output of the detection process.

[0032] In a further embodiment of the method the hearing device further comprises at least one of an active occlusion control unit, a classifier (i.e. a classification unit), a gain model, a noise canceller, a beamformer, a reverberation canceller, and a wind noise canceller, and the method further comprises the step of controlling at least one of the active occlusion control unit, the classifier, the gain model, the noise canceller, the beamformer, the reverberation canceller, and the wind noise canceller dependent on the presence of own-voice.

[0033] In a further embodiment of the method controlling the active occlusion control unit comprises turning off the active occlusion control unit when the presence of own-voice is not detected. By doing so possible artefacts introduced by the active occlusion control unit can be reduced and furthermore power can be saved by operating the active occlusion control unit only in those instances when own-voice is actually considered present.

[0034] Moreover, the present invention is further directed to a hearing device comprising:

- at least one ambient microphone,
- a signal processing unit,
- a receiver,
- an ear canal microphone, and
- an own-voice detection unit characterised in comprising:
 - a first filter having a transfer function at least comprising a transfer function from an output (or input) of the receiver to an input (or output) of the ear canal microphone when the hearing device is turned on and being worn in an ear canal of the user,
 - a subtractor, and
 - detector,

wherein an output of the at least one ambient microphone is connected to an input of the signal processing unit, an output of the signal processing unit is connected to an input of the receiver as well as to an input of the first filter, an output of the first filter and an output of the

ear canal microphone are connected to inputs of the subtractor, which is adapted to provide at an output of the subtractor a difference between an output signal of the ear canal microphone and an output signal of the first filter, the output of the subtractor being connected to an input of the detector, the detector being adapted to detect a presence of own-voice of the user based on a signal provided at the input of the detector.

[0035] In an embodiment of the hearing device the output of the ambient microphone is further connected to a further input of the detector, and wherein the detector is adapted to detect a presence of own-voice of the user further based on a signal provided at the further input of the detector.

[0036] In a further embodiment the hearing device further comprises a second filter having a transfer function representative of a real-ear occluded gain (REOG) transfer function, specifically a transfer function from the input of the ambient microphone to the input of the ear canal microphone when the hearing device is turned off and being worn by the user in the ear canal, wherein the output of the ambient microphone is connected to an input of the second filter and an output of the second filter is connected to the further input of the detector.

[0037] In a further embodiment of the hearing device the second filter is adapted to perform filtering in the log/dB domain.

[0038] In a further embodiment of the hearing device the second filter is adaptable online, i.e. in real-time, during operation of the hearing device, for instance by means of a least mean squares (LMS) algorithm.

[0039] In a further embodiment of the hearing device the transfer function of the second filter is based on a first measurement of the REOG transfer function, the first measurement for instance being made when the hearing device is fitted to the needs of the user.

[0040] In a further embodiment of the hearing device the transfer function of the second filter is based on at least one further measurement of the REOG transfer function, the at least one further measurement for instance being made when the hearing device and/or the jaw of the user is positioned differently compared to that when the first measurement was made.

[0041] In a further embodiment of the hearing device the first filter is adaptable online, i.e. in real-time, during operation of the hearing device, for instance by means of a further least mean squares (LMS) algorithm.

[0042] In a further embodiment of the hearing device the transfer function of the first filter is based on an initial measurement of the transfer function from the output (or input) of the receiver to the input (or output) of the ear canal microphone when the hearing device is turned on and being worn in the ear canal of the user, the initial measurement for instance being made when the hearing device is fitted to the needs of the user.

[0043] In a further embodiment of the hearing device the transfer function of the first filter is based on at least one additional measurement of the transfer function from the output (or input) of the receiver to the input (or output) of the ear canal microphone when the hearing device is turned on and being worn in the ear canal of the user, the at least one additional measurement for instance made when the hearing device and/or the jaw of the user is positioned differently compared to that when the initial measurement was made.

[0044] In a further embodiment of the hearing device the detector comprises a first power estimator adapted to determine a power estimate of the signal provided at the input of the detector.

[0045] In a further embodiment of the hearing device the detector comprises a second power estimator adapted to determine a power estimate of the signal provided at the further input of the detector.

[0046] In a further embodiment of the hearing device the first and/or the second power estimator comprises at least one of a squaring unit, an absolute value unit, a conversion into decibels unit, and a low-pass filter.

[0047] In a further embodiment of the hearing device the detector comprises at least one of:

- a comparator unit for comparing the first power estimate with the second power estimate;
- a further subtractor for computing a difference between the first power estimate and the second power estimate.

[0048] In a further embodiment of the hearing device the detector is adapted to detect the presence of own-voice of the user dependent on a "characteristic curve" / "discriminator function", such as for instance a step function, a ramp function, a sigmoid function, or a hysteresis function.

[0049] In a further embodiment the hearing device further comprises at least one of an active occlusion control unit, a classifier, a gain model, a noise canceller, a beamformer, a reverberation canceller, a wind noise canceller, and a controller adapted to control at least one of the active occlusion control unit, the classifier, the gain model, the noise canceller, the beamformer, the reverberation canceller, and the wind noise canceller dependent on the presence of own-voice.

[0050] In a further embodiment of the hearing device the controller is adapted to turn off the active occlusion control unit when the presence of own-voice is not detected.

BRIEF DESCRIPTION OF THE DRAWINGS

[0051] The present invention is further explained below by means of non-limiting specific embodiments and with reference to the accompanying drawings. What is shown in the figures is the following:

Fig. 1

schematically depicts a high-level block diagram of an exemplary hearing device comprising an active occlusion control (AOC) unit and an own-voice detection (OVD) unit according to the present invention;

Fig. 2

schematically depicts a block diagram of an exemplary setup for performing active occlusion control (AOC) showing various contributions to the sound picked up by the ear canal microphone;

Fig. 3

schematically depicts a block diagram of a hearing device with an exemplary OVD unit according to a first embodiment of the present invention;

Fig. 4

schematically depicts a block diagram of a hearing device with an exemplary OVD unit according to a further embodiment of the present invention;

Fig. 5

schematically depicts a block diagram of a hearing device with an exemplary OVD unit according to yet a further embodiment of the present invention; and

Fig. 6

schematically shows two exemplary "characteristic curves" / "discriminator functions" for detecting the presence of own-voice, namely (a) a ramp function (= dash-dotted graph), and (b) a hysteresis function (= dotted graph).

[0052] In the figures, like reference signs refer to like parts.

DETAILED DESCRIPTION OF THE INVENTION

[0053] Depending on the application a hearing device is intended for, either an "open" or a "closed" fitting is employed.

In the former case sound is delivered to the ear drum of the user both directly, i.e. by-passing the hearing device, as well as for instance via a thin tube extending into the ear canal conveying sound that has been processed, e.g. amplified, by the hearing device. In this way it is possible to maintain the user's voice sounding natural for the user himself, however only relatively mild amplification can be applied, otherwise feedback whistling will occur. On the other hand, when high levels of amplification are required, e.g. to compensate a severe hearing loss, or a great degree of ambient sound attenuation is desired, e.g. for a hearing protection device, a closed fitting is necessary, where the ear canal is essentially sealed-off, i.e.

very little direct sound reaches the ear drum. This has the disadvantage of causing the so-called "occlusion effect", which occurs when an object blocks a person's ear canal, and the person perceives his/her own voice as "hollow" or "booming", such as when talking into a barrel. This annoying effect can be mitigated for instance by means of active occlusion control.

[0054] Fig. 1 shows a high-level block diagram of a hearing device including means for active occlusion control. Sound from the surroundings of the hearing device user are picked up by an ambient microphone 1, e.g. located at the outward facing end of the hearing device when worn at least partially within an ear canal of the user. The audio signal from the ambient microphone 1 is processed by a signal processing unit 2, which for instance performs frequency-dependent amplification, noise cancelling and beamforming (the latter requiring at least two microphones in order to achieve directional filtering). The processed audio signal is then applied to a receiver 3 (i.e. a miniature loudspeaker) which emits sound towards the ear drum. In order to combat the occlusion effect, ear canal internal sound is picked up by an ear canal microphone 4 located within the ear canal, i.e. arranged at the inward facing end of the hearing device or ear piece of the hearing device. The signal provided by the ear canal microphone 4 is then processed by the active occlusion control (AOC) unit 6, for instance comprising a suitably chosen occlusion filter, which generates a signal that is combined with (e.g. added to) the processed version of the audio signal from the ambient microphone 1 and output by the receiver 3. The filter is selected/adjusted dependent on the transfer function from the input to the receiver 3 to the output of the ear canal microphone 4, i.e. according to the specific "plant" present between the receiver 3 and the ear canal microphone 4 when the hearing device is being worn by the user. In particular the plant comprises the influences of the specific user's ear canal, tympanic membrane and middle ear, as well as the low-frequency roll-off caused by the effective vent including leakage due to a possible bad seat (i.e. non-optimal sealing-off) of the hearing device in the ear canal.

[0055] As is apparent from Fig. 1 the AOC operates in a closed-loop setup, so there is an inherent danger of system instability, manifested as "whistling" (similar to the whistling due to an improperly working feedback canceller) or "humming". This can for instance occur due to a much better seat (i.e. increased sealing-off) of the hearing device within the ear canal than during the fitting process of the hearing device, or due to a blocked vent because of cerumen or other debris. In order to prevent such instabilities, the plant must be monitored. Knowledge of the presence of own-voice can be helpful as part of such an AOC monitoring process. Furthermore, it is beneficial to only turn on the AOC unit 6 when own-voice is actually present, because on the one hand unnecessary AOC processing can be avoided which saves power, and on the other hand the AOC processing can give rise to unpleasant audible artefacts, so these should be avoided especially in situations where no own-voice is present. Detecting the presence or absence of own-voice is thereby achieved by means of the own-voice detection (OVD) unit 5, the output of which is provided to a controller 16, which for instance turns off the AOC unit 6 whenever there is no own-voice activity, i.e. when the user is not speaking or generating other "body sounds" such as chewing, swallowing, coughing, etc.

[0056] Fig. 2 depicts various contributions to the audio signal y_{Mic} provided by the ear canal

microphone 4. The ear canal internal sound picked up by the ear canal microphone 4 consists of:

1. a) sound originating from the receiver 3 that traverses the plant 22, i.e. is filtered by the transfer function of the plant 22, represented by the signal y_{Plant} ,
2. b) direct sound originating from the exterior of the ear canal that by-passes the hearing device, e.g. enters the ear canal through a vent 26 or a leaky seal, represented by the signal d_V , and
3. c) speech and body sounds OV generated by the user entering the ear canal through its cartilaginous wall (from the skull 24), giving rise to an occlusion signal d_{OV} (= own-voice).

[0057] The sound u_{Rec} emitted by the receiver 3, which passes through the plant 22, consists of a component r_{MicExt} picked up by the ambient microphone 1 and processed, e.g. amplified 21, by the signal processing unit 2, and of a component u_{AOC} picked up by the ear canal microphone 4 and processed, e.g. AOC filtered 27, by the AOC unit 6. The component r_{MicExt} picked up by the ambient microphone 1 in turn consists of ambient sound r_{Env} from the user's environment 20 and possibly also of speech OV of the user's own voice 23 originating from his mouth and reaching the ambient microphone 1 via an external air path 25. The direct sound d_V which by-passes the hearing device is influenced by the real-ear occluded gain (REOG) transfer function.

[0058] The task of the own-voice detection (OVD) unit 5 is to detect the occlusion (own-voice) signal d_{OV} given only measurements of the aggregate signal, i.e. the sum of all the contributions $Y_{Mic} = Y_{Plant} + d_{OV} + d_V$.

[0059] Fig. 3 shows a block diagram of a hearing device with an OVD unit 5 according to a first embodiment. As can be seen, the output signal from the signal processing unit 2 is provided to the OVD unit 5 (= block depicted in dash-dotted lines), wherein it is supplied to the filter 7 having a transfer function at least comprising the transfer function from an input of the receiver 3 to an output of the ear canal microphone 4 when the hearing device is turned on and being worn in an ear canal of the user, i.e. an approximation of the transfer function of the plant 22. The filtered signal, which is an estimate y' of the sound signal from the plant 22, is then subtracted from the signal provided by the ear canal microphone 4 by means of the subtractor 8, the difference signal ($y_{Mic} - y' \approx d_{OV} + d_V$) being applied to the detector 9, which is configured to detect the presence of own-voice of the user based on this difference signal. However, this difference signal still includes a component due to the direct sound signal d_V , which can degrade the performance of the OVD unit 5.

[0060] An improved variant of this embodiment is obtained by averaging the difference signal or by determining a power estimate of the difference signal by means of the power estimator

11 (depicted in Fig. 3 as a possible option by the block indicated with dashed lines).

[0061] A further improved variant is obtained by additionally providing the signal from the ambient microphone 1 to the detector 9. This signal can then be subtracted from the difference signal, the averaged difference signal or the power estimate of the difference signal.

[0062] In yet a further improved variant the signal from the ambient microphone 1 is averaged or a power estimate thereof determined by means of the further power estimator 11' (depicted in Fig. 3 as a possible further option by the block indicated with dotted lines) before subtracting it from the difference signal. The detector 9 outputs an own-voice activity signal, which can for instance be the result of a binary decision with the two possible outcomes own-voice present/active or absent/inactive. Instead, the own-voice activity signal can provide a probability of own-voice being present/absent in the form of a value between 0 and 1 (or 0 and 100%).

[0063] Fig. 4 shows a block diagram of a hearing device with an OVD unit 5 according to a further embodiment having improved performance, because it additionally takes into account the direct sound signal d_v . In addition to the embodiment shown in Fig. 3 the signal from the ambient microphone 1 is applied to the further filter 10 having a transfer function, which is an approximation of the real-ear occluded gain (REOG) transfer function. This takes into account that only low frequencies (below about 500 Hz) are transmitted without significant attenuation into the ear canal. The filter 10 can optionally be time-varying and adapted online (in real-time), for instance via an LMS algorithm, and furthermore be dependent on various sounds or signals of the signal processing unit, e.g. the adaptation speed could be set dependent on the current situation or the structure of the filter 10 could be changed dependent on the required precision. Moreover, the REOG filtering can optionally be carried out in the log/dB domain, e.g. by simply subtracting a magnitude expressed in decibels, as the phase of the REOG transfer function is not known precisely. The output signal of the filter 10, which is a good estimate d_v' of the direct sound d_v , is then also supplied to the detector 9. The detector 9 can then determine an estimate d_{OV}' of the occlusion signal (= own-voice) d_{OV} by calculating the difference between the two signals supplied to the detector 9 ($d_{OV}' = (y_{Mic} - y') - d_v'$). Again the estimate of the occlusion signal d_{OV}' can be improved by averaging or by determining power estimates of the two input signals applied to the detector 9, as indicated by the two optional blocks 11 and 11'.

[0064] Fig. 5 shows a detailed block diagram of a hearing device with an OVD unit 5 according to a more specific embodiment. Here especially the detector 9 is illustrated in detail. It comprises two power estimators 11, 11', a further subtractor 8' and a ramp-like discrimination function 15 which provides a value indicative of the own-voice activity, e.g. a probability that own-voice is active. The first power estimator 11 estimates the power of the difference signal between the output of the ear canal microphone 4 and the output of the filter 7 approximating the transfer function of the plant 22. The second power estimator 11' estimates the power of the filter 10 approximating the REOG transfer function 26. Both power estimators 11 and 11'

each comprise blocks that perform an "absolute value" operation 12, 12', a conversion into the log/decibel domain 13, 13', and low-pass filtering 14, 14' (possibly time-varying). The outputs of the two power estimators 11, 11' are applied to the subtractor 8', yielding a difference signal which is an estimate of the occlusion signal d_{OV}' . This estimate d_{OV}' is then applied to a "discriminator function" or "characteristic curve" 15, which provides a mapping of input occlusion signal d_{OV}' to output own-voice activity.

[0065] Two such exemplary mappings/functions are illustrated in Fig. 6. The dotted curve (a) is a ramp-function, which assigns a value of 0 (= OV absent) to the OV activity output when the occlusion signal d_{OV}' is below a lower threshold OV_{off} , a value of 1 (= OV present) to the OV activity output when the occlusion signal d_{OV}' is above an upper threshold OV_{on} , and a value between 0 and 1 to the OV activity output when the occlusion signal d_{OV}' lies between the lower and the upper threshold OV_{off} and OV_{on} . This transition between the two thresholds OV_{off} and OV_{on} allows to characterise a degree of (un-)certainty that own-voice is present/absent. Alternatively, the dash-dotted curve (b) is a hysteresis-function, which assigns a binary value of 0 (= OV absent) or 1 (= OV present) to the OV activity output. Furthermore, frequent, uncertain toggling between these two values is prevented by forcing the OV activity output to maintain a value of 1 until it drops below the lower threshold OV_{off} and to maintain a value of 0 until it exceeds the upper threshold OV_{on} .

[0066] According to the method and hearing device of the present invention the various components y_{Plant} , d_V and d_{OV} of the sound within the ear canal that is picked up by the ear canal microphone 4 are identified and separated from one another in a systematic manner. In particular, a model of the plant 22 is used, and furthermore the direct sound entering the ear canal via leaks in the seal of the hearing device or via vents provided in the hearing device is for instance filtered by the REOG transfer function. The output of the OVD unit 5 is then for example employed to control the activity of the AOC unit 6 or other parts of the signal processing, e.g. classifier, gain model, noise canceller, beamformer, reverberation canceller and/or wind noise canceller, carried out by the signal processing unit 2. It is thus for instance possible to decrease the power consumption of the hearing device or to reduce artefacts generated by the AOC unit 6 by only turning it on when the OVD unit 5 indicates that own-voice is determined to be present.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP1956589A1 [0004]
- WO2004077090A [0005]
- US6041129A [0007]
- US20070009122A1 [0008]
- WO03073790A1 [0009]
- WO2004021740A1 [0009]
- US20090010442A1 [0009]

Patentkrav

1. Metode til betjening af et høreapparat omfattende en omgivende mikrofon (1) placeret ved en udadvendende ende af høreapparatet, når den i det mindste delvist bæres i en øregang hos en bruger, en signalbehandlingsenhed (2), en modtager (3) og en ørekanalsmikrofon (4) placeret i brugerens øregang under brug af høreapparatet. Denne metode omfatter trinnene:

- Optagelse af en omgivende lyd ved et input for den omgivende mikrofon (1), som tilvejebringer et første lydsignal ved en udgang fra den omgivende mikrofon (1), der repræsenterer omgivende lyd.
- Behandling af det første lydsignal i signalbehandlingsenheden (2), som tilvejebringer et behandlet lydsignal.
- Anvendelse af det behandlede lydsignal på en indgang på modtageren (3), som udsender, via en udgang fra modtageren (3), lyd ind i en øregangskanal hos en bruger af høreapparatet.
- Registrering af en indvendig lyd i ørekanalen ved en indgang på ørekanalsmikrofonen (4), som tilvejebringer et andet lydsignal ved en udgang fra ørekanalsmikrofonen (4), der repræsenterer ørekanalens indvendige lyd

kendetegnet ved

- Filtrering af det behandlede lydsignal med et første filter (7) med en overføringsfunktion, der i det mindste omfatter en overføringsfunktion fra modtagerens (3) udgang til indgangen af ørekanalsmikrofonen (4), når høreapparatet er tændt og bæres i en øregangskanal af brugeren, idet det første filter (7) tilvejebringer et filtreret andet lydsignal
 - Beregning af en forskel mellem det andet lydsignal og det filtrerede behandlede lydsignal, hvilket resulterer i et tredje lydsignal
 - Registrering af en tilstedeværelse af brugerens egen stemme baseret på det tredje lydsignal.
2. Metoden i henhold til krav 1, hvor detekteringsstrinnet er yderligere baseret på det første lydsignal og yderligere omfattende trinnet med at filtrere det første lydsignal med et andet filter (10), der har en overføringsfunktion, der er

repræsentativ for en faktisk øreindesluttet forstærkningsoverføringsfunktion, specifikt en overføringsfunktion fra udgangen fra den omgivende mikrofon (1) til
35 udgangen af ørekanalsmikrofonen (4), når høreapparatet er slukket og bæres af brugeren i øregangen, leverer det andet filter (10) et filtreret første lydssignal.

3. Metoden i henhold til patentkrav 2, hvor det andet filter (10) tilpasses online under drift af høreapparatet, for eksempel ved hjælp af en som minimum
40 gennemsnitlig kvadratalgoritme.

4. Metoden i henhold til patentkrav 2 eller 3, hvor overføringsfunktionen hos det andet filter (10) bestemmes baseret på en første måling af den øreindesluttede forstærkningsoverføringsfunktion, idet den første måling f.eks. udføres, når
45 høreapparatet er tilpasset brugerens behov.

5. Metoden i henhold til patentkrav 4, hvor overføringsfunktionen hos det andet filter (10) bestemmes baseret på mindst en yderligere måling af den øreindesluttede forstærkningsoverføringsfunktion, idet mindst den ene yderligere
50 måling for eksempel gennemføres, når høreapparatet og/eller brugerens kæbe er placeret forskelligt i forhold til da den første måling blev foretaget.

6. Metode ifølge et patentkravene 1 til 5, hvor overføringsfunktionen hos det første filter (7) bestemmes baseret på en indledende måling af overføringsfunktionen fra
55 modtagerens (3) udgang til indgangen af ørekanalsmikrofonen (4). Når høreapparatet er tændt og bæres i brugerens øregang, bliver den indledende måling f.eks. lavet, når høreapparatet tilpasses brugerens behov.

7. Metoden i henhold til patentkrav 6, hvor overføringsfunktionen på det første
60 filter (7) bestemmes baseret på mindst en yderligere måling af overføringsfunktionen fra modtagerens (3) udgang til indgangen af ørekanalsmikrofonen (4). Når høreapparatet er tændt og bæres i brugerens øregang, udføres mindst en yderligere måling f.eks. når brugerens høreapparat og/eller kæbe er placeret forskelligt i forhold til da den indledende måling blev

65 lavet.

8. Metoden i henhold til et af patentkravene 1 til 7, hvor detekteringsstrinnet omfatter bestemmelse af et første effektskøn af det tredje lydsignal.

70 **9.** Metoden i henhold til et af patentkravene 1 til 8, hvor detekteringsstrinnet omfatter bestemmelse af et andet effektskøn af det første lydsignal eller af det filtrerede første lydsignal.

10. Metoden i henhold til et af patentkravene 1 til 9, hvor trinnet med at detektere
75 tilstedeværelsen af egen stemme er afhængig af en "diskriminatorfunktion", såsom for eksempel en trinfunktion, en rampefunktion, en sigmoidfunktion eller en hysteresefunktion .

11. Metoden i henhold til et af patentkravene 1 til 10, hvor høreapparatet
80 endvidere omfatter mindst en af en aktiv okklusionskontrolenhed (6), en klassifikator, en forstærkningsmodel, en støjdæmper, en stråleformator, en efterklangbuffer og en vindstøjbuffer, og hvor metoden yderligere omfatter trinnet med at styre mindst den ene af enten den aktive okklusionskontrolenhed (6), klassificeringsenheden, forstærkningsmodellen, støjdæmperen, stråleformeren,
85 efterklangbufferen og vindstøjbufferen afhængig af tilstedeværelsen af egen stemme.

12. Metoden i henhold til patentkrav 11, hvor styring af den aktive okklusionskontrolenhed (6) omfatter at slukke for den aktive
90 okklusionskontrolenhed (6), når tilstedeværelsen af egen stemme ikke er detekteret.

13. Et høreapparat, der omfatter:

En omgivende mikrofon (1) anbragt ved en udadvendende ende af
95 høreapparatet, når det bæres i det mindste delvist i en brugers øregang

- En signalbehandlingsenhed (2)
- En modtager (3)

- En ørekanalsmikrofon (4) placeret i brugerens øregang under brug af høreapparatet
- 100 - En detekteringsenhed til egen stemme (5) kendetegnet ved at omfatte:
 - Et første filter (7) med en overføringsfunktion, der som minimum omfatter en overføringsfunktion fra en udgang fra modtageren (3) til en indgang på ørekanalsmikrofonen (4), når høreapparatet er tændt og bæres i en brugers øregang.
- 105 - En subtraktor (8)
- En detektor (9)

Hvor en udgang fra den omgivende mikrofon (1) er forbundet til en indgang på signalbehandlingsenheden (2), en udgang fra signalbehandlingsenheden (2) er forbundet til en indgang på modtageren (3) samt til en indgang af det første filter

110 (7), en udgang fra det første filter (7) og en udgang fra ørekanalsmikrofonen (4) forbundet med indgangene til subtraktoren (8), som er indrettet til at levere til en udgang på subtraktoren (8) en forskel mellem et udgangssignal fra ørekanalsmikrofonen (4) og et udgangssignal fra det første filter (7), idet subtraktorens (8) udgang er forbundet til en indgang til detektoren (9). Detektoren

115 (9) er indrettet til at detektere en tilstedeværelse af brugerens egen stemme baseret på et signal tilvejebragt ved indgangen til detektoren (9).

14. Høreapparatet ifølge patentkrav 13, hvor udgangen på den omgivende mikrofon (1) er yderligere forbundet med en yderligere indgang til detektoren (9),

120 og hvor detektoren (9) er indrettet til at detektere en tilstedeværelse af egen stemme hos brugeren, der er yderligere baseret på et signal tilvejebragt ved den yderligere indgang af detektoren (9).

15. Høreapparat ifølge krav 13 eller 14, der yderligere omfatter mindst en af en

125 aktiv okklusionskontrolenhed (6), en klassifikator, en forstærkningsmodel, en støjdamper, en stråleformgiver, en efterklangsbuffer, en vindstøjbuffer og en styreenhed (16), der er indrettet til at styre mindst den ene af enten den aktive okklusionskontrolenhed (6), klassificeringsenheden, forstærkningsmodellen, støjdamperen, stråleformeren, efterklangsbufferen og vindstøjbufferen afhængigt

130 af tilstedeværelsen af egen stemme .

DRAWINGS

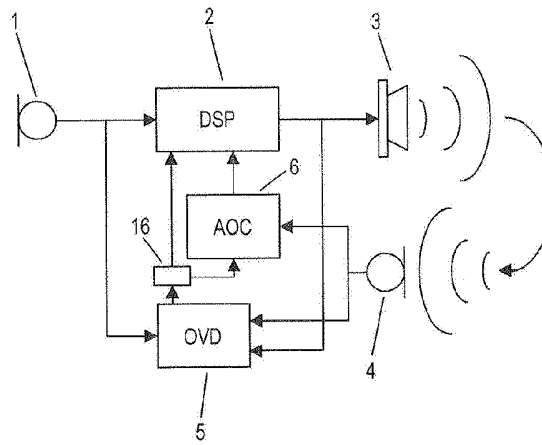


Fig. 1

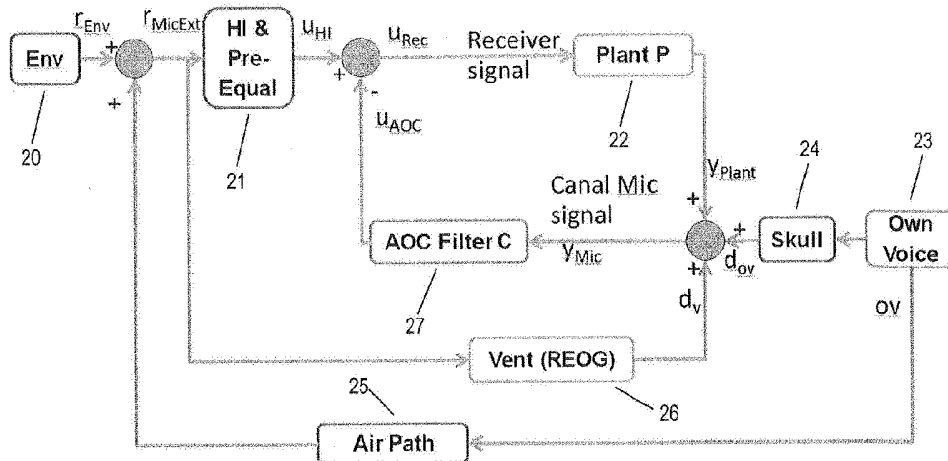


Fig. 2

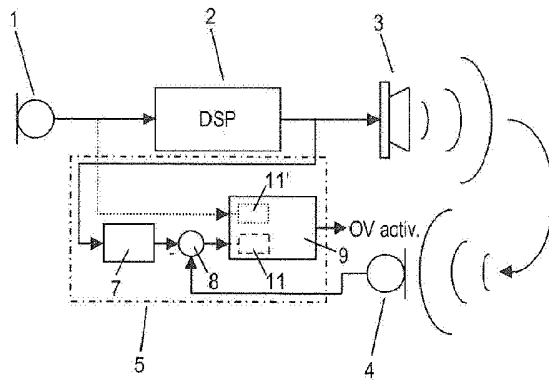


Fig. 3

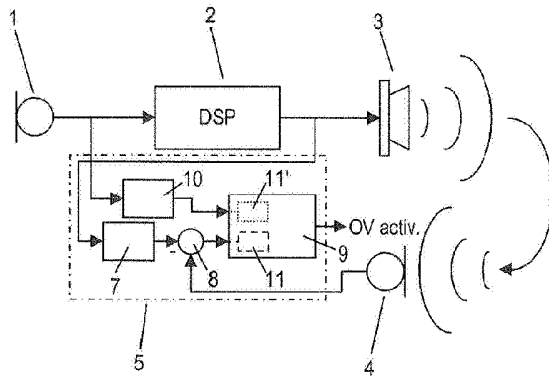


Fig. 4

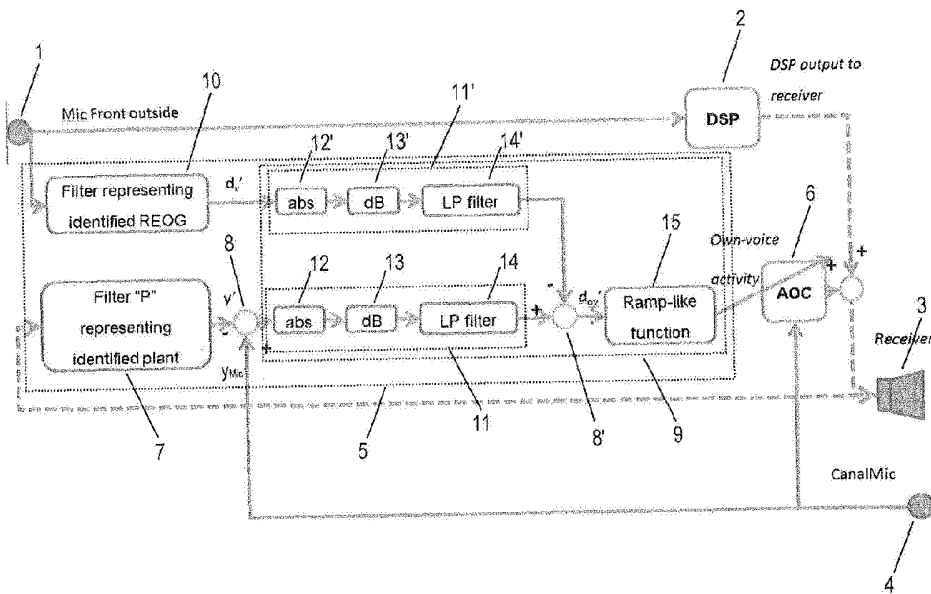


Fig. 5

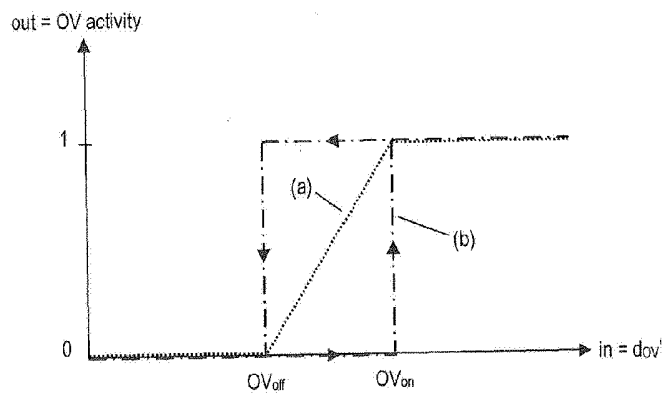


Fig. 6