

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2003 (04.12.2003)

PCT

(10) International Publication Number
WO 03/100189 A1

(51) International Patent Classification⁷: E04D 13/16, 3/36

(21) International Application Number: PCT/EP03/50182

(22) International Filing Date: 21 May 2003 (21.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02077018.6 23 May 2002 (23.05.2002) EP

(71) Applicant (for all designated States except US): UMICORE [BE/BE]; Rue du Marais 31, B-1000 Brussels (BE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): VERHEYEN, Stefaan [BE/BE]; Umicore, Patent Department, Kasteelstraat 7, B-2250 Olen (BE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMPACT ROOF-COVERING SYSTEM

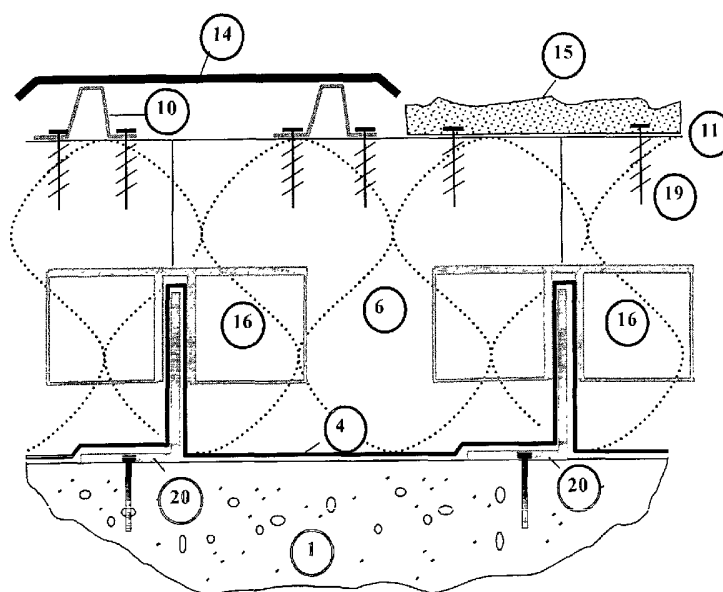

(57) Abstract: A covering system for roofs and for the outside of building walls is provided in which, on top, a high range of various decorative materials and elements (14, 15) can be fixed without penetrating the watertight layer. The system contains protruding elements (20) connected to the support (1) and flexible watertight membranes (4) arranged so as to cover and contact essentially the complete support surface, including the protruding elements. Panels (6), preferably rigid insulation panels with excellent resistance to water, are arranged so as to hold down the watertight membranes (4) onto the support (1), thus protecting the membrane from thermal cycling, UV rays and physical damage. The panels can be fixed with non-penetrating fastening means (16) to secure the complete system to the protruding elements (20) and to the support (1).



WO 03/100189 A1

The invention relates to watertight roof constructions of the inverted roof type. Most traditional sloped roofs are constructed with a multifunctional outer surface layer, the covering. For such roofs, the covering materials provide for a watertight surface and also ensure to a certain degree a decorative function. The combination of requirements results in restrictions in the choice of cover materials, arrangement of cover elements, roof shapes and slopes.

In traditional roofs, two common alternatives are known: the double skin roof and the inverted roof. In FR 2713687, US 3,411,256 and US 3,763,614 illustrations are given of double skin and inverted roofs.

Double skin roofs consist essentially of a support, an insulation layer, a watertight membrane, a secondary support and a decorative layer. Since in such a system the watertight membrane is hidden, it is difficult, in case of water leaks, to localise the infiltration and to repair it. Notwithstanding this, most double skin systems use penetrating fixings, thus increasing the risk for water leaks. Another disadvantage of the system is caused by the penetrating fixings, which form thermal bridges and increase the internal condensation risk. Internal condensation has a deleterious effect on the life of the roof. Reducing the number of fixings has consequences towards the dimensions of the fixings, possibly causing larger thermal bridges. Other disadvantages are the fact that the decorative layer always needs a secondary metal support and the fact that double skin roofs mostly are characterised by a thick build-up of layers.

The inverted roof, also known as upside down roof, was initially developed for flat roof construction. In general, insulation can be incorporated into a flat roof construction, either over or under the watertight membrane of the roof. Where the insulation system is placed on top of the watertight membrane, this is usually referred to as an inverted roof. Such a roof protects the watertight membrane from thermal cycling, effects of UV rays, weathering and physical damage. In a conventional inverted roof, the insulation is provided by foamed slabs, which are placed on top of the watertight membrane. To prevent the slabs of being blown away, or floated off, it is

necessary to anchor them in place. In general, it is not possible to use mechanical fixings since such fixings normally would penetrate the watertight membrane, causing leaks. Conventionally, the insulation slabs are laid loosely on top of the watertight membrane on a flat roof; ballast with gravel or paving slabs are further added, for an additional loading of at least 50 kg/m². This type of construction certainly cannot be described as lightweight. Also, the use of such a conventional inverted roof is restricted to low roof slopes: due to the absence of fixings, there is no resistance against sliding of the insulation and of the ballast layer.

The present invention addresses the problem of providing a roof construction that minimises the risk of water leaks, that has a compact build-up, that retains the advantages of the inverted roof and that still allows for the to use a broad range of decorative elements and materials. The invention also addresses the problem of providing simplicity of installation with a minimum number of parts, and the need to keep the installation inexpensive by minimising labour cost. The invention can be used for all roof slopes between 0° and 90°. This means that vertical parts, such as building walls, and horizontal parts, such as flat roofs and gutters, can be covered with the invented system. The invention is particularly interesting for roofs with a slope larger than 0° and smaller than 90°.

According to the invention, there is provided a covering means for roofs or for the outside of building walls, comprising:

- a support, defining the surface to be covered;
- one or more protruding elements connected to the support;
- one or more flexible watertight membranes arranged so as to cover and contact essentially the complete surface to be covered, and covering the protruding elements; and
- one or more panels;

where the panels press the watertight membranes against the support, and are secured to the protruding elements by fastening means. In one particular embodiment, to hold down the membranes, the panels cover and contact essentially the complete surface of the watertight membranes.

The support can be a wood deck, a layer of concrete or a steel frame. The protruding elements preferably consist of linear members connected along their longest dimension to the support in a direction parallel to the expected water flow. This configuration avoids water build-up and stagnation alongside these linear members. Protruding elements may also consist of punctual members, or a combination of linear and punctual members. The use of linear members offers some benefits towards the watertight membranes, as illustrated below, but special attention is needed to avoid water stagnation behind them. The use of punctual members does not require this attention, but needs special prefabricated watertight membranes.

One or more flexible watertight membranes are placed over the protruding elements and the support. The watertight membranes may consist of strips, sheets or special prefabricated sheets. In this text, strips are understood as being oblong membranes, typically available on reels. Sheets are understood as large-surface covering membranes, directly produced as such or consisting of several strips, pre-assembled in the workshop. Special prefabricated sheets are described as membranes with protuberances, pre-formed in the workshop. The watertight membranes can be placed without bonding adhesives onto the support. This keeps the installation inexpensive by minimising labour costs and facilitates the separate recycling of all materials used.

When linear protruding elements are used, it is possible to use two or more watertight membranes in the form of adjacent strips. The overlaps of the watertight membranes are preferably situated on the linear protruding members, thus forming standing seams. Overlaps with standing seam are easier to execute and are less critical towards water infiltration than conventional overlaps. Standing seams need fewer efforts than conventional overlaps for an equal or even higher water sealing quality.

When punctual protruding elements are used, special prefabricated sheets with pre-assembled protuberances are arranged so that each protuberance fits exactly over each punctual protruding element. When a combination of linear and punctual protruding elements is chosen, the use of prefabricated sheets can be combined with the use of standing seams.

The flexible watertight membranes preferably consist of a synthetic material with a primary watertight function such as EPDM rubber (Ethylene Propylene Diene Methylene Terpolymer), PVC (polyvinyl chloride), or CPE (chlorinated polyethylene). They may also consist of non-UV resistant watertight material such as PE (polyethylene). A membrane thickness of less than 0.8 mm is advantageous as this facilitates its placement while being lighter and cheaper.

Onto the protruding elements and watertight membranes, panels are posed. The fastening means protect the panels from wind uplift, water uplift and sliding. The fastening means preferably do not penetrate the watertight membranes, since this always creates an extra risk for water leaks. When penetrating fastening means are used, they need special attention to preserve the water sealing function. This can be achieved by using relatively high protruding elements, allowing to position the penetration holes 4-10 cm above the plane defined by the watertight membranes. Depending upon the type of the panels, different fastening means can be used.

In one embodiment of the invention, the panels covering the watertight membranes consist of thermal insulating material such as extruded (XPS) or expanded (EPS) polystyrene, cellular glass or mineral wool board. This way, the panels protect the watertight membranes from uplift, thermal cycling, UV rays and physical damage.

The fastening means securing the panels to the protruding elements advantageously consist of synthetic material, preferably with a thermal conductivity of less than 0.4 W/m/K. This avoids the formation of cold bridges.

When using panels with relative high pull-off resistance such as XPS, in particular XPS panels coated with a UV resistant layer, they can be relied upon as a basis to affix other structures, for instance decorative elements connected to the XPS panels by screws.

Panels with relative low pull-off resistance, such as water and weather resistant mineral wool or EPS, are preferably covered with one or more sections of wire net, which can be secured to the

protruding elements. The wire net preferably consists of woven metal wire. The decorative structures can be affixed to this wire net.

The decorative structures are preferably fixed without penetrating the watertight membranes. This outer structure only has an aesthetic function, the water sealing function being ensured by the watertight membranes. Decorative elements made out of unconventional materials can be used, as the joints between the elements do not need to be watertight.

Glue or any other type of adhesive material can be applied to help in fixing the membranes to the support, the overlapping membranes to each other or the panels to the watertight membranes. An adhesive-free design is however preferred.

The present invention is characterised by freedom of choice. All of the following items can be combined:

- different kinds of base supports: wood, metal or concrete;
- linear or punctual protruding elements;
- flexible watertight membranes in the shape of strips, sheets or specially prefabricated sheets;
- water and weather resistant panels with high pull-off resistance or not;
- decorative material fixed with use of spacers, with use of a secondary metal work, with direct fixation onto the protruding elements or with direct fixation onto the panels or net.

Several embodiments of the invention will now be described by way of example, with reference to the drawings.

Figure 1 shows a transversal section of a concrete deck with linear protruding elements. The watertight membranes consist of strips with double overlaps and standing seam. Over the water and weather resistant insulation, a net is connected to the protruding elements without penetrating the watertight membranes. The decorative material is fixed onto the net.

Figure 2 shows a transversal section of a concrete deck with linear protruding elements. The watertight membranes consist of a sheet overlapping the protruding elements. The water and weather resistant

insulation is connected to the protruding elements without penetrating the watertight membrane. The decorative material is fixed directly into the rigid insulation material.

5 Figure 3 shows a transversal section of a wood deck with punctual protruding elements. The watertight membrane consists of special prefabricated sheets encapsulating the protruding elements. The water and weather resistant insulation is connected to the protruding elements without penetrating the watertight membrane. The decorative material is fixed onto a secondary support fixed directly into the rigid insulation material.

Figure 4 shows a longitudinal section of a metal deck with a supplementary layer and linear protruding elements perpendicular to the steel deck valleys. The water and weather resistant insulation is connected to the protruding elements without penetrating the watertight membrane. Likewise, the decorative material is fixed with direct connectors onto the protruding elements without penetrating the watertight membrane.

20 Figure 5 details the fastening means 'type A' (16) shown in Figures 2, 3 and 4.

Figure 6 details the fastening means 'type B' (17) shown in Figure 1.

25 Figure 7 details the fastening clip (18) shown in Figure 1.

Figure 8 details the special screw (19), shown in Figures 2 and 3.

30 Figure 9 details the linear protruding element (20) shown in Figures 1, 2 and 4.

Figure 10 details the punctual protruding element (21), shown in Figure 3.

35 Figure 11 details a direct connector (22) shown in Figure 4.

For the base deck (1), also called the support, wood, steel and concrete can be used. Figure 1 and 2 show a concrete deck (1). Figure 40 3 shows a wood deck and Figure 4 a metal deck (1). All deck

constructions have been chosen by way of illustration and are usable in any combination. When using a metal deck, as shown in Figure 4, a supplementary layer (2) is needed to offer a continuous supporting surface. This layer can be metal, plywood or insulation material, and can be loose laid.

On the base deck (1) or on the supplementary layer (2), linear protruding elements (20) or punctual protruding elements (21) are mechanically connected. Such type of elements can be also found in US 4,744,187 en 4,833,853.

Linear protruding elements (20) can be L- or U-shaped profiles with a height and a base of about 3-10 cm. A partially closed U-shape, allowing for the insertion and retention of the head of suitably shaped bolts used for securing the panels, is well adapted: it results in a structurally stable system while any penetration of the watertight membrane is avoided. The dimensions of the linear protruding elements, their axial distance and the number of fixations into the deck are function of the expected physical forces and of the properties of all materials utilised. Typically, the height of the linear protruding elements will be around 4 cm. The linear protruding elements are placed in-line, maintaining gaps of about 2-5 mm between co-linear elements. Normally, an axial distance of 40-120 cm is used. However, particular roof shapes can be executed by following upwardly convergent lines.

Punctual protruding elements (21) can be short L-shaped profiles with a height and a base of 3-10 cm. The dimensions of the punctual protruding elements, their two dimensional axial distance and the number of fixations into the deck, are function of the expected physical forces and of the properties of all materials utilised. Typically, the height of the linear protruding elements will be around 4 cm. Due to their limited length, their positioning is not critical in view of the water flow. The protruding elements can be placed according to a regular pattern, with an axial distance of 40-120 cm.

Any combination of linear and punctual protruding elements can also be envisaged.

Flexible watertight membranes consisting of strips (3), sheets (4) or special prefabricated sheets (5) ensure the water sealing function of the roof. The material of the watertight membranes can be EPDM rubber, PVC or other. The watertight membranes can be loose laid or
5 bonded onto the base deck (1, 2).

When linear protruding elements (20) are used, the longitudinal overlaps of the watertight membranes (as in 3) are preferably situated on the linear protruding elements, thus forming standing
10 seams with double overlap, as in Figure 1. Provided that the height of the standing seam is sufficient and that capillarity is avoided, the overlaps can even be made watertight without any sealer.

Horizontal overlaps can also be accepted (as in 5), although they
15 create a higher leak risk than standing seams. Transversal horizontal overlaps can be avoided by using long watertight membranes from gutter to hip. Horizontal overlaps of the watertight membranes can be made watertight with the traditional treatment and techniques developed by the manufacturers of the membranes, such as fohning,
20 seaming or sealing.

The wind uplift resistance of the watertight membranes (3,4,5) is ensured by the particular positioning of the insulation panels (6, 7). The insulation panels have to be rigid, waterproof and
25 weatherproof, and may provide excellent thermal insulation. If directly subjected to UV rays, the insulation panels should be resistant by themselves or protected by a special coating. For XPS, the panels should be protected on top by an external thin armature coated with a thin UV resistant layer.

30

For this invention the panels can be divided into two groups:

- water- and weatherproof insulation with enough reliable pull-off resistance (6) such as e.g. XPS as illustrated in Figures 2, 3 and 4;
- 35 - water- and weatherproof insulation without enough reliable pull-off resistance (7) such as e.g. certain types of mineral wool and certain types of EPS (expanded polystyrene), as illustrated in Figure 1.

In both cases, the insulation panels cover the watertight membranes completely, thus protecting them from UV rays, thermal cycling and physical damage during execution and thereafter. This implies that their thickness exceeds the height of the protruding elements. The insulation panels preferably fully contact the watertight layer (3,4,5), preventing wind uplift. The insulation panels can be loose laid without use of adhesives.

The water- and weatherproof insulation panels (6, 7) are mechanically secured to the protruding elements (20, 21) by fastening means 'type A' (16) or 'type B' (17). Figures 2, 3 and 4 show water- and weatherproof insulation with enough reliable pull-off resistance (6). In this case, the panels are directly connected onto the protruding elements (20, 21) by fastening means 'type A' (16), and fixed to the protruding elements, preferably without penetrating the watertight membranes. The fastening means 'type A' are preferably made of stainless or galvanised steel and placed at each joint of the insulation panels.

Figure 1 shows water- and weatherproof insulation without enough reliable pull-off resistance (7). In this case, before placing the panels, fastening means 'type B' (17) are fixed to the protruding elements, preferably without penetrating the watertight membranes. Next, the panels are posed between the fastening means 'type B' (17). The panels are secured by posing a metal net (8) on top. The fastening means 'type B' (17) are normally made of stainless steel or galvanised steel, their quantity being chosen according to the expected climate and the properties of the net. The net is mechanically connected to the protruding fastening means 'type B' with fastening clips (18). The net (8) preferably consists of stainless steel wire with a thickness chosen according to the needed pull-off resistance. Net sections with a length of 100 cm and a width slightly larger than the axial distance of the protruding elements are easy to handle and to fix, while resistant overlaps are obtained.

The top layer can consist of all kinds of decorative elements: rigid panels (13), small rigid elements (14) or blankets (15) made of materials like wood, metal, plastic or even grass. The only restriction is the weight and the expansion coefficient. If a net (8) is used, the decorative elements can be fixed onto the net with

traditional means (9) like clips, without penetrating the watertight membranes. An air gap can be created with use of spacers (10) or with use of secondary metal work (12).

- 5 If a water- and weatherproof insulation with enough reliable pull-off resistance (6) is used, the decorative elements can be fixed onto the insulation panels with special screws (19), without penetrating the watertight membrane. An air gap can be created with use of spacers (10) or with use of secondary metal work (12). The decorative
- 10 elements can also be fixed without air gap (11). The special screws (19) co-operate with the XPS panels so as to provide high pull-off resistance.

- In a special embodiment, the decorative elements need to be fixed
- 15 directly onto the protruding elements as shown in Figure 4 with connectors (22) as in Figure 11.

CLAIMS

1. Covering means for roofs or for the outside of building walls,
5 comprising:
- a support, defining the surface to be covered;
 - one or more protruding elements connected to the support;
 - one or more flexible watertight membranes arranged so as to cover
and contact essentially the complete surface to be covered, and
10 covering the protruding elements;
 - one or more panels;
- characterised in that the panels press the watertight membranes
against the support, and are secured to the protruding elements by
fastening means.
- 15
2. Covering means according to claim 1, characterised in that the
panels cover and contact essentially the complete surface of the
watertight membranes.
- 20
3. Covering means according to claim 1 or 2, characterised in that
the protruding elements are linear members connected along their
longest dimension to the support in a direction parallel to the water
flow.
- 25
4. Covering means according to claim 3, characterised in that at
least two watertight membranes are used in the form of adjacent
strips arranged with their edges overlapping along the linear
members.
- 30
5. Covering means according to any of claims 1 to 4, characterised
in that the fastening means do not penetrate the watertight
membranes.
6. Covering means according to any of claims 1 to 5, characterised
35 in that the watertight membranes consist of synthetic material,
preferably with a thickness of less than 0.8 mm.
7. Covering means according to any of claims 1 to 6, characterised
in that the panels consist of thermal insulating material.

8. Covering means according to claim 7, characterised in that the thermal insulating material is extruded or expanded polystyrene, cellular glass, or mineral wool board.

5

9. Covering means according to claim 8, characterised in that the extruded polystyrene panels are coated with a UV resistant layer.

10

10. Covering means according to claim 8 or 9, characterised in that the extruded polystyrene panels are used as a basis to affix other structures.

15

11. Covering means according to claim 10, characterised in that the other structures are connected to the extruded polystyrene panels by screws.

12. Covering means according to claim 1, characterised in that the fastening means consist of synthetic material.

20

13. Covering means according to claim 12, characterised in that the synthetic material has a thermal conductivity of less than 0.4 W/m/K.

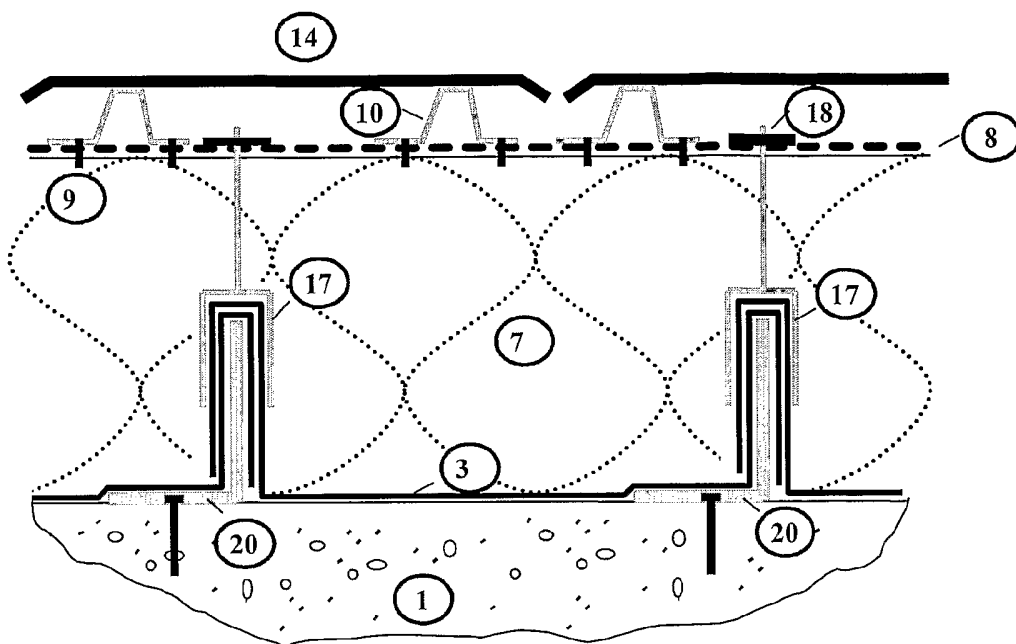


Figure 1

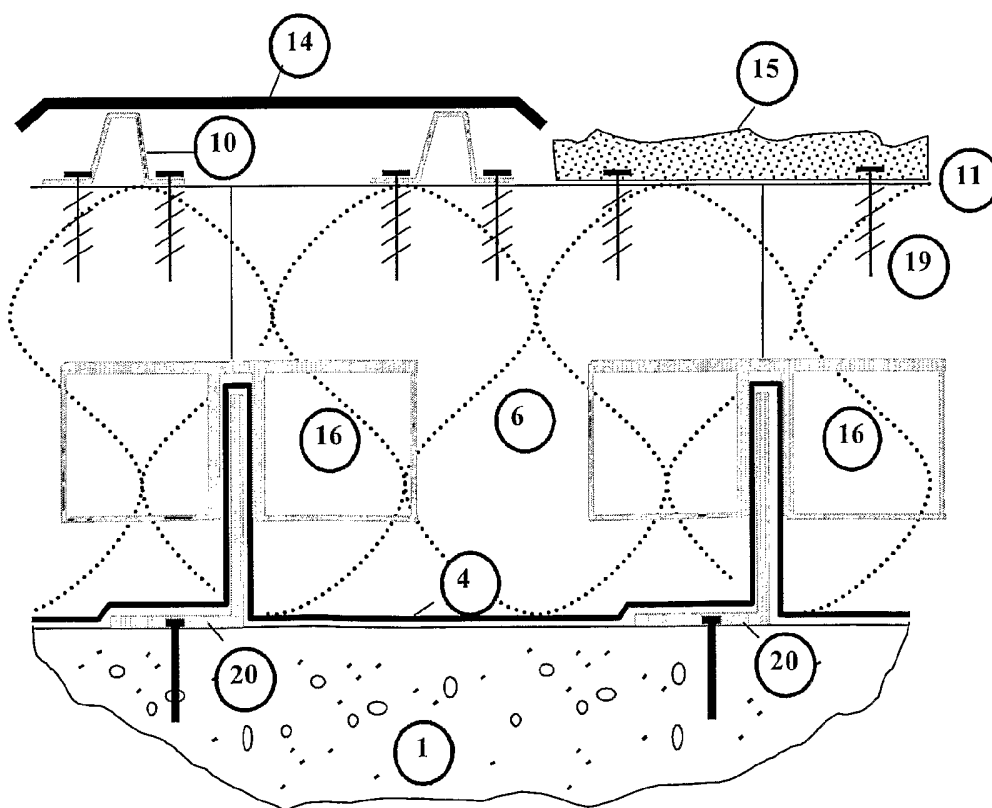


Figure 2

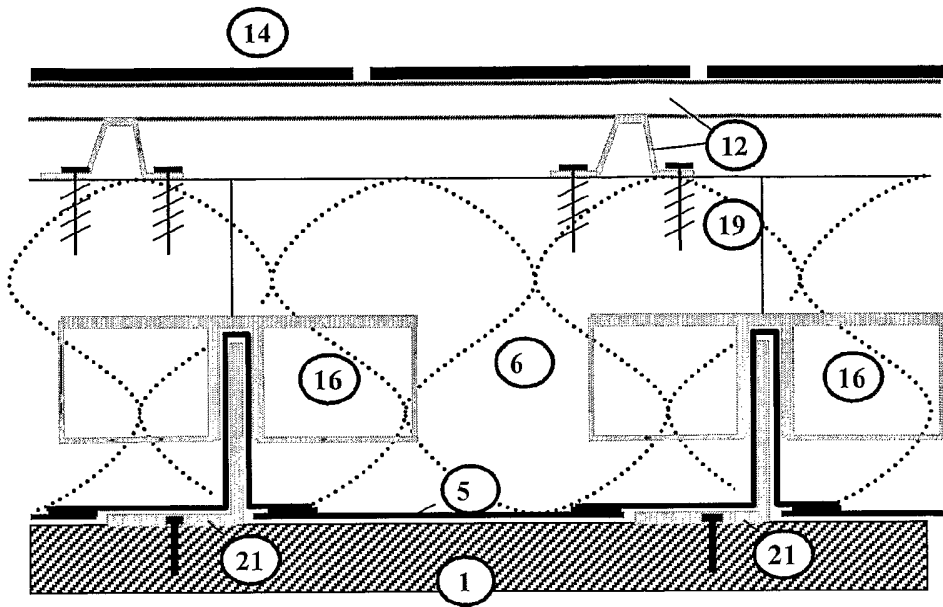


Figure 3

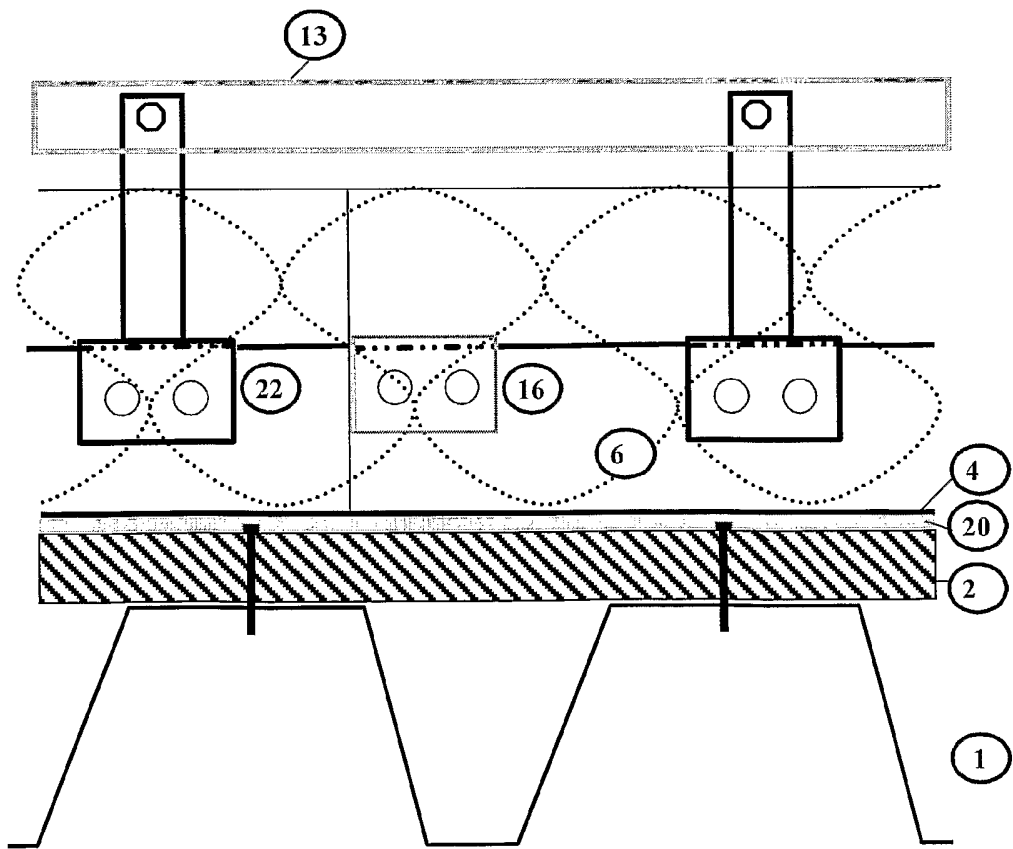


Figure 4

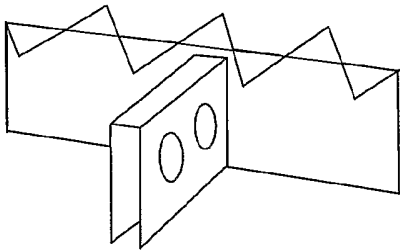


Figure 5

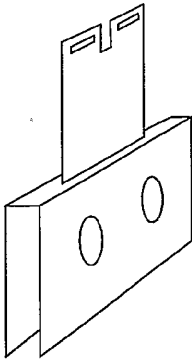


Figure 6




Figure 7



Figure 8

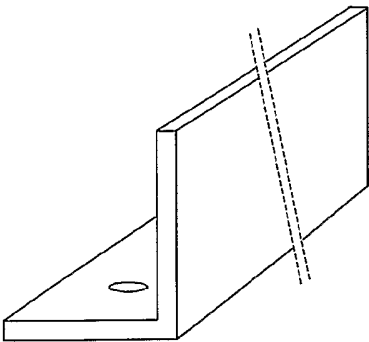


Figure 9




Figure 10

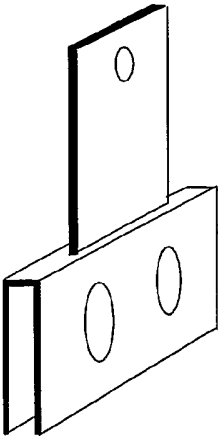


Figure 11

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50182

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E04D13/16 E04D3/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E04D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 195 45 431 A (FEIL EUGEN ;GRASER WOLFGANG (DE); FRIEDRICH HORST (DE)) 12 June 1997 (1997-06-12)	1,2,5,7, 8,12,13
Y	column 3, line 15 - line 25; claims 1,5,9-11; figures	6
Y	EP 0 903 448 A (MAGE GMBH) 24 March 1999 (1999-03-24) claim 6	6
X	FR 2 701 049 A (SMAC ACIEROID) 5 August 1994 (1994-08-05) figures 1,2	1,3,4,6
A	DE 21 62 386 A (AKZO GMBH) 20 June 1973 (1973-06-20) claim 1; figures 1,2,4	1,2

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

9 September 2003

Date of mailing of the international search report

16/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Demeester, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/50182

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19545431	A	12-06-1997	DE 19545431 A1	12-06-1997
			AT 202399 T	15-07-2001
			DE 59607130 D1	26-07-2001
			EP 0778377 A1	11-06-1997
EP 0903448	A	24-03-1999	DE 29716901 U1	13-11-1997
			EP 0903448 A2	24-03-1999
			NO 984361 A	22-03-1999
FR 2701049	A	05-08-1994	FR 2701049 A1	05-08-1994
DE 2162386	A	20-06-1973	DE 2162386 A1	20-06-1973
			CH 542336 A	30-09-1973