



(43) International Publication Date
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number
WO 2005/088134 A1

(51) International Patent Classification⁷: **F04D 15/00,**
15/02

(21) International Application Number: PCT/JP2005/000152

(22) International Filing Date: 15 March 2005 (15.03.2005)

(25) Filing Language: Finnish

(26) **Publication Language:** English

(30) Priority Data:
20040401 16 March 2004 (16.03.2004) FI

(71) Applicant (for all designated States except US): **ABB OY**
[FI/FI]; Strömbergintie 1, FI-00380 HELSINKI (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): VENKATACHARI,

Srikanth [IN/IN]; No. 41, (Old No. 21), Panchavati, Swimming Pool Extension, 3rd Cross, Malleswaram, IN-560003 BANGALORE (IN). **HOLMBERG, Mikael** [FI/FI]; Kaivurinkuja 8, FI-06450 PORVOO (FI).


(74) Agent: **BERGGREN OY AB**; P.O. Box 16 (Jaakonkatu 3 A), FI-00101 HELSINKI (FI).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD AND ARRANGEMENT FOR CONTROLLING A PUMPING STATION

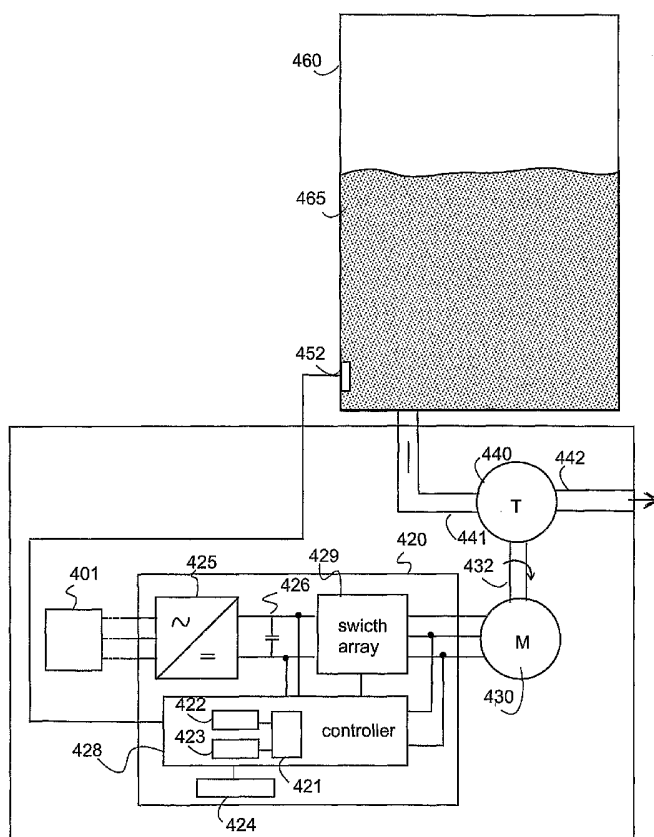

(57) Abstract: The invention relates to a method and an arrangement for controlling a pump station. The invention is preferably applied to a pump station connected to a well or a reservoir (460). The purposes of the invention are achieved with a solution involving measurement of the surface level of a liquid (465) by means of a sensor (452) and controlling the electric drive (401, 420, 430) of the pump (440) to a predetermined speed of rotation when a specific surface level value has been reached. This predetermined rotation speed value is preferably the rotation speed at which the ratio of the flow rate to the consumed power, i.e. the efficiency, is optimal. The measurement of the surface level and the related data processing for control of the pump are performed in a frequency converter (420) in conjunction with the control. The invention is applicable to pump stations comprising one or more pumps.



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method and arrangement for controlling a pumping station

The invention relates to a method and arrangement for controlling a pump station.

- 5 The invention is most advantageously applied to a pump station connected to a tank or a reservoir.

Pump stations are used especially in municipal engineering, where they are typically connected to pure water tanks, rain water tanks or waste water reservoirs.

- 10 The pump station is then intended to prevent the tank/reservoir from being emptied or filled depending on the application. Pump stations often comprise a measurement apparatus for determining the liquid surface level by measuring the liquid surface level and controlling the pump on the basis of the surface level.

- 15 Pump stations used for liquid transfer are usually composed of one or more electrically driven pumps. The electric drive consists of a suitable current supply circuit, an electric motor and a control unit suitable for controlling and/or adjusting the electric motor. The pump operates as a load on the electric drive. The most frequently used electric motor in pump systems is an alternating-current motor, especially an induction motor. An alternating-current motor is most conveniently
20 controlled by a contactor, and then the motor is switched on/off in accordance with the liquid surface level. However, the control unit often consists of a frequency converter because of the benefits yielded by this. The speed of an electric motor is controlled with a frequency converter, which converts the frequency of the voltage
25 supplied to the motor. The frequency converter, in turn, is adjusted by appropriate electric control signals.

- A prior art pump station is illustrated in figure 1. The pump 140 is electrically driven, the electric drive consisting of power supply 101, a frequency converter
30 120 acting as the control unit and an alternating-current motor 130, which is a three-phase motor in this case. The motor is usually connected to the pump with the rotation speed of the motor and the rotation speed of the pump being equal. The power supply 101 comprises an alternating-current network, such as a three-phase network, or any similar alternating-current source for supplying electric
35 energy to the electric drive.

The pump station illustrated in figure 1 comprises a liquid tank 160, liquid 165 accumulated in this being pumped with a pump 140 into an exhaust manifold 142. The liquid surface level in the tank is measured by two surface level sensors 151 and 152, which are connected to the control unit 150. Each of the surface level
5 sensors gives the control unit a signal indicating whether the surface level is above or below the sensor, in other words, the sensor is of switch type. The control unit 150 controls the pump operation e.g. as follows. When the liquid surface level is below the lower sensor 152, the pump is stopped. The pump remains switched off until the liquid surface reaches the upper surface level sensor 151, and then the
10 pump is fully activated. The pump is operating until the liquid surface reaches the lower surface level sensor 152, and then the pump stops. There are also applications in which the pump is intended for pumping liquid into the tank and for keeping the liquid amount within given limits. In that case, the control described above has reverse operation, i.e. when the liquid surface level is below the lower
15 surface level sensor, the pump is activated, and when the liquid surface level is above the upper surface level sensor, the pump stops. The functions described above do not utilise the feature of controlling the rotation speed provided by the frequency converter.

20 Instead of surface level sensors of switch type, one could use e.g. a surface level sensor 152 based on pressure measurement, the sensor being located at the bottom of the tank and providing information about the surface level at all surface levels. In that case, one often uses a control arrangement in which a constant surface level is aimed at, with the rotation speed of the pump being continually
25 adjusted in accordance with the liquid amount entering the tank or consumed from the tank.

In figure 1, the pump and its drive have been illustrated outside the liquid tank for the sake of clarity, yet pump stations commonly use also pump installations within
30 the liquid tank, e.g. at the tank bottom. Prior art arrangements have been described e.g. in patent specifications EP 619431 B1 and EP 100390 B1.

Prior art solutions involve a number of drawbacks. Separate installation of measurement and control apparatus requires work at the mounting site, and the
35 appropriate mounting site and arrangement for the equipment and the sensors often require specific planning for each installation. The conditions at the mounting

site may also vary, and this requires the use of measurement and control devices of different types depending on the conditions at the mounting site.

5 In addition, in prior art solutions, the energy consumption and efficiency of the pump station depends on external factors, e.g. on the flow-time distribution of the liquid entering a tank to be emptied or of the liquid consumed from a tank to be filled. Thus, a pump station may have poor energy consumption efficiency. In addition, the operating speed of the pump may be – especially in continuously regulated systems - permanently so low that impurities, which risk to cause
10 obstructions, gather in the piping because of the low flow. The drawbacks mentioned above increase the cost of installing the pump station, of the equipment and of the operation.

15 The purpose of the invention is to provide a new method and arrangement for controlling a pump station, the invention allowing the prior art drawbacks mentioned above to be eliminated or reduced.

The objectives of the invention are attained with a solution, in which the liquid surface level is measured, and when a given surface level value has been passed
20 by, the electric drive of the pump is controlled to a predetermined rotation speed. This predetermined value of the rotation speed is preferably the rotation speed at which the rate of flow relative to the consumed power, i.e. the efficiency, is at maximum. The surface level is measured in connection with the control of the electric drive. The invention is applicable to pump stations comprising both one
25 and more pumps.

The invention achieves significant advantages over prior art solutions:

30 - the invention avoids acquisition and installation of measurement and control apparatus separately.

- since the pump is principally operated with optimal efficiency, energy savings are achieved.

35 - since the pump is principally operated at a rotation speed yielding a high flow rate, accumulation of impurities in the piping with consequent obstructions are avoided especially in waste water plants.

In the method of the invention for controlling a pump station, the pump included in the pump station transferring liquid from a tank or into a tank and said pump being controlled by an electric drive comprising a frequency converter

5

- the surface level of the liquid in the tank is measured with a sensor,
- the pump operation is controlled on the basis of the measured surface level,

the method being characterised by

10

- selecting a first value of the liquid surface level,
- selecting as the value of the first rotation speed of the pump substantially the value at which the ratio of transferred liquid amount to consumed energy is at maximum and

15

- monitoring the moment when the surface level reaches said first value of the liquid surface level from a predetermined direction, and controlling as a consequence of this detection the pump rotation speed to said first value of the rotation speed,

20

- said monitoring of the surface level and control of the rotation speed being performed in the frequency converter.

The frequency converter of the invention for electric drive of a pump station, the pump station comprising a liquid tank, a pump and an electric drive actuating the pump, is characterised by the frequency converter comprising

25

- means for storing a first value of the liquid surface level,
- means for storing a first value of the rotation speed of the pump,
- means for measuring the liquid surface level on the basis of a signal received from a sensor,

30

- means for detecting the moment when the liquid surface level reaches said first value of the liquid surface level from a predetermined direction, and means for controlling the rotation speed of the pump to said first value of the rotation speed as a consequence of said detection so that said first value of the rotation speed is substantially the value at which the transferred liquid amount relative to the

35

- consumed energy is at maximum.

A number of embodiments of the invention are described in the dependent claims.

The invention and its other advantages are explained in greater detail below with reference to the accompanying drawings, in which

- 5 Figure 1 is a principal schematic view of a prior art pump station equipped with a frequency converter,

Figure 2 is a flow chart of a method of the invention for controlling a pump station on the basis of the liquid surface level and

10

Figure 3a is a schematic diagram of the operation of the invention in a pump station comprising three pumps in some situations where the surface level changes,

- 15 Figure 3b is a schematic diagram of the operation of the invention in a pump station comprising three pumps in some other situations where the surface level changes,

Figure 4 is a block diagram of a pump arrangement of the invention and

20

Figure 5 illustrates the installation of a pump station of the invention.

Figure 1 has been explained above in conjunction with the description of prior art.

- 25 Figure 2 is a flow chart of a method of the invention for controlling a pump station. Step 200 illustrates the first activation of the pump system. Step 202 comprises selection of a first, second and third value of the surface level and storage of the values preferably in the controller of the frequency converter of the electric drive. The first surface level value is a central value among the three values. In the case
30 of a pump application for emptying the tank, the second value of the surface level is the highest one and the third surface level value is the lowest one of the three values. When the surface level is below the lowest, i.e. the third value, the pump is switched off. Accordingly, when the surface level is above the highest, i.e. the second value, the pump is operated at the highest rotation speed.

35

Step 204 comprises selection of the first and second value of the rotation speed and storage of the values. The first value of the rotation speed is preferably the

value at which the pump station operates at optimal efficiency. The second value of the rotation speed is a value of the rotation speed higher than the first value, preferably the maximum rotation speed and/or the rotation speed achieving the maximum flow value.

5

Step 205 comprises measurement of the surface level of the liquid, such as water, present in the tank/reservoir. The measurement is performed by means of a signal received from the surface level sensor in the electric drive, preferably a frequency converter. Next follows monitoring of whether the predetermined first, second or
10 third value of the surface level have been reached from the predetermined direction. The first direction is then the one into which the liquid level moves when the pump is switched off and the second direction is the one into which the pump seeks to move the liquid surface during operation. Thus, for instance, in pump installation for emptying the tank, the first direction is the direction into which the
15 liquid surface rises and the second direction is the one into which the liquid surface sinks. Accordingly, in a pump installation for filling the tank, the first direction is the one into which the liquid surface sinks and the second direction is the one into which the liquid surface rises.

20 Step 206 comprises checking of whether the liquid surface has reached the first value of the surface level from a first direction. If this has occurred after the previous measurement, the rotation speed of the pump is set to a first value, i.e. the value at which its efficiency is optimal, 207. Unless the first value of the surface level has been reached from the first direction, the system proceeds to
25 step 208.

Step 208 comprises checking of whether the liquid surface has reached the second value from a first direction after the previous measurement. If this is the case, the rotation speed of the pump is set to the second value, i.e. the value that
30 is preferably the maximum rotation speed, or a rotation speed yielding the maximum flow value, 209. Unless the second value of the surface level has been reached from a first direction, the system proceeds to step 210.

Step 210 comprises checking of whether the first value of the liquid surface has
35 been reached from a second direction after the previous measurement. If this is the case, the rotation speed of the pump is set to the first value, 211. Unless the first value of the surface level has been reached from a second direction, the

system proceeds to step 212. Steps 210 and 211 are not necessary, but instead, as the pump moves the liquid surface, it may operate also at the second, i.e. higher rotation speed value until the third surface level value has been reached.

- 5 Step 212 comprises checking of whether the third value of the liquid surface has been reached from a second direction after the previous measurement. If this is the case, the pump is stopped, 213. Finally step 205 is resumed for a new measurement of the surface level.
- 10 One or more values of the liquid surface level are advantageously varied, because this avoids or reduces accumulation of any solid constituents contained in the liquid on the tank wall at the selected surface level.

- It should be noted that the steps above could be performed in a different order or simultaneously. The comparison of the measured surface level with predetermined values can be performed e.g. by analogue comparators or by comparing digital values in a processor.
- 15

- When the pump station comprises two or more pumps associated with the same tank, their controls are preferably arranged such that the pumps are activated in turn during pumping of liquid in small amounts, for the pumps to wear evenly and to avoid damage to any pump due to lack of use over a long period. When a large liquid flow is necessary, several pumps are advantageously used at the same time. However, it is possible to reach an adequate flow even in systems of several pumps by means of one single pump, and in that case the pumps would wear unevenly if they were not operated in turns.
- 20
- 25

- Figure 3a illustrates a control of pumps of the invention as the liquid level h changes, with three pumps; M1, M2 and M3 and when the pumping requirement is small. This is an application where the pumps empty the tank. When the liquid level has risen to the first value of the surface level at moment a, the pump M1 is activated. The rotation speed v of the pump is set to a first value of the rotation speed, at which the efficiency of the pump is at maximum (eff). As the liquid level reaches the third value of the liquid surface as a consequence of emptying at moment b, the pump M1 is stopped.
- 30
- 35

When the liquid level has again risen to the first value of the surface level at moment c, pump M2 is activated in turn. The rotation speed of the pump is set to the first value of the rotation speed, at which the efficiency of the pump is at maximum (eff). As the liquid level reaches the third value of the liquid surface as a consequence of emptying at moment d, the pump M2 is stopped.

When the liquid level has again risen to the first value of the surface level at moment e, the pump M3 is activated in turn. The rotation speed of the pump is set to the first value of the rotation speed, at which the efficiency of the pump is at maximum (eff). As the liquid level reaches the third value of the liquid surface as a consequence of emptying at moment f, the pump M3 is stopped.

Subsequently, as the liquid surface next rises to the first value of the surface level at moment g, the pump M1 is activated again. As the liquid level reaches the third value of the liquid surface as a consequence of emptying at moment h, the pump M1 is stopped, etc.

As can be seen in figure 3a, the operations for switching on and off the pumps have been controlled to occur at a given retarded rate of changing the rotation speed, instead of sudden changes. This reduces the stresses exerted on the motor and the pump.

The controls of the different pumps are preferably coordinated by the control unit of the frequency converter of one pump. The data transfer between the different control units takes place by data transfer arrangements known *per se*, such as analogue/digital signals, by serial communications or via a field bus. In this case, the coordinating control unit of one pump transmits control data to the control units of the second/other pumps, which comprise means for receiving these control data from the coordinating control unit. Accordingly, data transfer arrangements between the control units can be used also for transferring surface level data from one control unit to another.

Figure 3b illustrates a similar control of pumps in accordance with the invention when the liquid level h changes and there are three pumps; M1, M2 and M3, and when pumping of water in large amounts is necessary. When the liquid level has risen to the first value of the surface level at moment A, the pump M1 is activated. The rotation speed v of the pump is set to a first value of the rotation speed, at

which the efficiency of the pump is at maximum (eff). The flow of the pump M1 does not, however, suffice for emptying the tank, but the liquid level continues to rise. When the liquid surface level reaches the following limit value, pump M2 is also switched on at moment B. Pump M2 is preferably set to the second value of the rotation speed (max), at which the rotation speed and/or flow are at maximum. After a given delay, also pump M1 is set to a second higher value (max) of the rotation speed. However, the flow of pumps M1 and M2 is not enough for emptying the tank in this case, but the liquid level goes on rising.

When the liquid surface level reaches the following limit value, also pump M3 is activated at moment C. Pump M3 is also preferably set to a second value of the rotation speed (max) at which the rotation speed and/or flow are at maximum. When all the three pumps have reached their maximum operation, the liquid level starts sinking. When the liquid level reaches the following level threshold value at moment D, the pump M1 is set to the first value (eff) of the rotation speed. When the liquid surface level has sunk to its lowest threshold value at moment E, all the three pumps are switched off.

Figure 4 is a block diagram of a pump station in accordance with the invention. The system comprises an electric drive, which actuates the pump 440 and consists of an electric supply 401, a frequency converter 420 and an alternating-current motor 430. The frequency converter 420 shows a separate control unit 428 controlling switches 429 and performing the control of the operation of the frequency converter. The control unit also performs the control of the drive on the basis of the measurement value of the surface level of the liquid 465 in the tank/reservoir 460 in accordance with the present invention. The control unit receives a signal proportional to the surface level of the liquid 465 from the surface level sensor 452 over a terminal in the controller. The control unit may also comprise a terminal for transferring surface level data to a control unit controlling a second pump or for receiving surface level data from a control unit controlling a second pump. In addition, the control unit may comprise an input or output terminal, by means of which data are transferred by one or more controllers in a pump station comprising several pumps. This enables the pumps to be operated alternately and simultaneously if necessary.

The control unit 428 comprises preferably a processor 421, which monitors the liquid surface level and controls the functions of the frequency converter on the

- basis of the software. The control unit also comprises a memory unit 422 for storage of reference values of the surface level, selected values of the rotation speed of the motor and programs controlling the processor. The control unit also comprises a measurement unit 423, which receives and processes signals from one or more surface level sensors. The control unit is preferably connected also with an interface 424 having a keyboard and a display. The keyboard serves for feeding parameters used in the control and the display may show e.g. surface level data and information about the state of the electric drive.
- 10 The control unit may further comprise an input terminal for receiving alarm signals obtained from alarm sensors in the pump. Such alarm sensors typically consist of a temperature sensor or a leakage sensor. The control unit preferably controls the pump on the basis of a received alarm signal so that the control unit stops the pump after having received an active alarm signal. In such a situation, the control
- 15 unit preferably transmits an alarm signal to the monitoring room. The control unit may carry out a similar alarm function to the monitoring room e.g. when the liquid surface value exceeds the predetermined alarm limit.
- For controlling the processor, software has been stored in the memory of the control unit in order to enable the processor to control the functions of the frequency converter. The software has preferably been disposed to control the control unit to perform at least one of the following functions:
- 20
- measurement of the liquid surface level on the basis of a signal from the sensor and control of the rotation speed of the pump on the basis of the liquid surface level,
 - coordination of the control of at least two pumps so that the pumps are activated in turns,
 - variation of at least one selected value of the liquid surface level in order to avoid that solid ingredients in the liquid gather on the wall of the tank at the selected surface level;
 - performing an alarm function when the liquid surface level exceeds a predetermined alarm limit value, and
 - monitoring the alarm signals from the alarm sensors of the pump and controlling
- 35 the pump on the basis of the alarm signals.

Figure 5 illustrates a pump station in accordance with the invention. A pump 540 is disposed at the bottom of the tank 560 for pumping liquid into the exhaust pipe 542. A motor 530 for driving the pump is connected with the pump. A frequency converter and its controller 520 are provided at the top of the tank 560. Power supply has been provided from the frequency converter to the motor and a connection has been arranged to the surface level sensor by cabling 552.

It should be noted that the examples above use a surface level sensor, whose signal gives the value of the surface level each time the surface level is above the sensor. However, in the solution of the invention, surface level switches placed at the desired levels can, of course also be applied. The surface level can also be measured in many other ways, by means of an ultrasonic sensor, for instance.

It should also be noted, that, although an individual frequency converter having a separate control unit controls each of the pumps in the examples above, the frequency converters and/or control units of several pumps can naturally be combined into one single unit.

Although the major application of the present invention relates to water transfer, the invention can naturally be implemented in connection with other liquids as well.

The invention is not restricted merely to the embodiment example above, but many other modifications are conceivable without departing from the scope of the inventive idea defined by the independent claims.

Claims

1. A method for controlling a pump station, a pump included in the pump station transferring liquid from or into a tank and said pump being controlled by an electric drive comprising a frequency converter, the method comprising
- 5 - measuring the surface level of a liquid in the tank by means of a sensor (205),
 - controlling the activation of the pump on the basis of the measured surface level (206-213),
- 10 **characterised** in that the method comprises
- selecting a first value of the liquid surface level,
 - selecting as the value of the first rotation speed of the pump substantially the value at which the amount of transferred liquid relative to the consumed energy is
- 15 at maximum and
- monitoring the moment when the surface level reaches said first value of the liquid surface level from a predetermined direction (206) and controlling as a consequence of this detection the pump rotation speed to said first value (204, 207) of the rotation speed,
- 20 - said monitoring of the surface level and control of the rotation speed being performed in a frequency converter.
2. A method as defined in claim 1, **characterised** in that a tank is filled by means of a pump at a pump station, said predetermined direction being from the top
- 25 towards the bottom.
3. A method as defined in claim 1, **characterised** in that a tank is emptied by means of a pump at a pump station, said predetermined direction being from the bottom towards the top.
- 30 4. A method as defined in claim 1, **characterised** in selecting a second value (202) of the rotation speed of the pump and in monitoring the moment at which the liquid surface level reaches the following second value (208) of the surface level from said predetermined direction, and as a consequence of this detection, the
- 35 rotation speed of the pump is controlled to a second value (204, 209) of the rotation speed.

5. A method as defined in claim 4, **characterised** in that said second value of the rotation speed is the maximum rotation speed.
6. A method as defined in claim 1, **characterised** in that at least two pumps (M1, M2, M3) are controlled at the pump station so that the pumps are in operating turns (a-b, c-d, e-f, g-h) alternately.
7. A method as defined in claim 1, **characterised** in that at least two pumps (M1, M2, M3) are controlled at the pump station and a third value of the rotation speed is selected, and while the first pump is operating, the moment is monitored at which the liquid surface level reaches a third value (B) of the surface level from said predetermined direction, and as a consequence of this detection, the second pump (M2) is also activated.
8. A method as defined in claim 1, **characterised** in that said predetermined at least one value of the surface level and at least one value of the rotation speed are stored in the frequency converter of the pump station.
9. A method as defined in claim 1, **characterised** in that said measurement of the surface level is performed in the frequency converter on the basis of a signal received from the surface level sensor.
10. A method as defined in claim 1, **characterised** in that an alarm signal is received from the alarm sensor of the pump and the pump is controlled on the basis of the received alarm signal.
11. A method as defined in claim 1, **characterised** in that an alarm function is performed when the liquid surface level exceeds a selected alarm limit value.
12. A method as defined in any of the preceding claims, **characterised** in that at least one selected value of the liquid surface level is varied in order to avoid that solid constituents in the liquid gather on the wall of the tank at the selected surface level.
13. A frequency converter (420) for the electric drive of a pump station, the pump station comprising a liquid tank (460), a pump (440) and an electric drive (401,

420, 430) actuating the pump, **characterised** in that the frequency converter (420) comprises

- means (422) for storing a first value of the liquid surface level,
 - 5 - means (422) for storing a first value of the rotation speed of the pump,
 - means (423) for measuring the liquid surface level on the basis of a signal received from the sensor (452),
 - means (421) for detecting the moment the liquid surface level reaches said first value of the liquid surface level from a predetermined direction and means (420)
 - 10 for controlling the rotation speed of the pump to said first value of the rotation speed as a consequence of said detection so that said first value of the rotation speed is substantially the value at which the amount of transferred liquid relative to the consumed energy is at maximum.
- 15 14. A frequency converter as defined in claim 13, **characterised** in that the pump of the pump station has been disposed to fill the tank, said predetermined direction being from the top to the bottom.
- 20 15. A frequency converter as defined in claim 13, **characterised** in that the pump of the pump station has been disposed to empty the tank, said predetermined direction being from the bottom to the top.
- 25 16. A frequency converter as defined in claim 13, **characterised** in comprising means (422) for storing the second value of the rotation speed and means (421) for monitoring the moment the liquid surface level reaches the following second value of the surface level from said predetermined direction, and means (420) for controlling the rotation speed of the pump to a second value of the rotation speed as a consequence of this detection.
- 30 17. A frequency converter as defined in claim 16, **characterised** in that said second value of the rotation speed is the maximum rotation speed.
- 35 18. A frequency converter as defined in claim 13, **characterised** in that the pump station comprises at least two pumps, the frequency converter being disposed to control the pump so as to set it in operating turn alternately with two or more other pumps.

19. A frequency converter as defined in claim 18, **characterised** in comprising means for transmitting control data to the frequency converter of a second pump and/or for receiving control data from the frequency converter of a second pump for controlling the operating turns of the pumps.

5

20. A frequency converter as defined in claim 18, **characterised** in comprising means for transmitting surface level data to the frequency converter of a second pump and/or for receiving surface level data from the frequency converter of a second pump.

10

21. A frequency converter as defined in claim 13, **characterised** in comprising a memory unit (422) for storage of said predetermined at least one value of the surface level and of at least one value of the rotation speed and also for storage of a program controlling the electric drive.

15

22. A frequency converter as defined in claim 13, **characterised** in comprising a measurement unit (423) for receiving a signal from the surface level sensor (452) and for determining the surface level on the basis of the received signal.

20

23. A frequency converter as defined in claim 13, **characterised** in comprising a terminal for connecting the surface level sensor.

24. A frequency converter as defined in claim 13, **characterised** in comprising a processor (421) for controlling the electric drive on the basis of the surface level data and on the basis of the program that controls the processor.

25

25. A frequency converter as defined in claim 13, **characterised** in comprising means for receiving an alarm signal from the alarm sensor of the pump and means for controlling the pump on the basis of the received alarm signal.

30

26. A frequency converter as defined in claim 13, **characterised** in comprising means for performing an alarm function if the liquid surface level exceeds a predetermined alarm limit value or if an alarm signal has been received from the alarm sensor of the pump.

35

27. A frequency converter as defined in claim 13, **characterised** in comprising software stored in the frequency converter for controlling the frequency converter to perform at least one of the following functions:

- 5 - measurement of the liquid surface level on the basis of a signal from the sensor and control of the rotation speed of the pump on the basis of the liquid surface level,
- variation of at least one selected value of the liquid surface level in order to avoid that solid ingredients in the liquid gather on the wall of the tank at the selected
- 10 surface level;
- coordination of the control of at least two pumps so that the pumps are activated in turns,
- performing an alarm function when the liquid surface level exceeds a predetermined alarm limit value, and
- 15 - monitoring the alarm signals received from the alarm sensors of the pump and controlling the pump on the basis of the alarm signals.

1/5

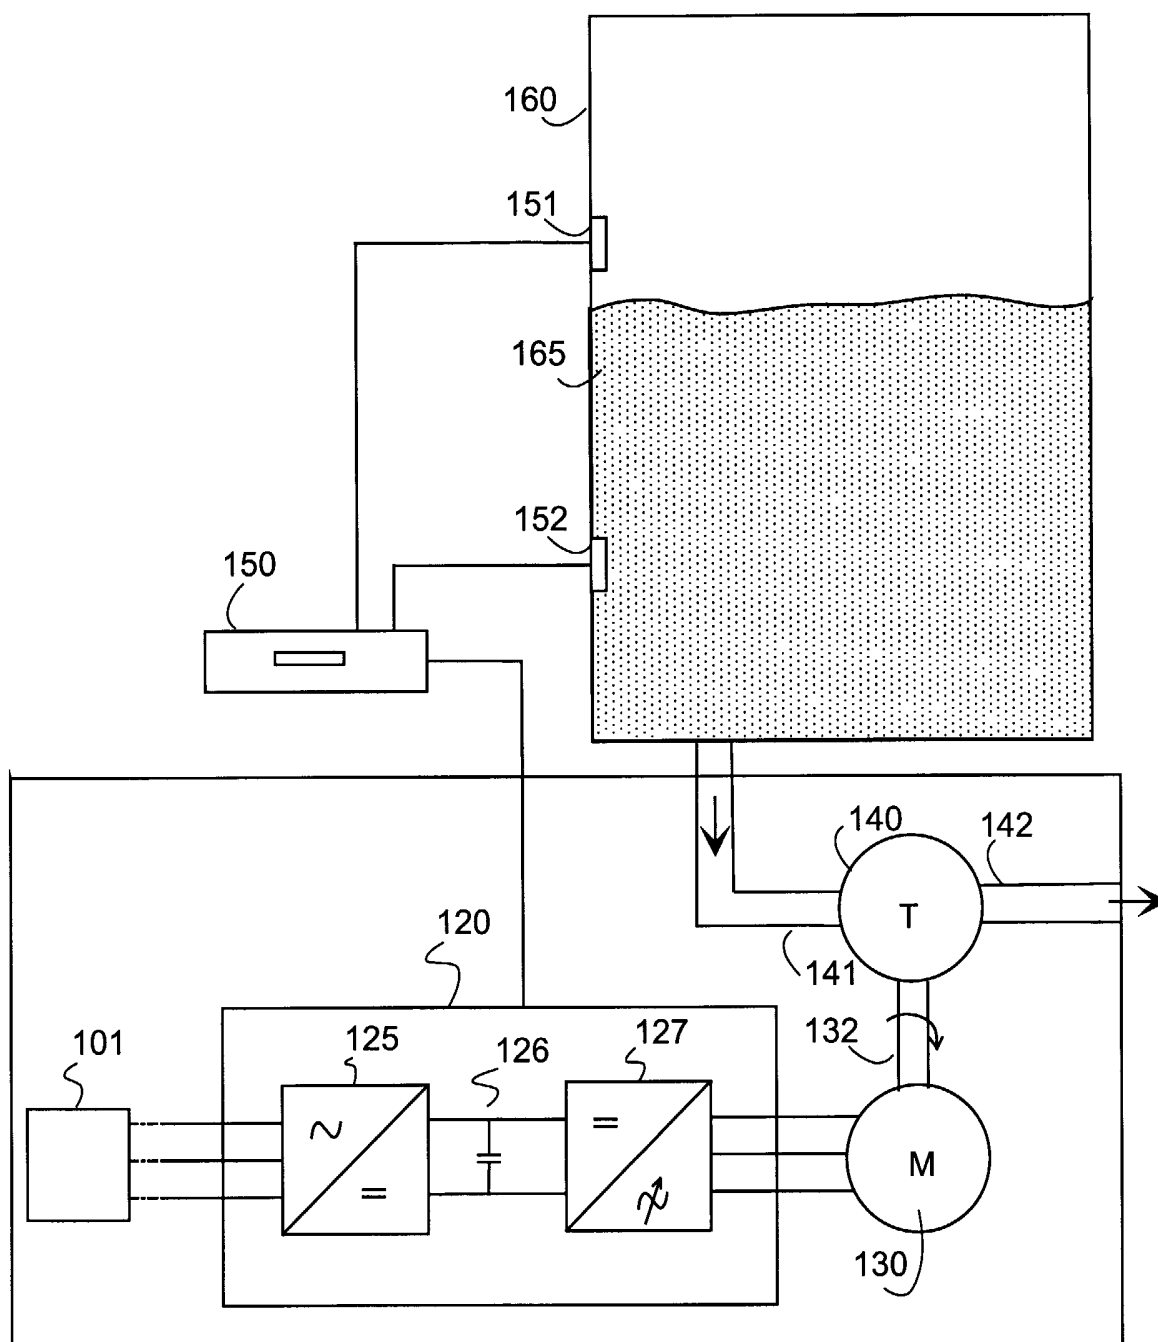


FIG. 1
PRIOR ART

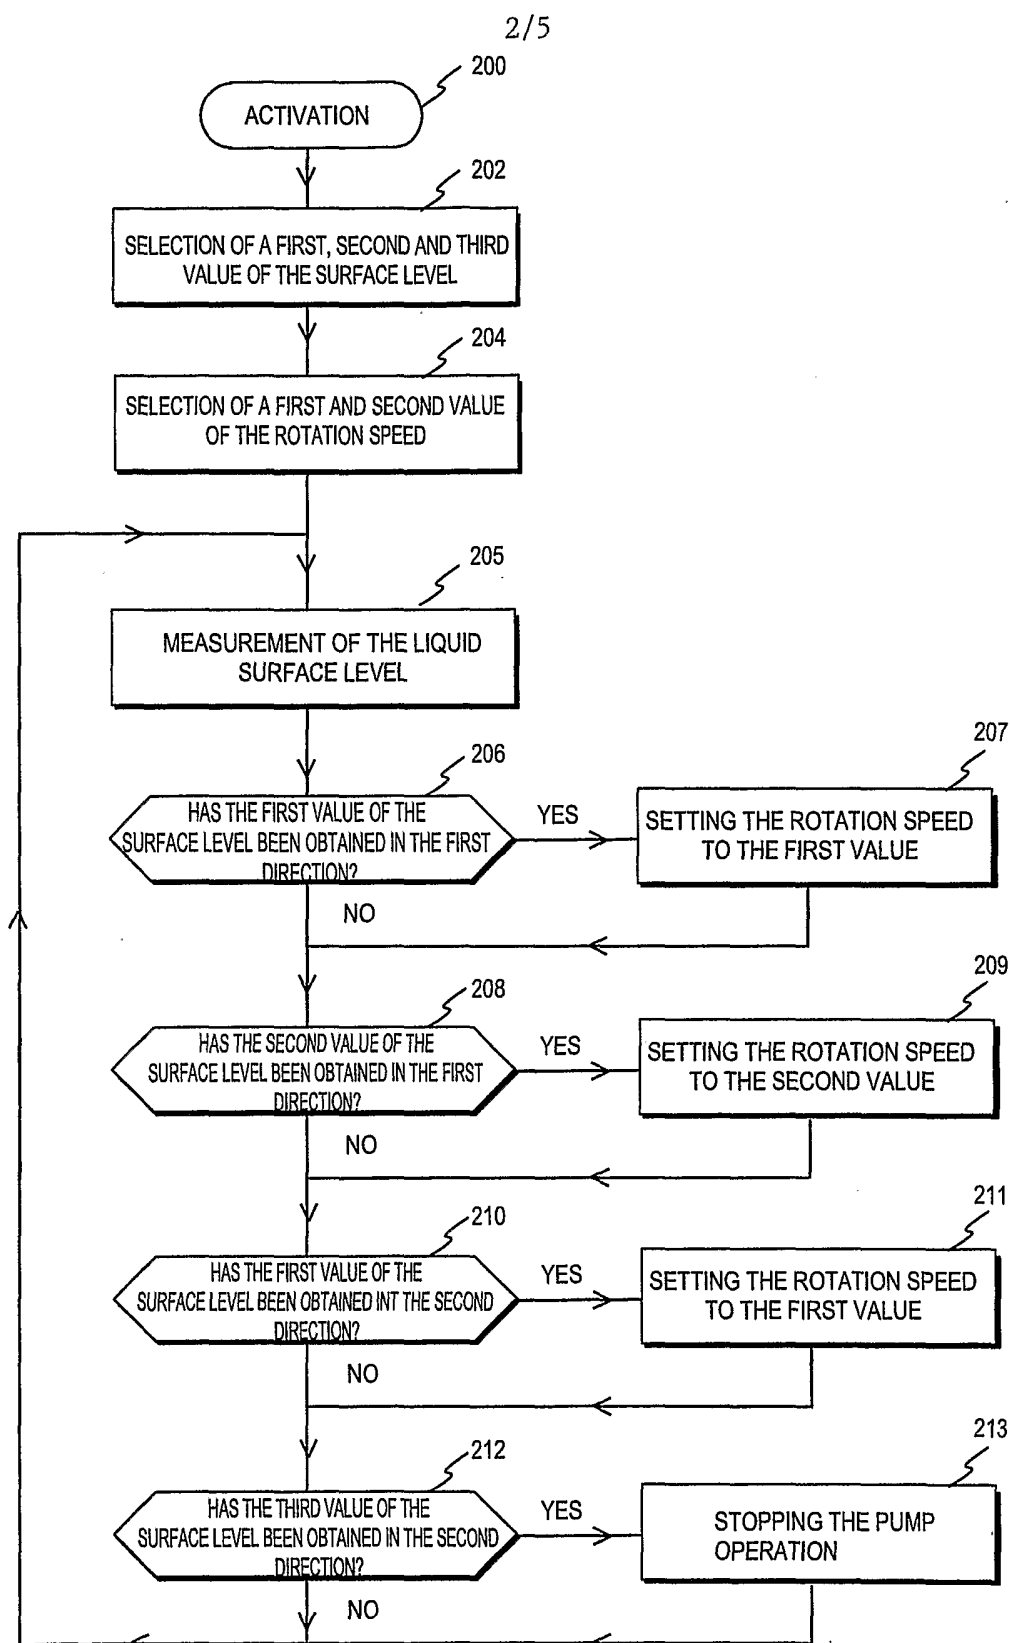


FIG. 2

3/5

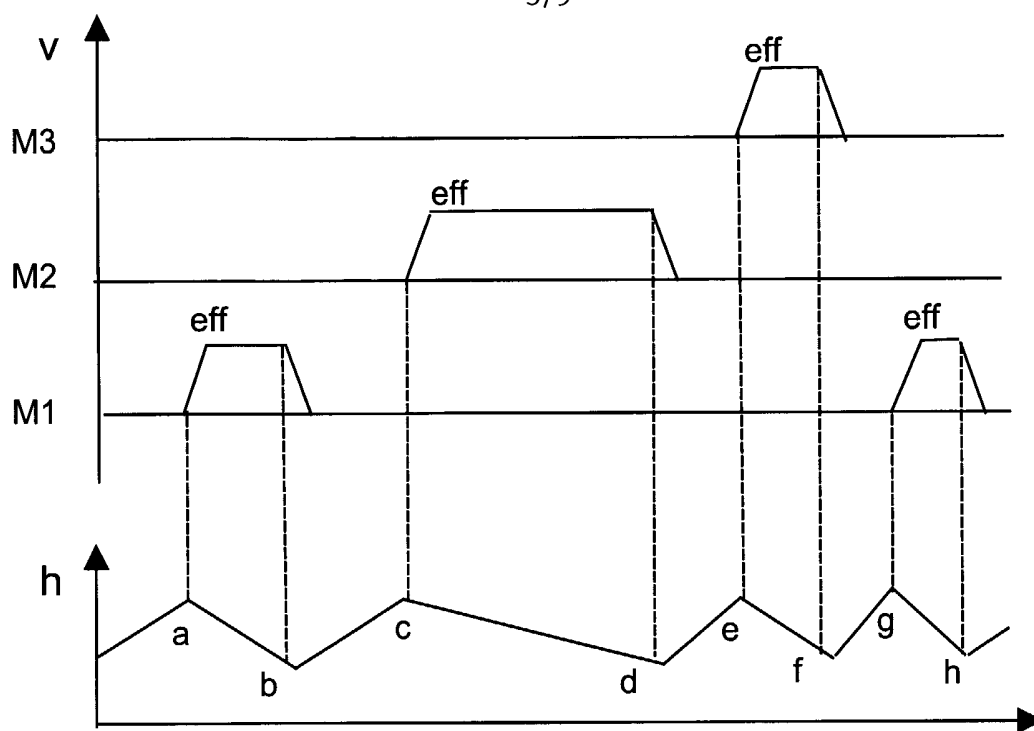


FIG. 3a

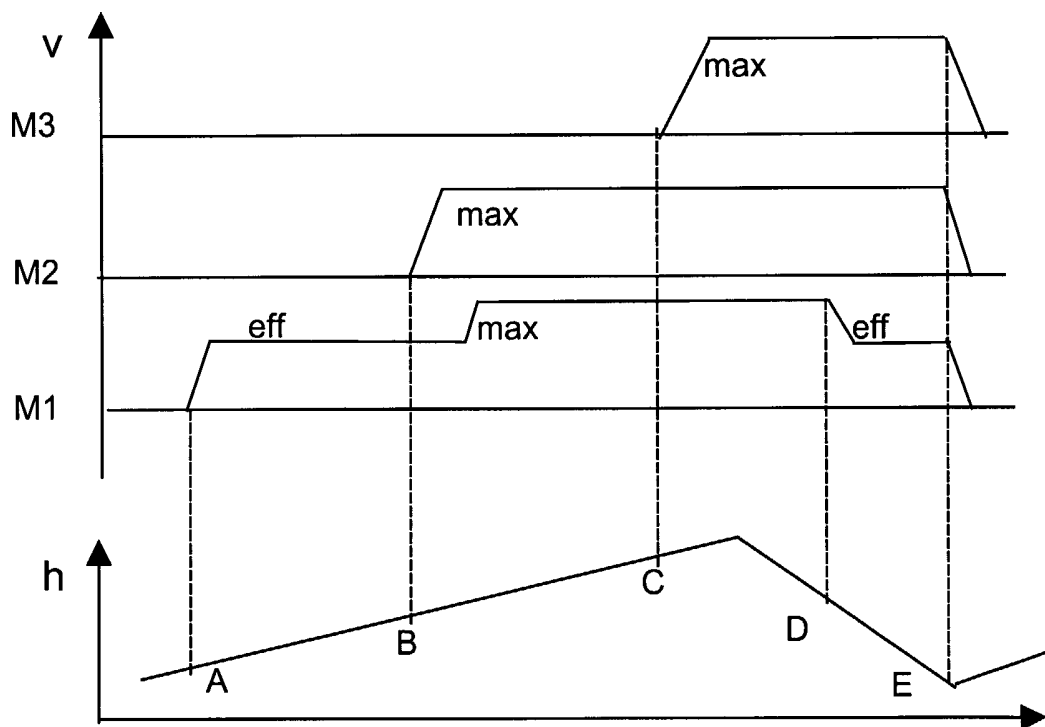


FIG. 3b

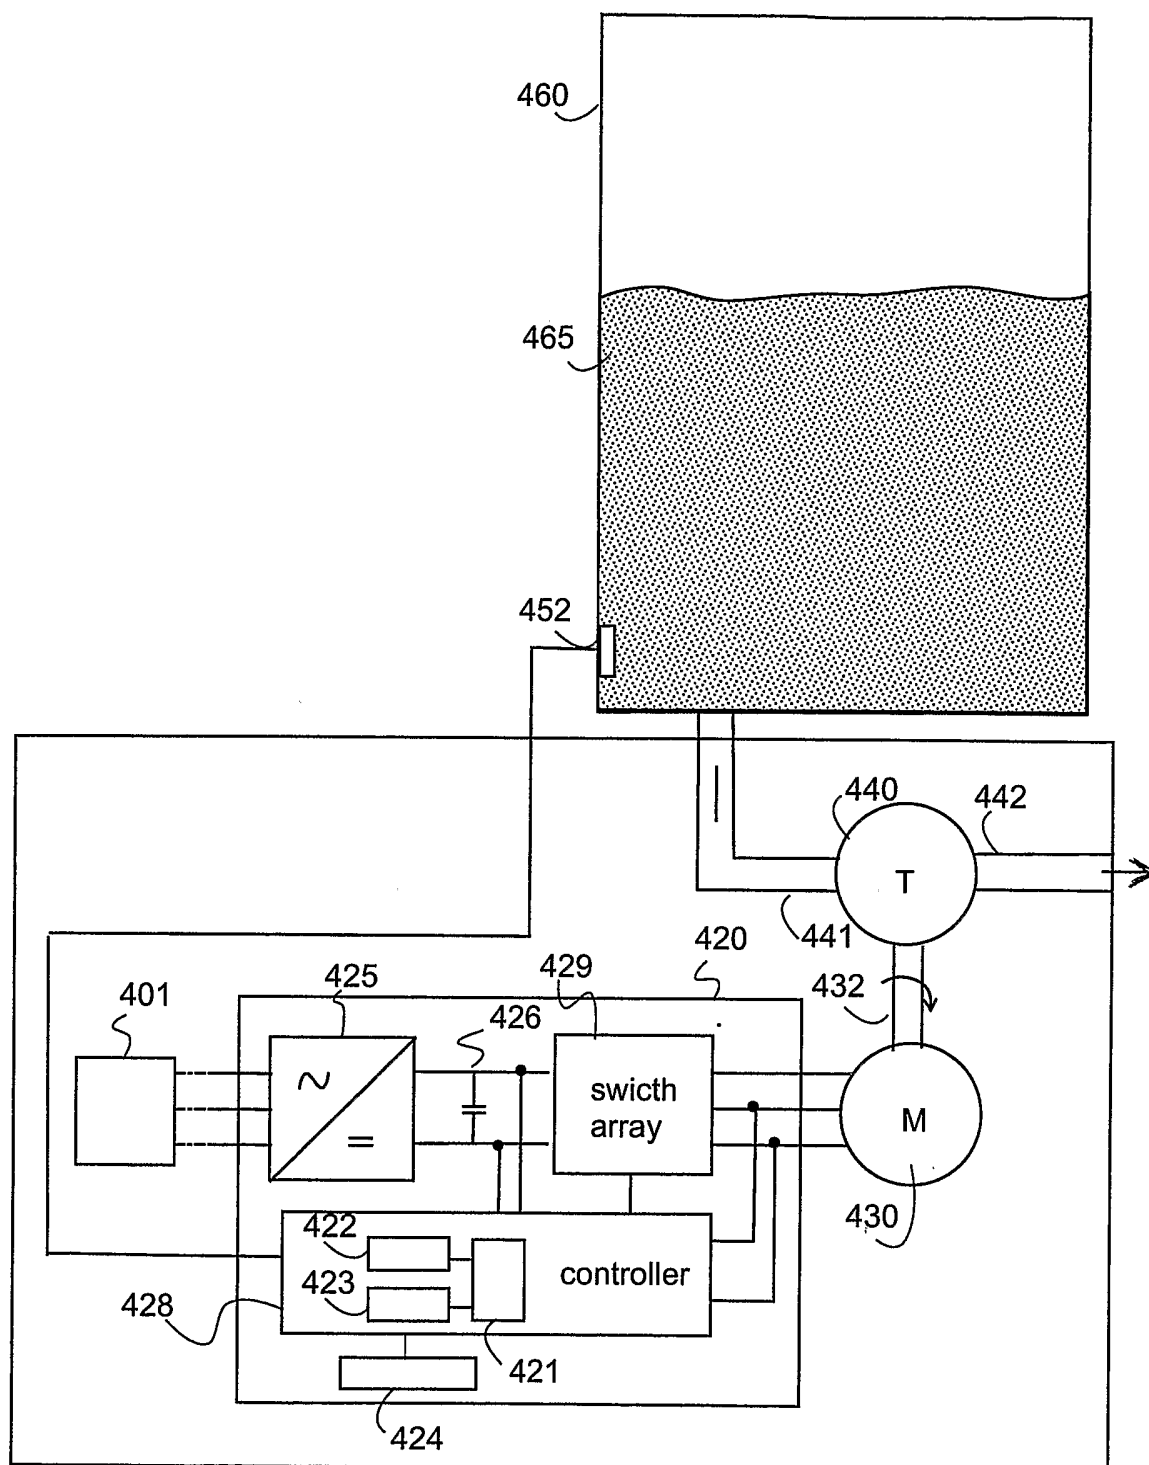


FIG. 4

5/5

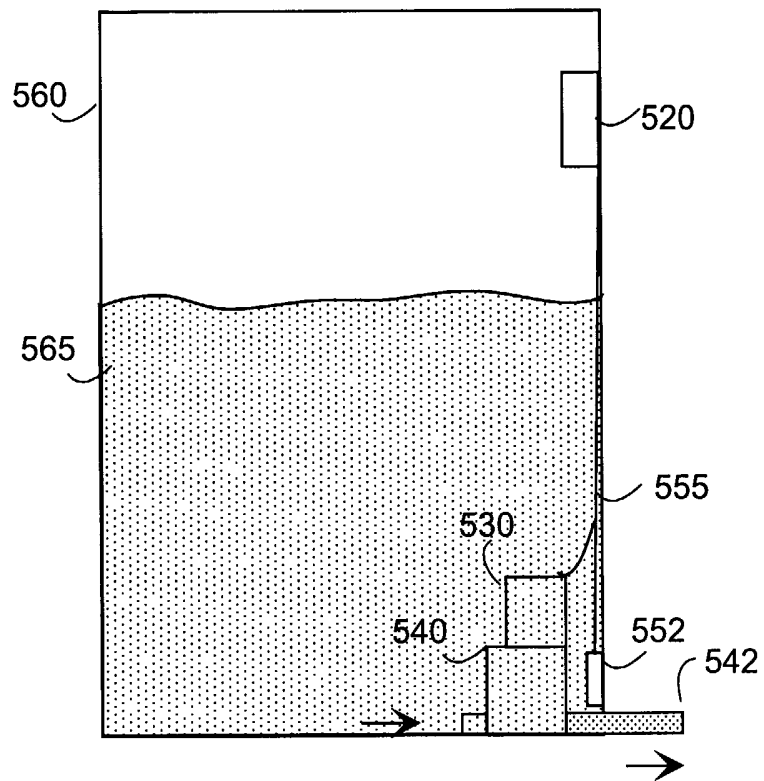


FIG. 5

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/FI2005/000152

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 F04D15/00 F04D15/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F04D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 234 319 A (WILDER ET AL) 10 August 1993 (1993-08-10) the whole document column 6, line 3 - line 27 -----	1-27
A	EP 1 323 984 A (GRUNDFOS A/S) 2 July 2003 (2003-07-02) the whole document paragraphs [0026], [0027] -----	1-27
X	EP 0 610 766 A (LICENTIA PATENT-VERWALTUNGS-GMBH) 17 August 1994 (1994-08-17) the whole document -----	1-27
A	EP 0 619 431 A (EBARA CORPORATION) 12 October 1994 (1994-10-12) cited in the application the whole document -----	1-27

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 July 2005

Date of mailing of the international search report

08. 08. 2005

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Ingelbrecht, P

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/FI2005/000152

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5234319	A	10-08-1993	NONE	
EP 1323984	A	02-07-2003	DE 10163989 A1 EP 1323984 A1	10-07-2003 02-07-2003
EP 0610766	A	17-08-1994	DE 4303479 A1 EP 0610766 A1	11-08-1994 17-08-1994
EP 0619431	A	12-10-1994	JP 3642578 B2 JP 6280783 A DE 69407466 D1 DE 69407466 T2 EP 0619431 A1 US 5667362 A	27-04-2005 04-10-1994 05-02-1998 30-07-1998 12-10-1994 16-09-1997