

[54] WEAPON FOR IMMOBILIZATION AND CAPTURE

3,374,708 3/1968 Wall ..... 317/262 S  
3,484,665 12/1969 Mountsoy et al. .... 317/262 S  
3,523,538 8/1970 Shimizy ..... 317/262 S

[76] Inventor: John H. Cover, 542 Vista Grande, Palos Verdes, Calif. 92660

Primary Examiner—L. T. Hix  
Attorney, Agent, or Firm—Marvin H. Kleinberg

[22] Filed: July 10, 1972

[21] Appl. No.: 270,411

[52] U.S. Cl. .... 317/262 S, 89/1 R

[51] Int. Cl. .... H05c 1/04

[58] Field of Search ..... 317/262 S; 231/2 E;  
102/92.1, 92.4, 1 R, 28 R, 70.2 R; 273/106  
R, 106 E; 89/1 R


[57] ABSTRACT





A weapon for subduing and restraining includes a harmless projectile that is connected by means of a relatively fine, conductive wire to a launcher which contains an electrical power supply. The projectile is intended to contact a living target without serious trauma and to deliver an electric charge thereto sufficient to immobilize. In different embodiments, the projectile can be a pellet, a net or a combination of pellets and a net. The magnitude and frequency of the electrical impulses delivered to the target can be controlled at the launcher, and would range in effect from immobilizing to potentially "lethal" levels.

[56] References Cited  
UNITED STATES PATENTS

8,843	3/1852	Sounenburg et al. ....	317/262 S
644,896	3/1900	Conveys .....	317/262 S
2,401,815	6/1946	Dalziel .....	317/262 S
2,805,067	9/1957	Ryan .....	317/262 S
3,156,185	11/1964	Hermann et al. ....	102/1

23 Claims, 15 Drawing Figures

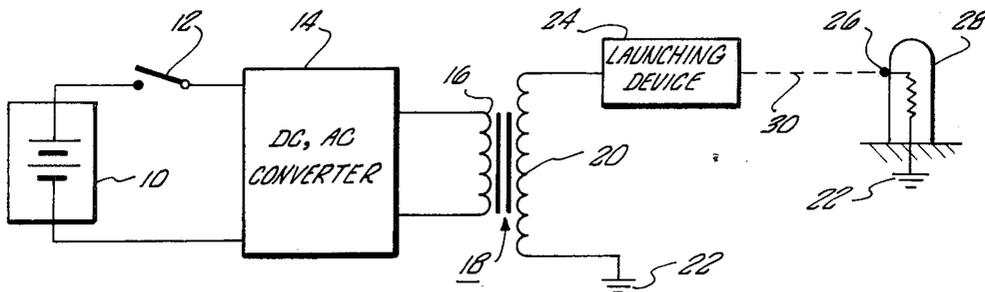

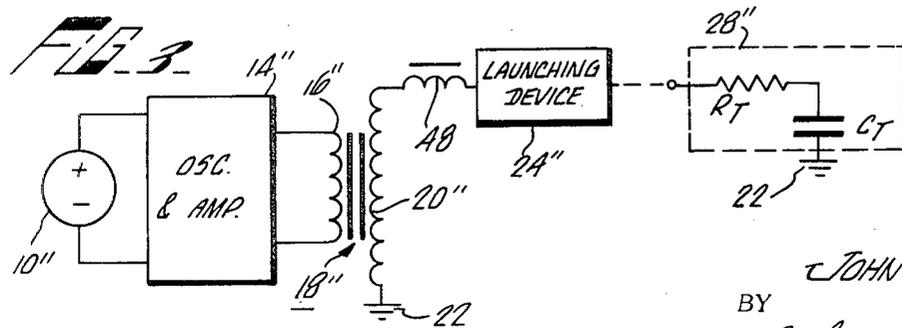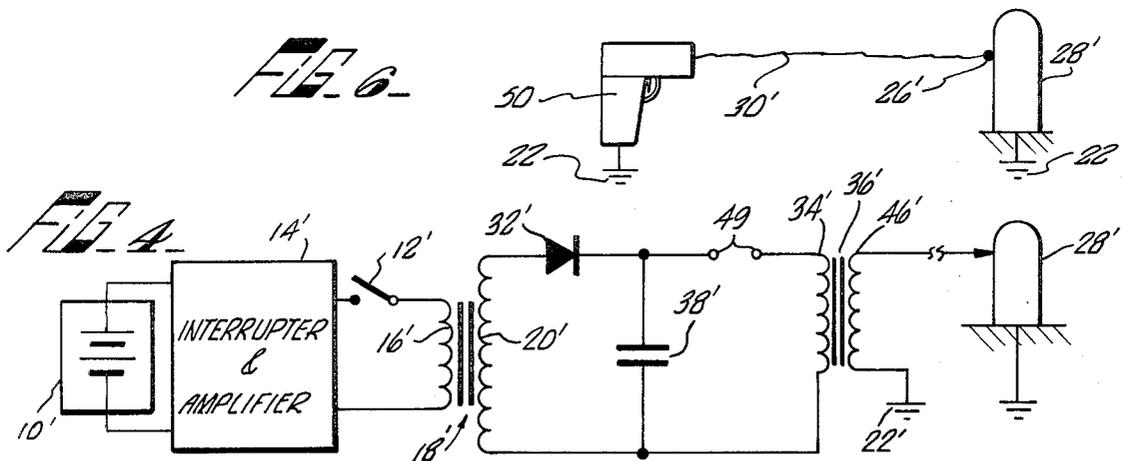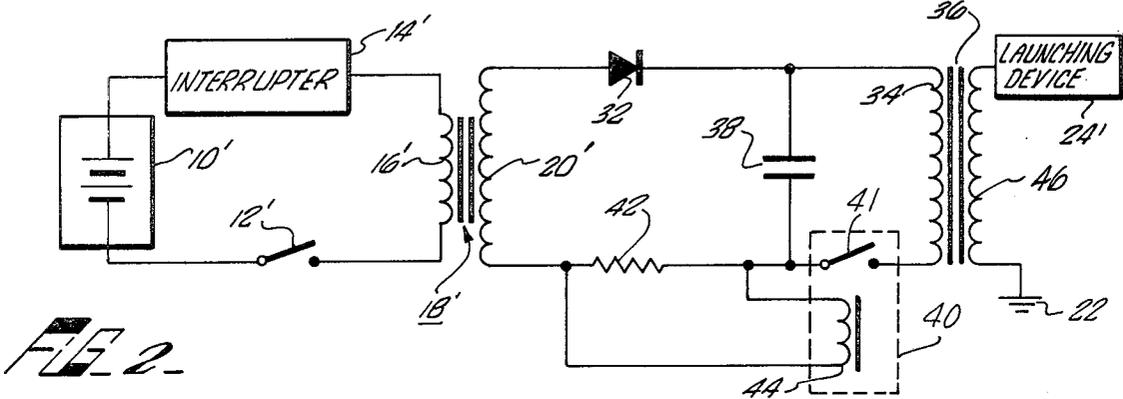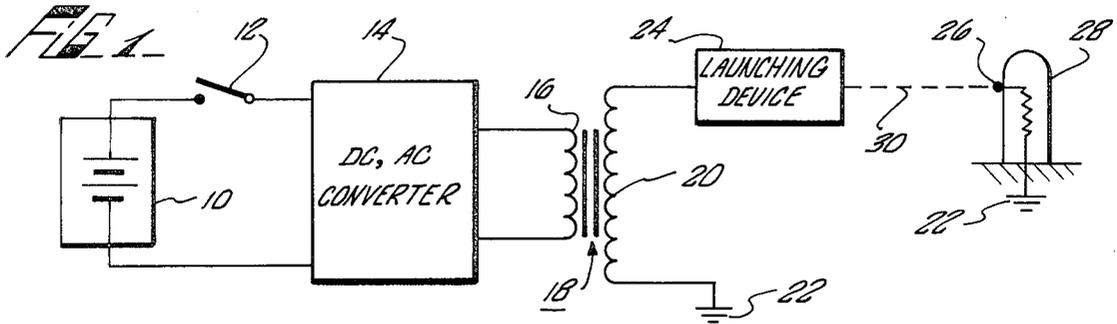

INVENTOR.  
JOHN H. COVER  
BY  
Golone + Kleinberg

FIG. 1

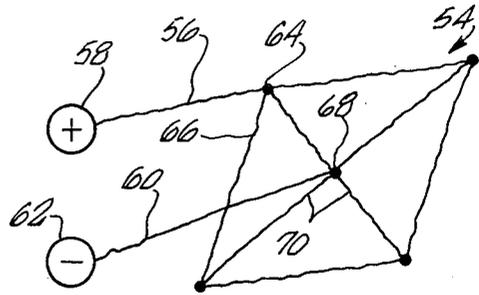
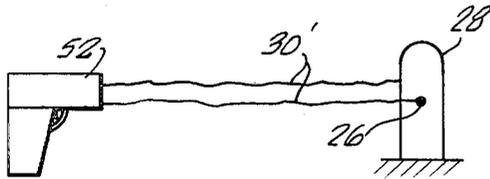


FIG. 8

FIG. 5

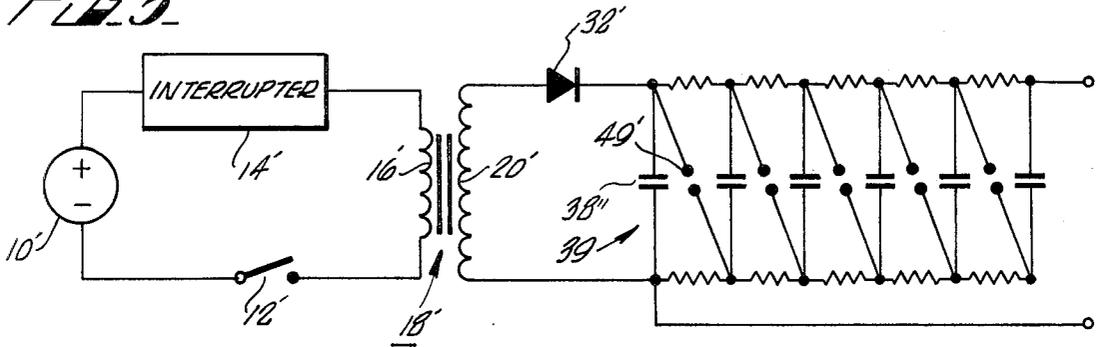


FIG. 14


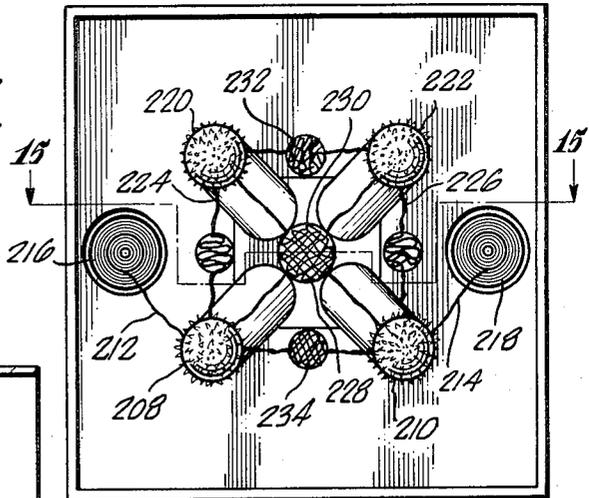


FIG. 15

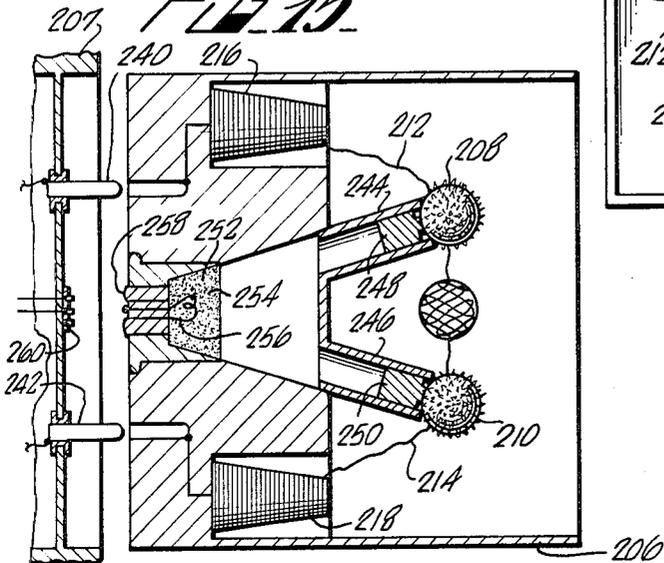

INVENTOR.  
JOHN H. COVER  
BY  
Golove + Kleinberg

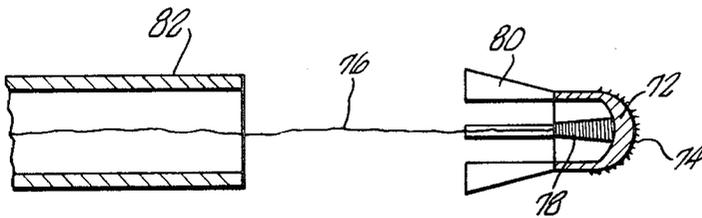


FIG 9

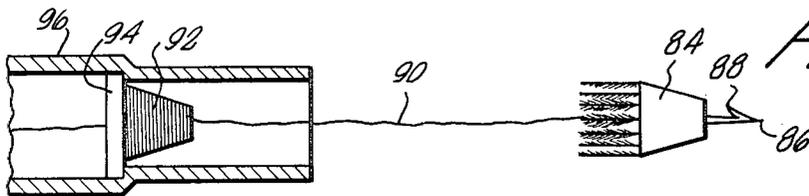


FIG 10

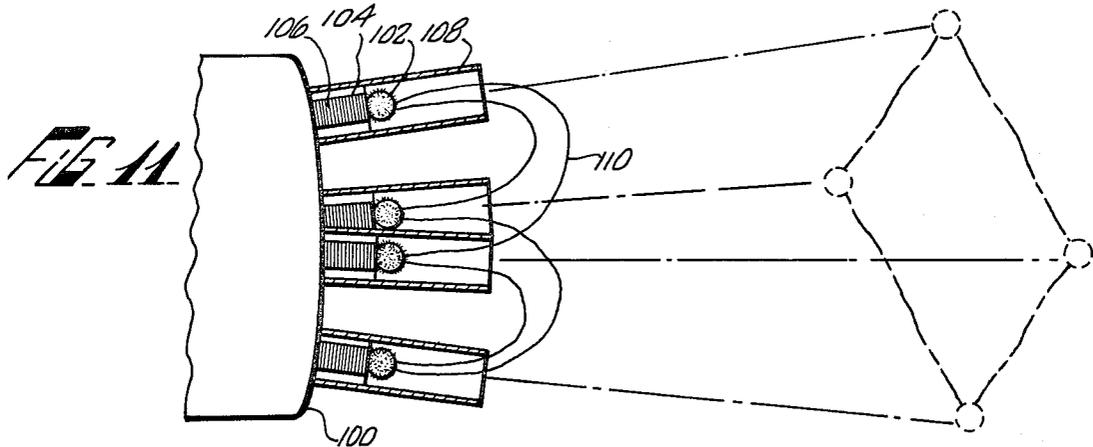


FIG 11

FIG 12

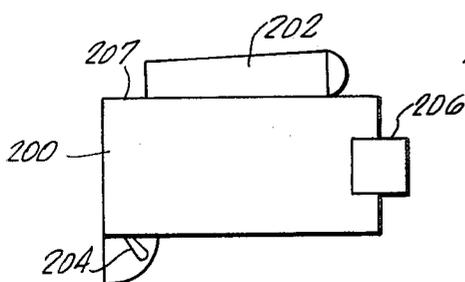
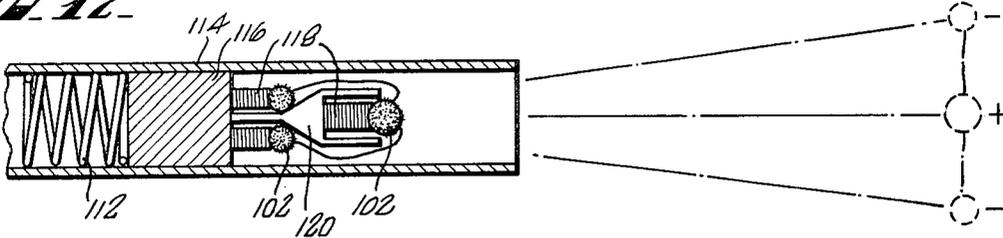


FIG 13

INVENTOR.  
JOHN H. COVER  
BY Golove + Klemberg

## WEAPON FOR IMMOBILIZATION AND CAPTURE

This is a continuation of application Ser. No. 37,234, filed May 14, 1970.

The present invention relates to weapons and more particularly to an improved weapon capable of delivering electrical impulses to remote targets.

In 1852, Dr. Albert Sounenburg and Phillip Rechten received U.S. Pat. No. 8,843, for "Electric Whaling Apparatus," which taught a harpoon connected through a conducting cable to a "magneto-electric rotation machine." The machine was a simple, mechanically operated generator which had one terminal connected to the cable and a second terminal connected through the "copper bottom" of a "whale boat," to the ocean. As taught, a harpooned whale could be "electrocuted" by operating the generator, even though the harpoon wound might be superficial.

In 1952, Thomas D. Ryan applied for Letters Patent for "Electric Weapons," which matured into U.S. Pat. No. 2,805,067, on Sept. 3, 1957. In that patent, various otherwise lethal weapons of the past such as spears, arrows, and lances were provided with self-contained power supplies. These weapons, in addition to any physical trauma that could be inflicted upon a target, also applied high voltage electrical impulses, which, the patent states, are capable of producing either lethal or merely irritating effects.

These weapons had a source of power such as a battery, a transformer circuit and an interrupter, either a magnetic "chopper" or a spring-mass, oscillating system. The weapons were designed to deliver a series of high voltage shocking impulses to supplement the normal effect of such conventional, primitive weapons, which are primarily hand-held or hand propelled.

As of the date of the Ryan application, very little was known of the true physiological effects of electric currents on the living organism. Nonetheless, Ryan suggested that his device could produce varying results from fibrillation to severe muscle spasms, thereby immobilizing the victim. It is not clear that the disclosed circuits could, in fact, meet the object of the patent.

Dalziel and Lee, in an article published in the IEEE SPECTRUM of February, 1969, pp. 44-50, entitled "Lethal Electric Currents," summarized their article in the IEEE Transactions of Industry and General Applications, Vol. IGA-4, pp. 467, 476, September-October, 1968, which reviewed the available data relating to the deleterious effects of electric shock, and reported on experiments that had been conducted. The authors discussed the effects of electricity as a function of voltage, current, frequency and duration.

Experiments on volunteers and research on animals tended to establish ventricular fibrillation as the most probable cause of fatalities attributed to "electrocution." Currents, if conducted through nerve centers, may arrest certain functions such as respiration for periods of time after the current has ceased. Of course, high currents can produce burns and irreversible damage to vital organs as a result of heat.

Dalziel and Lee studied physiological response as a function of applied currents and found a nonlinear relationship. At the lowest levels of magnitude, electric currents produce a "shock" and perhaps involuntary muscle movements. At a next higher level, increasing involuntary muscular contractions occur, and, with in-

creasing currents, a loss of voluntary muscular control. There next occurs a magnitude of current, at which a subject cannot voluntarily overcome the contracting forces. The greatest current at which it is still possible to release a conductor using the muscles directly stimulated by the current is called the "let-go" current, which represents the threshold between "harmless" and "harmful" exposures.

Currents slightly in excess of the "let-go" current will "freeze" a subject to a circuit, so long as the current persists. Higher currents of substantial duration, either continuous or intermittent, can produce serious, potentially lethal effects, including ventricular fibrillation, paralysis, asphyxia and burns.

Yet other studies by the Underwriters Laboratory in 1939 dealt with the problem of establishing safety standards for electrically charged fences. These studies, published in Research Report No. 14, in December 1939, suggested as safe, pulsed "shocks" of prescribed magnitudes, if separated by recommended time intervals.

With the growing problems arising from the indiscriminate use of lethal weapons for the apprehension of criminal suspects, as well as for the control of crowds and mobs, new devices must be found which can immobilize and capture without inflicting serious or irreversible harm in the process. It would be desirable to have a compact, hand-held device that is capable of subduing without serious or permanent harm. Such a device would be invaluable for the self-protection of the private citizen, as well as an important element in the armamentarium of the armed forces and law enforcement agencies.

It has been found that there exists a range of electrical impulses, which when delivered to a human target can immobilize the target by inducing involuntary muscular contractions. These amounts of electrical energy generally exceed the minimum "let-go" currents but are in a range that is considered well below fibrillation levels. It has also been found that the desired currents can be delivered a substantial distance through a very fine, lightweight filament. At sufficiently high voltages, there need not be penetration of the skin to deliver the electrical impulse. Moreover, it has been found that brief, intermittent impulses of current can be just as, if not more, effective than continuous currents, with a substantial reduction in the power required.

It has been deemed desirable to provide a weapon which can utilize an otherwise harmless projectile and which does not require harmful penetration of the target. It is also desirable to have an electrical device in which the electrical energy to be delivered to the target can be controllably adjusted. Further, it has been deemed desirable to have a convenient, manually operated launcher capable of accurately delivering an otherwise harmless projectile over distances greater than those that most persons could achieve with any accuracy by throwing.

It is also desirable to have a small hand-held, self-contained weapon system capable of delivering a plurality of projectiles, with a conductive, filamentary connection as between a power supply in the launcher and the projectile.

According to the present invention, modern technology has been utilized to provide an extremely compact, electrical power supply capable of being packaged in a

manually operable launcher, which, in combination with novel, relatively harmless projectiles, can deliver an electrical charge to a remote target with reasonably good accuracy.

In the several embodiments, the projectile or missile may be a fictile pellet, or may include a plurality of pellets connected by a mesh or net, which would be deployed upon launching. It is also possible to utilize a projectile of the type generally used in "air rifles."

In alternative embodiments, larger launchers of the "rifle" type can be utilized, and would contain a heavier duty power supply, more suitable for use by law enforcement or military personnel. The several embodiments can be provided in single or multiple "shot" versions.

The launcher and projectile are electrically connected by means of a fine, conducting fiber which can be coiled in the projectile and tethered to the launcher. Alternatively, the supply coil can be arranged to remain with the launcher and the projectile would deploy the fiber. Both techniques have counterparts in other fields such as the "spinning" reel or the two-wire, guided missile.

In other embodiments, the projectile can be propelled, by means of a spring, compressed air, or compressed CO<sub>2</sub>. Explosive or pyrotechnic propellants may be employed, but would, if utilized, bring the device within the ambit of the various laws regulating "deadly weapons," and might require registration by or permits of the user.

In accordance with the underlying theory of the present invention, there are two types of electrical current delivery systems. A first type of system employs a single wire and operates either in a conducting mode, wherein the ground or earth is used to complete the circuit between the power supply and the target or in a nonconducting mode which charges the target body to a predetermined voltage level, through the capacitive impedance of the body, thereby transmitting the requisite amount of current.

An alternative system utilizes a pair of wires constituting a current delivery and return path. In the two-wire system, a plurality of projectiles may be deployed, connected by nonconducting fibers to form a mesh or net which envelops the target. In the system, it is unnecessary for either the power supply or the target to be grounded. Sufficient current can be made to flow through the target to accomplish the desired results.

As a special embodiment of the single wire, nonconducting mode, a "resonant" circuit is provided which is "tuned" to the impedance of the target for a particular frequency. Such a resonant or tuned circuit can supply desired currents of lesser magnitude at lower frequencies to the target achieving the same physiological effects, but at substantial reductions in the power required.

Accordingly, it is an object of the present invention to provide an electrical power supply for generating electrical currents and for applying these currents to a target by means of a wire which is deployed using a launcher and projectile combination.

It is another object of invention to provide an improved protective device which applies a shocking and holding current to a target by a means of a wire carrying projectile.

It is yet another object of the invention to provide means for applying an electrical current to a remote lo-

cation including a net trailing a conductive wire which is connected to and launched from a portable, hand-held power supply.

The novel features which are believed to be characteristic of the invention, both as to organization and method of operation, together with further objects and advantages thereof will be better understood from the following description considered in connection with the accompanying drawings in which several preferred embodiments of the invention are illustrated by way of example. It is to be expressly understood, however, that the drawings are for the purpose of illustration and description only and are not intended as a definition of the limits of the invention.

FIG. 1 is a block-circuit diagram of a first embodiment of the invention in its broadest form, operating in a single-wire, conducting mode;

FIG. 2 is a block-circuit diagram of an alternative embodiment according to the present invention, modified to operate in a pulsed, conducting mode;

FIG. 3 is a block-circuit diagram of an alternative embodiment of a system operating in a single-wire, nonconducting, resonant mode;

FIG. 4 is a block-circuit diagram of a power supply similar to that of FIG. 2 but employing a spark gap discharge.

FIG. 5 is yet an additional alternative embodiment of a two-wire system utilizing a plurality of spark gaps and a bank of capacitors in the output circuit for voltage amplification;

FIG. 6 is a simplified representation of a delivery system according to the present invention, illustrating single-wire operation in the conducting mode;

FIG. 7 is a representational view of the system of the present invention, modified to operate as a two-wire system;

FIG. 8 is a representational view of a net for enveloping a target;

FIG. 9 is a side view of a "cockle burr" type projectile carrying the supply of filamentary, conductive wire;

FIG. 10 is a view of alternative projectile, a dart in which a supply of conductive wire is retained in the launching device;

FIG. 11 is a view of a launcher for deploying a plurality of projectiles, connected by an insulating fiber in a net;

FIG. 12 is a view of an alternative launcher employing a single barrel;

FIG. 13 is a side view of an alternative system including a flashlight and a replaceable "cartridge";

FIG. 14 is a front view of the "cartridge" of FIG. 13; and

FIG. 15 is a side sectional view of the cartridge of FIG. 14, taken along the line 15—15 in the direction of the appended arrows.

Turning first to FIG. 1, there is illustrated a typical circuit useful for operating either a single-wire or a two-wire system in the "conducting" mode. As shown, a power supply such as storage battery 10 is connected through a switch 12 to a DC-AC inverter unit 14. The output of the DC-AC inverter unit 14 is applied to the primary winding 16 of a transformer 18. The secondary winding 20 of the transformer 18 is connected at one terminal to ground, indicated by the conventional ground symbol 22 for single-wire operation. The other terminal is connected to a launching device 24, which

physically propels a projectile 26 toward a remote target 28. In the two-wire configuration, the ground connection would be replaced by a connection to a second terminal in the launching device 24.

The projectile 26 remains connected, at all times, to the secondary winding 20 by a continuous, conducting wire or filament 30. The target 28, as illustrated, is represented by a finite resistance connected to ground 22. If the target is a human body, such a finite resistance exists between any point of contact and the ground upon which the target stands. Obviously, in the two-wire embodiment, a second conducting filament 30 (not shown) would also connect to the target 28.

In operation, according to one embodiment, the battery 10 may be a portable, light-weight, high energy power supply, which, through the inverter 14 and the transformer 18, produces AC voltage in the range of 20 to 30 KV.

Turning next to FIG. 2, there is shown an alternative circuit intended to operate in a pulsed mode. As shown, a power supply 10' is connected through switch 12' to a series circuit including an interrupter 14', such as an electromechanical chopper, and the primary 16' of a transformer 18'. The secondary winding 20' connects through a rectifying diode 32 to a second primary winding 34 of a second transformer 36.

A capacitor 38 is in parallel with the second primary 34, and a switching relay 40 has its switch 41, between the capacitor 38 and the second primary 34. The relay solenoid 44 is connected between the secondary winding 20' and the capacitor 38 and is connected in parallel with a current limiting resistor 42. A second, secondary winding 46 is connected at one end to the ground 22 and at the other end to a launching device 24'. In a two-wire system, both ends of the secondary 46 would be coupled to the launcher 24'.

In operation, a closure of the switch 12' completes the circuit through the interrupter 14' and the primary 16' of the transformer 18'. The interrupter 14' converts the DC of the battery 10' to an intermittent current, capable of transformation to higher voltages through the transformer 18'. The high voltage transformer output is rectified by the diode 32 and charges the capacitor 38. The "relay-relaxation circuit," including the capacitor 38 and the relay 40, discharges the capacitor 38 in pulses through the primary 34 of the second transformer 36. At the second, secondary winding 46, there is available approximately 20 KV, with pulses that can be as infrequent as three per second.

In a continuous mode of operation, as in the circuit of FIG. 1, these circuits will furnish currents in the 20 to 30 ma range. Alternatively, operating in a pulsed mode, as in FIG. 2 above, where the pulse repetition rates preferably range from 2 per second to 10 per second, each pulse delivers no less than 0.01 joules and, preferably, approximately 0.5 joules to the target.

As a result of thumb, it has been determined that the product of capacitance and voltage gives a figure of merit for the effectiveness of the pulsed power supply as against a living target. If the product, VC, of a single pulse is greater than  $10^{-2}$  volt-farads, the shock can cause great harm and may even be lethal, even with a single shock. Values at  $10^{-3}$  volt-farads are deemed adequate to immobilize a victim through muscular spasm. If maintained for any length of time, the victim will become exhausted or asphyxiated because of such involuntary muscular activity. VC values on the order of

$10^{-4}$  volt farads, produce pain such that a victim may be incapable of rational reaction and would probably be inhibited from coherent, organized locomotion.

Experimental circuits have been built according to the present invention utilizing a 6-volt supply 10' in conjunction with a 46 to 1 turns ratio in the first transformer 18' and a 73 to 1 turns ratio in the second transformer 36. The capacitor 38 is selected to be 1.0 microfarads.

The output to the launching device 24' is therefore approximately 20,000 volts. However, because of the pulsed operation, the average power range is in the 1 to 10 watt level and in the preferred embodiment can be 2.5 watts. The power supply of FIG. 2 is designed to deliver, on the average, 20 KV pulses that provide 0.5 joules per pulse. This amount of energy is well below the levels considered dangerous by Dalziel and Lee, supra, and can be supplied by conventional dry cells.

Turning now to FIG. 3, there is shown an alternative embodiment operating in the single-wire, nonconducting, resonant mode. A power supply or battery 10'' is connected to an oscillator-amplifier 14'' which includes a switching device (not shown). The oscillator and amplifier 14'' is connected to the primary winding 16'' of a transformer 18''. Similar to the circuit of FIG. 1, a secondary winding 20'' has one end connected to ground 22 and at the other end is connected through an inductance element 48 to a launching device 24''. As indicated in FIG. 3, the target 28'' may be represented in the nonconducting mode, as a series combination of a resistive and a capacitive element coupled to ground 22.

In operation, the battery 10'' applying power across the oscillator-amplifier 14'' provides oscillatory energy to the transformer 18'' which produces a relatively high voltage output. Including an inductance element in the circuit tends to tune the circuit for minimum overall impedance at the operating frequency determined by the oscillator-amplifier 14''. In experimental models, an oscillator operating at approximately 2 KHz, and with a capacitive load  $C_T$  of approximately 100 pf, in the absence of an inductive element, approximately 30 KV are required to put 30 ma through the target. However, by adding an inductance 48 of approximately 7 henries, only 3 KV are necessary to provide the same 30 ma at the target.

In alternative embodiments of FIG. 3, appropriate circuitry for intermittent operation can be provided which further reduces the power requirements of the circuit. Alternatively, the circuit of FIG. 3 can be adapted for a two-wire operation in which case the ground connection would be unnecessary.

Turning next to FIG. 4, there is shown an embodiment for nonconducting, nonresonant intermittent operation utilizing a spark gap in conjunction with a capacitor. As shown in FIG. 4, the circuit of FIG. 2 may be employed except that the relay 40 and the elements associated therewith can be replaced by a spark gap 49.

In operation, the capacitor 38' is charged to a potential adequate to cause a discharge across the spark gap 49 which substantially discharges the capacitor 38'. The second transformer 36' efficiently couples this discharge pulse to the output circuits and to the target. The phenomenon of spark gap discharge is well known and the spacing as between the spark gap electrodes is

selected to provide a discharge rate of from three to ten discharges per second.

Turning next to FIG. 5, there is shown yet an alternative embodiment in which the second transformer is replaced by a capacitor bank 39. As shown, the output circuits include, in addition to a rectifying diode 32, a plurality of capacitors 38' in parallel, separated by resistors and serially connected through spark gaps 49'. In one experimental embodiment, a bank of six capacitors 38' utilized in conjunction with a 6-volt power supply and a transformer having a turns ratio of 600 to 1 produced approximately 3 KV across each of the capacitors which serially discharged to produce an 18 KV output pulse. Obviously, such a circuit could be utilized either in a single-wire or two-wire systems.

Turning next to FIG. 6, there is shown in outline form, a simplified launcher 50 which has sent a projectile 26' to remote target 28'. As illustrated, the launcher is operated as a one-wire system and therefore requires a connection to ground 22. The target 28' is also coupled to ground 22 by its proximity to the ground. In operating embodiments of the present invention, 40 gage copper wire which has a diameter of 3 mils has a fusing current of approximately 1 ampere. The resistivity of such a filament is approximately 1 ohm per foot and has a weight of approximately 0.03 pounds per thousand feet. However, 100 yards of 40 gage copper wire would weigh approximately one-half ounce and would introduce a voltage drop of approximately 3 volts when conducting a 10 ma current.

In alternative embodiments, it is possible to utilize nonconductive filaments of even finer gage to which have been applied a conductive coating or plating. Any high tensile strength fibers could be utilized with an appropriate treatment to render it conductive. In some embodiments it is also desirable to provide an insulating coating over the conductive fibers.

Turning next to FIG. 7, there is shown an alternative launcher 52 which does not require a ground connection and which deploys at least two electrodes which may be projectiles 26', each connected to the launcher by a conductive filament 30'.

FIG. 8 illustrates a typical mesh or net 54 which may be deployed from the launcher to increase the probability of encountering the target. As shown, a first filament 56 is schematically indicated as being connected to a relatively positive terminal 58 at the launcher and a second filament 60 is indicated as connected to a relatively negative terminal 62. As shown, four peripheral projectiles 64 can be connected together with a conductive filament 66 so that the periphery of the net 54 is connected to apply the relatively positive potential. The central projectile 68 is connected to the relatively negative terminal 62 and is connected to the other projectile 64 with nonconducting filaments 70. When deployed to encounter a target, an electrical current will flow from the peripheral projectiles 64 through the target to the central projectile 68 thereby delivering the desired amount of electrical energy to the target.

It is obvious that other schemes may be devised to deliver the electrical currents to the target utilizing non-dangerous projectiles with a high degree of confidence of encountering the target at various ranges.

Other combinations of projectile and conducting or nonconducting mesh connections are possible. For example, an alternative device might include a plurality of projectiles connected to the relatively positive con-

ductor 56 and a plurality of projectiles would be coupled to the relatively negative conductor 60 and the several projectiles would be separately launched toward the target.

FIG. 9 illustrates one form of projectile 72 that may be utilized. As shown, the projectile may be considered a "cockle burr" including a plurality of projecting conductive fibers 74 adapted to be entangled in clothing and electrically connected to a conductive filament 76 which is spooled on a bobbin 78 that is carried with the projectile 72. Stabilizing members 80 enable the projectile 72 to retain a reasonably accurate flight path. As illustrated, projectile 72 is launched from a barrel 82 and the conductive wire 76 is anchored, within the barrel to a plate (not shown) which is connected to the power supply. The projectile 72 can be propelled by any known means of propulsion including compressed air, compressed CO<sub>2</sub>, a compressed spring or a pyrotechnic device.

Turning next to FIG. 10, there is shown an alternative projectile 84 which is a dart such as is used with compressed air or compressed CO<sub>2</sub> weapons. As shown, the dart 84 may include a point 86 with barb member 88 to enable a slight penetration of the target through clothing and the barb 88 enables the dart to become implanted and to be held in place. A conductive filament extends back to a bobbin 92 which is mounted in a "cartridge" 94 which is electrically coupled to the power supply. The dart 84 is normally held in the cartridge. When the pressure within the cartridge exceeds the restraints on the dart 84, the dart 84 is accelerated forward in a barrel 96. Obviously the cartridge 94 should be electrically isolated from the barrel 96 and the launcher to protect the user. The dart 84 continues to travel with the acceleration imparted to it and carries with it the conductive filament 90, which pays off the bobbin 92, substantially without friction or drag.

FIG. 11 illustrates a launcher 100 which is adapted to deploy a plurality of projectiles 102 each with a plurality of conductive projections adapted to hold to a target. A bobbin 104 containing a supply of conductive wire 106 is provided in each of the barrels 108 and the several projectiles 102 are interconnected by nonconducting filaments 110. Two of the projectiles can be connected to the relatively positive side of the power supply and two can be connected to the relatively negative side of the power supply. As shown in the dotted portion of the figure, the projectiles 102, when deployed, form a rhomboidal array which has a high probability of reaching a target.

FIG. 12 shows yet an alternative embodiment for deploying a plurality of projectiles 102, here three. As shown, a spring member 112 is mounted in a barrel 114 and pushes a piston member 116 upon which is mounted a pair of bobbins 118 and a conical, "ramp" member which also houses a bobbin 118. The ramp member 120 deflects the rear two projectiles 102 into a diverging path while the central projectile 102 is launched substantially in the direction of aim. The central projectile may be connected to the relatively positive terminal while the remaining two projectiles 102 are connected to the relatively negative terminal; and, when deployed, achieve the configuration shown in the dotted portion of FIG. 12.

Turning next to FIG. 13, there is shown one proposed configuration of a system 200 according to the present invention. This system, which is adapted to be hand-

held, includes a flashlight element 202, a trigger switch 204 and a replaceable projectile cassette 206. The housing 207 is intended to be easily hand-held and contains the power supply and electrical circuits of the present invention. The flashlight element 202 can be utilized independently but it is intended to provide an aid to aiming in a darkened environment. Accordingly, the flashlight element 202 must be carefully aligned to be parallel with the launcher that is integral with the replaceable cassette 206.

As an additional design feature, it has been deemed appropriate to provide some form of alarm signal which indicates that the system is operable and ready to deploy projectiles. It is believed that such a signal would have a psychological effect and could add credibility to the warning of the user that the system might be employed.

FIG. 14 is a front view of the cassette 206 of FIG. 13 and shows the elements that would be contained in such a cassette. As illustrated, four projectiles are launched in a substantially rectangular net. Two of the projectiles 208, 210 are respectively connected to conductive filaments 212, 214 and to supply bobbins 216, 218. The other two projectiles 220, 222 are respectively connected through conductive elements 224, 226 to the first projectiles 208, 210. The fiber net 228 is coiled in a central receptacle 230 and the other connecting fibers 224, 226, 232 and 234 are each collected in a respective receptacle until the respective projectiles are deployed.

Turning finally to FIG. 15, there is shown in side-section view, the launching mechanism of a cassette 206. As shown, with appropriate male connectors 240, 242 which connect the power supply to the supply bobbins 216, 218. Two of the launching barrels 244, 246 are shown with the projectiles 208, 210 respectively mounted therein on piston members 248, 250, respectively. At the base of the barrel members, in a common chamber 252, a supply of pyrotechnic propellant 254 is provided. A filament 256 adapted to be incandescently heated for ignition, is electrically connected to a concentric electrode arrangement 258 in the base of the cassette 206 which mounts in contact with a matching electrode pair in the launcher socket.

In operation, the electrodes 260 are energized which cause the wire element 256 to ignite the pyrotechnic charge 254 driving the pistons 248, 250 in the outward direction. The force imparted propels the projectiles 208, 210 in a diverging direction with a substantial forward velocity component. The projectiles 208, 210 diverge until restrained by the fibers 232, 234, 228 and the projectiles, as a group, then continue in the forward direction. Electrical currents are applied to the projectiles 208, 210 through the conductive wires 212, 214, respectively which are connected to the electrodes 240, 242.

Thus, there has been shown in several embodiments apparatus for applying electrical energy to a remote target. The power levels that are employed are intended to be below lethal levels and adequate to control and immobilize an attacker.

What is claimed as new is:

1. The new use of a known combination of a power supply, conductor, and projectile for applying electrical energy through a capacitive discharge to a remote target comprising the step of providing electrical energy greater than 0.001 joules to the target in discrete,

separable impulses at a voltage greater than 20 KV, but having a capacitance-voltage product, CV, less than  $10^{-2}$  volt-farads, whereby the reactive impedance of the target to the electrical energy provided permits transfer of electrical energy to the target.

2. Apparatus for applying electrical energy to a remote target comprising:

power supply means for generating, electrical energy in discrete impulses, at first and second output terminals in response to an initiation signal;

conductive means including a pair of elongated, flexible conductors adapted to be respectively connected to said first and second output terminals;

contacting means including a pair of separate, electrode elements respectively connected to the conductors of said pair for applying electrical energy to the remote target when in close proximity thereto; and

a first and second projectile respectively carrying said pair of separate electrode elements, said projectiles being adapted to be deployed to separated parts of a remote target for establishing through said electrode members an extended, electrical path through the target whereby electrical energy in excess of .001 joules can be applied through said conductors, said projectiles, and said electrode elements to a remote target.

3. The apparatus for applying electrical energy to a remote target of claim 2, above, further including a net assembly, insulatingly intercoupling said projectiles, whereby a relatively large area of the target can be engaged by said projectiles and said electrode elements carried thereby.

4. Apparatus adapted to be connected to a source of electrical energy for conducting electrical energy to a remote target comprising in combination:

a. contacting means including an electrode element having at least one conductive point, and at least one small lightweight projectile intimately connected to said electrode element adapted to be propelled to engage a remote target;

b. launching means for propelling said projectile to a remote target; and

c. a single flexible, thin wire conductor electrically connected to said electrode element and to said projectile and adapted to be connected to a source of electrical energy and deployed by said propelled projectile for carrying electrical energy thereby between the source and the remote target.

5. The apparatus of claim 4, above, wherein said contacting means include at least one non-conductive elongated flexible member adapted to engage the remote target entangling the target and said contacting means.

6. The apparatus of claim 5, above, wherein said contacting means further include at least a second projectile coupled to said projectiles being connected by said non-conductive elongated flexible member, said projectiles deploying said mesh and engaging and entangling the remote target to assure that both projectiles are in operational proximity to the target.

7. The apparatus of claim 4, above, further including a second flexible, thin wire conductor electrically connected between said contacting means and the source of energy and wherein said contacting means including a second projectile and a second electrode element carried thereby electrically, connected to said second con-

ductor for applying electrical energy to spatially separated areas of the target.

8. The apparatus of claim 7, above, further including a non-conductive mesh connecting said projectiles for engaging and entangling propelled projectiles with the target for conducting electrical energy to spatially separated parts of the target and for retaining said electrode elements in operable electrical proximity thereto.

9. A weapon comprising:

- a. a self-contained source of electrical energy;
- b. propulsion means;
- c. target contacting means including at least two projectiles adapted to be deployed to a remote target by said propulsion means; and
- d. conductive means including at least two conductors respectively operatively interconnecting said projectiles and said electrical energy source for completing an electrical circuit through the remote target;

said propulsion means being adapted to deploy said projectiles in a diverging path for engaging a relatively large area of the target.

10. The weapon of claim 9, above, wherein said projectiles are darts each having a conductive point in electrical communication with its associated said conductor, whereby electrical energy applied to each of said points will bridge insulative gaps which may separate said deployed projectiles from the target.

11. The weapon of claim 9, above, wherein said target contacting means further comprises a mesh coupled to said projectiles and adapted to be said projectiles with said projectiles for enveloping and entangling the remote target, assuring that said projectiles will engage the target at spatially separated areas to apply electrical energy thereto.

12. The weapon of claim 9, above, wherein said target contacting means include nonconducting filaments interconnecting said projectiles for limiting the divergence of said projectiles during deployment and for enveloping and entangling a remote target, to increase the likelihood that said projectiles will engage the target to apply electrical energy between spatially separated areas of the target.

13. For use with a weapon having a self-contained electrical energy source and a trigger means for operating the weapon, a replaceable cartridge comprising in combination:

- a. a cartridge body including means adapted to make electrical contact with the weapon electrical energy source and the trigger means;
- b. target contacting means within said body including more than one projectile each having an electrode element for applying electrical energy between the weapon electrical energy source and a remote target, said projectiles being positioned to be divergently deployed;
- c. conducting means within said body including a separate elongated, flexible, filamentary conductor coupled to each projectile, electrically connecting said electrode elements to said electrical contact means, said conductor being of length sufficient to apply electrical energy to a remote target from the weapon; and
- d. pyrotechnic deploying means within said body, connected to be energized by the trigger means for deploying said projectiles and conductors to the re-

mote target at spatially separated points, upon operation of the trigger means.

14. The replaceable cartridge of claim 13, above, wherein said target contacting means include nonconductive filaments interconnecting said projectiles for limiting the divergence of said projectiles when deployed and for enveloping and entangling the remote target.

15. For use with a weapon having a self-contained electrical energy source and a trigger means for operating the weapon, a replaceable cartridge comprising in combination:

- a. a cartridge body including means adapted to make electrical contact with the weapon electrical energy source and the trigger means;
- b. target contacting means within said body including at least a projectile having an electrode element for applying electrical energy between the weapon electrical energy source and a remote target;
- c. conducting means within said body including at least a single elongated, flexible, filamentary conductor connecting said projectile and electrode element to said electrical contact means, said conductor being of length sufficient to apply electrical energy to a remote target; and
- d. deploying means within said cartridge body connected to be energized by the trigger means for deploying said projectile and conductor to the remote target upon operation of the trigger means.

16. The process of immobilizing a remote, living target comprising the steps of:

1. launching a projectile carrying a conductor from a power supply to the remote target;
2. engaging the target with said projectile and conductor
3. applying electrical energy to the target in a brief interrupted substantially d.c. impulse shorter than 0.1 second duration at a voltage greater than 30 kv, whereby the voltage of the impulse is sufficient to bridge insulative gaps between the conductor and the target and between the target and a common reference potential.

17. The process of claim 16, above, further including the steps of

- repeating the energy applying step at a rate between 3 and 10 repeats per second, and shortening the duration of the individual impulses to intervals of 10 microseconds and less
- whereby the average power delivered to the target is approximately 2.5 watts.

18. The process of using a power supply, a conductor and a projectile for electrically coupling a remote target to the power supply comprising the steps of

1. generating at least one separated electrical impulse of at least 0.001 joules at a voltage greater than 5 kv for an interval less than 0.01 seconds; and
  2. applying said separated electrical impulses to a remote target
- whereby the voltage level is adequate to conduct energy into the target through insulative gaps and whereby the target couples to a common reference potential through substantially insulative gaps.

19. The process of claim 18, above, wherein said applying step utilizes single conductor between the power supply and the remote target.

13

20. The process of claim 18, above, further including the step of generating additional electrical impulses at a rate of from 3-10 per second for application to the remote target.

21. The apparatus for applying electrical energy to a remote target of claim 2, above, wherein said conductive means are initially stored in said target contacting means.

22. The weapon of claim 9, above, wherein said target contacting means further comprises at least one nonconductive elongated flexible member intercon-

14

necting said projectiles and adapted to be deployed with said projectiles for enveloping and entangling the remote target and assuring that both projectiles will engage the target.

5 23. The weapon of claim 9, above, wherein said contacting means further comprises a plurality of non-conducting filaments interconnecting said projectiles, said filaments limiting the divergence of said projectiles during deployment and enveloping and entangling the remote target to increase the probability that both projectiles will engage the target.

\* \* \* \* \*

15

20

25

30

35

40

45

50

55

60

65

UNITED STATES PATENT OFFICE  
CERTIFICATE OF CORRECTION

Patent No. 3,803,463

Dated April 9, 1974

Inventor(s) JOHN H. COVER

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

Col. 1, line 11, change "calbe" to --cable-- ;  
Col. 1, line 27, change "appliedhigh" to --applied high-- .  
Col. 9, line 46, change "syrotechnic" to --pyrotechnic-- .  
  
Col. 10, line 60, [Claim 6] change "mesh" to  
--flexible member-- .  
Col. 11, line 32, [Claim 11] after "to be" insert  
--deployed with-- ;  
Col. 11, line 33, delete "with saidprojectiles" .  
  
Col. 12, line 55, [Claim 18] change "seaprated" to  
--separated-- ;  
Col. 12, line 56, change "5" to --5.0-- ;  
Col. 12, line 57, change "0.01" to --.1-- ;  
Col. 12, line 67, after "utilizes" insert --a-- .

Signed and sealed this 24th day of December 1974.

(SEAL)  
Attest:

McCOY M. GIBSON JR.  
Attesting Officer

C. MARSHALL DANN  
Commissioner of Patents

UNITED STATES PATENT OFFICE  
CERTIFICATE OF CORRECTION

Patent No. 3,803,463 Dated April 9, 1974

Inventor(s) JOHN H. COVER

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

- Col. 1, line 11, change "calbe" to --cable-- ;
- Col. 1, line 27, change "appliedhigh" to --applied high-- .
- Col. 9, line 46, change "syrotechnic" to --pyrotechnic-- .
- Col. 10, line 60, [Claim 6] change "mesh" to  
--flexible member-- .
- Col. 11, line 32, [Claim 11] after "to be" insert  
--deployed with-- ;
- Col. 11, line 33, delete "with saidprojectiles" .
- Col. 12, line 55, [Claim 18] change "seaprated" to  
--separated-- ;
- Col. 12, line 56, change "5" to --5.0-- ;
- Col. 12, line 57, change "0.01" to --.1-- ;
- Col. 12, line 67, after "utilizes" insert --a-- .

Signed and sealed this 24th day of December 1974.

(SEAL)  
Attest:

McCOY M. GIBSON JR.  
Attesting Officer

C. MARSHALL DANN  
Commissioner of Patents