US 20080148767A1

(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2008/0148767 A1**

(43) **Pub. Date: Jun. 26, 2008**

DE LARMINAT et al.

(54) **FALLING FILM EVAPORATOR**

(75) Inventors: **Paul DE LARMINAT**, Nantes (FR); **Luc LE COINTE**, Nantes (FR); **Satheesh KULANKARA**, York, PA (US)

Correspondence Address:
MCNEES WALLACE & NURICK LLC
100 PINE ST., P.O. BOX 1166
HARRISBURG, PA 17108-1166

(73) Assignee: **JOHNSON CONTROLS TECHNOLOGY COMPANY**, Holland, MI (US)

(21) Appl. No.: **11/962,605**

(22) Filed: **Dec. 21, 2007**

Related U.S. Application Data

(60) Provisional application No. 60/871,303, filed on Dec. 21, 2006, provisional application No. 60/890,473, filed on Feb. 17, 2007.

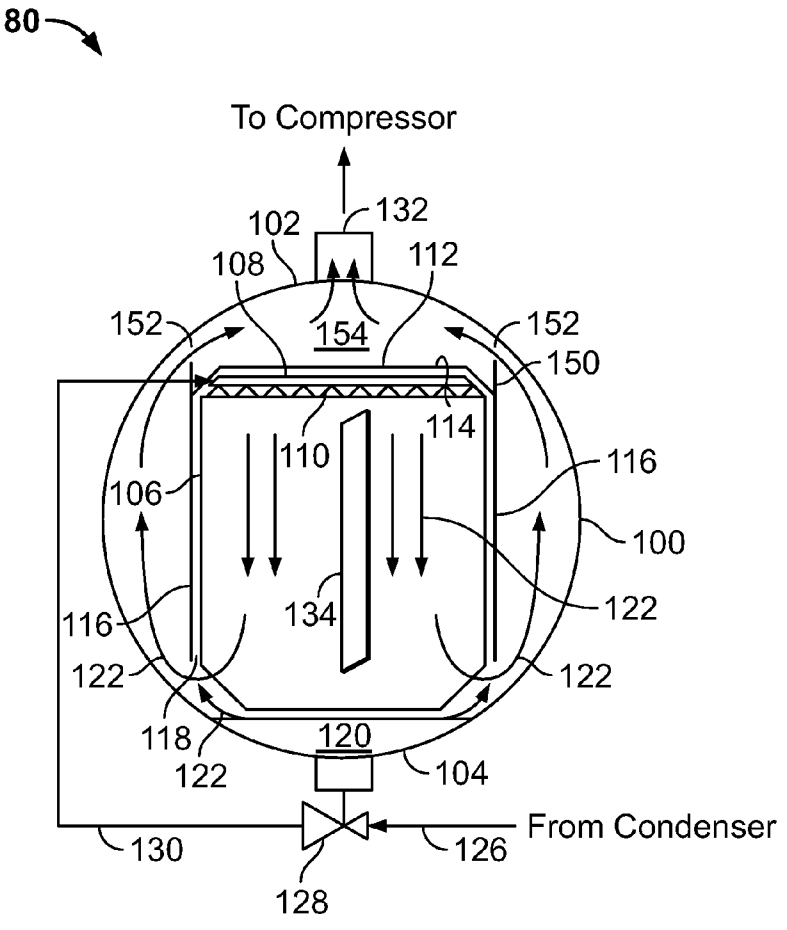
Publication Classification

(51) **Int. Cl.**
F25B 39/02 (2006.01)
F25B 1/00 (2006.01)

(52) **U.S. Cl.** **62/498**; 62/515

(57) **ABSTRACT**

Falling film and hybrid falling film evaporators are provided for use in a two-phase refrigeration system or process system. The evaporator includes a shell having an upper portion, a lower portion, and a tube bundle having tubes extending substantially horizontally in the shell. A hood disposed over the tube bundle has an upper end adjacent the upper portion above the tube bundle, the upper end having opposed substantially parallel walls extending toward the lower portion, the walls terminating at an open end opposite the upper end. Once liquid refrigerant or liquid refrigerant and vapor refrigerant is deposited onto the tube bundle, the substantially parallel walls of the hood substantially prevent cross flow of refrigerant vapor or liquid and vapor between the tubes of the tube bundle. A flow distributor disposed adjacent the open end between the hood and the shell modifies the refrigerant flow, providing more uniform refrigerant flow distribution.



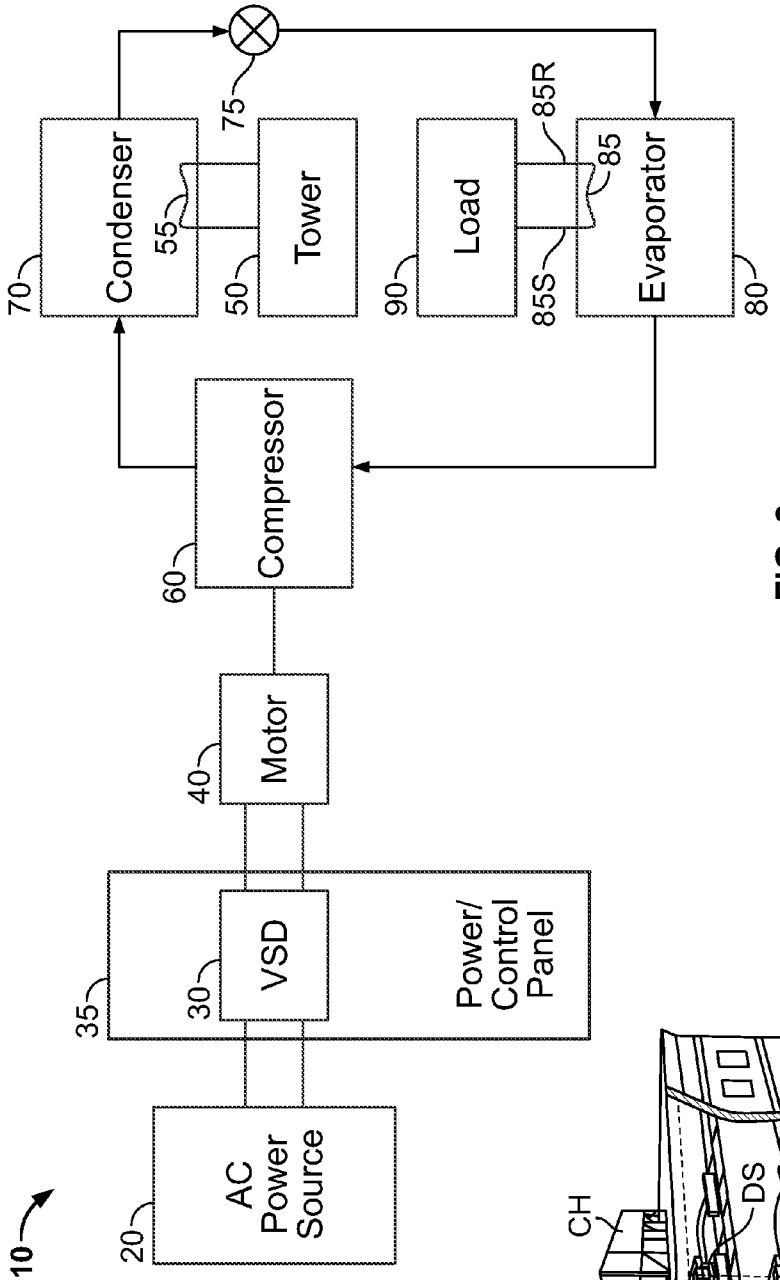

10
AC Power Source
20
Power/ Control Panel
35
VSD
30
Motor
40
Compressor
60
Condenser
70
Tower
50
Load
90
Evaporator
80
75
55
85
85R
85S

FIG. 2

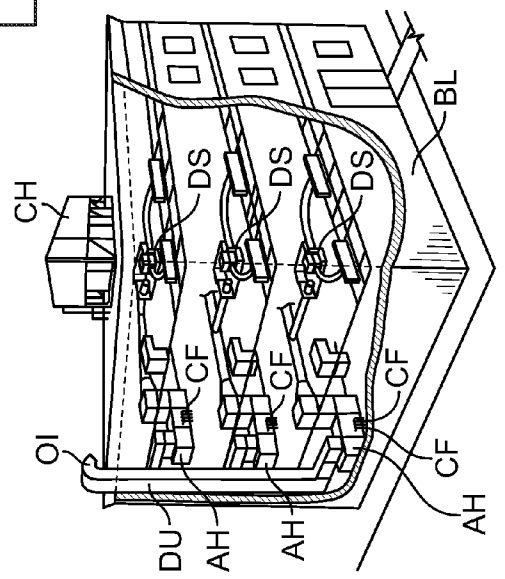

CH
DS
DS
DS
BL
CF
CF
CF
CF
OI
DU
AH
AH
AH

FIG. 1

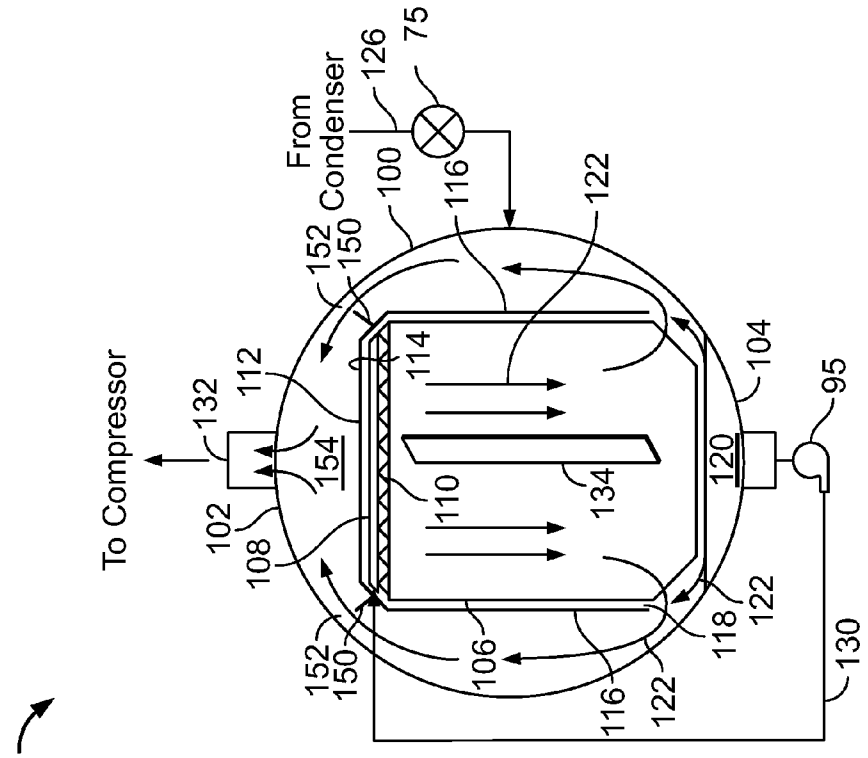

80
To Compressor
From Condenser
75
126
100
116
122
152
150
112
114
104
95
132
154
120
102
110
134
108
118
106
130

FIG. 4

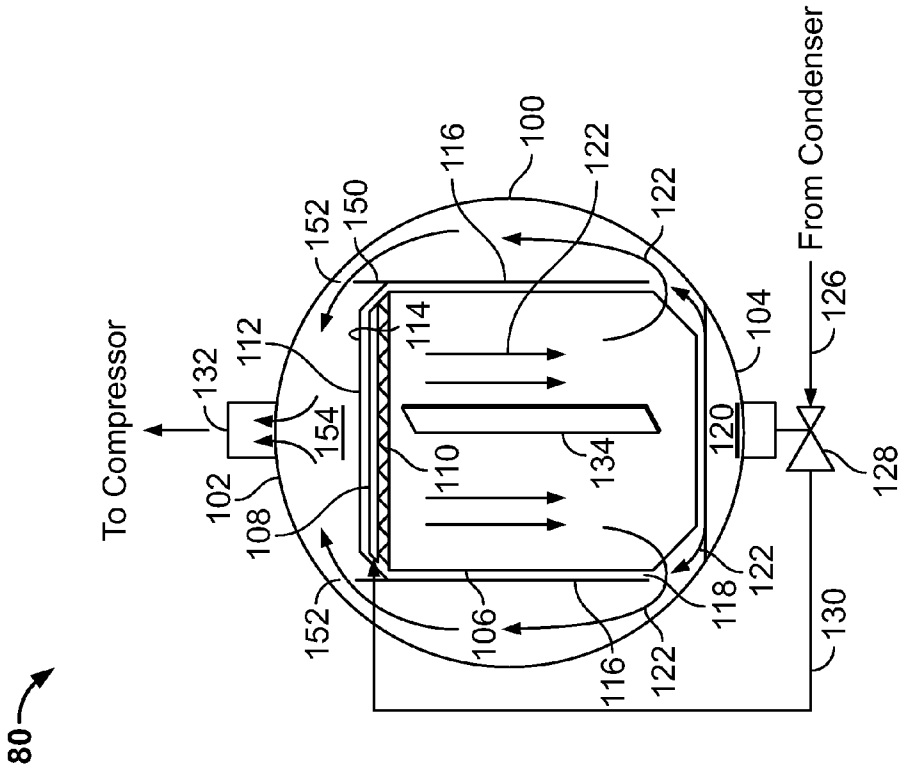

80
To Compressor
From Condenser
126
128
100
116
122
152
150
112
114
104
132
154
120
102
110
134
108
118
106
130

FIG. 3

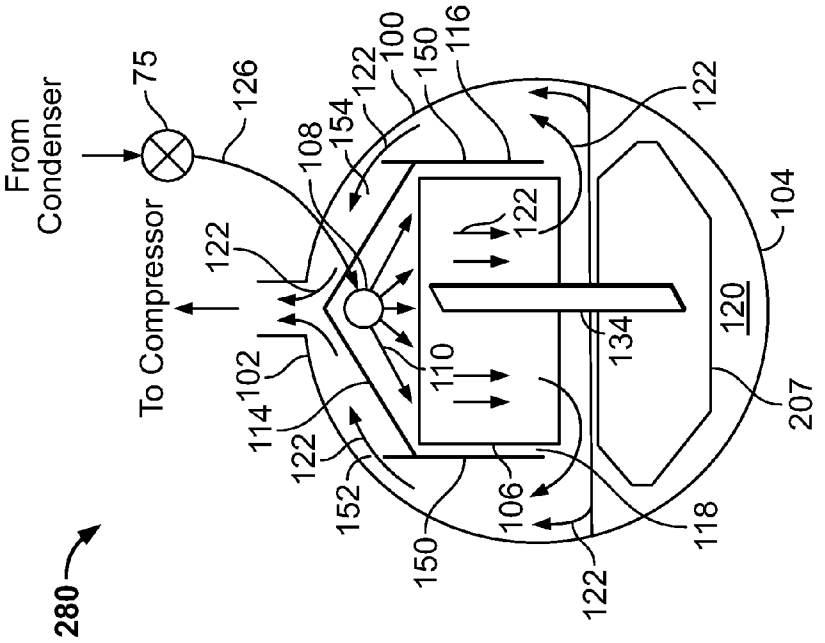

280
From Condenser
75
126
To Compressor
122
102
114
108
154
122
100
150
116
122
104
110
134
120
207
122
152
106
118
150
122

FIG. 6

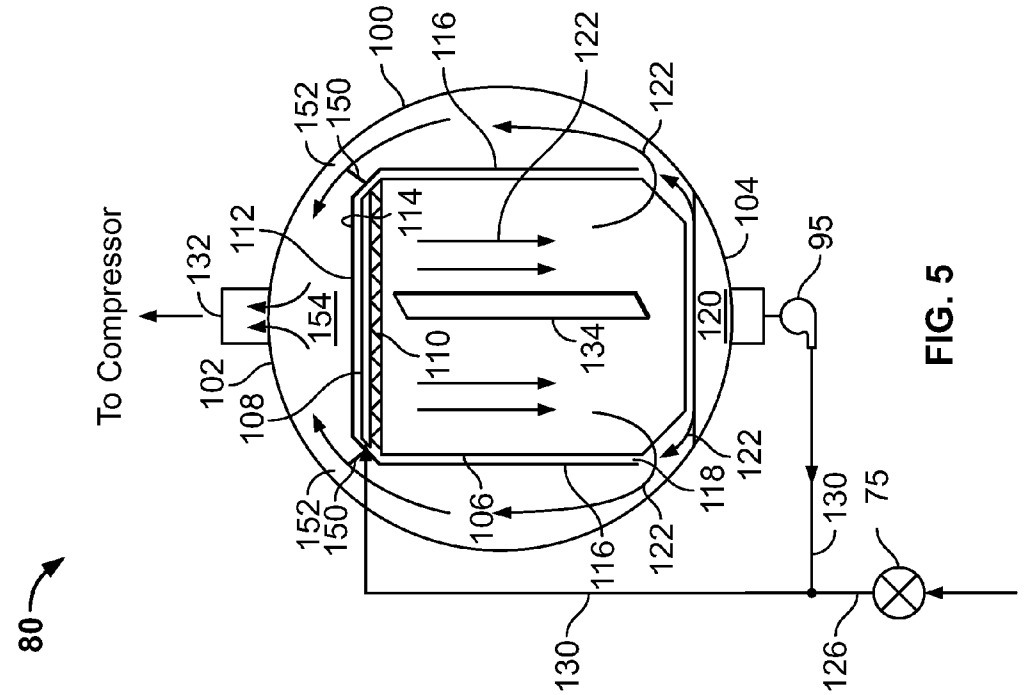

80
To Compressor
132
112
154
102
108
152
150
100
116
122
122
104
114
110
134
120
95
152
150
106
118
122
116
122
130
75
130
126

FIG. 5

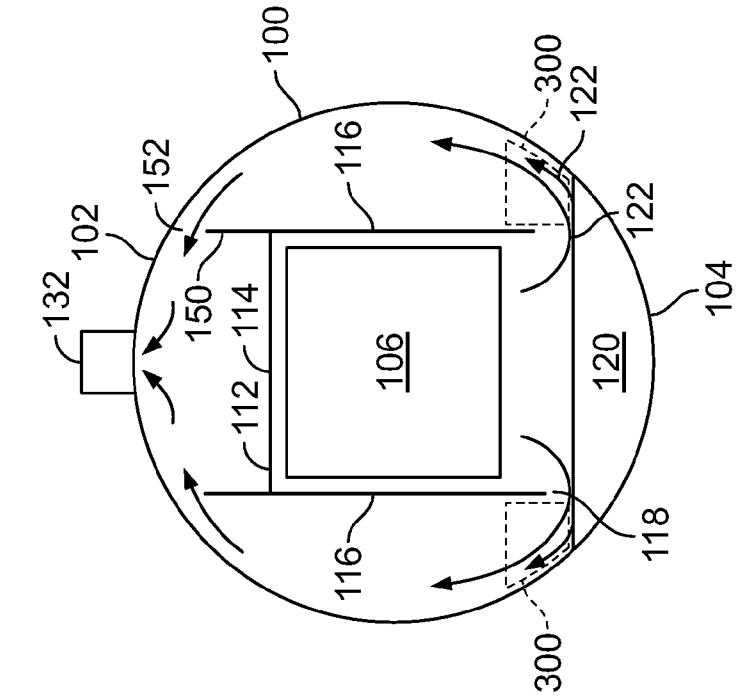

100
300
122
152
116
102
122
132
150
114
106
120
104
112
118
116
300

FIG. 8

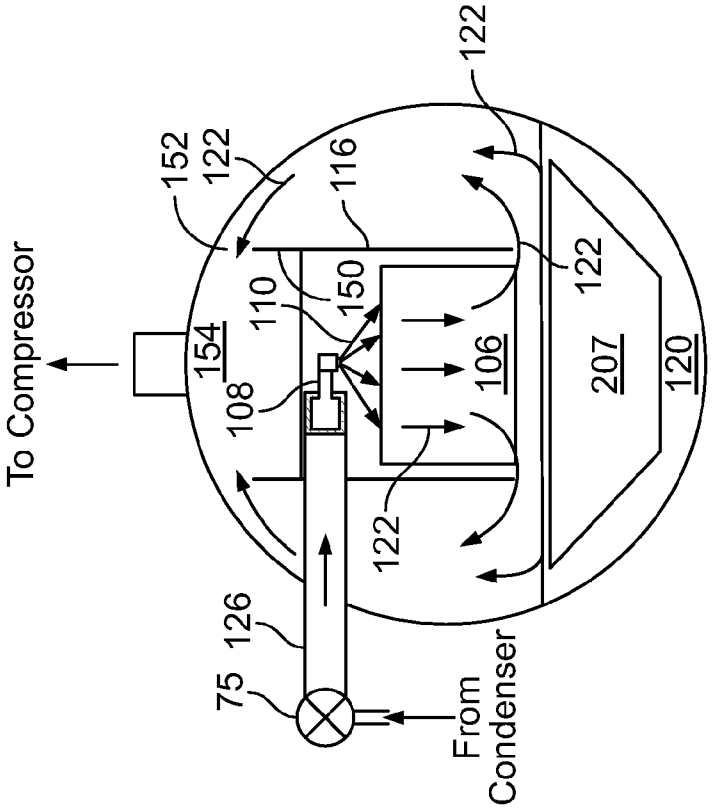

122
152
122
116
122
150
110
154
106
207
120
108
122
126
75
From Condenser
To Compressor

FIG. 7

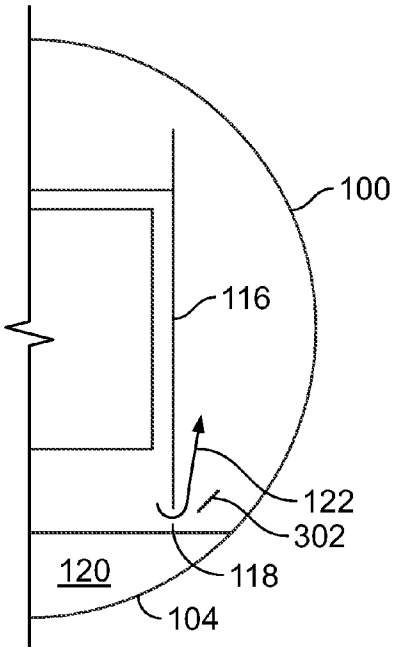


FIG. 9

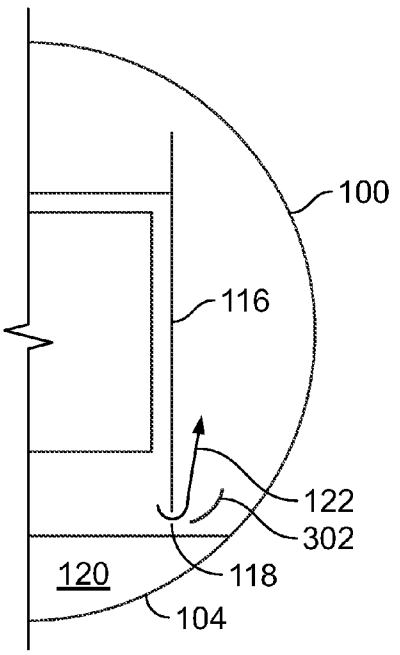


FIG. 10

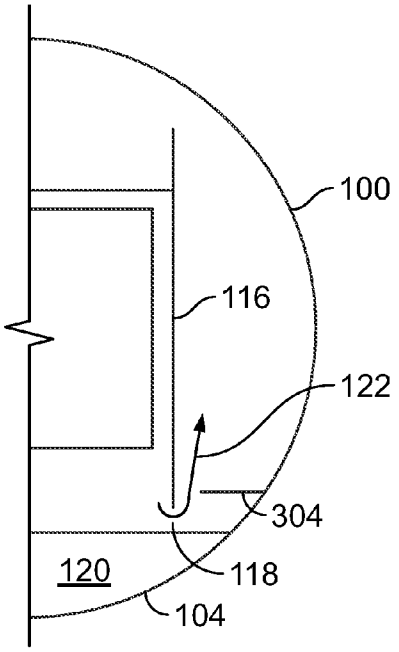


FIG. 11

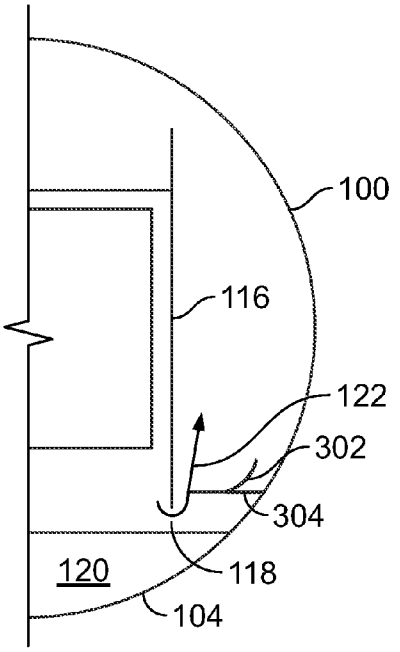


FIG. 12

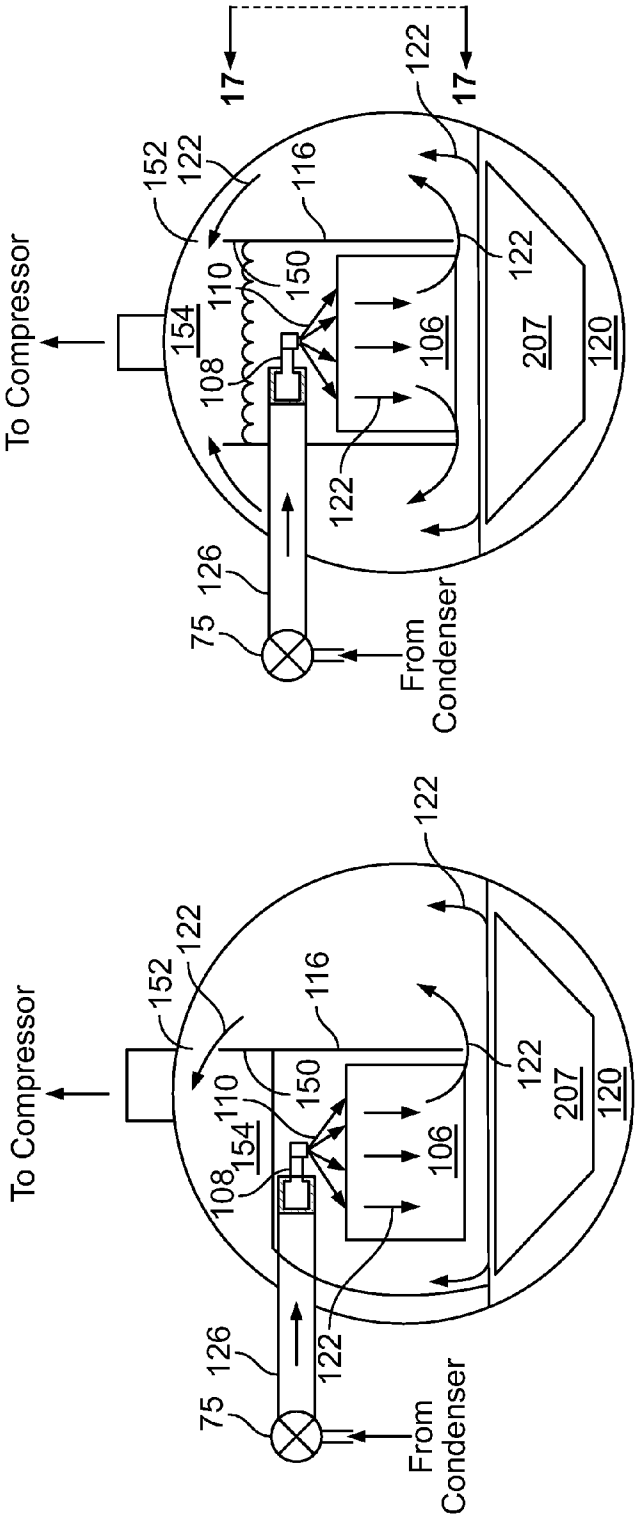


FIG. 13

FIG. 14

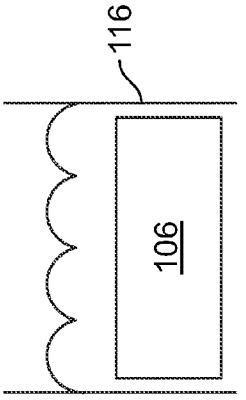


FIG. 15

FALLING FILM EVAPORATOR

CROSS REFERENCE TO RELATED PATENT APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application Nos. 60/871,303 and 60/890,473, filed Dec. 21, 2006 and Feb. 17, 2007, respectively.

BACKGROUND

[0002] The present application relates generally to falling film and hybrid falling film evaporator systems in refrigeration, air conditioning and chilled water systems or process systems.

[0003] Certain process systems, as well as refrigeration, air conditioning and chilled water systems, include an evaporator to effect a transfer of thermal energy between refrigerant of the system and another fluid to be cooled. One type of evaporator includes a shell with a plurality of tubes forming a tube bundle through which the fluid to be cooled is circulated. The refrigerant is brought into contact with the outer or exterior surfaces of the tube bundle inside the shell, resulting in a thermal energy transfer between the fluid to be cooled and the refrigerant. In a conventional evaporator, the refrigerant is heated and converted to a vapor state, which is then returned to a compressor where the vapor is compressed, to begin another refrigerant cycle. The cooled fluid is circulated to a plurality of heat exchangers located throughout the building. Warmer air is passed over the heat exchangers where the cooled fluid is being warmed, while cooling the air for the building returned to the evaporator to repeat the process.

[0004] For example, some types of evaporators with refrigerant boiling outside the tubes include flooded evaporators, falling film evaporators and hybrid falling film evaporators. In conventional flooded evaporators, the shell is partially filled with a pool of boiling liquid refrigerant in which the tube bundle is immersed.

[0005] In a conventional falling film evaporator, a dispenser deposits, such as by spraying, an amount of liquid refrigerant onto the surfaces of the tubes of the tube bundle from a position above the tube bundle, forming a layer (or film) of liquid refrigerant on the tube surface. The refrigerant in a liquid or two-phase liquid and vapor state contacts the upper tube surfaces of the tube bundle, and by force of gravity, falls vertically onto the tube surfaces of lower disposed tubes.

[0006] A conventional hybrid falling film evaporator incorporates the attributes of a falling film evaporator and a flooded evaporator by immersing a lesser proportion of the tubes of the tube bundle than the flooded evaporator while still spraying fluid on the upper tubes, similar to a falling film evaporator.

[0007] One challenge to the efficient operation of the falling film and hybrid falling film evaporators is that a portion of the fluid vaporizes and significantly expands in volume. The vaporized fluid expands in all directions, causing cross flow, or travel by the vaporized fluid in a direction that is transverse, or at least partially transverse to the vertical flow direction of the liquid fluid under the effect of gravity. Cross flow results in insufficient wetting of tubes of the tube bundle, significantly reducing heat transfer with the fluid to be cooled flowing inside those tubes in the tube bundle.

[0008] Another challenge is the compressor, which receives its supply of vaporized fluid from an outlet typically formed in the upper portion of the evaporator, can be damaged if the vaporized fluid contains entrained liquid droplets. Components must be implemented to provide separation between the vapor and liquid droplets. However, these components add to the complexity and cost of the system, and may also result in an undesired pressure drop prior to the vapor refrigerant reaching the compressor.

[0009] What are needed are falling film and hybrid falling film evaporators that substantially prevent cross flow caused by expanding vaporizing fluid and which also require less space than a flooded evaporator for liquid droplet separation than a conventional flooded or existing designs of flooded film or hybrid evaporators.

[0010] Intended advantages of the disclosed systems and/or methods satisfy one or more of these needs or provides other advantageous features. Other features and advantages will be made apparent from the present specification. The teachings disclosed extend to those embodiments that fall within the scope of the claims, regardless of whether they accomplish one or more of the aforementioned needs.

SUMMARY

[0011] The present application relates to a refrigeration system including a compressor, a condenser, an expansion device and an evaporator connected in a closed refrigerant loop. The evaporator includes a shell having an upper portion and a lower portion and a tube bundle, the tube bundle having a plurality of tubes extending substantially horizontally in the shell. A hood is disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being disposed above the tube bundle adjacent the upper portion of the shell. The hood further has opposed substantially parallel walls extending from the closed portion toward the open portion of the shell. A refrigerant distributor is disposed below the hood and above the tube bundle, the refrigerant distributor being configured to deposit liquid refrigerant or liquid and vapor refrigerant onto the tube bundle. The substantially parallel walls of the hood substantially prevent cross flow of the refrigerant between the plurality of tubes of the tube bundle. A flow distributor is disposed adjacent the open end between the hood and the shell. The flow distributor modifies the refrigerant flow between the hood and the shell to provide a more uniform refrigerant flow distribution.

[0012] The present application further relates to a falling film evaporator for use in a refrigeration system including a shell having an upper portion and a lower portion. A tube bundle has a plurality of tubes extending substantially horizontally in the shell. A hood is disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being disposed above the tube bundle adjacent the upper portion of the shell. The hood further has opposed substantially parallel walls extending from the closed portion toward the open portion of the shell. A refrigerant distributor is disposed below the hood and above the tube bundle. The refrigerant distributor is configured to deposit liquid refrigerant or liquid and vapor refrigerant onto the tube bundle. The substantially parallel walls of the hood substantially prevent cross flow of the refrigerant between the plurality of tubes of the tube bundle. A flow distributor is disposed adjacent the open end between the hood and the shell. The flow distributor modifies the refrigerant flow between the hood and the shell to provide a more uniform refrigerant flow distribution.

[0013] The present application allows that the fluid distributor receives refrigerant at medium or high pressure, i.e., close to condensing pressure, and can be a two-phase liquid refrigerant and vapor refrigerant. Under these conditions, the refrigerant mist and droplets generated are contained below the hood and coalesced onto the tubes, as well as the roof and walls of the hood, to prevent the refrigerant mist and droplets from becoming entrained into the suction line. In addition, a flow distributor reduces gas velocity exiting the hood by providing a more uniform flow distribution. This improved flow distribution helps to further reduce droplet entrainment in the refrigerant mist that could reach the suction line.

[0014] The present application still further relates to a hybrid falling film evaporator for use in a refrigeration system including a shell having an upper portion and a lower portion. A lower tube bundle is in fluid communication with an upper tube bundle, the lower and upper tube bundles each having a plurality of tubes extending substantially horizontally in the shell, the lower tube bundle being at least partially submerged by refrigerant in the lower portion of the shell. A hood is disposed over the upper tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being adjacent the upper portion of the shell above the upper tube bundle. The hood further has opposed substantially parallel walls extending from the closed end toward the open end adjacent the lower portion of the shell. A refrigerant distributor is disposed above the upper tube bundle, the refrigerant distributor depositing refrigerant onto the upper tube bundle. The substantially parallel walls of the hood substantially prevent cross flow of refrigerant between the plurality of tubes of the upper tube bundle. A flow distributor is disposed adjacent the open end between the hood and the shell. The flow distributor modifies the refrigerant flow between the hood and the shell to provide a more uniform refrigerant flow distribution.

[0015] The present application yet further relates to a falling film evaporator for use in a control process including a shell having an upper portion and a lower portion. A tube bundle has a plurality of tubes extending substantially horizontally in the shell. A hood is disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being disposed above the tube bundle adjacent the upper portion of the shell. The hood further has opposed substantially parallel walls extending toward the lower portion of the shell. A fluid distributor is disposed below the hood and above the tube bundle, the fluid distributor being configured to deposit liquid fluid or liquid and vapor fluid onto the tube bundle. The substantially parallel walls of the hood substantially prevent cross flow of the fluid between the plurality of tubes of the tube bundle. A flow distributor is disposed adjacent the open end between the hood and the shell. The flow distributor modifies the refrigerant flow between the hood and the shell to provide a more uniform refrigerant flow distribution.

[0016] The present application still further relates to a falling film evaporator for use in a refrigeration system including a shell having an upper portion and a lower portion. A tube bundle has a plurality of tubes extending substantially horizontally in the shell. A hood is disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end. The closed end is disposed above the tube bundle adjacent the upper portion of the shell. The hood further has opposed substantially parallel walls extending from the closed portion toward the open portion of the shell. The hood is asymmetrically disposed within the evaporator.

[0017] The present application yet further relates to a falling film evaporator for use in a refrigeration system including a shell having an upper portion and a lower portion. A tube bundle has a plurality of tubes extending substantially horizontally in the shell. A hood is disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end. The closed end is disposed above the tube bundle adjacent the upper portion of the shell, the hood further having opposed substantially parallel walls extending from the closed portion toward the open portion of the shell. The hood includes surface textures.

[0018] An advantage of the present application is that it substantially prevents cross flow caused by expanding vaporizing fluid, facilitating increased heat transfer with a minimum re-circulation rate.

[0019] A still further advantage of the present application is that provides an efficient means of avoiding the carry-over of liquid droplets into the compressor suction.

[0020] A still further advantage of the present application is that it is easy to manufacture and install.

[0021] A still yet further advantage of the present application is that it can accommodate a mix of liquid and vapor at moderate or high pressure that is applied by the distributor over the tube bundle.

[0022] A further advantage of the present application is that it can be used with either a falling film evaporator construction or a hybrid falling film evaporator construction.

[0023] An additional advantage of the present application is that it can provide a more uniform flow distribution of refrigerant to achieve improved liquid separation.

[0024] Other features and advantages of the present application will be apparent from the following more detailed descriptions of embodiments, taken in conjunction with the accompanying drawings which illustrate, by way of example, the principles of the application. Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of various embodiments of the present application. Also, common but well-understood elements that are useful or necessary in a commercially feasible embodiment are typically not depicted in order to facilitate a less obstructed view of these various embodiments of the present application.

[0025] Alternative exemplary embodiments relate to other features and combinations of features as may be generally recited in the claims.

BRIEF DESCRIPTION OF THE FIGURES

[0026] FIG. **1** is an illustration of an exemplary HVAC&R system disposed in a commercial setting.

[0027] FIG. **2** is a schematic of a compressor system of the present application.

[0028] FIG. **3** is a cross section of an embodiment of a falling film evaporator of the present application.

[0029] FIGS. **4-5** are cross sections of alternate embodiments of a falling film evaporator of the present application.

[0030] FIG. **6** is a cross section of an embodiment of a hybrid falling film evaporator of the present application.

[0031] FIG. **7** is a cross section of a further embodiment of a hybrid falling film evaporator of the present application.

[0032] FIG. **8** is a cross section of a flow distribution device for an evaporator of the present application.

[0033] FIGS. **9-12** is a cross section of various embodiments of flow distribution devices for an evaporator of the present application.

[0034] FIG. **13** is a cross section of a further embodiment of a hybrid falling film evaporator of the present application.

[0035] FIG. **14** is a cross section of a further embodiment of a hybrid falling film evaporator of the present application.

[0036] FIG. **15** is an elevation view of an embodiment of a hood taken along line **17-17** of FIG. **14**.

[0037] Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

[0038] FIG. **1** shows an exemplary HVAC&R system configured for providing cooling to a commercial building BL. A chiller system CH circulates a cooled fluid CF through coils disposed in air handling units AH. Air handling units AH use ducting DU to draw outside ingested air OI that is mixed with recirculated air within building BL. The cooled fluid CF cools the mix of outside ingested air OI and recirculated air that is provided throughout building BL by a distribution system DS to provide climate control within building BL. A boiler system (not shown) may be used to circulate a heated fluid for providing heating to the building BL.

[0039] FIG. **2** illustrates generally one system configuration of the present application. A refrigeration or chiller system **10** includes an AC power source **20** that supplies a combination variable speed drive (VSD) **30** and power/control panel **35**, which powers a motor **40** that drives a compressor **60**, as controlled by the controls located within the power/control panel **35**. It is appreciated that the term "refrigeration system" can include alternate constructions, such as a heat pump. In one embodiment of the application, all of the components of the VSD **30** are contained within the power/control panel **35**. The AC power source **20** provides single phase or multi-phase (e.g., three phase), fixed voltage, and fixed frequency AC power to the VSD **30** from an AC power grid or distribution system that is present at a site. The compressor **60** compresses a refrigerant vapor and delivers the vapor to the condenser **70** through a discharge line. The compressor **60** can be any suitable type of compressor, e.g., centrifugal compressor, reciprocating compressor, screw compressor, scroll compressor, etc. The refrigerant vapor delivered by the compressor **60** to the condenser **70** enters into a heat exchange relationship with a fluid, such as water, flowing through a heat-exchanger coil or tube bundle **55** connected to a cooling tower **50**. However, it is to be understood that condenser **70** can be air-cooled or can use any other condenser technology. The refrigerant vapor in the condenser **70** undergoes a phase change to a refrigerant liquid as a result of the heat exchange relationship with the liquid in the heat-exchanger coil **55**. The condensed liquid refrigerant from condenser **70** flows to an expansion device **75**, which greatly lowers the temperature and pressure of the refrigerant before entering the evaporator **80**. Alternately, most of the expansion can occur in a nozzle **108** (FIGS. **3-8**) when used as a pressure adjustment device. A fluid circulated in heat exchange relationship with the evaporator **80** can then provide cooling to an interior space.

[0040] The evaporator **80** can include a heat-exchanger coil **85** having a supply line **85**S and a return line **85**R connected to a cooling load **90**. The heat-exchanger coil **85** can include a plurality of tube bundles within the evaporator **80**. Water or any other suitable secondary refrigerant, e.g., ethylene, ethylene glycol, or calcium chloride brine, travels into the evaporator **80** via return line **85**R and exits the evaporator **80** via supply line **85**S. The liquid refrigerant in the evaporator **80** enters into a heat exchange relationship with the water in the heat-exchanger coil **85** to chill the temperature of the secondary refrigerant in the heat-exchanger coil **85**. The refrigerant liquid in the evaporator **80** undergoes a phase change to a refrigerant vapor as a result of the heat exchange relationship with the liquid in the heat-exchanger coil **85**. The vapor refrigerant in the evaporator **80** then returns to the compressor **60** to complete the cycle.

[0041] It is noted that the chiller system **10** of the present application may use a plurality of any combination of VSDs **30**, motors **40**, compressors **60**, condensers **70**, and evaporators **80**.

[0042] Referring to FIG. **3**, one embodiment of evaporator **80** is a falling film evaporator. In this embodiment, evaporator **80** includes a substantially cylindrical shell **100** having an upper portion **102** and a lower portion **104** with a plurality of tubes forming a tube bundle **106** extending substantially horizontally along the length of the shell **100**. A suitable fluid, such as water, ethylene, ethylene glycol, or calcium chloride brine flows through the tubes of the tube bundle **106**. A distributor **108** disposed above the tube bundle **106** distributes refrigerant fluid, such as R134a received from the condenser **126** that is in a liquid state or a two-phase liquid and vapor state, onto the upper tubes in the tube bundle **106**. In other words, the refrigerant fluid can be in a two-phase state, i.e., liquid and vapor refrigerant. In FIG. **4**, the refrigerant delivered to the distributor **108** is entirely liquid. In FIGS. **3**, **5-7**, the refrigerant delivered to the distributor **108** can be entirely liquid or a two-phase mixture of liquid and vapor. Liquid refrigerant that has been directed through the tubes of the tube bundle **106** without changing state collects adjacent the lower portion **104**, this collected liquid refrigerant being designated as liquid refrigerant **120**. Although a pump **95** can be used to re-circulate liquid refrigerant **120** from the lower portion **104** to the distributor **108** (FIGS. **4** and **5**), an ejector **128** can be employed to draw the liquid refrigerant **120** from the lower portion **104** using the pressurized refrigerant from condenser **126**, which operates by virtue of the Bernoulli effect, as shown in FIG. **3**. In addition, while the level of the liquid refrigerant **120** is shown as being below the tube bundle **106** (e.g., FIGS. **3-5**), it is to be understood that the level of the liquid refrigerant **120** may immerse a portion of the tubes of the tube bundle **106**.

[0043] Further referring to FIG. **3**, a hood **112** is disposed over the tube bundle **106** to substantially prevent cross flow of vapor refrigerant or of liquid and vapor refrigerant between the tubes of the tube bundle **106**. The hood **112** includes an upper end **114** adjacent the upper portion **102** of the shell **100** above the tube bundle **106** and above the distributor **108**. Extending from opposite ends of the upper end **114** toward the lower portion **104** of the shell **100** are opposed substantially parallel walls **116**, in one embodiment the walls **116** extending substantially vertically and terminating at an open end **118** that is substantially opposite the upper end **114**. In one embodiment, the upper end **114** and parallel walls **116** are closely disposed adjacent to the tubes of the tube bundle **106**, with the parallel walls **116** extending sufficiently toward the lower portion **104** of the shell **100** as to substantially laterally

surround the tubes of the tube bundle **106**. However, it is not required that the parallel walls **116** extend vertically past the lower tubes of the tube bundle **106**, nor is it required that the parallel walls **116** are planar, although vapor refrigerant **122** that forms within the outline of the tube bundle **106** is channeled substantially vertically within the confines of the parallel walls **116** and through the open end **118** of the hood **112**. The hood **112** forces the vapor refrigerant **122** downward between the walls **116** and through the open end **118**, then upward in the space between the shell **100** and the walls **116** from the lower portion **104** of the shell **100** to the upper portion **102** of the shell **100**. The vapor refrigerant **122** then flows over a pair of extensions **150** protruding adjacent to the upper end **114** of the parallel walls **116** and into a suction channel **154**. The vapor refrigerant **122** enters into the suction channel **154** through slots **152** which are spaces between the ends of the extensions **150** and the shell **100** that define slots **152**, before exiting the evaporator **80** at an outlet **132** that is connected to the compressor **60**.

[0044] Refrigerant **126** that is received from the condenser **70** and the lower portion **104** of the shell **100** (liquid refrigerant **120**) is directed through the distributor **108** and, as shown, deposited from a plurality of positions **110** onto the upper tubes of the tube bundle **106**. These positions **110** can include any combination of longitudinal or lateral positions with respect to the tube bundle **106**. In one embodiment, distributor **108** includes a plurality of nozzles supplied at least by a liquid ramp that is supplied by the condenser **70**. The nozzles apply, in one embodiment, a predetermined jet pattern so that the upper row of tubes is covered. An amount of the refrigerant boils by virtue of the heat exchange that occurs along the tube surfaces of the tube bundle **106**. This expanding vapor refrigerant **122** is directed downwardly toward the open end **118** since the upper end **114** of the hood **112** and substantially parallel walls **116** provide no alternate escape path. Since, as shown, the substantially parallel walls **116** are adjacent to the outer column of tubes of the tube bundle **106**, vapor refrigerant **122** is forced substantially vertically downward, substantially preventing the possibility of cross flow of the vapor refrigerant **122** inside the hood **112**. The tubes of the tube bundle **106** are arranged to promote the flow of refrigerant in the form of a film around the tube surfaces, the liquid refrigerant coalescing to form droplets or, in some instances, a curtain or sheet of liquid refrigerant at the bottom of the tube surfaces. The resulting sheeting promotes wetting of the tube surfaces which enhances the heat transfer efficiency between the fluid flowing inside the tubes of the tube bundle **106** and the refrigerant flowing around the surfaces of the tubes of the tube bundle **106**.

[0045] Unlike current systems, the upper end **114** of the hood **112** substantially prevents the flow of applied refrigerant **110**, in the form of vapor and mist, at the top of the tube bundle **106** from flowing directly to the outlet **132** which is fed to the compressor **60**. Instead, by directing the refrigerant **122** to have a downwardly directed flow, the vapor refrigerant **122** must travel downward through the length of the substantially parallel walls **116** before the refrigerant can pass through the open end **118**. After the vapor refrigerant **122** passes the open end **118** which contains an abrupt change in direction, the vapor refrigerant **122** is forced to travel between the hood **112** and the inner surface of the shell **100**. This abrupt directional change results in a great proportion of any entrained droplets of refrigerant to collide with either the liquid refrigerant **120** or the shell **100** or hood **112**, removing those droplets from the vapor refrigerant **122** flow. Also, refrigerant mist traveling the length of the substantially parallel walls **116** is coalesced into larger drops that are more easily separated by gravity, or evaporated by heat transfer on the tube bundle **106**.

[0046] Once the vapor refrigerant **122** passes through the parallel walls **116** of the hood **112**, the vapor refrigerant **122** then flows from the lower portion **104** to the upper portion **102** along the prescribed narrow passageway, and, as shown, substantially symmetric passageways, formed between the surfaces of the hood **112** and the shell **100** prior to reaching the outlet **132**. As a result of the increased drop size, the efficiency of liquid separation by gravity is improved, permitting an increased upward velocity of vapor refrigerant **122** flow through the evaporator. A baffle is provided adjacent the evaporator outlet to prevent a direct path of the vapor refrigerant **122** to the compressor inlet. The baffle includes slots **152** defined by the spacing between the ends of extensions **150** and the shell **100**. The combination of the substantially parallel walls **116**, narrow passageways and slots **152** in the evaporator **80** removes virtually all the remaining entrained droplets from the vaporized refrigerant **122**.

[0047] By substantially eliminating cross flow of vapor refrigerant and coalesced drops of liquid refrigerant along tube bundle **106**, the amount of refrigerant **120** that must be recirculated can be reduced. It is the reduction of the amount of recirculated refrigerant flow that can enable the use of ejector **128**, versus a conventional pump. The ejector **128** combines the functions of an expansion device and a refrigerant pump. In addition, it is possible to incorporate all expansion functionality into the distributor **108** nozzles. In one embodiment, two expansion devices are employed: a first expansion device being incorporated into spraying nozzles of the distributor **108**. A second expansion device can also be a partial expansion in the liquid line **130**, such as a fixed orifice, or alternately, a valve controlled by the level of liquid refrigerant **120**, to account for variations in operating conditions, such as evaporating and condensing pressures, as well as partial cooling loads. Further, in one embodiment, most of the expansion occurs in the nozzles, providing a greater pressure difference, while simultaneously permitting the nozzles to be of reduced size, thereby reducing the size and cost of the nozzles.

[0048] Referring to FIG. **6**, an embodiment of a hybrid falling film evaporator **280** is presented which includes an immersed or at least partially immersed tube bundle **207** in addition to a tube bundle **106**. Except as discussed, corresponding components in evaporator **280** are otherwise similar to evaporator **80**. In one embodiment, evaporator **280** incorporates a two pass system in which fluid that is to be cooled first flows inside the tubes of lower tube bundle **207** and then is directed to flow inside the tubes of the upper tube bundle **106**. Since the second pass of the two pass system occurs on the top tube bundle **106**, the temperature of the fluid flowing in the tube bundle **106** is reduced, requiring a lesser amount of refrigerant flow over the surfaces of the tube bundle **106**. Thus, there is no need to re-circulate refrigerant **120** to the distributor **108**. Also, the bundle **207** evaporates the extra refrigerant dropping from tube bundle **106**. If there is no recirculation device, e.g., pump or ejector, the falling film evaporator must be a hybrid.

[0049] It is to be understood that although a two pass system is described in which the first pass is associated with an at least partially immersed (flooded) lower tube bundle **207** and

the second pass associated with upper tube bundle **106** (falling film), other arrangements are contemplated. For example, the evaporator can incorporate a one pass system with any percentage of flooding associated with lower tube bundle **207**, the remaining portion of the one pass associated with upper tube bundle **106**. Alternately, the evaporator can incorporate a three pass system in which two passes are associated with lower tube bundle **207** and the remaining pass associated with upper tube bundle **106**, or in which one pass is associated with lower tube bundle **207** and its remaining two passes are associated with upper tube bundle **106**. Further, the evaporator can incorporate a two pass system in which one pass is associated with upper tube portion **106** and the second pass is associated with both the upper tube portion **106** and the lower tube portion **207**. In summary, any number of passes in which each pass can be associated with one or both of the upper tube bundle and the lower tube bundle is contemplated.

[0050] While embodiments have been directed to refrigeration systems, the evaporator of the present application can also be used with process systems, such as a chemical process involving a blend of two components, one being volatile such as in the petrochemical industry. Alternately, the process system could relate to the food processing industry. For example, the evaporator of the present application could be used to control a juice concentration. Referring to FIG. **3**, a juice (e.g., orange juice) fed through the fluid distributor **108** is heated, a portion becoming vapor, while the liquid **120** accumulating at the lower portion of the evaporator contains a higher concentration of juice. One skilled in the art can appreciate that the evaporator can be used for other process systems.

[0051] In one embodiment, the walls **116** are parallel and the walls **116** are symmetric about a central vertical plane **134** bisecting the upper and lower portions **102**, **104**, since the tube bundle **106** arrangements are typically similarly symmetric.

[0052] The arrangement of tubes in tube bundles **106** is not shown, although a typical arrangement is defined by a plurality of uniformly spaced tubes that are aligned vertically and horizontally, forming an outline that can be substantially rectangular. However, a stacking arrangement wherein the tubes are neither vertically or horizontally aligned may also be used, as well as arrangements that are not uniformly spaced.

[0053] In addition or in combination with other features of the present application, different tube bundle constructions are contemplated. For example, it is possible to reduce the volume of the shell **100** if the refrigerant is deposited by the distributor **108** at wide angles. However, such wide angles can create deposited refrigerant having horizontal velocity components, possibly generating an uneven longitudinal liquid distribution. To address this issue, finned tubes (not shown), as are known in the art, can be used along the uppermost horizontal row or uppermost portion of the tube bundle **106**. Besides possibly using finned tubes on top, the straightforward approach is to use new generation enhanced tube developed for pool boiling in flooded evaporators. Additionally, or in combination with the finned tubes, porous coatings, as are known in the art, can also be applied to the outer surface of the tubes of the tube bundles **106**.

[0054] Referring to FIG. **8**, which is generic to both evaporator constructions of the present application, a hood **112** has substantially vertical walls **116** that substantially prevents cross flow caused by expanding vaporizing refrigerant fluid **122**, facilitating increased heat transfer with a minimum recirculation rate. In addition, as previously discussed, the vapor refrigerant **122**, passes through the parallel walls **116** of the hood **112** and then flows from the lower portion **104** to the upper portion **102** along the prescribed narrow passageway formed between the surfaces of the hood **112** and the shell **100** prior to reaching the outlet **132**. As a result of the increased drop size, the efficiency of liquid separation by gravity is improved, permitting an increased upward velocity of vapor refrigerant **122** flow through the evaporator. A baffle is provided adjacent the evaporator outlet to prevent a direct path of the vapor refrigerant **122** to the compressor inlet. The baffle includes slots **152** defined by the spacing between the ends of extensions **150** and the shell **100**. The combination of the substantially parallel walls **116**, narrow passageways and slots **152** in the evaporator **80** removes virtually all the remaining entrained droplets from the vaporized refrigerant **122**.

[0055] To further improve the efficiency of liquid separation, as shown in FIG. **8**, a flow distributor **300** is disposed adjacent to the open end **118** between hood **112** and shell **100**. Flow distributor **300** modifies the refrigerant flow between hood **112** and the shell **100** to provide a more uniform refrigerant flow distribution. Due to the more uniform refrigerant flow distribution, the velocity of vapor refrigerant **122** is reduced, improving the efficiency of liquid separation by gravity.

[0056] Referring to FIGS. **9-12**, several embodiments of flow distributors are discussed. For example, as shown in FIG. **9**, flow distributor **302** is in the form of a guide vane that is angled with respect to wall **116**. As shown in FIG. **10**, guide vane **302** has a curved profile. Although the flow distributors **302** are shown disposed between wall **116** and lower portion **104** of shell **100**, it is to be understood that the flow distributors can extend from either wall **116** or the shell or from both. Further, through apertures can be formed in flow distributors **302**.

[0057] Referring to FIG. **11**, flow distributor **304** is a plate extending toward wall **116** and disposed substantially perpendicular to wall **116**, and containing a plurality of through apertures. In one embodiment, flow distributor **302** includes apertures of different sizes, with smaller through apertures being disposed on portions of the flow distributor that is adjacent to shell **100**. In another embodiment, flow distributor **302** is a wire mesh. Referring to FIG. **12**, flow distributor **302** includes a combination of a guide vane and a plate **304**.

[0058] It is to be understood that embodiments of flow distributors can include any combination of elements disposed anywhere along the lower portion **104** of shell, such as between wall **116** and shell **100** that act to improve liquid separation of the refrigerant flow **122** and provide more uniform flow velocities by redirecting the flow of refrigerant. In addition, flow distributors can exhibit porosity, for example, non-woven wire mesh or an alternate structural arrangement, such as honeycomb.

[0059] It is also understood that the various embodiments of flow distributor can also be used with applications outside of refrigeration systems, as previously discussed.

[0060] In another embodiment (FIG. **13**) the hood is asymmetrically disposed within the evaporator, with more than one half of the flow of refrigerant flowing beneath the one side disposed further from the shell. As shown, substantially all of the refrigerant flowing is beneath one side of the hood.

[0061] Surface textures can be advantageous for the hood, i.e., smooth versus pitted or scuffed surfaces. The shape and

structure of the roof top of the hood can be important for the following reasons: 1) it is desired that the distribution of liquid over the tubes be as uniform as possible; 2) the spray nozzles and impact on the tubes generate some mist that will strike the roof. From there, the liquid may fall back in a totally uncontrolled way. For instance, as shown in FIG. **6**, the liquid that reaches the roof of the hood is likely due to capillary action, then reach the vertical walls of the hood and fall to the bottom part of the hood without contributing to wetting the walls of the bundle **106**. FIG. **7** would produce liquid droplets to fall in an arrangement still far from uniform, but must be better than FIG. **6**, because the liquid will at least drip upon the outer columns of tubes, and will not be lost. More sophisticated designs are possible, such as a substantially horizontal roof having multiple ripples (FIG. **14**) dripping above each column of tubes to bundle **106**, although other arrangements are possible. For example, in an alternate embodiment as shown in FIG. **15**, taken along line **17-17** of FIG. **14**, ripples or surface discontinuities sufficient to distribute liquid refrigerant from the roof of the hood can extend substantially transverse to the direction of the tubes of tube bundle **106**. Alternatively, the ripples or surface discontinuities can extend at an angle to the direction of the tubes of tube bundle **106**. However, it is appreciated that the ripples or discontinuities can be non-linear and non-uniform in profile. In addition, the roof of the hood can have coatings of material applied to the surface to achieve the desired flow of liquid refrigerant or in combination with shaped profiles of the roof of the hood. The vapor refrigerant **122** then flows over a pair of extensions **150** protruding adjacent to the upper end **114** of the parallel walls **116** and into a suction channel **154**. The vapor refrigerant **122** enters into the suction channel **154** through slots **152** which are spaces between the ends of the extensions **150** and the shell **100** that define slots **152**, before exiting the evaporator **80** at an outlet **132** that is connected to the compressor **60**.

[0062] Unlike current systems, the upper end **114** of the hood **112** substantially prevents the flow of applied refrigerant **110**, in the form of vapor and mist, at the top of the tube bundle **106** from flowing directly to the outlet **132**, which is fed to the compressor **60**. Instead, by directing the refrigerant **122** to have a downwardly directed flow, the vapor refrigerant **122** must travel downward through the length of the substantially parallel walls **116** before the refrigerant can pass through the open end **118**. After the vapor refrigerant **122** passes the open end **118**, which contains an abrupt change in direction, the vapor refrigerant **122** is forced to travel between the hood **112** and the inner surface of the shell **100**. This abrupt directional change results in a great proportion of any entrained droplets of refrigerant to collide with either the liquid refrigerant **120** or the shell **100** or hood **112**, removing those droplets from the vapor refrigerant **122** flow. Also, refrigerant mist traveling the length of the substantially parallel walls **116** is coalesced into larger drops that are more easily separated by gravity, or evaporated by heat transfer on the tube bundle **106**.

[0063] It is to be understood that although a two pass system is described in which the first pass is associated with an at least partially immersed (flooded) lower tube bundle **207** and the second pass associated with upper tube bundle **106** (falling film), other arrangements are contemplated. For example, the evaporator can incorporate a one pass system with any percentage of flooding associated with lower tube bundle **207**, the remaining portion of the one pass associated with upper tube bundle **106**. Alternately, the evaporator can incorporate a three pass system in which two passes are associated with lower tube bundle **207** and the remaining pass associated with upper tube bundle **106**, or in which one pass is associated with lower tube bundle **207** and its remaining two passes are associated with upper tube bundle **106**. Further, the evaporator can incorporate a two pass system in which one pass is associated with upper tube portion **106** and the second pass is associated with both the upper tube portion **106** and the lower tube portion **207**. In summary, any number of passes in which each pass can be associated with one or both of the upper tube bundle and the lower tube bundle is contemplated.

[0064] It should be understood that the application is not limited to the details or methodology set forth in the following description or illustrated in the figures. It should also be understood that the phraseology and terminology employed herein is for the purpose of description only and should not be regarded as limiting.

[0065] While the exemplary embodiments illustrated in the figures and described herein are presently preferred, it should be understood that these embodiments are offered by way of example only. Accordingly, the present application is not limited to a particular embodiment, but extends to various modifications that nevertheless fall within the scope of the appended claims. The order or sequence of any processes or method steps may be varied or re-sequenced according to alternative embodiments.

[0066] It is important to note that the construction and arrangement of the evaporator as shown in the various exemplary embodiments is illustrative only. Although only a few embodiments have been described in detail in this disclosure, those skilled in the art who review this disclosure will readily appreciate that many modifications are possible (e.g., variations in sizes, dimensions, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, use of materials, colors, orientations, etc.) without materially departing from the novel teachings and advantages of the subject matter recited in the claims. For example, elements shown as integrally formed may be constructed of multiple parts or elements, the position of elements may be reversed or otherwise varied, and the nature or number of discrete elements or positions may be altered or varied. Accordingly, all such modifications are intended to be included within the scope of the present application. The order or sequence of any process or method steps may be varied or re-sequenced according to alternative embodiments. In the claims, any means-plus-function clause is intended to cover the structures described herein as performing the recited function and not only structural equivalents but also equivalent structures. Other substitutions, modifications, changes and omissions may be made in the design, operating conditions and arrangement of the exemplary embodiments without departing from the scope of the present application.

What is claimed is:

1. A refrigeration system comprising:

a compressor, a condenser, an expansion device and an evaporator connected in a closed refrigerant loop; and

the evaporator comprising:

a shell having an upper portion and a lower portion;

a tube bundle, the tube bundle having a plurality of tubes extending substantially horizontally in the shell;

a hood disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being disposed above the tube bundle adjacent the upper portion of the shell, the hood fur-

ther having opposed substantially parallel walls extending from the closed portion toward the open portion of the shell;

a refrigerant distributor disposed below the hood and above the tube bundle, the refrigerant distributor being configured to deposit liquid refrigerant or liquid and vapor refrigerant onto the tube bundle, the substantially parallel walls of the hood substantially prevent cross flow of the refrigerant between the plurality of tubes of the tube bundle;

a flow distributor disposed adjacent the open end between the hood and the shell; and

wherein the flow distributor modifies the refrigerant flow between the hood and the shell to provide a more uniform refrigerant flow distribution.

2. The refrigerant system of claim **1** wherein the flow distributor is angled from a hood wall.

3. The refrigerant system of claim **2** wherein the flow distributor extends from the hood wall.

4. The refrigerant system of claim **2** wherein the flow distributor extends from the shell.

5. The refrigerant system of claim **1** wherein the flow distributor is curved.

6. The refrigerant system of claim **1** wherein the flow distributor includes a plurality of through apertures.

7. The refrigerant system of claim **6** wherein the flow distributor extends between the hood wall and the shell.

8. A falling film evaporator for use in a refrigeration system comprising:

a shell having an upper portion and a lower portion;

a tube bundle, the tube bundle having a plurality of tubes extending substantially horizontally in the shell;

a hood disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being disposed above the tube bundle adjacent the upper portion of the shell, the hood further having opposed substantially parallel walls extending from the closed portion toward the open portion of the shell;

a refrigerant distributor disposed below the hood and above the tube bundle, the refrigerant distributor being configured to deposit liquid refrigerant or liquid and vapor refrigerant onto the tube bundle, the substantially parallel walls of the hood substantially prevent cross flow of the refrigerant between the plurality of tubes of the tube bundle;

a flow distributor disposed adjacent the open end between the hood and the shell; and

wherein the flow distributor modifies the refrigerant flow between the hood and the shell to provide a more uniform refrigerant flow distribution.

9. The falling film evaporator of claim **8** wherein the flow distributor is angled from a hood wall.

10. The falling film evaporator of claim **9** wherein the flow distributor extends from the hood wall.

11. The falling film evaporator of claim **9** wherein the flow distributor extends from the shell.

12. The falling film evaporator of claim **8** wherein the flow distributor is curved.

13. The falling film evaporator of claim **8** wherein the flow distributor includes a plurality of through apertures.

14. The falling film evaporator of claim **13** wherein the flow distributor extends between the hood wall and the shell.

15. A hybrid falling film evaporator for use in a refrigeration system comprising:

a shell having an upper portion and a lower portion;

a lower tube bundle in fluid communication with an upper tube bundle, the lower and upper tube bundles each having a plurality of tubes extending substantially horizontally in the shell, the lower tube bundle being at least partially submerged by refrigerant in the lower portion of the shell;

a hood disposed over the upper tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being adjacent the upper portion of the shell above the upper tube bundle, the hood further having opposed substantially parallel walls extending from the closed end toward the open end adjacent the lower portion of the shell;

a refrigerant distributor, the refrigerant distributor being disposed above the upper tube bundle, the refrigerant distributor depositing refrigerant onto the upper tube bundle;

the substantially parallel walls of the hood substantially preventing cross flow of refrigerant between the plurality of tubes of the upper tube bundle;

a flow distributor disposed adjacent the open end between the hood and the shell; and

wherein the flow distributor modifies the refrigerant flow between the hood and the shell to provide a more uniform refrigerant flow distribution.

16. The falling film evaporator of claim **15** wherein the flow distributor is a member angled from a hood wall.

17. The falling film evaporator of claim **16** wherein the flow distributor extends from the hood wall.

18. The falling film evaporator of claim **16** wherein the flow distributor extends from the shell.

19. The falling film evaporator of claim **15** wherein the flow distributor is curved.

20. The falling film evaporator of claim **15** wherein the flow distributor includes a plurality of through apertures.

21. The falling film evaporator of claim **20** wherein the flow distributor extends between the hood wall and the shell.

22. A falling film evaporator for use in a control process comprising:

a shell having an upper portion and a lower portion;

a tube bundle, the tube bundle having a plurality of tubes extending substantially horizontally in the shell;

a hood disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being disposed above the tube bundle adjacent the upper portion of the shell, the hood further having opposed substantially parallel walls extending toward the lower portion of the shell;

a fluid distributor disposed below the hood and above the tube bundle, the fluid distributor being configured to deposit liquid fluid or liquid and vapor fluid onto the tube bundle;

the substantially parallel walls of the hood substantially preventing cross flow of the fluid between the plurality of tubes of the tube bundle;

a flow distributor disposed adjacent the open end between the hood and the shell; and

wherein the flow distributor modifies the refrigerant flow between the hood and the shell to provide a more uniform refrigerant flow distribution.

23. A falling film evaporator for use in a refrigeration system comprising:

a shell having an upper portion and a lower portion;

a tube bundle, the tube bundle having a plurality of tubes extending substantially horizontally in the shell;

a hood disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being disposed above the tube bundle adjacent the upper portion of the shell, the hood further having opposed substantially parallel walls extending from the closed portion toward the open portion of the shell; and

wherein the hood is asymmetrically disposed within the evaporator.

24. A falling film evaporator for use in a refrigeration system comprising:

a shell having an upper portion and a lower portion;

a tube bundle, the tube bundle having a plurality of tubes extending substantially horizontally in the shell;

a hood disposed over the tube bundle, the hood having a closed end and an open end opposite the closed end, the closed end being disposed above the tube bundle adjacent the upper portion of the shell, the hood further having opposed substantially parallel walls extending from the closed portion toward the open portion of the shell; and

wherein the hood includes surface textures.

25. The falling film evaporator of claim **24** wherein a roof of the hood includes surface discontinuities sufficient to distribute liquid refrigerant therefrom.

* * * * *