

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 October 2008 (30.10.2008)

PCT

(10) International Publication Number
WO 2008/131251 A1

- (51) **International Patent Classification:**
GOIN 33/18 (2006.01)
- (21) **International Application Number:**
PCT/US2008/060863
- (22) **International Filing Date:** 18 April 2008 (18.04.2008)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
60/913,148 20 April 2007 (20.04.2007) US
60/977,531 4 October 2007 (04.10.2007) US
11/936,519 7 November 2007 (07.11.2007) US
- (63) **Related by continuation (CON) or continuation-in-part (CIP) to earlier application:**
US 11/936,519 (CON)
Filed on 7 November 2007 (07.11.2007)
- (71) **Applicant** (for all designated States except US): **INVEN-SYS SYSTEMS, INC.** [US/US]; 33 Commercial St., Foxboro, Massachusetts 02035-2099 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants** (for US only): **HENRY, Manus P.** [IE/GB]; 86 Staunton Road, Oxford Oxfordshire OX3 7TR (GB). **TOMBS, Michael S.** [GB/GB]; 4 Blenheim Drive, Oxford Oxfordshire OX28DG (GB).
- (74) **Agents:** **WALTERS, Gregory A.** et al; Fish & Richardson P.c. P.O. Box 1022, Minneapolis, Minnesota 55440-1022 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FT, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,

[Continued on next page]

(54) **Title:** WET GAS MEASUREMENT

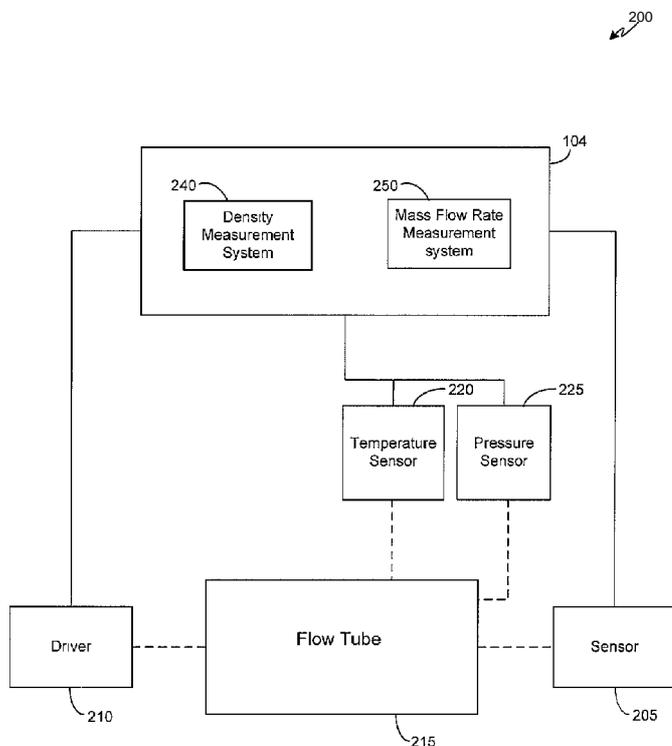


FIG. 2

(57) **Abstract:** A first apparent property of a multi-phase process fluid is determined based on the motion of the vibratable flowtube. One or more apparent intermediate values associated with the multi-phase process fluid are determined based on the first apparent property. A measure of wetness of the multi-phase process fluid is determined based on a mapping between one or more of the apparent intermediate values and the measure of wetness. A second apparent property of the multi-phase process fluid is determined using the differential pressure flowmeter. One or more phase-specific properties of the multi-phase process fluid is determined based on the measure of wetness and the second apparent property.

WO 2008/131251 A1



PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, ZA,
ZM, ZW.

European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

Published:
— *with international search report*

WET GAS MEASUREMENT

This application claims priority to U.S. Provisional Application Serial No. 60/913,148, titled WET GAS CALCULATIONS and filed on April 20, 2007, U.S. Provisional Application Serial No. 60/977,531 titled WET GAS MEASUREMENT and filed on October 4, 2007, and
5 U.S. Application Serial No. 11/936,519, titled WET GAS MEASUREMENT and filed on November 7, 2007, all of which are incorporated by reference.

TECHNICAL FIELD

This description relates to flowmeters.
10

BACKGROUND

Flowmeters provide information about materials being transferred through a conduit. For example, mass flowmeters provide a measurement of the mass of material being transferred through a conduit. Similarly, densitometers provide a measurement of the density of material
15 flowing through a conduit. Mass flowmeters also may provide a measurement of the density of the material.

For example, Coriolis-type mass flowmeters are based on the Coriolis effect, in which material flowing through a conduit becomes a radially-travelling mass that is affected by a Coriolis force and therefore experiences an acceleration. Many Coriolis-type mass flowmeters
20 induce a Coriolis force by sinusoidally oscillating a conduit about a pivot axis orthogonal to the length of the conduit. In such mass flowmeters, the Coriolis reaction force experienced by the traveling fluid mass is transferred to the conduit itself and is manifested as a deflection or offset of the conduit in the direction of the Coriolis force vector in the plane of rotation.

SUMMARY

In one general aspect, a multi-phase process fluid is passed through a vibratable flowtube and a differential pressure flowmeter, and motion is induced in the vibratable flowtube. A first apparent property of the multi-phase process fluid is determined based on the motion of the vibratable flowtube. One or more apparent intermediate values associated with the multi-phase
30 process fluid are determined based on the first apparent property. A measure of wetness of the multi-phase process fluid is determined based on a mapping between one or more of the apparent

intermediate values and the measure of wetness. A second apparent property of the multi-phase process fluid is determined using the differential pressure flowmeter. One or more phase-specific properties of the multi-phase process fluid are determined based on the measure of wetness and the second apparent property.

5 Implementations may include one or more of the following features. Determining one or more apparent intermediate values associated with the multi-phase process fluid based on the first apparent property may include determining a first Froude number corresponding to a non-gas phase of the multi-phase process fluid and a second Froude number corresponding to a gas phase of the multi-phase process fluid. Determining the measure of wetness of the multi-phase
10 process fluid based on a mapping between one or more of the apparent intermediate values and the measure of wetness may include determining the measure of wetness of the multi-phase process fluid based on a mapping between the first and second Froude numbers and the measure of wetness.

The multi-phase process fluid may be a wet gas. The first apparent property may be an
15 apparent mass flow rate. The measure of wetness may be a Lockhart-Martensley parameter. The differential pressure flowmeter may be an orifice plate. The second apparent property may be a mass flow rate of the multi-phase process fluid as a dry gas.

One or more corrected intermediate values may be determined based on a mapping
between one or more of the apparent intermediate values and the corrected intermediate values.
20 One or more phase-specific properties of the multi-phase fluid may be determined based on the corrected intermediate values. The phase-specific properties of the phase of the multi-phase fluid determined based on the corrected intermediate value may be compared to the phase-specific properties of the multi-phase process fluid determined based on the measure of wetness and the second apparent property.

25 Determining one or more phase-specific properties of the multi-phase process fluid based on the measure of wetness and the second apparent property may include determining a mass flow rate of a gas phase of the multi-phase process fluid. The mapping is a neural network.

Implementations of any of the techniques described above may include a method or
process, a system, a flowmeter, or instructions stored on a storage device of flowmeter
30 transmitter. The details of particular implementations are set forth in the accompanying

drawings and description below. Other features will be apparent from the following description, including the drawings, and the claims.

DESCRIPTION OF DRAWINGS

- 5 FIG 1A is an illustration of a Coriolis flowmeter using a bent flowtube
 FIG 1B is an illustration of a Coriolis flowmeter using a straight flowtube
 FIG 2 is a block diagram of a Coriolis flowmeter
 FIG 3 is a block diagram showing a system that includes a differential pressure
flowmeter and a Coriolis flowmeter
- 10 FIG 4 is a block diagram of a digital controller implementing a neural network processor
that may be used with the digital mass flowmeter for multiple-phase fluid flows
 FIGS 5A and 5B are flowcharts illustrating a process that employs a Coriolis flowmeter
and a differential pressure flowmeter for multi-phase fluids
 FIG 6 is a flowchart illustrating a process for using a Coriolis meter and a differential
15 pressure flowmeter
 FIG 7 is an illustration of jacketing

DETAILED DESCRIPTION

Types of flowmeters include digital Coriolis flowmeters. For example, U.S. Patent
20 6,311,136, which is hereby incorporated by reference, discloses the use of a digital Coriolis
flowmeter and related technology including signal processing and measurement techniques.
Such digital flowmeters may be very precise in their measurements, with little or negligible
noise, and may be capable of enabling a wide range of positive and negative gains at the driver
circuitry for driving the conduit. Such digital Coriolis flowmeters are thus advantageous in a
25 variety of settings. For example, commonly-assigned U.S. Patent 6,505,519, which is
incorporated by reference, discloses the use of a wide gain range, and/or the use of negative gain,
to prevent stalling and to more accurately exercise control of the flowtube, even during difficult
conditions such as two-phase flow (e.g., a flow containing a mixture of liquid and gas).

Although digital Coriolis flowmeters are specifically discussed below with respect to, for
30 example, FIGS. 1A, 1B and 2, it should be understood that analog Coriolis flowmeters also exist.
Although such analog Coriolis flowmeters may be prone to typical shortcomings of analog

circuitry, e.g., low precision and high noise measurements relative to digital Coriolis flowmeters, they also may be compatible with the various techniques and implementations discussed herein. Thus, in the following discussion, the term "Coriolis flowmeter" or "Coriolis meter" is used to refer to any type of device and/or system in which the Coriolis effect is used to measure a mass
5 flowrate, density, and/or other parameters of a material(s) moving through a flowtube or other conduit.

FIG. IA is an illustration of a digital Coriolis flowmeter using a bent flowtube 102. Specifically, the bent flowtube 102 may be used to measure one or more physical characteristics of, for example, a (travelling or non-travelling) fluid, as referred to above. In FIG. IA, a digital
10 transmitter 104 exchanges sensor and drive signals with the bent flowtube 102, so as to both sense an oscillation of the bent flowtube 102, and to drive the oscillation of the bent flowtube 102 accordingly. By quickly and accurately determining the sensor and drive signals, the digital transmitter 104, as referred to above, may provide for fast and accurate operation of the bent flowtube 102. Examples of the digital transmitter 104 being used with a bent flowtube are
15 provided in, for example, commonly-assigned U.S. Patent 6,311,136.

FIG. IB is an illustration of a digital Coriolis flowmeter using a straight flowtube 106. More specifically, in FIG. IB, the straight flowtube 106 interacts with the digital transmitter 104. Such a straight flowtube operates similarly to the bent flowtube 102 on a conceptual level, and has various advantages/disadvantages relative to the bent flowtube 102. For example, the
20 straight flowtube 106 may be easier to (completely) fill and empty than the bent flowtube 102, simply due to the geometry of its construction. In operation, the bent flowtube 102 may operate at a frequency of, for example, 50-110 Hz, while the straight flowtube 106 may operate at a frequency of, for example, 300-1,000Hz. The bent flowtube 102 represents flowtubes having a variety of diameters, and may be operated in multiple orientations, such as, for example, in a
25 vertical or horizontal orientation. The straight flowtube 106 also may have a variety of diameters, and maybe operated in multiple orientations.

Referring to FIG. 2, a digital mass flowmeter 200 includes the digital transmitter 104, one or more motion sensors 205, one or more drivers 210, a flowtube 215 (which also maybe referred to as a conduit, and which may represent either the bent flowtube 102, the straight
30 flowtube 106, or some other type of flowtube), a temperature sensor 220, and a pressure sensor 225. The digital transmitter 104 may be implemented using one or more of, for example, a

processor, a Digital Signal Processor (DSP), a field-programmable gate array (FPGA), an ASIC, other programmable logic or gate arrays, or programmable logic with a processor core. It should be understood that, as described in U.S. Patent No. 6,311,136, associated digital-to-analog converters may be included for operation of the drivers 210, while analog-to-digital
5 converters may be used to convert sensor signals from the sensors 205 for use by the digital transmitter 104.

The digital transmitter 104 may include a bulk density measurement system 240 and a bulk mass flowrate measurement system 250. Bulk properties generally refer to properties of the fluid as a whole, as opposed to the properties of a constituent component of the fluid when multi-
10 phase flow is present (as described below). Density measurement system 240 and mass flowrate measurement system 250 may generate measurements of, respectively, density and/or mass flowrate of a material flowing through the flowtube 215 based at least on signals received from the motion sensors 205. The digital transmitter 104 also controls the drivers 210 to induce motion in the flowtube 215. This motion is sensed by the motion sensors 205.

Density measurements of the material flowing through the flowtube are related to, for example, the frequency of the motion of the flowtube 215 that is induced in the flowtube 215 (typically the resonant frequency) by a driving force supplied by the drivers 210, and/or to the temperature of the flowtube 215. Similarly, mass flow through the flowtube 215 is related to the phase and frequency of the motion of the flowtube 215, as well as to the temperature of the
20 flowtube 215.

The temperature in the flowtube 215, which is measured using the temperature sensor 220, affects certain properties of the flowtube, such as its stiffness and dimensions. The digital transmitter 104 may compensate for these temperature effects. Also in FIG. 2, a pressure sensor 225 is in communication with the transmitter 104, and is connected to the flowtube 215 so as to
25 be operable to sense a pressure of a material flowing through the flowtube 215.

It should be understood that both the pressure of the fluid entering the flowtube 215 and the pressure drop across relevant points on the flowtube may be indicators of certain flow conditions. Also, while external temperature sensors may be used to measure the fluid temperature, such sensors may be used in addition to an internal flowmeter sensor designed to
30 measure a representative temperature for flowtube calibrations. Also, some flowtubes use multiple temperature sensors for the purpose of correcting measurements for an effect of

differential temperature between the process fluid and the environment (e.g., a case temperature of a housing of the flowtube)

In FIG. 2, it should be understood that the various components of the digital transmitter 104 are in communication with one another, although communication links are not explicitly illustrated, for the sake of clarity. Further, it should be understood that conventional components of the digital transmitter 104 are not illustrated in FIG. 2, but are assumed to exist within, or be accessible to, the digital transmitter 104. For example, the digital transmitter 104 will typically include drive circuitry for driving the driver 210, and measurement circuitry to measure the oscillation frequency of the flowtube 215 based on sensor signals from sensors 205 and to measure the phase between the sensor signals from sensors 205.

Under certain conditions, a Coriolis flowmeter can accurately determine the bulk density and bulk mass flowrate of a process fluid in the flowtube 215. That is, an accurate bulk density and/or bulk mass flowrate of the process fluid can be determined under certain conditions.

Also, in some situations, the process fluid may contain more than one phase by being a mixture of two or more materials (for example, oil and water or a fluid with entrained gas), by being the same material in different phases (for example, liquid water and water vapor), or by being different materials in different phases (for example, water vapor and oil). In some multi-phase flow conditions, a Coriolis flowmeter may accurately determine the bulk density and bulk mass flowrate of the fluid, which can then be used to accurately determine the density and/or mass flowrate of the constituent phases.

Under other multi-phase flow conditions, however, a Coriolis flowmeter may not perform in a satisfactory manner. Although the Coriolis flowmeter continues to operate in the presence of the multi-phase process fluid, the presence of the multi-phase fluid affects the motion of the flowtube (or conduit) that is part of the Coriolis flowmeter. Thus, the outputs determined by the meter may be inaccurate because the meter operates on the assumption that the process fluid is either single phase, or the process fluid is a multi-phase fluid with properties such as high liquid viscosity and/or no slip between phases. These outputs may be referred to as apparent properties because they have not been corrected for the effects of multi-phase flow. While apparent properties generally are those that have not been corrected for the effects of multi-phase flow, initial estimates of these properties may have been corrected for other effects to generate the

apparent properties. For instance, initial estimates of these properties may be corrected for the effects of temperature and/or pressure on the properties to generate the apparent properties.

For instance, under some multi-phase flow conditions, a Coriolis flowmeter may not be able to measure the bulk density, the bulk mass flowrate, the density of constituent components of a multi-phase flow, or the mass flowrates of constituent components of a multi-phase flow within the required tolerances needed in a particular application because these properties are determined based on an assumption that single-phase flow is present, and the resulting errors introduced by multi-phase flow are greater than the required tolerances. In other words, the Coriolis flowmeter may not be able to measure such items within the requisite degree of accuracy for a given use of the Coriolis flowmeter.

Examples of such conditions include situations in which the process fluid is a wet gas (that is, it contains mostly a gas component, but has some liquid component). A wet gas typically occurs in applications involving natural gas, where the gas component is the natural gas, and the liquid component may be water, hydrocarbons, or compressor oil (or some combination thereof). Other applications in which a wet gas occurs may include applications involving steam as the process fluid.

A wet gas generally includes a process fluid that contains 5% by volume or less of a liquid or, in other words, a process fluid that has a void fraction of 0.95 (95%) or more. However, the techniques described below with respect to wet gases are not limited to process fluids that contain 5% by volume or less of a liquid. Rather, the techniques are bounded by the required accuracy of a given application, with the accuracy depending on the accuracy of the Coriolis flowmeter and other meters described below for a given void fraction.

Referring to FIG. 3, a differential pressure flowmeter 304 may be used in combination with a Coriolis flowmeter 306 to more accurately measure the properties of a wet gas or other multi-phase process fluid. As illustrated, a system 300 includes a conduit 302 that carries the process fluid (e.g., wet gas), a differential pressure flowmeter 304, a Coriolis flowmeter 306 that measures the apparent bulk mass flowrate and apparent bulk density of the process fluid, and a flow computer 308. In some implementations, the flow computer 308 may act as the transmitter 104 discussed above. In some implementations, the flow computer 308 may be separate from the differential pressure flowmeter 304 and the Coriolis flowmeter 306. In general, differential pressure flowmeters, such as the differential pressure flowmeter 304, guide the flow of a process

fluid into a section of the differential pressure flowmeter 304 that has a cross sectional area different than the cross sectional area of the conduit that carries the process fluid. This results in variations of the flow velocity and the pressure. By measuring the changes in pressure, the flow velocity can be calculated. The bulk mass flowrate can be calculated from the flow velocity.

5 However, as with the Coriolis flowmeter, the calculations of bulk mass flowrate may be performed based on an assumption of single-phase flow, and therefore the measurement may be inaccurate when a multi-phase fluid is present. Hence, the bulk mass flowrate may be an apparent bulk mass flowrate because it has not been corrected to account for multi-phase flow.

In some implementations, the differential pressure flowmeter 304 may be an orifice plate.
10 An orifice plate is typically a flat plate that includes an orifice. An orifice plate is normally mounted between a pair of flanges and installed in a straight run of smooth pipe to avoid disturbance of flow patterns from fittings and valves.

Flow through an orifice plate is characterized by a change in velocity. As the fluid passes through the orifice, the fluid converges, and the velocity of the fluid increases to a maximum
15 value. At this point, the pressure is at a minimum value. As the fluid diverges to fill the entire pipe area, the velocity decreases back to the original value. The pressure increases towards the original input value, typically recovering 60-80% of the maximum pressure drop. The pressures on both sides of the orifice are measured, resulting in a differential pressure, which is proportional to the flow velocity. From the velocity and the density of the fluid, the apparent
20 bulk mass flowrate can be calculated for a known fluid density.

Thus, the differential pressure flowmeter 304 may be an orifice plate. The orifice plate may include the conduit 302 for carrying the process fluid and an orifice plate located in the conduit 302. An arrow 310 illustrates the direction of flow. Upstream from the orifice plate is a first pressure sensor and downstream from the orifice plate is a second pressure sensor. The
25 difference between the measurements of the first sensor and the second sensor provides the differential pressure, which may be used to calculate the flow velocity and the apparent bulk mass flowrate.

The apparent bulk properties determine by the Coriolis flowmeter 306 and the differential pressure flowmeter 304 may be used to determine corrected values of, e.g., the mass flowrates of
30 the constituent components of the fluid, as described further below.

To that end, and with reference to FIG. 4, Coriolis flowmeter 306 may use a digital controller 400 in place of the digital transmitter 104 described above with respect to FIGS. 1A, 1B, and 2. The digital controller 400 also may be referred to as a digital transmitter. In this implementation of the digital transmitter 104, process sensors 404 connected to the flowtube
5 generate process signals including one or more sensor signals, one or more temperature signals, and one or more pressure signals. For example, the process sensors 404 may include the temperature sensor 220, the pressure sensor 225, and/or the motion sensors 205 described with respect to FIG. 2. The analog process signals are converted to digital signal data by A/D converters 406 and stored in sensor and driver signal data memory buffers 408 for use by the
10 digital controller 400. The drivers 445 connected to the flowtube generate a drive current signal and may communicate this signal to the A/D converters 406. The drive current signal then is converted to digital data and stored in the sensor and driver signal data memory buffers 408. Generally, it is assumed that the digital drive signal generated by the A/D converters 406 produces a digital drive signal corresponding to the analog drive signal. In some
15 implementations, the digital drive signal may be monitored to ensure that the digital drive signal has the appropriate amplitude, phase, and frequency characteristics (e.g., that the digital drive signal is an accurate representation of the analog drive signal). The drive voltage also may be monitored. The monitoring may be accomplished by an additional A/D channel. The data sampled by the additional A/D channel may be analyzed in a manner similar to that of the sensor
20 data. This sampled data may be used for diagnostic purposes as well as for maintaining. Alternatively, a digital drive gain signal and a digital drive current signal may be generated by the amplitude control module 435 and communicated to the sensor and driver signal data memory buffers 408 for storage and use by the digital controller 400.

The digital process sensor and driver signal data are further analyzed and processed by a
25 sensor and driver parameters processing module 410 that generates physical parameters including frequency, phase, current, damping and amplitude of oscillation. This information is provided to a raw bulk mass flow measurement module 412 and a raw bulk density measurement module 414. The raw mass flow measurement module 412 generates a raw bulk mass- flowrate measurement signal that indicates the apparent bulk mass flowrate of the fluid. The raw bulk
30 density measurement module 414 generates a raw bulk density measurement signal that indicates the apparent bulk density of the fluid.

A multiple-phase flow error correction module 420 receives, as input, the physical parameters from the sensor and driver parameters processing module 410, the raw bulk mass flowrate measurement signal, and the raw bulk density measurement 414. When the process fluid may contain a single-phase or multi-phase flow condition, a flow condition state may be detected, which causes the processing by the multiple-phase flow error correction module 420 when multi-phase flow is present, or skips processing by the multiple-phase flow error correction module 420 when single phase flow is present. However, if the process fluid involves a known two-phase (e.g., gas and liquid constituents), three-phase (e.g., gas and two-liquid constituents) or other multiple-phase flow (e.g., one or more gas and one or more liquid constituents), the determination of a flow condition state may not be necessary. In this example, the process fluid may be a wet-gas that is already known to include a gas volume fraction (gvf) and liquid volume fraction (lvf).

The multiple-phase flow error correction module 420 includes one or more mapping functions such as a neural network that is used to help compensate for multi-phase flow conditions. The mapping functions can be implemented in a software routine, or alternatively may be implemented as a separate programmed hardware processor.

The inputs to one of the mapping functions may be apparent intermediate values determined from the apparent bulk mass flowrate measurement signal and the apparent bulk density measurement signal. In this implementation, the multiple-phase flow error correction module 420 determines apparent intermediate values from the raw bulk mass flowrate and apparent bulk density of the multi-phase process fluid. The apparent intermediate values are input into the mapping function, which produces a measure of wetness (e.g., a Lockhart-Martelli parameter, X_{LM}) as an output. The multiple-phase flow error correction module 420 may then output 422 the measure of wetness $X_{i,u}$.

A second mapping function may also input apparent intermediate values determined from the apparent bulk mass flowrate measurement signal and the apparent bulk density measurement signal. In this implementation, the multiple-phase flow error correction module 420 determines apparent intermediate values from the raw bulk mass flowrate and apparent bulk density of the multi-phase process fluid. The apparent intermediate values input to the second mapping function may be the same as or different than the apparent intermediate values input to the first mapping function. The apparent intermediate values are input into the second mapping function.

and corrected for the effects of multi-phase flow. The corrected apparent intermediate values are output to a mass-flow measurement output block 430. In other implementations, the apparent (or raw) bulk mass-flow measurement and apparent bulk density may be input to one or both of the mapping functions.

5 When a neural network is used, a neural network coefficients and training module 425 stores a predetermined set or sets of neural network coefficients that are used by the neural network processor for the correction described above. The neural network coefficients and training module 425 also may perform an online training function using training data so that an updated set of coefficients can be calculated for use by the neural network. While the
10 predetermined set of neural network coefficients are generated through extensive laboratory testing and experiments based upon known two-phase, three-phase, or higher-phase mass-flowrates, the online training function performed by module 425 may occur at the initial commissioning stage of the flowmeter, or may occur each time the flowmeter is initialized.

 As indicated above, the multiple-phase flow error correction module 420 may output 422
15 the measure of wetness $X_{L,M}$. The measure of wetness is then used with measurements made by the differential pressure flowmeter 304 to determine accurate or corrected measurements of phase-specific properties of the fluid, such as the mass flowrate of the constituent phases, as described further below.

 Also, the corrected intermediate values from the mapping function are input to the mass-
20 flow measurement output block 430. Using the corrected intermediate values, the mass-flow measurement output block 430 determines estimates of phase-specific properties of the fluid, such as the mass flowrates of the constituent phases of the multi-phase fluid. When the estimated phase-specific properties and the corrected phase-specific properties are both the mass flowrates of the constituent components of the multi-phase fluid, the estimates maybe compared
25 to the corrected measurements of phase-specific properties of the fluid to determine whether the differential pressure flowmeter 304 and Coriolis flowmeter 306 are functioning properly.

 The sensor parameters processing module 410 also inputs a damping parameter and an amplitude of oscillation parameter to an amplitude control module 435. The amplitude control module 435 further processes the damping parameter and the amplitude of oscillation parameter
30 and generates digital drive signals. The digital drive signals are converted to analog drive signals by D/A converters 440 for operating the drivers 445 connected to the flowtube of the digital

flowmeter. In some implementations, the amplitude control module 435 may process the damping parameter and the amplitude of oscillation parameter and generate analog drive signals for operating the drivers 445 directly.

Referring to FIGS. 5A and 5B, example processes 500A and 500B may be implemented
5 by system 300 and controller 400 to determine a corrected phase-specific property of a phase included in a multi-phase process fluid. For example, the processes 500A and 500B may be used to determine the mass flowrate of each phase of the multi-phase process fluid. The multi-phase process fluid may be, for example, a three-phase fluid such as a wet gas that includes a gas phase and two liquid phases (e.g., methane, water, and oil).

10 As described below, in one implementation, one or more apparent intermediate values are determined based on apparent or raw properties of the multi-phase fluid. For example, an apparent intermediate value may be determined based on an apparent bulk mass flowrate and/or an apparent bulk density of the multi-phase process fluid as determined by, for example, Coriolis flowmeter 306. The apparent intermediate value is input into, e.g., a neural network to
15 produce a measure of wetness of the multi-phase process fluid. Using an intermediate value rather than the apparent bulk mass flowrate and apparent bulk density of the multi-phase process fluid may help improve the accuracy of the determination of the measure of wetness. The measure of wetness is then used with measurements from the differential pressure flowmeter (e.g., orifice plate) to determine corrected values of phase-specific properties of the multi-phase
20 fluid, such as the mass flowrates of the phases of the multi-phase fluid.

A multi-phase process fluid is passed through a vibratable flowtube (505) and motion is induced in the vibratable flowtube (510). The vibratable flowtube may be, for example, the flowtube 215 described with respect to FIG. 2. The multi-phase process fluid may be a two-phase fluid, a three-phase fluid, or a fluid that includes more than three phases. For example, a
25 two-phase fluid may include a non-gas phase, which may be a liquid such as oil, and a gas phase, such as methane. A three-phase fluid may include a gas phase and two non-gas phases. The two non-gas phases may be liquids (such as oil and water), or the two non-gas phases may be a liquid phase (such as oil) and a solid phase (such as sand). The multi-phase fluid may be a wet gas. While the wet gas may be any of the multi-phase fluids described above, in general, a wet gas is
30 composed of more than 95% gas phase by volume. In general each phase of the multi-phase

fluid may be referred to as constituents or components of the multi-phase fluid. The processes 500A and 500B may be applied to any multi-phase fluid.

A first apparent property of the multi-phase fluid is determined based on the motion of the vibratable flowtube (515). The first apparent property of the multi-phase fluid may be the
5 apparent bulk mass flowrate and/or the apparent bulk density of the fluid flowing through the vibratable flowtube. As described above, an apparent property is one that has not been corrected for the effects the multi-phase fluid has on the motion of the flowtube. However, such properties may have been corrected for other effects to generate the apparent properties. For instance, initial estimates of these properties may be corrected for the effects of temperature and/or
10 pressure on the properties to generate the apparent properties.

In general, additional information (e.g., the known densities of the materials in the individual phases) and/or additional measurements (e.g., pressure of the multi-phase fluid or the water-cut of the multi-phase fluid) may be used at times. Thus, in some implementations, in addition to properties determined based on the motion of the conduit, such as the first apparent
15 property discussed above, additional or "external" properties of the multi-phase fluid such as temperature, pressure, and water-cut may be measured and used, e.g., as additional inputs to the mapping described below, to determine one or more apparent intermediate values as described below, or to help in determining the flowrates of the individual components of the multi-phase fluid. The additional properties may be measured by a device other than the flowmeter. For
20 example, the water-cut of the multi-phase fluid, which represents the portion of the multi-phase fluid that is water, may be determined by a water-cut meter. The additional property also may include a pressure associated with the flowtube. The pressure associated with the flowtube may be, for example, a pressure of the multi-phase process fluid at an inlet of the flowtube and/or a differential pressure across the flowtube. The additional property may be the temperature of the
25 multi-phase process fluid.

In some implementations, more than one apparent property may be determined based on the motion of the conduit. For example, in such an implementation, the apparent bulk mass flowrate of the multi-phase fluid and the apparent bulk density of the multi-phase fluid may be determined based on the motion of the conduit, and both of these apparent properties may be
30 used to determine one or more apparent, intermediate values (such as a gas and a liquid Froude

number, as described below). The following describes examples of how the apparent bulk mass flowrate and apparent bulk density can be determined.

The apparent bulk mass flowrate may be determined from the average of the apparent mass flowrate determined from the Coriolis meter, where the period of averaging is selected to represent a balancing between noise reduction due to two-phase effects on the one hand, and maintaining a dynamic response to genuine changes in the flowrate on the other. The averaging period may be, for example, 1 second. The following equation expresses the relationship between the average apparent mass flowrate and the apparent bulk mass flowrate:

$$m_m^a = \bar{m}_0$$

The apparent mass flowrate from the Coriolis meter may be determined from the following equation, where ϕ is the observed phase angle difference of the flowtube 215 in degrees measured by the sensors 205 (e.g., the phase difference between signals measured by the sensors 205), f is the observed frequency of the flowtube 215 in Hertz, T is the temperature of the flowtube 215 in degrees Celsius, A and B are flowtube-type specific temperature coefficients, F_i is a flow calibration factor, and F_f is a field-adjustable flowfactor (which has a nominal value of 1.000):

$$T_0 = 20^\circ \text{C}$$

$$AT = T - T_n$$

$$m_0 = F_f \cdot F_2 \cdot (1 + A\Delta T + B\Delta T^2) \cdot \frac{6400}{f^r} \cdot \sin\left(\frac{\pi}{360} \phi\right)$$

The apparent bulk density of the multi-phase process fluid may be determined from the average of the apparent density determined from the Coriolis meter:

$$\rho_m^a = \bar{\rho}_r, \text{ where}$$

$$\begin{aligned}
 T_0 &= 20.0^\circ C \\
 \Delta T &= T - T_0 \\
 \Delta P &= P_1 - P_0 \\
 \rho_0 &= \frac{256}{f^2} \cdot D_2 \cdot (1 + C \cdot \Delta T) + D_4 \cdot (1 + D \cdot \Delta T) \\
 P_p &= P_0 + k_{pd} \cdot (P_1 - P_0) + k_{dbs}
 \end{aligned}$$

In the above equation, ρ_0 is the raw density in kg/m^3 , P_p is the pressure corrected density in kg/m^3 , P_1 barA is the inlet pressure of the flowtube 215, P_0 barA is a
 5 configured reference pressure, k_{pd} $\text{kg/m}^3/\text{bar}$ and k_{dbs} kg/m^3 are flowtube specific calibration constants valid for specific flowtube operating pressure and gas density ranges, f is the natural frequency of the flowtube 215 in Hertz, P_0 is a reference pressure in barA, P_1 is the inlet pressure in barA, and T is the temperature of the flowtube in
 10 degrees Celsius, D_2 and D_4 are flowtube-specific calibration constants. C and D are flowtube-type specific temperature compensation parameters. A more general equation to correct the apparent bulk density for pressure is as follows, where k_{pd2} and k_{pd4} are flowtube-specific calibration constants:

$$\begin{aligned}
 T_0 &= 20.0^\circ C \\
 \Delta T &= T - T_0 \\
 \Delta P &= P_1 - P_0 \\
 \rho_p &= \rho_0 - D_2 \cdot \Delta P + C \cdot \Delta T \cdot (1 + k_{pd2} \cdot \Delta P) + ZV \cdot (1 + \epsilon \cdot \Delta r) \cdot (1 + k_{pd4} \cdot \Delta P)
 \end{aligned}$$

15 One or more apparent intermediate values associated with the multi-phase process fluid are determined based on the first apparent property (520). In general, the apparent intermediate value (or values) is a value related to the multi-phase fluid that includes inaccuracies resulting from the inclusion of more than one phase in the multi-phase fluid. The apparent intermediate value may be, for example, a gas or a non-gas Froude number.

20 In one implementation, the apparent intermediate values may include both an apparent non-gas Froude number and an apparent gas Froude number. Froude numbers are dimensionless quantities that may represent a resistance of an object moving through a fluid and that may be used to characterize multi-phase fluids. The apparent gas Froude number may be calculated

using the following equation, where m_g^a is the apparent gas mass flow rate, ρ_g is an estimate of the density of the gas phase based on the ideal gas laws (or any model of true gas density, such as, for example, American Gas Association (AGA) or International Standards Organization (ISO) standards, using knowledge of the component materials and observed pressure and temperature), ρ_l is an estimate of the density of the liquid in the non-gas phase of the multi-phase fluid, A is the cross-sectional area of the flowtube, D is the diameter of the flowtube, and g is the acceleration due to gravity

$$Fr_g^a = \frac{m_g^a}{\rho_g A \sqrt{g} D} \sqrt{\frac{\rho_g}{\rho_l - \rho_g}} = K V_g^a \sqrt{\frac{\rho_g}{\rho_l - \rho_g}}$$

where $K = \frac{1}{\sqrt{g} D}$, the Apparent Gas Velocity $V_g^a = \frac{m_g^a}{\rho_g A}$

10

Similarly, the non-gas Froude number (which may be a liquid Froude number) may be calculated using the following equation, where m_l^a is the apparent liquid mass flow rate mass flowrate of the liquid mixture if more than one liquid is present)

$$Fr_l^a = \frac{m_l^a}{\rho_l A \sqrt{g} D} \sqrt{\frac{\rho_l}{\rho_l - \rho_g}} = K V_l^a \sqrt{\frac{\rho_l}{\rho_l - \rho_g}}$$

15

The estimates of the densities of the liquid and gas phases of the multi-phase fluid may be determined as discussed below. In this example, the multi-phase fluid includes two liquid phases (for example, a first liquid that is water and a second liquid that is a condensate) and a gas phase. However, similar calculations may be performed for other multi-phase fluids. In the equations below, ρ_{l0} kg/m³ is the base liquid density at a known temperature, T_{l0} °C, and k_l /°C is a coefficient that provides a linear correction to this density as a function of temperature difference from the base temperature T_{l0} . ρ_n kg/m³ are known from knowledge of the particular substances that are included in the multi-phase fluid. The component fluid densities ρ_n kg/m³ at the current fluid temperature may be determined by

20

$$P_n = P_{n0} \cdot (1 + k_{lv} (T - T_{110}))$$

$$\rho_{l2} = \Lambda_{-0} \cdot (i + *_{l2} - (r - r_{no}))$$

In some implementations, the user may input the volumetric flow fraction (x) of the first liquid. In other implementations, the volumetric flow fraction may be assumed.

5 In still other implementations, the volumetric flow fraction may be estimated, or obtained from a water-cut measuring device such as a water-cut meter.

Assuming no slip between liquid phases, the volumetric flow fraction of the first liquid x_1 % may be determined by:

10
$$x_1 = \left(\frac{\rho_l - \rho_{l2}}{\rho_{l1} - \rho_{l2}} \right) \cdot 100 \%$$

Using X_1 %, and assuming no slip between liquid phases, the combined liquid density (i.e., liquid density of the liquid mixture) may be calculated with:

15
$$\rho_l = \rho_{l2} + \frac{x_1}{100} \cdot (\rho_{l1} - \rho_{l2})$$

 or

$$\rho_l = \frac{x_1}{100} \rho_{l1} + \left(1 - \frac{x_1}{100} \right) \rho_{l2}$$

Additionally, an estimate of the gas density ρ_g kg/m³ at line conditions of
 20 pressure P_l barA and T_l °C at the inlet the Coriolis flowtube may be determined given a reference density of the gas ρ_{g0} kg/m³ at a reference pressure P_{g0} barA and reference temperature T_{g0} °C. While there are a number of equations of state that take into account compressibility and other non-idealities, the estimate of the actual gas density using the ideal gas laws is assumed to be sufficient and the density of the gas phase may
 25 be estimated based on:

$$\rho_g = \rho_{g0} \cdot \frac{P_l}{P_{g0}} \cdot \left(\frac{T_{g0} + 273.15}{T_l + 273.15} \right) \cdot \left(\frac{1}{Z_f} \right)$$

In the above equation, Z_f is the compressibility of the gas in the gas phase, and for some gases (such as natural gas), the compressibility varies with pressure according to the following equation

5

$$Z_f = Z_{ft} + k_{zp} (P - P_0)$$

The apparent mass flowrates the liquid and gas phases of the multi-phase fluid may be determined as discussed below. Following the above example, the multi-phase fluid includes two liquid phases (for example, a first liquid that is water and a second liquid that is a condensate) and a gas phase. However, similar calculations may be performed for other multi-phase fluids. The apparent mass flowrates for the liquid mixture, and constituent liquid components, may be calculated using the following

15

$$\begin{aligned} m_l^a &= \rho_l v_l^a \\ m_n^a &= \rho_n v_n^a \\ m_n^a &= P_n v_n^a \end{aligned}$$

where v_l^a is the apparent volumetric flowrate of the liquid mixture, v_1^a is the apparent volumetric flowrate of the first liquid, and v_2^a is the apparent volumetric flowrate of the second liquid, all of which may be calculated as follows

$$\begin{aligned} v_l^a &= \frac{LVF^a}{100} v_m^a \\ v_n^a &= \frac{x_n}{100} v_l^a \\ v_{l2}^a &= \left(1 - \frac{x_1}{100}\right) v_l^a = v_l^a - v_{l1}^a \end{aligned}$$

The apparent volumetric flowrate of the multi-phase fluid, v_m^a , may be calculated as follows

20

$$v_m^a = \frac{m_m^a}{\rho_m^a}$$

The apparent liquid volume fraction LVF^a maybe calculated as follows

$$LVF^a = \frac{\rho_m^a - \rho_g}{\rho_l - \rho_g} 100 \% = 100 - GVF^a,$$

with the apparent gas void fraction, GVF^a , being calculated based on the following:

$$GVF'' = \frac{P_t - P_m^a}{P_t - P_s} \cdot 100 \%$$

The apparent mass flowrate for the gas phase may be calculated using the following:

$$\dot{m}_g^a = \rho_g \cdot v_g^a = \rho_{g0} \cdot S v_g^a,$$

5 where the apparent volumetric flowrate of the gas, v_g^a , is calculated using:

$$v_g^a = \frac{GVF''}{100} \cdot v_m^a.$$

A measure of wetness (e.g., a Lockhart-Martinelli parameter) is determined based on a mapping between the one or more of the apparent intermediate values and the measure of wetness (525). In one implementation, the one or more intermediate values are the non-gas
 10 Froude number and the gas Froude number discussed above.

The mapping may be a neural network, a statistical model, a polynomial, a function, or any other type of mapping. The neural network or other mapping may be trained with data obtained from a multi-phase fluid for which values of the constituent phases are known.

In one implementation, prior to inputting an apparent intermediate value into the
 15 mapping, the apparent intermediate value may be filtered or conditioned to reduce measurement and process noise. For example, linear filters may be applied to the apparent intermediate value to reduce measurement noise. The time constant of the linear filter may be set to a value that reflects the response time of the measurement instrumentation (e.g., 1 second) such that the filter remains sensitive to actual changes in the fluid flowing through the flowtube (such as slugs of
 20 non-gas fluid) while also being able to reduce measurement noise.

The development of a mapping for correcting or improving a multiphase measurement may involve the collection of data under experimental conditions, where the true or reference measurements are provided by additional calibrated instrumentation. Generally, it is not
 25 practical to carry out experiments covering all conceivable multi-phase conditions, either due to limitations of the test facility, and/or the cost and time associated with carrying out possibly thousands of experiments. Additionally, it is rarely possible to maintain multiphase flow conditions exactly constant for any extended period of time, due to the inherently unstable flow conditions that occur within multiphase conditions. Accordingly, it is usually necessary to

calculate the average values of all relevant parameters, including apparent and true or reference parameter values, over the duration of each experiment, which may typically be of 30s to 120s duration. Thus, the mapping may be constructed from experimental data where each data point is derived from the average of for example 30s to 120s duration of data.

5 Difficulties might arise when applying the resulting mapping in the meter during multiphase flow in real time, whereby the particular parameter values observed within the meter are not included in the mapping provided from the previously collected experimental data. There are two primary ways in which this may occur. In the first instance, although the conditions experienced by the meter, averaged over a timescale of about 15 to 120 seconds, do correspond
10 to conditions covered by the mapping, the instantaneous parameter values may fall outside of the region, due to measurement noise and or instantaneous variations in actual conditions due to the instabilities inherent in multiphase flow. As described above, this effect can to some extent be reduced by time-averaging or filtering the parameters used as inputs into the mapping function, though there is a tradeoff between the noise reduction effects of such filtering and the
15 responsiveness of the meter to actual changes in conditions within the multiphase flow. Alternatively, averaged parameter values may fall outside of the mapping because, for instance, it has not been economically viable to cover all possible multiphase conditions during the experimental stage.

It may not be beneficial to apply a mapping function (whether neural net, polynomial or
20 other function) to data that falls outside of the region for which the mapping was intended. Application of the mapping to such data may result in poor quality measurements being generated. Accordingly, jacketing procedures may be applied to ensure that the behavior of the mapping procedure is appropriate for parameter values outside the mapped region, irrespective of the reasons for the parameters falling outside the mapped region. Data that is included in the
25 region may be referred to as suitable data.

Thus, the apparent intermediate value may be "jacketed" prior to inputting the apparent intermediate value into the mapping. For implementations that include one input to the mapping, the region of suitable data may be defined by one or more limits, a range, or a threshold. In other implementations, there may be more than one input to the mapping. In these implementations,
30 the region of suitable data may be defined by a series of lines or planes. Accordingly, as the number of inputs to the mapping increases, defining the region of suitable data becomes more

complex. Thus, it may be desirable to use fewer inputs to the mapping. The gas and non-gas Froude numbers described above are an example of apparent intermediate values that may be input into the mapping without additional inputs. Thus, use of the gas and non-gas Froude numbers may help to reduce the number of inputs into the mapping, which also may help reduce the complexity of the jacketing process. Additionally, using fewer inputs to the mapping may result in a simpler mapping, which may help reduce the computational resources used by the mapping and help increase the speed of determining corrected intermediate values based on the mapping.

Referring briefly to FIG. 7, an illustration of jacketing is shown. In this example, an apparent intermediate value 710 has a value that is outside of the defined region 715 maybe determined to be unsuitable for input to the mapping. In this example, the region 715 is defined by two lines, line 720 and line 725. In general, rules are defined to correct an apparent intermediate value that is determined to be outside of the defined region. For example, an apparent intermediate value that is outside of the defined region (such as the apparent intermediate value 710) may be ignored by the mapping (e.g., the apparent intermediate value is not corrected by the mapping), the apparent intermediate value may not be input to the mapping at all, a fixed correction may be applied to the apparent intermediate value rather than a correction determined by the mapping, or the correction corresponding to the correction that would apply to the value closest to the apparent intermediate value may be applied. Other rules for correcting an apparent intermediate value that is outside of the defined region may be implemented. In general, the jacketing is specific to a particular mapping and is defined for each mapping.

Returning to FIG. 5A, the output of the mapping is a measure of wetness at the flowtube. The measure of wetness generally provides an indication of the amount of liquid present in the multi-phase fluid. Thus, in the example process 500A, the Coriolis meter may act as an instrument that provides such a measure of wetness for the multi-phase fluid even though the Coriolis meter is generally calibrated to measure properties of a single-phase fluid. As discussed above, the measure of wetness may be a Lockhart-Martinelli parameter.

Referring to FIG. 5B, an example process 500B may use the measure of wetness and measurements made by differential flowmeter 304 to determine one or more phase-specific properties of a multi-phase process fluid. For example, the process 500B may be used to

determine the mass flowrate of each phase of the multi-phase process fluid. In general, the example process 500B uses the measure of wetness of the multi-phase process fluid determined at the flowtube as described above (525) together with a second apparent property of the multi-phase process fluid measured by the differential pressure flowmeter 304.

5 A multi-phase process fluid is passed through the differential pressure flowmeter 304 (560) and a second apparent property is determined using the differential pressure flowmeter 304 (565). The differential pressure flowmeter may be an orifice plate, as described above with respect to FIG. 3. In other implementations, the differential pressure flowmeter may be a Venturi flowmeter or a V-cone flowmeter. In still other implementations, any obstruction to the
10 flow whose characteristics can be determined may be used. Additionally or alternatively, other types of flowmeters may be used. For example, flowmeters based on vortex, turbine, electromagnetic, or ultrasonic phenomena may be used.

 The second apparent property is an apparent property of the multi-phase process fluid determined by the differential pressure flowmeter. In one implementation, the second apparent
15 property is the mass flowrate of the multi-phase fluid determined by an orifice plate as if the fluid were a dry gas. Like the Coriolis meter, the differential pressure flowmeter will also produce inaccurate results when a multi-phase process fluid is present. In particular, a transmitter, or other processing device, used to make determinations based on information received from a flowmeter that includes an orifice plate may make determinations on the
20 assumption that the multi-phase fluid is a dry gas. Thus, the readings from the orifice plate for a multi-phase fluid are inaccurate and generally represent the mass flowrate of the multi-phase fluid as if it were a dry gas.

 One or more corrected phase-specific properties of the multi-phase fluid are determined based on the second apparent property and the measure of wetness (570). In general, the multi-
25 phase process fluid is the multi-phase process fluid that passed through the flowtube described above in FIG. 5A, though the multi-phase process fluid may undergo physical changes as the fluid flows between the flowtube and the differential pressure meter. For example, the temperature or pressure of the multi-phase process fluid may be different at the Coriolis meter and the differential pressure flowmeter, and the density of the multi-phase fluid may be different
30 at the flowtube and the Coriolis meter. For example, pressure and temperature changes may have a significant effect on any gas phases included in the multi-phase fluid. Accordingly, the

measure of wetness determined at the flowtube is transformed to a measure of wetness at the differential pressure meter to account for the changed conditions

For example, if the measure of wetness is a Lockhart-Martinelli parameter, as described with respect to FIG 5A, and the differential pressure flowmeter is an orifice plate, the Lockhart-Martinelli parameter at the orifice plate may be expressed as follows, where $X_{LM}(OP)$ is the Lockhart-Martinelli parameter at the orifice plate, $X_{LM}(FT)$ is the Lockhart-Martinelli parameter at the flowtube, $\rho_g(OP)$ is the density of the gas phase of the multi-phase process fluid at the orifice plate, $\rho_l(OP)$ is the density of the liquid phase of the multi-phase process fluid at the orifice plate, $\rho_g(FT)$ is the density of the gas phase of the multi-phase process fluid at the flowtube, and $\rho_l(FT)$ is the density of the liquid phase of the multi-phase process fluid at the flowtube

$$X_{LM}(OP) = \frac{m_l}{m_g} \sqrt{\frac{\rho_g(OP)}{\rho_l(OP)}} = X_{LM}(FT) \sqrt{\frac{\rho_l(FT)}{\rho_g(FT)}} \sqrt{\frac{\rho_g(OP)}{\rho_l(OP)}}$$

The estimated densities of the gas and liquid phases can be determined in a manner similar to the manner described with respect to operation 520 of process 500A, except for using the temperature and pressure conditions at the differential pressure flowmeter 304 rather than those conditions at the Coriols flowmeter 306

Continuing this example, one or more corrected phase-specific properties of the multi-phase process fluid are determined based on the mass flowrate of the multi-phase fluid as a dry gas and the Lockhart-Martinelli parameter at the orifice plate 304 (which is based on the Lockhart-Martinelli parameter at the Coriols flowmeter 306, as described above) In this example, the phase-specific property is the mass flowrate of the gas and liquid phases of the multi-phase process fluid However, a similar process may be used to determine other phase-specific properties for gas, liquid, and/or solid phases included in a multi-phase process fluid

In particular, the corrected mass flowrate of the gas phase of the multi-phase process fluid is determined based on the Lockhart-Martinelli parameter at the orifice plate (or other differential pressure flowmeter) according to the Murdock or other appropriate correction equation (e.g., De Leeuw equations may be used for Venturi meters), where m_g is the mass

flowrate of the multi-phase process fluid as a dry gas, as measured by the differential pressure flowmeter, and X_{L-M} is the Lockhart-Martelli parameter at the orifice plate

$$m_g^c = \frac{m_{gTP}}{1 + 1.26 X_{L-M}}$$

5

The mass flowrate of the liquid phase of the multi-phase process fluid may be estimated based on the following equation

$$m_l^c = X_{L-M}^c m_g^c \sqrt{\frac{\rho_l}{\rho_g}}$$

10

When more than one liquid is included in the liquid phase, the mass flowrates of the specific liquid components may be determined using the following

$$m_n^c = P n^c \hat{v}_n^c$$

$$m_n^c = P n^c \hat{v}_n^c$$

where v_n^c is the corrected volumetric flowrate of the first liquid, and v_n^c is the corrected

15 volumetric flowrate of the second liquid, all of which may be calculated as follows

$$v_1^c = \frac{m_1^c}{\rho_1}$$

$$v_n^c = \frac{x_1}{100} v_1^c$$

$$v_{l2}^c = \left(1 - \frac{x_1}{100}\right) v_1^c$$

Where x_1 is the known measured or assumed volumetric flow fraction of fluid component 1 as before

20 The Murdock correction is further described in Murdock, J W , "Two-phase flow with orifices," Journal of Basic Engineering, ASME Transactions 84 (4), pp 419 -433, December 1962

As an alternative, particularly when the fluid is a wet gas, the corrected mass flowrate of the gas phase may be determined from the Chisholm correction equations below

$$m_g = \frac{m_{gTP}}{\sqrt{1 + C X_{L-M} + X_{L-M}}} = \frac{m_{gTP}}{\sqrt{1 + X_{L-M} (C + X_{L-M})}}$$

where

$$C = \left(\frac{\rho_l}{\rho_g}\right)^{0.25} + \left(\frac{\rho_g}{\rho_l}\right)^{0.25} \quad (\text{for } X_{L-M} < 1)$$

Additionally, the corrected mass flowrate of the liquid phases may be determined based on the following equations, which are described above

5

$$\begin{aligned} m_n^c &= P n v_n^c \\ m_n^c &= P n v_n^c \end{aligned}$$

$$v_l^c = \frac{m_l^c}{\rho_l}$$

$$v_n^c = \frac{x_1}{100} v_l^c$$

$$v_{l2}^c = \left(1 - \frac{x_1}{100}\right) K$$

The Chisholm correction is described further in Chisholm, D , "Flow of incompressible two-phase mixtures through sharp-edged orifices," MechE Journal of Mechanical Engineering Science, Volume 9, No 1, pp 72-78, February 1967 and Chisholm, D , "Research Note Two-phase flow through sharp-edged orifices," IMechE Journal of Mechanical Engineering Science, Volume 19, No 3, pp 128-130, June 1977

In other implementations, other corrections may be used as appropriate depending on the type of differential pressure flowmeter used For instance, if a Venturi flowmeter is used, then the De Leeuw correction may be used This correction is similar in form to the Chisholm correction with modified coefficients See, for example, De Leeuw, H , "Wet Gas Flow Measurement using a combination of Venturi meter and a tracer technique," North Sea Flow Measurement Workshop, Peebles, Scotland, Oct 1994 and De Leeuw, H , "Liquid Correction of Venturi Meter Readings in Wet Gas Flow," North Sea Flow Measurement Workshop, Norway, Oct 1997

Accordingly, a measure of wetness of a multi-phase process fluid passed through a flowtube may be used with an apparent property of the multi-phase process fluid determined by passing the fluid through a differential pressure flowmeter to determine phase-specific properties of the multi-phase fluid

5 Referring to FIG. 6, an example process 600 may be used for error or fault checking by comparing estimates of phase-specific properties determined by a Coriolis flowmeter to the corrected phase-specific properties determined in process 500B. Consistency among the phase-specific properties determined in the two different ways may provide an indication that the Coriolis meter and the differential pressure meter are operating properly.

10 As described with respect to FIGS. 5A and 5B, a Coriolis meter and a differential pressure flowmeter may be used to determine phase-specific properties, such as mass flowrate, for the constituent phases of a multi-phase process fluid. Using a process such as the process 600, phase-specific properties of the multi-phase process fluid also may be determined by the Coriolis meter alone, and these phase-specific properties may be compared to those determined
15 using the differential pressure flowmeter. In general, if the Coriolis flowmeter and the differential pressure flowmeter are both operating properly, the phase-specific properties are similar regardless of the instruments used to determine the properties.

One or more apparent intermediate values associated with the multi-phase process fluid are determined based on a first apparent property (605). The first apparent property is the first
20 apparent property discussed above with respect to FIG. 5A. The apparent intermediate value may be, for example, a volume fraction of the multi-phase process fluid. The volume fraction may be a liquid volume fraction that specifies the portion of the multi-phase fluid that is a non-gas. The volume fraction also may be a gas volume fraction that specifies the portion of the multi-phase fluid that is a gas. In general, the volume fraction is a dimensionless quantity that
25 may be expressed as a percentage. The gas volume fraction also may be referred to as a void fraction. If the multi-phase fluid includes liquids and gases, the liquid and gas volume fractions add up to 100%. In other implementations, the apparent intermediate values may be a volumetric flowrate of the multi-phase fluid.

In one implementation, the apparent intermediate values are the apparent volumetric
30 flowrate and the apparent liquid volume fraction and are determined based on the apparent bulk

mass flowrate and the apparent bulk density. The apparent volumetric flowrate in m³/s may be determined from the following equation:

$$v_m^a = \frac{\dot{m}_m^a}{\rho_m^a}$$

5 The apparent liquid volume fraction, which is expressed as a percentage, may be determined from the following equation, where ρ_l is the estimated density of the liquid phase of the multi-phase process fluid, and ρ_g is the estimated density of the gas phase of the multi-phase process fluid:

10
$$LVF'' = \frac{\rho_m^a - \rho_g}{\rho_l - \rho_g} \cdot 100 \% = 100 - GKF^\circ$$

The estimates of the liquid and gas densities may be obtained as described above with respect to operation 520.

15 One or more corrected intermediate values are determined based on a mapping between one or more apparent intermediate values and the corrected intermediate values (610). For example, the corrected intermediate value may be a corrected liquid volume fraction, LVF'' (%), and/or a corrected volumetric flow, v_m^c , m³/s. In one particular implementation, the corrected intermediate values are a corrected liquid volume fraction and a corrected volumetric flowrate that are corrected from the apparent liquid volume fraction and the apparent volumetric flowrate.

20 The mapping may be a neural network, a polynomial, a function, or any other type of mapping that relates the apparent intermediate values and the corrected intermediate values. In general, the mapping between the one or more apparent intermediate values and the corrected intermediate values is a different mapping than the mapping between the one or more apparent intermediate values and the measure of wetness discussed above with respect to FIG. 5A. As discussed above, the inputs to the mapping may be jacketed and/or filtered. However, in some implementations, the mappings may be the same.

The neural network or other mapping may be trained with data obtained from a multi-phase fluid for which values of the constituent phases are known. In one implementation, the mapping is a neural network that takes as inputs the apparent liquid volume fraction, the apparent

volumetric flowrate, the pressure at the inlet of the vibratable flowtube, and the differential pressure across the vibratable flowtube. The neural network produces a corrected liquid volume fraction and a corrected mixture volumetric flowrate.

One or more phase-specific properties of the multi-phase process fluid are determined based on the corrected intermediate value (615). The phase-specific property may be, for example, a mass flowrate and/or a density of the non-gas and gas phases of the multi-phase fluid. The following equations illustrate the determination of the estimated phase-specific mass flowrates of the constituent phases of the multi-phase process fluid based on the corrected mixture volumetric flowrate and the corrected liquid volume fraction.

The corrected volume fraction of the gas phase, GVF^c expressed as a percentage, may be determined from

$$GVF^c = 100 \cdot LVF^c \%$$

The phase-specific volumetric flowrate of the gas phase in mVs may be determined from the following, where v_m^c is the corrected mixture volumetric flow as discussed above with respect to (525)

$$v_g^c = GVF^c v_m^c$$

The phase-specific mass flowrate of the gas phase of the multi-phase process fluid may be determined from the following equation

$$m_g^c = \rho_g v_g^c = \rho_{g0} sv_g^c,$$

where the corrected standard volumetric flow sv_g^c , of the gas at defined standard conditions of temperature and pressure where it has density ρ_{g0} is given by

25

$$sv_g^c = \frac{\rho_g}{\rho_{g0}} v_g^c$$

30 The phase-specific mass flowrate also may be determined for the non-gas phases of the multi-phase process fluid (both the liquid mixture and specific liquid components). Continuing the example above, the multi-phase process fluid has a gas phase and two liquid phases. The

corrected volumetric flowrates (m³/s) of the liquid mixture and the specific liquid phases may be determined from the following equation, where v_m^c is the corrected volumetric flowrate as discussed above:

$$v_i^c = \frac{LVF^c}{100} \cdot v_m^c$$

$$v_n^c = \frac{x_1}{100} \cdot v_i^c$$

$$v_{i2}^c = \left(1 - \frac{x_1}{100}\right) \cdot v_i^c = v_i^c - v_n^c$$

5

The phase-specific mass flowrate of the first and second liquid phases (and the liquid mass flowrate) may then be determined from the following equations:

$$w_i^c = \rho_i v_i^c$$

$$m_n^c = Pn v_n^c$$

$$m_{i2}^c = Pn v_{i2}^c$$

10

The estimated phase-specific properties determined based on the corrected intermediate value in (615) are compared to the corrected phase-specific property based on the measure of wetness and the second apparent property (620). Comparing the estimated phase-specific properties, which are determined based on data from a Coriolis meter, to the corrected phase-specific properties, which are determined based on data from a Coriolis meter and a differential pressure meter, allows an assessment of whether the instruments are performing properly. For example, if the phase-specific properties are compared and found to be similar, it is generally an indication that the Coriolis meter and the differential pressure meter are performing properly.

15

The calculations described in the various implementations may be performed by the transmitter of the Coriolis flowmeter, by a computing device coupled to the Coriolis meter and/or the differential pressure flowmeter, or by a flow computer or computing device coupled to the Coriolis flowmeter and the differential pressure flowmeter.

20

A number of implementations have been described. Nevertheless, it will be understood that various modifications may be made. Accordingly, other implementations are within the scope of the following claims.

25

WHAT IS CLAIMED IS:

- 1 A method comprising
passing a multi-phase process fluid through a vibratable flowtube and a differential
5 pressure flowmeter,
inducing motion in the vibratable flowtube,
determining a first apparent property of the multi-phase process fluid based on the motion
of the vibratable flowtube,
determining one or more apparent intermediate values associated with the multi-phase
10 process fluid based on the first apparent property,
determining a measure of wetness of the multi-phase process fluid based on a mapping
between one or more of the apparent intermediate values and the measure of wetness,
determining a second apparent property of the multi-phase process fluid using the
differential pressure flowmeter, and
15 determining one or more phase-specific properties of the multi-phase process fluid based
on the measure of wetness and the second apparent property
- 2 The method of claim 1, wherein
determining one or more apparent intermediate values associated with the multi-phase
20 process fluid based on the first apparent property includes determining a first Froude number
corresponding to a non-gas phase of the multi-phase process fluid and a second Froude number
corresponding to a gas phase of the multi-phase process fluid, and
determining the measure of wetness of the multi-phase process fluid based on a mapping
between one or more of the apparent intermediate values and the measure of wetness includes
25 determining the measure of wetness of the multi-phase process fluid based on a mapping
between the first and second Froude numbers and the measure of wetness
- 3 The method of claim 1, wherein the multi-phase process fluid is a wet gas
- 30 4 The method of claim 1, wherein the first apparent property is an apparent mass flow rate

- 5 The method of claim 1, wherein the measure of wetness is a Lockhart-Martinelli
parameter
- 6 The method of claim 1, wherein the differential pressure flowmeter is an orifice plate
- 5
- 7 The method of claim 1, wherein the second apparent property is a mass flow rate of the
multi-phase process fluid as a dry gas
- 8 The method of claim 1, further comprising
- 10 determining one or more corrected intermediate values based on a mapping between one
or more of the apparent intermediate values and the corrected intermediate values
 determining one or more phase-specific properties of the multi-phase fluid based on the
corrected intermediate values, and
 comparing the phase-specific properties of the phase of the multi-phase fluid determined
15 based on the corrected intermediate value to the phase-specific properties of the multi-phase
process fluid determined based on the measure of wetness and the second apparent property
- 9 The method of claim 1, wherein determining one or more phase-specific properties of the
multi-phase process fluid based on the measure of wetness and the second apparent property
20 includes determining a mass flow rate of a gas phase of the multi-phase process fluid
- 10 The method of claim 1, wherein the mapping is a neural network
- 11 A flowmeter comprising
- 25 a vibratable flowtube, the flowtube being configured to receive a multi-phase fluid,
 a driver connected to the flowtube and configured to impart motion to the flowtube such
that the flowtube vibrates,
 a sensor connected to the flowtube and configured to sense the motion of the flowtube
and generate a sensor signal, and
- 30 a controller to receive the sensor signal and configured to

- determine a first apparent property of the multi-phase process fluid based on the motion of the vibratable flowtube;
- determine one or more apparent intermediate values associated with the multi-phase process fluid based on the first apparent property;
- 5 determine a measure of wetness of the multi-phase process fluid based on a mapping between one or more of the apparent intermediate values and the measure of wetness;
- receive a second apparent property of the multi-phase process fluid, the second apparent property being determined using a differential pressure flowmeter; and
- 10 determine one or more phase-specific properties of the multi-phase process fluid based on the measure of wetness and the second apparent property.
12. The flowmeter of claim 11, wherein:
- to determine one or more apparent intermediate values associated with the multi-phase process fluid based on the first apparent property, the controller is configured to determine a first
- 15 Froude number corresponding to a non-gas phase of the multi-phase process fluid and a second Froude number corresponding to a gas phase of the multi-phase process fluid; and
- to determine the measure of wetness of the multi-phase process fluid based on a mapping between one or more of the apparent intermediate values and the measure of wetness, the controller is configured to determine the measure of wetness of the multi-phase process fluid
- 20 based on a mapping between the first and second Froude numbers and the measure of wetness.
13. The flowmeter of claim 11, wherein the multi-phase process fluid is a wet gas.
14. The flowmeter of claim 11, wherein the first apparent property is an apparent mass flow
- 25 rate.
15. The flowmeter of claim 11, wherein the measure of wetness is a Lockhart-Martinelli parameter.
- 30 16. The flowmeter of claim 11, wherein the differential pressure flowmeter is an orifice plate.

17. The flowmeter of claim 11, wherein the second apparent property is a mass flow rate of the multi-phase process fluid as a dry gas.
18. The flowmeter of claim 11, wherein the controller is further configured to:
- 5 determine one or more corrected intermediate values based on a mapping between one or more of the apparent intermediate values and the corrected intermediate values
- determine one or more phase-specific properties of the multi-phase fluid based on the corrected intermediate values; and
- 10 compare the phase-specific properties of the phase of the multi-phase fluid determined based on the corrected intermediate value to the phase-specific properties of the multi-phase process fluid determined based on the measure of wetness and the second apparent property.
19. The flowmeter of claim 11, wherein, to determine one or more phase-specific properties of the multi-phase process fluid based on the measure of wetness and the second apparent
- 15 property, the controller is configured to determine a mass flow rate of a gas phase of the multi-phase process fluid.
20. A flowmeter transmitter for use with a vibratable flowtube coupled to a differential pressure flowmeter such that a multi-phase process fluid passes through the vibratable flowtube
- 20 and the differential pressure flowmeter, the flowmeter transmitter comprising:
- at least one processing device; and
- a storage device, the storage device storing instructions for causing the at least one processing device to:
- 25 induce motion in the vibratable flowtube, the vibratable flowtube being configured to receive a multi-phase process fluid;
- determine a first apparent property of the multi-phase process fluid based on the motion of the vibratable flowtube;
- determine one or more apparent intermediate values associated with the multi-phase process fluid based on the first apparent property;
- 30 determine a measure of wetness of the multi-phase process fluid based on a mapping between one or more of the apparent intermediate values and the measure of wetness;

receive a second apparent property of the multi-phase process fluid, the second apparent property being determined using a differential pressure flowmeter, and

determine one or more phase-specific properties of the multi-phase process fluid based on the measure of wetness and the second apparent property

5

21 The transmitter of claim 20, wherein

to determine one or more apparent intermediate values associated with the multi-phase process fluid based on the first apparent property, the instructions include instructions for causing the processing device to determine a first Froude number corresponding to a non-gas phase of the multi-phase process fluid and a second Froude number corresponding to a gas phase of the multi-phase process fluid, and

10

to determine the measure of wetness of the multi-phase process fluid based on a mapping between one or more of the apparent intermediate values and the measure of wetness, the instructions include instructions for causing the processing device to determine the measure of wetness of the multi-phase process fluid based on a mapping between the first and second Froude numbers and the measure of wetness

15

22 The transmitter of claim 20, wherein the multi-phase process fluid is a wet gas

20

23 The transmitter of claim 20, wherein the first apparent property is an apparent mass flow rate

24 The transmitter of claim 20, wherein the measure of wetness is a Lockhart-Martinelli parameter

25

25 The transmitter of claim 20, wherein the to determine one or more phase-specific properties of the multi-phase process fluid based on the measure of wetness and the second apparent property, the instructions include instructions for causing the processing device to determine a mass flow rate of a gas phase of the multi-phase process fluid

30

26 A system comprising

- a vibratable flowtube configured to receive a multi-phase process fluid;
a differential pressure flowmeter coupled to the vibratable flowtube; and
one or more processing devices configured to:
- induce motion in the vibratable flowtube;
 - 5 determine a first apparent property of the multi-phase process fluid based on the motion of the vibratable flowtube;
 - determine one or more apparent intermediate values associated with the multi-phase process fluid based on the first apparent property;
 - determine a measure of wetness of the multi-phase process fluid based on a
10 mapping between one or more of the apparent intermediate values and the measure of wetness;
 - receive a second apparent property of the multi-phase process fluid determined using the differential pressure flowmeter; and
 - determine one or more phase-specific properties of the multi-phase process fluid based on the measure of wetness and the second apparent property.
- 15
27. The system of claim 26, wherein:
- to determine one or more apparent intermediate values associated with the multi-phase process fluid based on the first apparent property, the one or more processing devices are configured to determine a first Froude number corresponding to a non-gas phase of the multi-phase process fluid and a second Froude number corresponding to a gas phase of the multi-phase
20 process fluid; and
 - to determine the measure of wetness of the multi-phase process fluid based on a mapping between one or more of the apparent intermediate values and the measure of wetness, the one or more processing devices are configured to determine the measure of wetness of the
25 multi-phase process fluid based on a mapping between the first and second Froude numbers and the measure of wetness.
28. The system of claim 26, wherein the one or more processing devices are further configured to:
- 30 determine one or more corrected intermediate values based on a mapping between one or more of the apparent intermediate values and the corrected intermediate values

determine one or more phase-specific properties of the multi-phase fluid based on the corrected intermediate values; and

compare the phase-specific properties of the phase of the multi-phase fluid determined based on the corrected intermediate value to the phase-specific properties of the multi-phase process fluid determined based on the measure of wetness and the second apparent property.

29. The system of claim 26, wherein the first apparent property comprises an apparent mass flow rate, and the second apparent property comprises a mass flow rate of the multi-phase process fluid as a dry gas.

30. The system of claim 26, wherein to determine one or more phase-specific properties of the multi-phase process fluid based on the measure of wetness and the second apparent property, the one or more processing devices are configured to determine a mass flow rate of a gas phase of the multi-phase process fluid.

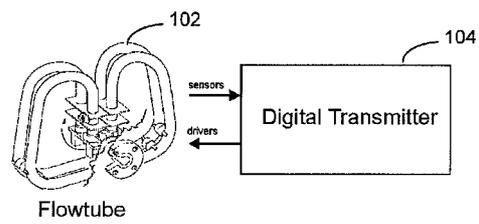


FIG. 1A

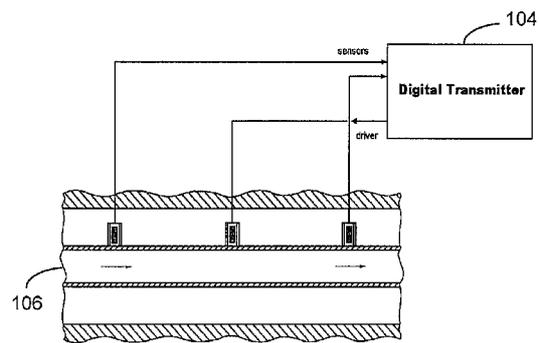


FIG. 1B

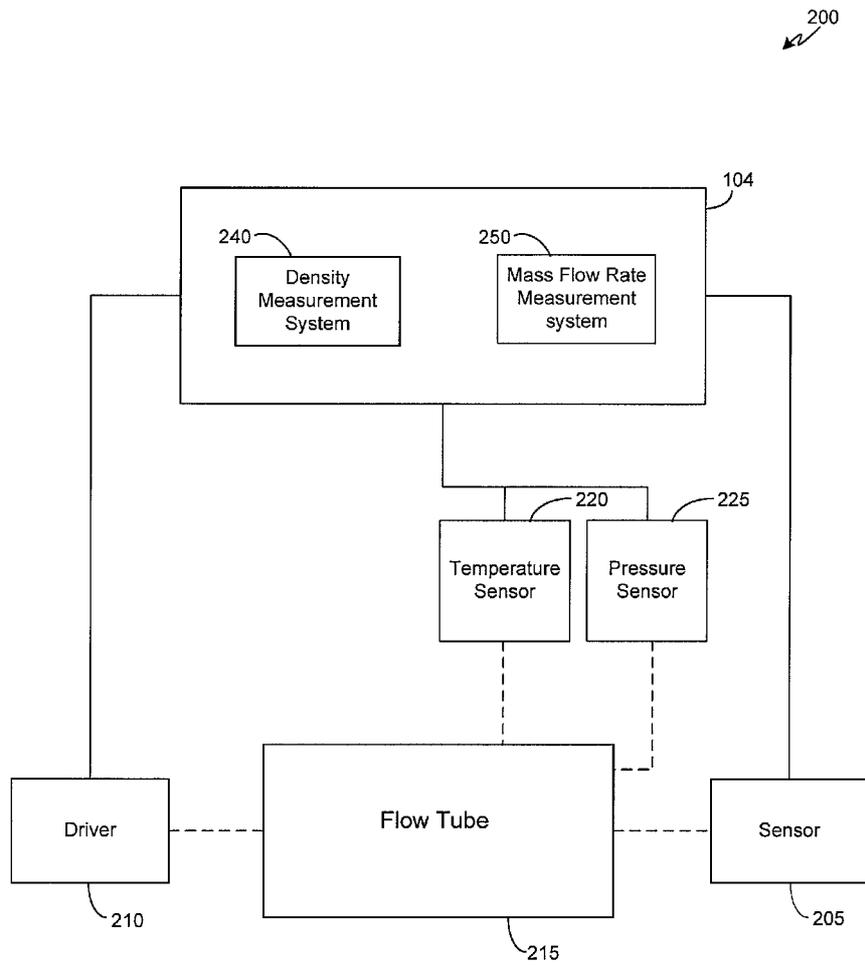
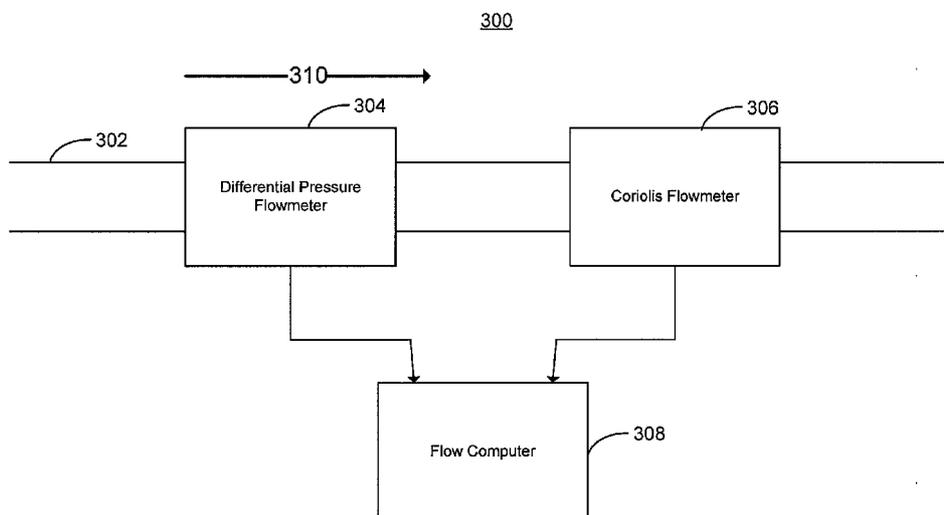


FIG. 2

FIG. 3



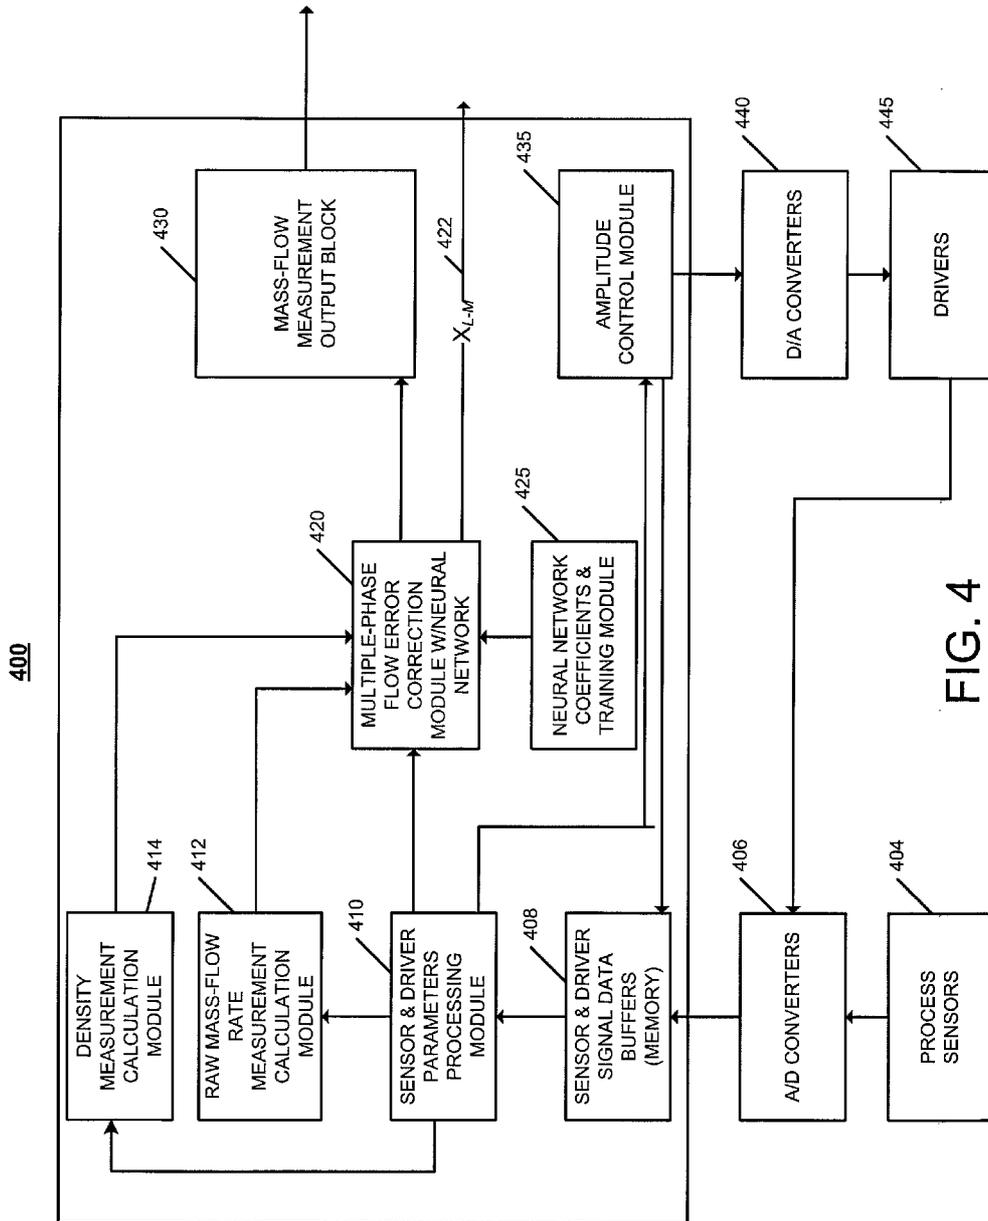


FIG. 4

5/ 8

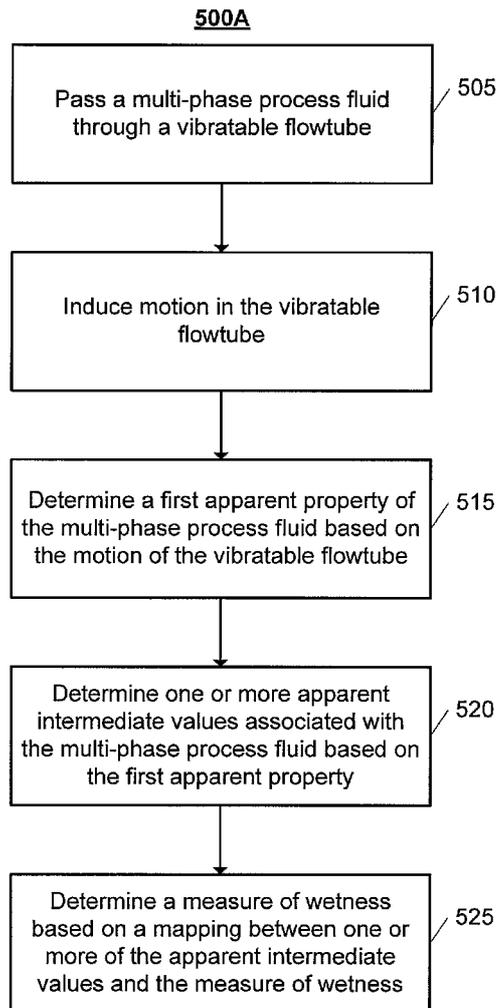


FIG. 5A

500B

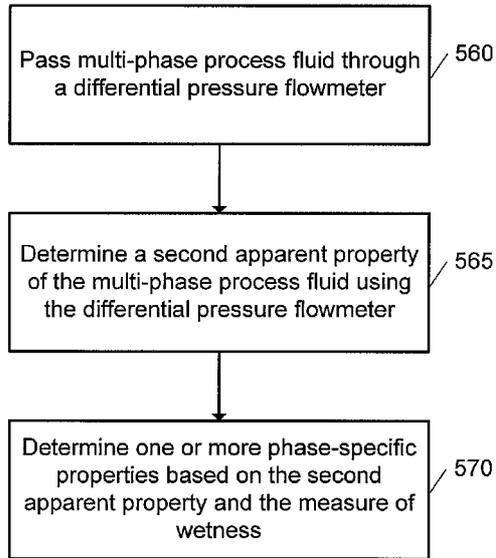


FIG. 5B

7/8

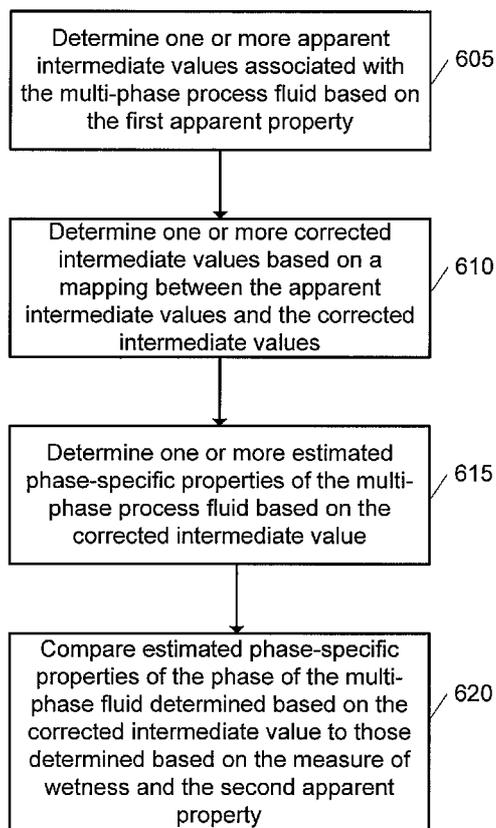
600

FIG. 6

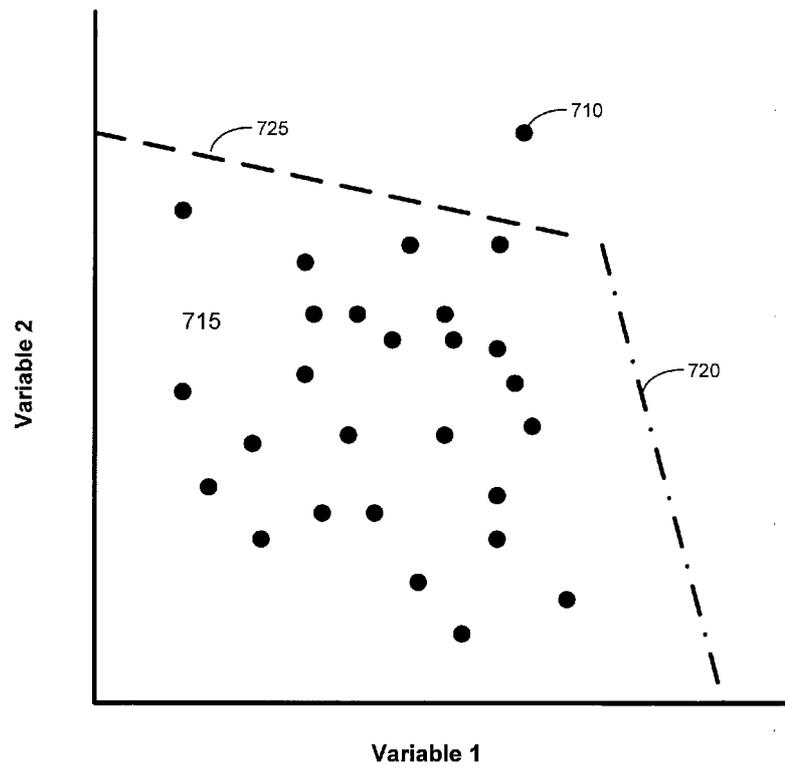


FIG. 7

INTERNATIONALSEARCH REPORT

International application No

PCT/US 08/60863

A CLASSIFICATION OF SUBJECT MATTER IPC(8) - G01N 33/18 (2008.04) USPC - 73/61.45 According to International Patent Classification (IPC) or to both national classification and IPC		
B FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) USPC 73/61 45		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched USPC 73/53 01,61 41,61 43,61 44,61 45,61 47		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PubWEST(USPT,PGPB,EPAB,JPAB), DialogPRO(Engineering), Google Scholar Search Terms Used multiple, phase, fluid, vibrate, tube, differential, pressure, flowmeter, wetness, Froude, mass, driver, sensor, dry, gas, Lockhart-Martinelli, mapping, neural, network		
C DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
Y	US 2007/0006744 A1 (Gysling) 11 January 2007 (11 01 2007), abstract, para [0005], para [0020], para [0027], para [0029], para [0037], para [0060], para [0062]	1-30
Y	US 5,230 254 A (Craft) 27 July 1993 (27 07 1993), abstract, col 1, ln 21-23, col 2, ln 1-4, ln 12-20, col 4, ln 11-13	1-30
Y	US 2005/0193832 A1 (Tombs et al) 08 September 2005 (08 09 2005), para [0276]	10
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input type="checkbox"/>		
* Special categories of cited documents		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search	Date of mailing of the international search report	
24 July 2008 (24 07 2008)	3 0 JUL 2008	
Name and mailing address of the ISA/US	Authorized officer	
Mail Stop PCT, Attn ISA/US, Commissioner for Patents P O Box 1450, Alexandria, Virginia 22313-1450 Facsimile No 571-273-3201	Lee W Young	
	PCT Helpdoste 571-272-4300 PCTOSP 571-272-7774	