



(22) Date de dépôt/Filing Date: 2002/10/23

(41) Mise à la disp. pub./Open to Public Insp.: 2003/04/25

(45) Date de délivrance/Issue Date: 2007/06/26

(30) Priorité/Priority: 2001/10/25 (US10/003,452)


(51) Cl.Int./Int.Cl. *B65H 31/06* (2006.01),
B07C 1/00 (2006.01), *B65B 35/50* (2006.01)

(72) Inventeur/Inventor:
YAP, ANTHONY E., US

(73) Propriétaire/Owner:
PITNEY BOWES INC., US

(74) Agent: MACRAE & CO.

(54) Titre : SYSTÈME DE REGLAGE DE LA FORCE PORTANTE DES PALETTES D'EMPILEUSE D'OBJETS POSTAUX
(54) Title: ADJUSTABLE URGING FORCE SYSTEM FOR STACKER PADDLE

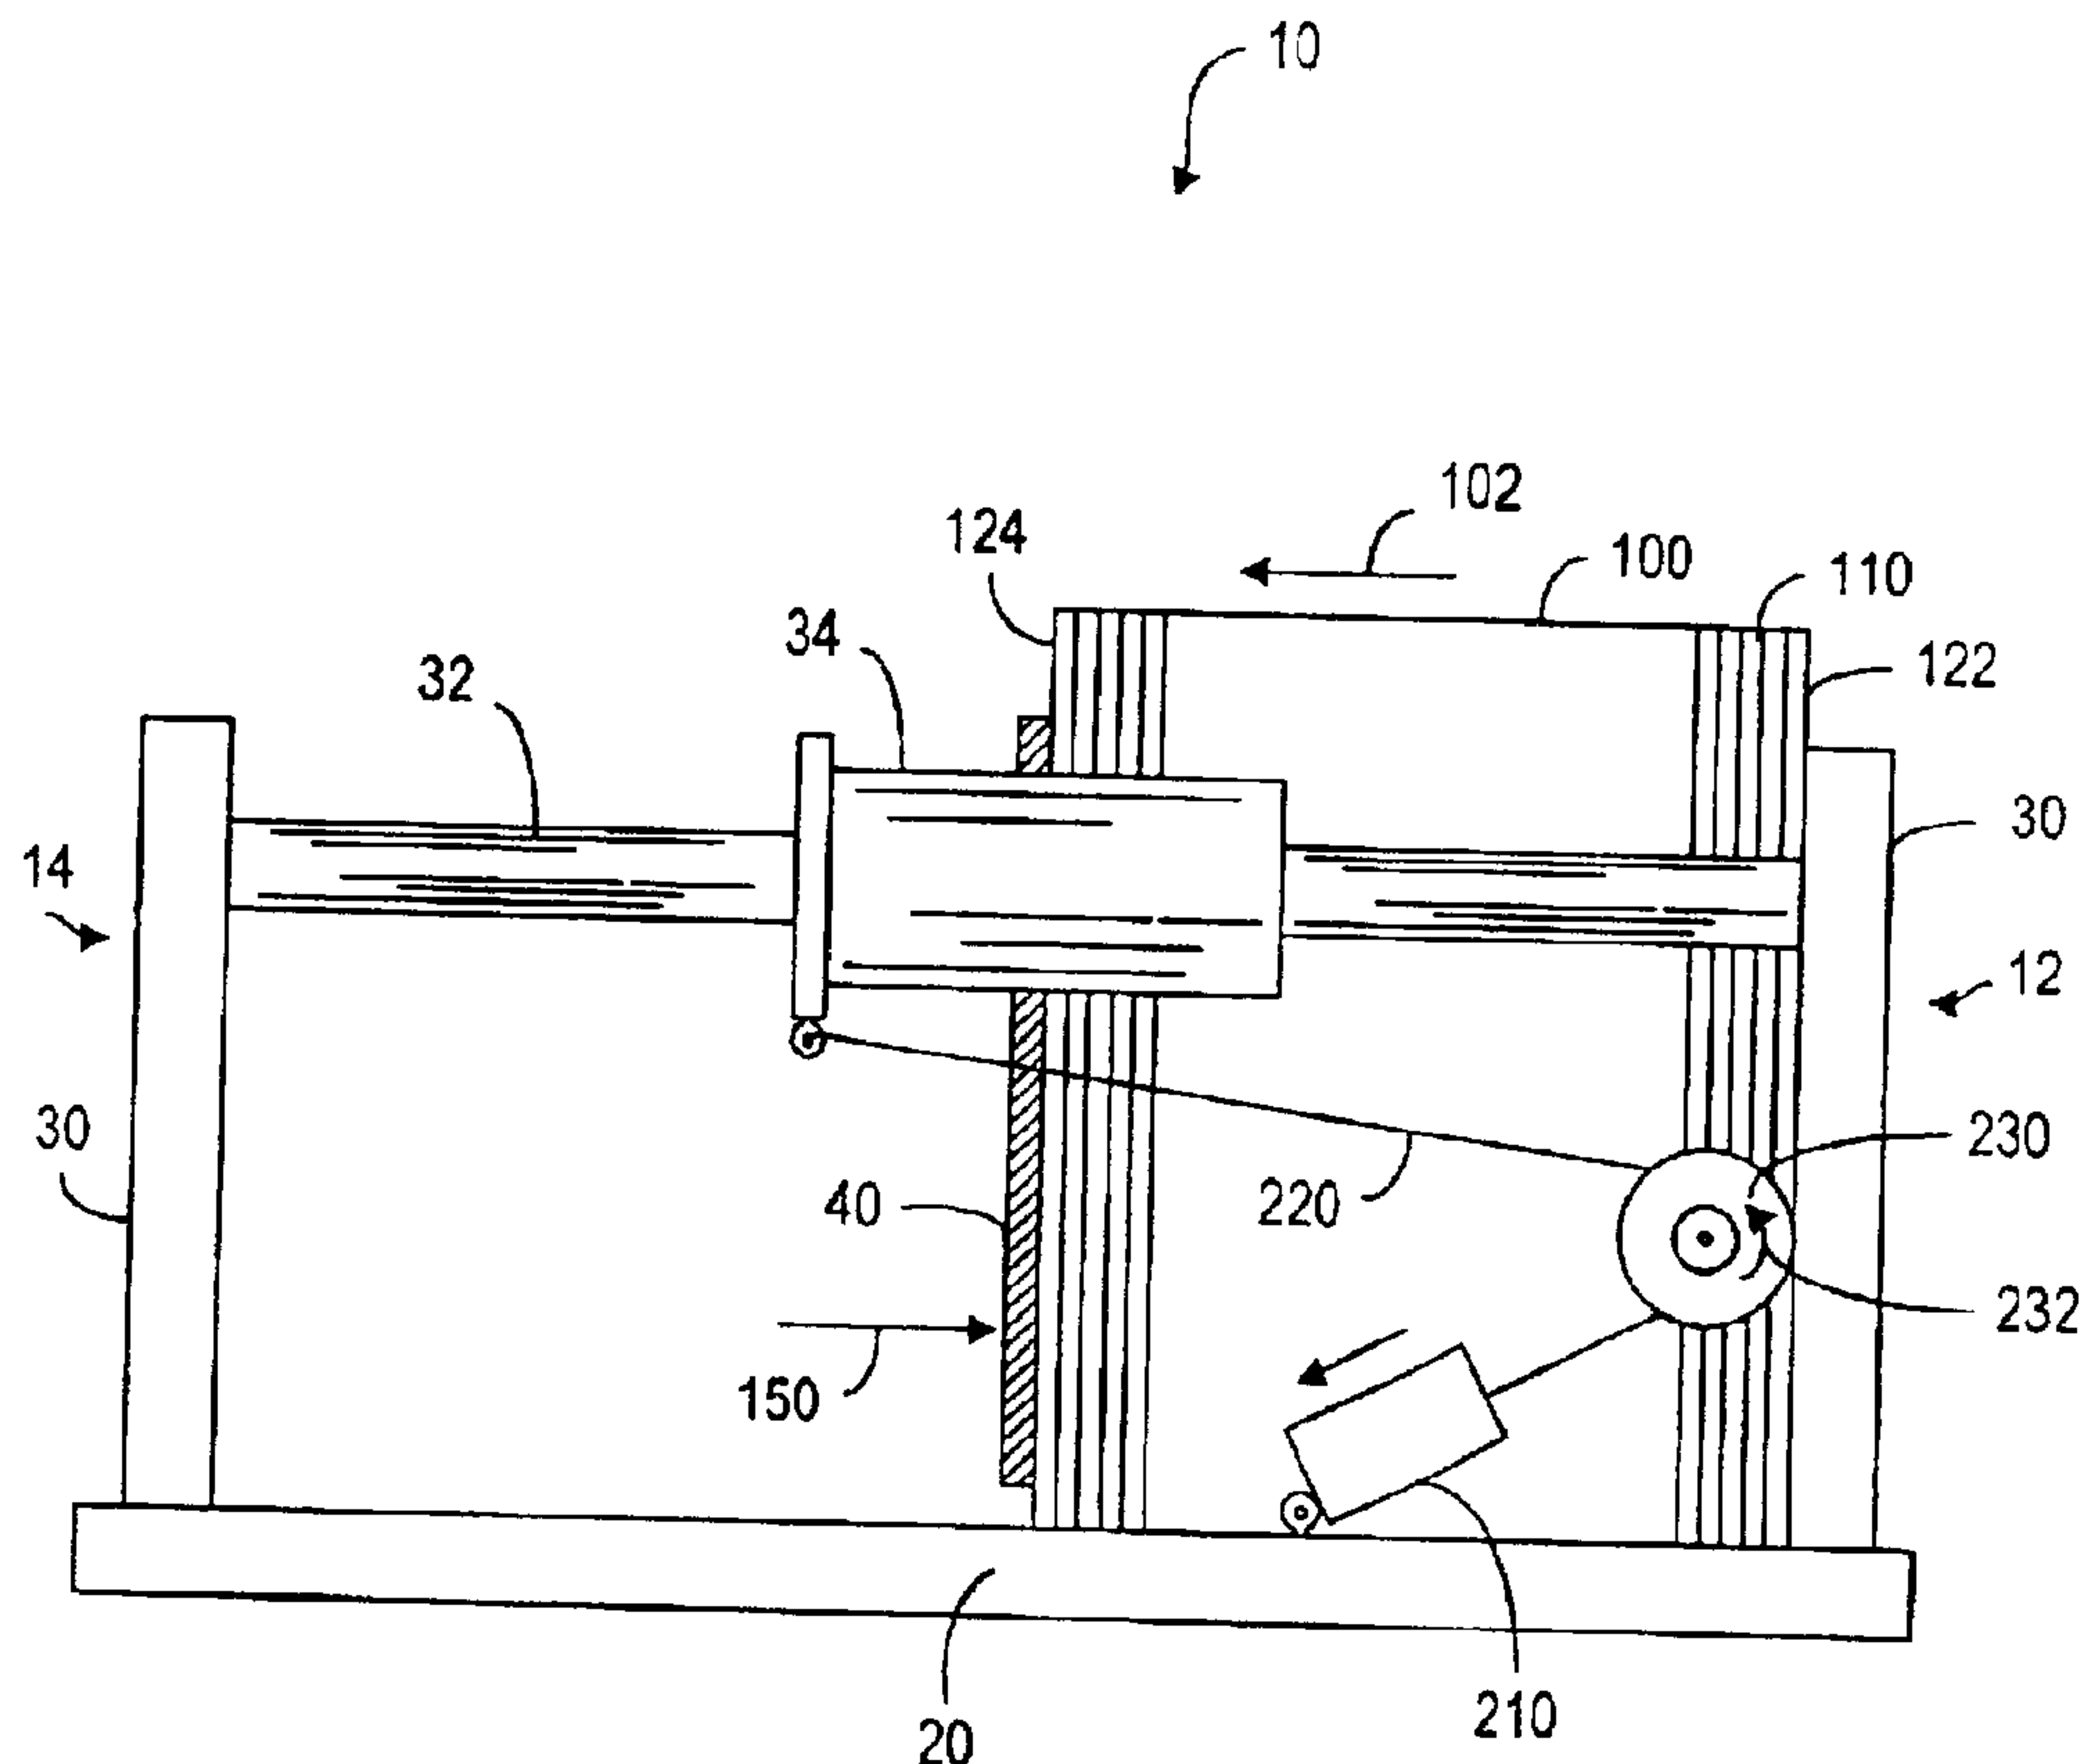

(57) Abrégé/Abstract:

A paddle urging system for use in a stacking bin having a constant force spring to provide an urging force to a paddle for supporting a stack of mailpieces. As mailpieces are accumulated into the stack, they push the stack against the paddle. A brake/clutch system is used to provide an additional drag to the paddle to resist against this movement of the paddle. The brake/clutch system is adjustable so that heavy mailpieces are supported more effectively, whereas lightweight mailpieces encounter less resistant force when they are accumulated into the stack.

ADJUSTABLE URGING FORCE SYSTEM FOR STACKER PADDLE**ABSTRACT OF THE DISCLOSURE**

A paddle urging system for use in a stacking bin having a constant force spring to provide an urging force to a paddle for supporting a stack of mailpieces. As
5 mailpieces are accumulated into the stack, they push the stack against the paddle. A brake/clutch system is used to provide an additional drag to the paddle to resist against this movement of the paddle. The brake/clutch system is adjustable so that heavy mailpieces are supported more effectively, whereas lightweight mailpieces encounter less resistant force when they are accumulated into the stack.

F-338

ADJUSTABLE URGING FORCE SYSTEM FOR STACKER PADDLE

FIELD OF THE INVENTION

The present invention relates generally to a mail or document stacking machine and, more particularly, to a stack support for providing a resisting force to the stack as the mailpiece or document is accumulated into the stack.

BACKGROUND OF THE INVENTION

In a typical mail-handling machine, mailpieces are sorted and pushed into a plurality of stacking bins where the mailpieces are accumulated in substantially vertical stacks. In each stacking bin, a paddle, or an abutment member, is used to support the stack while allowing the stack thickness to increase. In order to providing sufficient support to the growing stack, a resisting force is usually provided to the paddle against the stack. As disclosed in U.S. Patent No. 5,429,249 (*Belec et al.*), the paddle 40 is slidably mounted on a shaft or bar 32 by means of a cylindrical shaped member 34. The cylindrical shaped member 34 is spring-loaded to provide a resisting force 150 to the paddle 40 as the stack 100 is pushed in a direction 102 when the mailpiece 110 is accumulated into the stack 100 by an input mechanism 90, as shown in Figure 1. As disclosed in U.S. Patent No. 4,524,965 (*Kulpa*), one end of a cord 54 is tied to the cylindrical shaped member 34 and the other end of the cord 54 is wrapped around a rotary displacement device 60. As the cylindrical member 34, along with the paddle 40 and the stack 100, is pushed along the direction 102, it causes the rotary displacement device 60 to rotate along a rotation direction 106, as shown in Figure 2. A pulley 70 is fixedly mounted on the rotary displacement device 60 for motion. One end of another cord 52 is wrapped around the pulley 70 and the other end of the cord 52 is tied to a spring 50. When the rotary displacement device 60 is rotated along the rotation direction 106, it causes the spring 50 is stretched along the direction 104. As the spring 50 is stretched, it increases the tension 202 in the cord 52, thereby increasing the resistance force 150 provided to the paddle 40.

While the resisting force providing systems, as disclosed in *Belec et al.* and in *Kulpa*, are useful in supporting a stack of mailpieces as the thickness of the stack increases, the resisting force cannot be adjusted according to the load of the mailpieces. On the one hand, if the resistance force is too high, then lightweight mailpieces may be damaged when they are accumulated into the stack. On the

other hand, if the resistance force is too low, the stack may overpower the paddle and cause the entire stack to topple over.

It is advantageous and desirable to provide a stack urging force system wherein the resistance force provided to the paddle is adjustable according to the
5 load of the mailpieces.

SUMMARY OF THE INVENTION

According to first aspect of the present invention, a paddle urging system for use in a stacking bin having a first end and an opposing second end, wherein a paddle is provided in the stacking bin to support a stack of mailpieces in the stacking
10 bin and wherein the mailpieces are accumulated into the stack at the first end of the stacking bin, thereby increasing the thickness of the stack and pushing the stack against the paddle in a first direction toward the second end of the stacking bin, said paddle system comprising:

an urging mechanism, operatively connected to the paddle, for providing an
15 urging force to urge the paddle to move in a second direction opposite from the first direction while supporting the stack; and

an adjustable resisting force mechanism, operatively connected to the urging mechanism, for providing a resisting force to the paddle against the pushing of the stack toward the second end when the mailpieces are accumulated into the stack, in
20 addition to the urging force provided by the urging mechanism.

According to the present invention, wherein the urging mechanism comprises a spring, connected to the paddle by a flexible member, for providing the urging force to the paddle.

According to the present invention, the adjustable resisting force mechanism
25 comprises a clutch system for providing the resisting force, and the flexible member is mechanically engaged with the clutch system for conveying the resisting force provided by the clutch to the paddle.

According to the present invention, the clutch system comprises a pulley engaged with a one-way clutch such that the pulley is allowed to turn in a first
30 rotation direction with respect to a rotation axis and the pulley is prevented from turning in a second rotation direction opposite from the first rotation direction, and wherein the one-way clutch is further engaged with a rotating member with an adjustable friction force and the rotating member is disposed axially with the rotation

axis, such that when the pulley is caused to turn in the second rotation direction by the pushing of the stack toward the second end of the stacking bin, the one-way clutch causes the rotating member to rotate against the friction force for providing the resisting force to the flexible member, and when the pulley is caused to turn in
5 the first rotation direction, the one-way clutch and the rotating member are effectively disengaged from the pulley.

According to the second aspect of the present invention, a stacking bin for use in a mail processing machine for accumulating mailpieces into a stack from a first end of the stack, wherein the stack is pushed toward a first direction when the
10 mailpieces are accumulated into the stack, thereby increase the thickness of the stack and pushing the stack along a first direction, said stacking bin comprising:

a paddle, provided at the second end of the stack opposite from the first end, for supporting the stack;

an urging mechanism, operatively connected to the paddle, for providing an
15 urging force to urge the paddle to move against the stack toward a second direction opposite from the first direction; and

an adjustable resisting force mechanism, operatively connected to the urging mechanism, for providing a resisting force to the paddle against the pushing of the stack when the mailpieces are accumulated into the stack, in
20 addition to the urging force provided by the urging mechanism.

In accordance with one aspect of the present invention, there is provided a paddle urging system for use in a stacking bin having a first end and an opposing second end, wherein a paddle is provided in the stacking bin to support a stack of mailpieces in the stacking bin and wherein the mailpieces are
25 accumulated into the stack at the first end of the stacking bin, thereby increasing the thickness of the stack and pushing the stack against the paddle in a first direction toward the second end of the stacking bin, said paddle system comprising: an urging mechanism, operatively connected to the paddle, for

providing an urging force to urge the paddle to move in a second direction opposite from the first direction while supporting the stack; and an adjustable resisting force mechanism, operatively connected to the urging mechanism, for providing a resisting force to the paddle against the pushing of the stack toward the second end when the mailpieces are accumulated into the stack, in addition to the urging force provided by the urging mechanism wherein the adjustable resisting force mechanism comprises a clutch system for providing the resisting force, and a flexible member is mechanically engaged with the clutch system for conveying the resisting force provided by the clutch to the paddle; and wherein the clutch system comprises a pulley engaged with a one-way clutch such that the pulley is allowed to turn in a first rotation direction with respect to a rotation axis and the pulley is prevented from turning in a second rotation direction opposite from the first rotation direction, and wherein the one-way clutch is further engaged with a rotating member with adjustable friction force, the rotating member disposed axially with the rotation axis, such that when the pulley is caused to turn in the second rotation direction by the pushing of the stack toward the second end of the stacking bin, the one-way clutch causes the rotating member to rotate against the friction force for providing the resisting force to the flexible member, and when the pulley is caused to turn in the first rotation direction, the one-way clutch and the rotating member are effectively disengaged from the pulley.

In accordance with another aspect of the present invention, there is provided a stacking bin for use in a mail processing machine for accumulating mailpieces into a stack from a first end of the stack, wherein the stack is pushed toward a first direction when the mailpieces are accumulated into the stack, thereby increase the thickness of the stack and pushing the stack along a first direction, said stacking bin comprising: a paddle, provided at the second end of the stack opposite from the first end, for supporting the stack, an urging mechanism, operatively connected to the paddle, for providing an urging force to

urge the paddle to move against the stack toward a second direction opposite from the first direction; and an adjustable resisting force mechanism, operatively connected to the urging mechanism, for providing a resisting force to the paddle against the pushing of the stack when the mailpieces are accumulated into the stack, in addition to the urging force provided by the urging mechanism wherein the adjustable resisting force mechanism comprises a clutch system for providing the resisting force, and a flexible member is mechanically engaged with the clutch system for conveying the resisting force provided by the clutch to the paddle; and wherein the clutch system comprises a pulley engaged with a one-way clutch such that the pulley is allowed to turn in a first rotation direction and the pulley is prevented from turning in a second rotation direction opposite from the first rotation direction, and wherein the one-way clutch is further engaged with a rotating member with an adjustable friction force, the rotating member disposed axially with the rotation axis, such that when the pulley is caused to turn in the second rotation direction by the pushing of the stack along the first direction, the one-way clutch causes the rotating member to rotate against the friction force for providing the resisting force to the flexible member, and when the pulley is caused to turn in the first rotation direction, the one-way clutch and the rotating member are effectively disengaged from the pulley.

The present invention will become apparent upon reading the description taken in conjunction with Figures 1 to 4.

Brief Description of the Drawings

Figure 1 is a diagrammatic representation showing the top view of a prior art stacking bin.

Figure 2 is a diagrammatic representation showing the top view of another prior art stacking bin.

Figure 3 is a diagrammatic representation showing a side view of the stacking bin, according to the present invention.

Figure 4 is an exploded view of the adjustable resisting force mechanism, according to the present invention.

Detailed Description of the Invention

As shown in Figure 3, a stacking bin **10**, according to the present invention, has a platform **20** to support a stack **100** of mailpieces **110**. The stacking bin **10** has a first end **12** and an opposing second end **14**, and the stack **100** has a first end **122** and an opposing second end **124**. A paddle **40** is provided at the second end **124** of the stack **100** for supporting the stack **100**. As the mailpieces **110** are accumulated into the stack **100** at the first end **12** of the stacking bin, the thickness of the stack **100** increases and the stack **100** is pushed toward the second end **14** along a direction **102**. As shown, a shaft **32** is mounted on the platform **20** by means of shaft mounts **30**. A sleeve or cylindrical shaped member **34** is slidably mounted on the shaft **32** and a paddle **40** is mechanically connected to the cylindrical shaped member **34** so that the paddle **40** is moved when the cylindrical shaped member **34** is moved along the shaft **32**. A spring **210**, preferably a constant force spring, mounted on the platform **20**, is used to provide an urging force **150** to the paddle **40** via a cord **220** (or a steel cable) and the like. An adjustable resisting force mechanism **230** is operatively connected to the spring **210** to provide an additional force to the paddle when the paddle is pushed toward the second end **14** of the stacking bin **10** as the mailpieces **110** are accumulated into the stack **100**. As shown in Figure 3, the adjustable resisting force mechanism **230** has a one-way clutch, which produces a friction force only when the resisting force mechanism **230** is caused to rotate along a rotation direction **232**. There is no significant friction force when the resisting force mechanism **230** is caused to rotate in a direction opposite from the direction **232**. Thus, when there is no accumulation, the resistance force **150** provided to the paddle **40** is substantially equal to the tension force of the spring **210**, reduced by the friction force between the cylindrical shaped member **34** and the shaft **32**, and some small friction force in the resisting force mechanism **230**. Moreover, when the stack **100** is taken out to empty the stacking bin **10**, the paddle **40** is automatically retracted to the first end **12**.

Figure 4 shows the preferred embodiment of the resisting force mechanism **230**. As shown in Figure 4, the resisting force mechanism **230** comprises a brake shaft **231** for axially mounting a brake disk **236**, a brake hub **238**, a pulley/clutch assembly **240**, a thrust washer **252**, a washer **254**, a spring **256**, washers **258** and **260**, an adjustment knob **262** and a retaining ring **264**. The pulley/clutch assembly **240** consists of a pulley **242** and a one-way clutch **250**. The pulley **242** has an outer

periphery **243**, around which the cord **220** is wrapped about 1.5 turns for engaging
 the resisting force mechanism **230** with the paddle **40**. This wrap prevents the cord
 from slipping. The brake shaft **232** has a threaded front section **233** to allow the
 adjustment knob **262** to screw thereon. The lock washer **264** is pushed onto the tip
 5 **234** of the threaded section **233** to prevent the adjustment knob **262** from being
 mechanically disengaged from the brake shaft **232**. A one-way bearing **250** is
 mounted on the inner periphery **244** of the pulley **242** for engaging with the brake
 hub **238**. The one-way clutch **250** allows the brake hub **238** to rotate against the
 pulley **240** in a direction, with respect to a rotation axis defined by the longitudinal
 10 axis of the brake shaft **232**, but prevents the brake hub **238** from doing so in the
 opposite direction. When these components are assembled, the thrust washer **252**
 is in direct contact with the front end **239** of the brake hub **238**, the brake disk **236** is
 in direct contact with the rear end **237** of the brake hub **238**, and the adjustment
 knob **262** compresses the spring **256**. As such, the spring **256** creates a clamping
 15 force between the thrust washer **252**, the brake hub **238** and the brake disk **236**.
 The clamping force is adjustable by adjusting the adjustment knob **262** against the
 spring **256**. As mailpieces **110** are accumulated into the stack **100**, the movement of
 the paddle **40** causes the pulley **242** to rotate. The rotation of the pulley **242** causes
 the one-way clutch **250** to engage the brake hub **238**, causing it to turn along with
 20 the pulley **242**. As the brake hub **238** turns, its motion is resisted by the clamping
 force, resulting in an addition drag on the entire paddle urging system. The
 additional drag increases the force required to move the paddle **40** towards the
 second end **14**. The end effect is that heavy mailpieces are supported more
 effectively. Upon retraction, the one-way clutch **250** overruns, allowing the paddle
 25 **40** to return to its home position near the first end **12** without having to overcome the
 drag provided by the resisting force mechanism **230**.

With the adjustment knob **262** turned all the way out, the spring **256** is not
 compressed and the clamping force between the thrust washer **252**, the brake hub
238 and the brake disk **236** does not produce any significant additional drag. At
 30 such, the force seen at the paddle **40** is mainly the tension force provided by the
 constant force spring **210**. This setting can be used for mailpieces that are on the
 lower end of the weight spectrum.

The advantage of the paddle urging system, which comprises the constant force spring **210** and the resisting force mechanism **230**, is that it allows the operator to easily adjust the resistance force **150** to an optimal level according to a particular type of mailpiece weight. Once the adjustment knob **262** is turned to a particular setting, the force provided to the paddle **40** remains relatively constant over the full travel of the paddle between the first end **12** and the second end **14** of the stacking bin **10**. In contrast, a simple torsion or extension spring normally exhibits a relatively high spring rate, which would cause the paddle force to increase as the stack fills.

The present invention allows a mail sorter operator to adjust the paddle's normal force according to the weight of the mailpieces being handled. The present invention uses a constant force spring **210** as an urging mechanism for providing an initial paddle force and to provide the force required to retract the paddle after the stack has been emptied. In addition, a brake/clutch assembly and a compression spring are used as an adjustable resisting force mechanism for providing a drag when the mailpieces are accumulated into a mail stack. As disclosed, the cord **220** is wrapped around the pulley **242** to engage the adjustable resisting force mechanism **230** with the constant force spring **210**. However, it is possible that the adjustable resisting force mechanism **230** is operatively connected to the paddle **40**, separately from the constant force spring **210**.

Thus, although the invention has been described with respect to a preferred embodiment thereof, it will be understood by those skilled in the art that the foregoing and various other changes, omissions and deviations in the form and detail thereof may be made without departing from the spirit and scope of this invention.

What is claimed is:

1. A paddle urging system for use in a stacking bin having a first end and an opposing second end, wherein a paddle is provided in the stacking bin to support a stack of mailpieces in the stacking bin and wherein the mailpieces are
5 accumulated into the stack at the first end of the stacking bin, thereby increasing the thickness of the stack and pushing the stack against the paddle in a first direction toward the second end of the stacking bin, said paddle system comprising:

10 an urging mechanism, operatively connected to the paddle, for providing an urging force to urge the paddle to move in a second direction opposite from the first direction while supporting the stack;

15 an adjustable resisting force mechanism, operatively connected to the urging mechanism, for providing a resisting force to the paddle against the pushing of the stack toward the second end when the mailpieces are accumulated into the stack, in addition to the urging force provided by the urging mechanism;

wherein the adjustable resisting force mechanism comprises a clutch system for providing the resisting force, and a flexible member is mechanically engaged with the clutch system for conveying the resisting force provided by the clutch to the paddle; and

20 wherein the clutch system comprises a pulley engaged with a one-way clutch such that the pulley is allowed to turn in a first rotation direction with respect to a rotation axis and the pulley is prevented from turning in a second rotation direction opposite from the first rotation direction, and wherein the one-way clutch is further engaged with a rotating member with adjustable friction force, the
25 rotating member disposed axially with the rotation axis, such that when the pulley is caused to turn in the second rotation direction by the pushing of the stack toward the second end of the stacking bin, the one-way clutch causes the rotating member to rotate against the friction force for providing the resisting force to the

flexible member, and when the pulley is caused to turn in the first rotation direction, the one-way clutch and the rotating member are effectively disengaged from the pulley.

2. The paddle urging system of claim 1, wherein the urging mechanism
5 comprises a spring, connected to the paddle by a flexible member, for providing the urging force to the paddle.

3. The paddle urging system of claim 2, wherein the spring is a constant-force spring.

4. The paddle urging system of claim 1, wherein the stacking bin has a shaft
10 running between the first end and the second end of the stacking bin for slidably mounting a cylindrical-shaped member, and the flexible member is attached to the cylindrical-shaped member for providing a mechanical linkage between the urging mechanism and the cylindrical-shaped member, and wherein the paddle is
15 mechanically engaged with the cylindrical-shaped member for moving along therewith.

5. The paddle urging system of claim 1, wherein the clutch system further comprises:

a shaft, the longitudinal axis of which defines the rotation axis;
a brake disk axially mounted on the shaft;
20 a thrust washer axially mounted on the shaft;
a spring axially mounted on the shaft; and
at least one further washer axially mounted on the shaft, and an adjustment knob axially mounted on the shaft, and wherein the rotating member comprises a cylindrical-shaped hub axially mounted on the shaft between the brake disk and
25 the thrust washer, and the spring is disposed between the thrust washer and said

at least one further washer to allow the adjustment knob to compress the spring via said at least one further washer, thereby creating a clamping force between the thrust washer, the cylindrical-shaped hub and the brake disk for providing the friction force.

5 6. The paddle urging system of claim 5, wherein the adjustment knob is threadably engaged with the shaft for adjusting the clamping force.

7. The paddle urging system of claim 5, wherein the pulley has an outer periphery and an inner periphery and the cylindrical-shaped hub has a further outer periphery, and wherein the one-way clutch is axially disposed on the inner
10 periphery of the pulley and securely engaged with the further outer periphery of the cylindrical-shaped hub.

8. The paddle urging system of claim 6, wherein the flexible member is a cord for wrapping around the outer periphery of the pulley for mechanically engaging with the pulley.

15 9. A stacking bin for use in a mail processing machine for accumulating mailpieces into a stack from a first end of the stack, wherein the stack is pushed toward a first direction when the mailpieces are accumulated into the stack, thereby increase the thickness of the stack and pushing the stack along a first direction, said stacking bin comprising:

20 a paddle, provided at the second end of the stack opposite from the first end, for supporting the stack;

 an urging mechanism, operatively connected to the paddle, for providing an urging force to urge the paddle to move against the stack toward a second direction opposite from the first direction;

25 an adjustable resisting force mechanism, operatively connected to the

urging mechanism, for providing a resisting force to the paddle against the pushing of the stack when the mailpieces are accumulated into the stack, in addition to the urging force provided by the urging mechanism;

5 wherein the adjustable resisting force mechanism comprises a clutch system for providing the resisting force, and a flexible member is mechanically engaged with the clutch system for conveying the resisting force provided by the clutch to the paddle; and

10 wherein the clutch system comprises a pulley engaged with a one-way clutch such that the pulley is allowed to turn in a first rotation direction and the pulley is prevented from turning in a second rotation direction opposite from the first rotation direction, and wherein the one-way clutch is further engaged with a rotating member with an adjustable friction force, the rotating member disposed axially with the rotation axis, such that when the pulley is caused to turn in the second rotation direction by the pushing of the stack along the first direction, the one-way clutch causes the rotating member to rotate against the friction force for providing the resisting force to the flexible member, and when the pulley is caused to turn in the first rotation direction, the one-way clutch and the rotating member are effectively disengaged from the pulley.

10. The stacking bin of claim 9, wherein the urging mechanism comprises a constant force spring, connected to the paddle by a flexible member, for providing the urging force to the paddle.

11. The stacking bin of claim 9, wherein the pulley has an outer periphery and an inner periphery and the rotating member comprises a cylindrical member with an outer periphery, and wherein the one-way clutch is axially disposed on the inner periphery of the pulley and securely engaged with the outer periphery.

1/4

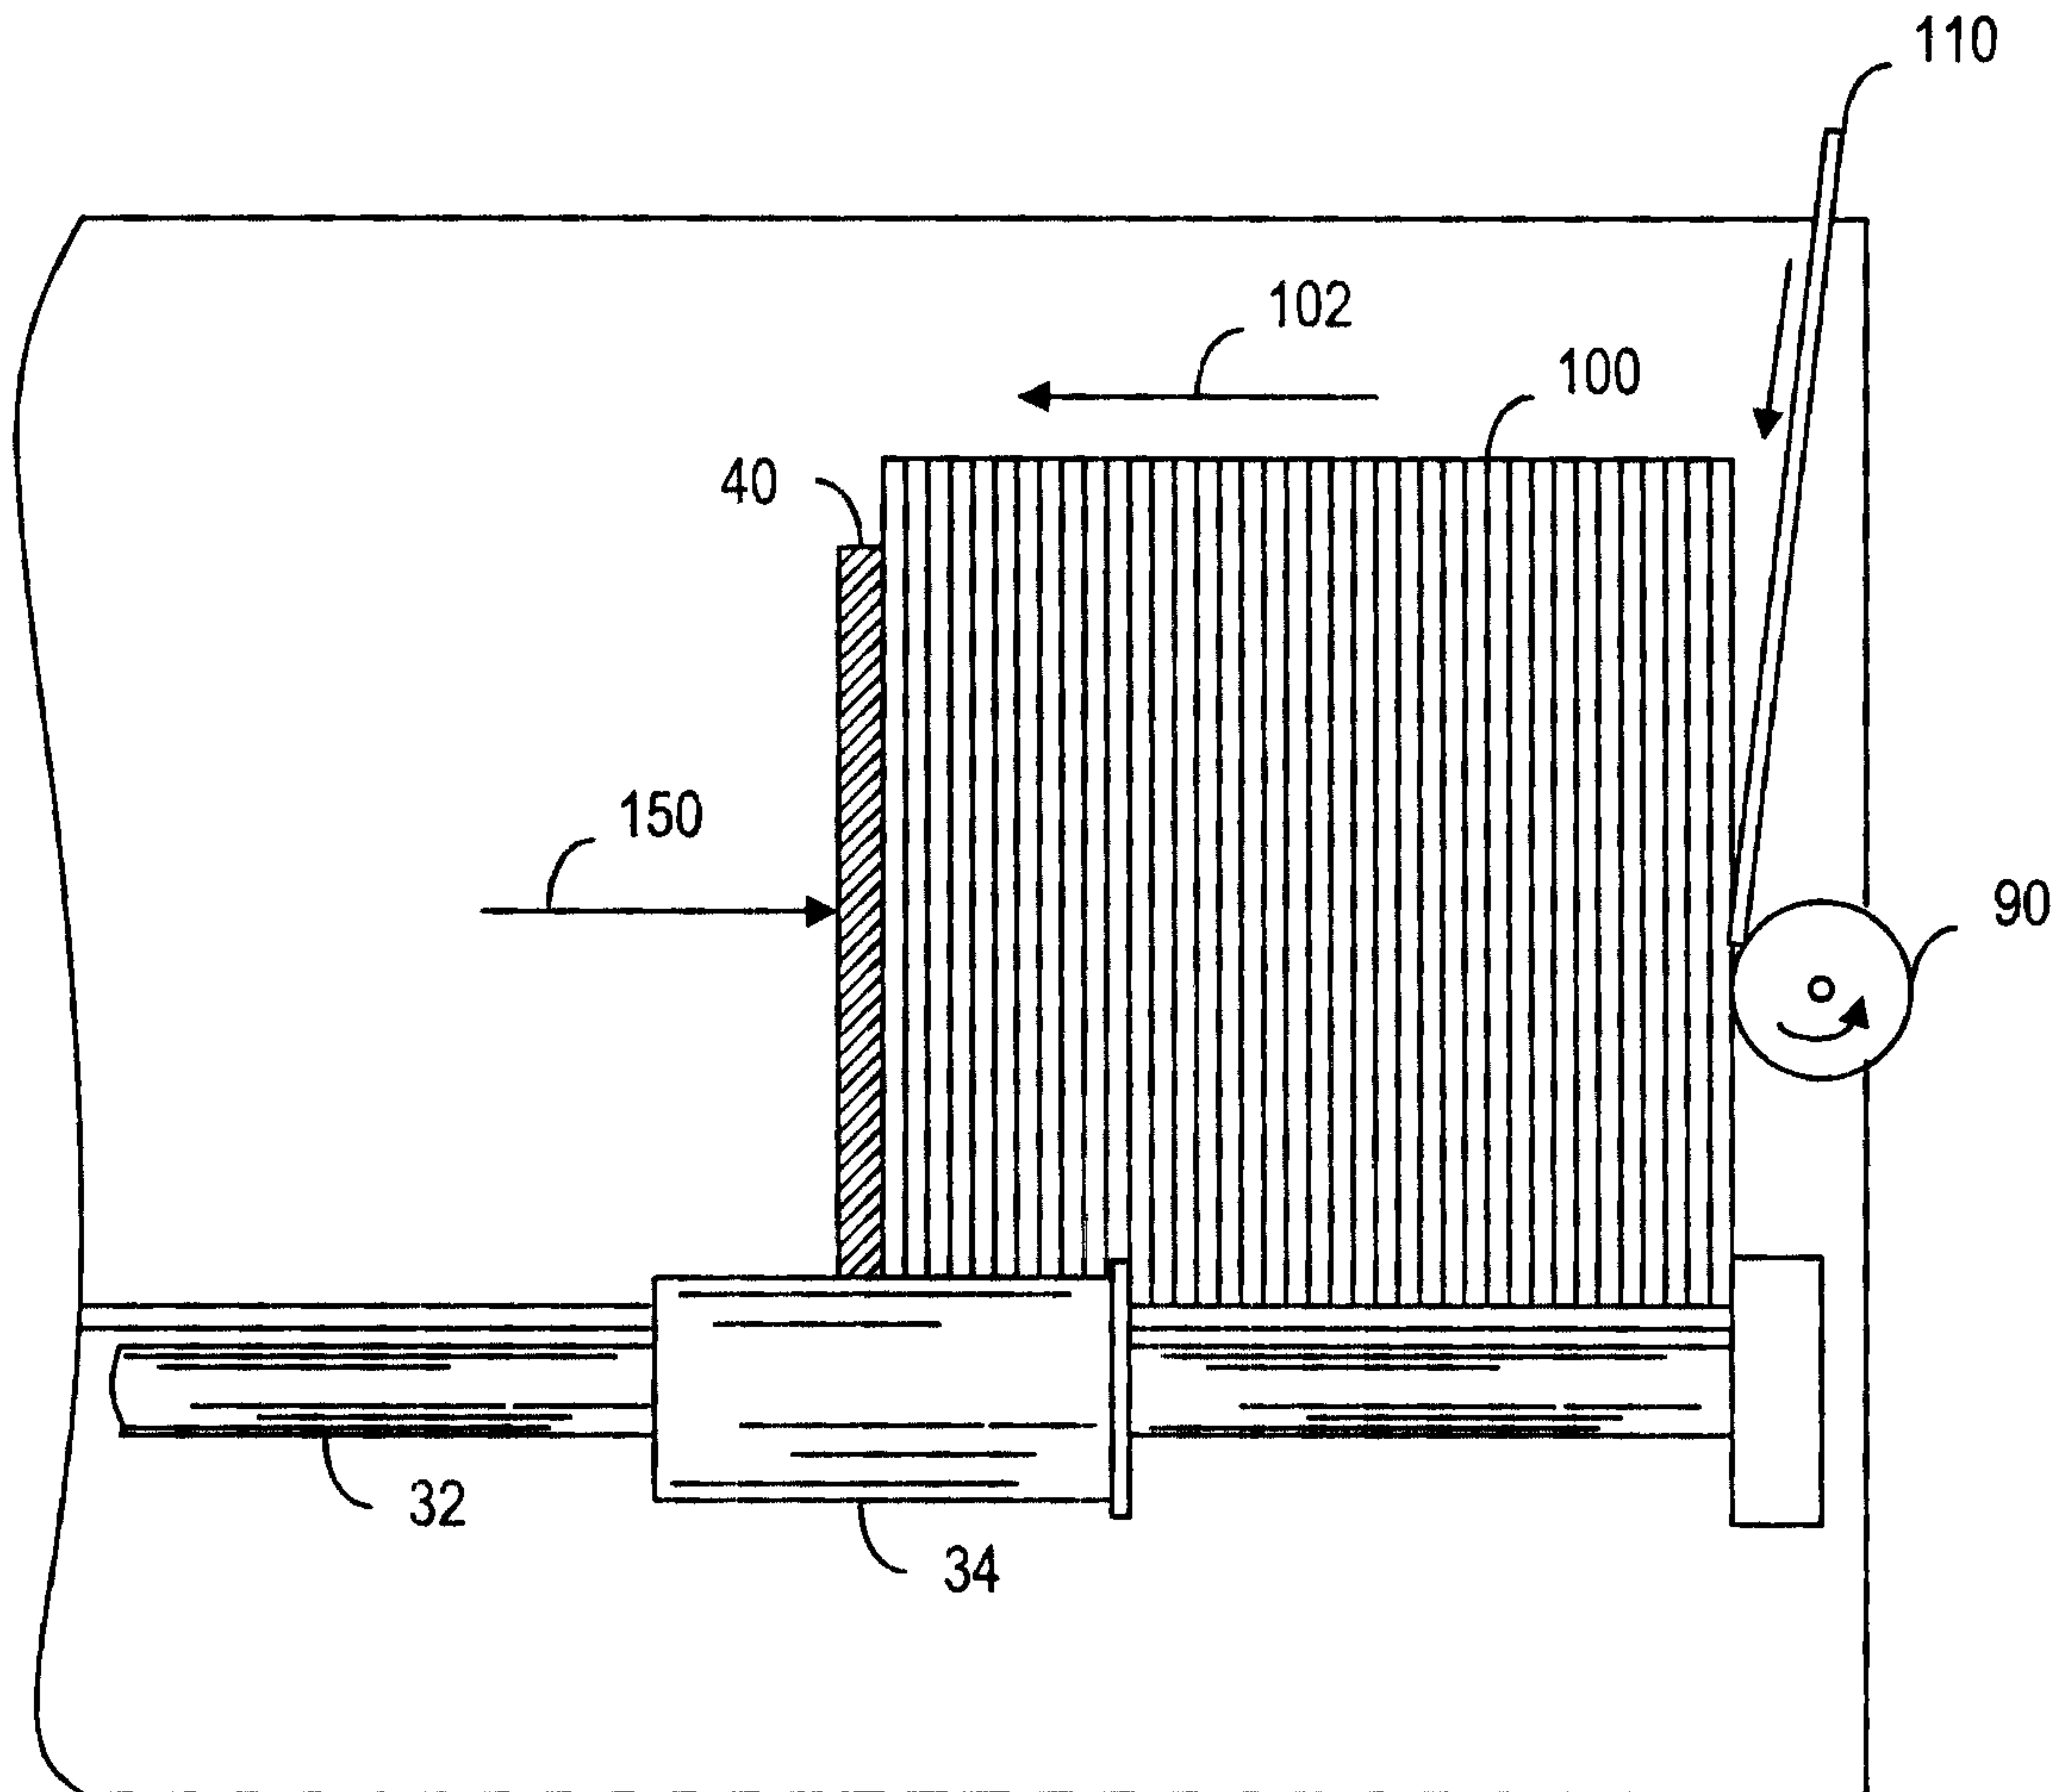


Fig. 1
(Prior Art)

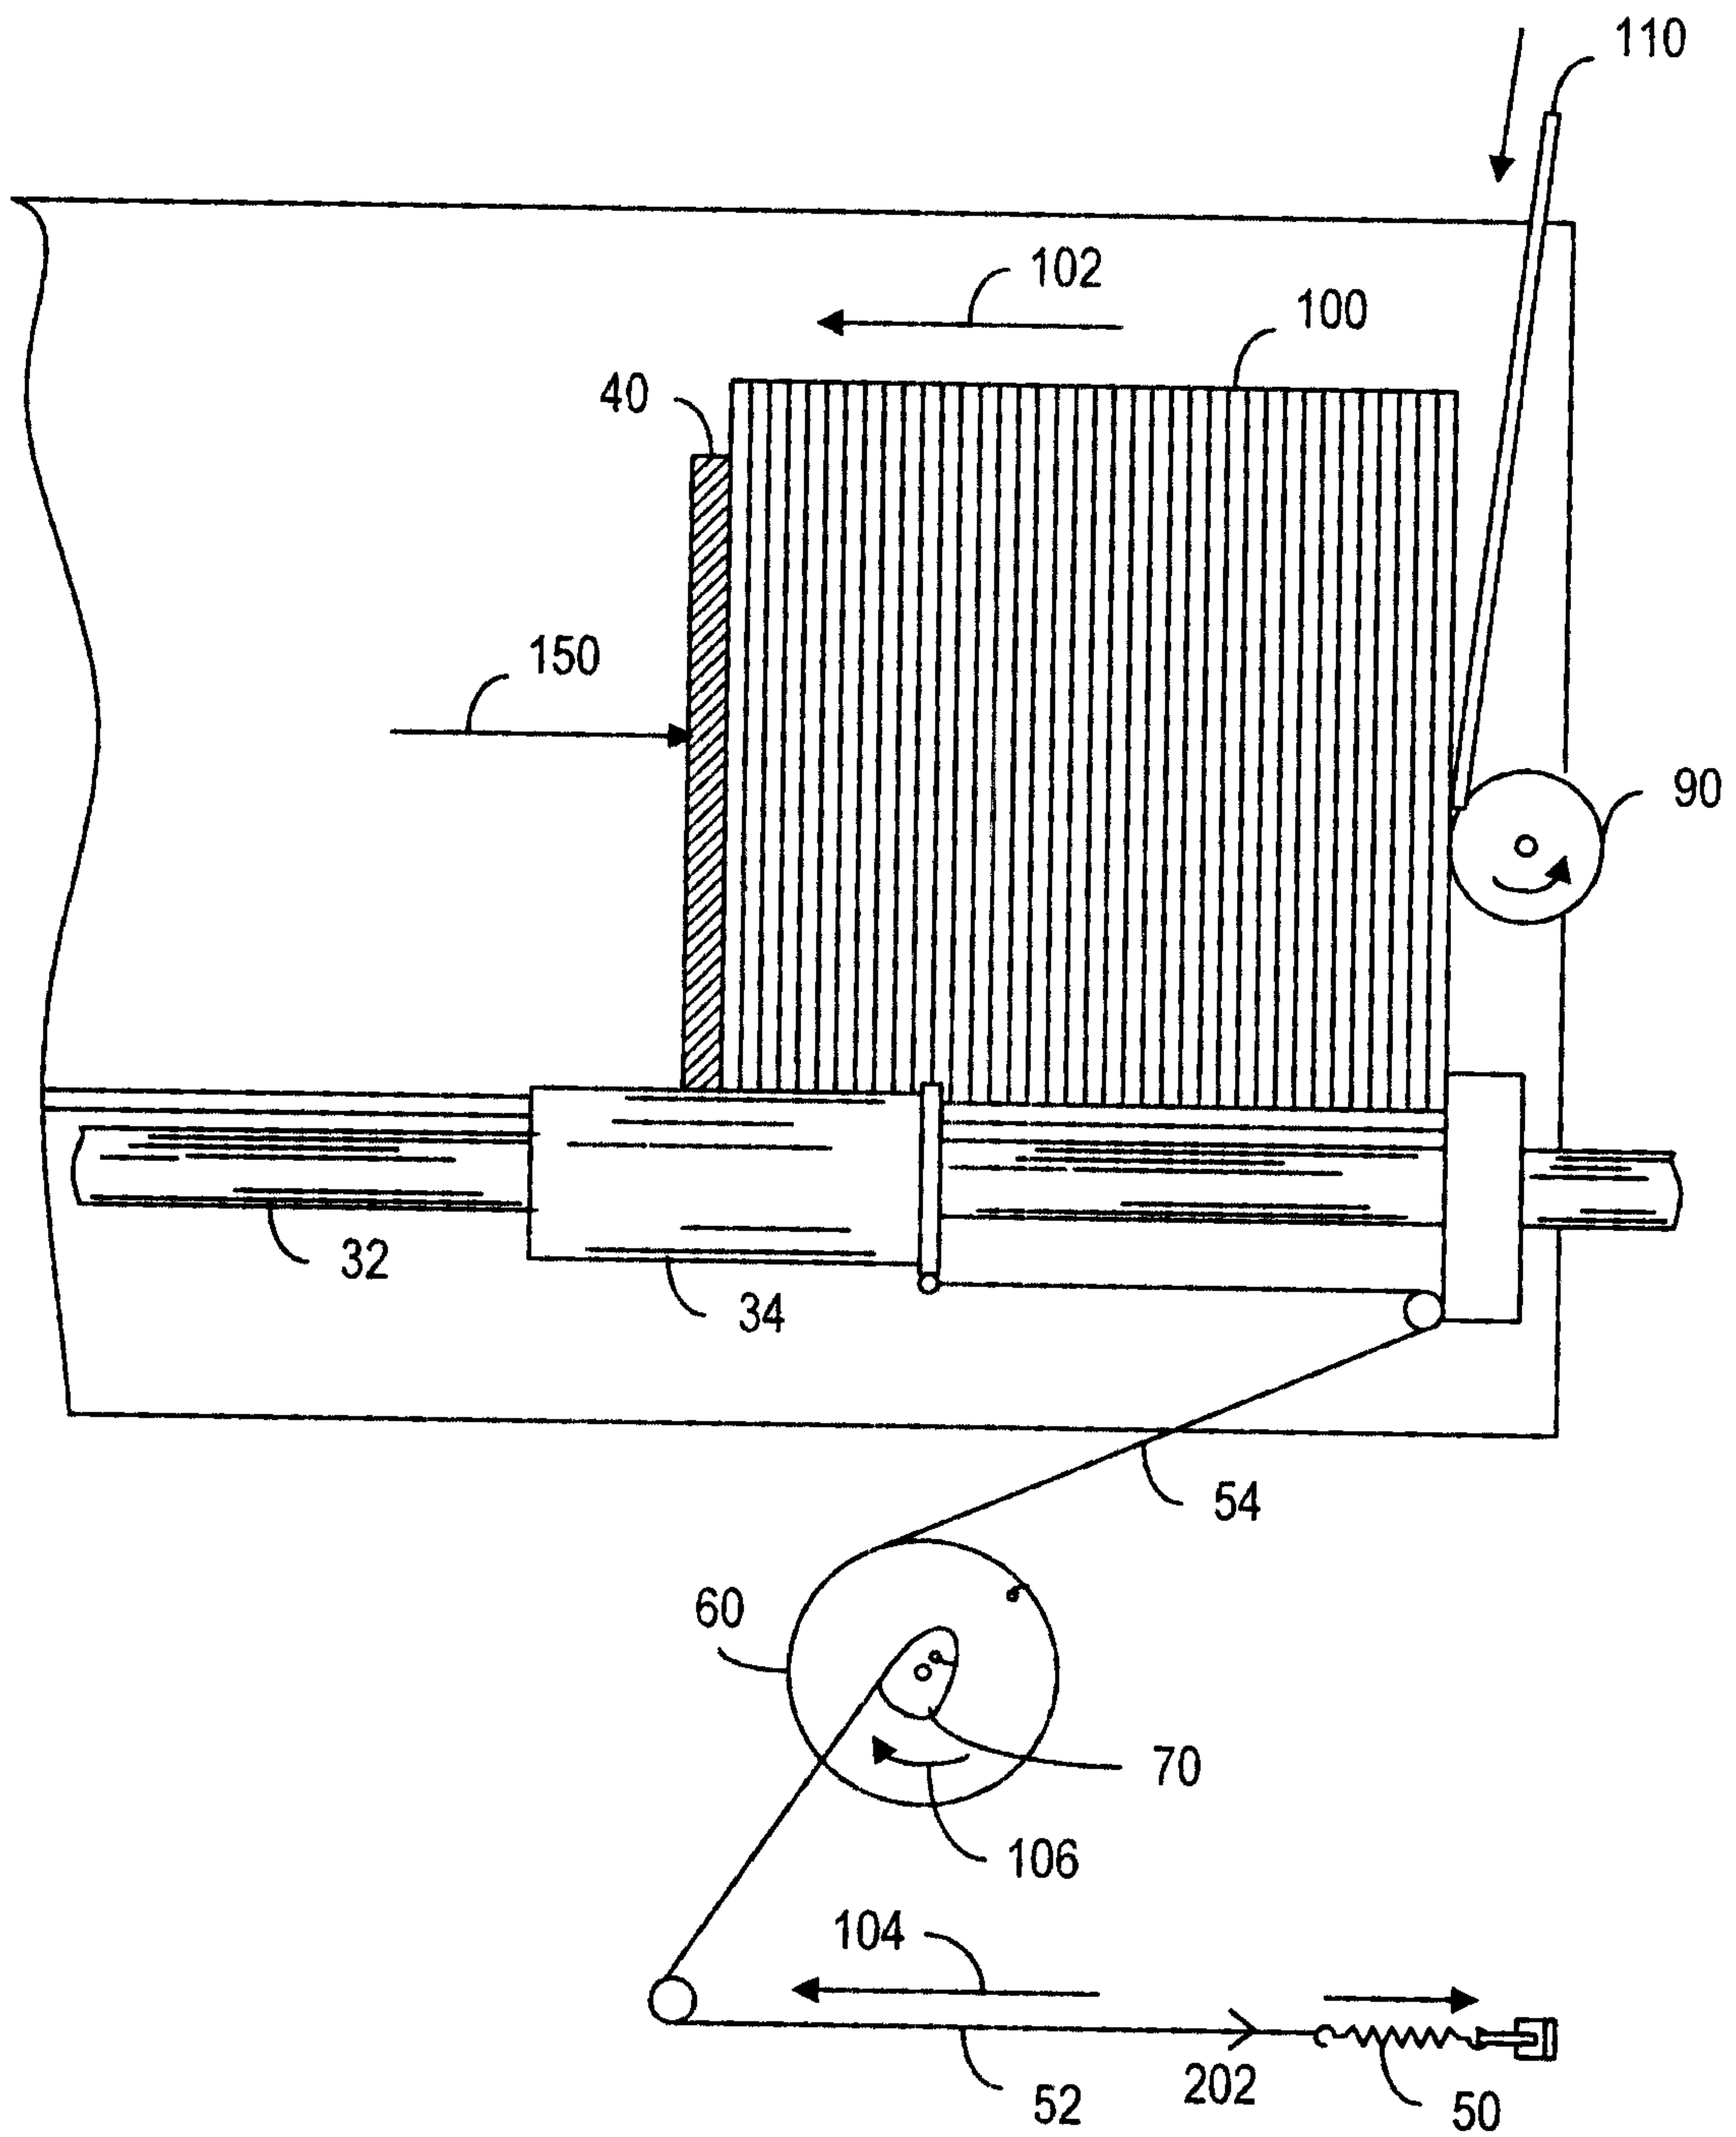


Fig. 2
(Prior Art)

3/4

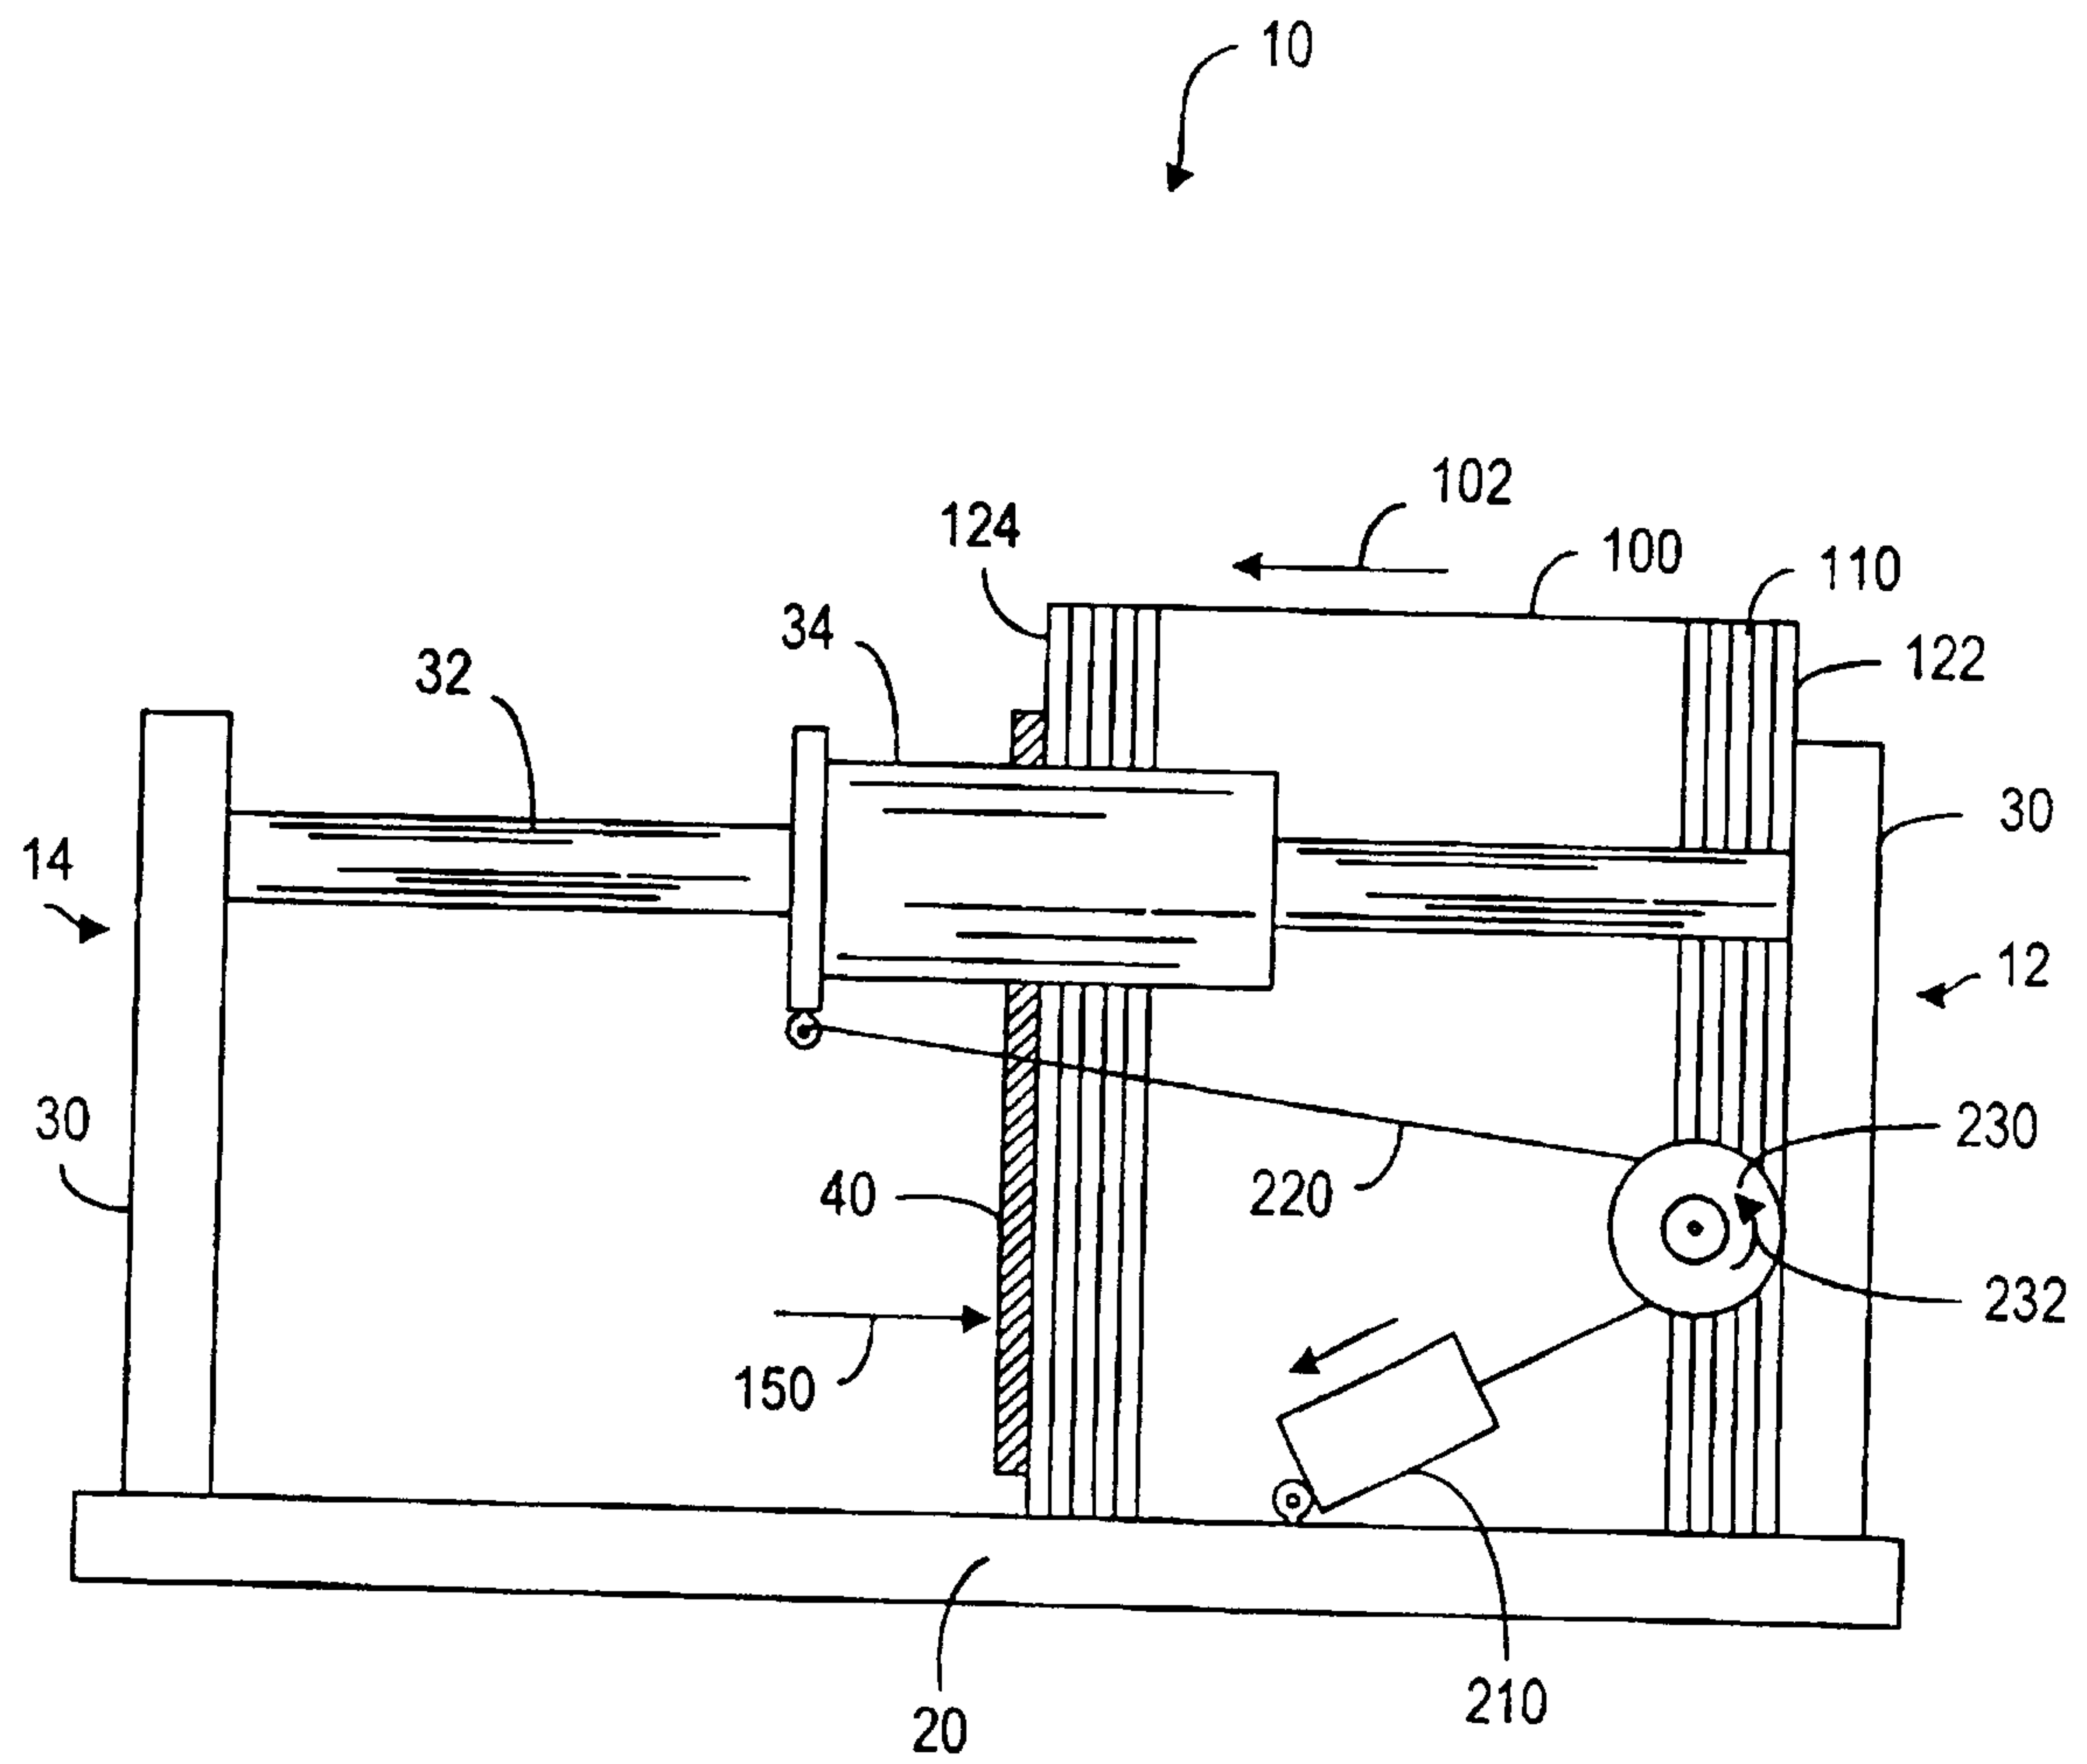


Fig. 3

F-338

4/4

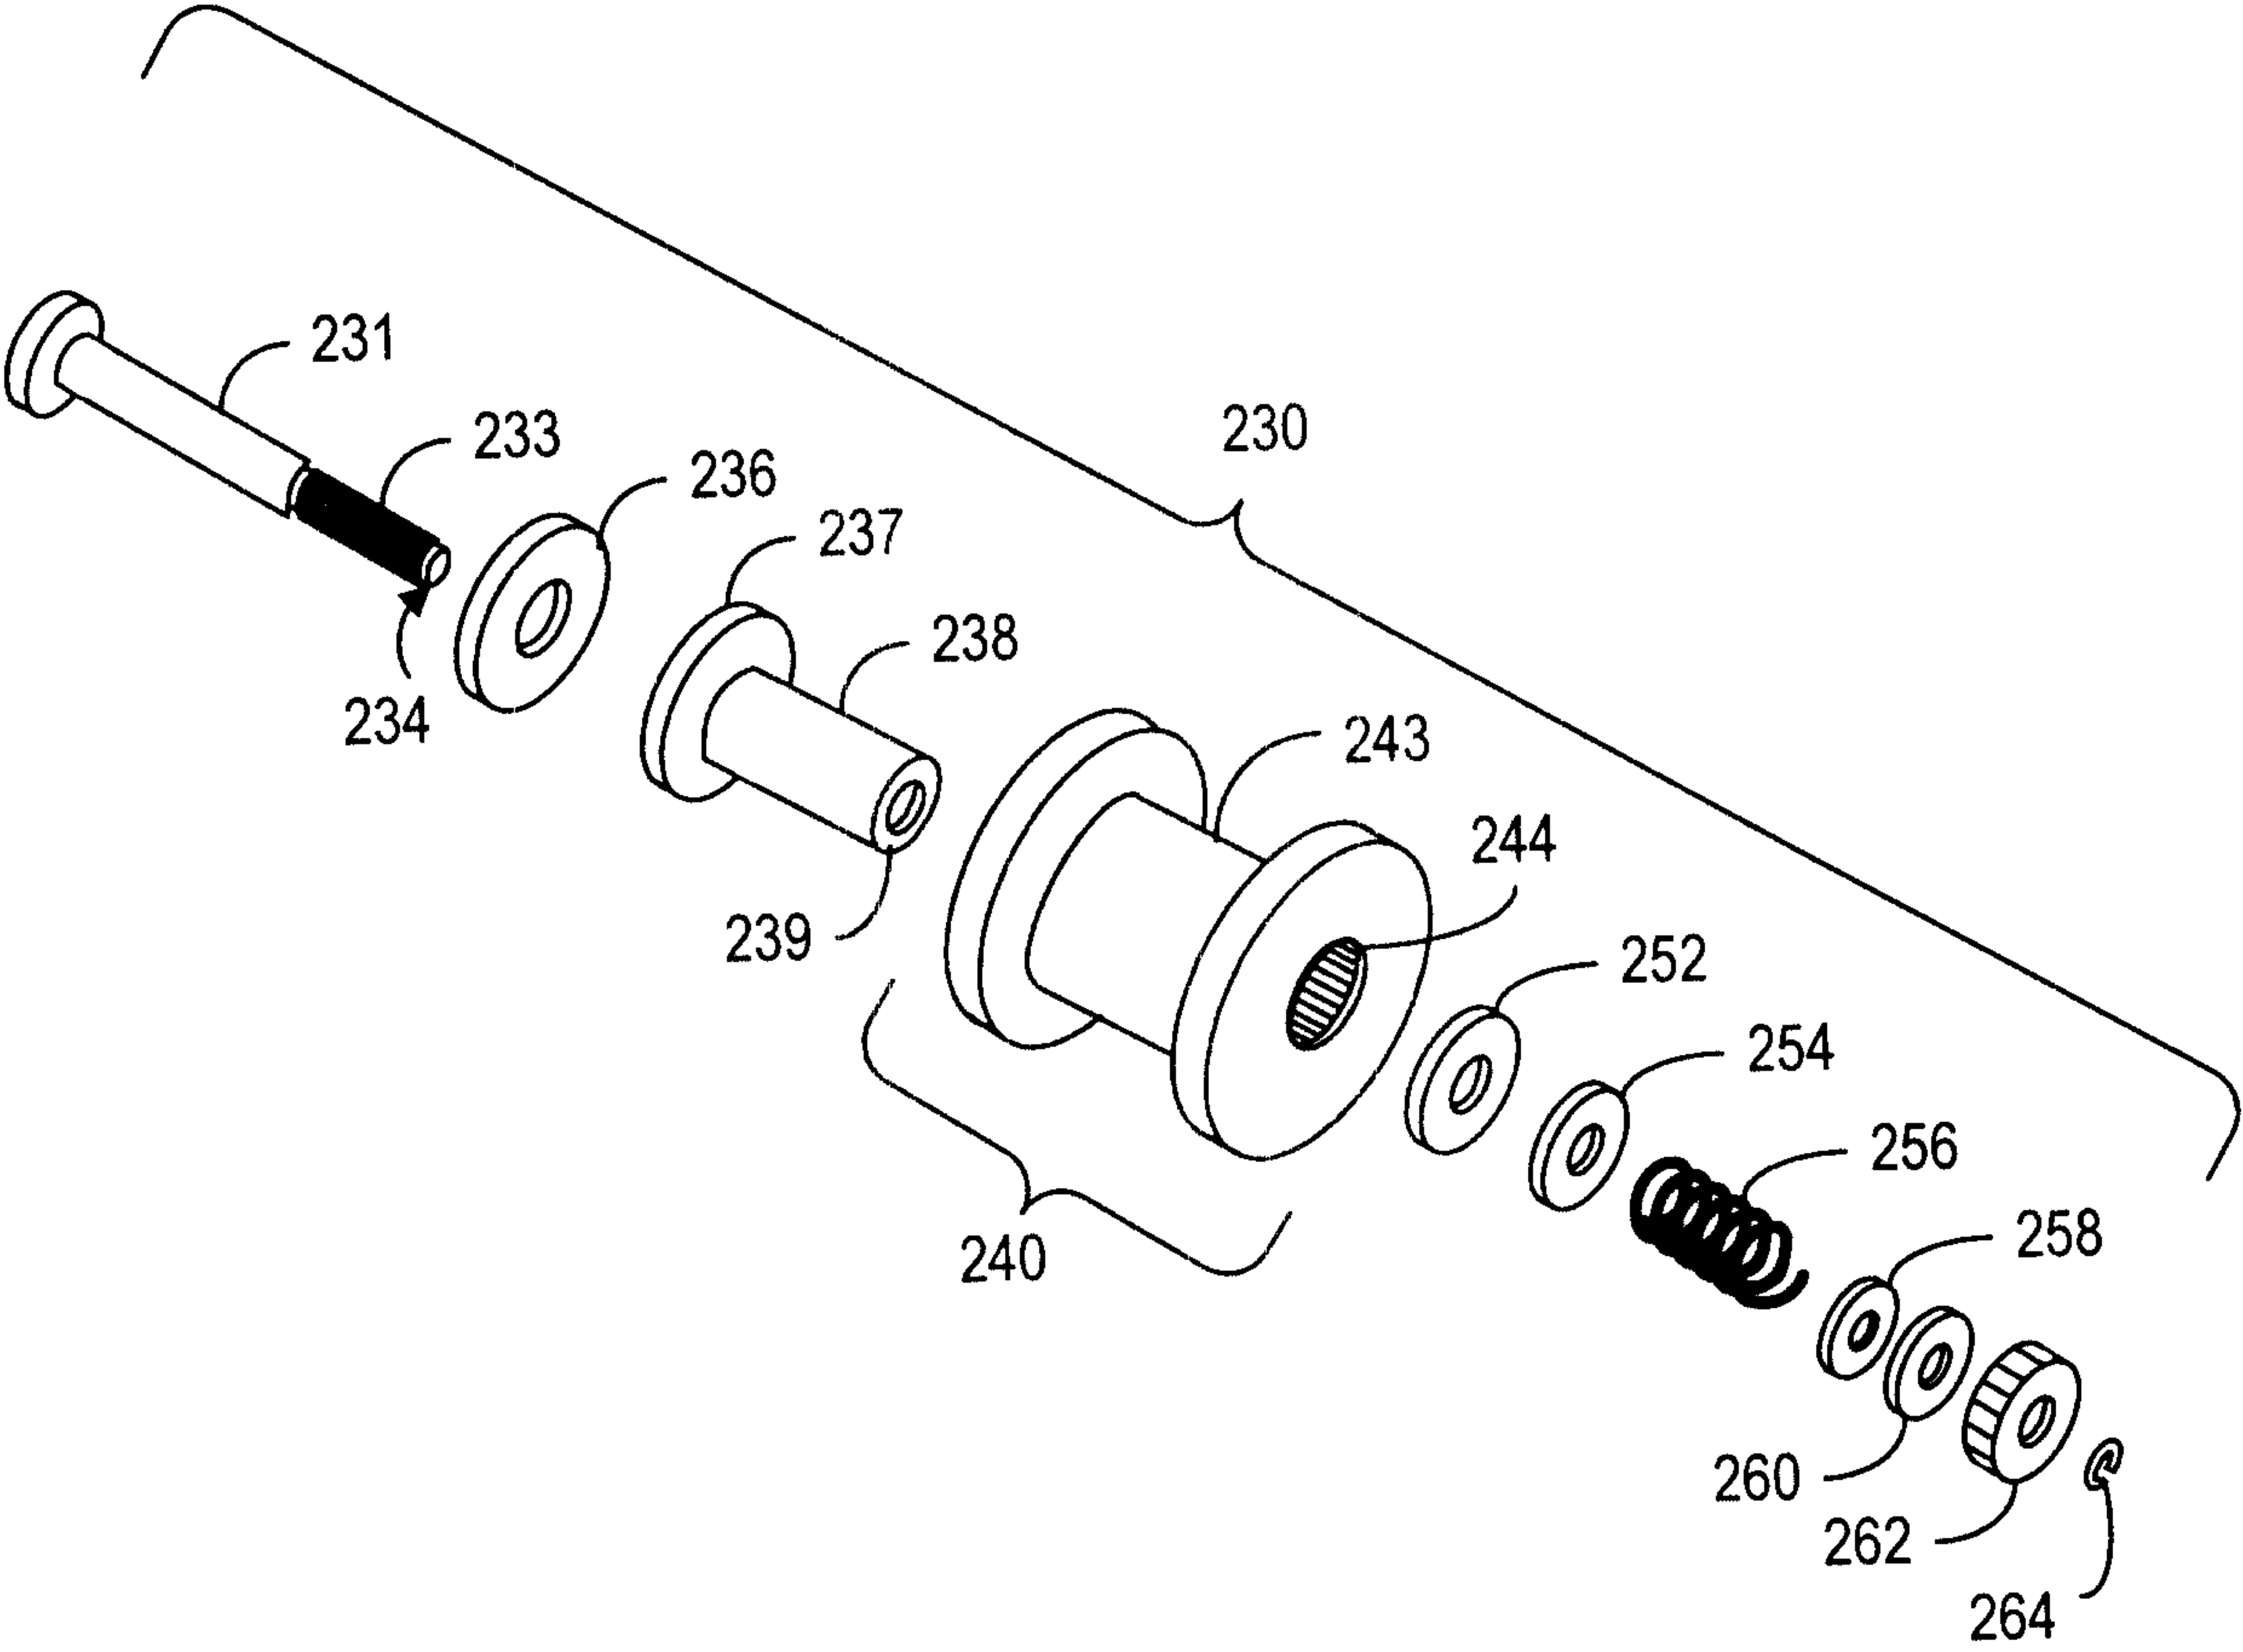


Fig. 4

