

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 March 2003 (27.03.2003)

PCT

(10) International Publication Number  
**WO 03/025669 A1**

(51) International Patent Classification<sup>7</sup>: **G03B 21/00**

(21) International Application Number: PCT/AU02/01306

(22) International Filing Date:  
20 September 2002 (20.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PR 7771 20 September 2001 (20.09.2001) AU

(71) Applicant (*for all designated States except US*): **DIGISLIDE INTERNATIONAL PTY LTD** [AU/AU]; 55 King William Street, North Adelaide, S.A. 5006 (AU).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **SOPER, Kevin, James** [AU/AU]; 2 Doradus Avenue, Hope Valley, S.A. 5090 (AU). **BANKS, Philip, Brendan** [AU/AU]; 16 Ariadne Crescent, Modbury Heights, S.A. 5092 (AU).

**NANKIVELL, Peter, Hugh** [AU/AU]; 47 Ridgeway Drive, Flagstaff Hill, S.A. 5159 (AU). **OUTHRED, Lucille** [AU/AU]; 19 Koonga Avenue, Prospect S.A. 5082 (AU).


(74) Agent: **LESICAR PERRIN**; 49 Wright Street, Adelaide, S.A. 5000 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DECOUPLABLE IMAGE PROJECTION DEVICE FOR USE WITH DOCKING STATIONS

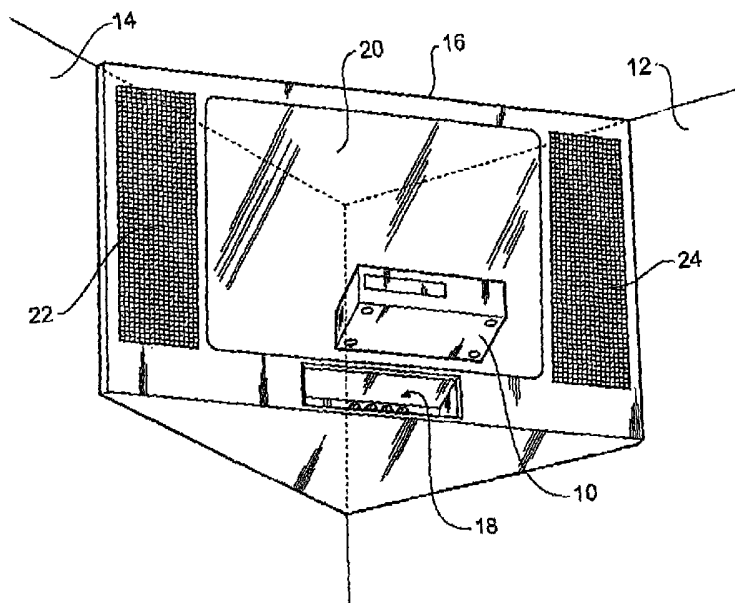

(57) Abstract: An image projector assembly including a mountable image projection device and a docking station adapted for mounting said device. The image projection device is the optical engine and typically includes an image generating apparatus and a light source to project through said apparatus to thereby provide for an image. The docking station includes a signal generating apparatus to provide a signal to the image generating apparatus representative of a visual image and includes a power source for the optical engine. The demountable aspect of the assembly provides for easy replacement and maintenance of the optical engine as well as its portability to use in different optical engines thereby saving on cost.



WO 03/025669 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## Decouplable image projection device for use with docking stations

### BACKGROUND OF THE INVENTION

5 The present invention relates to imaging apparatus and in particular to the decoupling and docking arrangements of a decouplable image projection device that can be used with different types of docking stations.

Image projection apparatus have been known for a number of years and fall into two distinct categories, the rear, and forward projection types. For example, a conventional television receiver is a rear projection apparatus, whilst a conventional cinema projector is a forward projection apparatus.

10 The difficulty with all of these projection apparatus is that they require sophisticated and complex optical engines and electronic components that are in-built into the apparatus. For that reason, the apparatuses are both generally heavy and cumbersome, or fragile and vulnerable. Frequently these projection apparatus are mounted above head height giving rise to Occupational Health and Safety issues for those undertaking installation.

Because of this, projection apparatus are seldom moved and typically a business or home or entertainment venue may end up purchasing and owning several different projection apparatus located in different areas for different uses even though they may not all be used at the one time.

20 Having multiple projection apparatus may not be too inconvenient, but it is rather an expensive option. One of the most expensive parts in a projection apparatus is the optical engine that produces the image subsequently projected.

Some image projection devices use a Liquid crystal Display (LCD) or other similar display devices. These can degrade through exposure to ultra-violet rays, high heat, or cigarette smoke, requiring upgrades, or replacement of the LCD. This can be somewhat difficult and cumbersome to carry out and in some cases not even possible requiring replacement of the whole unit or at the very least expensive repair. In many image projection devices upgrades or replacement LCD's or other similar display devices need to therefore be carried out by specialists.

30 It is an object of the present invention to overcome at least some of the abovementioned problems or provide the public with a useful alternative.

It is a further object of the present invention to provide for a light-weight decouplable image projection device enabling upgrades to be carried out with minimum effort

and within a safe environment by the removal of electrical hazards, or the weight shifting hazards normally associated with lifting and removing heavy larger projection apparatus.

It is still a further object of the present invention to provide for an image projection device that is easily serviced and is upgradeable.

5           The present invention therefore provides for a projector and/or an optical engine that is decouplable from the power supply and signal sources, and is used in a docking type arrangement that overcomes at least some of the abovementioned problems or provides useful alternatives.

10           The decouplable image projection device furthermore, may be easily manufactured, and provides significant cost savings to whilst ensuring flexibility of image projection, by enabling the choice of a number of parameters such as but not limited to image resolution, lumens, and power source.

#### SUMMARY OF THE INVENTION\_\_

15           Therefore in one aspect of the invention though this need not be the only or indeed the broadest form there is proposed an image projector assembly including:  
a mountable image projection device;  
a docking station adapted for mounting said device wherein said device includes an image  
generating apparatus and a light source to project through said apparatus to thereby provide  
20           for an image and wherein said docking station includes a signal generating apparatus to  
provide a signal to the image generating apparatus representative of a visual image.

Preferably said docking station further includes an audio reproducing means.

In preference said projection device includes a plurality of male mating members adapted to engage correspondingly shaped female mating members on said docking station.

25           Preferably said docking station provides power to said projection device.

Preferably said docking station includes a selection means to select the Voltage input used by the projector, said choice depending on the voltage provided by the docking station.

In preference wherein said projection device includes a liquid crystal display and a lamp, said lamp transmitting light through the liquid crystal display for illuminating a surface.

30           In a further form of the invention there is proposed an image projector assembly including:  
a docking station having a housing, a power output source, and an output communication port;

a decouplable projection device adapted to dock with said docking station and including a housing having an input power source adapted to engage said power output source and an input communication port adapted to engage said output communication port.

Preferably said assembly further includes at least two docking stations.

5 In preference the assembly further includes a global positioning system.

In a preferred embodiment said projection device includes an image manipulation means that can change the parameters of the image including but not limited to reversing the image, mirroring the image and rotating the image whereby the user can select what image is to be projected depending on whether the assembly is a front or rear projection type assembly.

10 In preference said assembly includes at least one pivotable docking station.

In a still further form of the invention there is proposed a decouplable image projection device adapted to be removably docked to a station, said image projection device producing an image to be displayed, said station providing said device with electrical power and a video signal of the image to be projected.

15 In preference said decouplable image projection device includes a television reception capabilities.

In preference said decouplable image projection device includes a navigational system providing at least the location of said device.

20 In preference said decouplable image projection device includes a navigational system having a sonar system.

In preference said decouplable image projection device includes an LCD display or other similar technologies that are adaptable to produce an image by electromagnetic radiation passing therethrough.

25 In preference said decouplable image projection devices includes a selection means adapted to select the voltage at which said device operates, said voltage chosen on the basis of the operating voltage of the docking station.

In preference said docking station is located in a rear projection apparatus having a rear projection surface screen.

In preference said docking station is mounted in a vehicle.

30

BRIEF DESCRIPTIONS OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate several implementations of the invention, and, together with the description, serve to explain the advantages and principles of the invention. In the drawings,

- 5           Figure 1           is a perspective view of the decouplable image projection device in a rear projection arrangement;
- Figure 2           is a front perspective view of the docking station illustrating the mating arrangement;
- Figure 3           is a rear perspective view of the back of the decouplable image projection device of Figure 1;
- 10          Figure 4           is a rear perspective view of the decouplable image projection device of Figure 1 when projecting to a screen;
- Figure 5           is a perspective view of an alternate embodiment of a dual decouplable image projection device projecting to a screen;
- 15          Figure 6           is a schematic perspective view of four decouplable image projection devices mounted in a multi-way docking station;
- Figure 7           is a plan view of four decouplable image projection devices, docked within a multi-way docking station;
- Figure 8           is a schematic perspective view illustrating a single decouplable image projection device docked in a multi-way docking station;
- 20          Figure 9           is a plan view illustrating one decouplable image projection device docked and a mounted image projection system attached;
- Figure 10          is a schematic perspective view of a decouplable image projection device docked and a mounted image projection system attached; and
- 25          Figure 11          is a schematic perspective illustrating a multi-dimension image projection device.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

30           The following detailed description of the invention refers to the accompanying drawings. Although the description includes exemplary embodiments, other embodiments are possible, and changes may be made to the embodiments described without departing from the spirit and the scope of the invention. Wherever possible, the same reference numbers will be used throughout the drawings and the following description to refer to the same and like parts.

Figure 1 illustrates a decouplable image projection device 10 being mounted in a corner unit defined by two walls 12 and 14. The corner unit or rear projection arrangement 16 includes a docking station 18, a conventional rear projection screen 20, and several speakers 22 and 24. The decouplable image projection device 10 is adapted to be mounted in the docking station 18 located in the rear projection arrangement 16. The decouplable image projection device 10 includes image generating optical components and the relevant electronics. The decouplable image projection device 10 constructs the image that is projected on the rear projection screen 20.

As shown in further detail in Figures 2 and 3, the docking station 18 may include several types of connectors including male video and audio connectors 26, and computer interface 28 that mate with the projection device 10 female counterparts 30 for the audio and video connectors and computer connector 32. This enables a signal from the docking station 18 to be fed into the decouplable image projection device 10 to produce the desired image that is subsequently shown on the rear projection screen 20.

The image projection device may include various optical lenses to produce for an appropriate image including focussing lens 34. The docking station may also include various devices to assist in the projection of the image including adjustable feet 36.

As further illustrated in Figure 4, the decouplable image projection device 10 includes the necessary optical engine to produce the image 38 to be displayed. Although not individually shown, the optical engine may include a LCD or similar display technology, an objective lens, driver and receiver electronics, and other individual components that produce the image. The device may further include a cooling means such as fan 40 and an input for an antenna 42.

Figure 5 illustrates two decouplable image projection devices 44 and 46 that may be coupled to produce one complete image 48. This may be appropriate where one would require to project an image over a larger surface area so that it needs to be projected in two parts, each part by a separate decouplable image projection device 44 and 46.

In a preferred embodiment of the invention illustrated in Figures 6-8, four decouplable image projection devices 10a, 10b, 10c, and 10d may be used to provide four images directed in four different directions. In this particular illustration, the four decouplable image projection devices may be used in a rear projection apparatus providing four right-angled images 48a, 48b, 48c, and 48d. This type of arrangement may be particularly useful in a large entertainment venue or a retail outlet where an image is to be provided in different directions. The four devices are mounted in a multi docking station 50.

Accordingly the skilled addressee will appreciate that the present invention provides for either a rear projection or forward projection apparatus by the use of a mountable decouplable image projection device 10, which means that it may be used to provide an image to different types of projection apparatus.

5           Since the decouplable image projection device 10 is removable the cost of the projection unit 16 itself is far less than is conventionally possible for the same number of projection outputs and allows the decouplable image projection device 10 to be used either in the rear 20 or front projection modes 38. Further, the docking station 18 enables a total projection apparatus that has a high degree of interactivity, ruggedisation, and portability.  
10       The use of four or more housings allows four images (and thus 360 degrees viewing) to be achieved at the same time. It is also to be understood that the decouplable image projection device 10 may include other features such as speakers mounted on 'wings'.

To assist in achieving this portability of the device 10, the docking station 18 includes various connection means including, but not limited to

- 15           • A computer interface (data in)
- Composite video input
- Audio in/out
- RGB input
- Low voltage in (12v/24v)
- 20           • RF in

The docking station may also include other features such as a DVD player, audio reproduction devices including amplifiers and speakers, and external antenna sockets.

It is also to be understood that the decouplable image projection device 10 may include other features such as an image projecting system wherein a mirror or mirrors are  
25       mounted to reflect the image out of the enclosed space to a larger viewing screen being either a rear projection or forward projection location. Such an arrangement is illustrated in Figures 9 and 10 wherein the use of a static mirror 52 and pivotable mirror 54 may be used to project the image 56 from the device 10.

The skilled addressee will now appreciate that the use of a portable decouplable  
30       image projection device 10 that is adapted to be dockable within a viewing apparatus 16 or 50 enables far greater flexibility than has hitherto been known. A consumer or purchaser may choose to purchase several different sizes of the docking station 18 and/or rear projection arrangement 16 and 50 and/or decouplable image projection devices 10, all of which are

adaptable to be used interchangeably. The decouplable image projection device 10 is adapted to be portable and ultra light and designed to be ruggedised and is removably mountable in different docking stations. This enables a hitherto unknown flexibility in projection apparatus for the decouplable image projection device 10 may be used in a range of different projection apparatus.

In the normal operations of a convention or conference centre multiple projectors are required. Not all are required for the same conference room or seminar room and therefore are subject to be moved around as required. As previously outlined this is cumbersome, not cost effective and subjects the equipment that is fragile to risk. Lifting the equipment adds an additional Occupational Health and Safety issue for installers.

One can therefore now appreciate that a home or a convention or conference facility may have multiple docking stations that require a decouplable image projection device 10 to provide an image. Not all docking stations will be used at the one time and one simply needs to select the required decouplable image projection device – depending on resolution requirements -- and insert it into the previously aligned and fixed docking station. Thus, a home or convention or conference facility may be able to offer the flexibility of a user in any given situation selecting from a low resolution and lower output lamp, or a higher resolution and a higher output lamp, or a very high-resolution image and a very high output lamp. That is to say, all docking stations are compatible with the full range of decouplable image projection devices and each can be interchanged at will.

In a convention or conference centre facility for example this would greatly save on the cost of equipment and has risk management advantages for quality of display, protection of equipment and safe working procedures for personnel. Within a household environment parents may elect to use the high quality decouplable image projection device within a discrete home theatre environment and the lower quality decouplable image projection device within the family room but on a particular occasion such as a birthday party or sleepover, they may dock the lower quality decouplable image projection device into the docking station in the home theatre environment where the other household members may enjoy their entertainment and take the higher quality resolution decouplable image projection device to the family room and watch their preferred television or video or DVD.

Further, not only does the present invention enhance options for the high end professional user, but with the increased demand in home theatre, it means for the average consumer that by purchasing the one or more decouplable image projection devices, and multiple docking stations, it would be possible to provide projection (both rear and front) in

several rooms of the home, providing total flexibility of image projection, by enabling the choice of image resolution, lumens and power source and without moving heavy equipment.

The advantages of this include: portability of equipment; enhanced viewing possibilities (i.e. forward projection in a dimmed home theatre environment or rear projection in full ambient light), customized power supply requirements for 12V or 24V environments; and total upgradability in the event of the LCD or other display device being degraded or damaged.

Further, the decouplable image projection device may be mounted within leisure craft and watercraft or mobile homes and caravans, providing a totally removable device for home entertainment, vehicle entertainment, and personal entertainment during leisure pursuits.

Currently within leisure and other watercraft, a boat may have a variety of display panels for a number of navigational devices (eg depth sounder, GPS and radar) and possibly one for entertainment purposes (eg television set). By using the decouplable image projection device with docking station all information sources could be electronically combined with all images produced being projected onto the one screen.

Either mechanical and electrical componentry devices may select the information source being used by the decouplable image projection device, and may be menu driven. The system also includes electronics within the system to display an image on the screen in an appropriate orientation, thus avoiding upside-down or back-to-front images in the various uses of the system. Thus, the decouplable image projection device has a switching mechanism or electronics system within it for all possible orientations of the image.

The advantages of this for leisure and other craft would be space saving features enabling a larger, more easily readable screen to be used. Furthermore, with combined electronics and power sources there would be the added advantage of weight saving.

Used in conjunction with image reflecting devices such as a periscope the user would have a two-way viewing option from either within the cabin or outside the cabin. Thus, the image may be viewed via rear projection methods to the display panel normally located near the helm for navigation purposes alternatively, using peripheral devices, a significantly larger image could be viewed using forward projection principles onto a screen inside the cabin where the ambient light is controllable.

As most leisure craft are fitted with a television set (and the decoupling projection device may have television reception capabilities) this arrangement provides additional benefits of further reduction of weight; increase of space availability; larger image availability; access to all navigational information from within the cabin.

Thus, the video source may be a computer, a video player, a television receiver, geographic positioning systems, sonar devices, or any other composite video source. Likewise, the signal may be received via a direct wire or a wireless system.

Whereas specific 'rugged' laptop computers have been developed for use within  
5 Defence and Emergency Services environments to be used with customized software for battle command stations, briefings for defence and emergency services and other similar functions, there has, to date been no 'rugged' projection equipment developed.

In fact, the fragility of video projection systems is a particularly limiting factor in their use in any harsh and/or mobile environment.

10 The decouplable image projection device and multiple docking stations according to the present invention have significant implications for Defence and Emergency Services, including customized power supply requirements for 12V or 24V environments within jeeps, tanks, armoured personnel carriers, briefing tents with briefing tables and within Battle Command Headquarters. The decouplable image projection device may be further  
15 'ruggedised' with specifically designed optical engines.

The present invention has particular relevance for the retail industry where the use of high mounted multiple docking stations could maximize the benefits of in-store advertising and promotions. Furthermore, the decouplable image projection device could be moved from location to location within the store without necessitating the lifting of heavy and/or  
20 cumbersome equipment – thus providing Occupational Health and Safety advantages.

It is not intended to limit the present invention to a docking station of the type where the projection devices project in the same plane. Thus as illustrated in Figure 11, there is shown a docking station 58, first projection device 60 mounted to a socket 62 of the station 58, a second projection device 64 mounted on top of the station and projecting upwards  
25 compared to the first docking station 60. The station may also include a third port 66 adapted to pivot around coupling 68 and supporting decouplable projection device 70. The pivoting enables the device 72 to pivot in direction 72 controlling the direction of the projected image.

In Conference and Convention Centres multiple docking stations could be installed in each room/theatre at the exact alignment for minimal cost. A variety of decouplable image  
30 projection devices, of differing quality resolutions could be available for use on an as needs basis, and the installation would be simple, cost effective (no alignments necessary) and provide Occupational Health and Safety advantages.

Further advantages and improvements may very well be made to the present invention without deviating from its scope. Although the invention has been shown and

described in what is conceived to be the most practical and preferred embodiment, it is recognized that departures may be made therefore within the scope and spirit of the invention, which is not to be limited to the details disclosed herein but is to be accorded the full scope of the claims so as to embrace any and all equivalent devices and apparatus.




- 5           In any claims that follow and in the summary of the invention, except where the context requires otherwise due to express language or necessary implication, the word “comprising” is used in the sense of “including”, i.e. the features specified may be associated with further features in various embodiments of the invention.

## CLAIMS


1. An image projector assembly including:  
a mountable image projection device;  
a docking station adapted for mounting said device wherein said device includes  
5 an image generating apparatus and a light source to project through said  
apparatus to thereby provide for an image and wherein said docking station  
includes a signal generating apparatus to provide a signal to the image generating  
apparatus representative of a visual image.
2. An image projector assembly as in claim 1 wherein said docking station further  
10 includes an audio reproducing means.
3. An image projector assembly as in claim 1 or claim 2 wherein said projection  
device includes a plurality of male mating members adapted to engage  
correspondingly shaped female mating members on said docking station.
4. An image projector assembly as in any one of the above claims wherein said  
15 docking station provides power to said projection device.
5. An image projector assembly as in any one of the above claims wherein said  
docking station includes a selection means to select the Voltage input used by the  
projector, said choice depending on the voltage provided by the docking station.
6. An image projector assembly as in any one of the above claims wherein said  
20 projection device includes a liquid crystal display and a lamp, said lamp  
transmitting light through the liquid crystal display for illuminating a surface.
7. An image projector assembly including:  
a docking station having a housing, a power output source, and an output  
communication port;  
25 a decouplable projection device adapted to dock with said docking station and  
including a housing having an input power source adapted to engage said power  
output source and an input communication port adapted to engage said output  
communication port.
8. An image projector assembly as in any one of the above claims wherein said  
30 assembly further includes at least two docking stations.
9. An image projector assembly as in any one of the above claims wherein said  
assembly further includes a global positioning system.

- 5
10. An image projector assembly as in any one of the above claims wherein said projection device includes an image manipulation means that can change the parameters of the image including but not limited to reversing the image, mirroring the image and rotating the image whereby the user can select what image is to be projected depending on whether the assembly is a front or rear projection type assembly.
  11. An image projector assembly as in any one of the above claims herein said assembly includes at least one pivotable docking station.


1/6

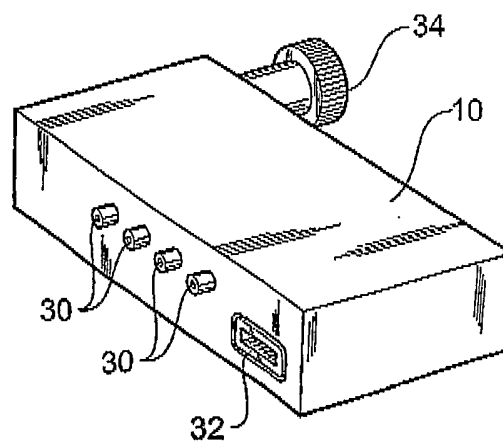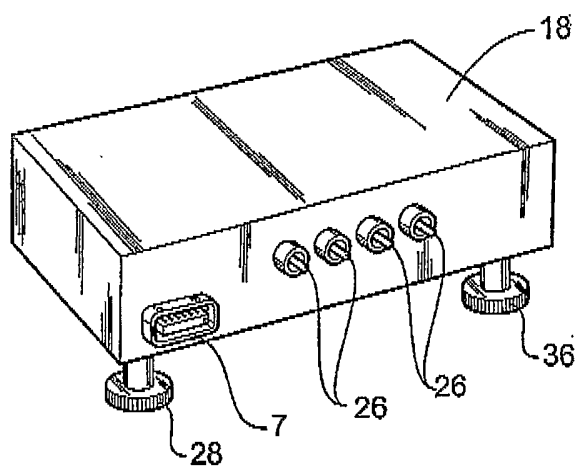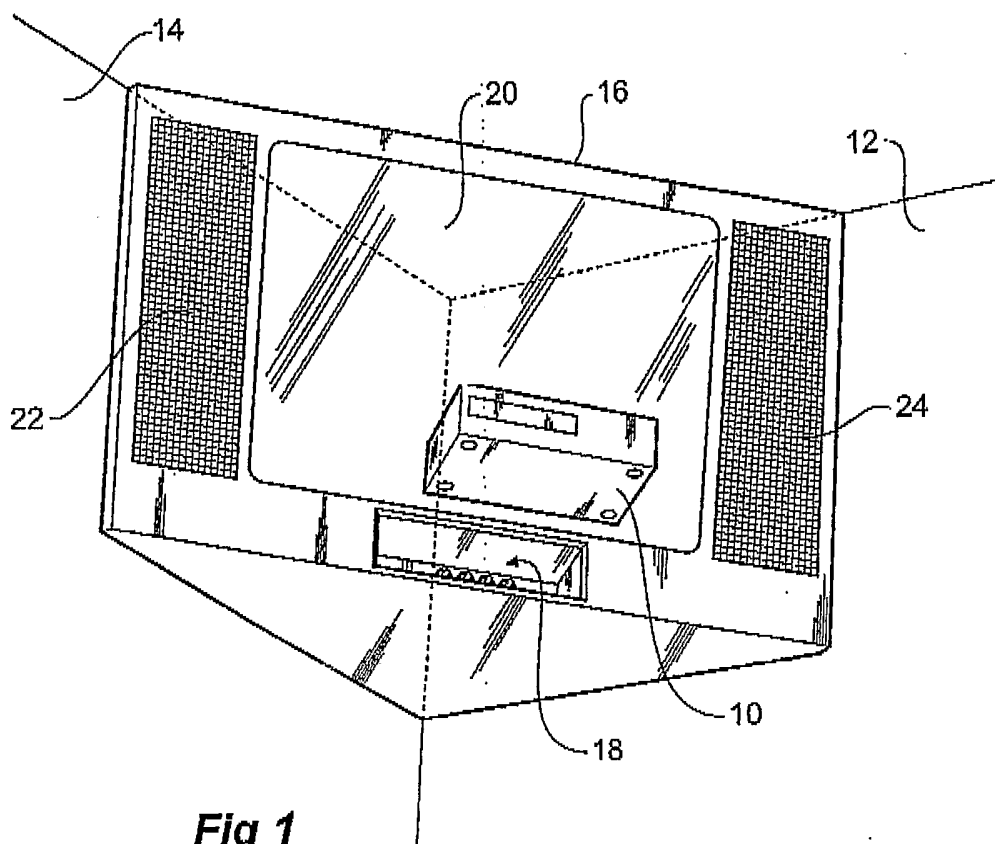

2/6

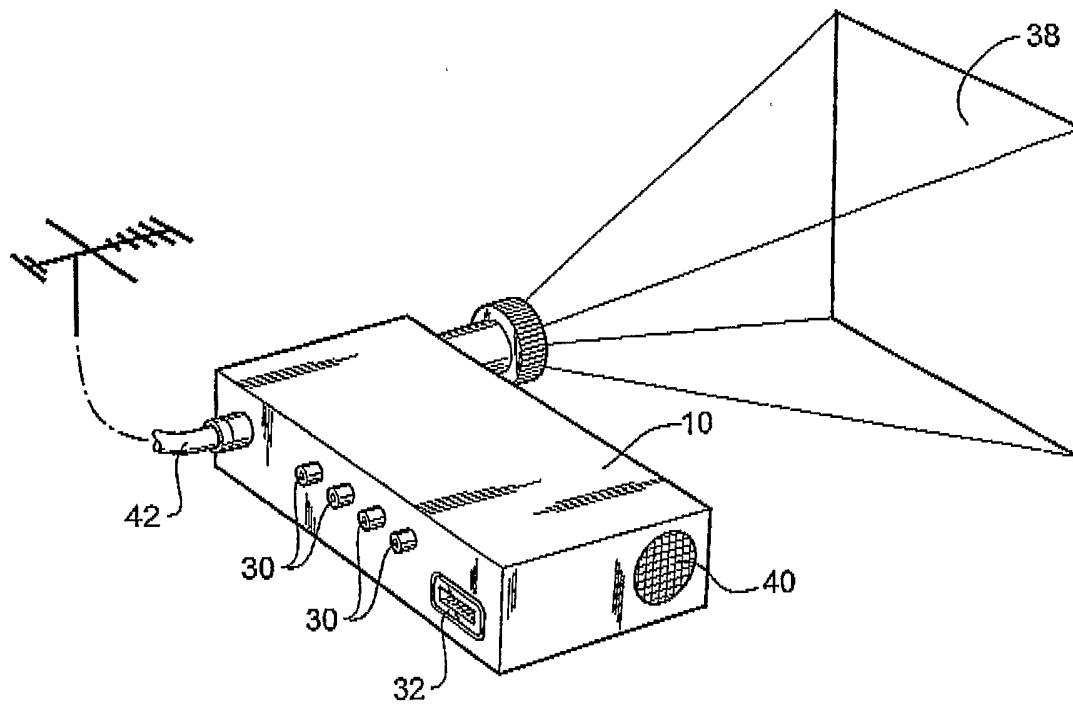


**Fig 4**

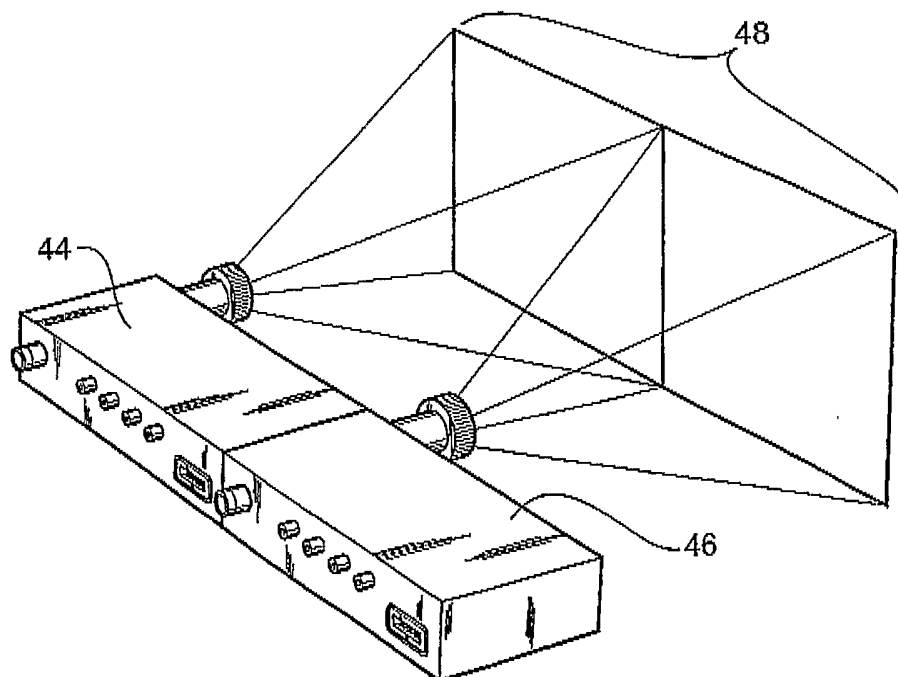


**Fig 5**


3/6

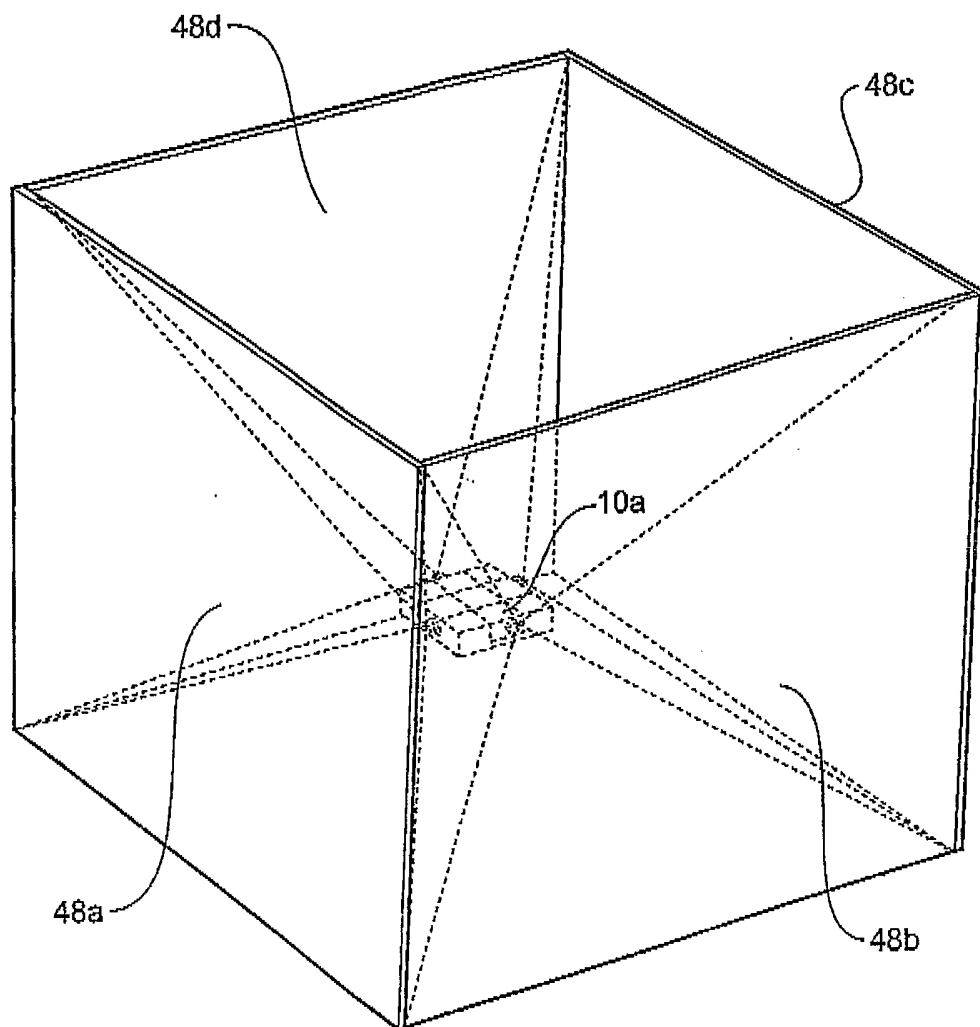**Fig 6**

4/6

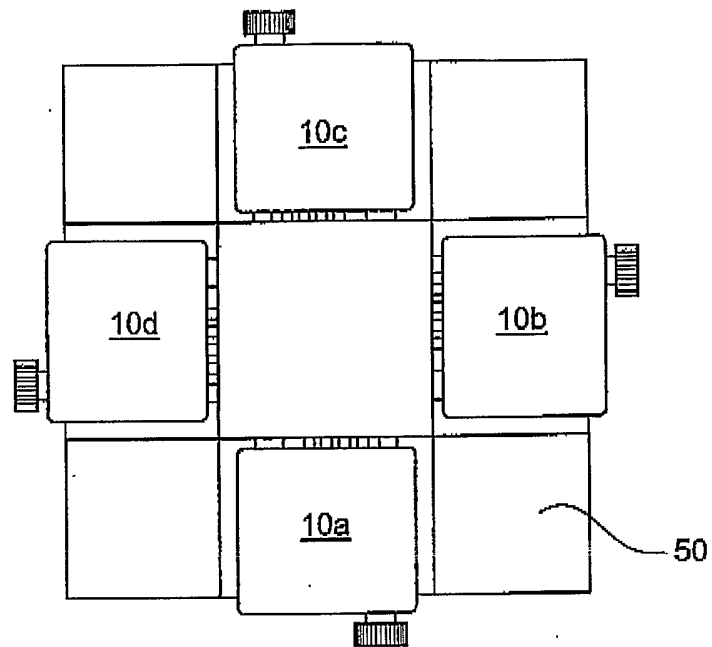


**Fig 7**

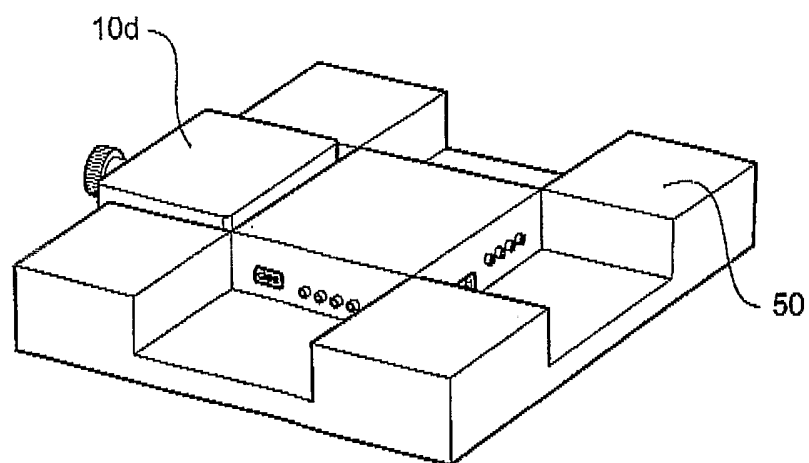


**Fig 8**


5/6

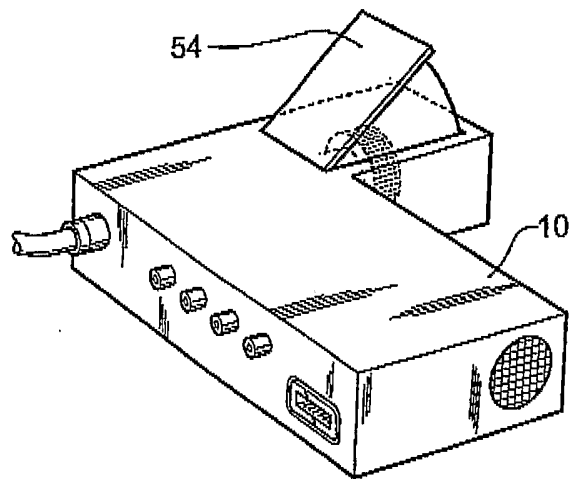

**Fig 9**

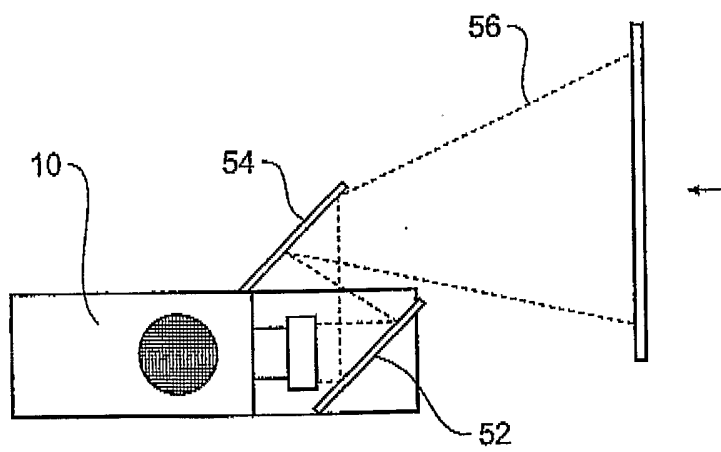

**Fig 10**

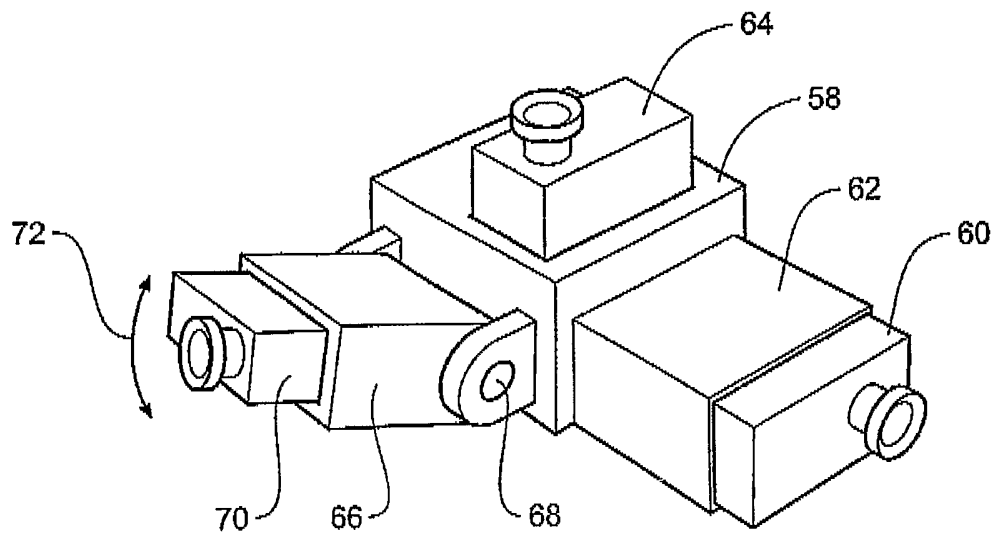

**Fig 11**

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU02/01306

**A. CLASSIFICATION OF SUBJECT MATTER**Int. Cl. <sup>7</sup>: G03B 21/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPAT : image, video, mount, dock, detach, remove, decouple, visual, generating and similar terms

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99/21056 A1 (THREE-FIVE SYSTEMS, INC.) 29 April 1999, page 2 line 17 - page 5 line 2	1, 6, 7, 10 & 11
X	US5664859 A (SALERNO et al.) 9 September 1997, whole document	1-8 & 11



Further documents are listed in the continuation of Box C



See patent family annex

<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>		<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>
---	--	---

Date of the actual completion of the international search  
15 November 2002Date of mailing of the international search report  
25 NOV 2002Name and mailing address of the ISA/AU  
AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
E-mail address: pct@ipaustalia.gov.au  
Facsimile No. (02) 6285 3929

Authorized officer

MICHAEL VALENTINE  
Telephone No : (02) 6283 2797

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU02/01306

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report				Patent Family Member			
WO	9921056	AU	10914/99	AU	41926/99	BR	9914144
		CA	2345976	EP	1119797	US	5993012
		WO	200019269				
US	5664859	NONE					
END OF ANNEX							