

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization

International Bureau



(10) International Publication Number

WO 2021/154086 A1

(43) International Publication Date

05 August 2021 (05.08.2021)

(51) International Patent Classification:

H03G 9/00 (2006.01) *H03G 5/00* (2006.01)
GI0H 1/08 (2006.01) *H04R 3/04* (2006.01)
GI0H 1/12 (2006.01) *H04S 7/00* (2006.01)

SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(21) International Application Number:

PCT/NO2021/050020

(22) International Filing Date:

26 January 2021 (26.01.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20200105 28 January 2020 (28.01.2020) NO

Published:

— with international search report (Art. 21(3))

(71) Applicant: TRONDHEIM AUDIO DEVICES AS
[NO/NO]; Gulspurvvegen 4, 7082 Kattem (NO).

(72) Inventor: DOMBU, Jon-Tore; Gulspurvvegen 4, 7082
Kattem (NO).

(74) Agent: CURO AS; Vestre Rosten 81, 7075 Tiller (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,

(54) Title: METHOD AND DEVICE FOR PROCESSING AN AUDIO SIGNAL

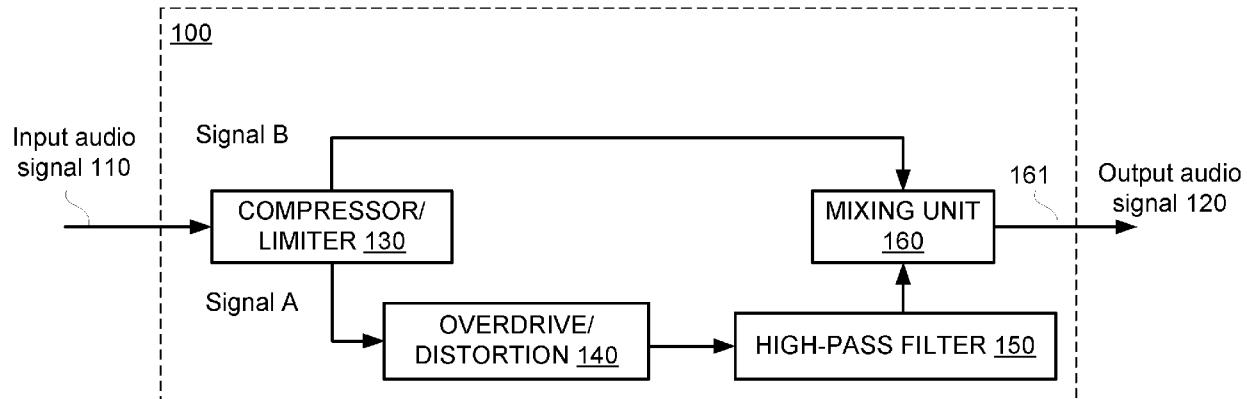


Fig. 1.

(57) Abstract: Method and device for processing an audio signal wherein the audio signal is compressed or limited before being split in first and second signals that may be separately processed to achieve desired effect(s) before the first and second signals are mixed with a desired or preferred balance.

Method and device for processing an audio signal

The present invention is related to a method for processing an audio signal, according to the preamble of claim 1.

5 The present invention is also related to an audio processing device, according to the preamble of claim 5.

Background

There exist many different prior art devices for modifying tonal qualities of electronic signals. In 10 general, the prior art devices for processing musical instrument signals are very limited ability as regards providing the musician with a variety of desired tonal qualities in the resulting sound.

Presently, there exists no solutions that would allow a user to have full control and with the ability to affect one or more selections of frequencies in an audio signal to achieve desired effect(s) on the output signal.

15 The closest prior art for the present invention is known from US2017169808 A1, wherein is described an electronic signal processor for processing signals including a complex first filter, one or more gain stages and a second filter. The first filter is characterized by a frequency response curve that includes multiple corner frequencies, with some corner frequencies being user selectable. The first filter also has at least two user-preset gain levels, which may be alternately selected by a switch. 20 Lower frequency signals are processed by the first filter with at least 12 db/octave slope, and preferably with 18 db/octave slope to minimize intermodulation distortion products by subsequent amplification in the gain stages. A second filter provides further filtering and amplitude control. The signal processor is particularly suited for processing audio frequency signals. Disadvantages with this solution is among others, that there is no compression or limiting of the signal. Further, there are 25 no possibilities for splitting the signal and process one or both signals to achieve a desired effect of the output signal. There is further no possibility for overdrive or distortion, effect loop, low-pass/low-cut or high-pass/high-cut filtration, or octave effect on respective split signals.

In US5515446 A is disclosed an electronic audio processing system for insertion into the line prior to power amplification and a related method are disclosed which component and method render a

frequency response in which undesirably strong frequency bands are flattened relative to the total frequency response by up to 10 dB, thereby providing enhanced dynamic audio reproduction. The audio signal is split into a plurality of frequency bands, each of which is actively, dynamically limited to a predetermined level related to the overall level of the unprocessed signal. The frequency bands 5 are then recombined into a single processed signal which has an overall response, which is as much as 10 dB more linearity than the unprocessed signal. This is a multiband compressor/dynamic EQ with the purpose of leveling (flatten) the frequency response of a signal, which is the opposite goal of the present invention.

In EP 3280155 A1 is disclosed a signal processing device, signal processing method, and speaker 10 device adapted for resolving volume shortage of middle and high band of speaker reproduction sound.

US 2017/0127731 A1 is related to selective audio signal enhancement, wherein an audio signal is enhanced by adding enhancement signals, such as harmonics and/or sub-harmonics of the signal's bass components. To avoid any unwanted enhancement signals during soft passages or speech, the 15 audio signal is monitored for tonal signal components in a frequency range and adding only the enhancement signals if such tonal signals are detected.

From WO 2013/181299 A1 is known an effective and simple psychoacoustic bass generation system generating a harmonic signal having inter-modulation controllable to remain below a threshold level and includes a high-pass filter configured to pass harmonics which are reproducible with fidelity by 20 the loudspeaker or other transducer and a loudness matching block configured to compensate the loudness of the desired harmonics to match the loudness of the original signal.

There is accordingly a need for a method and audio processing device providing compression or limiting of an audio signal that may be split into at least two signals that may be treated differently for achieving a desired effect on the output audio signal, something that will not be possible by using 25 only one signal as is the case with the prior art solutions.

Object

The main object of the present invention is to provide a method for processing an audio signal and audio processing device partly or entirely solving the drawbacks of prior art solutions.

It is further an object of the present invention to provide a method for processing an audio signal and audio processing device enabling a user to achieve desired effect(s) on an audio signal.

An object of the present invention is to provide a method for processing an audio signal and audio processing device enabling a user to achieve desired effect(s) on selected frequencies of an audio

5 signal.

It is an object of the present invention to provide a method for processing an audio signal and audio processing device capable of filtering out frequencies in a more efficient manner than prior art solutions are capable of.

Further objects will appear from the following description, claims and attached drawings.

10

The invention

A method for processing an audio signal according to the present invention is disclosed in claim 1.

Preferable features of the method are disclosed in the dependent claims.

An audio processing device according to the present invention is disclosed in claim 5. Preferable

15 features of the device are disclosed in the dependent claims.

The present invention is related to a novel and inventive way of processing audio signals. By the present invention is provided a method for processing audio signals and audio processing devices enabling a user to achieve desired effect(s) on an audio signal.

20 The method and audio processing device are based on performing a compression or limiting of a full input audio signal and splitting the compressed or limited signal into at least first and second signals that may be separately processed to achieve desired effect(s) on the audio signal, before the first and second signals are mixed according to a desired balance to provide a processed output signal.

According to the present invention there is performed an overdrive or distortion of the first signal

25 before the first and second signals are mixed according to a desired balance.

In accordance with a further embodiment of the present invention, in addition to overdrive or distortion of the first signal, there is performed a low-pass filtering of the second signal before the first and second signals are mixed according to a desired balance.

According to a further embodiment of the present invention, the first signal, in addition to overdrive 5 or distortion, is further high-pass filtered in front, after or both of the overdrive or distortion processing.

In accordance with a further embodiment of the present invention the first signal, in addition to overdrive or distortion, is applied an octave effect, in bypass over the overdrive or distortion processing or in series with the overdrive or distortion processing.

10 According to a further embodiment of the present invention the first signal, in addition to overdrive or distortion, is applied an effect loop, in bypass over the overdrive or distortion processing or in series with the overdrive or distortion processing.

In accordance with a further embodiment of the present invention, the first signal, in addition to overdrive or distortion, is high-cut filtered, after the overdrive or distortion processing, or that the 15 mixed signal is high-cut filtered.

According to a further embodiment of the present invention the second signal, in addition to low-pass filtering, is low-cut filtered or that the mixed signal is low-cut filtered.

In accordance with a further embodiment of the present invention, there is performed equalization of the second signal or mixed signal.

20 According to a further embodiment of the present invention, the mixed signal is impulse response filtered.

A method for processing an audio signal accordingly comprises compressing or limiting an input audio signal, as well as splitting the compressed or limited audio signal into first and second signals. The method further comprises performing overdrive or distortion of the first signal and high-pass 25 filtering the first signal before the first and second signals are mixed with a desired balance.

The method according to a further embodiment of the present invention further comprises performing or applying one or more of the following actions for the first signal before the first and second signals are mixed:

- high-pass filtering in front of the overdrive or distortion processing,

- adding an octave effect, in bypass over the overdrive or distortion processing or in series with the overdrive or distortion processing,
- adding an effect loop, in bypass over the overdrive or distortion processing, in series with the overdrive or distortion processing or in front of the overdrive or distortion processing, and/or

5 - high-cut filtering, after the overdrive or distortion processing.

The method according to a further embodiment of the present invention further comprising performing one or more of the following actions to the second signal before the first and second signals are mixed:

- low-pass filtering,
- low-cut filtering, and/or
- equalization.

The method according to a further embodiment of the present invention further comprising performing one or more of the following actions to the mixed first and second signal:

- high-cut filtering,
- low-cut filtering,
- equalization, and/or
- impulse response filtering.

Accordingly, in the present invention the input audio signal is compressed or limited and next split into first and second signals, which then may be separately processed to achieve desired effect(s) and wherein the separately processed signals are mixed with a desired balance to provide a processed output audio signal.

The present invention thus provides a method and device for processing an audio signal where the user may achieve desired effect(s) on selected frequencies of the audio signal and which next are balanced according to the desires of the user.

25 By the present invention is thus provided an analogue or digital multiband signal processing chain that provides opportunities for controlled overdrive or distortion and effects (pitch, dynamic, filter, modulation, spatial and time based), that may be separately controlled according to the desires of the user.

Further preferable features and advantageous details of the present invention will appear from the
30 following example description, claims and attached drawings.

Example

The present invention will below be described in further detail with references to the attached drawings, where:

Fig. 1 is a principle drawing of a first embodiment of an audio processing device according to the
5 present invention,

Fig. 2 is a principle drawing of a second embodiment of an audio processing device according to
the present invention,

Fig. 3 is a principle drawing of a third embodiment of an audio processing device according to the
present invention,

10 Fig. 4a-b are principle drawings of a fourth embodiment of an audio processing device according
to the present invention,

Fig. 5a-c are principle drawings of a fifth embodiment of an audio processing device according to
the present invention,

15 Fig. 6 is a principle drawing of a sixth embodiment of an audio processing device according to the
present invention,

Fig. 7 is a principle drawing of a seventh embodiment of an audio processing device according to
the present invention,

Fig. 8 is a principle drawing of an eight embodiment of an audio processing device according to
the present invention,

20 Fig. 9 is a principle drawing of a ninth embodiment of an audio processing device according to the
present invention, and

Fig. 10 is a principle drawing of a tenth embodiment of an audio processing device according to the
present invention.

25 The present invention will below be described by reference to the Figures showing embodiments of
the present invention by means of block diagrams. The block diagrams of the different embodiments

make use of common blocks for the same technical features. An introduction of the blocks, as well as a definition thereof is given below.

Limiter: A limiter is per definition an audio limiter. A limiter is a type of compressor designed for a specific purpose, and in the present invention used to limit the level of a signal to a certain threshold.

5 Whereas a compressor will begin smoothly reducing the gain above the threshold, a limiter will almost completely prevent any additional gain above the threshold. Controllable parameters of the limiter will be threshold, release and gain.

Compressor: A compressor performs dynamic range compression (DRC) or simply compression.

10 Compression is an audio signal processing operation that reduces the volume of loud sounds or amplifies quiet sounds thus reducing or compressing an audio signal's dynamic range. Controllable parameters of the compressor will be threshold, ratio, attack, release, gain, as well as a hard and soft knee selector.

Low-pass filter: A low-pass filter (LPF) is a filter that passes signals with a frequency lower than a selected cutoff frequency and attenuates signals with frequencies higher than the cutoff frequency.

15 The amount of attenuation for each frequency depends on the filter design. The filter is sometimes called a high-cut filter, or treble-cut filter in audio applications. A low-pass filter is the complement of a high-pass filter. Controllable parameters of the low-pass filter will be cut-off frequency and slope.

High-pass filter: A high-pass filter (HPF) is an electronic filter that passes signals with a frequency

20 higher than a certain cutoff frequency and attenuates signals with frequencies lower than the cutoff frequency. The filter is sometimes called a low-cut filter in audio applications. The amount of attenuation for each frequency depends on the filter design. Controllable parameters of the High-pass filter will be cut-off frequency and slope.

Equalizer: Equalization, or EQ for short, means boosting or reducing (attenuating) the levels of

25 different frequencies in a signal. The most basic type of equalization familiar to most people is the treble/bass control on home audio equipment. The treble control adjusts high frequencies, the bass control adjusts low frequencies. The EQ can have several bands and several shapes (High-pass, Low-pass, High shelf, Low shelf, Bell shape). The controllable parameters of the equalizer will be, among others, Parametric EQ, Gain (Per band), Center frequency (Per band), Band width (Q) (per band), Filter 30 shape selector (per band), Graphic EQ, Gain (per band).

Impulse response filter: Impulse response (commonly known as IR) is a frequency response wav file, often captured from a setup with a microphone capturing the frequency response of a speaker (and its environment). The impulse response filter can then be used to pass audio through, filtering the signal to have the same frequency response as the mic and speaker used to capture the IR had. The 5 controllable parameters of the impulse response filter will be Blend/mix between two or more IR's, volume for each IR.

Distortion/overdrive: Distortion and overdrive are forms of audio signal processing used to alter the sound of amplified electric musical instruments, usually by increasing their gain, producing a "fuzzy", "growling", or "gritty" tone. The controllable parameters of the distortion/overdrive will be: Drive 10 amount (Gain), type of distortion selector, bypass.

Octave effect/Octaver: An octave effect takes the note (signal) that it detects, and shifts it by exactly 12 notes either up or down. This means that if you play a C note through an octave effect, you will still hear a C, but it will be either an octave higher or lower (or both) than you played it. The controllable parameters of the octave effect/octaver will be Octave up/down selector (Toggle 15 switch), on/off selector for octave up and octave down, octave volume for the selected octave or separate volume for each of the octave.

Effects loop: An effects loop is one or more audio effects units, connected between two points of a signal path (the route that a signal would travel from the input to the output); usually between the pre-amp and power amp stages of an amplifier circuit. The controllable parameters of the effect 20 loop will be On/Off switch.

Reference is now made to Fig. 1, which is a principle drawing of a first embodiment of an audio processing device 100 for processing an audio signal according to the present invention. The audio processing device 100 according to the present invention is provided with an input for an audio signal 110 to be processed by the audio processing device 100 and an output 120 for output of the 25 processed audio signal from the audio processing device 100.

The audio processing device 100 according to the present invention is further provided with a controllable compressor or limiter 130 connected to the input receiving the input audio signal 110. The controllable compressor or limiter 130 compresses or limits the full audio signal 110 and is further arranged to split the processed signal into first A and second B signal paths of the same 30 signal. Alternatively, the audio processing device 100 comprises a separate splitter (not shown) arranged to the output of the compressor or limiter 130 for splitting the signal after the signal has been processed by the compressor or limiter 130. According to an alternative embodiment of the

present invention the controllable compressor or limiter 130 is arranged external of the audio processing device 100, i.e. in front of the input of the audio processing device 100, and wherein the input signal is arranged to a separate splitter (not shown) in the audio processing device 100.

The audio processing device 100 is further comprising means for processing the first signal A in the 5 form of a controllable overdrive or distortion unit 140 arranged in the first signal A path, in the shown embodiment receiving the first signal A from the compressor or limiter 130, and at least one controllable or fixed high-pass filter 150 arranged in the first signal A path, after the controllable overdrive or distortion unit 140, resulting in a processed first signal A at the output of the at least one controllable or fixed high-pass filter 150. The controllable or fixed high pass filter 150 will e.g. 10 be an n^{th} order high-pass filter, where n will be between, but not limited to, 1-5, and e.g. have a frequency range between, but not limited to, 100-5000 Hz.

The audio processing device 100 is further comprising a mixer or mixing unit 160 that combines the first A and second B signal A to form the processed audio signal 120 as output of the audio processing device 100. The mixing unit 160 is e.g. controlled by a potentiometer or volume control for selecting 15 the balance between the first A and second B signal.

By means of the compressor or limiter 130 the input audio signal 110 is compressed and split into the first A and second B one may process and affect differently. In this embodiment the second signal B is not further processed, while the first signal A is processed through the overdrive or distortion unit 140 where drive amount (gain) and type of distortion is added to the first signal A 20 before the signal is further processed by the at least one fixed or controllable high-pass filter 150 to filter out frequencies higher than the set frequency range of the at least one high-pass filter 150. In this manner one can add the effect of drive amount and type of distortion to the first signal A, before the first A and second B signal are mixed by a preferred/desired balance by the mixing unit 160. I.e. the embodiment provides a solution wherein frequency signals in the mid-range of the input signal 25 are affected. By preferred/desired balance is meant that the balance between the first signal A and the second signal B is given by e.g. X first signal A + Y second signal B = Z , wherein the X and Y are positive numbers e.g. between 0.1% and 99,9% and $Z = 100\%$, or X and Y are integer numbers between 1 and 99. Another scale that may be used for balancing between the first and second signal may be that X and Y are positive numbers between 0 and 0.99 and $Z=1$. Other scales for controlling 30 the balance between the first A and second B signal will be obvious for a skilled person, based on these examples, such as logarithmic scales, S-curve-scale, or similar. Accordingly, if the balance between the first signal A and second signal B is 50%/0.5, the mixed signal 161 will be 50 %/0.5 of the first signal A and 50 %/0.5 of the second signal B. If e.g. the balance between the first signal A

and second B signal at the ratio 70%/0.7 and 30 %/0.3, the mixed signal 161 will be 70%/0.7 of the first signal A and 30 %/0.3 of the second signal B. The number examples are just for illustration purposes and not to be considered as limiting for balance of the signals in the present invention, as other balances may also be used in the present invention.

5 In an alternative embodiment, not shown, there are arranged separate controls for controlling the amount of the respective first A and second B signals to the mixing unit 160. This will enable separately adjustable output volumes for the signal paths.

Reference is now made to Figure 2 which is a principle drawing of a second embodiment of the audio processing device 100 according to the present invention, which comprises the components 10 of the first embodiment, but in addition comprises at least one fixed or controllable low-pass filter 170 arranged between the controllable compressor or limiter 130 and mixing unit 160 in the second signal B path. The at least one fixed or controllable low-pass filter 170 will e.g. be an n^{th} order low-pass filter, where n will be between, but not limited to, 1-5, and e.g. have a frequency range between, but not limited to, 60-1000 Hz.

15 According to the present invention, the low-pass filter(s) 170 and high-pass filter(s) 150 shall not overlap each other. If the low-pass filter 170 is set to filter out all frequencies up to a frequency f_1 , the high-pass filter(s) 150 will be set to filter frequencies from f_2-f_3 , wherein $f_2>f_1$, and f_3 is an upper limit. E.g. if the low-pass filter(s) 170 is set to filter out frequencies f_1 lower than 200 Hz, the high-pass filter(s) 150 is set to filter out frequencies from $f_2=200$ Hz to f_3 of a desired value, such as 20 e.g. 1 kHz.

In this embodiment, the first signal A is processed as described above, while the second signal B is processed through the at least one fixed or controllable low-pass filter 170 that filters out all frequencies in the second signal B below the set frequency of the low-pass filter 170 before the first A and second B signals are mixed in the mixing unit 160. This embodiment provides improved 25 separation of the frequency bands comprising signal A and signal B. This reduces the additionality of the upper frequencies in the mix, and ensures better phase coherence.

Reference is now made to Figure 3 which is a principle drawing of a third embodiment of the audio processing device 100 according to the present invention, which comprises the components of the second embodiment, but in addition comprises at least one second fixed or controllable high-pass 30 filter 151 arranged between the controllable compressor or limiter 130 and the controllable overdrive or distortion unit 140 in first signal A path. The second high-pass filter 151 could have the same settings as the high-pass filter 150 or a frequency range f_4-f_5 , where the frequency $f_4=f_2$ and

the frequency f5 is higher than the frequency f3. The controllable or fixed high-pass filter 151 will e.g. be an nth order high-pass filter, where n will be between, but not limited to, 1-5, and e.g. have a frequency range between, but not limited to, 100-5000 Hz.

In this embodiment, the first signal A is processed by at least one fixed or controllable high-pass 5 filter 151 filtering all frequencies above the mentioned low-pass filter 170, such that the first signal A to be processed is in a frequency range above the second signal B, which is processed by the overdrive or distortion unit 140, before the processed signal from the overdrive or distortion unit 140 is processed by at least one high-pass filter 150 with a desired frequency range. Accordingly, in this embodiment the overdrive or distortion unit 140 will only process frequencies higher than the 10 frequencies of the processed second signal B.

This affects the tone of the distortion by filtering the frequencies to be processed by the overdrive or distortion unit 140.

Reference is now made to Fig. 4a-b showing a fourth embodiment of the audio processing device 100 according to the present invention, which comprises at least the components of the first, second 15 or third embodiment. In the shown embodiment, which is based on the embodiment of Fig. 3, the audio processing device 100 further comprises at least one octave effect unit (octaver) 180 in the first signal A path. According to one embodiment of the present invention the octave effect unit 180 is arranged in a bypass of the overdrive or distortion unit 140, as shown in Figures 4a-b. Accordingly, the octave effect unit 180 receives the first signal A directly from the compressor or limiter 130 or 20 the signal from the second high pass-filter 151, if present, and the signal from octave effect unit 180 is added to (summarized with) the signal of the overdrive or distortion unit 140 before the signal is supplied the high-pass filter 150, as shown in Figures 4a.

In an alternative embodiment, as shown in Fig. 4b, the octave effect unit 180 is arranged to the 25 output of the overdrive or distortion unit 140, and the output of the octave effect unit 180 is added to (summarized with) the output signal of the overdrive or distortion unit 140 before the signal is supplied to the high-pass filter 150.

Accordingly, in this embodiment one in addition is processing the first signal A by an octave effect 30 unit 180, either directly from the compressor or limiter 130 or via the high-pass filter 151, if present, bypassing the overdrive or distortion unit 140 or an octave effect unit 180 arranged to the output of the overdrive or distortion unit 140, wherein the output signal from the octave effect unit 180 is added to (summarized with) the output of the overdrive or distortion unit 140 before the signal is

supplied to the high-pass filter 150. By this embodiment, the first signal A may be shifted an octave up or down to provide an effect on the processed output signal.

Accordingly, adding either a distorted octave effect (Fig. 4a), or a non-distorted octave effect (Fig. 4b) to the signal path A.

5 Reference is now made to Fig. 5a-c showing a fifth embodiment of the audio processing device 100 according to the present invention, which comprises at least the components of the first, second, third or fourth embodiment. In the shown embodiment, which is based on the embodiment of Fig. 3, the audio processing device 100 further comprises at least one effect loop 190 in the first signal A path. According to one embodiment of the present invention, the effect loop 190 is arranged in a 10 bypass of the overdrive or distortion unit 140, as shown in Fig. 5a. Accordingly, the effect loop 190 receives the first signal A directly from the compressor or limiter 130 or the signal from the second high pass-filter 151, if present, and the signal from the effect loop 190 is added to (summarized with) the output of the overdrive or distortion unit 140.

15 In an alternative embodiment, as shown in Fig. 5b, the effect loop 190 is arranged in series between the overdrive or distortion unit 140 and the high-pass filter 150, accordingly processing the signal from the overdrive or distortion unit 140 before supplying it to the high-pass filter 150.

In an alternative embodiment, as shown in Fig. 5c, the effect loop 190 is arranged in series between the compressor or limiter 130 or the signal from the second high-pass filter 151, if present, and the overdrive or distortion unit 140.

20 Accordingly, in this embodiment the first signal A is in addition processed by an effect loop 190, either directly from the compressor or limiter 130 or via the high-pass filter 151, if present, and bypassing the overdrive or distortion unit 140 or arranged in series in front of or after the overdrive distortion unit 140.

This provides the possibility of adding third party effects to the signal chain of signal A.

25 Reference is now made to Fig. 6 showing a sixth embodiment of the audio processing device 100 according to the present invention, which comprises at least the components of the first, second, third, fourth or fifth embodiment. In the shown embodiment, which is based on the embodiment of Fig. 3, the audio processing device 100 further comprises a high-cut filter 200 in the first signal A path or in the mixed signal 161 from the mixing unit 160. According to the present invention, the 30 high-cut filter 200 will be arranged in the first signal A path after the overdrive or distortion unit 140

or after the mixing unit 160, as shown in Fig. 6. The high-cut filter 200 is set to filter out frequencies higher than the high-pass filter(s) 150-151.

Accordingly, Figures 1, 3, 4a-b, 5a-c and 6 are disclosing how the first signal A may be processed. In the following there will be described how the second signal B may be processed according to the 5 present invention.

Reference is now made to Figure 7 showing a seventh embodiment of the audio processing device 100 according to the present invention, which comprises at least the components of the first, second, third, fourth, fifth or sixth embodiment. In the shown embodiment, which is based on the embodiment of Fig. 3, the audio processing device 100 further comprises a low-cut filter 210 in the 10 second signal B path or in the mixed signal 161 from the mixing unit 160. According to the present invention, the low-cut filter 210 may be arranged at any location in the second signal B path or after the mixing unit 160, as shown in Fig. 7. The low-cut filter 210 is set to filter out frequencies lower than the low-pass filter(s) 170.

Reference is now made to Figures 8 showing an eighth embodiment of the audio processing device 15 100 according to the present invention, which comprises at least the components of the first, second, third, fourth, fifth, sixth or seventh embodiment. In the shown embodiment, which is based on the embodiment of Fig. 3, the audio processing device 100 further comprises an equalizer 220 in the second signal B path or in the mixed signal 161 from the mixing unit 160. According to the present invention, the equalizer 220 may be arranged at any location after the low-pass filter 170 in 20 the second signal B path or after the mixing unit 160, as shown in Fig. 7, alternatively without any low-pass filter 170 in the second signal B path.

Reference is now made to Figure 9 showing a ninth embodiment of the audio processing device 100 according to the present invention, which comprises at least the components of the first, second, third, fourth, fifth, sixth, seventh or eighth embodiment. In the shown embodiment, which is based 25 on the embodiment of Fig. 3, the audio processing device 100 further comprises at least one impulse response filter 230 in the processed output audio signal 120. According to the present invention, the at least one impulse response filter 230 may be arranged at any location after the mixing unit 160 and applied to the mixed signal 161. The impulse response filter 230 is preferably arranged in front of the equalizer 220, if present.

30 The addition of an impulse response filter 230 gives the possibility to mimic speakers, cabinets or other acoustic elements.

Reference is now made to Figure 10 which is a principle drawing of a tenth embodiment where all the above described components have been included in the same embodiment of the audio processing device 100 according to the present invention by one of the above described embodiments. In addition, the audio processing device 100 comprises a gain reduction (GR) meter 5 300 that visually indicates the gain reduction applied by the compressor or limiter 130 for the user.

How the present invention works will now be described. By means of the compressor or limiter 130 the input audio signal 110 is compressed and split into first A and second B signals one may process differently. By means of the present invention, it is possible to process the first A and second B signals separately and combined to have effects on selected frequencies and filter out frequencies 10 in a way that cannot be done on a single, full-range signal.

By the present invention it is possible to it is possible to selectively filter out undesired frequencies, such as e.g. the mid frequencies, in a way that is not possible with a bell shaped equalizer nor is it possible on a single signal, full-range signal.

The present invention provides opportunities for achieving desired effect(s) on a selected range of 15 frequencies, and not on the full signal. E.g., one may achieve desired effect(s) on the high frequencies and not the low frequencies.

By the present invention, it is possible to have controlled overdrive or distortion on a selected frequency range of the audio signal. E.g., it will with the present invention be possible to have overdrive or distortion on the high frequency range of the audio signal and not on the low frequency 20 range of the audio signal.

It is further possible to have controlled effects, such as pitch, dynamic, filter, modulation, spatial and time based, on the selected frequency range of the audio signal.

By the present invention, it is further possible to use an effect loop with external and/or integrated effects on a selected frequency range of the audio signal.

25 Further, as the mixing unit is controllable one will be able to control the balancing of the first and second signal as desired in relation to the application.

The present invention will especially be applicable for tonal audio signals, such as from music instruments, but may be used in any application where it is a need for processing the audio signal.

The above-described embodiments may be combined to form new embodiments within the scope of the claims.

Claims

1. A method for processing an audio signal, wherein the method comprises:

- compressing or limiting an input audio signal (110), as well as splitting the compressed or limited audio signal into a first (A) and second (B) signals,
- performing an overdrive or distortion of the first (A) signal,
- performing high-pass filtering after the overdrive or distortion processing, and
- mixing the first (A) and second (B) signals with a desired or preferred balance.

2. Method according to claim 1, wherein the method further comprising performing or applying one

10 or more of the following actions to the first signal (A) before the first (A) and second (B) signals are mixed:

- high-pass filtering in front of the overdrive or distortion processing,
- adding an octave effect, in bypass over the overdrive or distortion processing or in series with the overdrive or distortion processing,
- adding an effect loop, in bypass over the overdrive or distortion processing, in series with the overdrive or distortion processing or in front of the overdrive or distortion processing, and/or
- high-cut filtering, after the overdrive or distortion processing.

3. Method according to claim 1 or 2, wherein the method further comprising performing one or

more of the following actions to the second signal (B) before the first (A) and second (B) signals are

20 mixed:

- low-pass filtering,
- low-cut filtering, and/or
- equalization.

4. Method according to any of the preceding claims, wherein the method further comprising

25 performing one or more of the following actions to the mixed first (A) and second (B) signal:

- high-cut filtering,
- low-cut filtering,

- equalization, and/or
- impulse response filtering.

5. Audio processing device (100) comprising an input for an audio signal (110) and an output for a processed audio signal (120), wherein the audio processing device (100) comprising:

5 - an internal or external controllable compressor or limiter (130) for compressing or limiting an input audio signal, as well as arranged to split the compressed or limited audio signal into first (A) and second (B) signal paths, or split by a separate splitter arranged to the controllable compressor or limiter (130),

10 - a controllable overdrive or distortion unit (140) arranged in the first (A) signal path processing the first (A) signal,

- at least one controllable or fixed high-pass filter (150) in the first (A) signal path, after the controllable overdrive or distortion unit (140), and

- a mixing unit (160) mixing the first (A) and second (B) signal with a desired or preferred balance.

6. Audio processing device (100) according to claim 5, wherein the audio processing device (100) further comprises at least one second controllable or fixed high-pass filter (151) in the first (A) signal path, in front of the controllable overdrive or distortion unit (140).

7. Audio processing device (100) according to claim 5, wherein the audio processing device (100) further comprises at least one fixed or controllable low-pass filter (170) in the second (B) signal path.

8. Audio processing device (100) according to claim 5, wherein the audio processing device (100) further comprises at least one octave effect unit (180) in the first signal (A) path.

9. Audio processing device (100) according to claim 5, wherein the audio processing device (100) further comprises at least one effect loop (190) in the first signal (A) path.

10. Audio processing device (100) according to any preceding claim 5-9, wherein the audio processing device (100) further comprises one or more of:

25 - at least one high-cut filter (200) in the first signal (A) path arranged after the overdrive or distortion unit (140), or in mixed signal (161) from the mixing unit (160),

- at least one low-cut filter (210) in the second signal (B) path or in mixed signal (161) from the mixing unit (160), and/or
- at least one equalizer (220) in the second signal (B) path or in mixed signal (161) from the mixing unit (160).

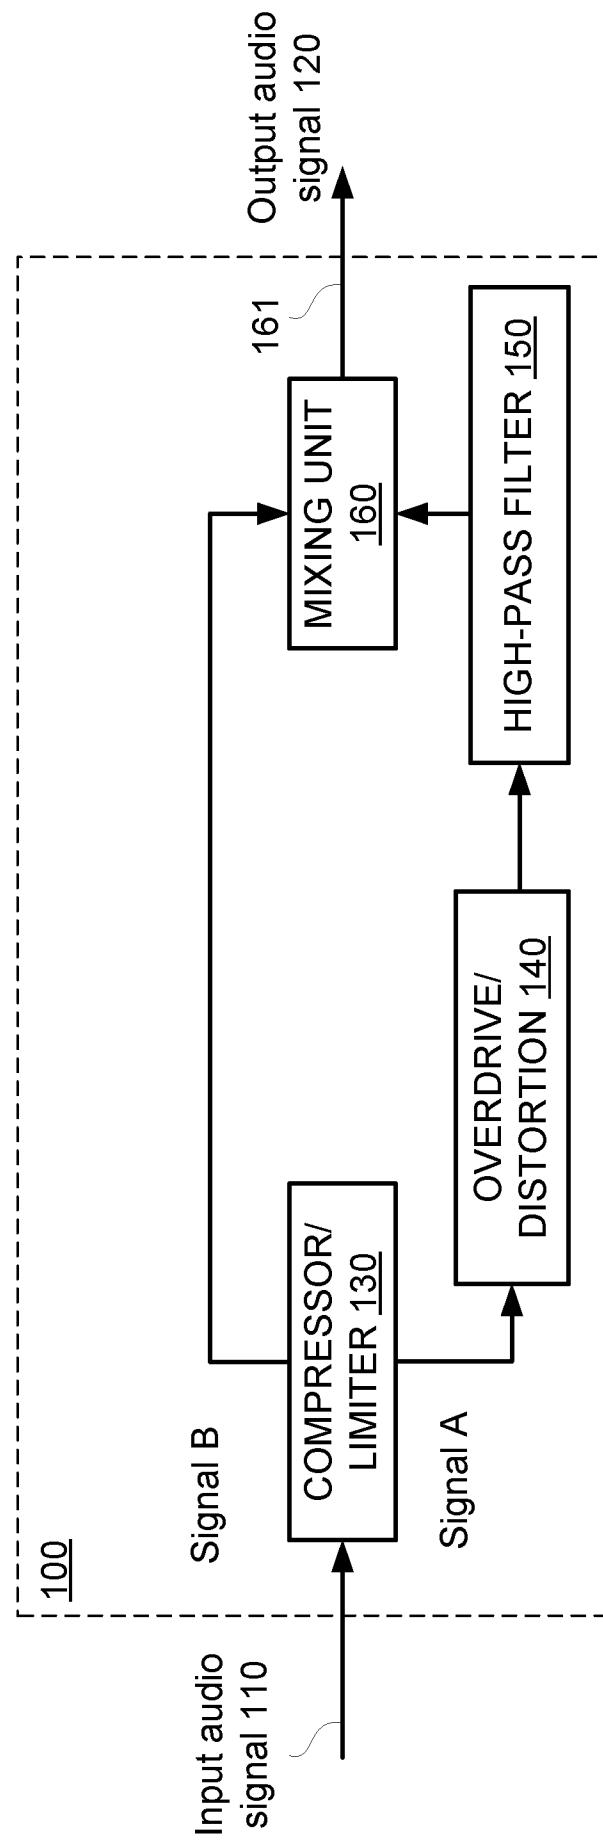


Fig. 1.

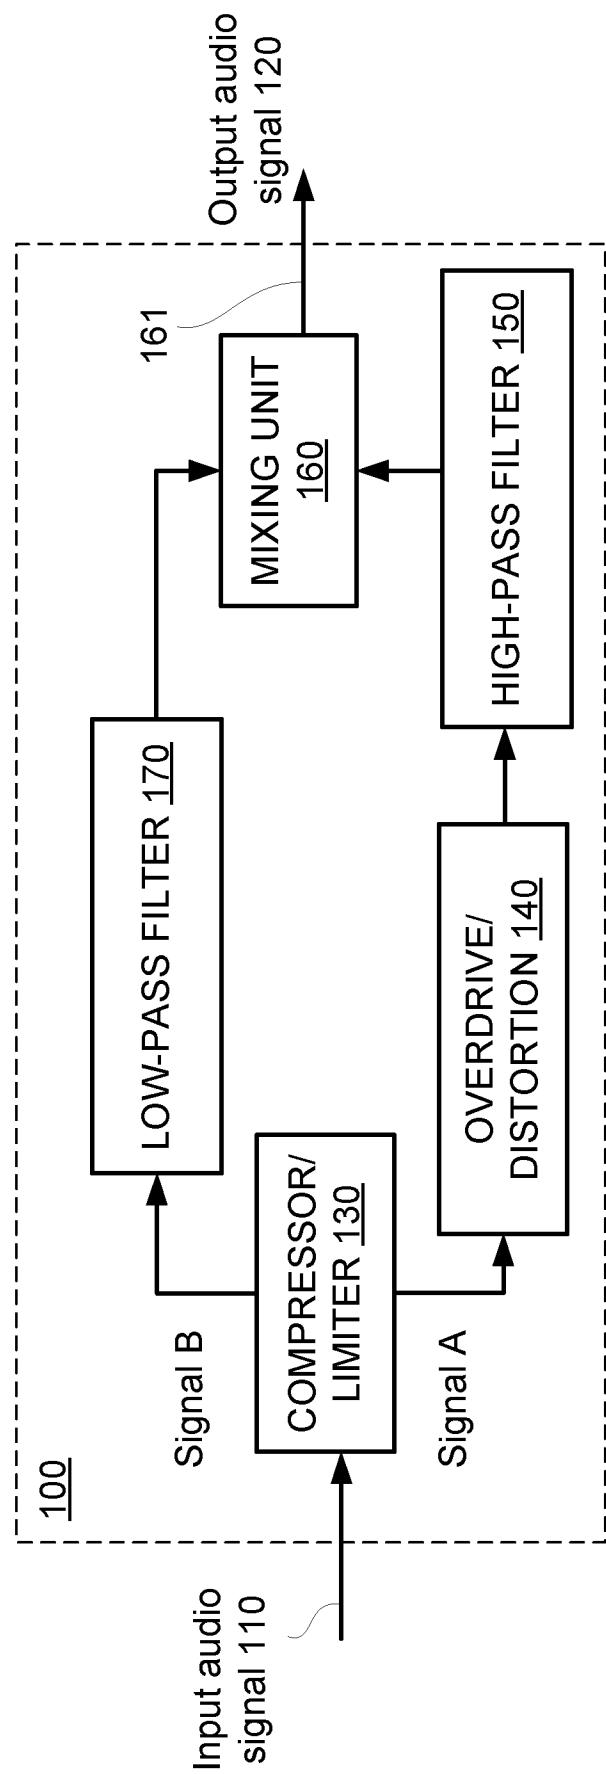


Fig. 2.

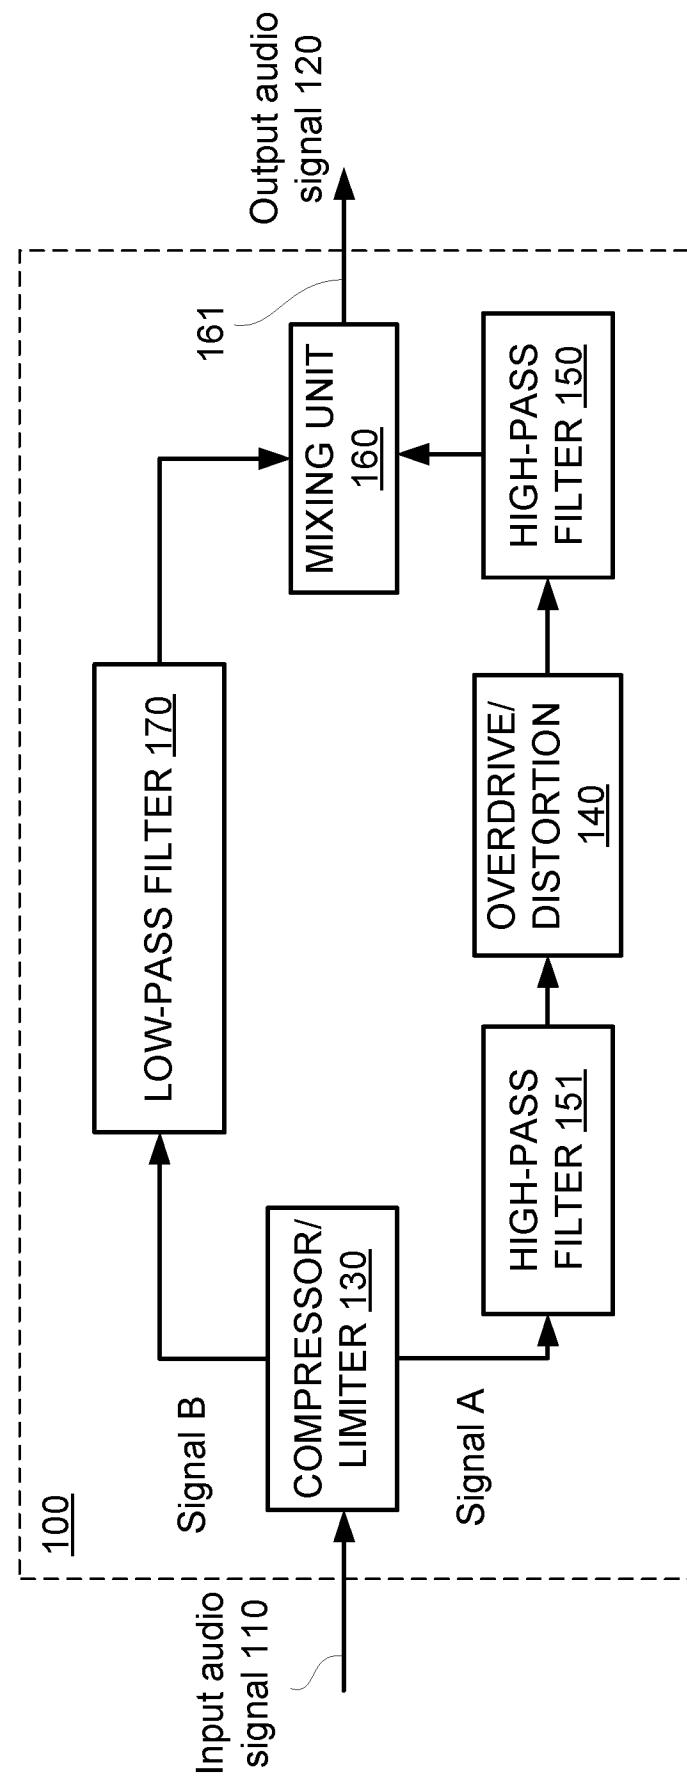


Fig. 3.

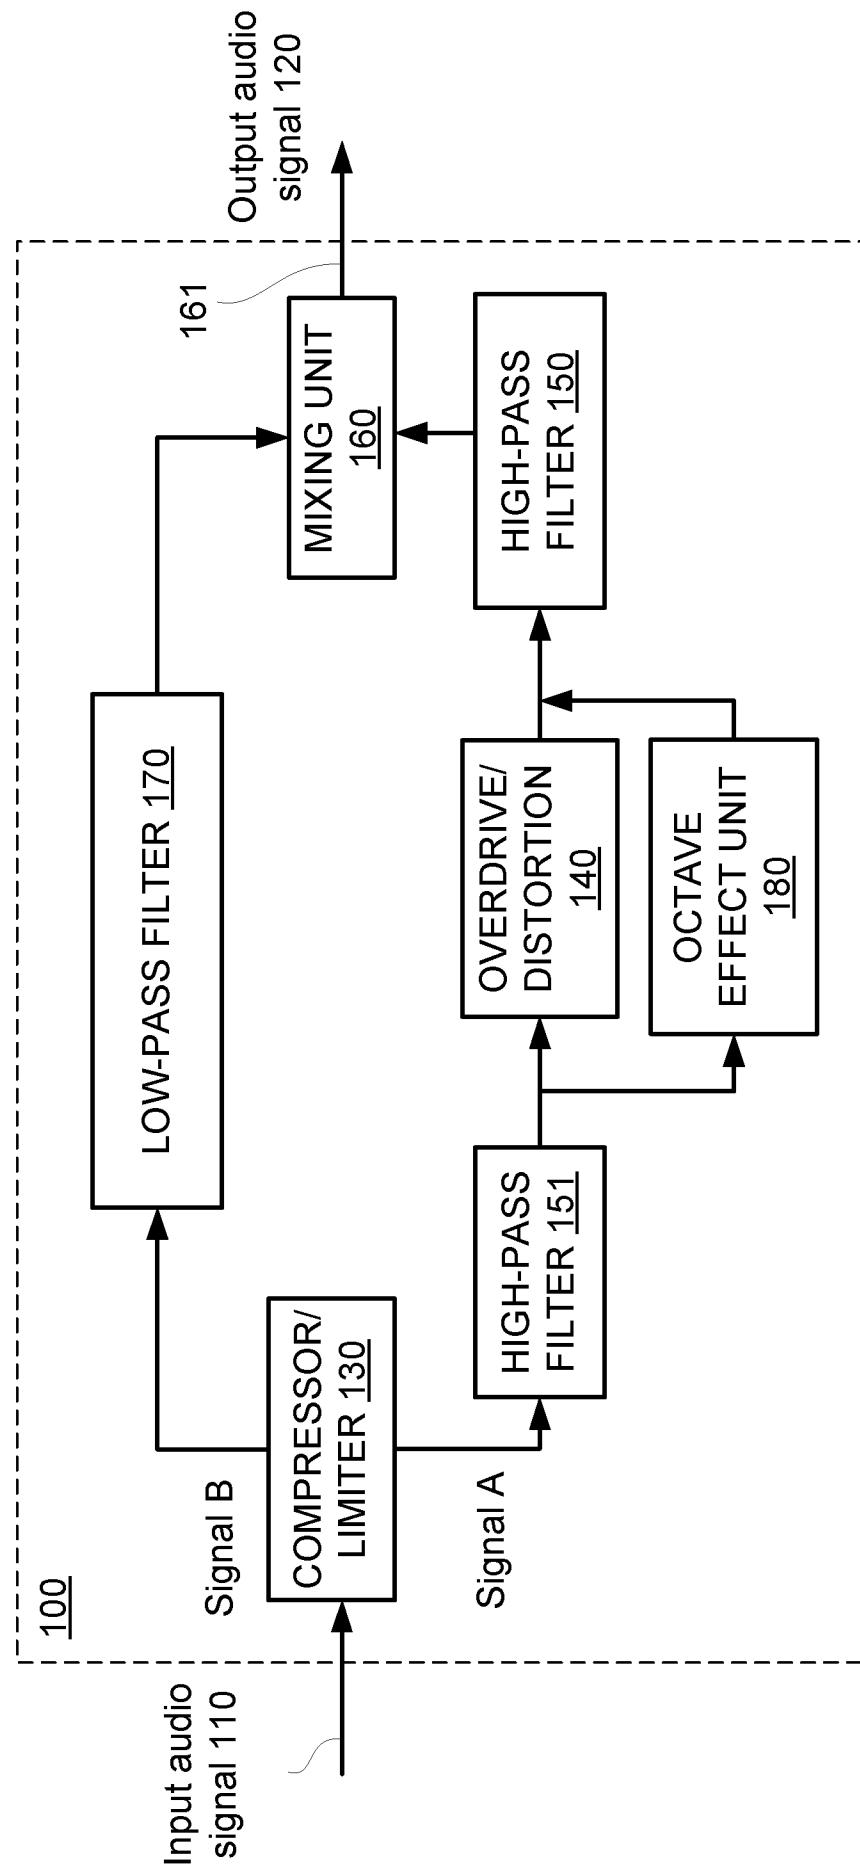


Fig. 4a.

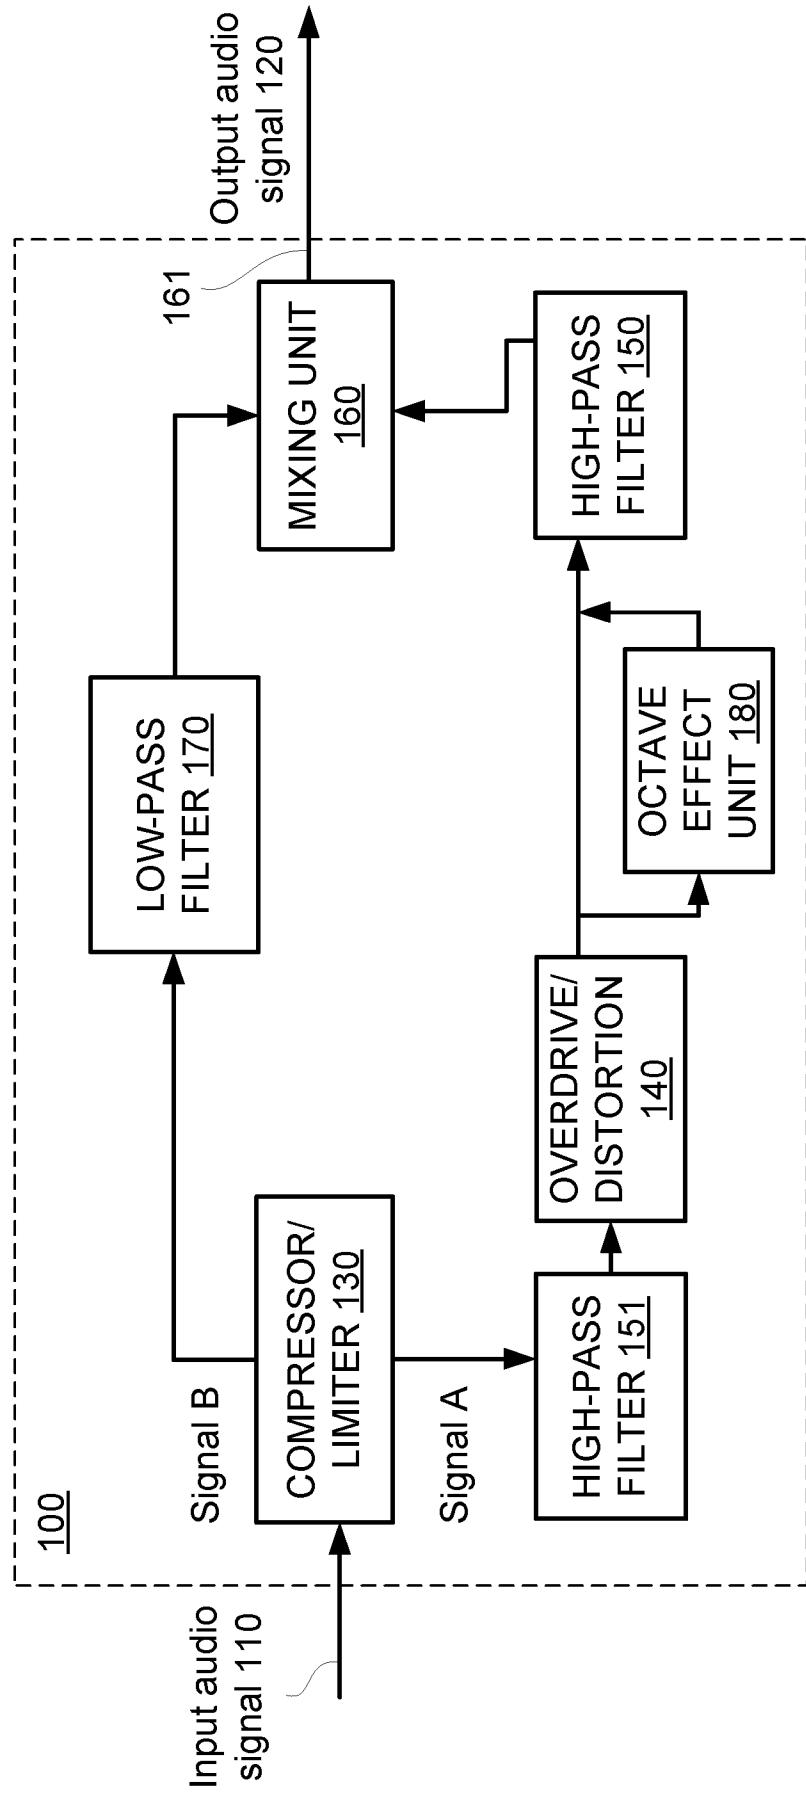


Fig. 4b.

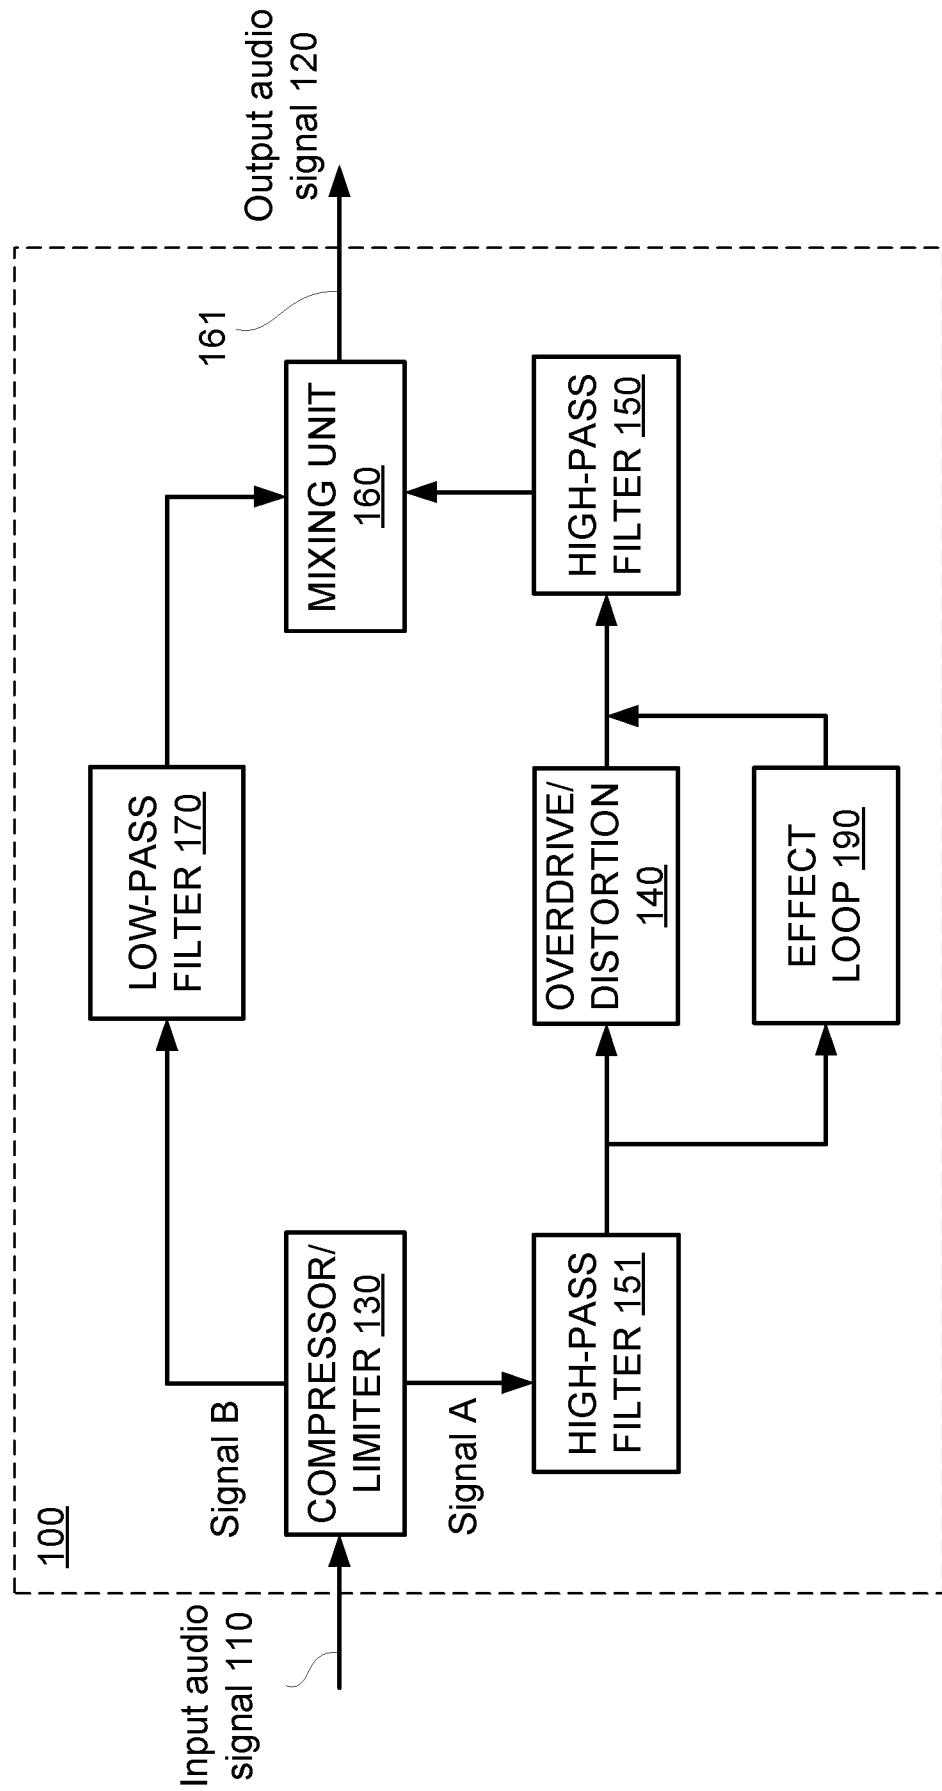


Fig. 5a.

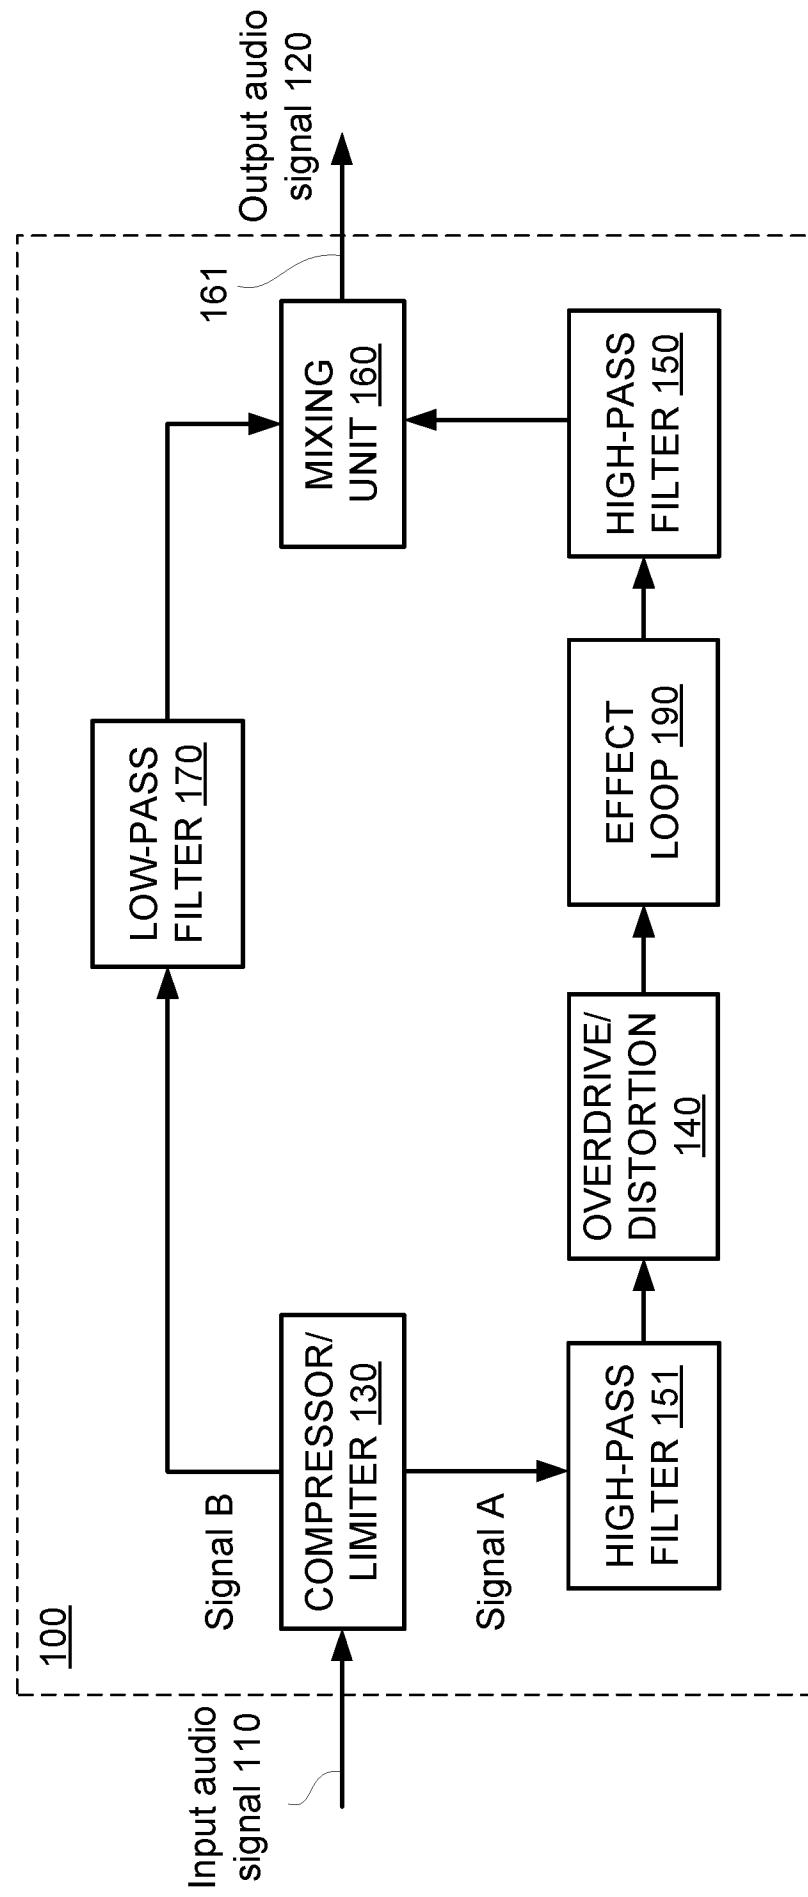


Fig. 5b.

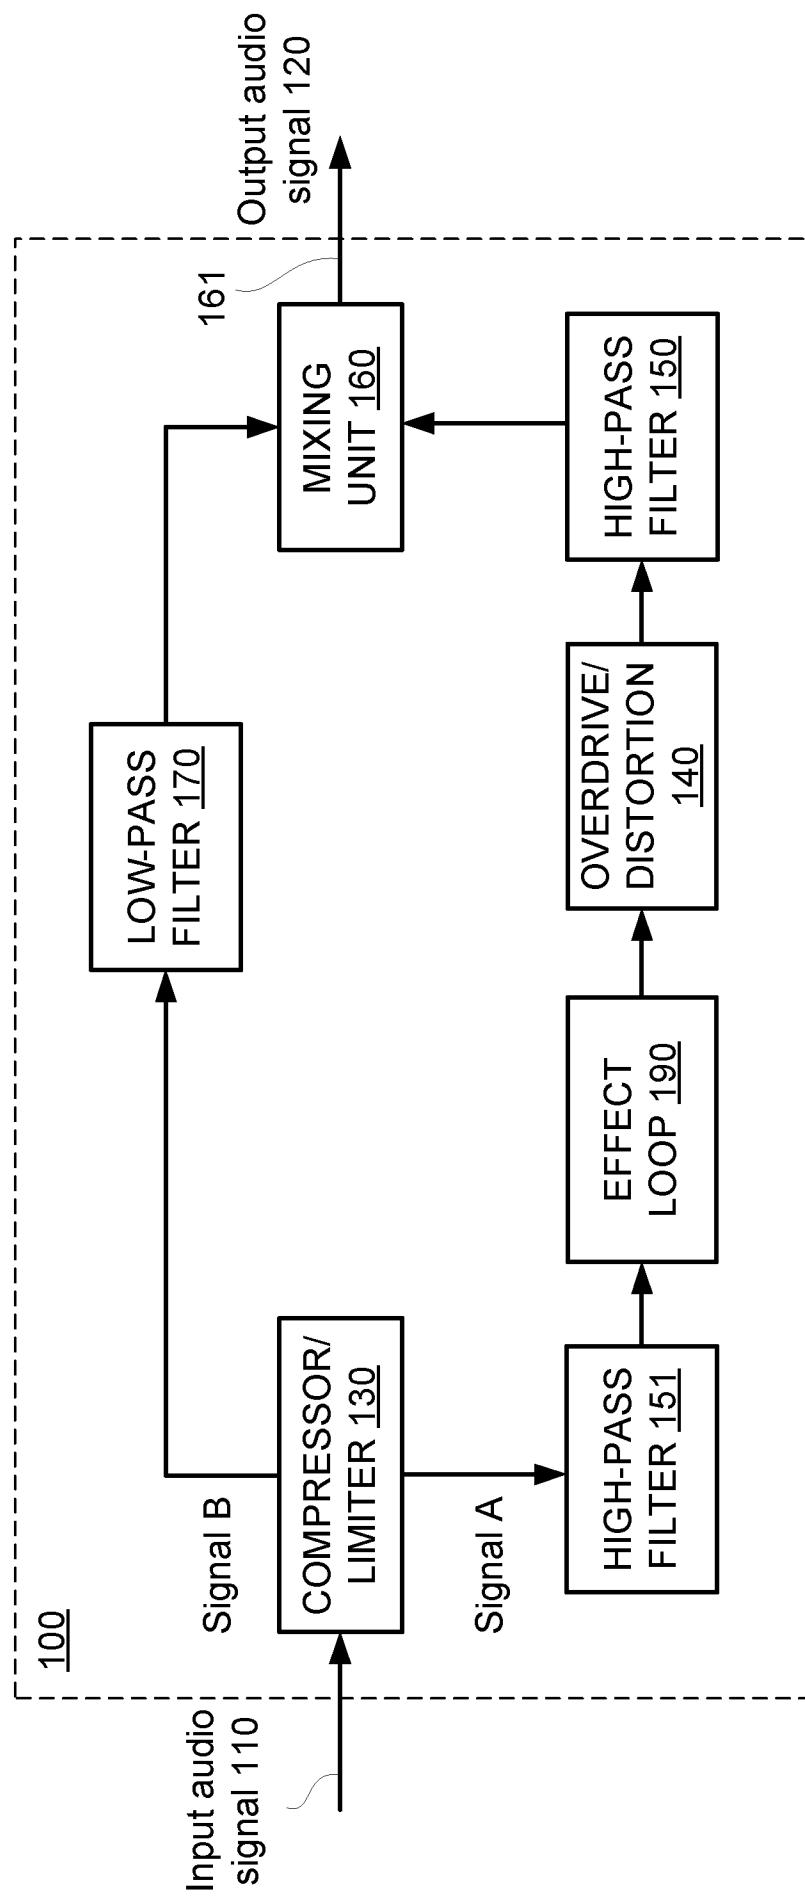


Fig. 5c.

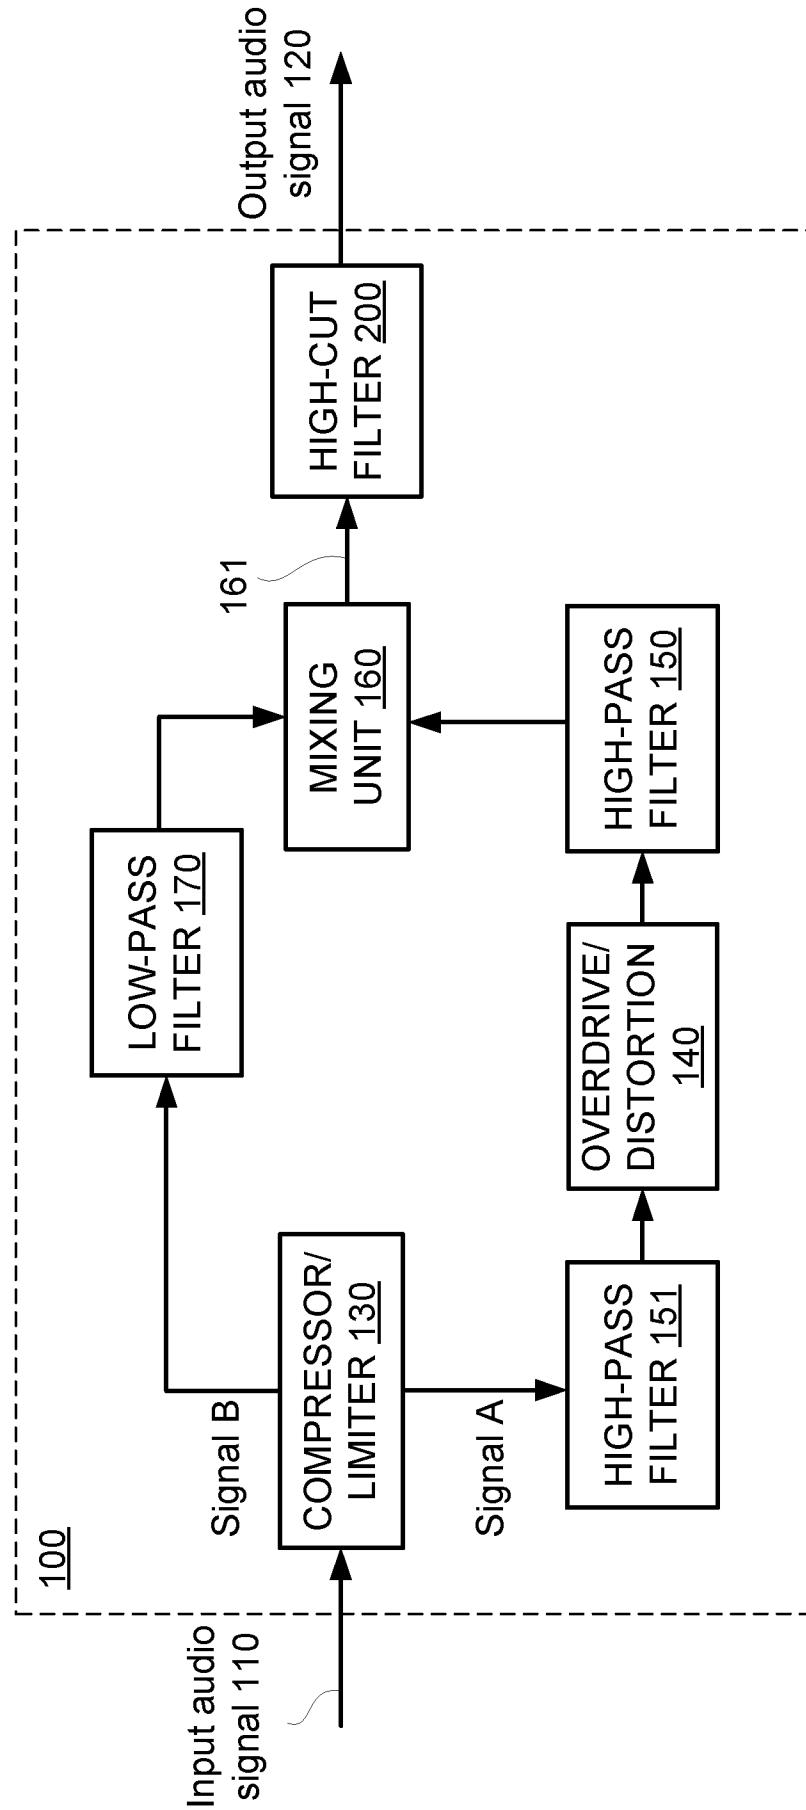


Fig. 6.

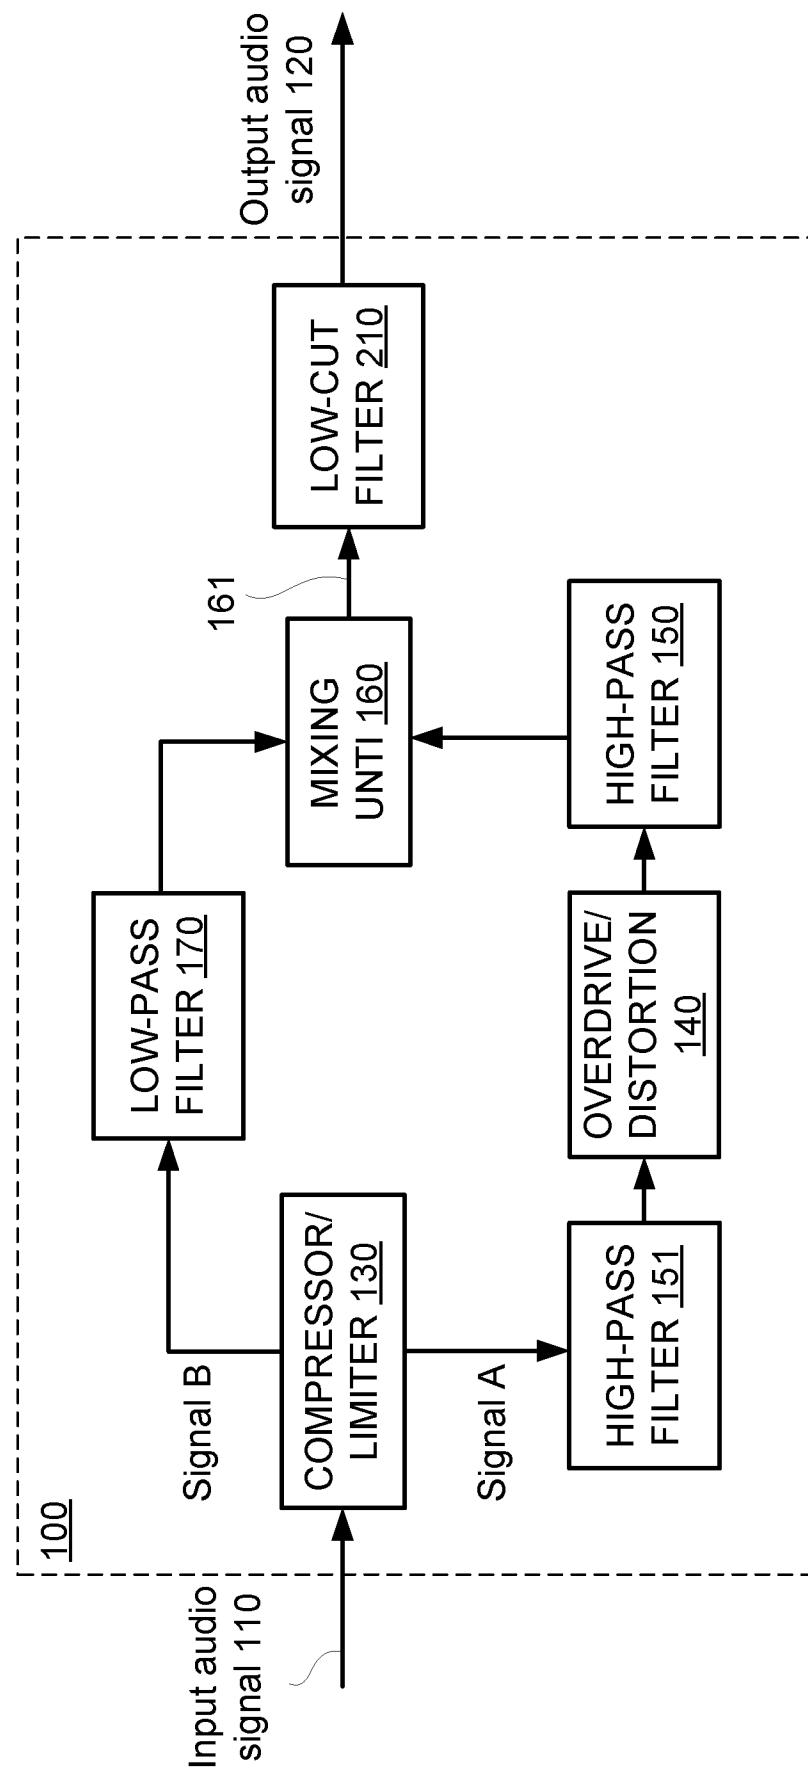


Fig. 7.

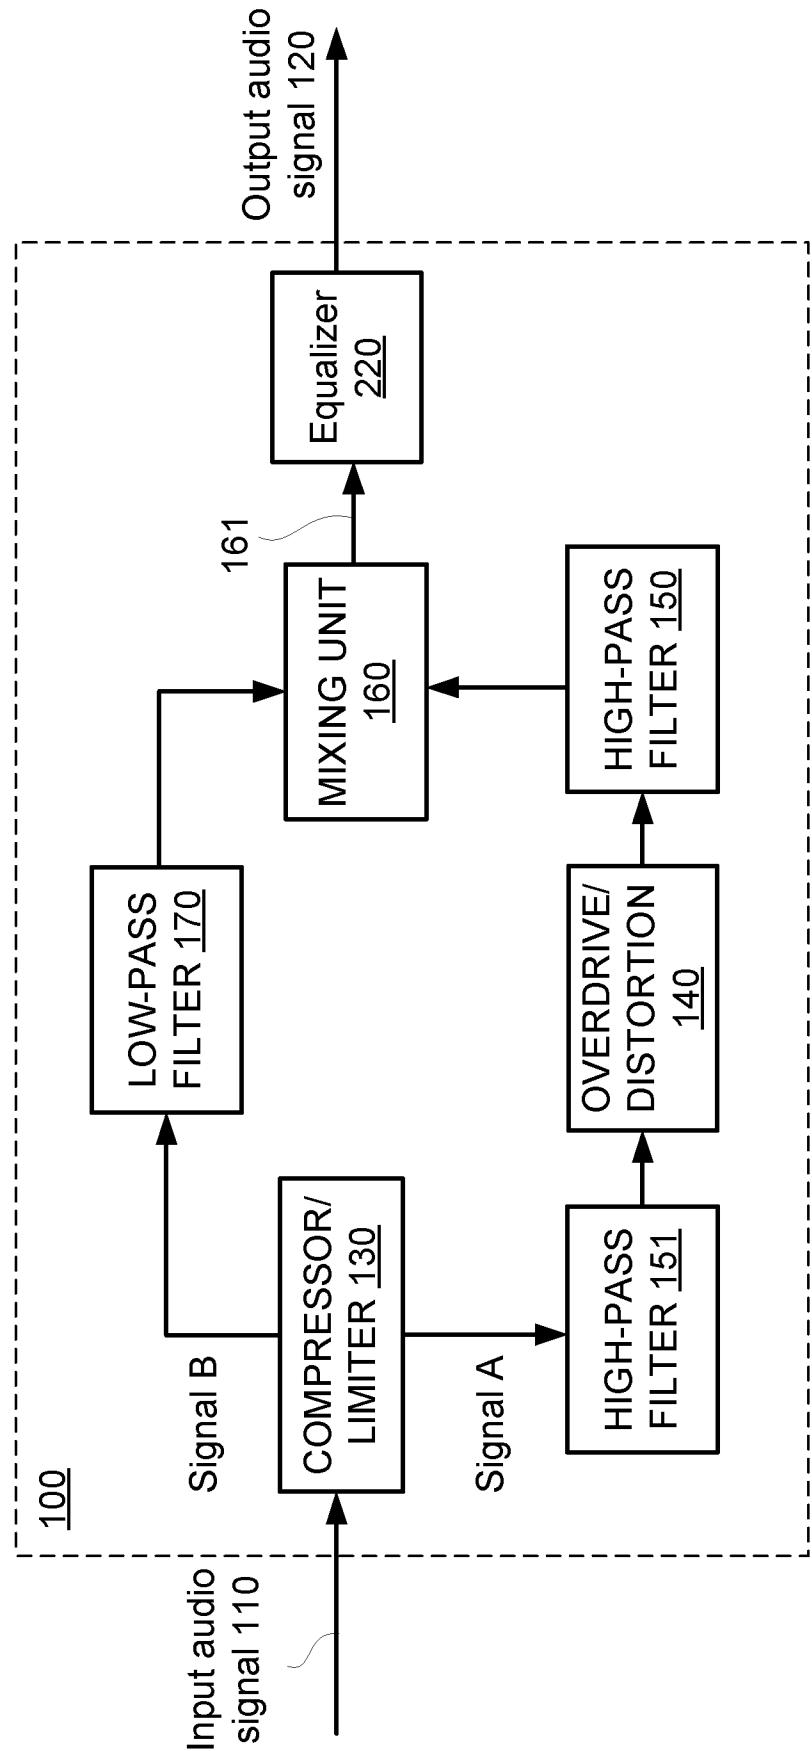


Fig. 8.

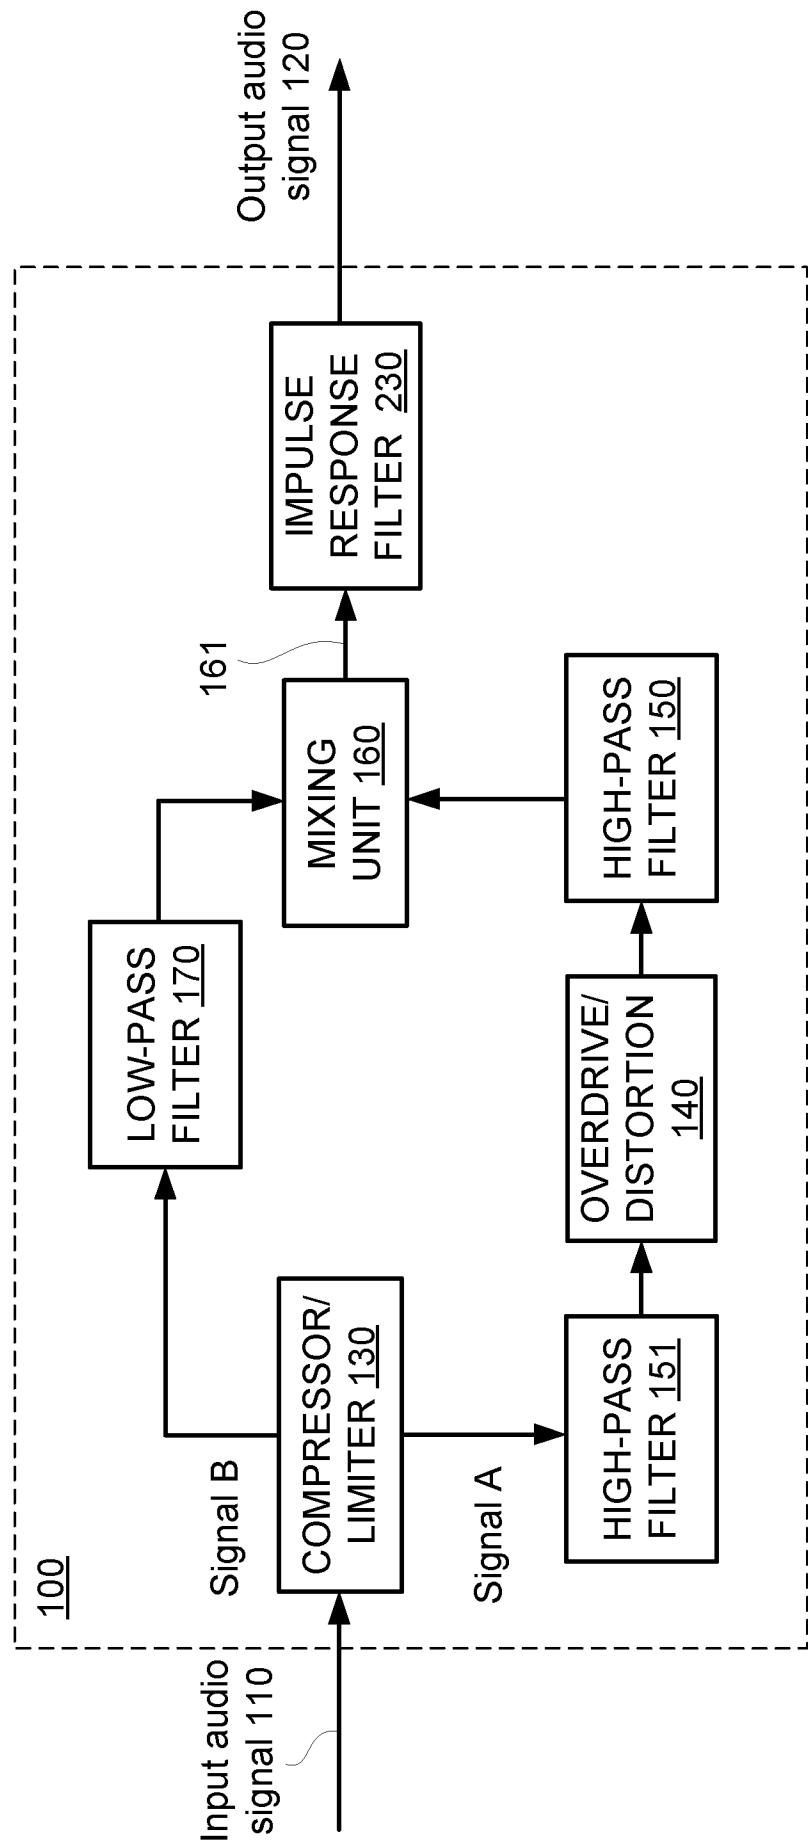


Fig. 9.

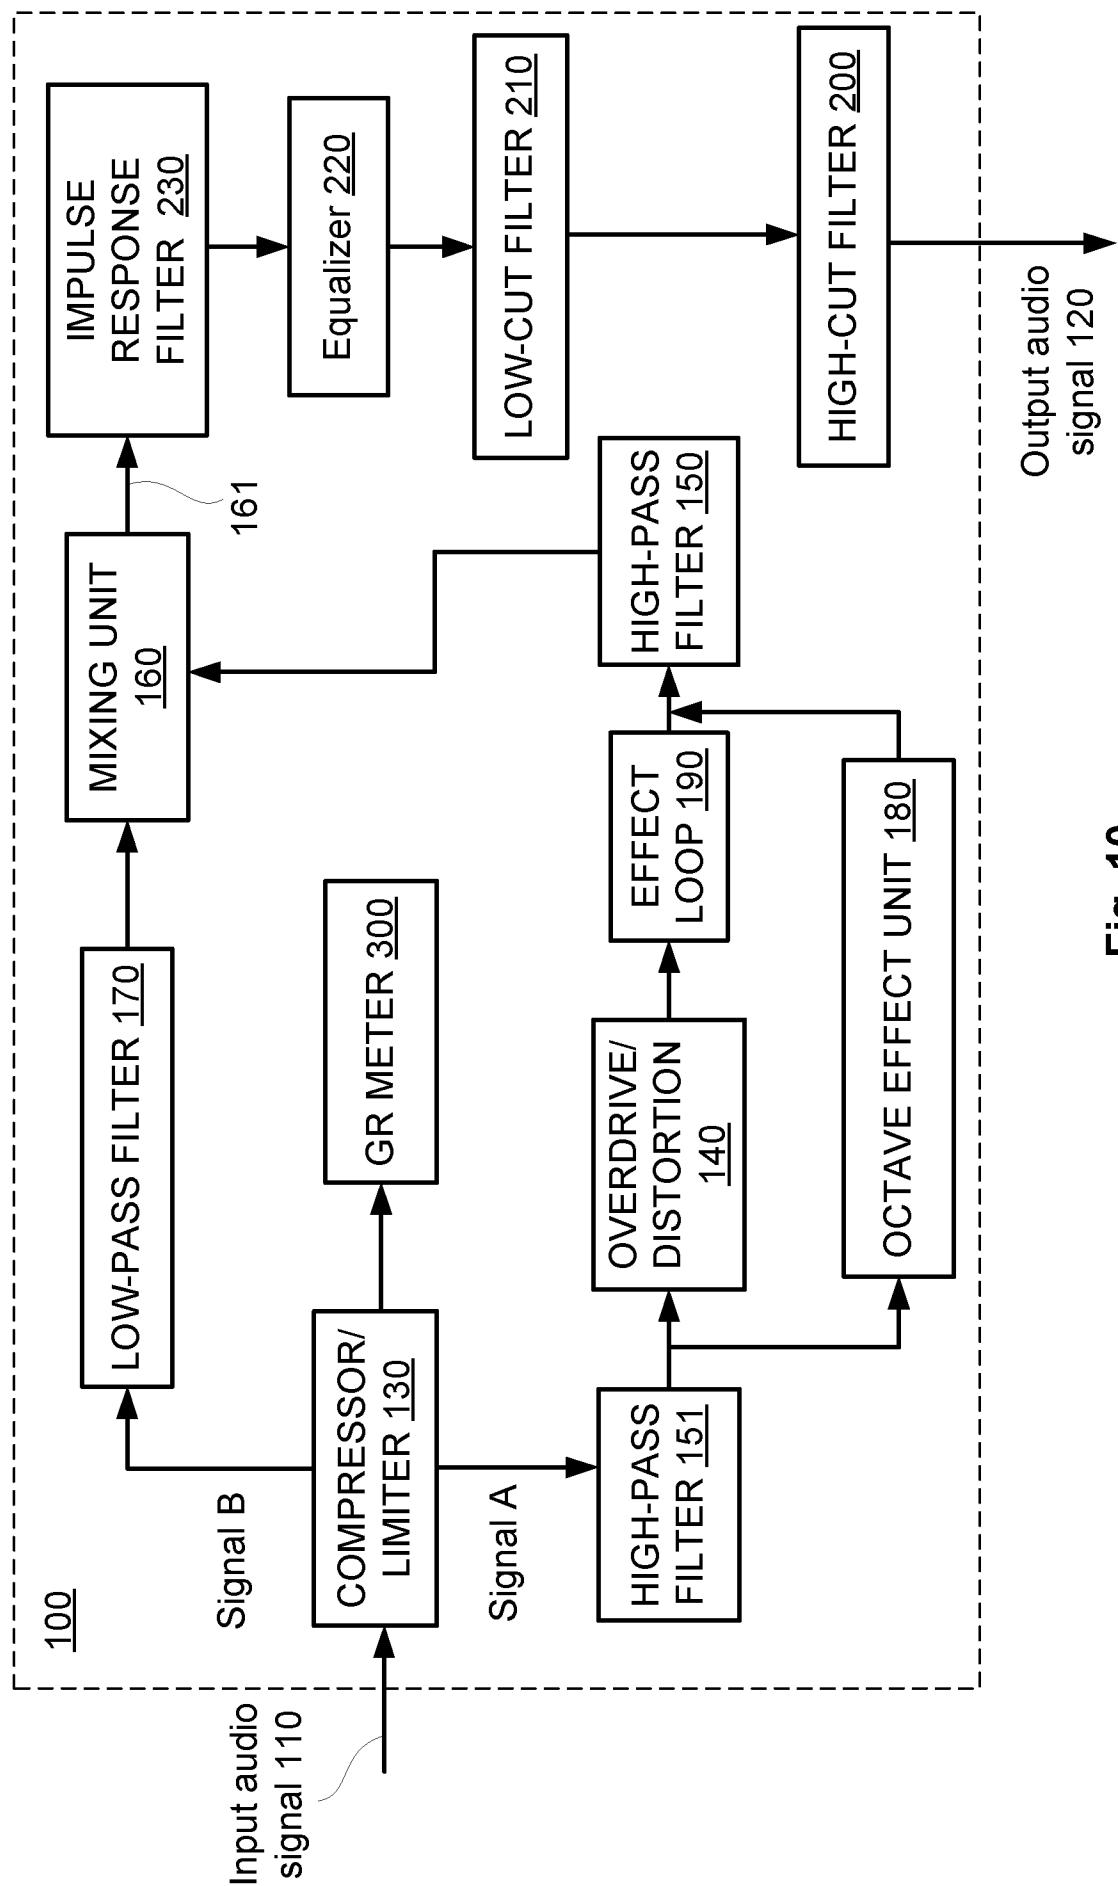


Fig. 10.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/NO2021/050020

A. CLASSIFICATION OF SUBJECT MATTER

IPC: see extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G10H, H03G, H04R, H04S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, PAJ, WPI data, COMPENDEX, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2819307 A1 (BONGIOVI ACOUSTICS LLC), 31 December 2014 (2014-12-31); abstract; paragraphs [0027]-[0028], [0041]; claims 1-15 --	1-10
X	WO 0139370 A2 (SYFX), 31 May 2001 (2001-05-31); all figures; "Summary of the invention" --	1-10
X	WO 2013076223 A1 (ACTIWAVE AB), 30 May 2013 (2013-05-30); paragraphs [0064]-[0074]; all figures; claims 1-27 --	1-10
A	WO 0126422 A2 (SRS LABS INC), 12 April 2001 (2001-04-12); whole document --	1-10

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:	
"A"	document defining the general state of the art which is not considered to be of particular relevance
"D"	document cited by the applicant in the international application
"E"	earlier application or patent but published on or after the international filing date
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O"	document referring to an oral disclosure, use, exhibition or other means
"P"	document published prior to the international filing date but later than the priority date claimed
"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&"	document member of the same patent family

Date of the actual completion of the international search

26-04-2021

Date of mailing of the international search report

26-04-2021

Name and mailing address of the ISA/SE
Patent- och registreringsverket
Box 5055
S-102 42 STOCKHOLM
Facsimile No. + 46 8 666 02 86

Authorized officer
Henrik Andersson
Telephone No. + 46 8 782 28 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/NO2021/050020

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 3595172 A2 (MIMI HEARING TECH GMBH), 15 January 2020 (2020-01-15); whole document --	1-10
A	US 20150110289 A1 (BONGIOVI ANTHONY ET AL), 23 April 2015 (2015-04-23); whole document --	1-10
A	WO 03104924 A2 (SONIC FOCUS INC ET AL), 18 December 2003 (2003-12-18); whole document --	1-10
A	US 4995084 A (PRITCHARD ERIC K), 19 February 1991 (1991-02-19); whole document --	1-10
A	WO 2012058497 A1 (GIBSON GUITAR CORP ET AL), 3 May 2012 (2012-05-03); whole document --	1-10
P, X	EP 3599775 A1 (MIMI HEARING TECH GMBH), 29 January 2020 (2020-01-29); abstract; paragraphs [0004]-[0007]; all figures; claims 1-16 -- -----	1-10

Continuation of: second sheet

International Patent Classification (IPC)

***H03G 9/00* (2006.01)**

***G10H 1/08* (2006.01)**

***G10H 1/12* (2006.01)**

***H03G 5/00* (2006.01)**

***H04R 3/04* (2006.01)**

***H04S 7/00* (2006.01)**

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NO2021/050020

EP	2819307	A1	31/12/2014	AU	2014203194	A1	22/01/2015
				CA	2854086	A1	12/12/2014
				CN	104471879	A	25/03/2015
				EP	3389182	A1	17/10/2018
				HK	1203247	A1	23/10/2015
				IL	243002	A	30/06/2019
				JP	2015043561	A	05/03/2015
				JP	6650195	B2	19/02/2020
				KR	102154877	B1	11/09/2020
				KR	20140145097	A	22/12/2014
				TW	201447869	A	16/12/2014
				US	20140369521	A1	18/12/2014
				US	20180102133	A1	12/04/2018
				US	9741355	B2	22/08/2017
				US	20160240208	A1	18/08/2016
				US	9264004	B2	16/02/2016
				WO	2014201100	A1	18/12/2014
WO	0139370	A2	31/05/2001	AU	2725201	A	04/06/2001
				EP	1254513	A2	06/11/2002
				US	6675125	B2	06/01/2004
				US	6778966	B2	17/08/2004
				US	7027981	B2	11/04/2006
				US	7206420	B2	17/04/2007
				US	7212640	B2	01/05/2007
				US	7558391	B2	07/07/2009
				US	8085943	B2	27/12/2011
				US	20020051546	A1	02/05/2002
				US	20020085725	A1	04/07/2002
				US	20020103619	A1	01/08/2002
				US	20020172374	A1	21/11/2002
				US	20020172376	A1	21/11/2002
				US	20020172378	A1	21/11/2002
				US	20030035549	A1	20/02/2003
				US	20030055635	A1	20/03/2003
				US	20030112088	A1	19/06/2003
WO	2013076223	A1	30/05/2013	CN	104012112	A	27/08/2014
				EP	2783521	A1	01/10/2014
				US	9729969	B2	08/08/2017
				US	20160212533	A1	21/07/2016
				US	20150092973	A1	02/04/2015
				US	9307323	B2	05/04/2016

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NO2021/050020

WO	0126422 A2	12/04/2001	AT AU CA CN CN DE EP ES HK JP JP KR KR US US US	256376 T 7752000 A 2382842 A1 1254153 C 1402956 A 60007158 D1 1219140 A2 2211622 T3 1053037 A1 4602621 B2 2003511881 A 100671360 B1 20020043617 A 20060126851 A1 7907736 B2 7031474 B1	15/12/2003 10/05/2001 12/04/2001 26/04/2006 12/03/2003 22/01/2004 03/07/2002 16/07/2004 03/10/2003 22/12/2010 25/03/2003 23/01/2007 10/06/2002 15/06/2006 15/03/2011 18/04/2006
EP	3595172 A2	15/01/2020	US	20190392850 A1	26/12/2019
US	20150110289 A1	23/04/2015	AU AU CA CN EP HK IL JP JP KR NO NZ SG US WO	2020213326 A1 2014340178 B2 2928489 A1 105830158 B 3061091 A1 1226192 A1 245250 A 6426730 B2 2017502541 A 20160074575 A 20160775 A1 719298 A 11201603173 A 9397629 B2 2015061393 A1	27/08/2020 07/05/2020 30/04/2015 02/08/2019 31/08/2016 22/09/2017 30/09/2020 21/11/2018 19/01/2017 28/06/2016 09/05/2016 29/05/2020 30/05/2016 19/07/2016 30/04/2015

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NO2021/050020

WO	03104924	A2	18/12/2003	AU	2003251403	A1	22/12/2003
				CA	2488689	A1	18/12/2003
				CN	1672325	A	21/09/2005
				CN	100481722	C	22/04/2009
				EP	1532734	A2	25/05/2005
				JP	4817658	B2	16/11/2011
				JP	2005529520	A	29/09/2005
				KR	101118922	B1	29/06/2012
				KR	20050043800	A	11/05/2005
				US	8676361	B2	18/03/2014
				US	20060098827	A1	11/05/2006
US	4995084	A	19/02/1991	NONE			
WO	2012058497	A1	03/05/2012	EP	2633517	A4	25/05/2016
				ES	2718505	T3	02/07/2019
				US	9263015	B2	16/02/2016
				US	20140150630	A1	05/06/2014
EP	3599775	A1	29/01/2020	US	10547926	B1	28/01/2020
				US	20200037056	A1	30/01/2020