

(12) **United States Patent**
Niidera et al.

(10) **Patent No.:** **US 10,015,585 B2**
(45) **Date of Patent:** ***Jul. 3, 2018**

(54) **SPEAKER FRAME AND SPEAKER HAVING THE SAME**

(71) Applicants: **PIONEER CORPORATION**, Kanagawa (JP); **TOHOKU PIONEER CORPORATION**, Tendo (JP)

(72) Inventors: **Shintaro Niidera**, Tendo (JP); **Satoshi Hachiya**, Tendo (JP)

(73) Assignees: **PIONEER CORPORATION**, Kanagawa (JP); **TOHOKU PIONEER CORPORATION**, Tendo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **15/722,467**

(22) Filed: **Oct. 2, 2017**

(65) **Prior Publication Data**
US 2018/0027323 A1 Jan. 25, 2018

Related U.S. Application Data

(63) Continuation of application No. 15/425,312, filed on Feb. 6, 2017, which is a continuation of application (Continued)

(51) **Int. Cl.**
H04R 9/06 (2006.01)
H04R 1/28 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04R 1/2873** (2013.01); **H04R 7/18** (2013.01); **H04R 9/025** (2013.01); **H04R 9/045** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H04R 1/02; H04R 1/2873; H04R 7/18; H04R 9/025; H04R 9/045; H04R 9/06;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,590,332 A * 5/1986 Delbuck H04R 1/025 381/186

5,447,485 A 9/1995 Bory et al.
(Continued)

FOREIGN PATENT DOCUMENTS

JP 51-72122 A 6/1976
JP 52-120838 U 9/1977
(Continued)

OTHER PUBLICATIONS



Japanese Patent Office Action for corresponding Japanese Patent Application No. 2010-505117 dated Dec. 6, 2011 and English-language translation thereof.

Primary Examiner — Huyen D Le
(74) *Attorney, Agent, or Firm* — Procopio, Cory, Hargreaves & Savitch LLP

(57) **ABSTRACT**

A speaker frame, including: a vibration support portion supporting a vibrating body of a speaker; a magnet support portion arranged inside of said vibration support portion and supporting magnetic circuit portion of said speaker; and a plurality of connection beams connecting said vibration support portion and said magnet support portion, wherein the vibration support portion and the magnet support portion have a circular ring shape having the same major axis length and minor axis length, said plurality of connection beams are arranged radially centering on a central axis from said magnet support portion to said vibration support portion, the central axis being parallel to a direction of an acoustic radiation, and a length of one of said connection beams and

(Continued)

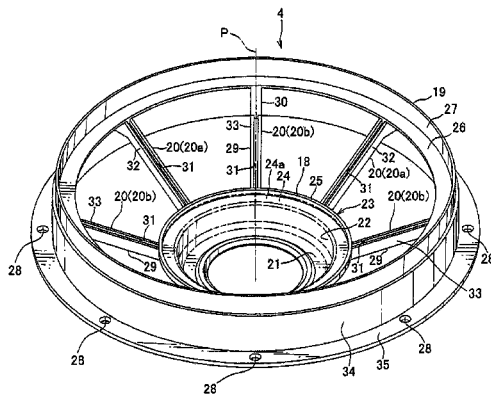

a length of another connection beams are different from each other.

11 Claims, 13 Drawing Sheets

Related U.S. Application Data

No. 15/137,993, filed on Apr. 25, 2016, now Pat. No. 9,602,900, and a continuation of application No. 14/834,875, filed on Aug. 25, 2015, now Pat. No. 9,351,058, and a continuation of application No. 14/247,684, filed on Apr. 8, 2014, now Pat. No. 9,148,715, and a continuation of application No. 12/933,321, filed as application No. PCT/JP2008/056085 on Mar. 28, 2008, now Pat. No. 8,731,232.

- (51) **Int. Cl.**
H04R 9/04 (2006.01)
H04R 31/00 (2006.01)
H04R 9/02 (2006.01)
H04R 7/18 (2006.01)

- (52) **U.S. Cl.**
 CPC *H04R 9/06* (2013.01); *H04R 31/006* (2013.01); *H04R 2209/027* (2013.01); *H04R 2400/11* (2013.01); *H04R 2499/13* (2013.01)

- (58) **Field of Classification Search**
 CPC H04R 31/006; H04R 2209/027; H04R 2400/07; H04R 2400/11; H04R 2499/13

USPC 381/86, 302, 332, 386, 389, 189, 396, 381/398, 412, 420, 432, 433; 181/171, 181/199

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,731,773 B1	5/2004	Bergbower et al.	
7,184,568 B2	2/2007	Chan	
7,357,218 B2	4/2008	Sasaki	
7,570,774 B2	8/2009	Jeong et al.	
7,668,333 B2	2/2010	Horigome et al.	
8,731,232 B2	5/2014	Niidera et al.	
9,148,715 B2*	9/2015	Niidera	H04R 9/06
9,351,058 B2	5/2016	Niidera et al.	
9,479,873 B2	10/2016	Yamagami et al.	
9,602,900 B2	3/2017	Niidera et al.	
2003/0194104 A1	10/2003	Irby et al.	
2006/0147066 A1	7/2006	Horigome et al.	
2006/0237258 A1	10/2006	Sasaki	
2007/0003101 A1	1/2007	Yang	
2008/0049965 A1	2/2008	Iwata	
2009/0175486 A1	7/2009	Suzuki	

FOREIGN PATENT DOCUMENTS

JP	56-163389 U	12/1981
JP	62-77995 U	5/1987
JP	03-035696 A	2/1991
JP	04-031540 A	2/1992
JP	11-341574 A	12/1999

* cited by examiner

FIG. 1
PRIOR ART

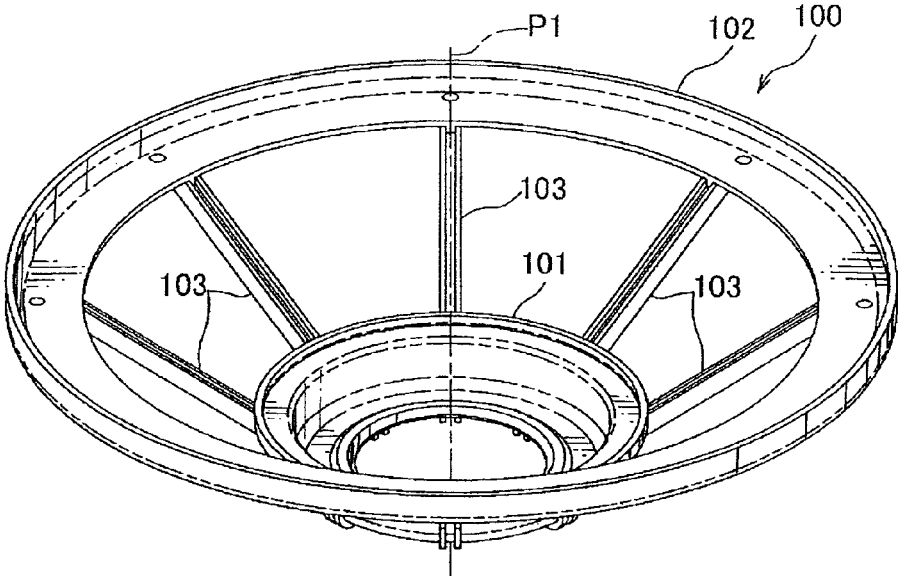


FIG. 2
PRIOR ART

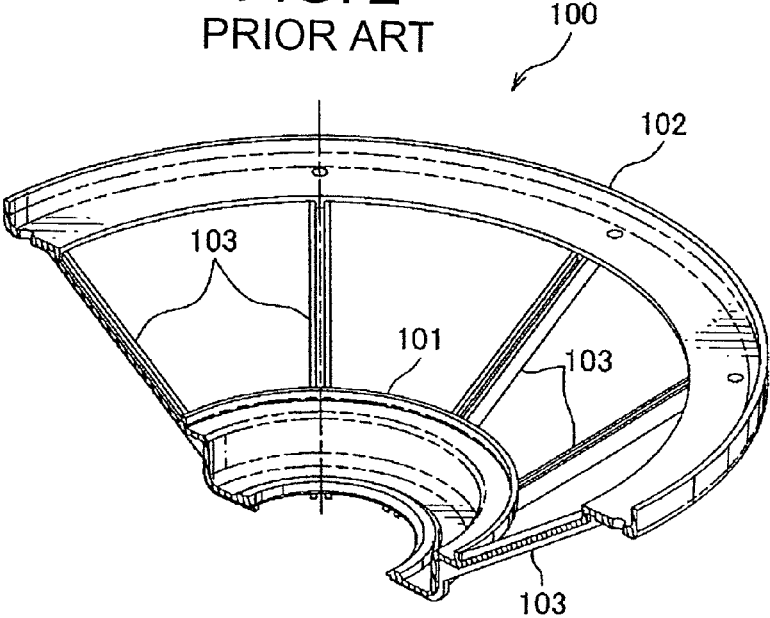


FIG. 3

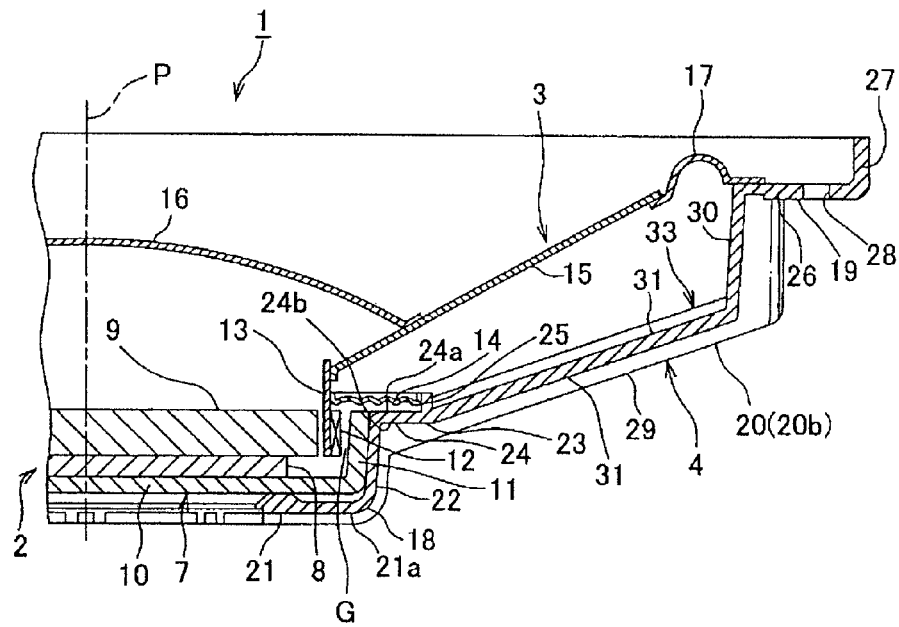


FIG. 4

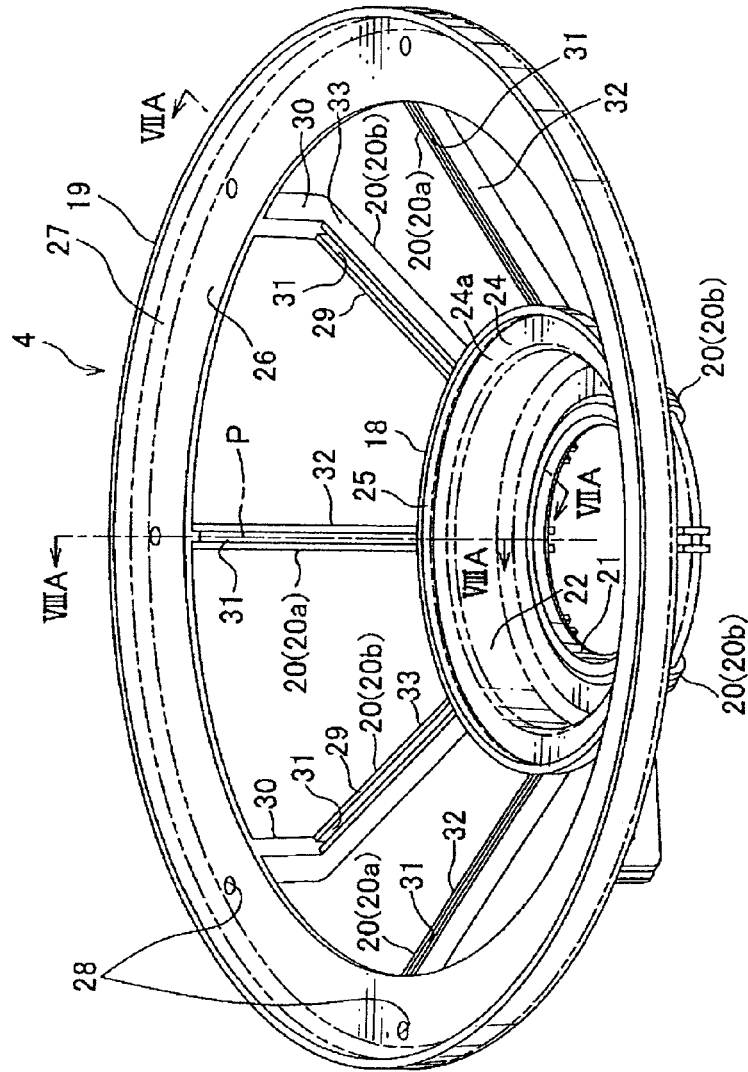


FIG. 5

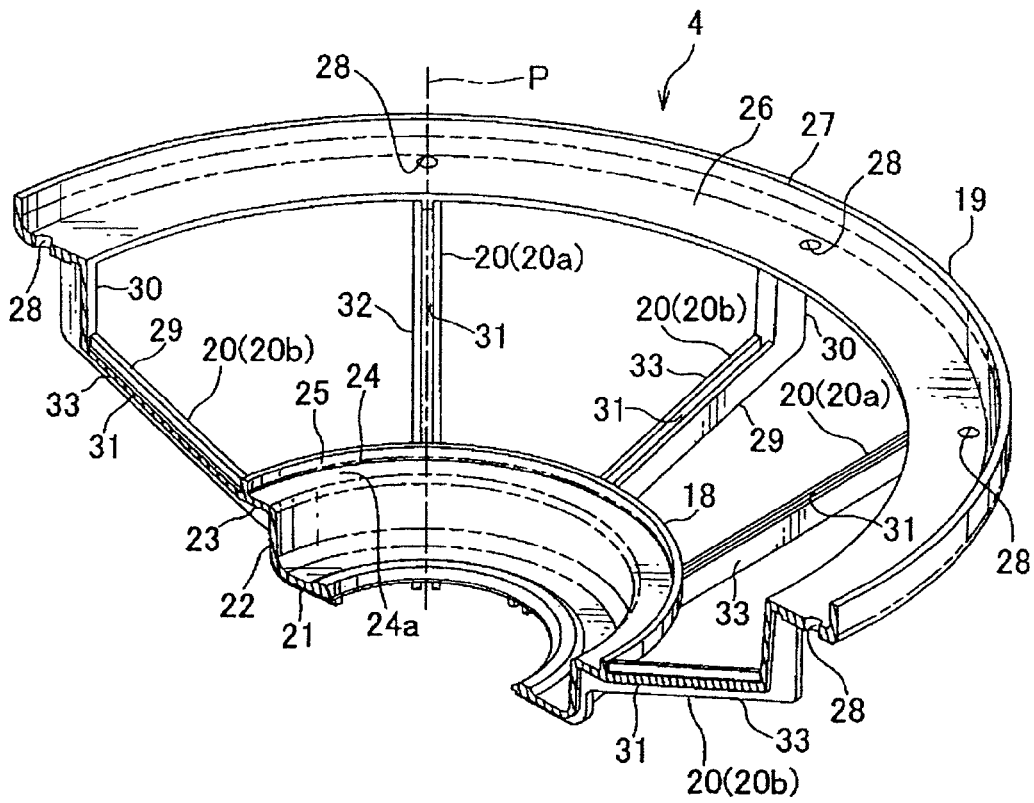


FIG. 6

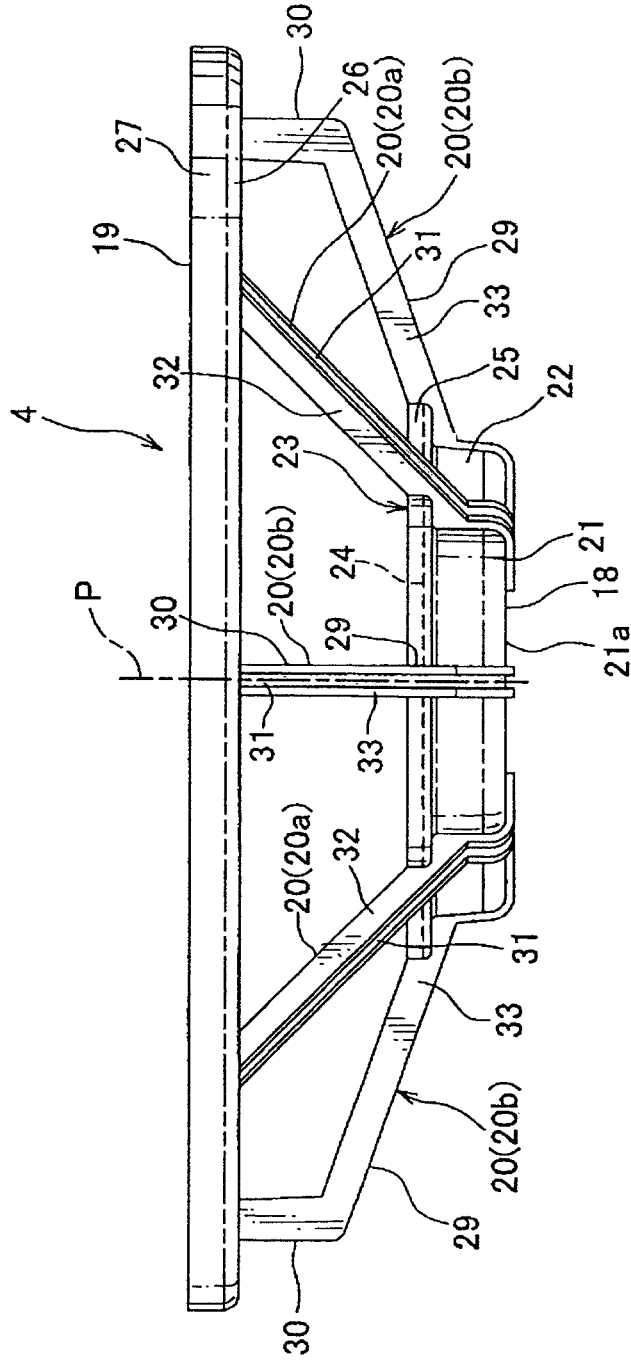


FIG. 7A

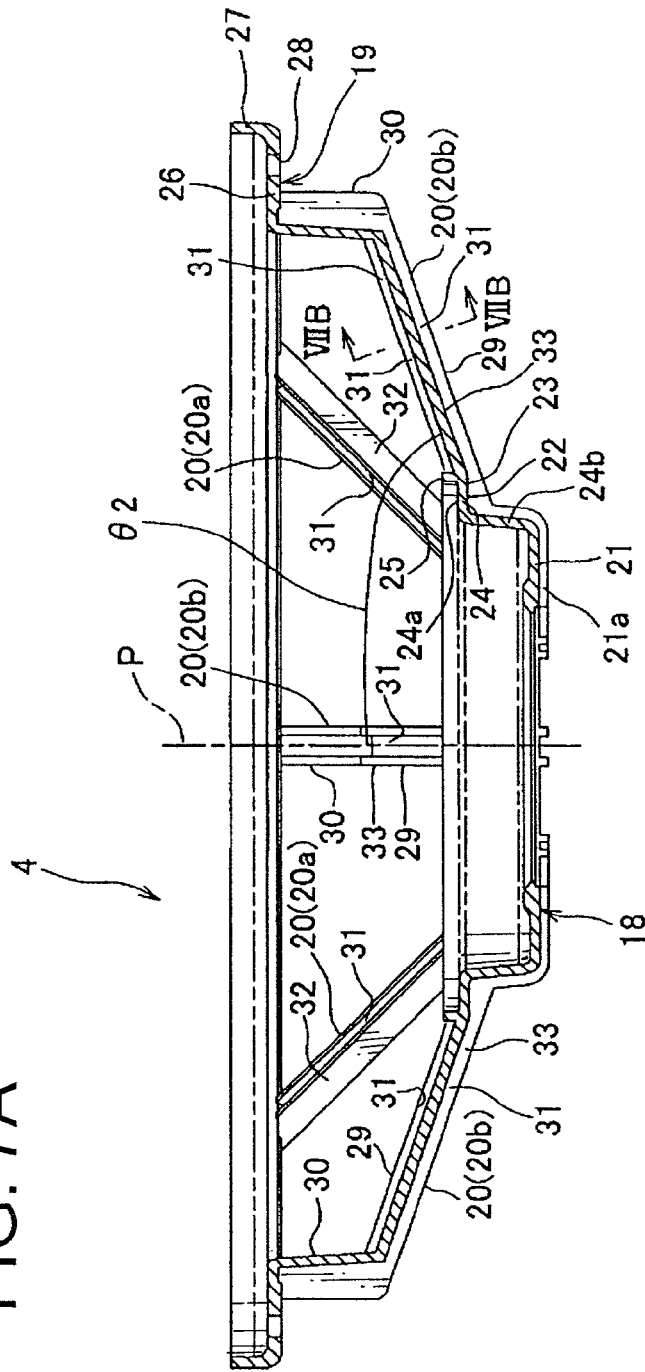


FIG. 7B




FIG. 8A

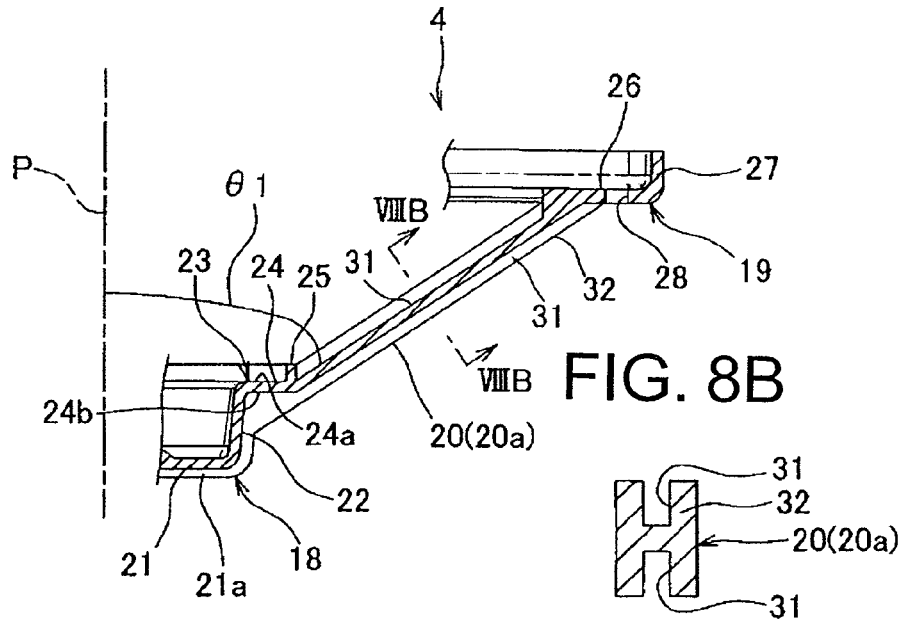


FIG. 8B




FIG. 9

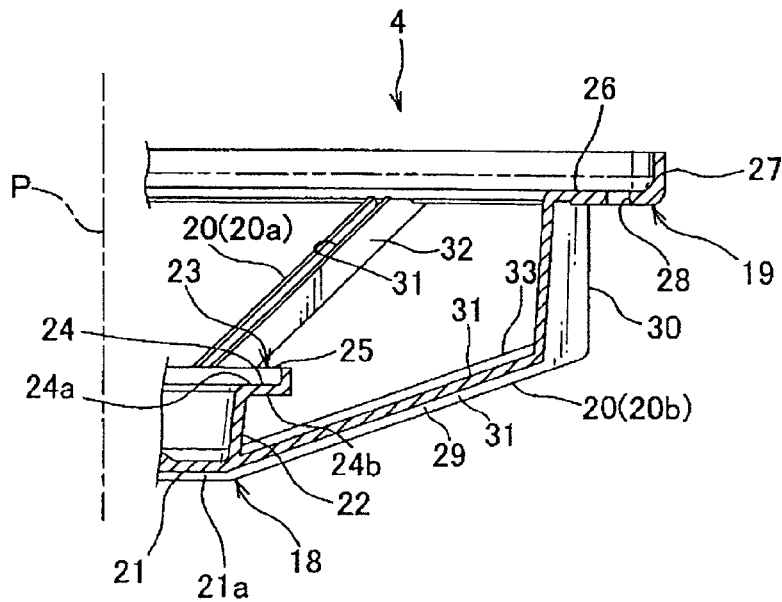


FIG. 10

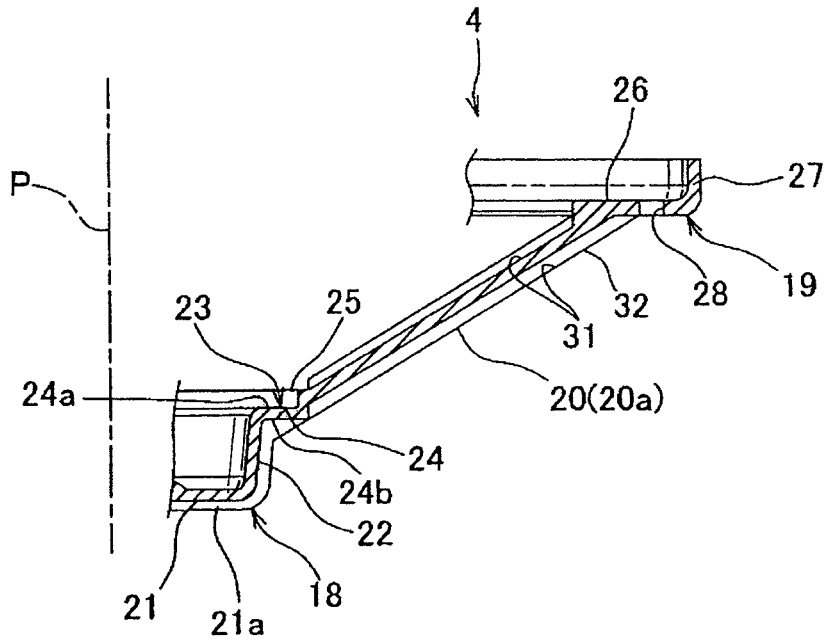


FIG. 11

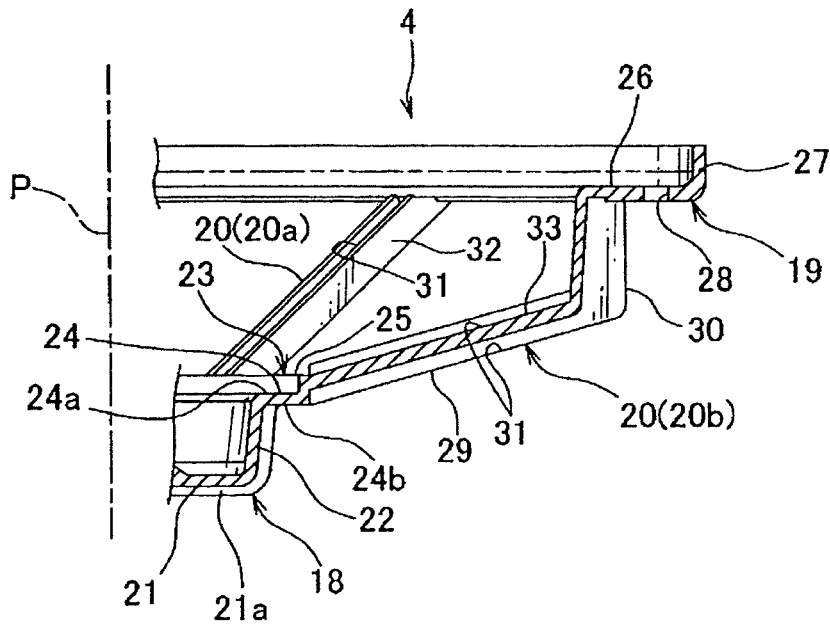


FIG. 12

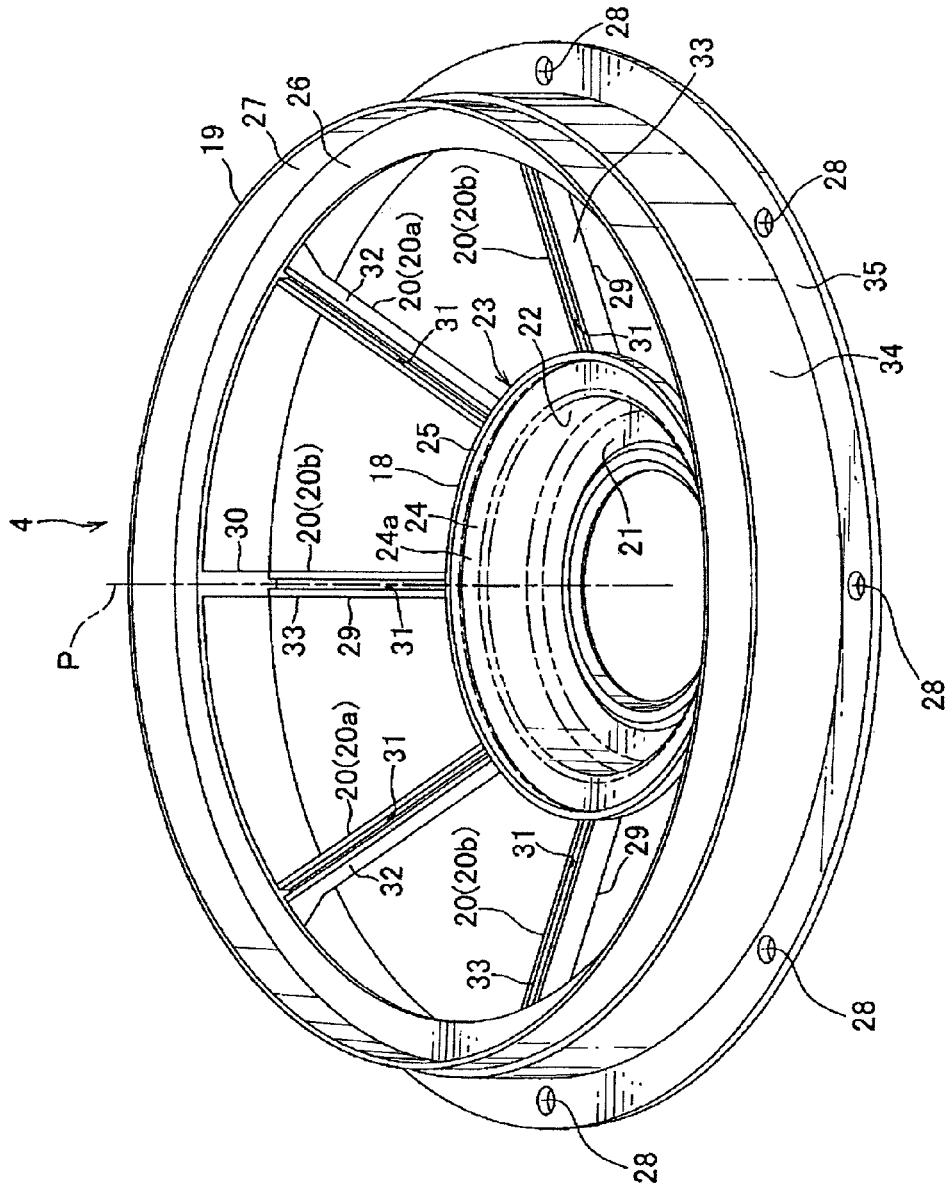


FIG. 13

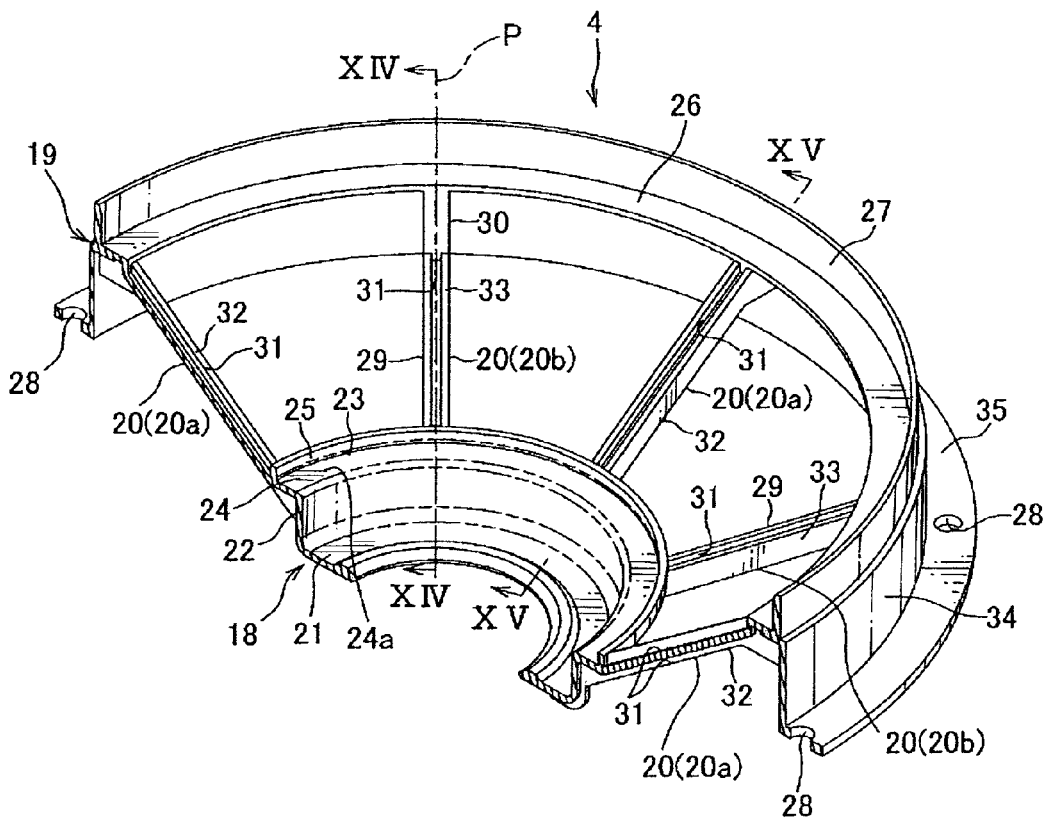


FIG. 14

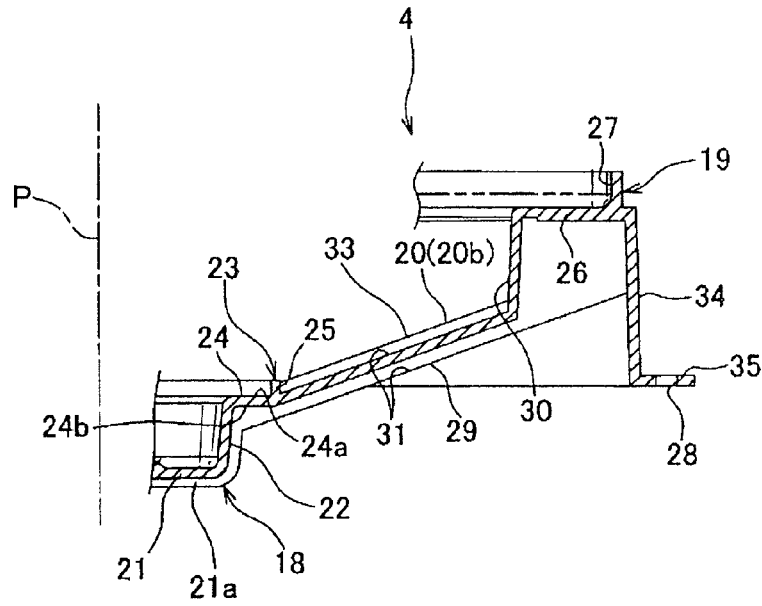


FIG. 15

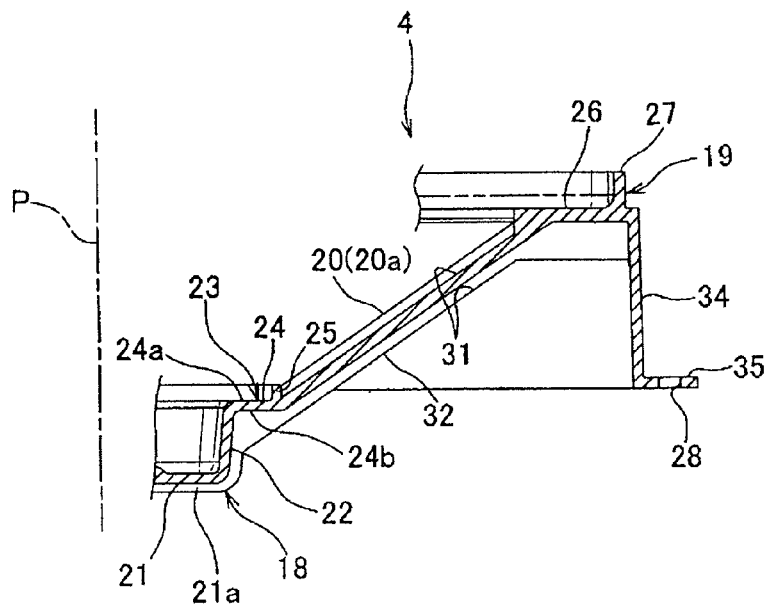


FIG. 16

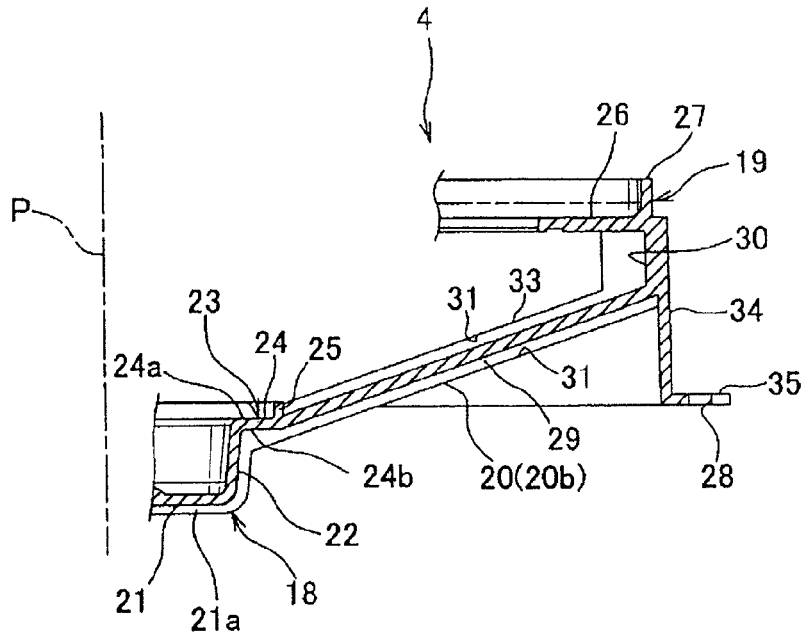


FIG. 17


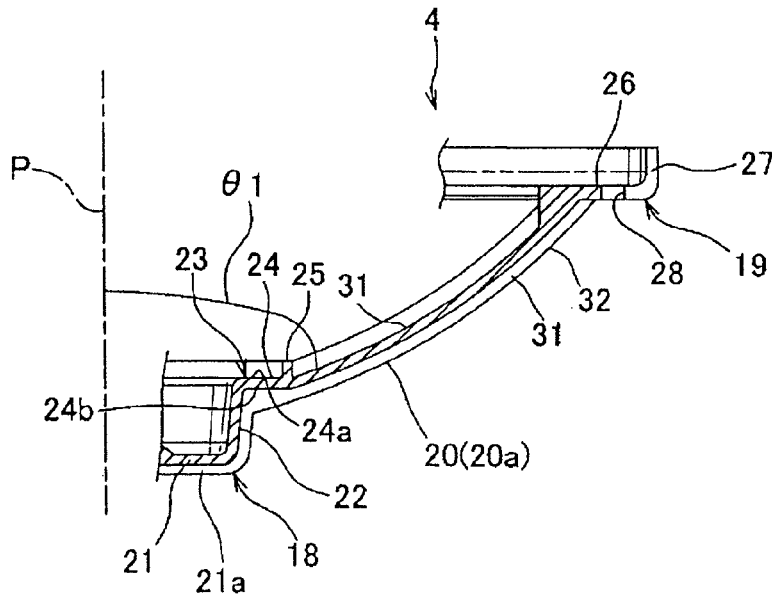


FIG. 18

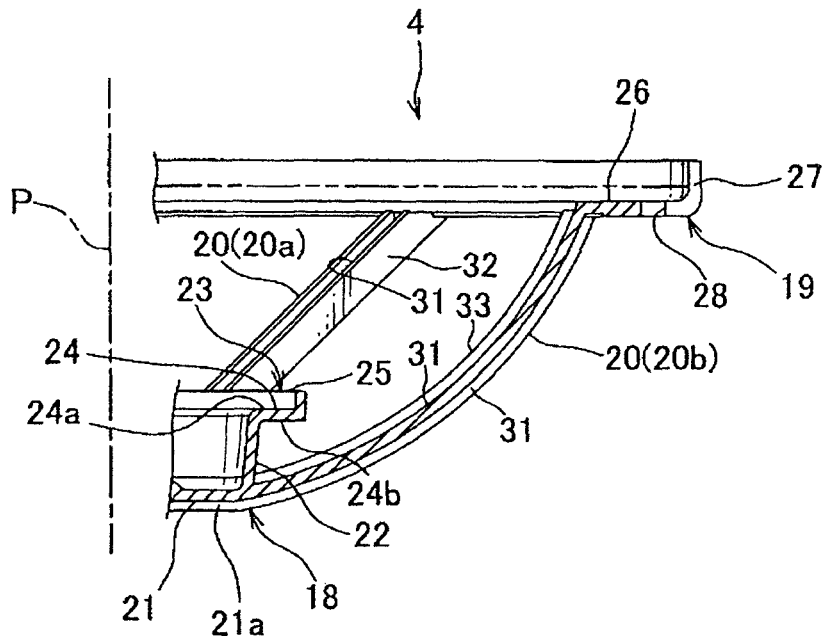

SPEAKER FRAME AND SPEAKER HAVING THE SAME

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a Continuation application of U.S. application Ser. No. 15/425,312 filed Feb. 6, 2017, which is a Continuation application of U.S. application Ser. No. 15/137,993 filed Apr. 25, 2016, now U.S. Pat. No. 9,602,900, which is a Continuation application of Ser. No. 14/834,875 filed Aug. 25, 2015, now U.S. Pat. No. 9,351,058, which is a Continuation of U.S. application Ser. No. 14/247,684 filed Apr. 8, 2014, now U.S. Pat. No. 9,148,715, which is a Continuation of U.S. application Ser. No. 12/933,321 filed Sep. 17, 2010, now U.S. Pat. No. 8,731,232, which is a National Stage of International Application No. PCT/JP2008/056085, filed Mar. 28, 2008, the content of which is incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

The present invention relates to a speaker frame and a speaker having the same, the speaker generates sound by causing a diaphragm to vibrate by supplying voice currents.

DESCRIPTION OF THE RELATED ART

Various speakers (refer for example to Patent Literature 1) are mounted to a motor vehicle as a moving body. The speaker includes: a speaker frame **100** (shown in FIG. 1 and FIG. 2, hereinafter called the frame, refer for example to Patent Literature 1); a vibrating portion placed at an inner side of the frame **100**; and a magnetic circuit portion mounted to the frame **100** and causing a diaphragm of the vibrating portion to vibrate.

As shown in FIG. 1 and FIG. 2, the frame **100** according to the above-described Patent Literature 1 includes: a circular-ring-like magnet support portion **101**; a circular-ring-like vibration support portion **102** having an inner diameter larger than an outer diameter of the magnet support portion **101**; a plurality of connection beams **103** connecting the magnet support portion **101** and the vibration support portion **102**. The magnetic circuit portion is arranged on a surface of and is attached to the magnet support portion **101**. An edge connected with a diaphragm of the vibration support portion is attached to an inner edge of the vibration support portion **102**. The magnet support portion **101** and the vibration support portion **102** are arranged concentrically with each other.

The connection beams **103** are formed into a linear rod-like shape, and one end thereof is connected to the magnet support portion **101** while the other end thereof is connected to the vibration support portion **102**. A longitudinal direction of the respective connection beams **103** is arranged in parallel with a radial direction of the magnet support portion **101** and the vibration support portion **102**. The connection beams **103** are arranged at an equal interval along a circumferential direction of the magnet support portion **101** and the vibration support portion **102**. Furthermore, in a cross section passing through a central axis P1 of the speaker (indicated by a dotted line shown in FIG. 1 and FIG. 2), the plurality of connection beams **103** are formed such that an angle between the connection beam **103** and the central axis P1 are equal.

For the speaker including the above-described structure, voice currents are supplied to a voice coil attached to the

diaphragm to allow the diaphragm to vibrate along the central axis P1 by an electromagnetic force (Lorentz force) exerted on the voice coil. Thus, the speaker generates sound corresponding to the voice currents in a direction of an acoustic radiation.

[Patent Literature 1] Japanese Patent Application Publication No. H07-95687

SUMMARY OF THE INVENTION

Technical Problem

For the frame **100** shown in the above-described Patent Literature 1, the plurality of connection beams **103** are arranged so that in the cross-section passing through the central axis P1, inclination angles to the central axis P1 of the speaker for a longitudinal direction of the connection beams **103** are equal with each other. Therefore, the speaker has a problem that, when mounting the speaker to a door panel of a motor vehicle, the frame **100**, specially the plurality of connection beams **103** is distorted, e.g. curved, distortion being produced in the entire frame **100**. Furthermore, the distortion of the edge is produced with the distortion of the frame **100**, causing a position of the voice coil in the magnetic circuit portion, particularly in a magnetic gap, to be displaced from a desirable position. The displacement of the voice coil may cause several problems such that the voice coil contacts with a plate of the magnetic circuit portion, and an acoustic characteristic is reduced by generation of an unwanted noise.

Furthermore, for the above-described speaker, there is a problem such that the door vibrates by vibrations of the moving vehicle and the frame **100** is distorted by the vibrations as above and the frame easily resonates with the door. There are some problems that the resonance may cause the vibration of the magnetic circuit portion, a voice coil contacting with the plate of the magnetic circuit portion, an unwanted vibration transmitting to the diaphragm, and the acoustic characteristic reducing easily by an unwanted vibration transmitting to the diaphragm.

In addition, when the speaker is driven, the magnetic circuit portion vibrates. There is a problem that the vibration of the magnetic circuit induces a resonance in the frame. There are some problems such as an unwanted vibration transmitting to the diaphragm of a vibrating body due to the resonance, and the acoustic characteristic reducing easily by the unwanted vibration transmitting to the diaphragm.

The present invention is intended to address these problems. Therefore, an object of the present invention is to provide a speaker frame which is prevented from being distorted, e.g. curved, as well as to provide a speaker having this speaker frame.

Solution to Problem

In order to solve the above-described problems and achieve the above-described object, a speaker frame on the present invention according to claim 1 includes: a vibration support portion supporting a vibrating body of a speaker; a magnet support portion arranged inside of the vibration support portion and supporting a magnetic circuit portion of the speaker; and a plurality of connection beams connecting the vibration support portion and the magnet support portion, in which, in a cross-section passing through a central axis of the speaker, an inclination angle of one connection beam of the connection beams to the central axis and to an

inclination angle of other connection beam to the central axis are different from each other.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a conventional speaker frame;

FIG. 2 is a perspective view showing a partial cross-section of the speaker frame shown in FIG. 1;

FIG. 3 is a perspective view showing a partial cross-section of a speaker according to a first exemplary embodiment of the present invention;

FIG. 4 is a perspective view of a frame of the speaker shown in FIG. 3;

FIG. 5 is a perspective view showing a partial cross-section of the frame shown in FIG. 4;

FIG. 6 is a side view of the frame shown in FIG. 4;

FIG. 7A is a cross-sectional view taken along a line VIIA-VIIA shown in FIG. 4, and FIG. 7B is a cross-sectional view taken along a line VIIB-VIIB shown in FIG. 7A;

FIG. 8A is a cross-sectional view taken along a line VIIIA-VIIIA shown in FIG. 4, and FIG. 8B is a cross-sectional view taken along a line VIIB-VIIB shown in FIG. 8A;

FIG. 9 is a cross-sectional view of a modified example of the frame shown in FIG. 7;

FIG. 10 is a cross-sectional view of another modified example of the frame shown in FIG. 8;

FIG. 11 is another cross-sectional view of the frame shown in FIG. 10;

FIG. 12 is a perspective view of a frame of a speaker according to a second exemplary embodiment of the present invention;

FIG. 13 is a perspective view showing a partial cross-section of the frame shown in FIG. 12;

FIG. 14 is a cross-sectional view taken along a line XIV-XIV shown in FIG. 13;

FIG. 15 is a cross-sectional view taken along a line XV-XV shown in FIG. 13;

FIG. 16 is a cross-sectional view of a modified example of the frame shown in FIG. 14;

FIG. 17 is a cross-sectional view of another modified example of the frame shown in FIG. 8; and

FIG. 18 is a cross-sectional view of another modified example of the frame shown in FIG. 9.

REFERENCE SIGNS LIST

- 1 speaker
- 2 magnetic circuit portion
- 4 speaker frame
- 14 damper
- 15 diaphragm (vibrating body)
- 18 magnet support portion
- 19 vibration support portion
- 20 connection beam
- 20a one connection beam
- 20b other connection beam
- 21 bottom portion
- 21a back face
- 23 damper mounting portion
- 24a surface (mounting face)
- 24b back face
- 26 vibrating body mounting portion
- 29 first linear portion
- 30 second linear portion

- 31 groove
- 32, 33 H-shaped portion
- 34 tubular portion
- 35 flange portion
- 5 $\theta 1, \theta 2$ inclination angle
- P central axis

DESCRIPTION OF EMBODIMENTS

One embodiment of the present invention will be explained below. For a speaker frame according to one embodiment of the present invention, in a cross section passing through a central axis of a speaker, an inclination angle of one connection beam of a plurality of connection beams to the central axis and an inclination angle of other connection beam to the central axis are different. In such manner, rigidity of the speaker frame can be ensured while reducing the weight thereof by positioning the plurality of connection beams at an interval. Therefore, the frame can be prevented from being distorted, e.g. curved, reducing in an acoustic characteristic, and resonating with a door panel of a motor vehicle when the frame is mounted at the door panel. Furthermore, a resonance at the frame produced by the vibration of a magnetic circuit can be prevented when the speaker is driven.

The one connection beam may be formed linearly, and the other connection beam may be formed so as to include a first linear portion and a second linear portion bending from the first linear portion. In this case, inclination angles of these connection beams to the central axis of the speaker will securely be different from each other and rigidity of the speaker frame can be reliably ensured.

The second linear portion of the other connection beam may be arranged substantially parallel to the central axis. In this case, an inclination angle of the first linear portion of the other connection beam to the central axis will securely be different from the inclination angle of the one connection beam to the central axis.

The connection beam may include a groove. Furthermore, the groove may be provided at the first linear portion of the other connection beam. In this case, rigidity of the connection beam can be reliably ensured while reducing the weight of the connection beam, i.e. the speaker frame.

The connection beam may include a H-shaped portion having a H-shaped cross-section. Furthermore, the H-shaped portion can be provided at the first linear portion of the other connection beam. In this case, rigidity of the connection beam can be reliably ensured while reducing the weight of the connection beam, i.e. the speaker frame.

A magnet support portion may include a damper mounting portion at which a damper is mounted. In this case, rigidity of not only the connection beam but also of the magnet support portion can be reliably ensured.

At least one of the connection beams may connect to a back face of the damper mounting portion in a view of a mounting face of the magnet support portion. In this case, since the connection beam projects from the magnet support portion, rigidity of the magnet support portion can be reliably ensured.

At least one of the connection beams connects to a back face of a bottom portion of the magnet support portion. In this case, since the connection beam projects from the bottom portion of the magnet support portion, rigidity of the magnet support portion can be reliably ensured.

A vibration support portion may include a flange portion projecting from the vibration support portion in an outer

circumferential direction. In this case, rigidity of the vibration support portion can be reliably ensured.

A plurality of the one connection beams and a plurality of the other connection beams may be provided. In this case, rigidity of the speaker frame can be securely improved. Furthermore, an external force acting on the frame can be dispersed to (absorbed by) the plurality of connection beams. Furthermore, by providing the plurality of connection beams, the speaker can include several transmission paths of the vibration transmitting on the frame, thus the vibration can be canceled out on the frame.

The vibration support portion may include a tubular portion connecting to an outer edge of a vibrating body mounting portion. In this case, rigidity of the vibration support portion can be improved, and thus rigidity of the speaker frame can be securely improved.

Both of the one connection beam and the other connection beam may extend from the vibrating body mounting portion further to the tubular portion. In this case, the connection beam can be formed to project from the vibrating body mounting portion, and thus rigidity of the vibration support portion can be further improved.

The one connection beam may connect to the vibrating body mounting portion, and the other connection beam may connect to the tubular portion. In this case, positions at which these connection beams connect to the vibration support portion are different from each other, thus rigidity of the speaker frame can be improved.

The other connection beam may extend from the tubular portion further to the vibrating body mounting portion. In this case, the other connection beam can be formed to project from the tubular portion, thus rigidity of the vibration support portion can be further improved.

A portion at which the other connection beam connecting to the tubular portion may be positioned near the magnet support portion compared to a portion at which the one connection beam connecting to the vibrating body mounting portion. In this case, the positions at which these connection beams connecting to the vibration support portion are displaced along the central axis, thus rigidity of the speaker frame can be improved.

The present invention may be a speaker including the above-described speaker frame. In this case, rigidity of the speaker frame can be improved, distortion of the speaker frame can be prevented and reduction in the acoustic characteristic can be prevented.

Exemplary Embodiment 1

The first exemplary embodiment of the present invention will be explained with reference to FIG. 3 through FIG. 8. A speaker 1 according to the first exemplary embodiment of the present invention shown in FIG. 1 is mounted at a door panel and such of a motor vehicle and provides voice information to a passenger of the motor vehicle.

The speaker 1, as shown in FIG. 3, includes a magnetic circuit portion 2, a vibrating portion 3, a wiring portion not shown and a speaker frame (hereinafter called the frame) 4.

The magnetic circuit portion 2 is fixed to a later-described bottom portion 21 of magnet support portion 18 of the frame 4 and fixed to the frame 4. As shown in FIG. 3, the magnetic circuit portion 2 includes a yoke 7 constituted of for example a magnetic body (so-called paramagnetic or ferromagnetic body), a magnet 8 and a plate 9 constituted of for example a magnetic body (so-called paramagnetic or ferromagnetic body).

The yoke 7 is an inner magnet-type magnetic circuit which integrally includes a circular-plate-like circular plate portion 10 and a cylinder-like tube portion 11 formed so as to extend from an outer edge of the circular plate portion 10.

Although the inner magnet-type magnetic circuit is disclosed in this exemplary embodiment, the present invention may utilize an outer-magnet type magnetic circuit or a magnetic circuit combined with the inner magnet-type and the outer-magnet type magnetic circuit (a magnetic circuit with a magnet disposed inside and outside of a voice coil bobbin).

The magnet 8 is formed into a circular-plate-like shape and is received in the tube portion 11 of the yoke 7 while being disposed on the yoke 7. An outer diameter of the magnet 8 is smaller than both of an outer diameter of the circular plate portion 10 of the yoke 7 and an inner diameter of the tube portion 11. The above-described magnet 8 may be a permanent magnet or a material excited by DC electricity.

The plate 9 is formed into a circular-plate-like shape. An outer diameter of the plate 9 is smaller than both of the outer diameter of the circular plate portion 10 of the yoke 7 and the inner diameter of the tube portion 11. The plate 9 is received in the tube portion 11 of the yoke 7 while being disposed on the magnet 8. The yoke 7, the magnet 8 and the plate 9 are arranged substantially concentrically so centers thereof are substantially the same. Thus, an inner circumferential face of the tube portion 11 of the yoke 7 and an outer circumferential face of the plate 9 face each other with an interval (a magnetic gap G) therebetween.

Furthermore, the yoke 7, the magnet 8 and the plate 9 are fixed to the bottom portion 21 of the frame 4 with a bolt not shown penetrating through the bottom portion 21 or an adhesive or the like. In such manner, the magnetic circuit 2 is fixed to the frame 4 by the plate 9 being fixed to the bottom portion 21. Of course, the yoke 7, the magnet 8 and the plate 9 are arranged substantially concentrically with the frame 4.

With the structure described above, the magnetic circuit 2 includes the magnetic gap G having large magnetic flux density between the inner circumferential face of the tube portion 11 of the yoke 7 and the outer circumferential face of the plate 9.

The vibrating portion 3 is placed (supported) inside the frame 4. The vibrating portion 3 includes a voice coil 12, a voice coil bobbin 13, a diaphragm 15 as a vibrating body, an edge 17, a center cap 16 and a damper 14.

In this exemplary embodiment, a voice coil 12 is provided and formed with a coil wound around an outer circumference of the voice coil bobbin 13. Also, this voice coil 12 is, before driving the diaphragm 15, arranged within the above-described magnetic gap G of the magnetic circuit 2. Voice currents are supplied to the voice coil 12 via later-described lead wires not shown.

The voice coil bobbin 13 is formed into a cylinder-like shape. An inner diameter of the voice coil bobbin 13 is formed larger than an outer diameter of the plate 9. An outer diameter of the voice coil bobbin 13 is formed smaller than the inner diameter of the tube portion 11 of the yoke 7. The voice coil bobbin 13 is arranged substantially concentrically with the yoke 7, plate 9 and the voice coil 12. For the voice coil bobbin 13, one end portion thereof is inserted into the magnetic gap G, and the voice coil 12 is attached to an outer circumference of the one end portion. The voice coil bobbin 13 is supported by the diaphragm 15 and the damper 14 and such so as to be movable along a central axis of the yoke 7.

The central axis of the yoke 7 is substantially the same as a central axis P of the speaker 1 (indicated by a dotted line shown in FIG. 3).

The diaphragm 15 is made of a resin. In order to reduce the weight of the speaker 1, metal material such as aluminum or other known materials including ceramics may be used as well. The diaphragm 15 is formed into a circular-ring-like shape having a conical (cone-like) appearance. The diaphragm 15, with an inner edge portion thereof attached to the other end portion of the voice coil bobbin 13, is slant as it gets from the voice coil bobbin 13 towards the outer circumferential direction, in a direction towards a later-described vibration support portion 19 of the frame 4. The diaphragm 15 is supported vibratably with respect to the frame 4 by the damper 14 via the voice coil bobbin 13. Also, the diaphragm 15 vibrates by the voice coil 12 and generates sound.

The edge 17 is formed into a circular-ring-like shape, and an inner edge thereof is attached to an outer edge portion of the diaphragm 15, while an outer edge of the edge 17 is attached to an inner edge portion of a later-described vibrating body mounting portion 26 of the vibration support portion 19. For the edge 17, the shape of a cross-section thereof is formed into a convex shape (an arc-like shape) towards the sound emitting side of the speaker 1. The edge 17 supports the diaphragm 15 vibratably with respect to the frame 4.

The center cap 16 is formed into a circular-plate-like shape, and a central portion thereof is formed so as to curve projectingly in a direction of the sound emitting of the diaphragm 15, i.e. a direction away from the magnetic circuit 2. The center cap 16 is arranged at a position substantially concentric with the diaphragm 15. An outer edge portion of the center cap 16 is fixed to the inner edge portion of the diaphragm 15. And the center cap is provided at a central portion of the diaphragm 15.

The damper 14 is made of a breathable member. In particular, the breathable member includes a nonwoven fabric made of fibers, or a sheet-like member obtained by adding (impregnating or coating) a resin to a nonwoven fabric, and known member can be utilized. Also, for example, the fiber forming the nonwoven fabric includes a polyamide-system resin such as a kepler or a polyester-system resin and such, and the resin includes a phenol-system resin and such. In addition, a method for adding a resin to the nonwoven fabric includes, for example, impregnating or coating a solution, then drying in a suitable manner. The solution has a resin to be added and an organic solvent to diffuse the resin. As the method for adding the resin, using a known method is possible. The damper 14 is entirely formed into a circular-ring-like (annular) shape. An inner edge of the damper is attached to an outer circumferential face of the other end portion of the voice coil bobbin 13, and an outer edge of the damper is attached to an inner circumferential face of a later-described damper mounting cylinder portion 25 of the magnet support portion 18. Of course, this damper 14 is arranged substantially concentrically with the magnetic circuit 2, the diaphragm 15 and the voice coil bobbin 13 and such.

For the above-described damper 14, the inner edge thereof is attached to the outer circumferential face of the voice coil bobbin 13, while the outer edge thereof is attached to the inner circumferential face of the damper mounting cylinder portion 25, damping the vibration of the diaphragm 15 (in a direction perpendicular to a direction of the vibration of the voice coil).

The above-described damper 14 of the vibrating body 3, the diaphragm 15 and the center cap 16 are, of course, arranged substantially concentrically with the frame 4 and the magnetic circuit 2. For the vibrating body 3, when currents corresponding to voice information (i.e. voice currents) are supplied to the voice coil 12, the diaphragm 15 to which the vibration of the voice coil 12 is transmitted vibrates along the above-described central axis, producing sound corresponding to the voice currents. That is, the diaphragm 15 vibrates due to a driving force (electromagnetic force) applied to the voice coil 12.

The wiring portion includes lead wires connected to the voice coil 12. The lead wires, i.e. the wiring portion, supply the voice currents to the voice coil 12 via a known amplifier and such.

As shown in FIG. 4 and FIG. 5, the frame 4 integrally includes, the circular-ring-like (annular) magnet support portion 18, the circular-ring-like vibration support portion 19 in which the magnet support portion 18 is positioned at an inner side thereof, and a plurality of connection beams 20 connected to the magnet support portion 18 and the vibration support portion 19.

The magnet support portion 18 includes the circular-ring-like bottom portion 21, a cylinder-like circle tube portion 22 provided to stand from an outer edge of the bottom portion 21, and the damper mounting portion 23. For the bottom portion 21, the circular portion 10 of the yoke 7 and such are disposed on a surface of the bottom portion 21 and the magnetic circuit portion 2 is attached. For this reason, the bottom portion 21 is positioned farther from the vibration support portion 19 compared to the damper mounting portion 23.

The damper mounting portion 23 includes: a circular-ring-like flange portion 24 extending from an edge portion of the circle tube portion 22 distant from the bottom portion 21 in an outer circumferential direction of the circle tube portion 22; and the damper mounting cylinder portion 25 provided to stand from an outer edge portion of the flange portion 24 in the same direction as a direction towards the circle tube portion 22 provided to stand from the bottom portion 21. On a surface 24a (corresponds to a mounting face in claims) of the flange 24 exposed to a direction of the sound emitting, the damper 14 is disposed with a space. An outer edge of the damper 14 is attached to the inner circumferential face of the damper mounting cylinder portion 25.

The vibration support portion 19 integrally includes, the circular-ring-like vibrating body mounting portion 26 and an outer tube portion 27 provided to stand from an outer edge of the vibrating body mounting portion 26 in the same direction as a direction towards the circle tube portion 22 provided to stand from the bottom portion 21. The outer edge portion of the edge 17 is attached to the inner edge portion of the vibrating body mounting portion 26. The diaphragm 15 is mounted at the vibrating body mounting portion 26 via the edge 17.

Furthermore, the vibrating body mounting portion 26 of the vibration support portion 19 is provided with through a hole 28 through which a bolt is passed for fixing the frame 4, i.e. the speaker 1, to a door panel and such of a motor vehicle.

As shown in FIG. 6, FIG. 7A and FIG. 8A, the plurality of connection beams 20 are formed into a rod-like shape. One ends of the connection beams 20 connect to an outer edge of the flange portion of magnet support portion 18, and other ends of the connection beams 20 connect to an inner edge of the vibration body mounting portion 26 of the

vibration support portion 19. The plurality of the connection beams 20 are arranged at an interval in the circumferential direction of the frame 4, i.e. the speaker 1.

Furthermore, as shown in FIG. 8A, one connection beam 20 (hereinafter indicated with a reference sign 20a) of the plurality of connection beams 20 extends linearly from the magnet support portion 18 towards the vibration support portion 19. Furthermore, as shown in FIG. 7A, other connection beam 20 (hereinafter indicated with a reference sign 20b) of the plurality of connection beams 20 includes a first linear portion 29 and a second linear portion 30. The first linear portion 29 includes one end extending linearly and connecting to the magnet support portion 18. The second linear portion 30 extends linearly and connects to the inner edge portion of the vibrating body mounting portion 26 of the vibration support portion 19 and bends from the other end of the first linear portion 29. For the first linear portion 29, an inclination angle $\theta 2$ (shown in FIG. 7A) to the central axis P in a cross-section passing through the above-described central axis P of the frame 4 is formed greater than an inclination angle $\theta 1$ (shown in FIG. 8A) of the one connection beam 20a to the central axis P in a cross-section passing through the central axis P of the above-mentioned one connection beam 20a. Furthermore, the second linear portion 30 is arranged substantially parallel to the above-described central axis P. In such manner, the one connection beam 20a and the other connection beam 20b are formed such that, in the cross-section passing through the central axis P of the frame 4, the inclination angles $\theta 1$, $\theta 2$ to the central axis P are different from each other.

Furthermore, in the shown exemplary embodiment, the one connection beam 20a and the other connection beam 20b are arranged alternately in the circumferential direction of the frame 4. That is, in the shown exemplary embodiment, there are only the one connection beam 20a and other connection beam 20b provided, and the respective connection beams 20a, 20b are provided plurally.

Furthermore, as shown in FIG. 7B and FIG. 8B, the connection beams 20a, 20b respectively include grooves 31 intersecting with the central axis P and concave from both surfaces. The grooves 31 extend linearly along the connection beams 20a, 20b. For the one connection beam 20a, the groove 31 is formed along the entire length of the one connection beam 20a. For the other beam 20b, the groove 31 is formed along the entire length of the first linear portion 29 whereas no grooves 31 are formed at the second linear portion 30. By including the grooves 31, the above-described one connection beam 20a includes a H-shaped portion 32 having a H-shaped cross-section along the entire length of the one connection beam 20a, as shown in FIG. 8B. The other connection beam 20b includes a H-shaped portion 33 having a H-shaped cross-section along the entire length of the first linear portion 29 (i.e., H-shape portion 33 is provided at the first linear portion 29), as shown in FIG. 7B.

Furthermore, as shown in FIG. 6, FIG. 7A and FIG. 8A, the connection beams 20a, 20b connect from the outer edge of the flange portion 24 of the magnet support portion 18 to a back face 24b of the damper mounting portion 23 in a view of the surface 24a of the flange portion 24 at which the damper is mounted and connect to a back face 21a of the bottom portion 21 in a view of the damper 14 via an outer circumferential face of the circle tube portion 22.

The frame 4 having the above-described structure is formed with a known material. There is a metal material such as iron or aluminum and a resin such as a polycarbonate resin, an ABS resin or an acrylic resin as the known material.

Particularly, for a purpose of reducing the weight of the speaker 1, the frame 4 is preferably formed with a resin.

For the speaker 1 having the above-described structure, the voice currents are supplied to the voice coil 12 via the lead wires and such, and in response to the voice currents the voice coil 12 positioned in the magnetic gap G vibrates along the central axis P. Then, the voice coil bobbin 13 vibrates along the central axis P with the damper 14 and the diaphragm 15 and such. The voice coil 12 is wound around the outer circumference of the voice coil bobbin 13. That is, the diaphragm 15 to which the vibration of the voice coil 12 is transmitted vibrates and thereby generates sound corresponding to the voice currents. At this time, the damper 14 reduces the vibration of the diaphragm 15 (in the direction perpendicular to the direction of the vibration of the voice coil). Furthermore, the frame 4 includes the connection beams 20a, 20b having the inclination angles $\theta 1$, $\theta 2$ to the central axis P different from each other, thus rigidity of the frame 4 is improved and production of distortion such as curvature in the frame 4 can be prevented.

According to this exemplary embodiment, in the cross section passing through the central axis P of the speaker 1, the inclination angle $\theta 1$ of the one connection beam 20a to the central axis P and the inclination angle $\theta 2$ of other connection beam 20b to the central axis P are different from each other. Consequently, rigidity of the frame 4 can be ensured while reducing the weight thereof and positioning the plurality of connection beams 20a, 20b at intervals. Therefore, for example, production of distortion such as curvature in the frame 4 can be prevented, a resonance with a door panel of a motor vehicle when mounted at the door panel can be prevented, and deterioration in the acoustic characteristic can be prevented. Furthermore, a resonance in the frame 4 due to the vibration of a magnetic circuit 2 produced when the speaker 1 is driven can be prevented.

Furthermore, the one connection beam 20a is formed into a linear shape and the other connection beam 20b is formed so as to include the first linear portion 29 and the second linear portion 30 bending from the first linear portion 29. Consequently, the inclination angles $\theta 1$, $\theta 2$ of these connection beams 20a, 20b to the central axis P will securely be different, thereby reliably ensuring rigidity of the frame 4.

Since the second linear portion 30 of the other connection beam 20b is arranged substantially parallel to the central axis P, the inclination angles $\theta 1$, $\theta 2$ of the one connection beam 20a and of the first linear portion 29 of the other connection beam 20b to the central axis P will securely be different.

The connection beams 20a, 20b include the grooves 31. Furthermore, the grooves 31 are provided at the first linear portion 29 of the other connection beam 20b. Consequently, rigidity of the connection beams 20a, 20b can be reliably ensured while further reducing the weight of the connection beams 20a, 20b, i.e. the frame 4.

The connection beams 20a, 20b includes the H-shaped portions 32, 33 having the H-shaped cross-section. Moreover, this H-shaped portion 33 is provided at the first linear portion 29 of the other connection beam 20b. Consequently, rigidity of the connection beams 20a, 20b can be reliably ensured while further reducing the weight of the connection beams 20a, 20b, i.e. the frame 4.

The magnet support portion 18 includes the damper mounting portion 23 at which the damper 14 is attached. Consequently, rigidity of not only the connection beams 20a, 20b but also of the magnet support portion 18 can be reliably ensured.

The bottom portion 21 at which the magnetic circuit portion 2 of the magnet support portion 18 is attached is positioned farther from the vibration support portion 19 compared to the damper mounting portion 23. Consequently, the damper mounting portion 23 and the bottom portion 21 are arranged at different positions along the central axis P, and thus rigidity of the magnet support portion 18 can be ensured.

The connection beams 20a, 20b connect to the back face 24b in a view of the surface 24a of the damper mounting portion 23. Consequently, the connection beams 20a, 20b are arranged to project from the magnet support portion 18, thereby ensuring rigidity of the magnet support portion 18.

The connection beams 20a, 20b connect to the back face 21a of the bottom portion 21 of the magnet support portion 18. Consequently, the connection beams 20a, 20b are arranged to project also from the bottom portion 21 of the magnet support portion 18, thereby ensuring rigidity of the magnet support portion 18.

A plurality of the one connection beam 20a and the other connection beam 20b is provided. Consequently, rigidity of the frame 4 can be securely improved. Furthermore, by providing the plurality of connection beams 20a, 20b, several transmission paths for the vibration transmitting on the frame 4 can be provided, thus the vibration can be canceled out at the frame 1.

The above-described speaker 1 includes the above-described frame 4. Consequently, by improving rigidity of the frame 4, production of distortion such as curvature in the frame 4 can be prevented, production of distortion in the edge with the distortion of the frame 4 can be prevented, displacement of the voice coil in the magnetic gap with the distortion of the edge can be prevented, contact of the voice coil 12 with the plate 9, the magnet 8 and the yoke 11 and such constituting the magnetic circuit portion 2 caused by the displacement of the voice coil can be prevented, and generation of an unwanted noise due to the above-described contact and deterioration in the acoustic characteristic due to the generation of the unwanted noise can be prevented. Furthermore, a resonance in the frame 4 due to the vibration of a magnetic circuit portion 2 produced when the speaker 1 is driven can be prevented. Furthermore, by providing the plurality of connection beams 20a, 20b at the frame 4, there can be provided several transmission paths for the vibration transmitting on the frame, thus the vibration can be canceled out at the frame, in other words, production of a resonance can be prevented.

In the above-described first exemplary embodiment, the one ends of the connection beams 20a, 20b connect to the outer edge of the flange portion 24 of the magnet support portion 18; however, in the present invention, the one ends of the connection beams 20a, 20b may connect to the outer edge of the bottom portion 21, as shown in FIG. 9 (FIG. 9 shows in case of the connection beam 20b), or the one ends of the connection beams 20a, 20b may connect to the outer circumferential face of the damper mounting cylinder portion 25 of the magnet support portion 18, as shown in FIG. 10 and FIG. 11. Furthermore, in regards to the connection beam 20b shown in FIG. 9, if necessary, especially only the first linear portion 29 of the connection beam 20b may be substantially parallel to the connection beam 20a. In this case, the second linear portion 30 may be different from an inclination angle $\theta 1$ of the connection beam 20a to the central axis P, and may be configured to be either smaller than or greater than $\theta 1$.

In addition, in FIG. 9 through FIG. 11, the components similar to those of the first exemplary embodiment are

indicated by the same reference signs and a detailed explanation is eliminated. Also, when shown in FIG. 9 through FIG. 11, similar to the above-described first exemplary embodiment, it is possible, for example, to reliably ensure rigidity of the connection beam 20a, 20b, reliably ensure rigidity of the magnetic supporting portion 18, securely improve rigidity of the frame 4, prevent production of distortion such as curvature in the frame 4, prevent production of distortion in the edge 17 with the distortion of the frame 4 and the displacement of the voice coil 12 in the magnetic gap with the distortion of the edge 17, prevent contact of the voice coil 12 with the plate 9 and such constituting the magnetic circuit portion 2 caused by the displacement of the voice coil 12, prevent generation of an unwanted noise due to the above-described contact and prevent deterioration of the acoustic characteristic due to the generation of the unwanted noise. Furthermore, a resonance in the frame 4 due to the vibration of a magnetic circuit portion 2 produced when the speaker 1 is driven can be prevented. Furthermore, by providing the plurality of connection beams 20a, 20b at the frame 4, there can be provided several transmission paths for the vibration transmitting on the frame 4, thus the vibration can be canceled out at the frame 4, in other words, production of a resonance can be prevented.

Second Exemplary Embodiment

Next, a second exemplary embodiment of the present invention will be explained in reference with FIG. 12 through FIG. 15. For the second exemplary embodiment of the present invention shown in FIG. 12 through FIG. 15, the components similar to those of the first exemplary embodiment are indicated by the same reference signs and a detailed explanation is eliminated.

In this exemplary embodiment, for the frame 4, as shown in FIGS. 12 and 13, the vibration support portion 19 includes a tubular portion 34 and a flange portion 35 in addition to the above-described vibrating body mounting portion 26 and the outer tube portion 27. The tubular portion 34 is formed into a cylinder-like shape and is provided to stand from the outer edge of the vibrating body mounting portion 26 in an opposite direction of the outer tube portion 27. The flange portion 35 is formed into a circular-ring-like shape. And an inner edge of the flange portion 35 connects to an edge of the tubular portion 34 distant from the vibrating body mounting portion 26. And the flange portion 35 projects from the tubular portion 34, i.e. the vibrating body mounting portion 26, in the outer circumferential direction. Furthermore, the flange portion 35 includes a through hole 28 to pass through a bolt for fixing the frame 4, i.e. the speaker 1, to a door panel.

Furthermore in this exemplary embodiment, the connection beams 20a, 20b, as shown in FIG. 14 and FIG. 15, extend from the inner edge of the vibrating body mounting portion 26 towards an inner circumferential face of the tubular portion 34 and, of course, connect to the inner circumferential face of the tubular portion 34.

According to this exemplary embodiment, the vibration support portion 19 includes the tubular portion 34 connecting to the outer edge of the vibrating body mounting portion 26. Consequently, as compared with the above-described first exemplary embodiment, rigidity of the vibration support portion 19 can be further improved, thus rigidity of the frame 4 can be further improved. Furthermore, a resonance in the frame 4 due to the vibration of a magnetic circuit portion 2 produced when the speaker 1 is driven can be

prevented. Furthermore, both of the connection beams **20a**, **20b** extend from the vibrating body mounting portion **26** further to the tubular portion **34**. Consequently, the connection beams **20a**, **20b** can be formed projectingly from the vibrating body mounting portion **26** and rigidity of the vibration support portion **19** can be further improved.

Moreover, the vibration support portion **19** includes the flange portion **35** projecting from the tubular portion **34**, that is, from the vibration support portion **19**, in the outer circumferential direction. Consequently, rigidity of the vibration support portion **19** can be reliably ensured.

Furthermore, in this exemplary embodiment, as shown in FIG. **16**, the first linear portion **29** of the other connection beam **20b** may connect directly to the tubular portion **34**, and a portion of the other connection beam **20b** connecting to the tubular portion **34** may be positioned nearer to the magnet support portion **18** (downwardly) compared to a portion of the one connection beam **20a** connecting to the vibrating body mounting portion **26**. Furthermore, in FIG. **16**, the second linear portion **30** of the other connection beam **20b** may be integrally formed so as to project from the inner circumferential face of the tubular portion **34**, extend to the vibrating body mounting portion **26** and, of course, connect to the vibrating body mounting portion **26**.

In this case, the one connection beam **20a** connects to the vibrating body mounting portion while the other connection beam **20b** connects to the tubular portion **34**. Thus, positions of the connection beams **20a**, **20b** connecting to the vibration support portion **19** are different from each other. Consequently, rigidity of the frame **4** can be improved.

The other connection beam **20b** extends from the tubular portion **34** further to the vibrating body mounting portion **26**. Consequently, the connection beam **20b** can be formed to project from the tubular portion **34** and rigidity of the vibration support portion **19** can be further improved.

The portion of the other connection beam **20b** connecting to the tubular portion **34** is positioned nearer to the magnet support portion **18** (downwardly) compared to the portion of the one connection beam **20a** connecting to the vibrating body mounting portion **26**. Consequently, the portions of the connection beams **20a**, **20b** connecting to the vibration support portion **19** are displaced along the central axis P, thus rigidity of the frame **4** can be improved.

According to the first and the second exemplary embodiments described above, the below-described speaker frame **4** is provided.

APPENDIX

A speaker frame **4** including: a vibration support portion **19** supporting a diaphragm **15** of a speaker **1**; a magnet support portion **18** arranged inside of the vibration support portion **19** and supporting a magnetic circuit portion **2** of the speaker **1**; and a plurality of connection beams **20** connecting the vibration support portion **19** and the magnet support portion **18**, in which, in a cross section passing through a central axis P of the speaker **1**, an inclination angle $\theta 1$ of one connection beam **20a** to the central axis P and an inclination angle $\theta 2$ of other connection beam **20** to the central axis P are different from each other.

According to the appendix, in the cross section passing through the central axis P of the speaker **1**, the inclination angle $\theta 1$ of the one connection beam **20a** of the plurality of the connection beams to the central axis P is different from the inclination angle $\theta 2$ of the other connection beam **20b** to the central axis P. Consequently, rigidity of the frame **4** can be ensured while reducing the weight thereof and position-

ing the plurality of connection beams **20a**, **20b** at intervals. Therefore, production of distortion such as curvature in the frame **4** can be prevented, a resonance with a door panel of a motor vehicle when mounted at the door panel can be prevented, and deterioration of the acoustic characteristic can be prevented.

It is intended that the above-described exemplary embodiments are only representative embodiments, and it should be understood that the present invention is not limited thereto. That is, various changes can be made and practiced without departing the scope of the present invention. For example, the frame **4** may include the connection beams **20a**, **20b** having a cross section formed in a curved shape, as shown in FIG. **17** and FIG. **18**. Also, for the modified example of the frame **4** shown in FIG. **17** and FIG. **18**, the components similar to those shown in the above-described first and second exemplary embodiments are indicated by the same reference signs, thus a detailed explanation is eliminated. Although the frame **4** shown in FIG. **17** and FIG. **18** is a modified example of the frame **4** shown in the FIG. **7** and FIG. **8** of the first exemplary embodiment, it is not limited to this, and it may be a modified example for the second exemplary embodiment, without any limitation. Furthermore, if necessary, the connection beams **20a**, **20b** may have a substantially same shape.

Moreover, in the above-described exemplary embodiments, both of the connection beams **20a**, **20b** connect to the back face **24b** of the damper mounting portion **23** and connect to the back face **21a** of the bottom portion **21**. However, in the present invention, at least one of the connection beams **20a**, **20b** may connect to the back face **24b** of the damper mounting portion **23** and connect to the back face **21a** of the bottom portion **21**.

The invention claimed is:

1. A speaker frame, comprising:

a vibration support portion including a vibrating body mounting portion for a vibrating body of a speaker, and a tubular portion connecting to the vibrating body mounting portion;

a magnet support portion arranged inside of the vibration support portion and supporting a magnetic circuit portion of the speaker; and

a plurality of connection beams connecting the vibration support portion and the magnet support portion,

wherein the plurality of connection beams contains a first connection beam connected to the vibration support portion at a connection portion, and a second connection beam connected to the vibration support portion at a portion spaced apart the connection portion in a sound emitting direction.

2. The speaker frame as claimed in claim **1**, wherein the first connection beam is connected to the vibrating body mounting portion of the vibration support portion.

3. The speaker frame as claimed in claim **1**, wherein the second connection beam is connected to the tubular portion of the vibration support portion.

4. The speaker frame as claimed in claim **2**, wherein the second connection beam is connected to the tubular portion of the vibration support portion.

5. The speaker frame as claimed in claim **4**, wherein the second connection beam extends from an inner edge of the vibrating body mounting portion towards an inner circumferential face of the tubular portion, and connected to the inner circumferential face of the tubular portion.

15

6. The speaker frame as claimed in claim 4, further comprising:

a projecting portion connecting the second connection beam and the vibrating body mounting portion, and formed on the tubular portion.

7. The speaker frame as claimed in claim 1,

wherein the magnet support portion includes a damper mounting portion for mounting a damper on the speaker, and

wherein the first and second connection beams are connected to the damper mounting portion of the magnet support portion.

8. The speaker frame as claimed in claim 7,

wherein the magnet support portion includes a bottom arranged at a different position from the damper mounting portion along the central axis of the speaker, and a portion at which the magnetic circuit portion of the speaker is attached.

9. The speaker frame as claimed in claim 1,

wherein the tubular portion is formed into a cylinder shape.

16

10. The speaker frame as claimed in claim 1, wherein the tubular portion is connected to an outer edge of the vibrating body mounting portion.

11. A speaker comprising:

a vibrating body;
a magnetic circuit portion; and
a speaker frame,

wherein the speaker frame includes:

a vibration support portion including a vibrating body mounting portion for the vibrating body of the speaker, and a tubular portion connecting to the vibrating body mounting portion;

a magnet support portion arranged inside of the vibration support portion and supporting the magnetic circuit portion of the speaker; and

a plurality of connection beams connecting the vibration support portion and the magnet support portion,

wherein the plurality of connection beams contains a first connection beam connected to the vibration support portion at a connection portion, and a second connection beam connected to the vibration support portion at a portion spaced apart the connection portion in a sound emitting direction.

* * * * *