April 4, 1944. W. R. KOHL 2,345,755

FUMIGANT SUPPORT AND FUMIGANT

Filed Oct. 29, 1940

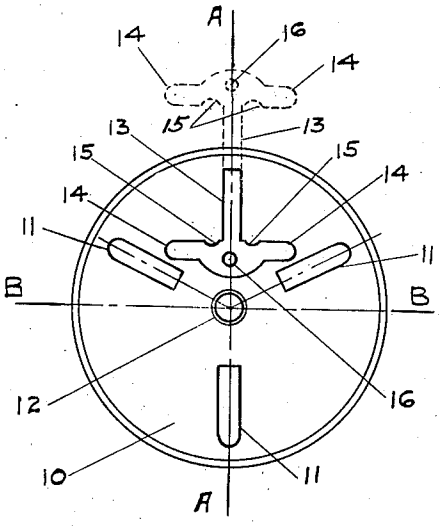


FIG. 1

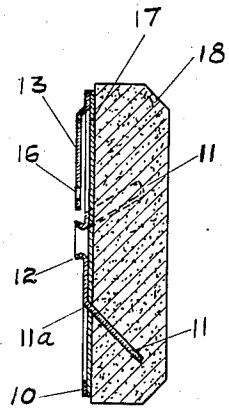


FIG. 2

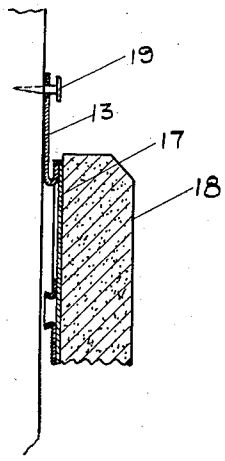


FIG. 3




FIG. 5

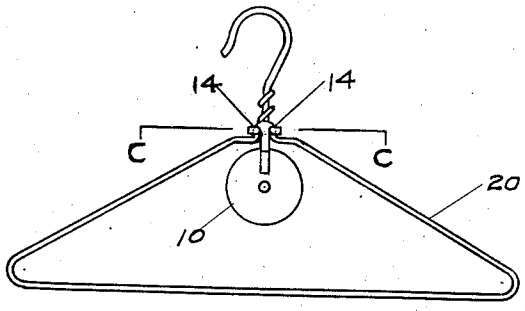


FIG. 4

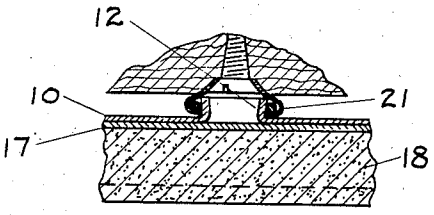


FIG. 6

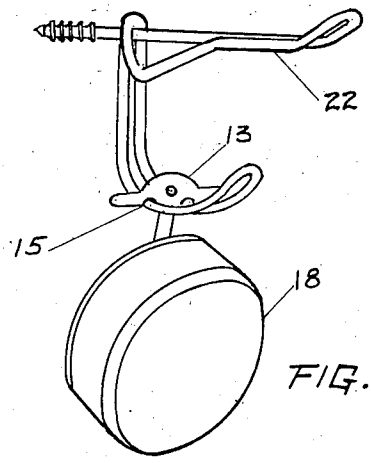


FIG. 7

Inventor:
William R. Kohl
By:
Winfield D. Williams
Attorney.

Patented Apr. 4, 1944

2,345,755

UNITED STATES PATENT OFFICE

2,345,755

FUMIGANT SUPPORT AND FUMIGANT

William R. Kohl, Glenview, Ill.

Application October 29, 1940, Serial No. 363,260

3 Claims. (Cl. 299—24)

My invention is a fumigant support, and a combination with a volatizable medium. This application is an improvement upon my application S. N. 312,928, filed January 8, 1940.

My primary objects are simplicity of construction; minimum cost; and wide range of application.

The drawing illustrates:

Fig. 1 is a plan view of the support.

Fig. 2 is a sectional view through line A—A of Fig. 1, and a fumigant.

Fig. 3 is a broken sectional view on line A—A of Fig. 1, showing a pendent lug bent up for supporting cake, by pin or tack, through a hole.

Fig. 4 is a view illustrating method of supporting a fumigant cake on a wire garment hanger.

Fig. 5 is a view on line C—C (Fig. 4) showing pendent lug bent around the shank of garment hanger.

Fig. 6 is a sectional view on line B—B (Fig. 1) showing method of supporting cake from center boss, engaged in a conventional snap fastener.

Fig. 7 is a view illustrating method of supporting a fumigant cake on a wire coat and hat hook.

As illustrated 10 is preferably a circular metal disc, though it may take any geometrical form superficially. 11 are a plurality of arms punched out of the metal and each adapted to be bent at an oblique angle inwardly for a cake 18 of fumigant material to be cast upon the arms. 12 is a boss punched out of the body 10 and shaped to produce a member of a snap fastener. 13 is a lug punched out of the body 10 having an extension including a pair of ears 14 bearing incisions 15 adapted to fix the support on a wire garment hanger in a closet, as shown in Fig. 7. The lug 13 is designed to be bent upward as shown in dotted lines in Fig. 1, the incisions 15 designed to contact the parallel bars of the garment hanger 22. In Figs. 4 and 5, is shown the ears 14 bent around the neck of a wire garment hanger 20 of conventional type. 16 is an aperture punched through lug 13 designed to attach the device, with a nail or tack 19, to any desired structure. 17 is a structure preferably of fibrous character having a contour registering with the metal body 10 and carries slits 11a through which the arms 11 pass straight before being bent, to be embedded in the cake 18, 11a is also designed to cover the several apertures produced by the punchings in the body. The surface of 17 is adsorptive and possesses a certain affinity for the composition of the volatile cake 18; 21 is the complementary portion of a conventional snap-fastener.

I claim:

1. An article of manufacture comprising a base support for a volatile material consisting of a semi-pliant metal form one surface of which has thereon a plurality of punched-out integral arms adapted to penetrate and retain thereon volatile material and on the reverse surface an integral punched out elongated lug bearing upon its ulterior extension an opposed pair of bendable ears.

2. A claim in accordance with claim 1 in which a transverse aperture lies in the lug extension.

3. An article of manufacture combining a support, a volatile material, a fibrous pad between the support and the volatile material; the support consisting of a substantially flat semi-pliant metal body carrying on one side thereof a plurality of punched-out elongated arms, on the opposite side of the metal body an elongated punched-out portion terminating in a lug having supporting lateral extensions.

WILLIAM R. KOHL.