



(57) **Abrégé(suite)/Abstract(continued):**

in a narrowly accessible space adjacent to shelving. Then, the swing arms are capable of being pivoted to extend outwardly from the plane of the surface of a jack facing the shelving, such that the shelving may be attached to the swing arms, such as by pins tethered to the jack. In one example, a pair of swing arms disposed on opposite sides of a portion of the shelving sandwich the portion of the shelving and support opposite ends of the pins coupling the swing arms to the shelving.

## ABSTRACT

A swing support mobilization lift includes a jack and a pivotably positionable swing arms, pivotally coupled to the jack, such that the attachment mechanism is capable of being initially displaced in the plane of the jack mechanism during insertion of the lifting device in a narrowly accessible space adjacent to shelving. Then, the swing arms are capable of being pivoted to extend outwardly from the plane of the surface of a jack facing the shelving, such that the shelving may be attached to the swing arms, such as by pins tethered to the jack. In one example, a pair of swing arms disposed on opposite sides of a portion of the shelving sandwich the portion of the shelving and support opposite ends of the pins coupling the swing arms to the shelving.

## **SWING SUPPORT MOBILIZATION LIFT**

### **Field of the Invention**

[0001] The field relates to mobilization equipment for shelving.

### **Background**

[0002] Within the context of this specification, gondola, gondola run, gondolas and gondola islands all refer to store shelving known in the field. Gondolas, such as the one depicted in **Figures 13A-13C**, are known with or without a central support column and with one or two sides having shelving attached. Warehouse pallet racking is also known, such as pallet racking used in home centers and warehouses. Unless otherwise expressly indicated, the term gondolas refer to both a single gondola or a gondola run having a plurality of gondolas or both.

[0003] Lifting systems are known that use a plurality of caster wheels to mobilize empty gondolas or gondolas that have at least a portion of the racked products removed from the gondolas. U.S. Patent Publication 2007/0194546, published August 23, 2007, and U.S. Patent Publication 2007/0059138, published March 15, 2007 illustrate systems with a screw or hydraulic jack for lifting gondolas, the description and drawings of which are hereby incorporated for background herein. Two devices are disposed on opposite sides of the gondolas at each upright support, which may be accessible behind a kick plate. Each upright support is raised using the lifting apparatus and the gondola, even if quite long, is movable using the lifting system as a hand truck, with each of the hand trucks being moved at the same time.

[0004] However, deep gondolas and gondolas with products racked on the gondolas cannot be moved using these known devices. An upright support in the middle of a gondola, between two opposite sides of the gondola, bows excessively, causing damage to the gondola support structure and tumbling of the products. Thus, a time consuming unracking and reracking of at least a significant portion of the products on the gondolas is required in order to mobilize the gondolas.



[0005] U.S. Pat. Appl. No. 12/364,177, the disclosure of which is incorporated herein, teaches a system for mobilization of stocked gondolas that allows for mobilization without removing shelving and without removing the products from the shelving of the gondolas or pallet racking. The system described a lifting mechanism attachable an H-support or other upright support of pallet racking, such as for use in mobilization of the pallet racking, but only from an exposed front or side of the H-support. Using the system for mobilizing a gondola permits even very deep and very wide gondolas to be mobilized, without unranking and/or disassembly of the gondolas and/or removal of product from the shelves, when a pair of opposing members are positioned such that the members extend along the depth of the gondola from one side to an opposite side. Each pair of opposing members is positioned such that the pair of members is disposed on opposite sides of a gondola support. A slidable middle lift bracket on each of the pair of opposing members is positioned at the middle, upright support of the gondola, and may have additional lift brackets disposed at other upright support members of the gondola. An interlinking tongue and loop system may be used to slide under the supports and to engage one lift bracket to its opposite lift bracket. Thus, the pair of opposing members may provide rigid support to the gondola, when the pair of opposing members are lifted, allowing for mobilization of the gondola. In this system, a modified jack engaged each end of each of the opposing members, such as a screw or hydraulic mechanism coupled with a pair of forks capable of engaging the pair of opposing members, such that the forks raise and lower the pair of opposing members together, at the same time. The forks are fixed in position and are not capable of displacement to make positioning of the jack in narrow inaccessible spaces.

[0006] In one example, a hand crank, such as a hand crank and screw similar to that of a boat trailer hitch apparatus, is used to lift a pair of forks inserted into the opposing members. A screw and handcrank is capable of replacing a heavier, more expensive and harder to maintain hydraulic jack, for example, when a plurality of such lift mechanisms are coupled to opposite ends of a plurality of the support apparatuses spaced at intervals along a gondola run. No single lift mechanism is required to exceed its rated lifting potential. The lack of any significant sagging from one side of the gondola reduces the height that the lift must raise the gondola to mobilize it, because the support bar is capable of supporting the supporting structure of the gondola a plurality of support points, such as three or more support points. In some of the

examples, three support points are disclosed, but additional support points may be added in other applications requiring support of larger spans, for example.

[0007] Single sided gondolas and islands may be raised and lowered similarly to the double-sided gondolas provided in the examples. In single sided gondolas, a support bar may be supported on only one side by a lift mechanism or on both sides. If supported on only one side by a lift mechanism, then other end of the support bar may be unsupported, requiring a counterbalance on the lift mechanism, or may be provided with a low-profile caster wheel that provides a fulcrum at an opposite end of the support bar assembly for lifting of the gondola during raising of the end of the support bar assembly attached to the lift mechanism, for example. In this way, a gondola having one side against a wall may be mobilized, for example, using a plurality of lift mechanisms along the side of the gondola facing away from the wall, only, while the low-profile casters inserted into or onto the support bar assemblies allow the support bar assemblies to be inserted and aligned under the gondolas.

[0008] Instead of forks, other structures are suggested to mount the lifting apparatus to the support structures used in lifting of the gondolas or to the gondolas, themselves. These other structures may be grabs, bolts or fingers, for example. Grabs are L-shaped extensions from a surface of the lift mechanism that are capable of engaging slots in a coupling mechanism or a gondola. For example, forks may be attached to an attachment member having slots that engage the grabs, allowing the forks to be positioned in the ends of the gondola support bars prior to engaging the lift apparatus to the forks. Then, the lift apparatus may be positioned such that the grabs engage the slots in the attachment member of the forks, and the lift apparatus may be raised until the grabs firmly engage in the slots prior to raising the gondolas. Bolts are fasteners extending from the lift mechanisms that are coupled with nuts or plates having a threaded or other coupling mechanism for attachment to the bolts when inserted through a hole or slot in the gondolas or the attachment member of the forks, for example. Fingers are projections, shaped or straight that matingly engage the gondola or the attachment member of the forks, for example. Thus, when properly engaged to the supports or the gondolas, the lift mechanism provides for a positive displacement upward and downward. However, these other structures did not suggest the use of any structures capable of moving, pivotally, while remaining engaged to the lift mechanism.



[0009] Shelving used in warehouses, superstores, consumer retail clubs and home improvement stores cannot be moved using a lifting bar mechanism. Furthermore, these types of shelves are usually positioned back-to-back to form aisles with little space between the shelves, making it difficult to insert any known lifting mechanism between the shelves. Instead, only the sides of the shelving are accessible for coupling to the jacks described in a Mobilization System for Lifting and Mobilization of Gondolas.

## **Summary**

[0010] A lifting device includes a jack and a pivotably positionable attachment mechanism, pivotally coupled to the jack, such that the attachment mechanism is capable of being initially displaced in the plane of the jack mechanism during insertion of the lifting device in a narrowly accessible space adjacent to shelving. Then, the attachment mechanism is capable of being pivoted to extend outwardly from the plane of the surface of a jack facing the shelving, such that the shelving may be attached to the attachment mechanism extending on one or both sides of a shelving support.

[0011] For example, the shelving support may be an upright element of H-shelving that has holes provided in the upright element, and the attachment mechanism may comprise one or more holes extending through a plate pivotally coupled to the jack by a hinge. When pivoted into position for attaching to the shelving, a pair of plates may sandwich the upright element. By adjusting the height of the plates, such as by raising or lowering the jack with a ratchet mechanism, one or more pins may be inserted through the holes in the plates and the holes in the upright element of the shelving, securing the lifting mechanism to the upright element. By raising the raising the lifting mechanism using the jack, the lifting element, in conjunction with a set of lifting mechanisms likewise attached to other upright elements of the shelving, supports the weight of the shelving, with or without unstocking the shelving.

[0012] The pivotably displaceable attachment mechanism makes insertion of the lifting device possible in a narrow space provided between back-to-back rows of stocked shelving, which would otherwise be immovable using known jacks and mobilization gear.

[0013] In addition, the pins used with the attachment mechanism to secure the upright element of shelving to the attachment mechanism may, themselves, be secured to the jacks by a tether, at all times. In combination with the pivotally coupled plates of the attachment mechanism, for example, the tethered pins insure that everything necessary to align and attach a lifting device to shelving is present at all times.

### **Brief Description of the Drawings**

[0014] Figures 1A – 1C illustrate views of one example of a support bar assembly of a mobilization system for lifting and mobilization of gondolas.

[0015] Figure 1B illustrates a top plan view of the example in Figure 1A.

[0016] Figure 2A and 2B illustrate views of a tube having a channel.

[0017] Figures 3A-3B illustrate (A) a partial cross sectional view of an example of a caster wheel insert **300** for single-sided gondola mobilization, and (B) an end portion **302** for coupling with an end of a support bar assembly.

[0018] Figure 4A illustrates a side view of an extendable member for insertion telescopically into a receiving extendable member of the example illustrated in Figures 1A – 1C.

[0019] Figure 4B illustrates an end plan view of the extendable member of Figure 4A.

[0020] Figure 5A sketches an example of a system for mobilization of stocked gondolas mounted on two different types of manual lift trucks.

[0021] Figure 5B sketches a push pull rod.

[0022] Figure 6A illustrates a perspective view of an extendable tube for use in fabricating an extendable member of the system of Figure 1A and Figure 1B.

[0023] Figure 6B illustrates a side view of the extendable tube of Figure 6A.

[0024] Figure 6C illustrates a top view of the extendable tube of Figure 6A.

[0025] Figure 6D illustrates an end view of the extendable tube of Figure 6A.



[0026] Figures 7A – 7C illustrate views of a receiving member.

[0027] Figure 7B illustrates a side plan view of the receiving member of Figure 5A.

[0028] Figures 8A – 8C illustrate views a tongue.

[0029] Figure 9A – 9C illustrate views of a tube fabricated from two L-shaped members.

[0030] Figures 10A – 10C illustrate views a retaining member.

[0031] Figures 11A and 11B illustrate a mating portion of a lifting apparatus for use with examples of a mobilization system for use with gondolas.

[0032] Figures 12A – 12C illustrate views of a slide bracket.

[0033] Figure 12B illustrates an end plan view of the assembly of Figure 12A.

[0034] Figures 13A – 13C illustrate a known gondola with (A) an assembled gondola run, (B) an exploded view of a gondola section, and (C) an end cap for terminating one end of the gondola run.

[0035] Figure 14 illustrates a sketch of an example of a portion of a lifting apparatus for mobilization of stocked gondolas assembled and installed on one end of a gondola having products displayed on the shelving of the gondola.

[0036] Figures 15A-15E illustrate sketches of an example of a lifting mechanism.

[0037] Figures 16A-19B illustrate views of examples of a lifting device insertable in a gap between two back-to-back rows of warehouse shelving, for example.

[0038] Figure 20 illustrates an exploded view of one example of a lifting device.

[0039] Figure 21 illustrates a detailed, perspective view of an example of a plate used in an attachment mechanism.

[0040] Figure 22 illustrates a support plate used in a support for an attachment mechanism.

[0041] Figure 23 illustrates a known ratchet wrench.

[0042] Figure 24 illustrates a plurality of lifting devices supporting shelving.

### Detailed Description

[0043] Many variations and combinations of the component parts illustrated in the drawings and disclosed in the examples are included within the scope of the invention. **Figures 1A – 1C and 5A** illustrate an example of a support bar assembly **1000** of a mobilization system for stocked gondolas **1**. A system comprises two opposing, complementary assemblies **1000** that have brackets **50, 120** and one or more extendable members **60, 160** -- with tongues **32, 124, 82** that fit into receiving members **70, 122** of one assembly **1000** opposite from the other assembly **1000**. The tongues **32, 124, 82** and receiving members **70, 122** interlock and support a plurality of support points of a gondola, such as the middle support **B** and outer supports **A, C** of gondola **1**, as illustrated in the example of **Figure 14**. The gondola **1** may be stocked with items **3** on the shelves during mobilization of the gondola **1**.

[0044] Components may be fabricated, such as by welding and assembly, to provide a pair of complementary, opposing support bar assemblies **1000**, such as illustrated schematically in the sketch of **Figure 5A**. **Figure 2A** shows a side plan view of a tube used in fabricating components of the examples. The tube **200** may be made of a rigid material having a sufficient stiffness and other mechanical properties to safely raise and move gondolas together with items stocked on the gondolas. The dimensions of the tube **200** are selected to provide sufficient stiffness and to mate with other components of the assemblies **1000**. For example, components may be coupled telescopically, as illustrated in **Figure 1A – 1C**. The height **H** of a support component, such as the extendable member **60**, must be able to fit under the bottom shelf of a gondola, if a solid kick plate is removed or if an open-faced kick plate is present or otherwise. The length of a support component **L**, such as an extendable member **60**, may be selected to allow the assembly **1000** to extend from one side of a gondola to the other, when coupled telescopically with other components of the assembly **1000**. A plurality of opposing assemblies **1000** may be coupled at a plurality of supports along the length of a gondola or gondola run, such as a gondola run running the length of an aisle in a store. By installing a plurality of the



assemblies **1000** along the length of the gondolas, the entire aisle of gondolas may be lifted and mobilized, together with stockage, for example.

[0045] On one end of an assembly **1000**, an end bracket **50** may be attached to an extendable member **160**, which may be telescopically mated with another extendable member **60**, for example. An end bracket **50** may be coupled to an extendable member **60**, **160** by any means, such as by welding, fastening, bonding or the like. In one example, an extendable member **60** has an integrated end bracket with a slot **65** for holding a pin, as illustrated in detail in **Figures 6B** and **11B**, and a retaining member **70** and tongue **82** welded to a bottom portion of the extendable member **60**. The slot may have a length **q** greater than its width **p**, and may be distance from the top of the member **60** and at a distance **c** from the end of the member **60**. The distances **a**, **c** may be selected to align the slot **65** with a recess **25** in one of the forks **20**, as illustrated in **Figure 11A**, for example.

[0046] In one example of an extendable member **60**, fourteen through holes **63** or recesses may be provided at a height **h** and starting at a distance **l** from one end of the extendable member **60** as illustrated in more detail in **Figure 6A-6C**. The holes may be disposed at a distance **b** one from the other, for example, such that telescopically inserted second extendable member **160** may be coupled with a retainer in one or more of the holes **63** of the first extendable member **60** having the holes **63**, as illustrated in **Figures 1A** and **1B**, which show the second extendable member **160** extending into the first extendable member **60**, by making the first extendable member **60** transparent or using hidden lines. The holes **63** may be provided for convenience and flexibility in adjusting the length of a support bar **1000** during installing and disassembly of the system, for example.

[0047] **Figure 2B** shows a perspective view of a tube **200** having a channel **229** extending along the length of a tube **200**. The example of a tube **200**, as illustrated in **Figures 2A** and **2B** may be used to fabricate components of the support bar assembly **1000**, for example. The channel **229** may have another tube inserted along the channel, providing for a telescopic fit of one tube inside of the other or a sliding fit of a bracket made from the tube on another tube. Thus, the tube **200** may cooperatively engage another tube or a solid member for extending along the axis of the tube **200**. In this way, the system may be adjusted in length to accommodate a



variety of gondolas with varying lengths, depths, widths and configurations. For example, a middle slide bracket **120** may be fabricated from such a tube **200** and may be slidably disposed on the extendable member **60**, as illustrated in **Figure 1C**. The slide bracket **120** is moveable in either direction **Q** along the extendable member **60**, allowing the slide bracket **120** to be aligned with a central support **B** of a gondola **1**, for example, as illustrated in **Figure 14**. A middle slide bracket **120**, as illustrated in the example of **Figures 9A-9C**, may be fabricated by tube forming or by welding or otherwise binding together of two L-shaped members **121**, **123** to form the tube **200**. **Figures 12A-12C** illustrate a detail view of such a slide bracket **1200** having a tongue **82** and a retainer **122** welded to the bottom of one of the L-shaped members **121**, **123** that form the tube **200**, for example. Dimensions shown are provided as an example, only.

[0048] A tongue **82** may have a tapered end **84**, such as illustrated in **Figures 8A-8C**, for example. In one example, the tongue **82** has material removed, such as by machining or grinding, to form the tapered end **84**. In another example, the tapered end **84** of the tongue **82** is forged into shape. The tapered end **84** is insertable to provide support under a gondola **1** support **A**, **B**, **C** and extends through a retaining member **122** of an opposite positioned assembly **1000**, for example.

[0049] **Figures 3A-3B** illustrate (A) a partial cross sectional view of an example of a caster wheel assembly **300** for single-sided gondola mobilization, and (B) an end portion **302** for insertably coupling with an end of a support bar assembly. Other end portions may be used to couple with the support bar assembly. A caster wheel **304** multi-directionally couples a wheel **305** to a coupling member **306**, such as by a threaded lug **307**. The wheel **305** pivots freely about a rotational axis that may be aligned with the axis of the lug **307**, for example. A cavity is formed by the coupling member **306** that permits free pivoting of the wheel **305** within the cavity during mobilization of the gondolas. The wheel **305** extends below the end portion **302** used for coupling with the support bar assembly. By extending slightly below the support bar assembly, the wheel **305** may act as a fulcrum point for raising a gondola, when support bar assemblies having the caster wheel assembly **300** coupled at one end are raised at an opposite end by a lift mechanism. In one example, the end portion **302** is coupled to the support bar assembly by inserting the end portion **302** into the support bar assembly in the same manner as one of the forks of a lift mechanism would be inserted into the support bar assembly. A slot or hole **309**

may be provided for insertion of a pin to retain the end portion 302 within the support bar assembly, for example.

[0050] One-sided gondolas and islands may be raised and lowered similarly to the double-sided gondolas provided in the example of **Figure 14**. In single sided gondolas, a support bar may be supported on only one side by a lift mechanism or on both sides. If supported on only one side by a lift mechanism, then other end of the support bar may be unsupported, requiring a counterbalance on the lift mechanism, or may be provided with a low-profile caster wheel assembly 300, such as illustrated in **Figures 3A** and **3B**, for example. In this way, a gondola having one side against a wall may be mobilized, for example, using a plurality of lift mechanisms along the side of the gondola facing away from the wall, without the use of any other special equipment than the caster wheel assemblies 300. Thus, a system for mobilization of double-sided gondolas 1 may be used for single-sided gondolas positioned against a wall, without much modification to the method or equipment. A push/pull rod or other device may be coupled to a mounting bracket 301, which may be coupled to the caster wheel assembly 300, for example, to assist in the pushing or pulling of gondolas 1. In another example, a pair of caster wheel assemblies 300 may be used for one or more of the pair of opposing support bar assemblies 1000 in mobilization of double sided gondolas 1 or gondola islands.

[0051] **Figures 4A** and **4B** show an extendable member 400 for insertion into a receiving extendable member 60. A detent ball 405 provides for retaining of the member in the receiving member, for example. Alternatively or additionally, a pin may be inserted through a hole 406 in the member.

[0052] **Figure 5** provides a sketch of an assembled example of pair of support assemblies 1000 of a system for mobilization of stocked gondolas mounted on two different types of manual lift trucks 1400, 1401. One of the trucks 1401 uses a lift mechanism similar to a boat trailer jack. A boat trailer jack uses a hand crank to raise and lower the boat and to give the trailer mobility, in some instances, when the jack has one or more caster wheels. A rack and pinion gear mechanism may be used to translate rotational motion of a hand crank to translational motion of the jack raising and lowering the gondolas, for example. The other truck 1400 uses a hydraulic jack, for example. Any jack with sufficient force to lift the gondolas may be used with a hand



truck of the type known in the art to lift and mobilize the gondolas. The hydraulic truck 1400 has an hydraulic jack 1559 mounted between a base and a height adjustable lifting mechanism 1557, which may have one or more grabs 1510 for coupling to a mounting fixture, such as a plate 1593 or slats 1594, 1596. A handle 1553 is provided for positioning and coupling the hydraulic lift 1400 to the support assembly 500. As illustrated in Figure 5B, a push-pull rod 1580 may be coupled by a hook to an eyebolt 1526 or a U-shaped attachment point 1525 on a truck 1400, 1403, as illustrated in Figures 5A and 15A, respectively.

[0053] Figure 6A shows a perspective view of an example of an extendable member 60 that has a channel 61 for mating with a fork-like extension, for example. The member 60 may itself be inserted into a channel 42, 52 of another tube 40, 41. As sketched in the example of Figure 5A, a support assembly 500 may comprise a pair of opposing support bar assemblies 1000, as illustrated in detailed views of Figures 1A-1C, for example. In the detailed views of Figures 1A-1C, one end 50 slips telescopically over a first end of an intermediate member 160, and an elongated member 40 slips telescopically over an opposite end of the intermediate member 60. The elongated member 40 in this example has a plurality of holes 63 extending through the thickness of at least one outer wall of the tubular member 40, such that a pin or detent ball or both may be used to couple the elongated member 40 and the intermediate member 160 preventing relative movement of the two members 40, 160 during mobilization of a gondola or a pallet racking. In Figure 5A, a partial exploded view illustrates the alignment and positioning of two examples of trucks 1400, 1401 with one using a hand crank 145 for raising and lowering the system and the other using a hydraulic jack handle 1555 to raise and lower a hydraulic jack 1559 that raises and lowers the system. One end 41 may be coupled to the other tube 40, 60, 160 by an intermediate member 54, as illustrated in the example of Figure 11B, for example. Regardless of the type of coupling of one member of a support bar to another, tongues 32, 34 and retainers 70 are aligned between the right-hand and left-hand support bars to provide an interlocking fit, for example.

[0054] As illustrated in the drawings of the system, a receiving member 70 is attached to opposing members and are disposed to receive the tongue of the opposing member. A receiving member 70 has a first end 73 and a second end 71 that are attachable to a portion of the system



and a body 72 connecting the first end 73 and the second end 71, as illustrated in the views of **Figures 7A – 7C**, for example.

[0055] **Figures 8A and 8B** illustrate a tongue 82 having a tapered end 84. A tongue 82 and a receiving member may be assembled for a bracket. A receiving member 70, 122 may be used, as illustrated in **Figures 7A-7C** and **Figures 10A-10C**, for example. The bracket 1200 in **Figures 12A – 12C** is assembled using the tube 200 of **Figures 2A and 2B** with the receiving member 122 of **Figures 10A-10C**, such as by welding, for use as a slidable, middle bracket for engaging the gondolas at a middle shelf support B. This middle bracket 1200 allows very heavy gondolas and very deep gondolas to be moved without unstocking the shelves, for example. The tongue 82 may be welded to the tube 200 and the receiving member 122, as illustrated in **Figures 12A-12C**, for example. The assembly provides for an interlocking of the tongues 82, 124, 125 of opposing assemblies 1000.

[0056] **Figures 11A and 11B** show a portion of a manual truck having forked extensions 10, 20, extending fork-like, that mate with tubes 40, 41. The extensions 10, 20 fit into the channels 42, 52 of their respective tubes 40, 41, as illustrated in **Figure 11B**, for example. One of the ends may have a pin 45 inserted through a slot 49 formed in the end of the member 40, and the pin 45 may be disposed such that it engages a recess 25 formed in the end of at least one of the forks 20. When the pin 45 engages the recess 25, the fork 20 is latched in the end of the member 40. Then, when the system is raised, the lifting system, which has wheels, such as caster wheels, may be pulled or pushed to mobilize the gondola and the fork 20 remains latched in the channel formed by the end of the member 40. By lifting the pin 45 free of the recess 25 formed in the at least one fork 20, the fork 20 may be withdrawn from the channel 42, after the gondola is moved and the pair of opposing members are lowered to rest the gondola on the ground, for example. The pin 45 may be retained by a flange, such as a head 47 and/or threaded nuts 43, and/or a cotter pin or the like. Preferably, the pin may be easily raised to release the pin 45 from the recess 25.

[0057] **Figure 11B** illustrates the interlocking relationship between two tongues 32, 34, at one end of a pair of support members, for example. When the opposing members 40, 41 are

aligned on opposite sides of the gondolas supports and are mated, the tongues 32, 34 are retained by the receiving members 70 in the opposing member opposite of the tongues 32, 34.

[0058] **Figure 14** illustrates an example of a system for mobilization of stocked gondolas 1 assembled and installed on one end of gondolas 1 having products 3 displayed on the gondolas 1, for example. A tongue 182 from an opposite half of a lift assembly 500 matingly engages a receiving member of the half of the lift assembly 500 shown on an end of the gondolas 1. In a method of moving gondolas 1 a plurality of lift assemblies 500 are positioned along the length of the gondolas 1 such that the entire length of the gondolas 1 may be raised by the lift mechanisms of the trucks 148. When raised, the gondolas 1 may be moved on the caster wheels 149 of the trucks 148 by pulling or pushing the trucks 148, such as by the push-pull handle 1580 illustrated in **Figure 5B**, for example. In one example, a hand crank 145 with a rack and pinion gear mechanism 142 is used to raise and lower the fork-like extensions 10, 20 attached to the truck 1401, as illustrated in the example of **Figure 5A**, for example. In another example, a hydraulically activated truck 1400 is used to raise and lower fork-like extensions 10, 20 attached to the truck 1400. Either mechanism, or other lift mechanisms, may be capable of raising and lowering gondolas 1, when the lift assembly 500 is aligned on opposite sides of gondola supports A, B, C and is matingly assembled by inserting the tongues 32, 34, 82, 124, 125, 126 into the receiving members 70, 122. In a preferred example, each tongue fits into its respective receiver provider an interlocking fit between each pair of support bar assemblies 500.

[0059] If the opposite halves of the support assembly 500 are properly aligned and matingly engaged, then the extensions 10, 20 of the trucks 147, 148 are aligned and engaged in tubular channels 42, 52 in the ends of tubular members 40, 41, 50, as illustrated in **Figure 5**, **Figure 11A**, **Figure 11B**, and **Figure 14**, for example. A bracket 120 is capable of being aligned with a middle support B, for example, by slidably engaging a continuous tubular member 40 on each of two opposite halves of the support assembly 500, as illustrated in **Figure 14**, for example.

[0060] In the example of **Figure 14**, the length of the two halves of the support assembly 500 is adjusted using extension member 60 and intermediate member 54 for aligning the ends of the tubular supports 40, 60 having tongues 82 with one outer support A of the gondolas 1 and the tongues 32, 34, 182 of a tubular member 50 with an opposite outer support C of the gondolas 1.



The extendable member **60** and intermediate member **54** may telescopically engage to provide for adjusting of the length of the support assembly **500** from one meter to several meters, for example. Since the gondola **1** is fully supported by the middle and outer supports **A, B, C**, items **3** do not have to be removed from the gondola **1**, even for very wide gondolas **1**, which otherwise requires labor intensive removal and restocking. Thus, the support assembly **500** provides for a method that saves substantial time and money compared to prior art methods of gondolas mobilization that could not be used to move wide gondolas. In prior art systems, lifts and wheels were only positioned on the outer supports **A, C** and could not provide support at all of the supports **A, B, C**. Another system is known that only provides support at a middle support **B** but not at all of the supports **A, B, C**.

[0061] In the example of **Figures 15A – 15E**, views of an example of a preferred lifting mechanism **1403** are illustrated or sketched that comprise a hand crank **1530** (detailed view in **Figure 15C**), a screw mechanism contained in a column **1550**, such as a rack and pinion gear, for raising and lowering a coupling mechanism **1500** (detailed views in **Figure 15D** and **15E**) attached to the column **1550** by one or more pins **1502**. A pin **1502** may be biased into a hole **1556** in the column **1550** by a biasing mechanism **1503**, adjustably. A pull knob **1501** may be used to release the pin **1502** from the hole **1556**, as illustrated in **Figures 15A** and **15B**, for example. The coupling mechanism **1500** may include one or more grabs **1510, 1511**, which are capable of being mounted in slots on a plate or other mounting device. As illustrated in the example of **Figures 15D** and **15E**, the grabs **1510, 1511** are both L-shaped members welded to a flared portion **1509** of the coupling mechanism **1500**, for example. A shaft **1507** fits slidably around the column **1550** of the lifting mechanism **1403**, for example. In an alternative embodiment, the coupling mechanism **1500** may be fixed to the column **1550** such as by welding.

[0062] A base **1560** includes a pair of casters **1558** and a mounting surface for mounting to a bracket **1562** of the column **1550**. The coupling mechanism **1500** may include one or more stabilizers **1520** capable of extending to the ground to provide a point of contact to the ground in addition to the casters **1558** for keeping the lifting mechanism **1403** balanced in an upright position, as illustrated in the views of **Figures 15A** and **15E**, for example. Alternatively, the coupling mechanism **1500** may include grabs, fasteners or another coupler for coupling directly



or indirectly with a gondola. The coupling mechanism, as illustrated in **Figures 15D and 15E**, are provided with L-shaped grabs that are capable of mating with slots formed a gondola structure or in a mounting plate that may be attached to a mechanism for coupling to a gondola or support assemblies, such as the fork extensions **10, 20** of **Figure 11A** and as illustrated in **Figure 5A**, for example. In **Figure 5A**, a plate **1593** and a pair of lateral members **1594, 1596** are shown for mounting the forks **10, 20** to an example of a rack and pinion lift mechanism **1401** or a hydraulic lift mechanism **1400**, for example.

[0063] A handle **1530**, such as illustrated in detail in **Figure 15C** may include a rotatable grip **1532** and a ratchet coupling **1535** for removably attaching the handle to a ratchet mechanism in the head of the screw mechanism, such as by the biased detent ball **1537** engaging a groove in the ratchet mechanism **1545**. A ratchet mechanism **1545** in the head **1540** attached to column **1550** is surprisingly useful, allowing precise simultaneous raising of a plurality of lift mechanisms by a plurality of users of a plurality of lifting mechanisms, even if one or more of the lifting mechanism are in areas having insufficient room to rotate the handle **1530** by 360 degrees. In addition, an unexpected advantage of having a removably coupled handle **1530** is that storage requirements for a mobilization system are greatly reduced compared to a system with a fixed handle. A U-shaped handle **1525** on the lifting mechanism **1403** provides for coupling to a pull bar (not shown). A pull bar may have a hook on one end of an elongated member for coupling to the U-shaped handle **1525** and may have a handle on the opposite end of the elongated member. The pull bar may be used to pull or push the lifting mechanism **1403** during mobilization of a gondola **1**, for example.

[0064] **Figures 18A-22** illustrate views of a swing support mobilization lifting device. In this example, a lifting device **5000** is provided for insertion in otherwise inaccessible locations for attachment to support structures of shelving. Holes **H** in the support structure **P** of the shelving are aligned with holes, slots, slits or the like in an attachment mechanism **5010, 5040**. The attachment mechanism may comprise one or more swing arms **5010, 5040** capable of pivotally rotating about a hinge **5017** coupling the swing arm **5010, 5040** to a jack capable of raising and lowering the swing arm. The jack may be any jack, mechanical, electric, hydraulic or pneumatic; however a mechanical jack, such as used for a boat trailer is preferred for ease of maintenance and small size. The attachment mechanism in the example is comprised of two

plates **5010**, **5040** (or plate-like members), but may be comprised of a one or more members of any type capable of pivoting out of the way during placement and being pivoted into a support position capable of engaging a portion of the shelving to be supported. In the example of Fig. 21, holes or slots, **5013**, **5015** are provided in an end of a plate **5010** opposite of the hinge **5017**. A locking tab **5011** may extend from a bottom surface to engagingly fit into slots **5032**, **5034** of a support plate **5030**, as illustrated in Fig. 22, providing locking of the plate in one of two positions. A spring **5012** may bias the plate downwardly, locking the tab **5011** in a slot **5032**, **5034** of the support plate **5030**. Thus, the attachment mechanism is displaceable from a stowed position to a support position, for example, by lifting the plate **5010**, allowing the lifting device to fit into an otherwise inaccessible location in the stowed position, such as illustrated in Fig. 19A, and to support the shelving when pivoted to the supporting position, such as illustrated in Fig. 19B.

[0065] In Figure 16A, one of pins **5056** is shown in a stowed position, tethered to the lifting device. The pin **5056** is removed from the stowed position prior to inserting the pin through one of the holes in the pair of plates **5040**, **5010** comprising the attachment mechanism as illustrated in Figure 16B. Each of the plates are pivotally connectable as illustrated in Figures 17A and 17B, to connect the lifting device **5000** to a support structure **5030**. The jack **5016** of the lifting device **5000**, raises and lowers the support structure **5030** and the pair of plates **5040**, **5010**. Each of the pair of plates **5040**, **5010** in the example illustrated in Figures 16A-19B are biased downwards by a spring **5012**, which functions with a detent **5011** or other structure of each plate to keep it in its stowed position until a user raises the plates when pivoting the plates **5010**, **5040** into a support position, as illustrated in Fig. 19B, for example. In the example, additional support tabs **5042**, **5044** are welded in place on one plate **5040** to increase the area in contact with the each pin **5056**.

[0066] The support structure **5030** is comprised of a pair of identical plates, for example, mounted to the jack **5016** on opposite sides of the attachment mechanism plates **5040**, **5010**. A bolt passing through the identical plates of the support structure **5030** provides a hinge for the plates **5040**, **5010** of the attachment mechanism. Each of the plates **5040**, **5010** includes a sleeve through which the bolt passes, coupling the plates to the support structure **5030**. The spring **5012** biases the plates **5040**, **5010** downward, keeping a tab on the bottom of the plates engaged with a



slot in the plates of the support structure **5030**. By applying a force upward on the plates **5040**, **5010** of the attachment mechanism, the plates are pivotable to a support position on opposite sides of a shelving support structure, as illustrated in Fig. 19B.

[0067] The lifting device includes caster wheels **5054** for mobilization of shelving once the jack **5016** raises the shelving off the floor. A ratchet mechanism **5014** is provided that allows the jack **5016** to be raised and lowered using a socket wrench. A tab **5011** integrally formed on a bottom surface of a plate **5010** in Figure 21 is capable of engaging each of a plurality of slots **5034**, **5032** of a support plate **5030**, as illustrated in Figure 22, when the plate **5010** is in the stowed and support positions, respectively. The plurality of slots may be arranged to position the attachment mechanism in one or more stowed and/or support positions. A hinge bolt extends through the hole **5036** in each of the identical support plates **5030** and the sleeve **5017** of the plate **5010** of the attachment mechanism, pivotally coupling the plate **5010** of the attachment mechanism to the pair of identical support plates **5030**, which may be welded to the jack of the lifting device for raising and lowering of stocked shelving.

[0068] A handle **5020** is provided on the lifting device **5000** for ease in lifting, holding and positioning the lifting device.

[0069] Use of the lifting device illustrated in the examples is accomplished by positioning the attachment mechanism tabs in the stowed position, prior to inserting the lifting device in an otherwise inaccessible space. Then, the attachment mechanism plates **5010**, **5040** are raised to disengage the tabs **5011**, allowing the plates to pivotally rotate about the axis of the hinge bolt **5033** to a support position as illustrated in Fig. 19B. In one example, in Fig. 19, tabs **T1**, **T2** are included to prevent rotation of the plates **5010**, **5040** beyond the tabs **T1**, **T2**. The holes **5013**, **5015** in the plates **5010**, **5040** of the attachment mechanism may be aligned by adjusting the height of the jack **5016**, and the pins **5056** are inserted through holes **H** in the shelving supports **P** and the holes **5013**, **5015** of the plates of the attachment mechanism when aligned with those holes, by removing the tethered pins **5056** from their stowed location and inserting the pins **5056** through the aligned holes **5013**, **5015**, **H**. The jack **5016** may then be raised using a socket wrench **2301** attached to the ratchet extension **5014**. When used to raise a row of shelving, a plurality of lifting devices **5000** are attached to a plurality of shelving supports **P**. Then, all of the lifting devices are raised to raise the entire row of shelving. In one example,



the shelving remains stocked, as illustrated in Fig. 24, during the raising and mobilization of the shelving. The process achieves a very surprising and unexpected rate for the mobilization of shelving compared to any known system of mobilization.

[0070] Any jack could be used to raise and lower the shelving; however, a jack 5016 using a rack and pinion gear is surprisingly versatile in tight spaces and provides adequate lifting capability when used as a system having a plurality of lifting devices. For example, a boat trailer type jacket mechanism has the advantage of having an acceptably narrow width while providing for a displacement that positively locks the position of the shelving in its raised position without slipping or lowering or need of a separate locking mechanism. Other combinations and variations of the features in the examples, obvious to those knowledgeable in the art, may be included and are contemplated as being within the scope of the claims that eventually issue.

## WHAT IS CLAIMED IS:

## 1. A swing support mobilization lift for mobilizing shelving comprises:

a jack;

at least one swing arm pivotally coupled to the jack such that the jack is capable of raising and lowering the at least one swing arm and the at least one swing arm is capable of pivoting from a stowed position to a support position, the support position extending the swing arm outwardly from the jack a distance sufficient to couple the swing arm to a portion of the shelving; and

at least one wheel, coupled to the jack, such that when the jack raises the at least one swing arm, the at least one swing arm displaces upwardly with respect to the at least one wheel.

2. The lift of claim 1, wherein the at least one swing arm includes two swing arms disposed on opposite sides of the jack.

3. The lift of claim 2, wherein each of the two swing arms comprises a latching mechanism for latching each of the two swing arms in a stowed position.

4. The lift of claim 3, wherein the latching mechanism of each of the two swing arms includes a biasing mechanism, each of the biasing mechanisms applying a force on its respective one of the two swing arms.

5. The lift of claim 4, wherein each of the latching mechanisms latches its respective swing arm in a support position pivotally displaced from the stowed position, such that each of the two swing arms extends outwardly from the jack and opposed to the other of the two swing arms.

6. The lift of claim 5, further comprising at least one elongated pin capable of extending through both a hole through the first of the two swing arms and a hole through the second of the two swing arms, coupling the two swing arms to opposite sides of the portion of the shelving.



7. The lift of claim 1, wherein the at least one wheel includes two caster wheels.
8. The lift of claim 1, wherein the jack includes a rack and pinion gear.
9. The lift of claim 1, where in the jack includes a ratchet extension capable of coupling to a socket wrench.
10. A swing support mobilization system comprising a plurality of the lifts of claim 1.
11. A method for mobilizing shelving using the swing support mobilization system of claim 10, comprising:
  - removing a first of the plurality of lifts from a shipping container;
  - positioning the first of the plurality of lifts adjacent to the portion of the shelving;
  - pivotally rotating the at least one swing arm of the first of the plurality of lifts from the stowed position to the support position;
  - coupling the at least one swing arm of the first of the plurality of lifts to the portion of the shelving;
  - raising the jack of the first of the plurality of lifts;
  - repeating the steps of the process for the first of the plurality of lifts for each of the plurality of lifts until the shelving is raised from contacting the floor; and
  - displacing the shelving from its initial location to a location at a distance from its initial location.
12. The method of claim 11, wherein the step of displacing moves the shelving without unstocking the shelving.
13. The method of claim 11, wherein the steps of positioning includes positioning at least a portion of the plurality of lifts between shelving positioned back-to-back with other shelving.

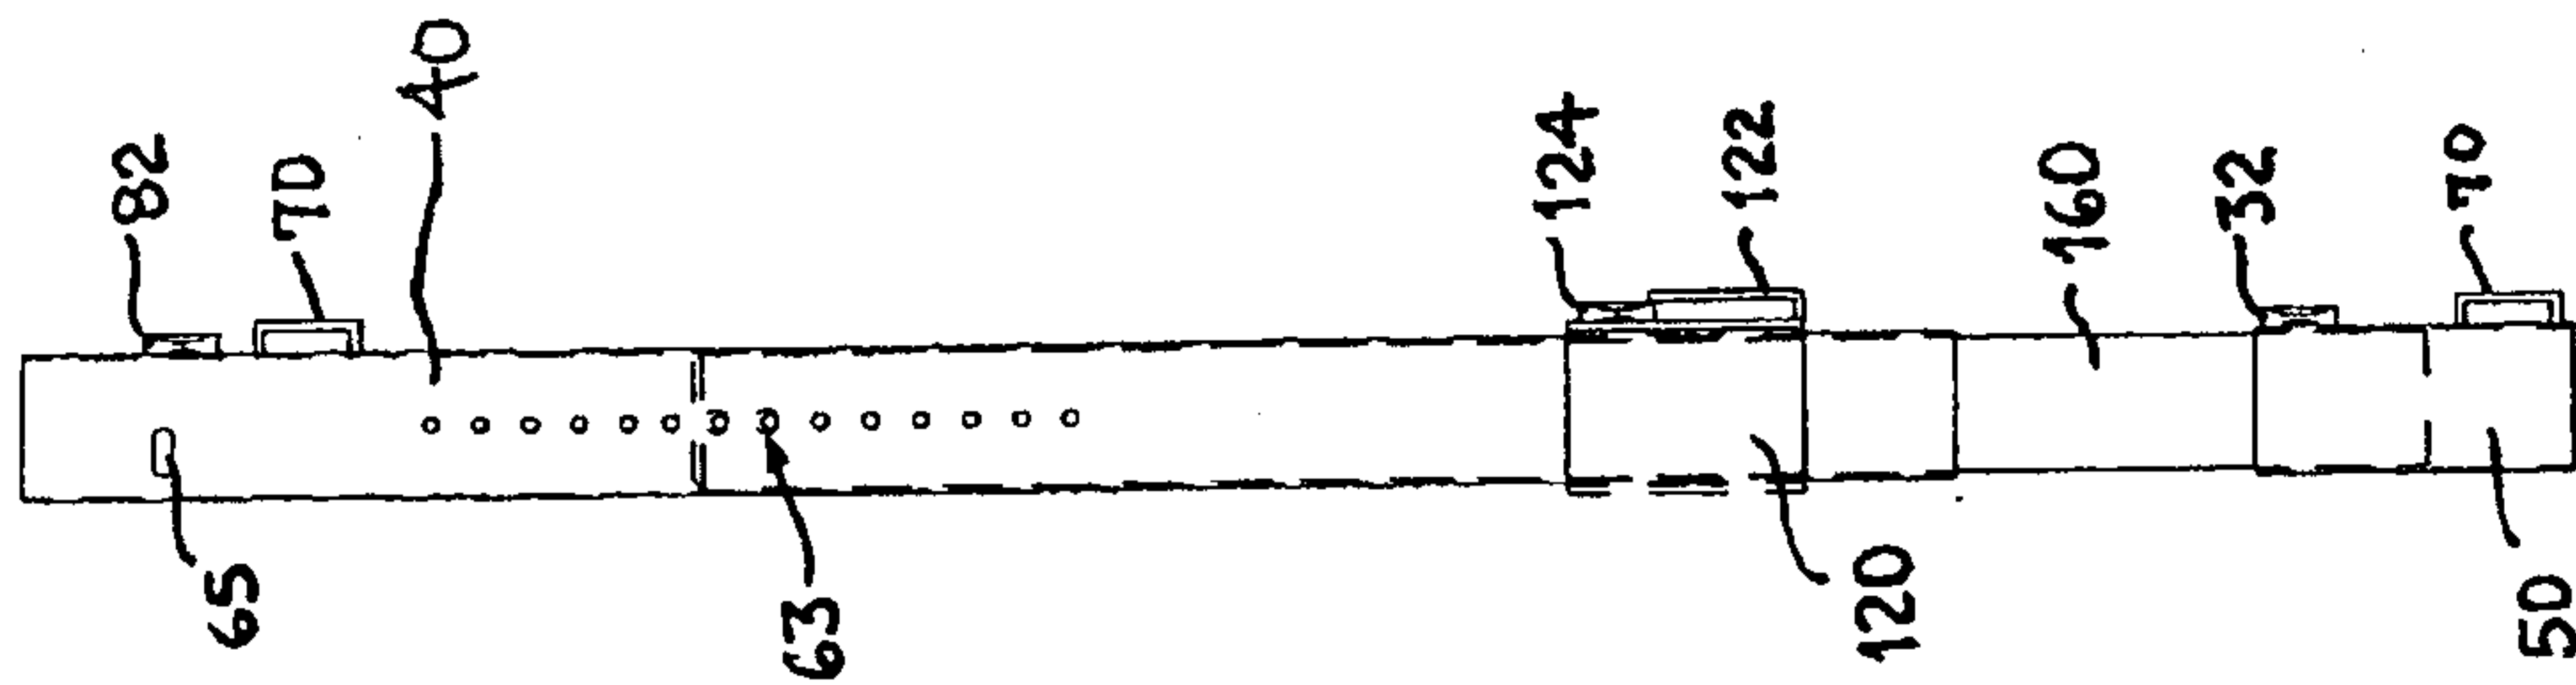


FIG. 1A



FIG. 1B

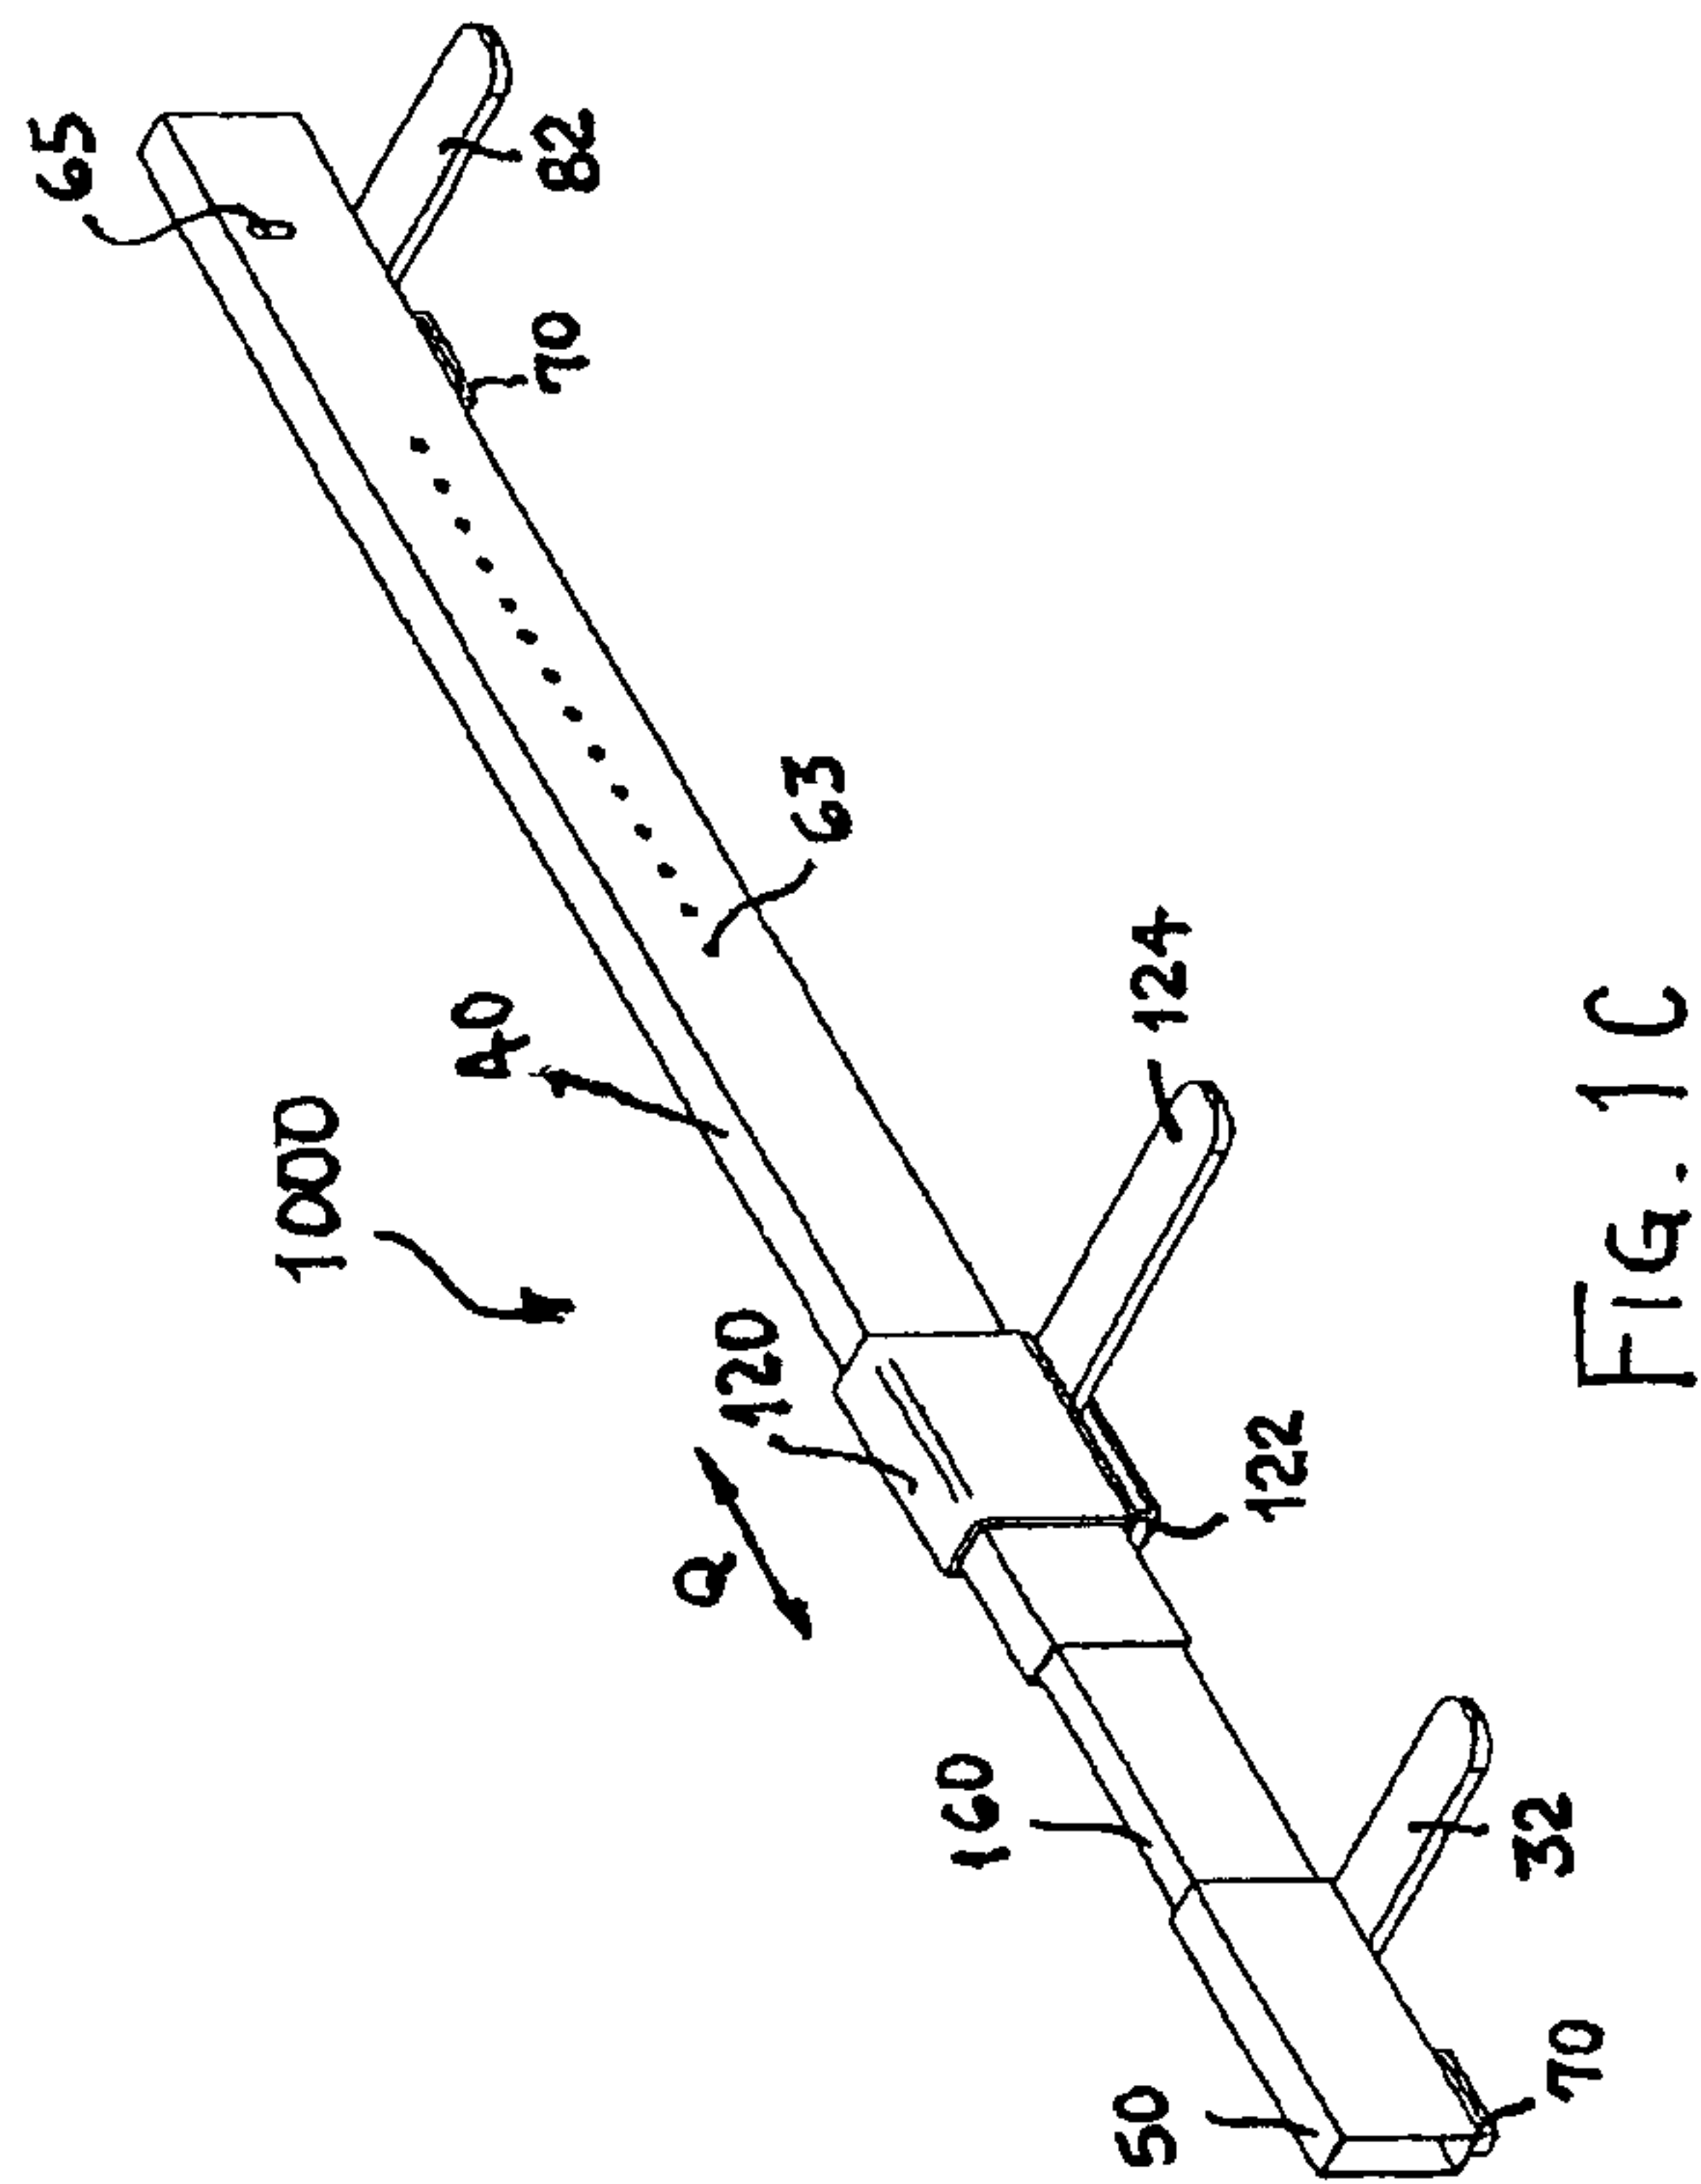


FIG. 1C



FIG. 2A

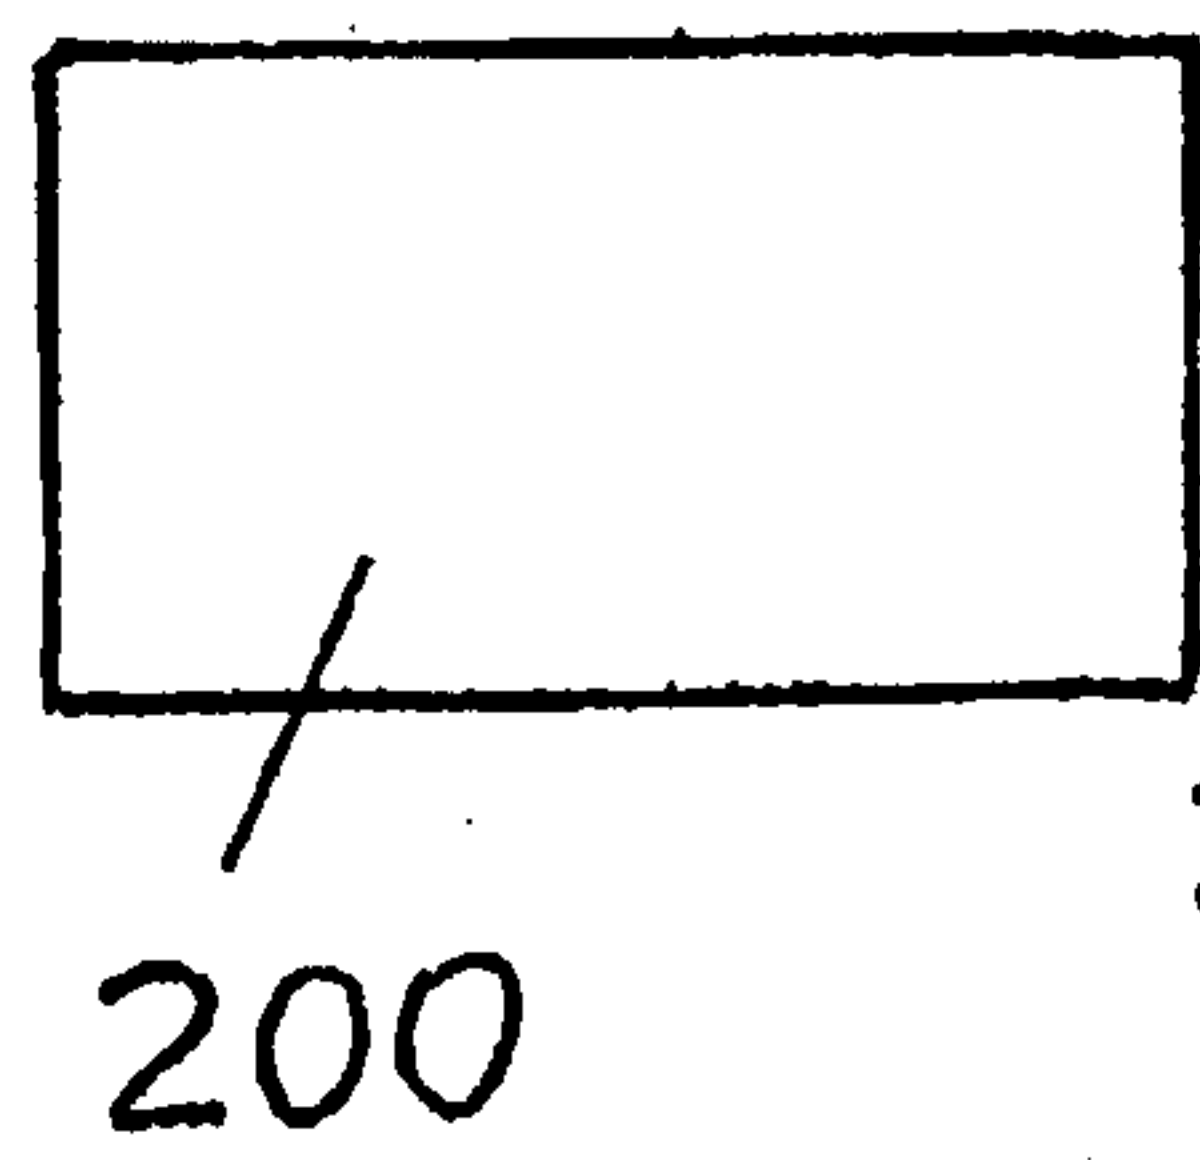
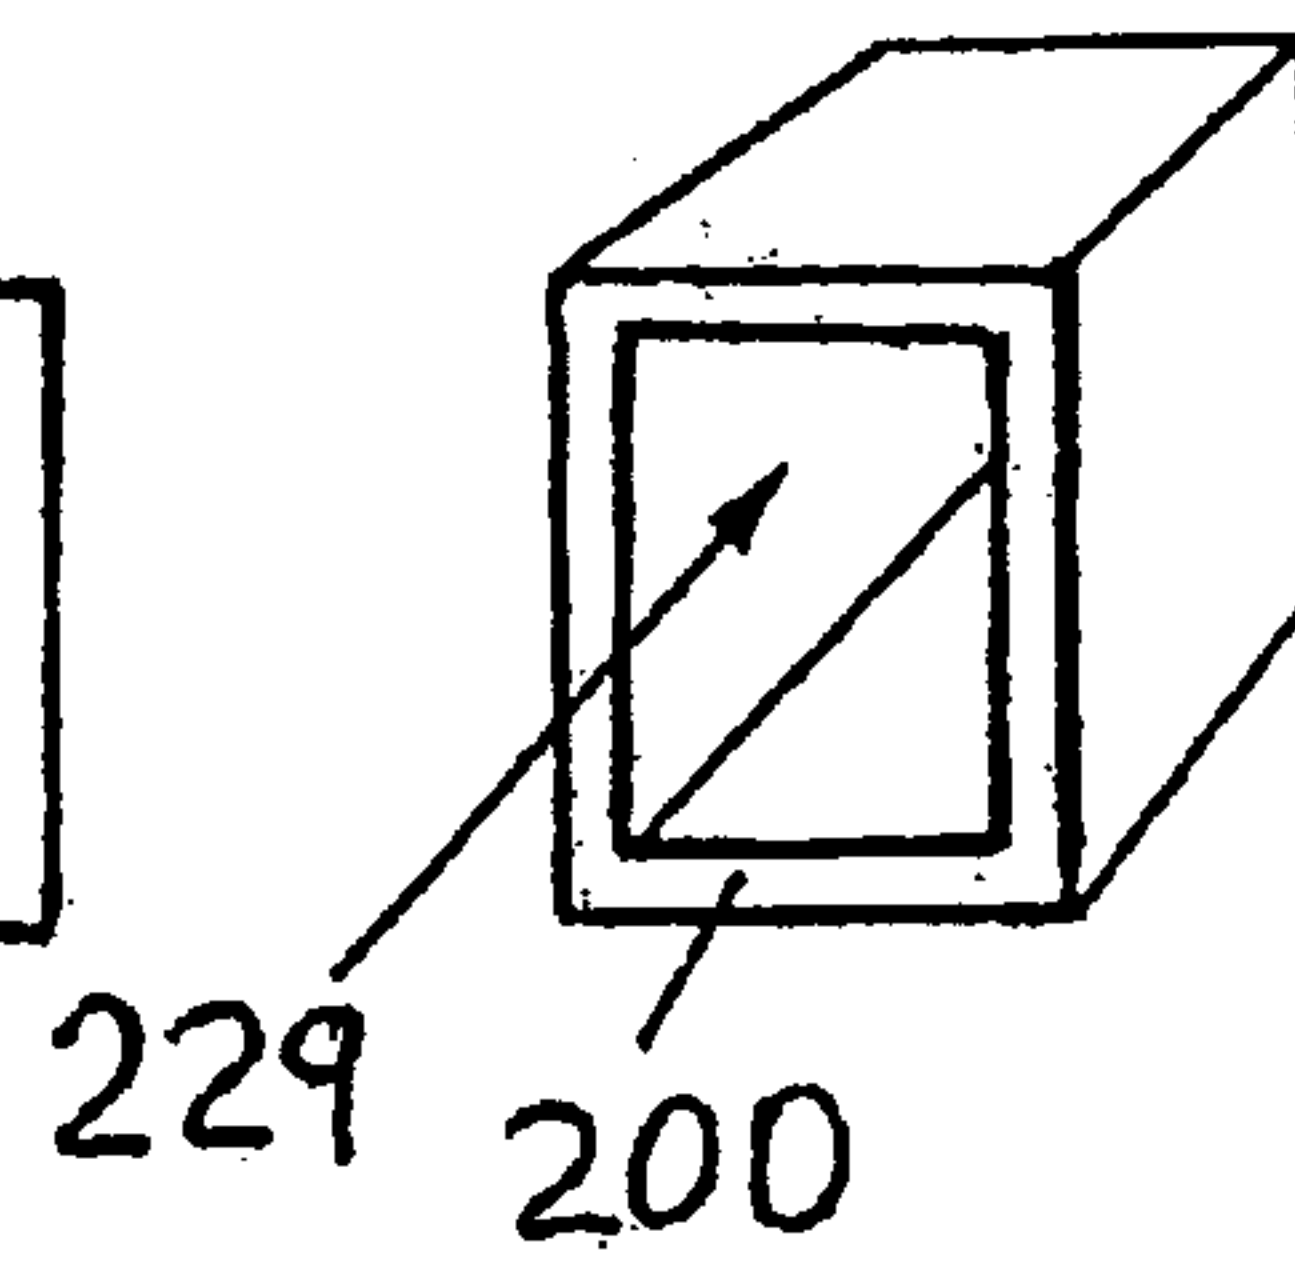


FIG. 2B



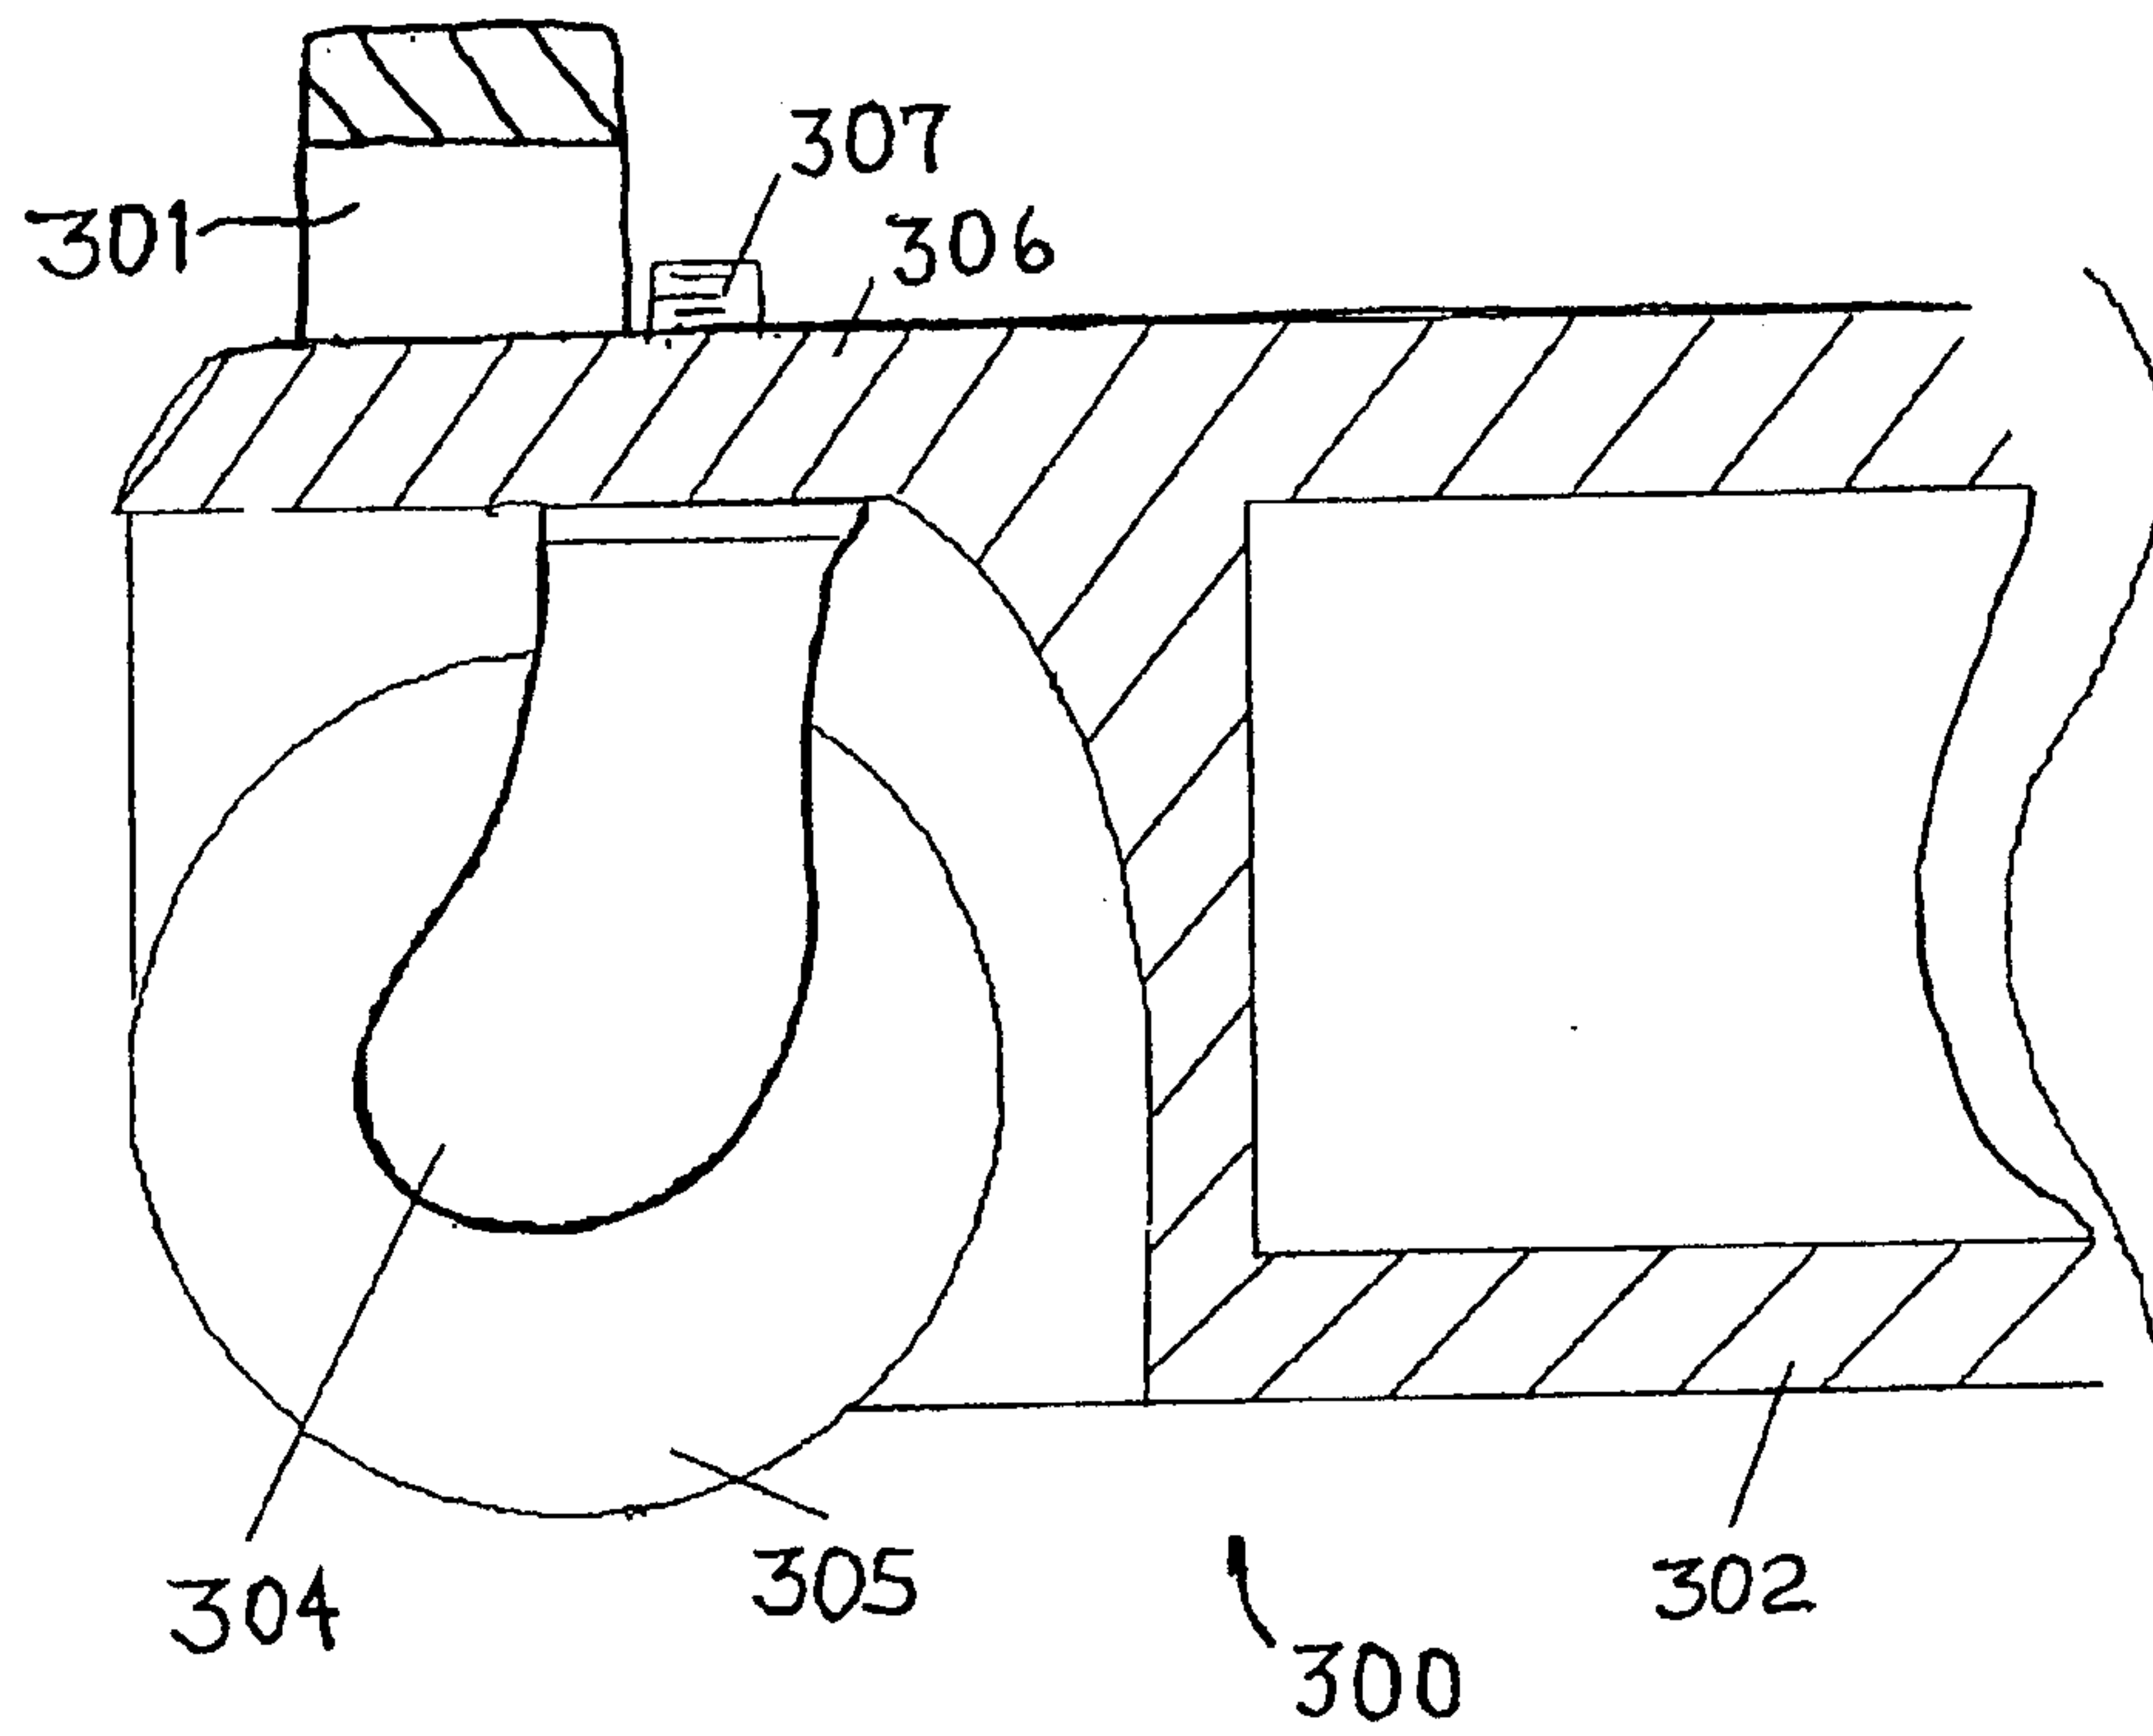


FIG. 3A

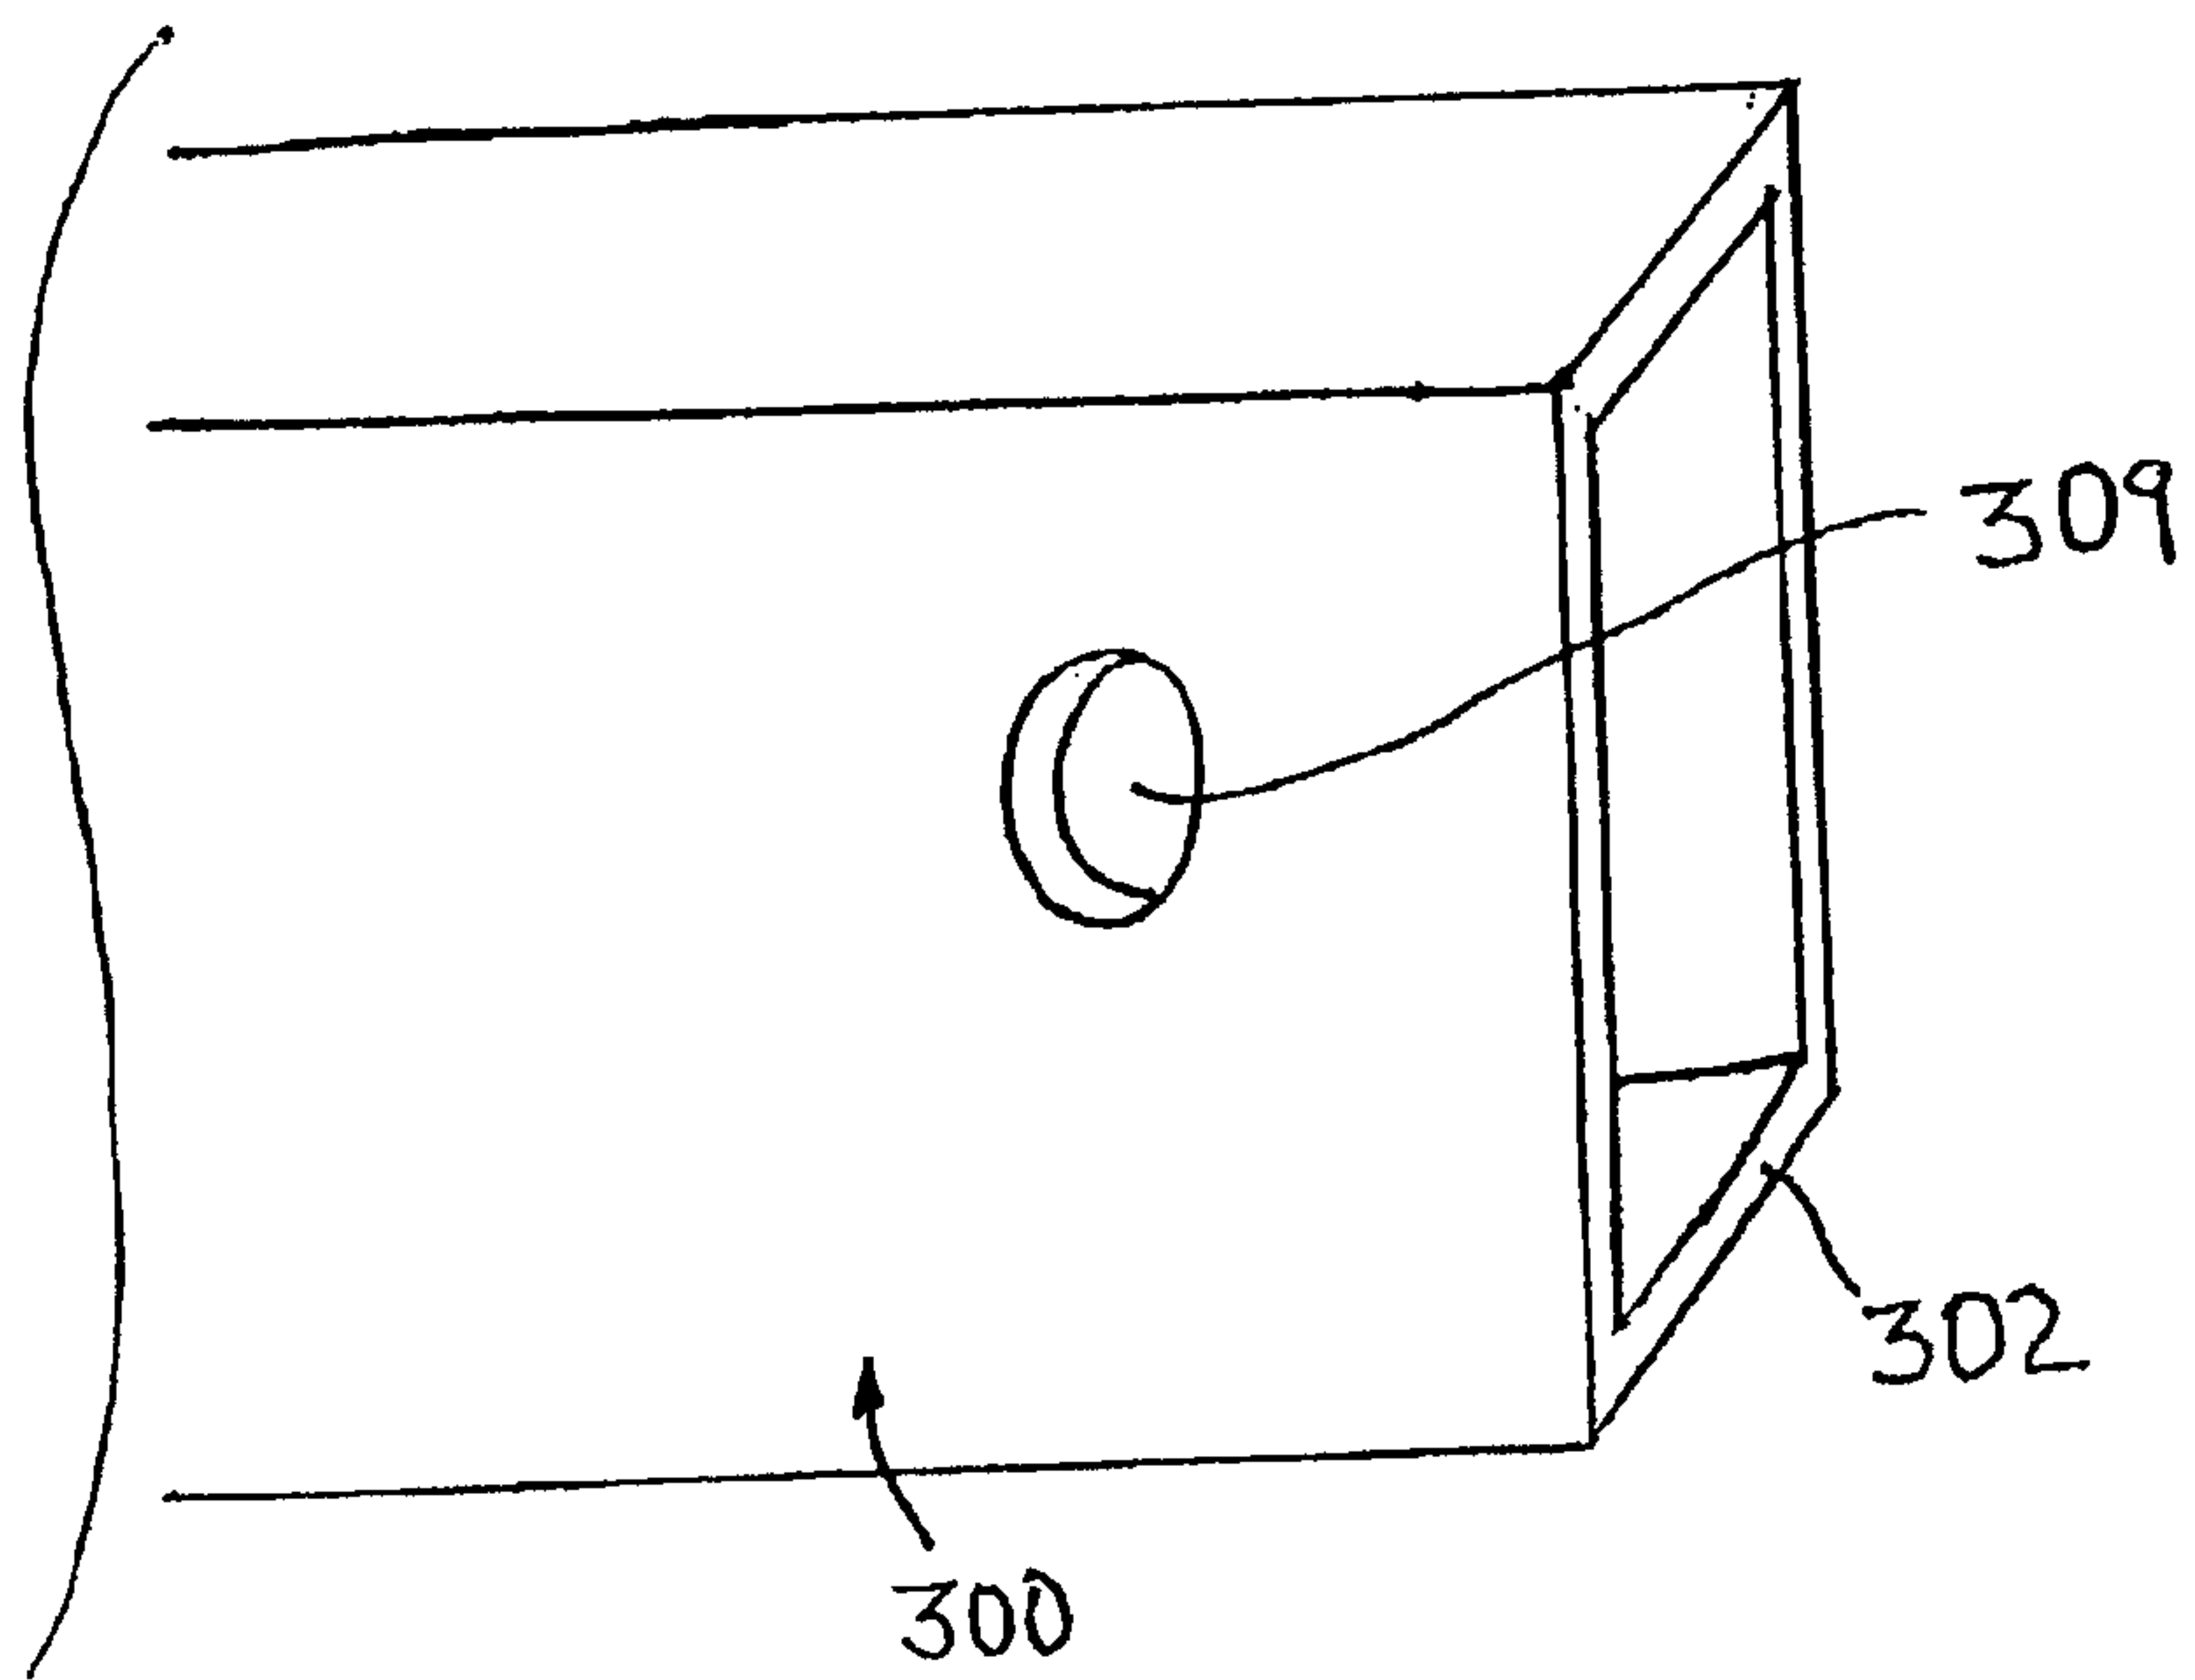


FIG. 3B



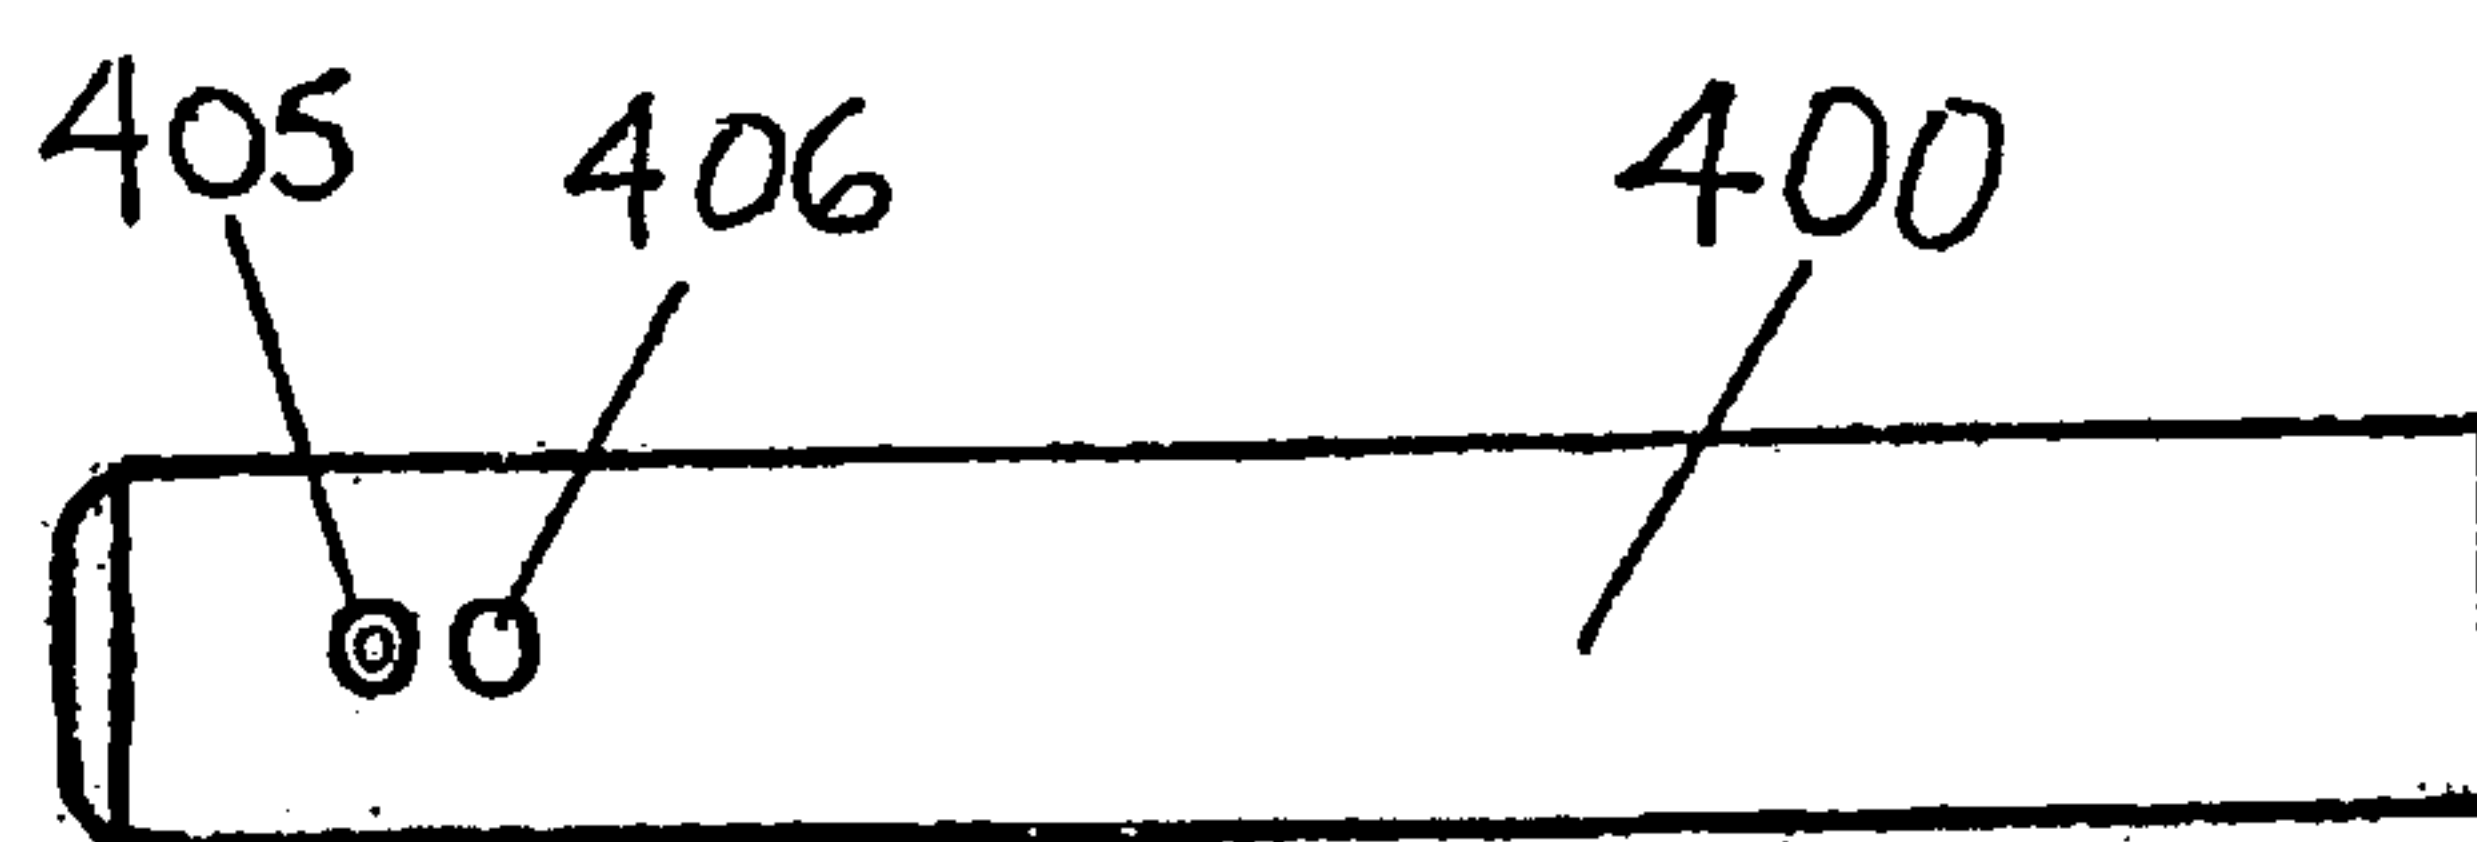


FIG. 4A



FIG. 4B

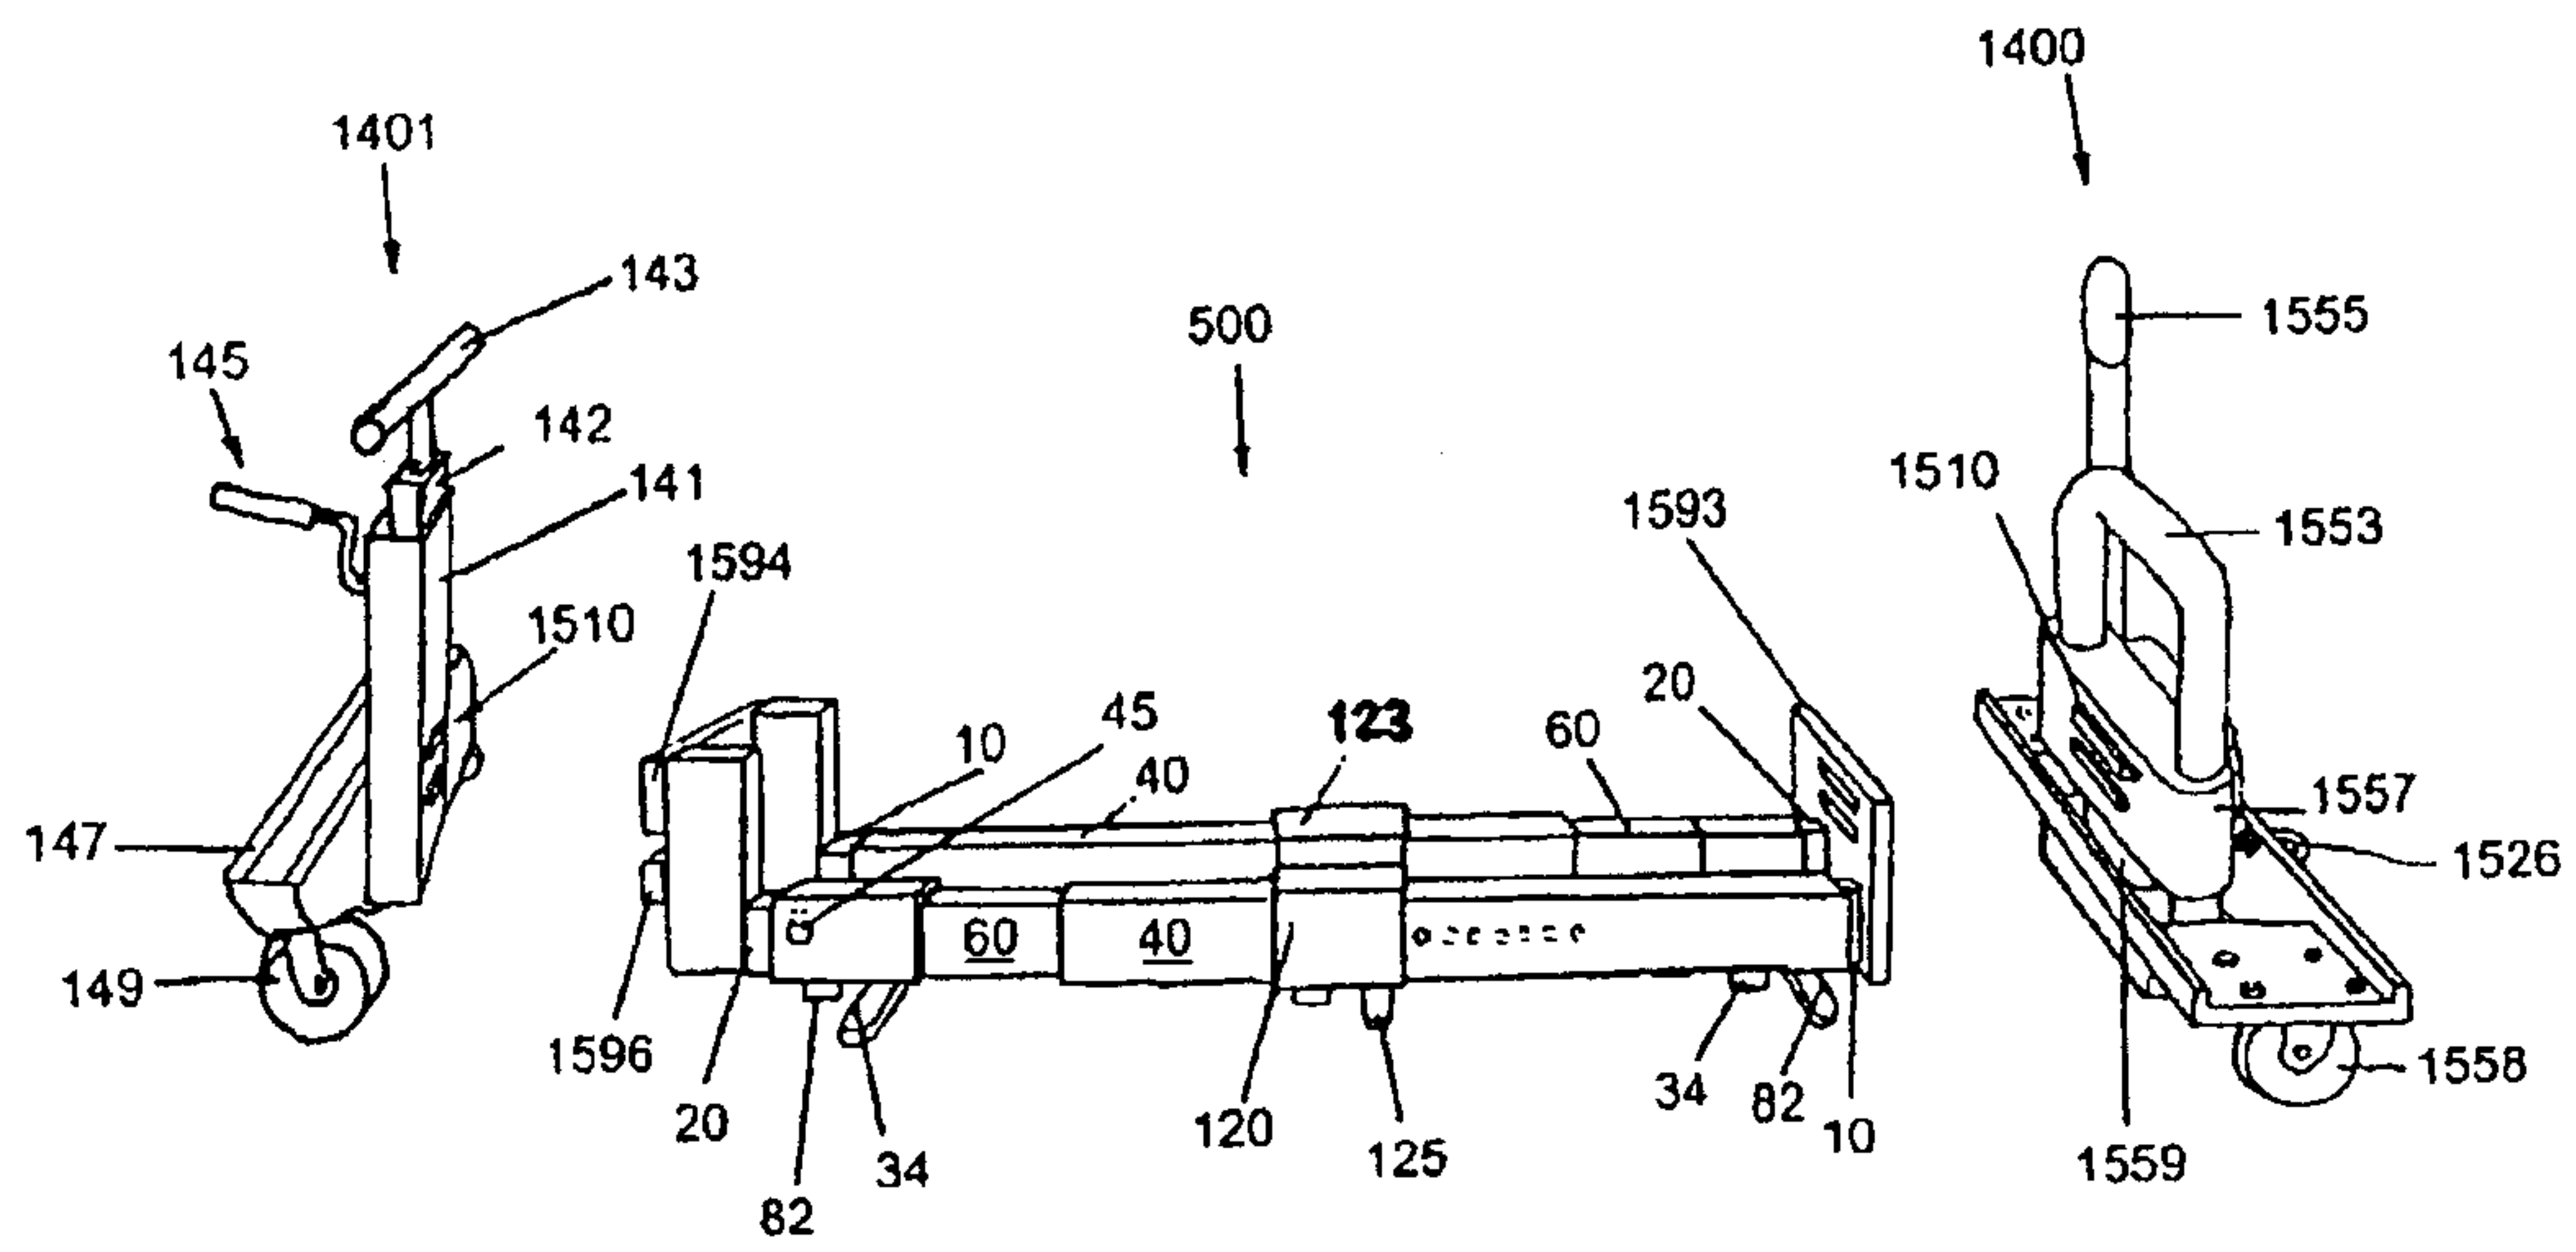


FIG. 5A

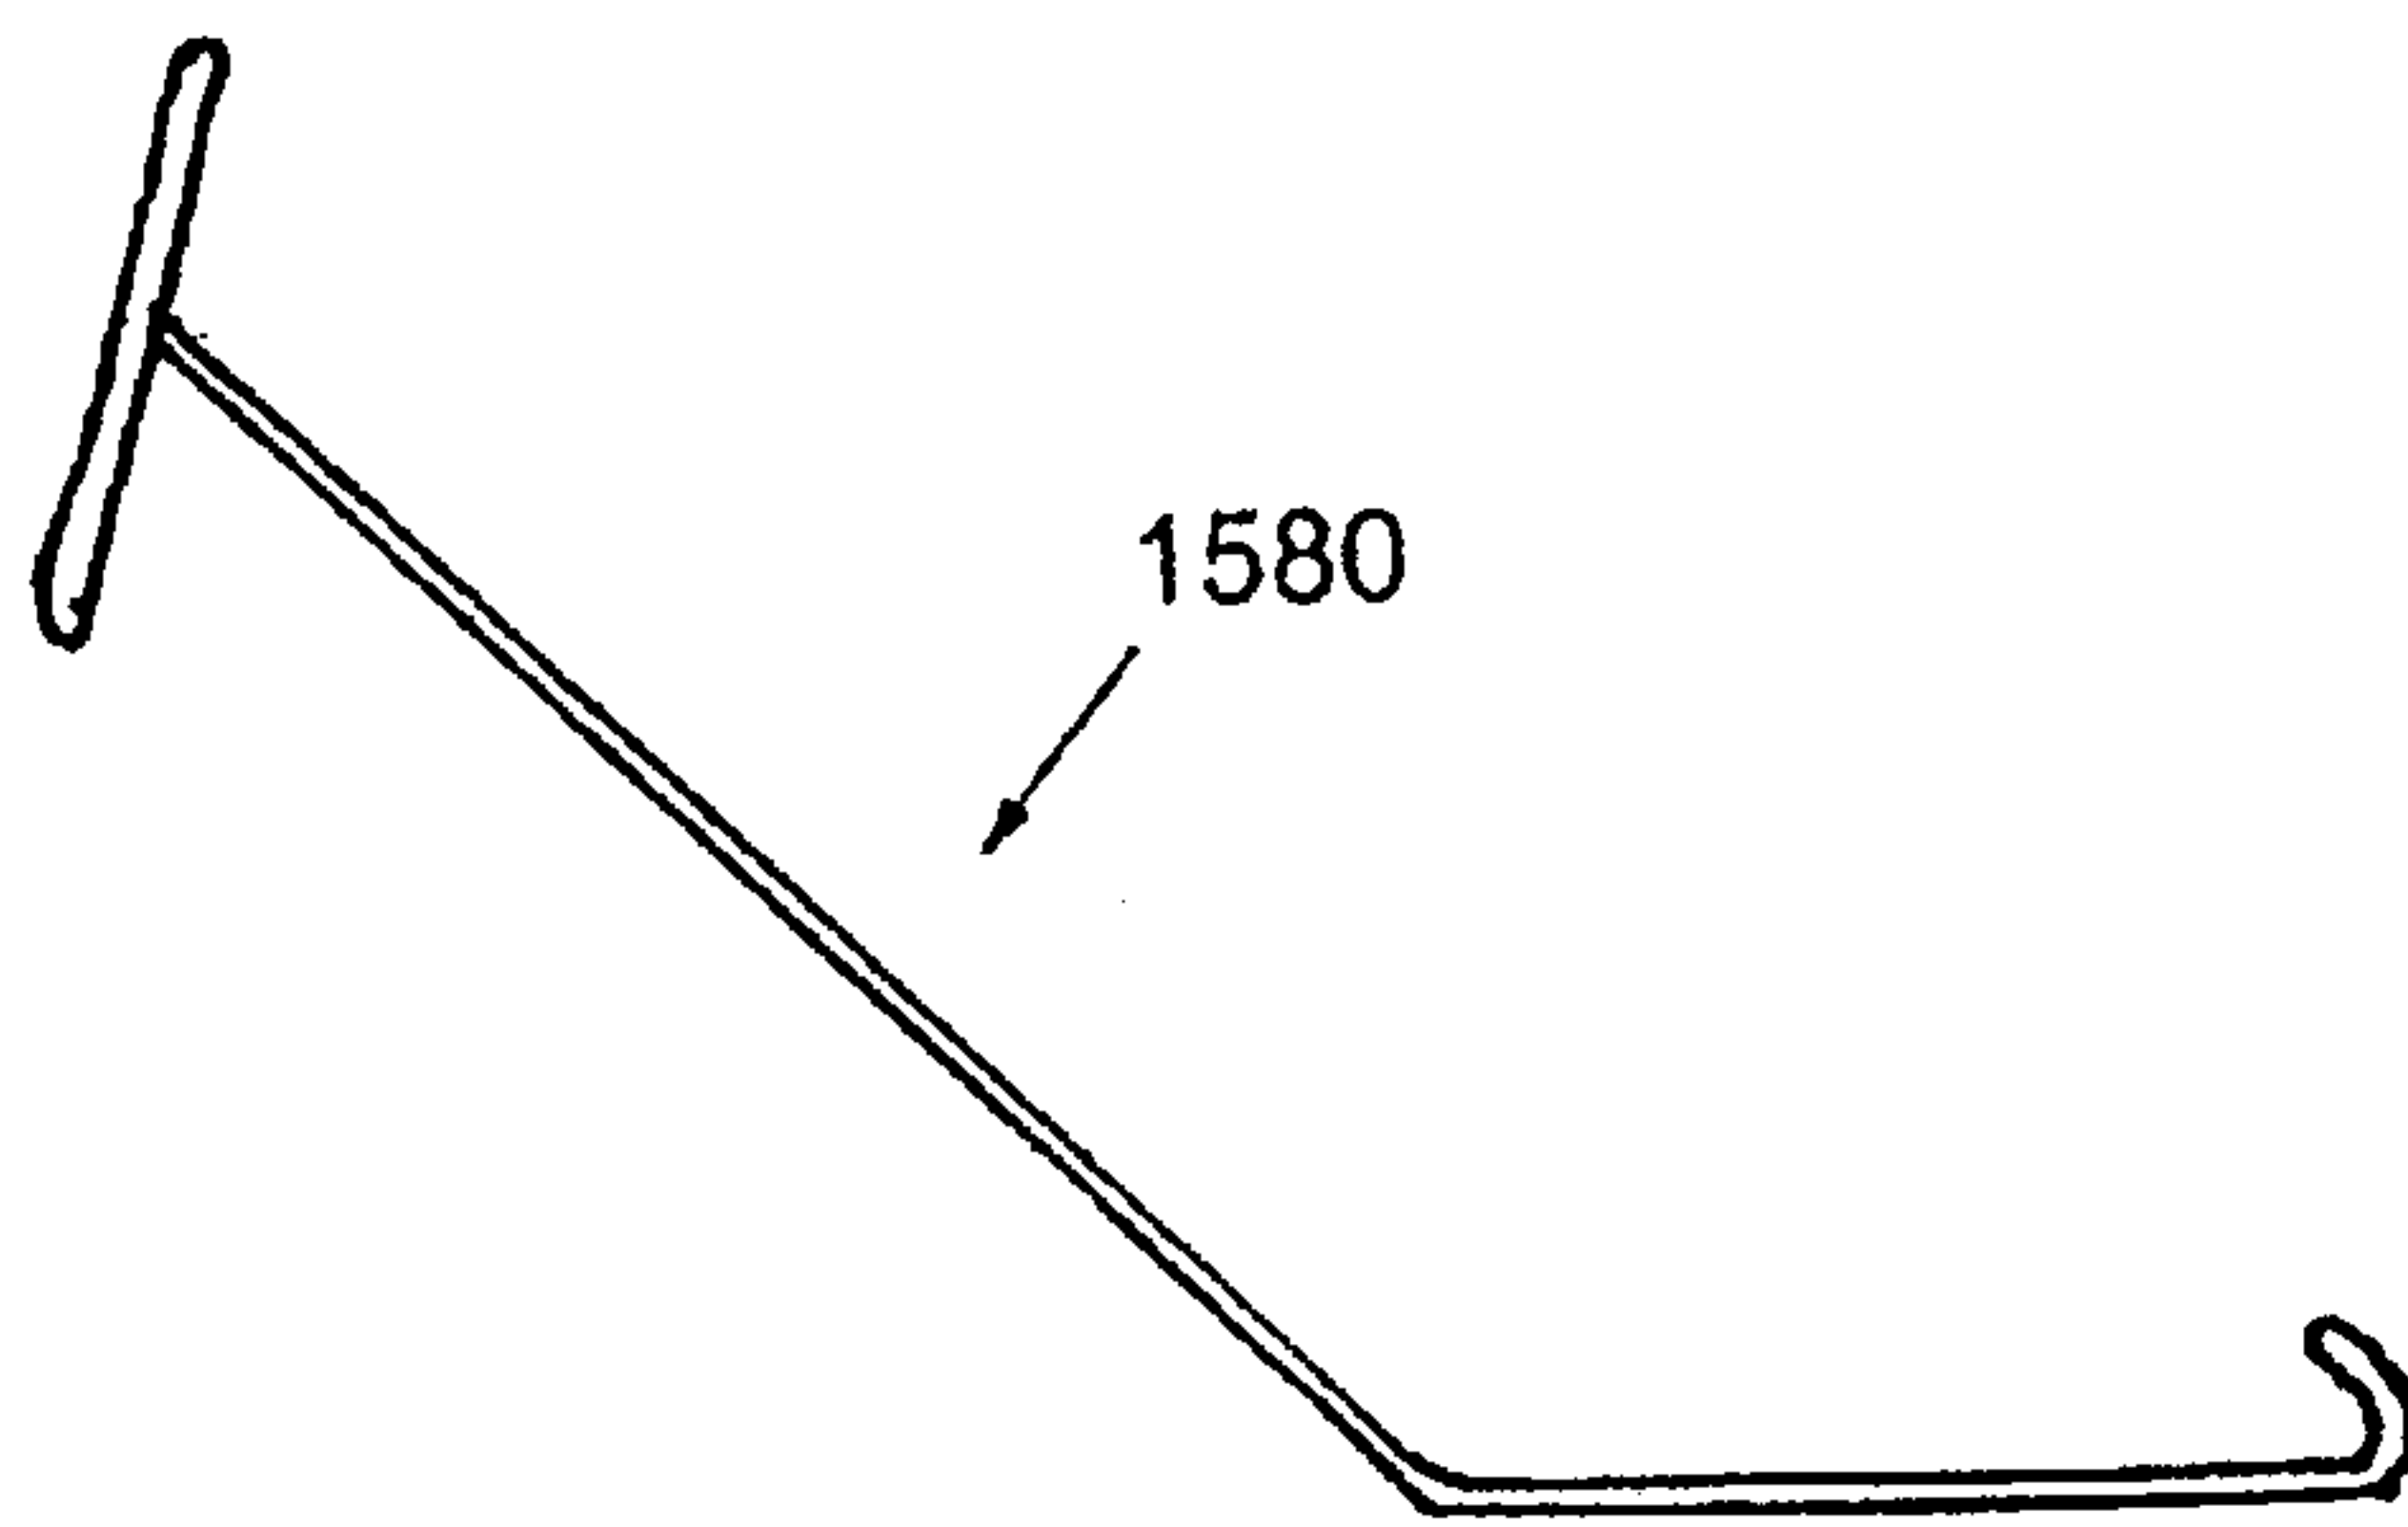


FIG. 5B



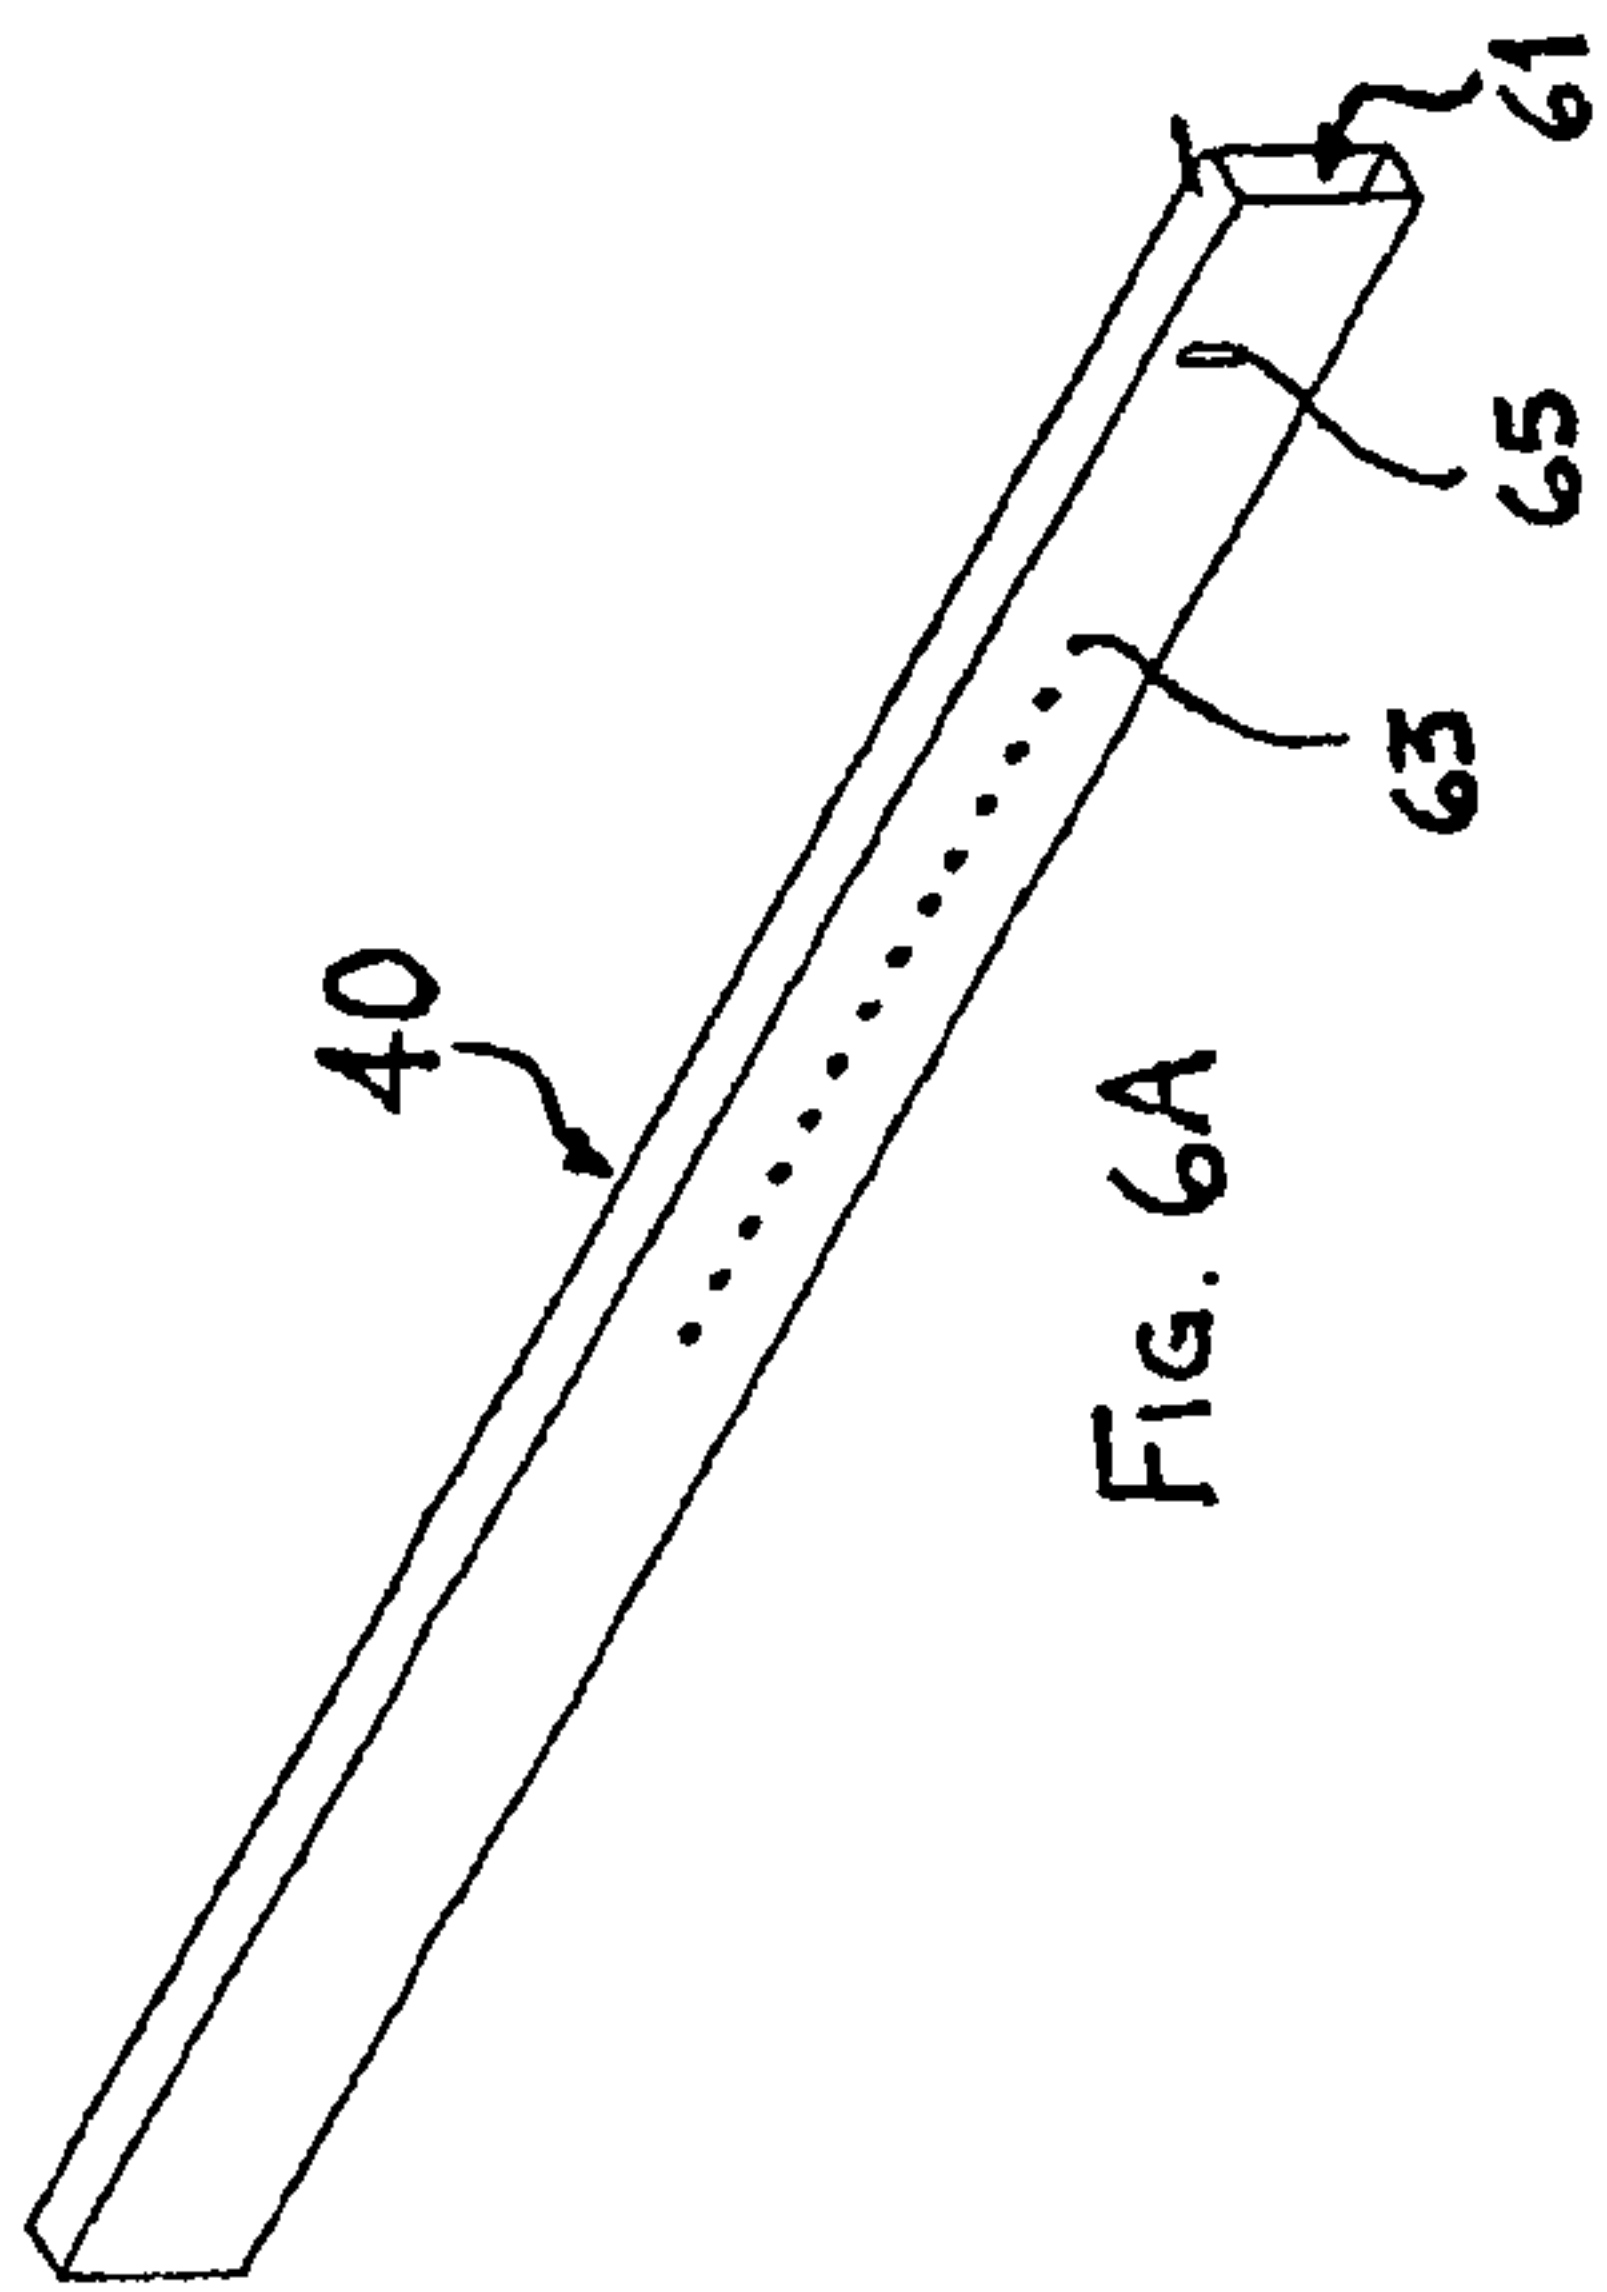


FIG. 6A

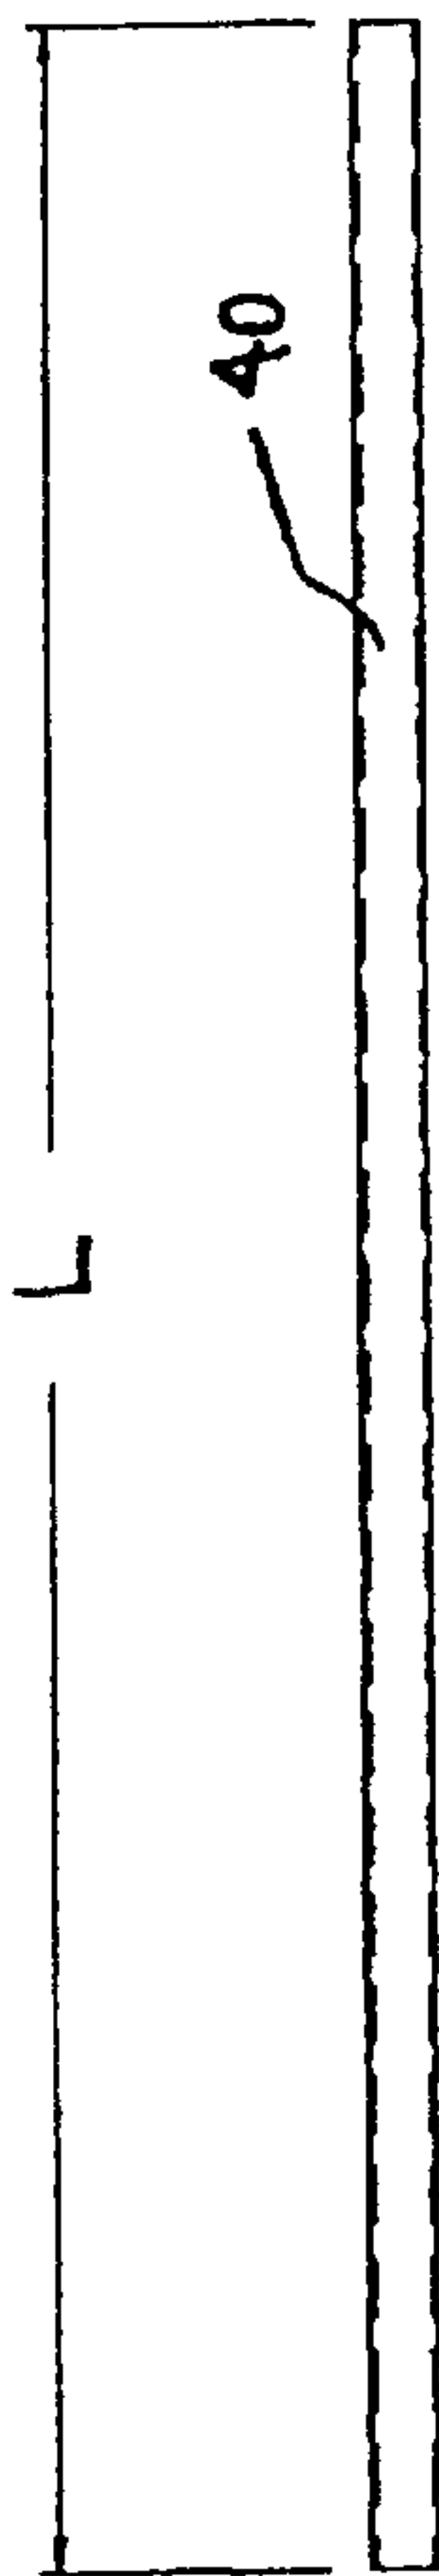


FIG. 6C

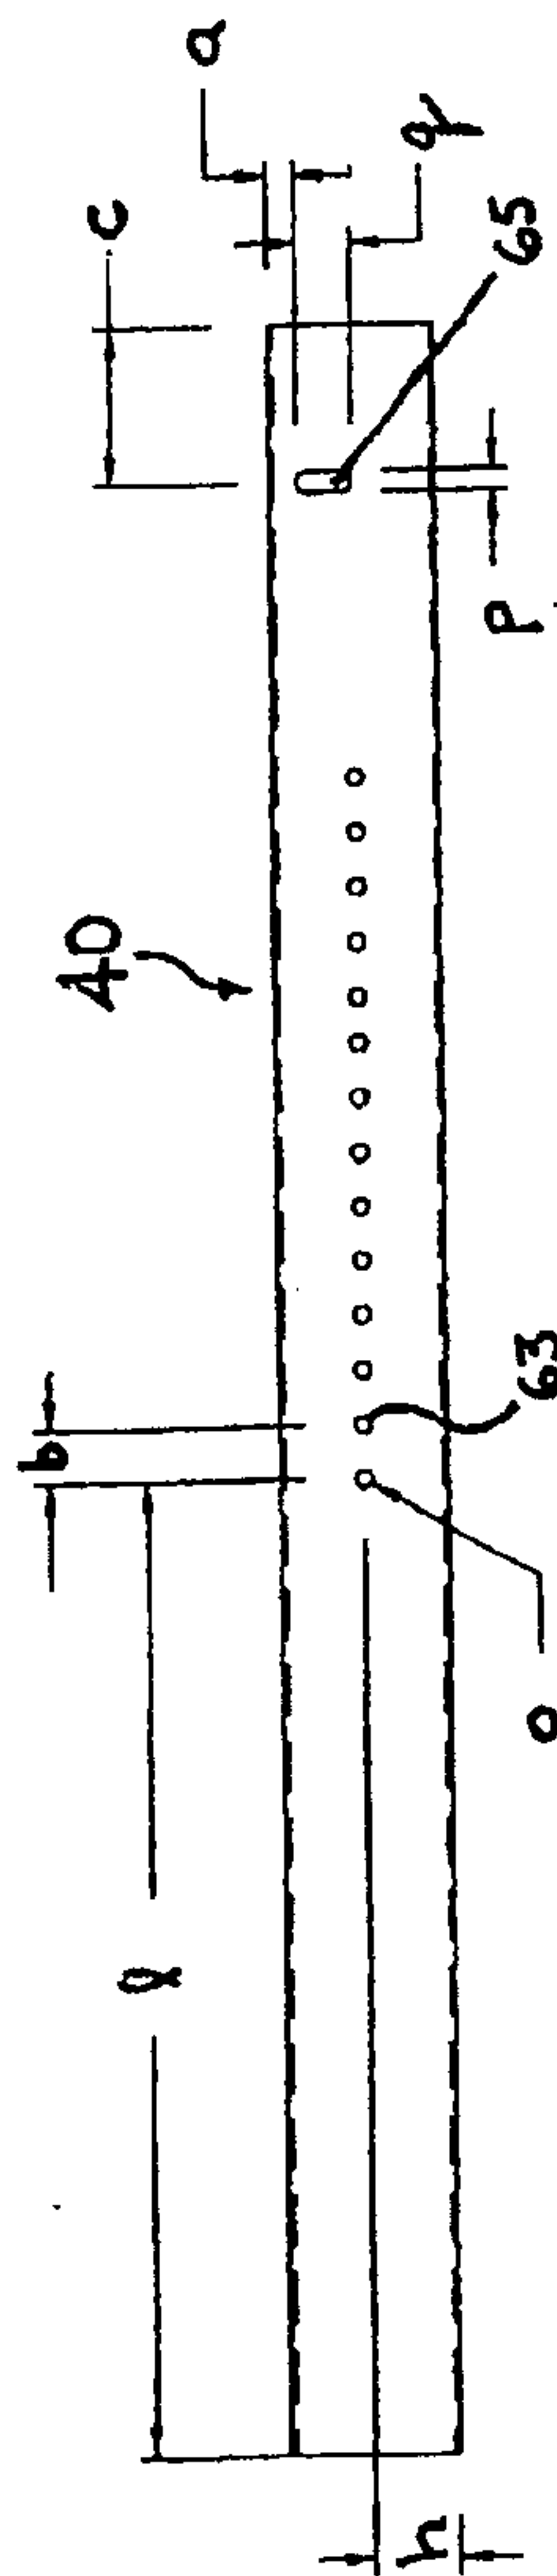


FIG. 6B

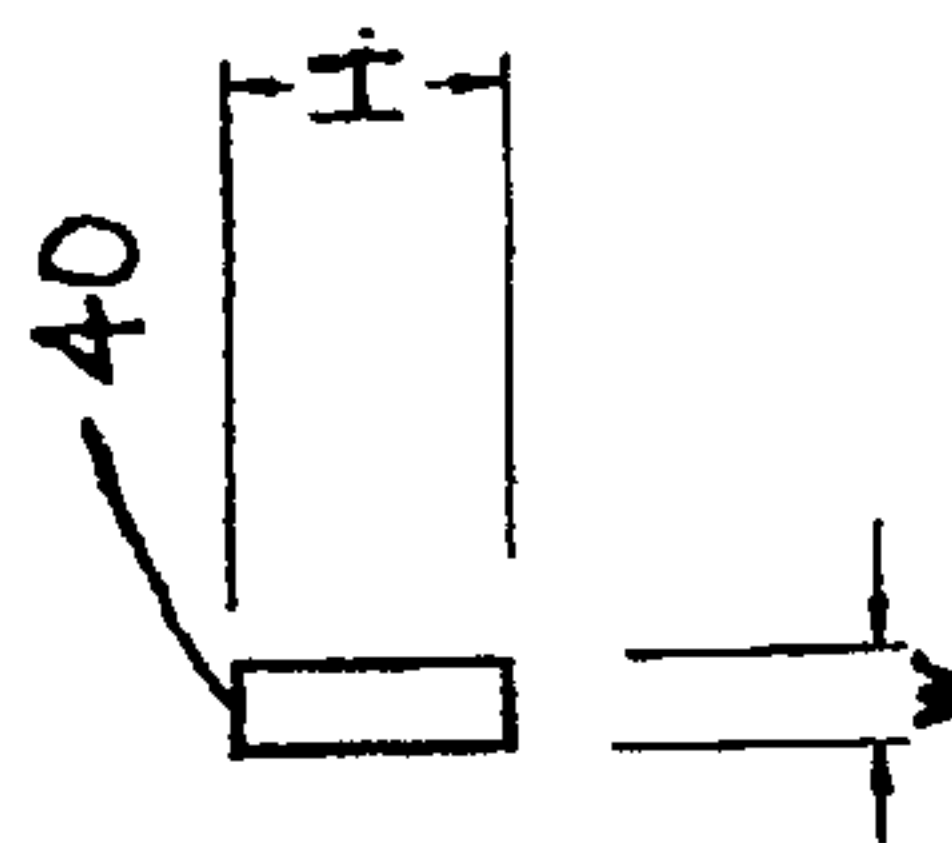


FIG. 6D

FIG. 7B

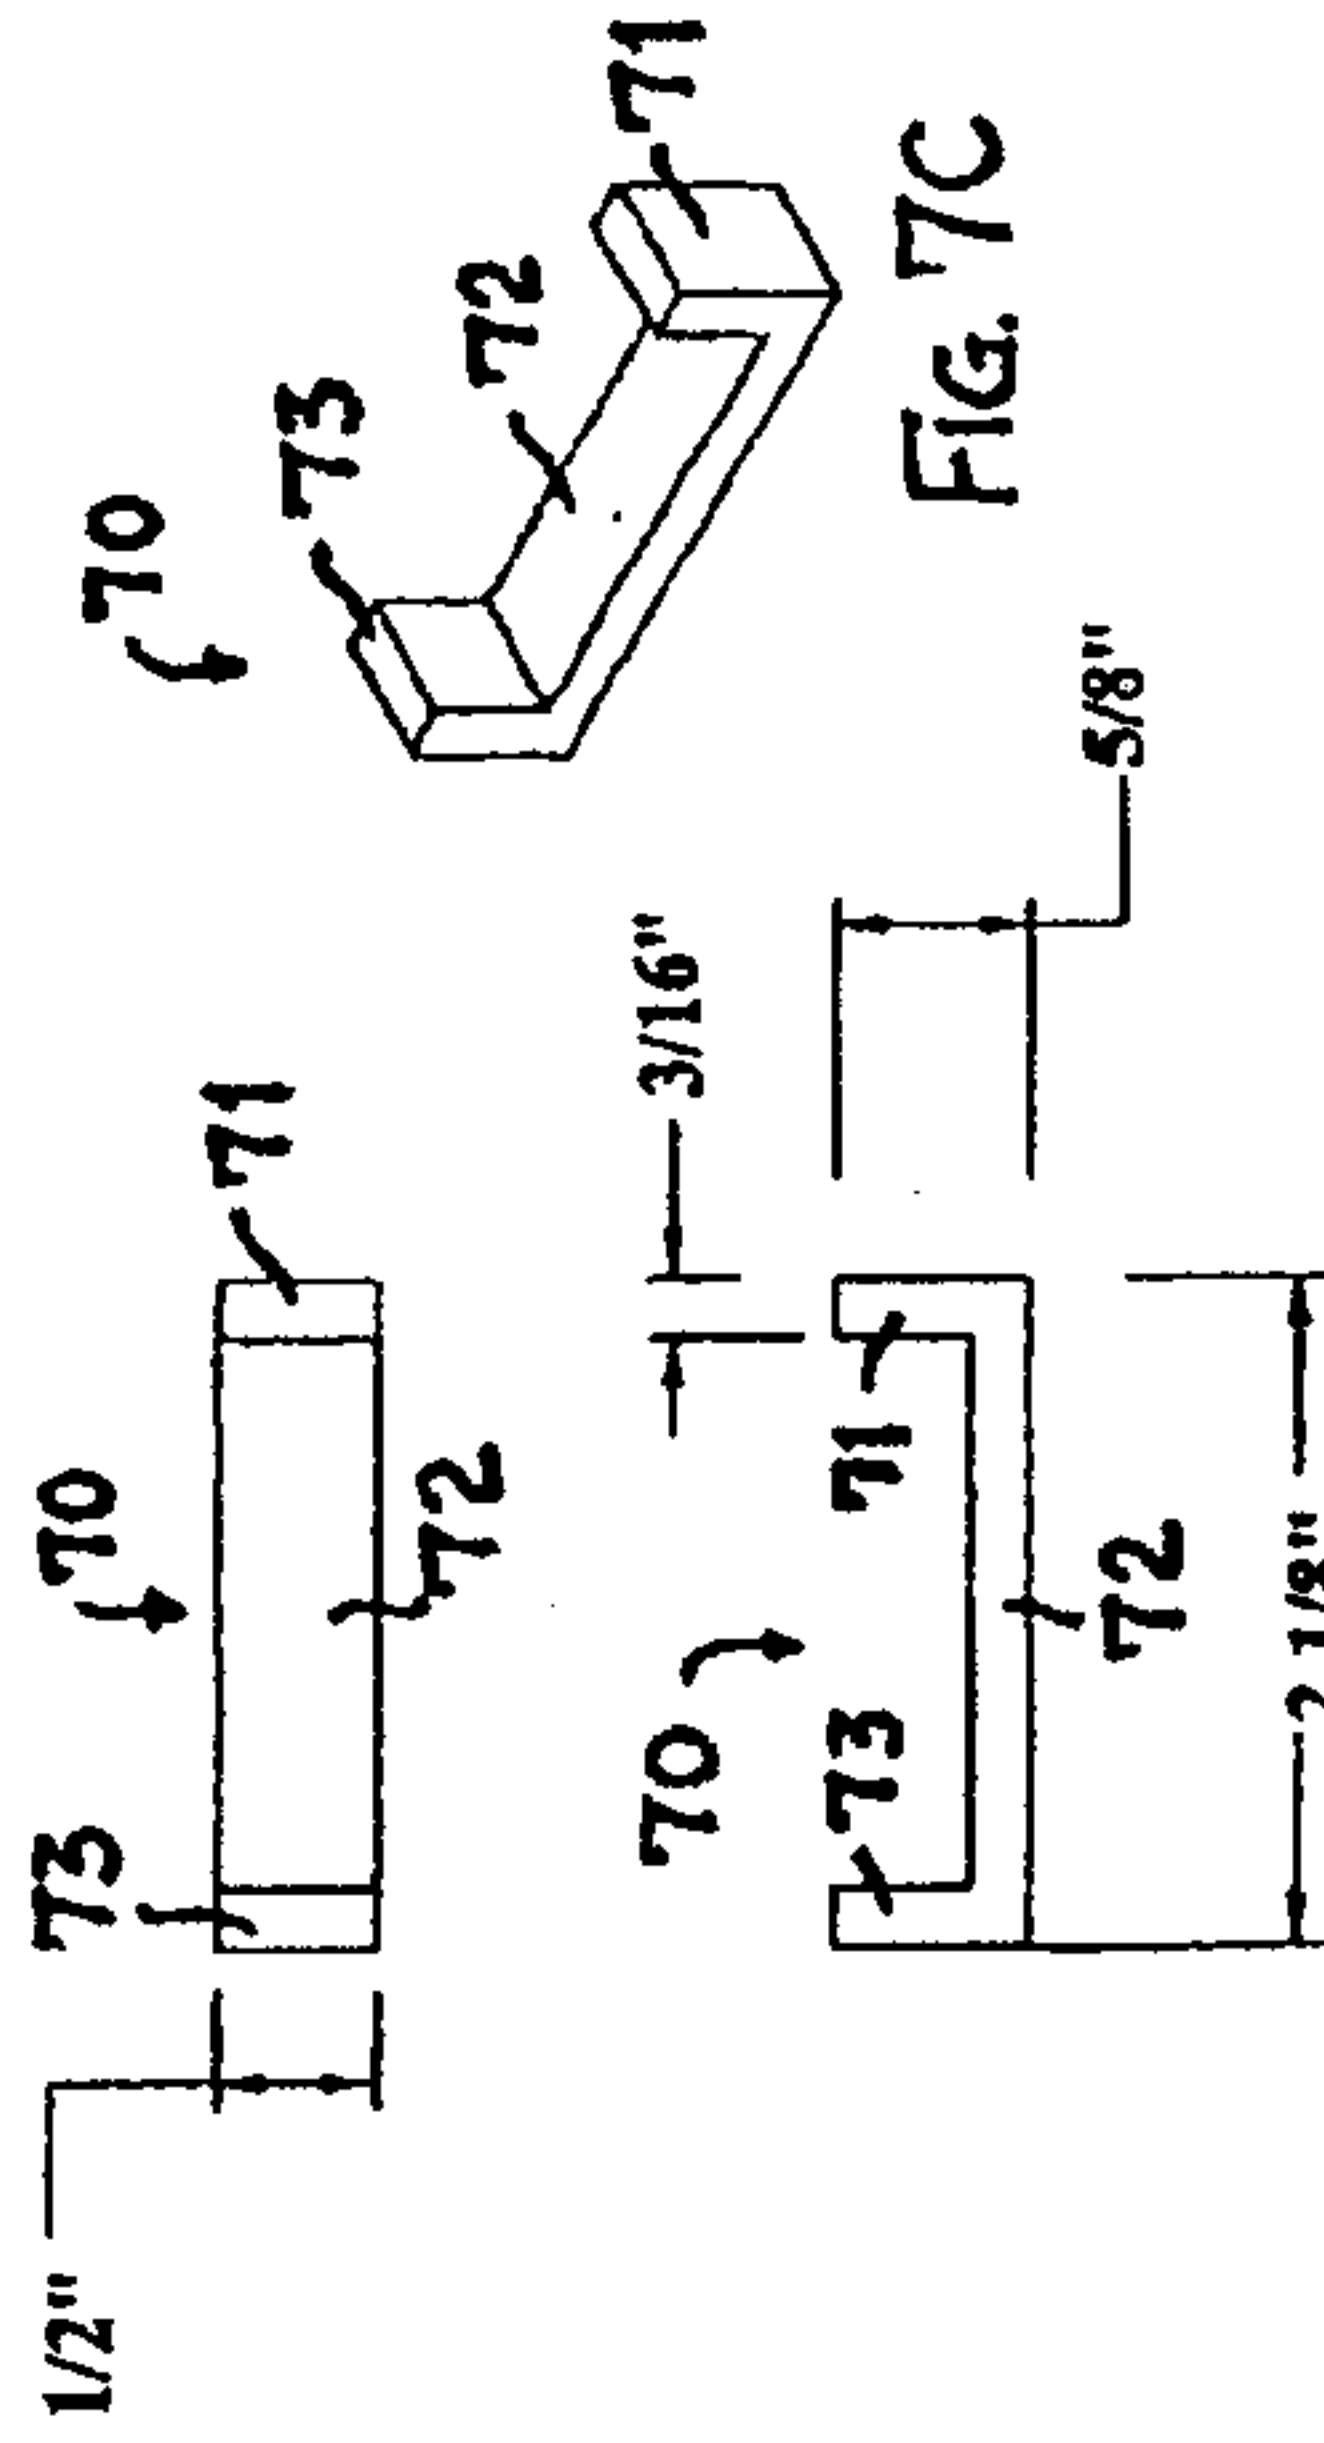


FIG. 7C

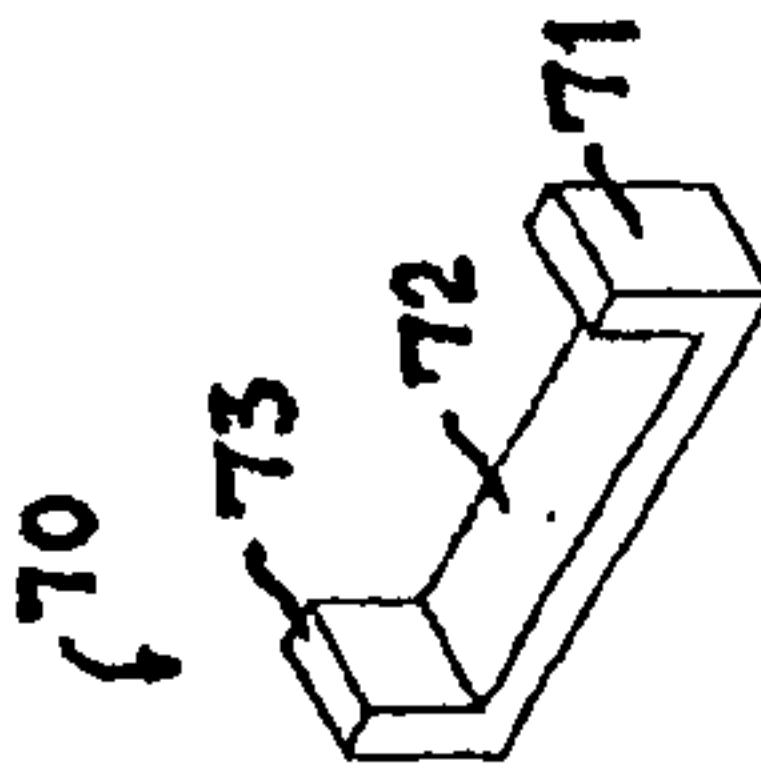


FIG. 7A

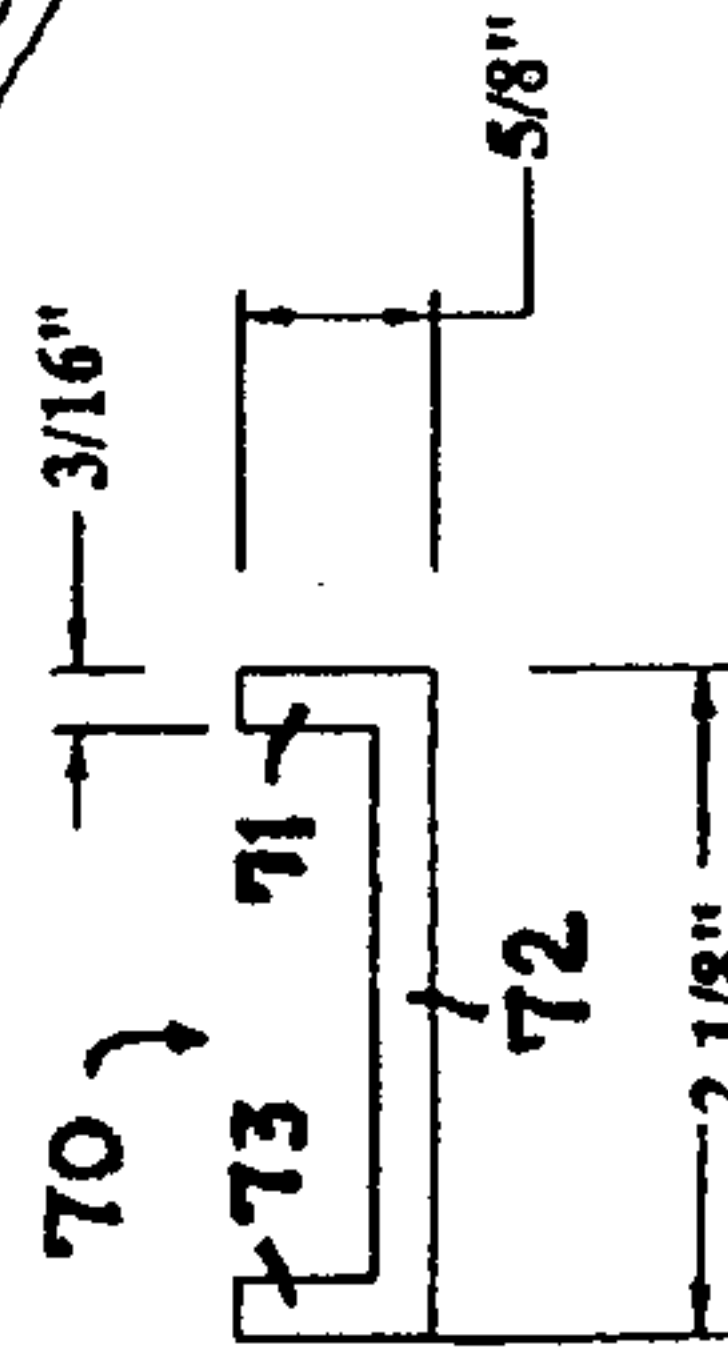


FIG. 10B

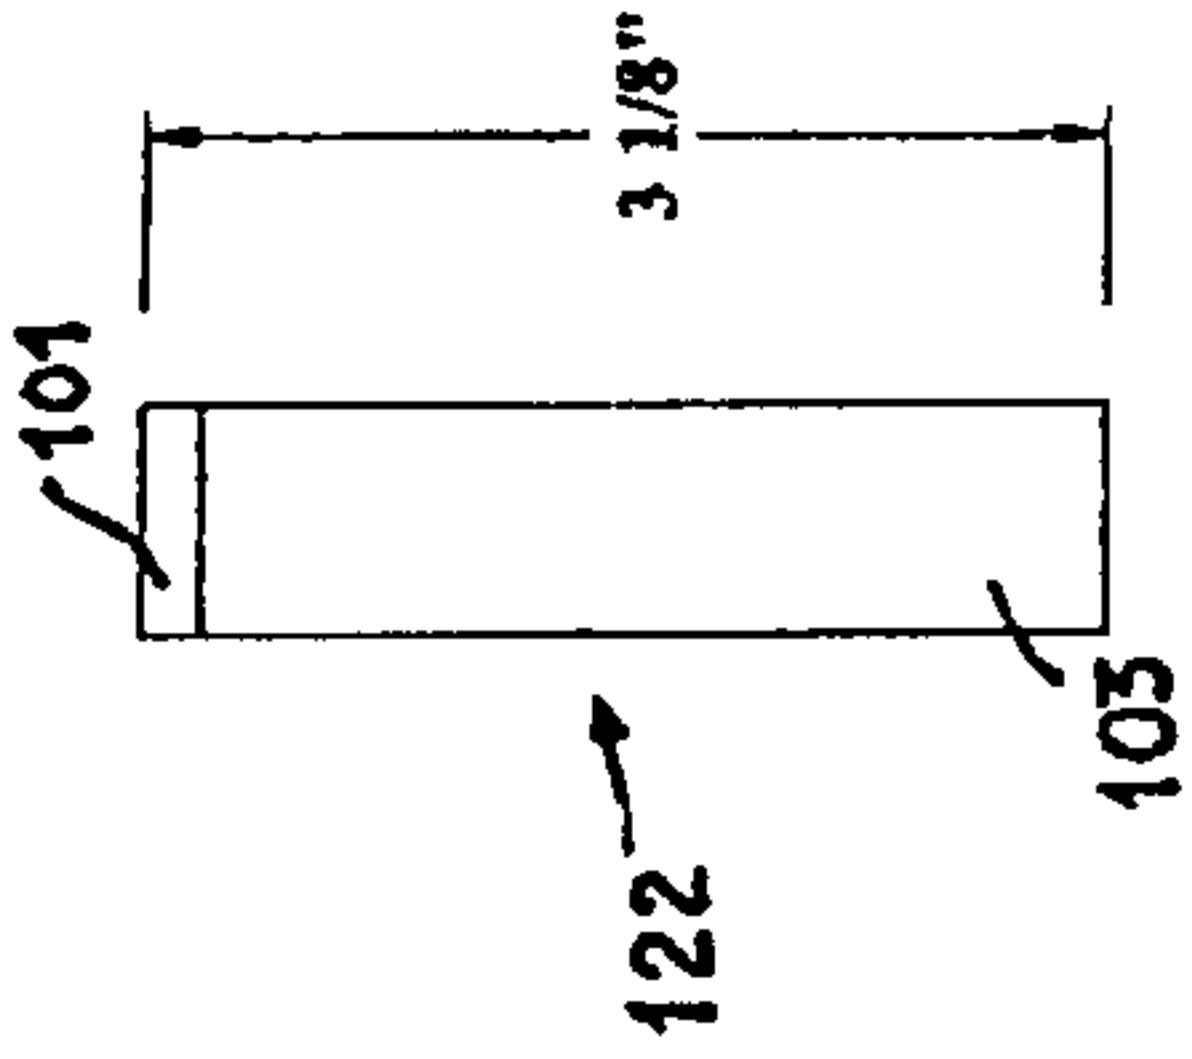


FIG. 10A

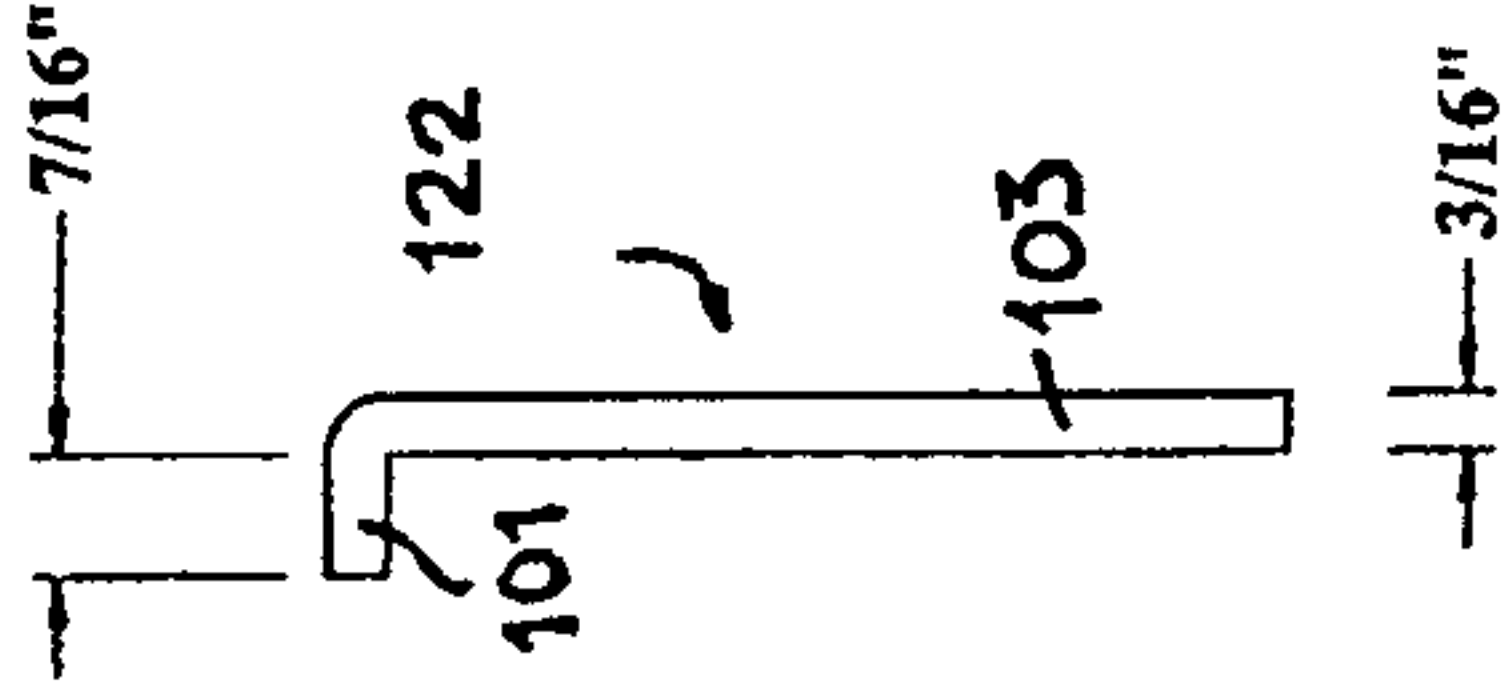


FIG. 10C

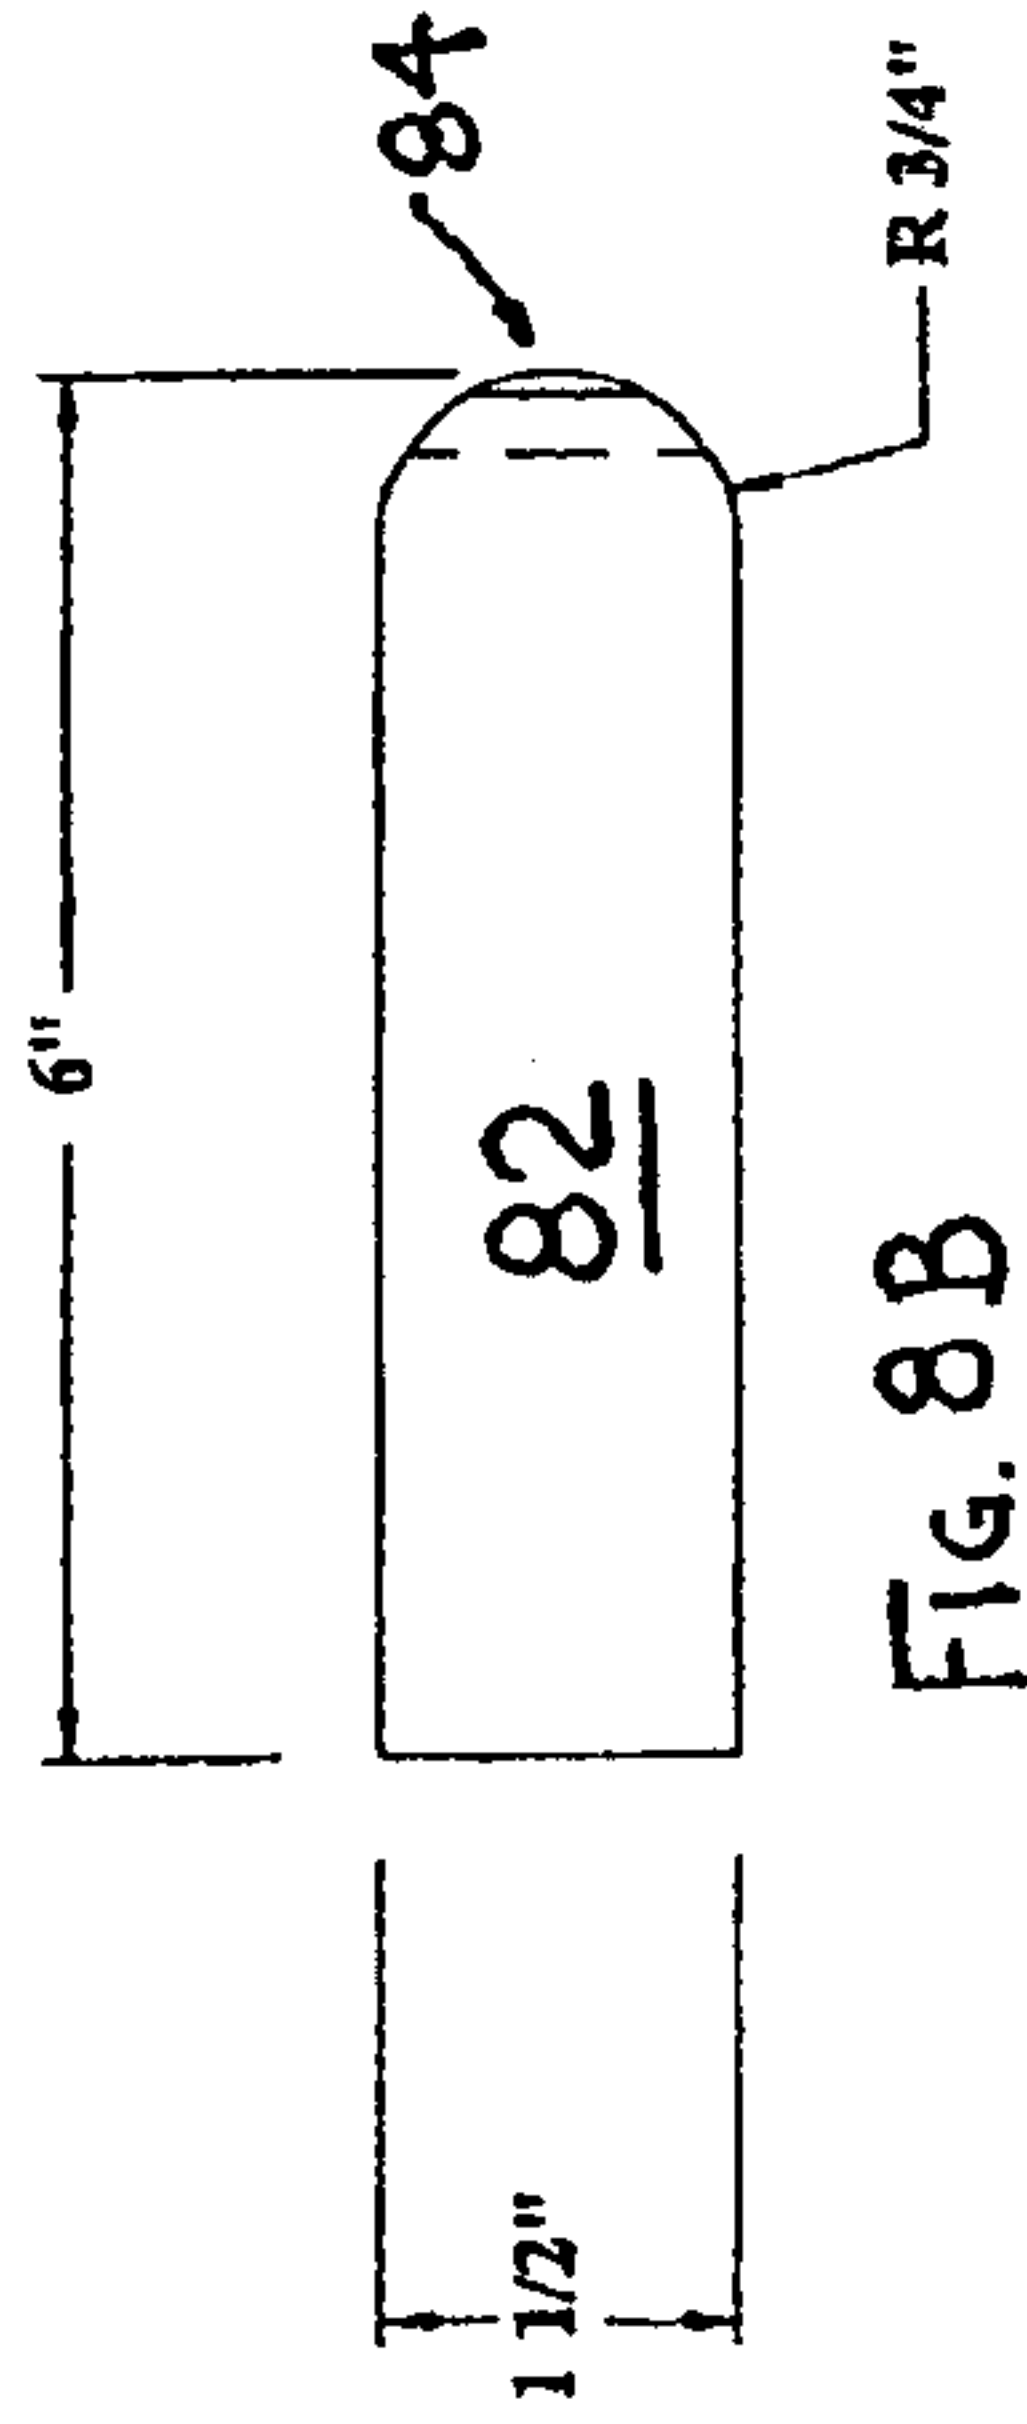
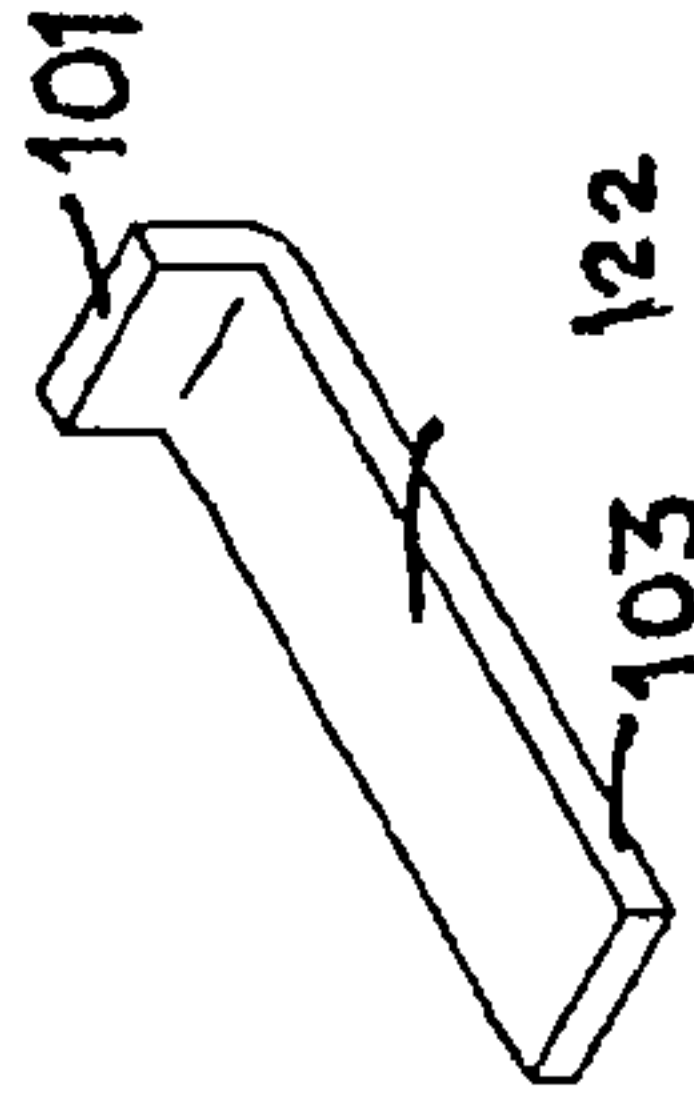


FIG. 8B

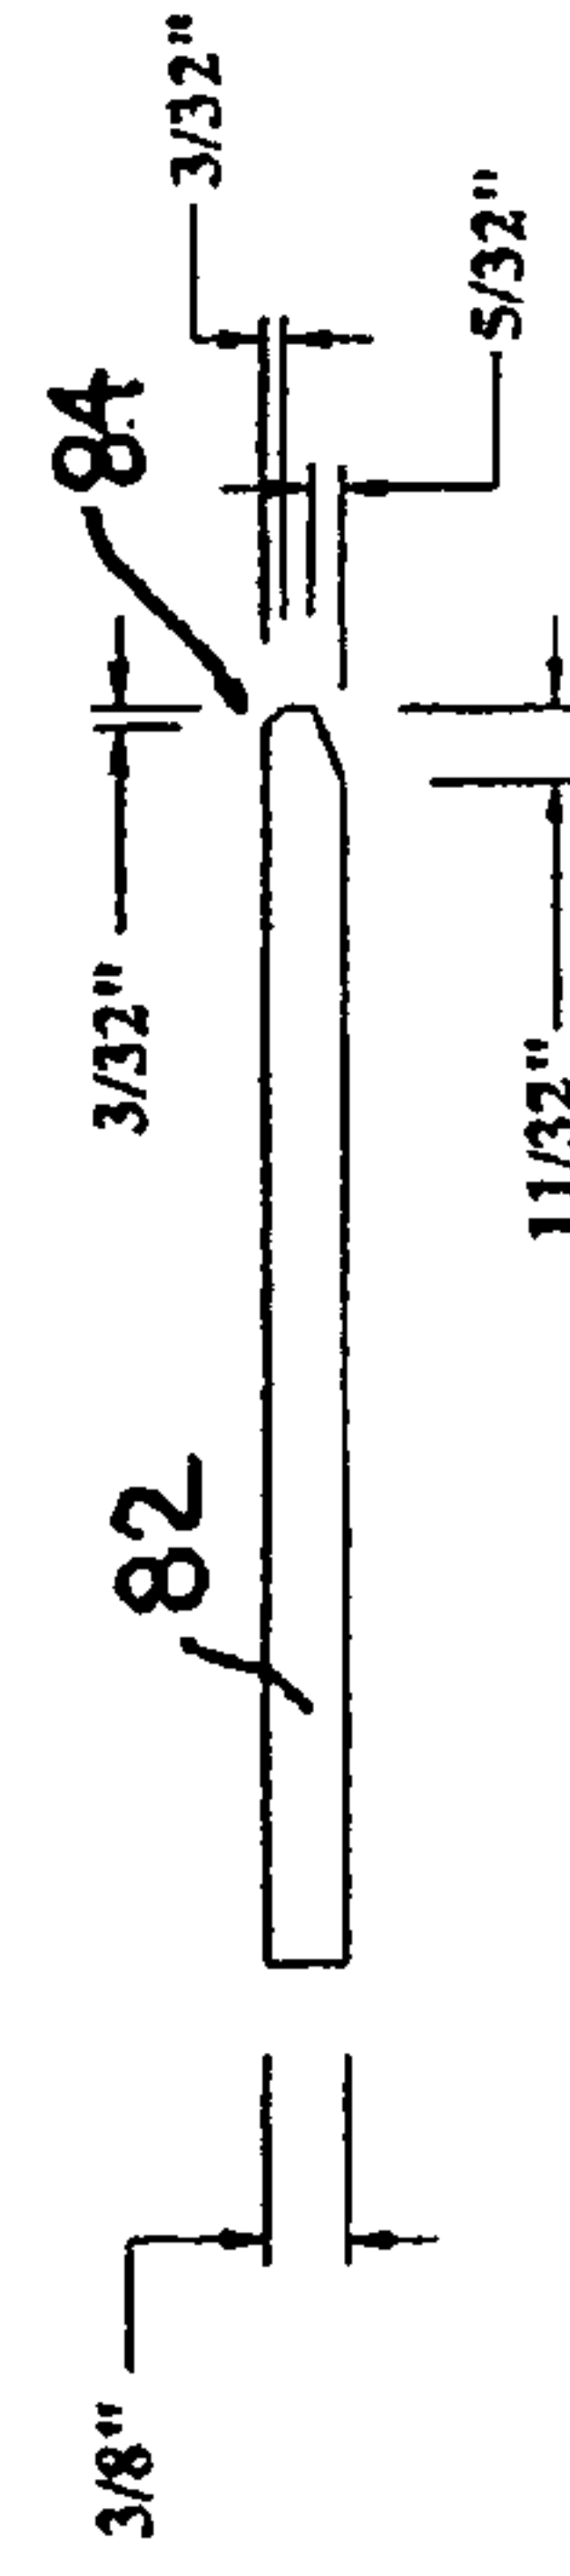


FIG. 8A

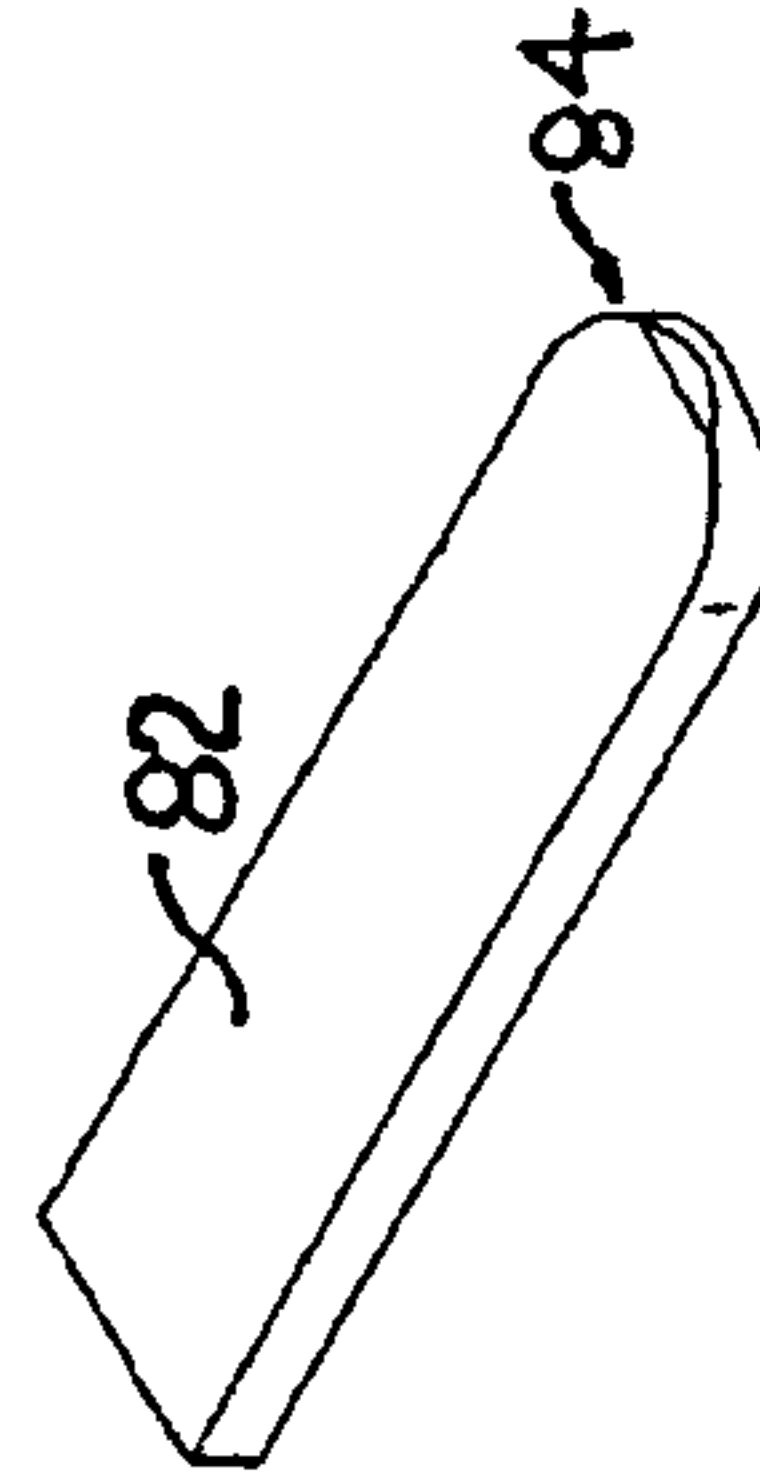


FIG. 8C



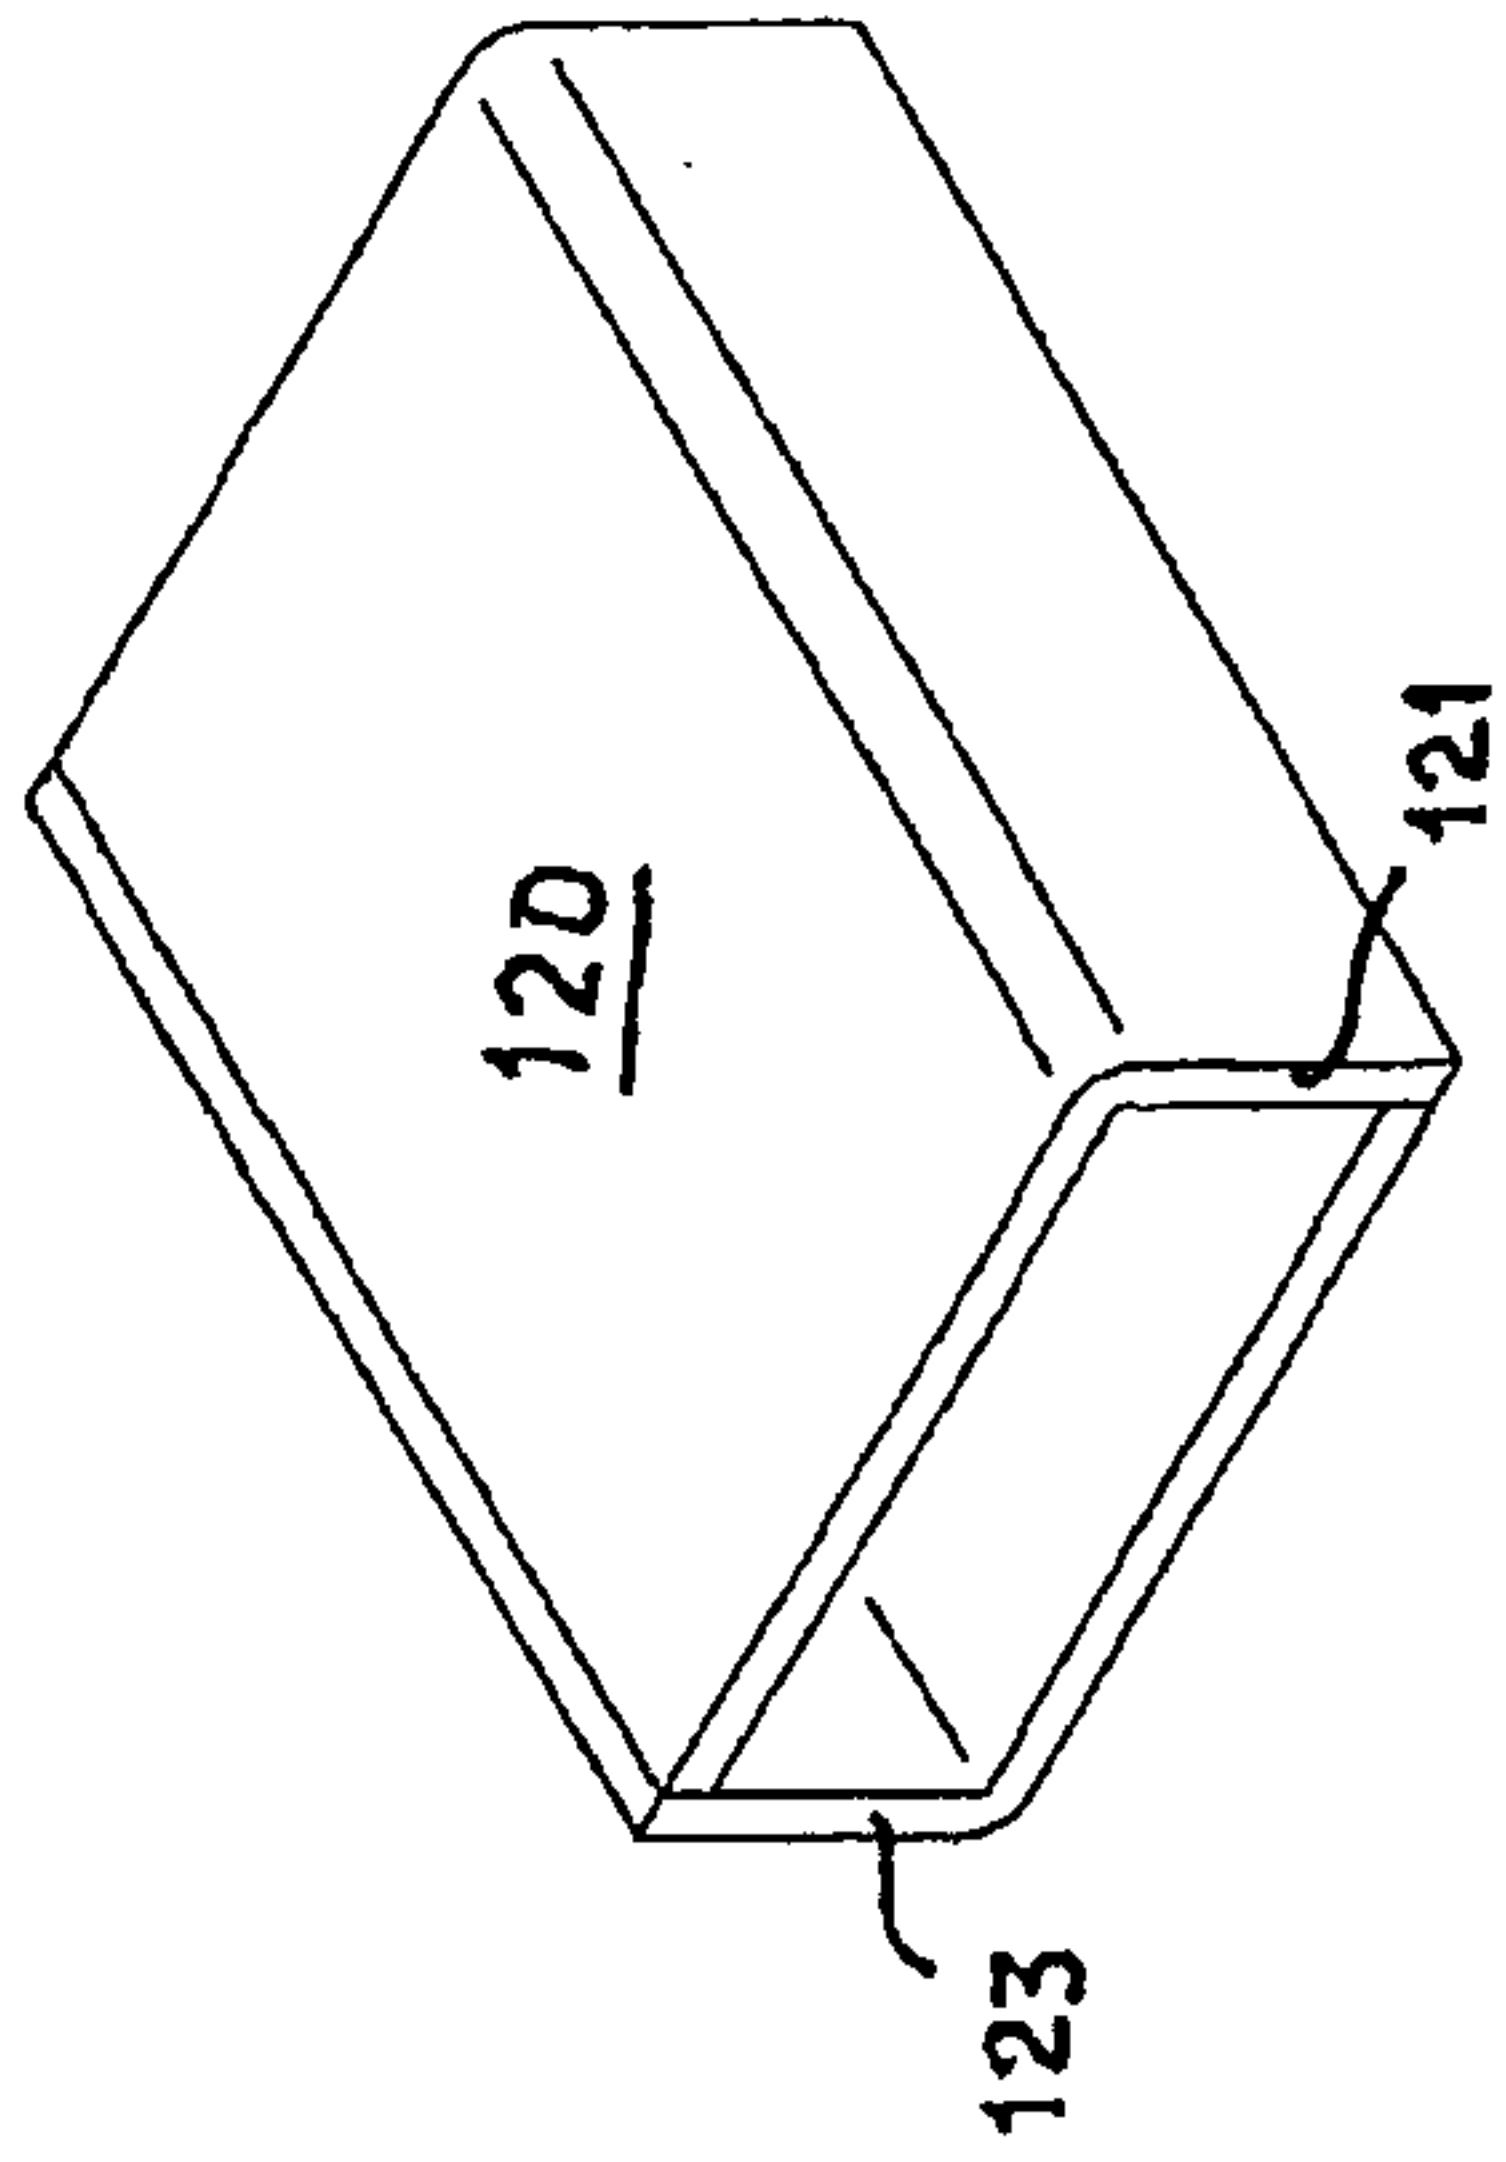


FIG. 9B

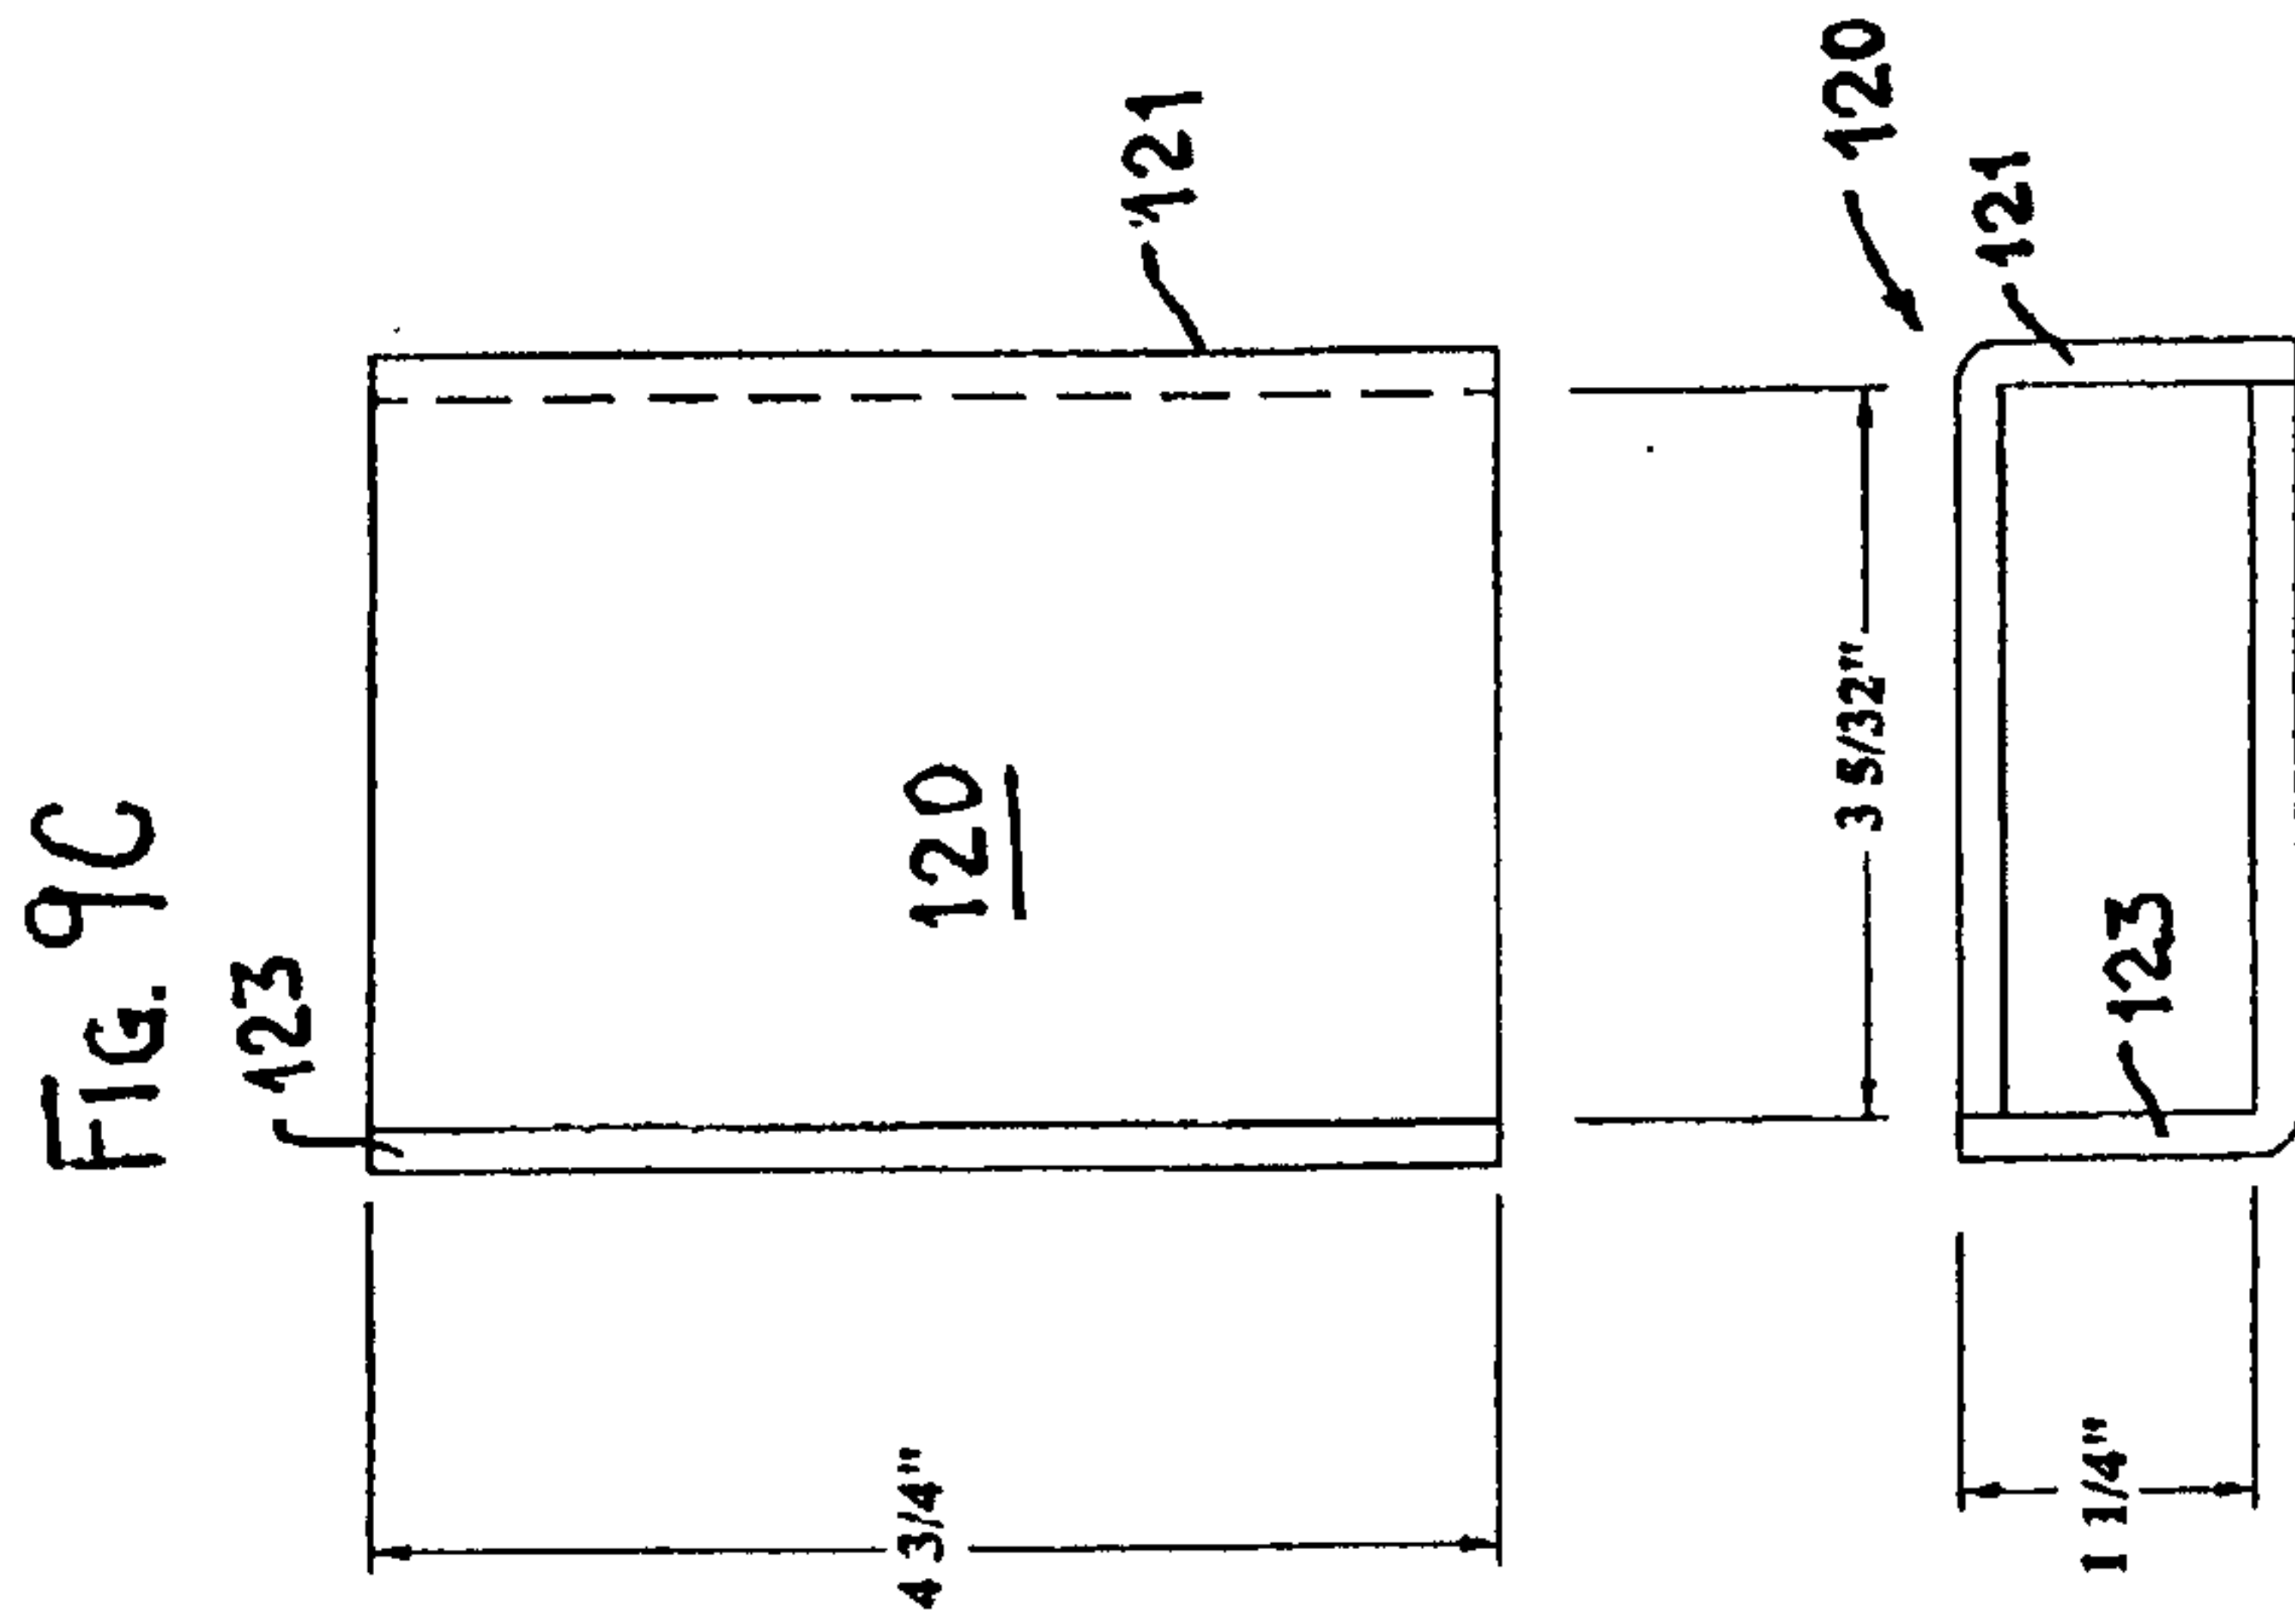


FIG. 9A

FIG. 9C

FIG. 11A

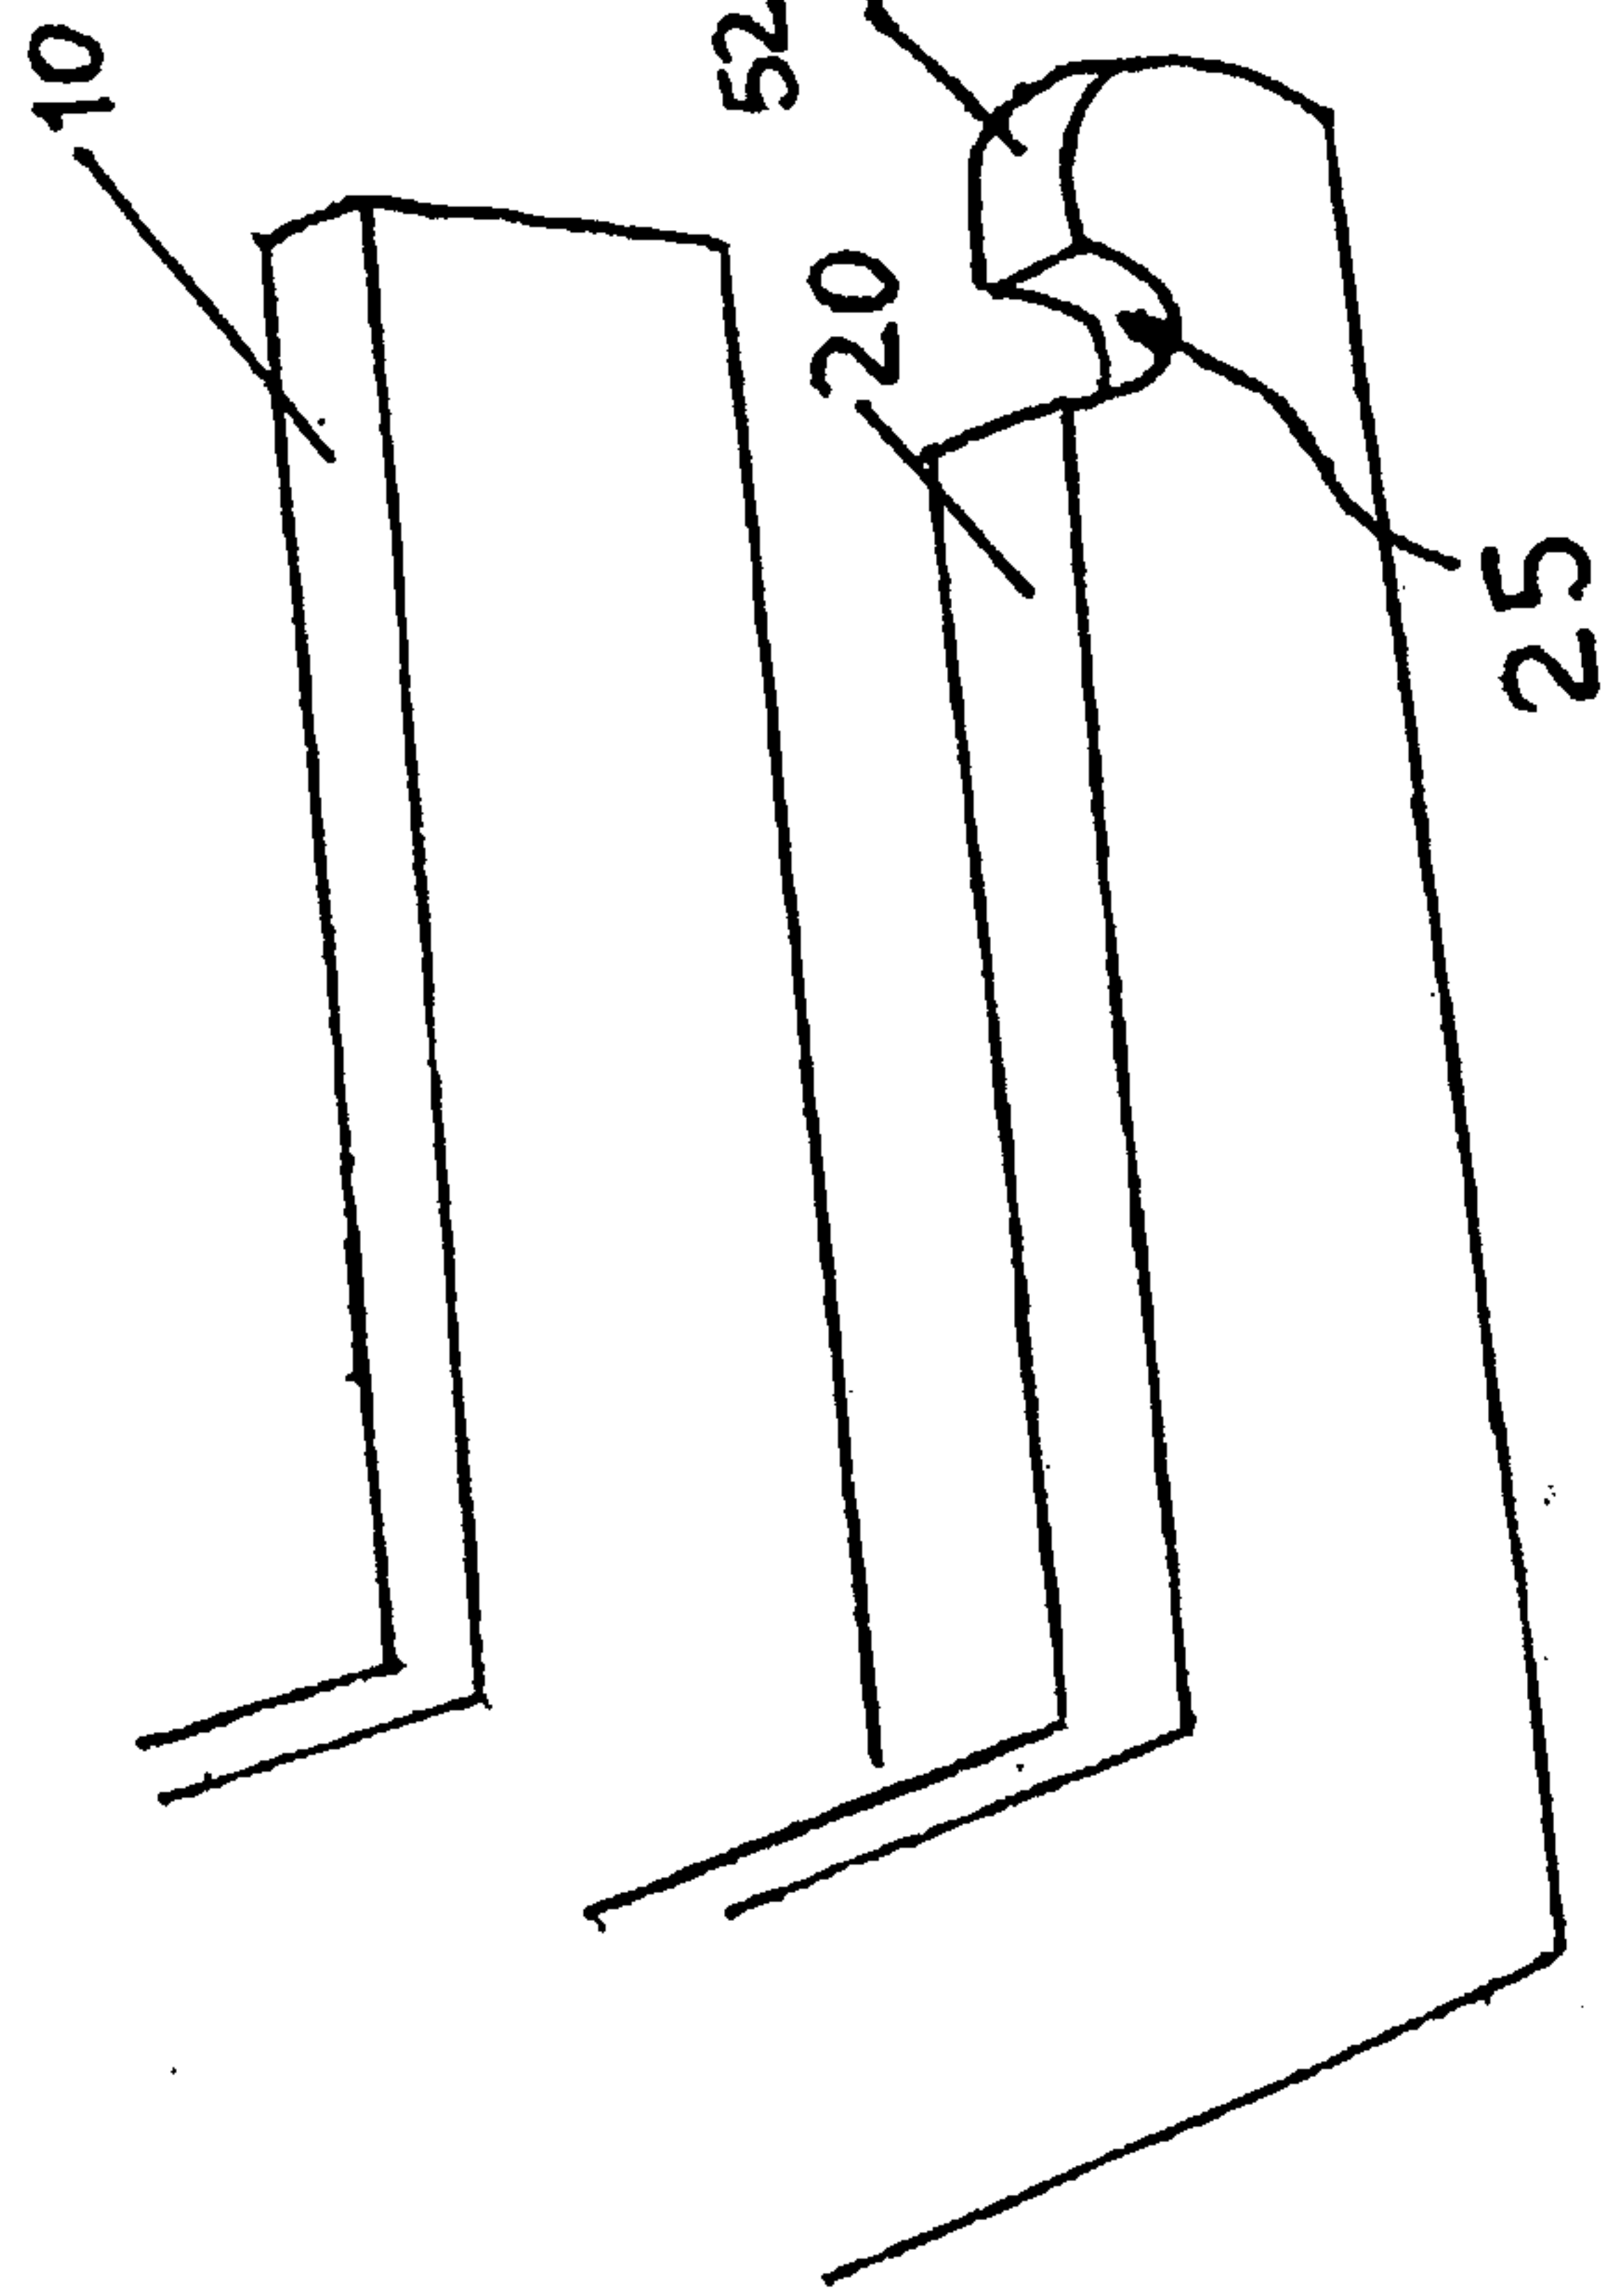
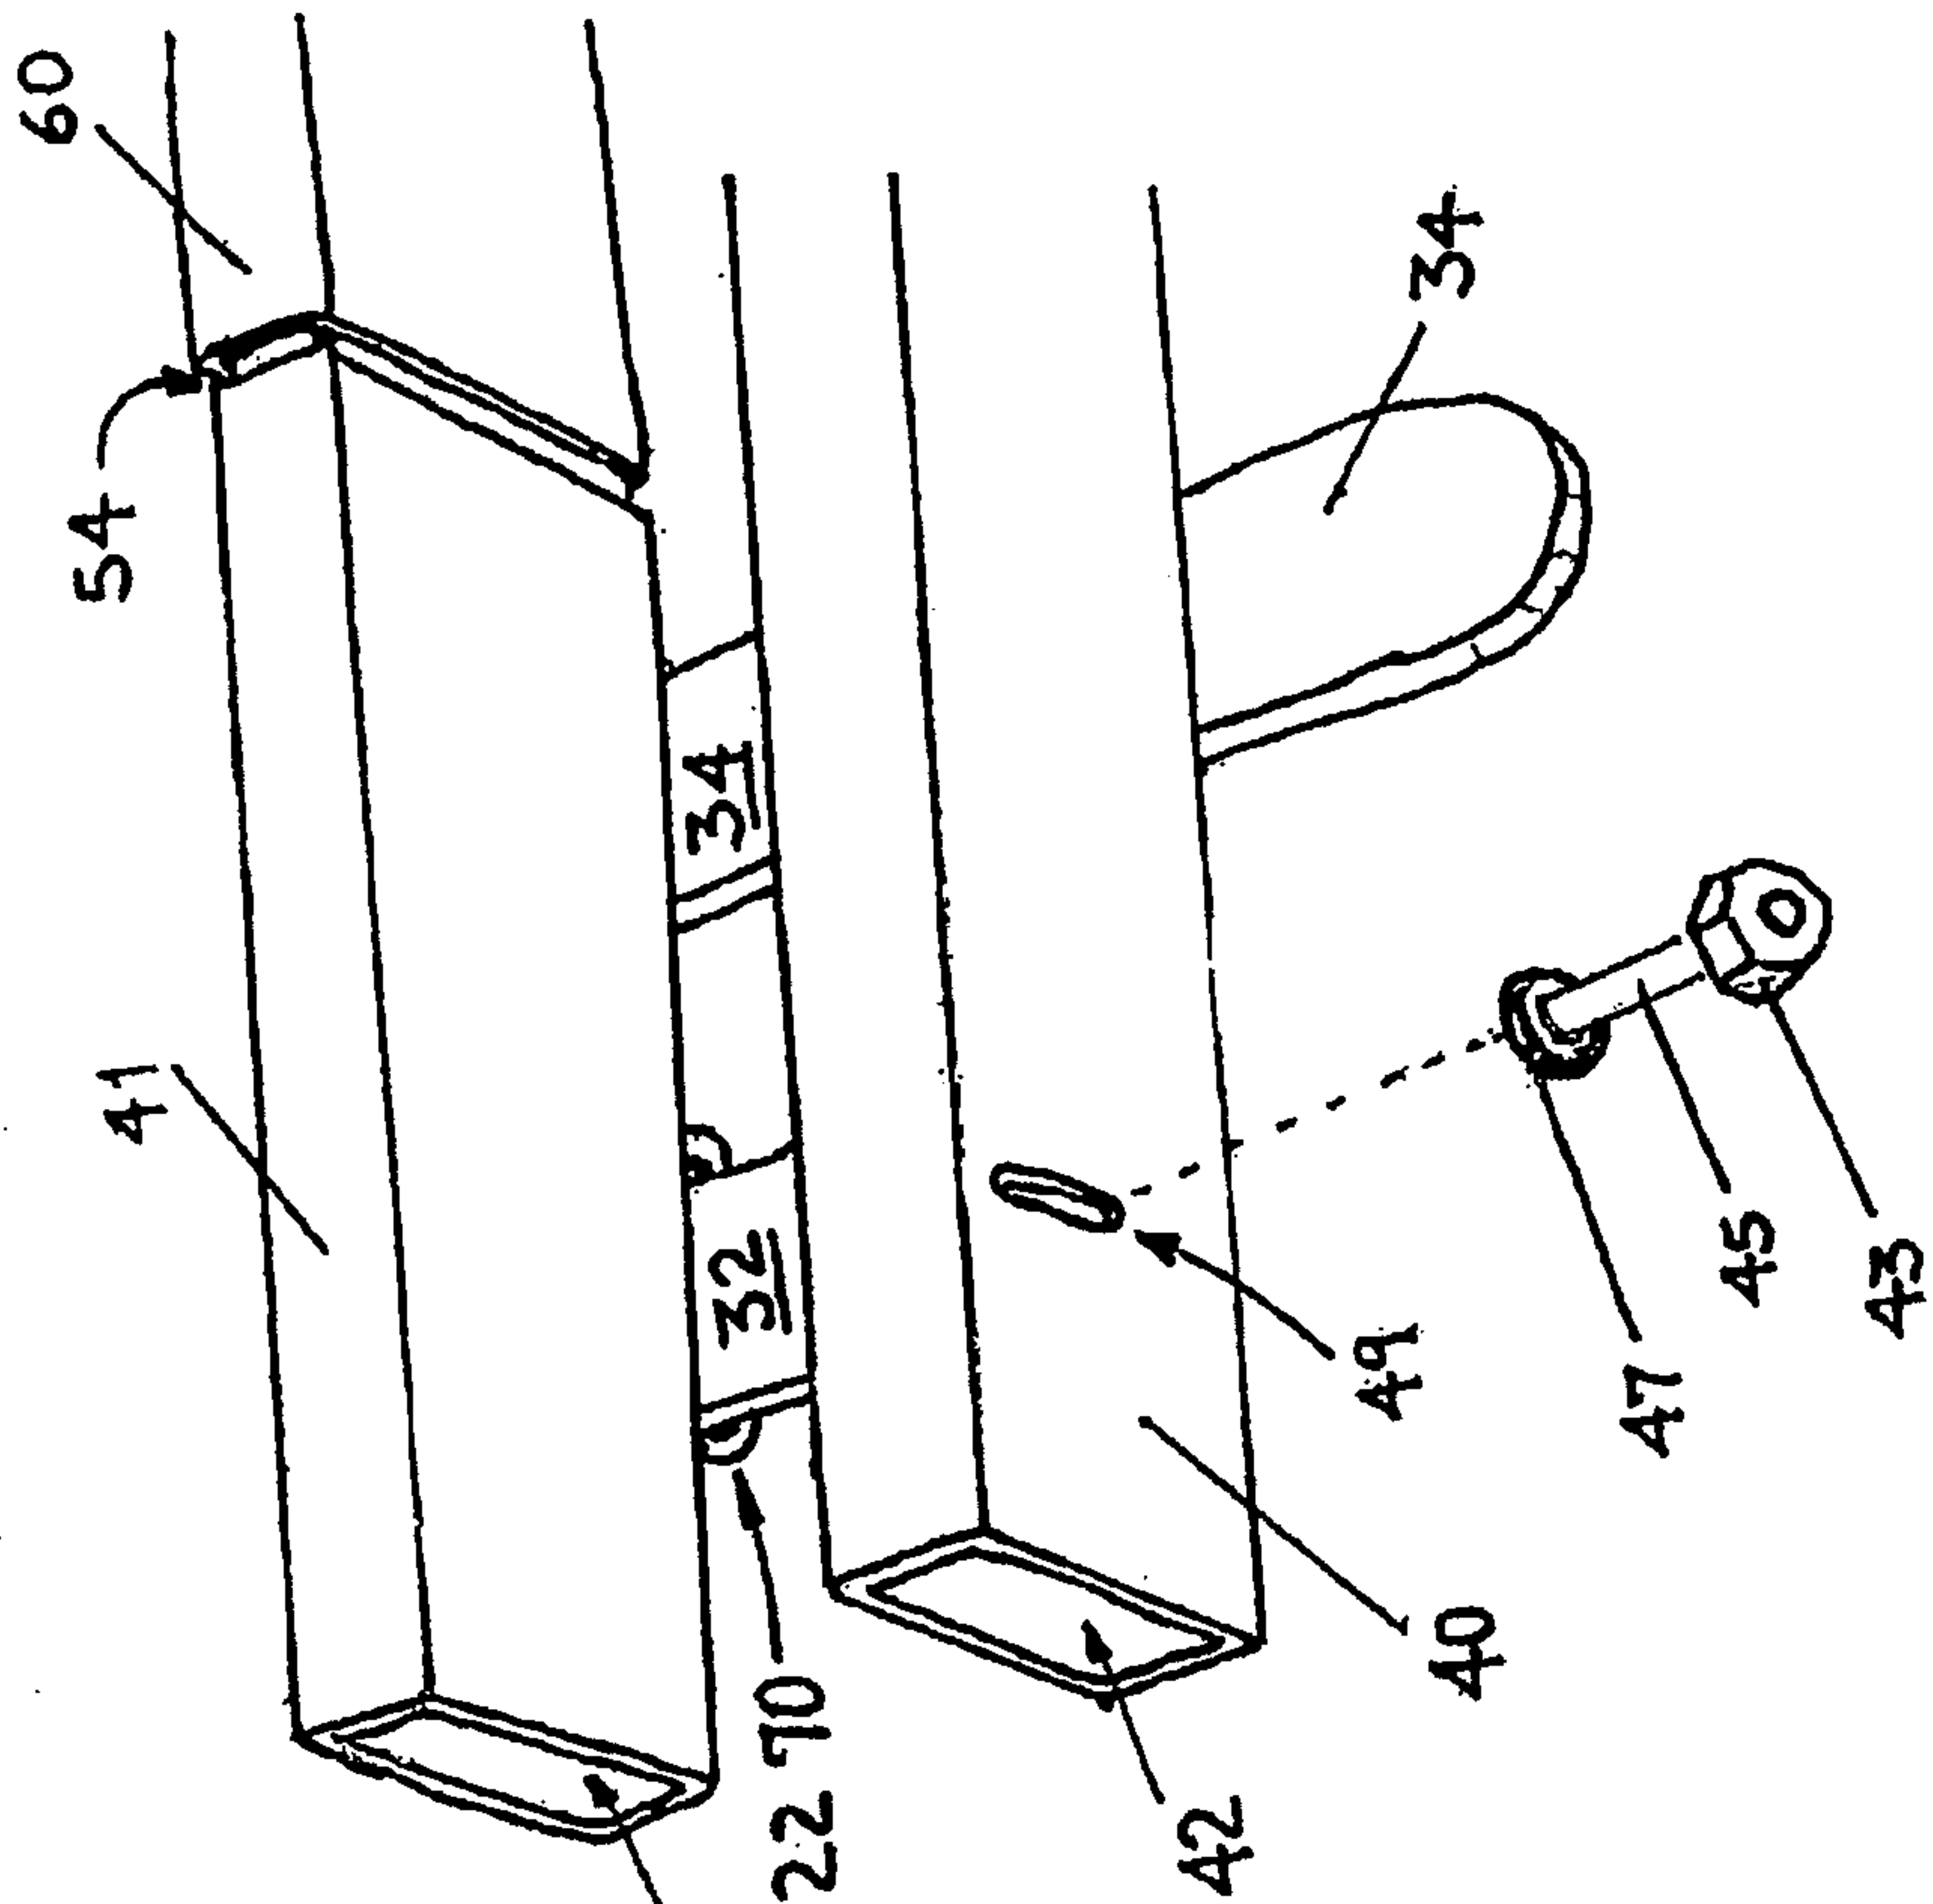


FIG. 11B





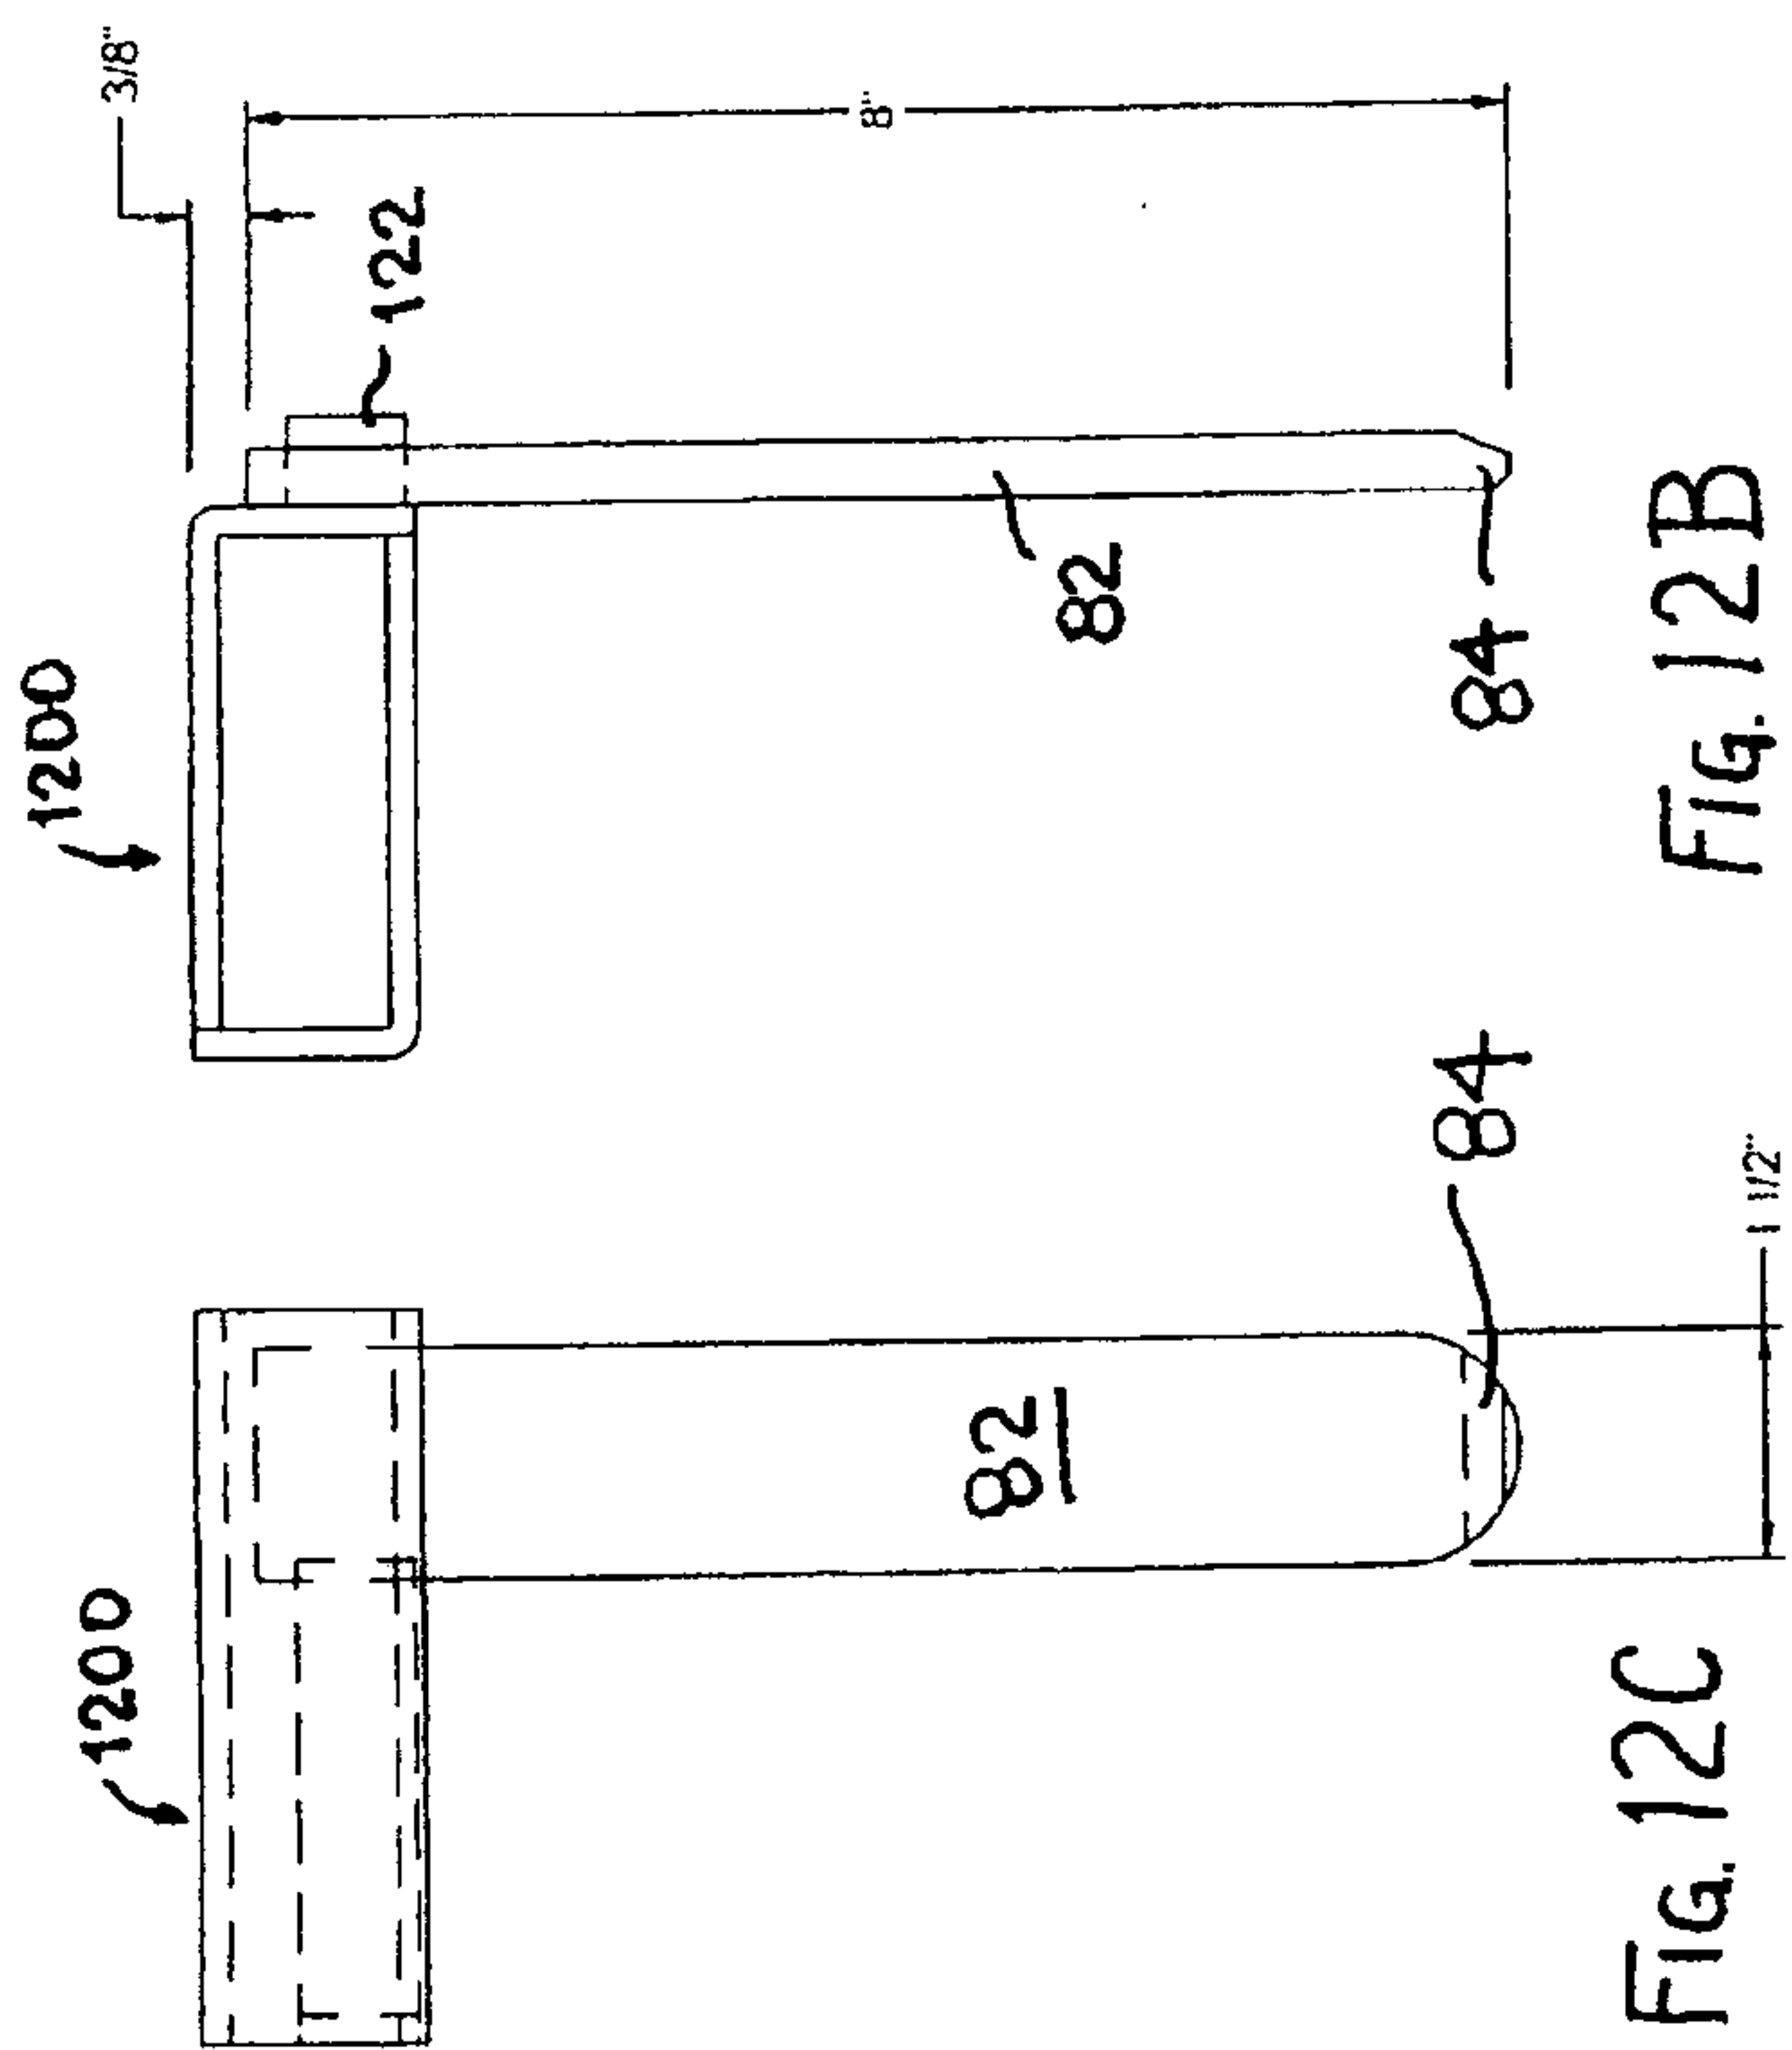


FIG. 12B

FIG. 12C



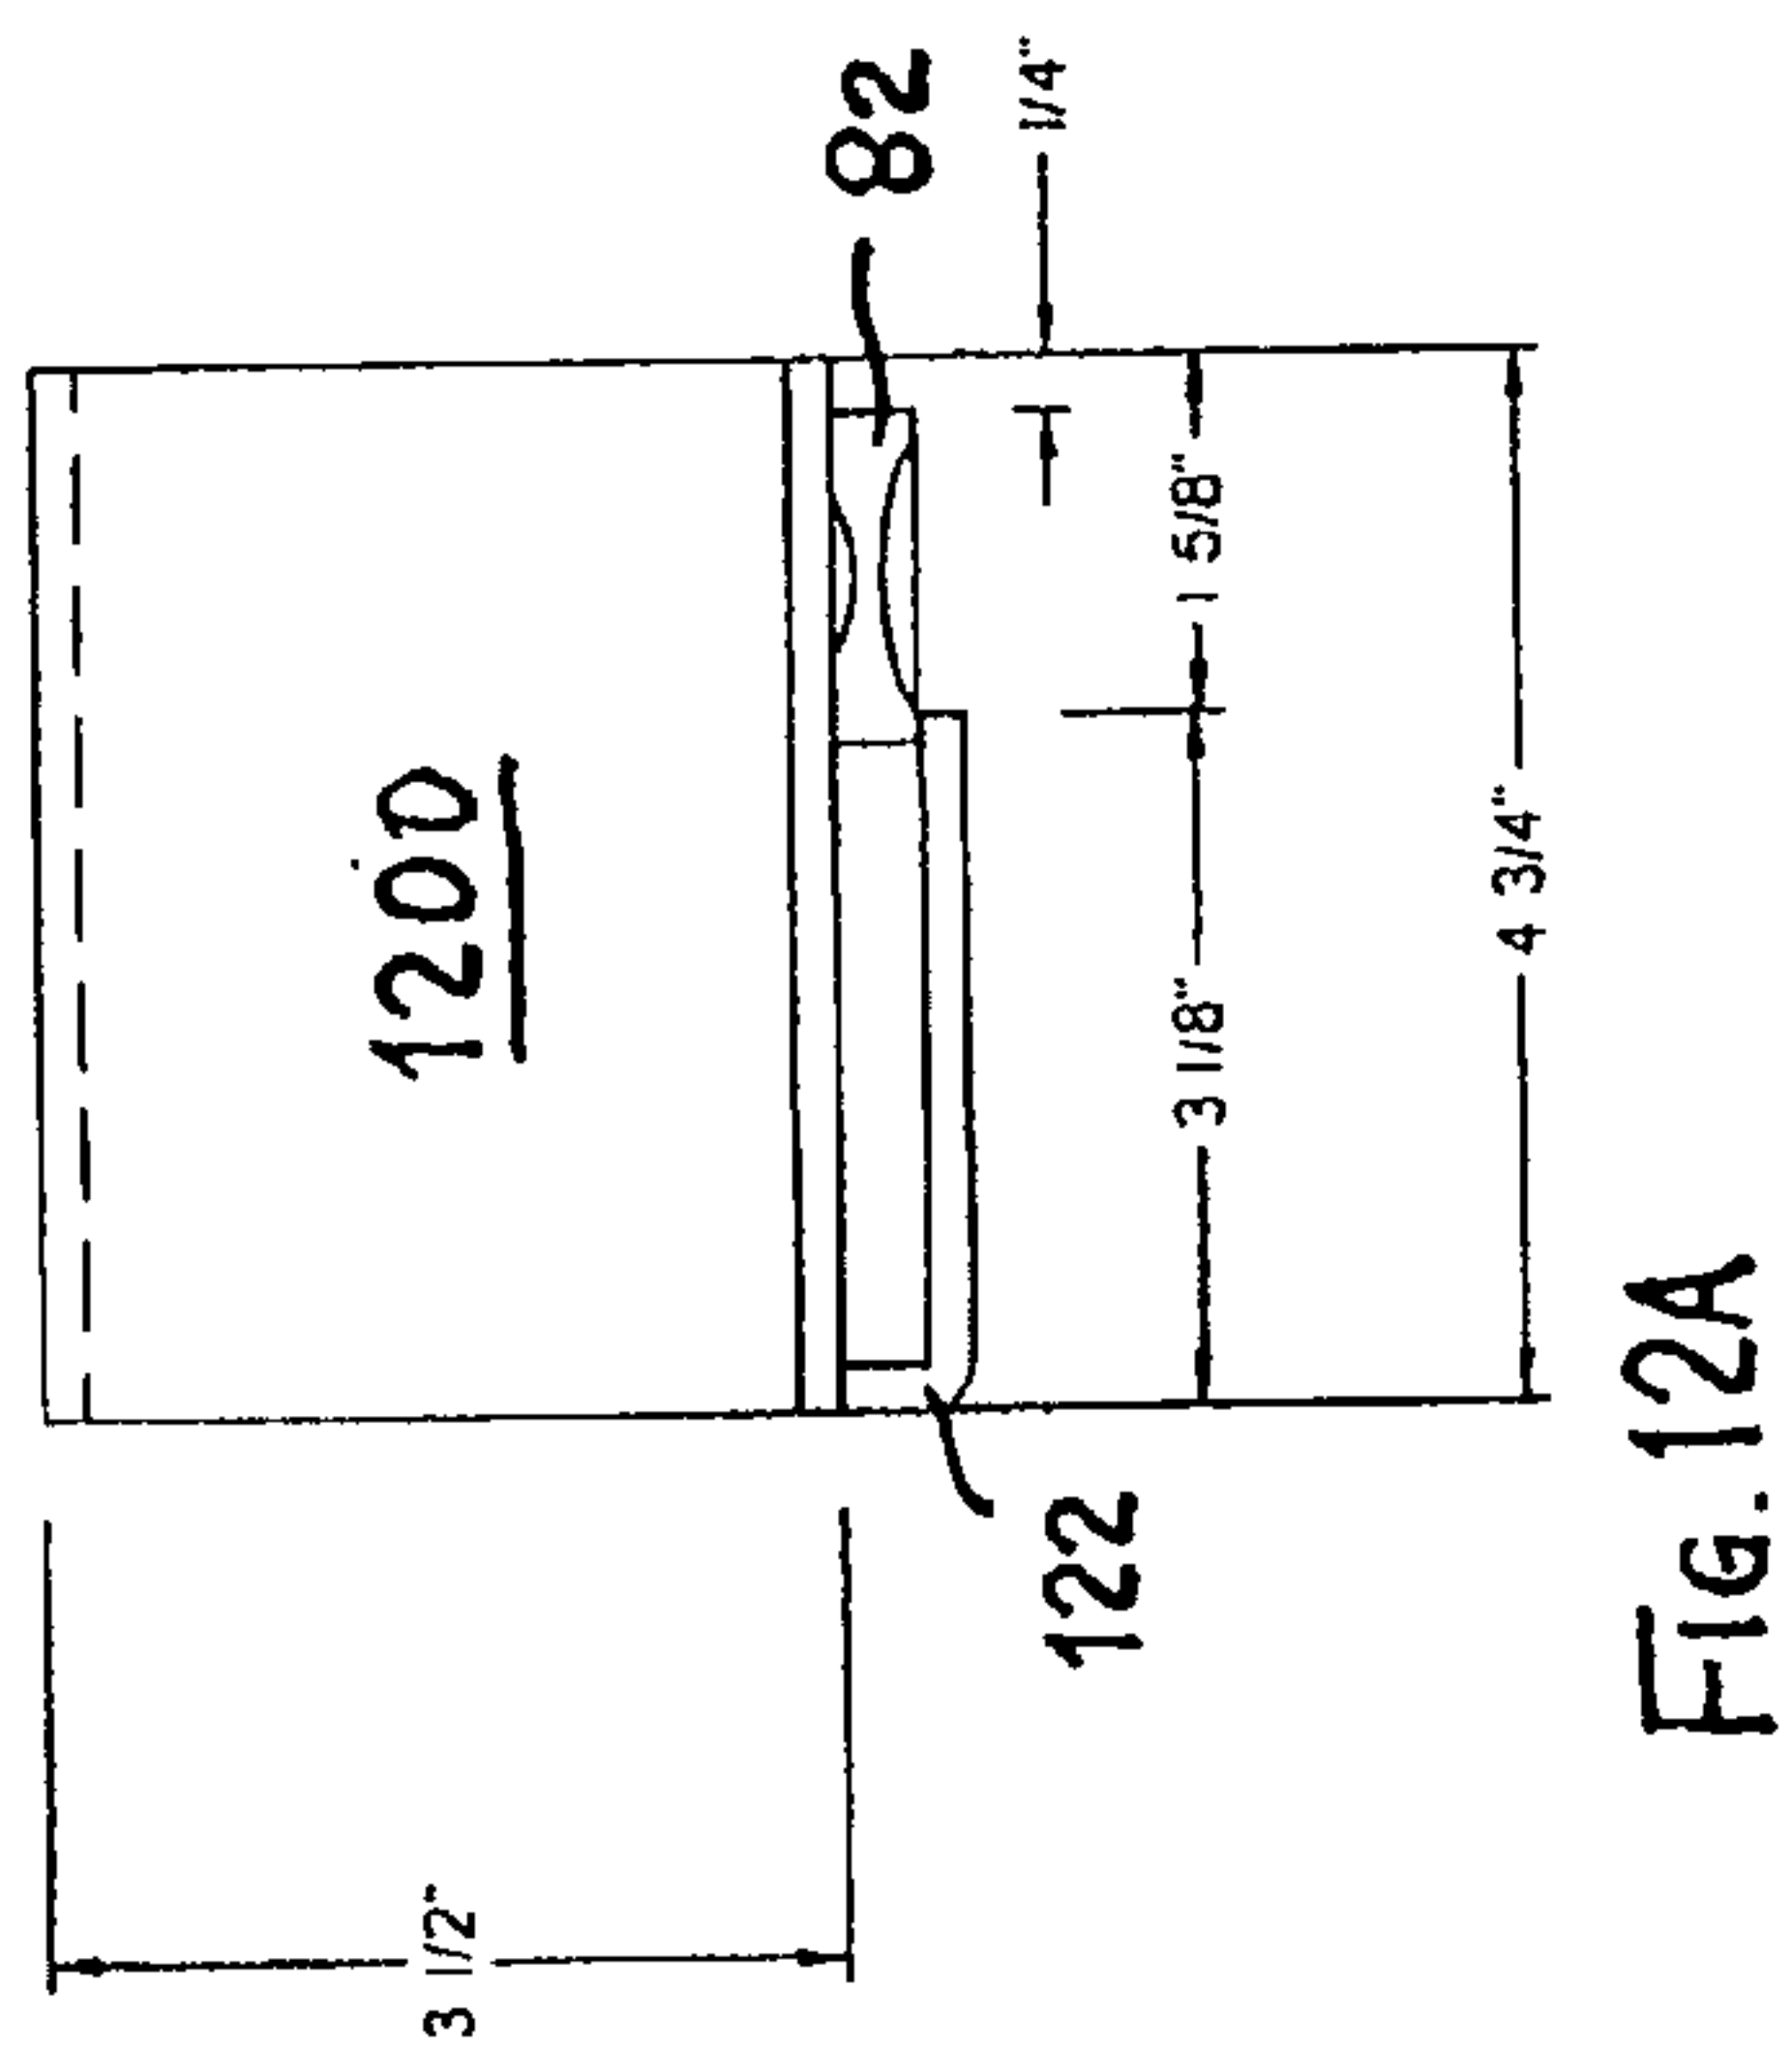


FIG. 12A

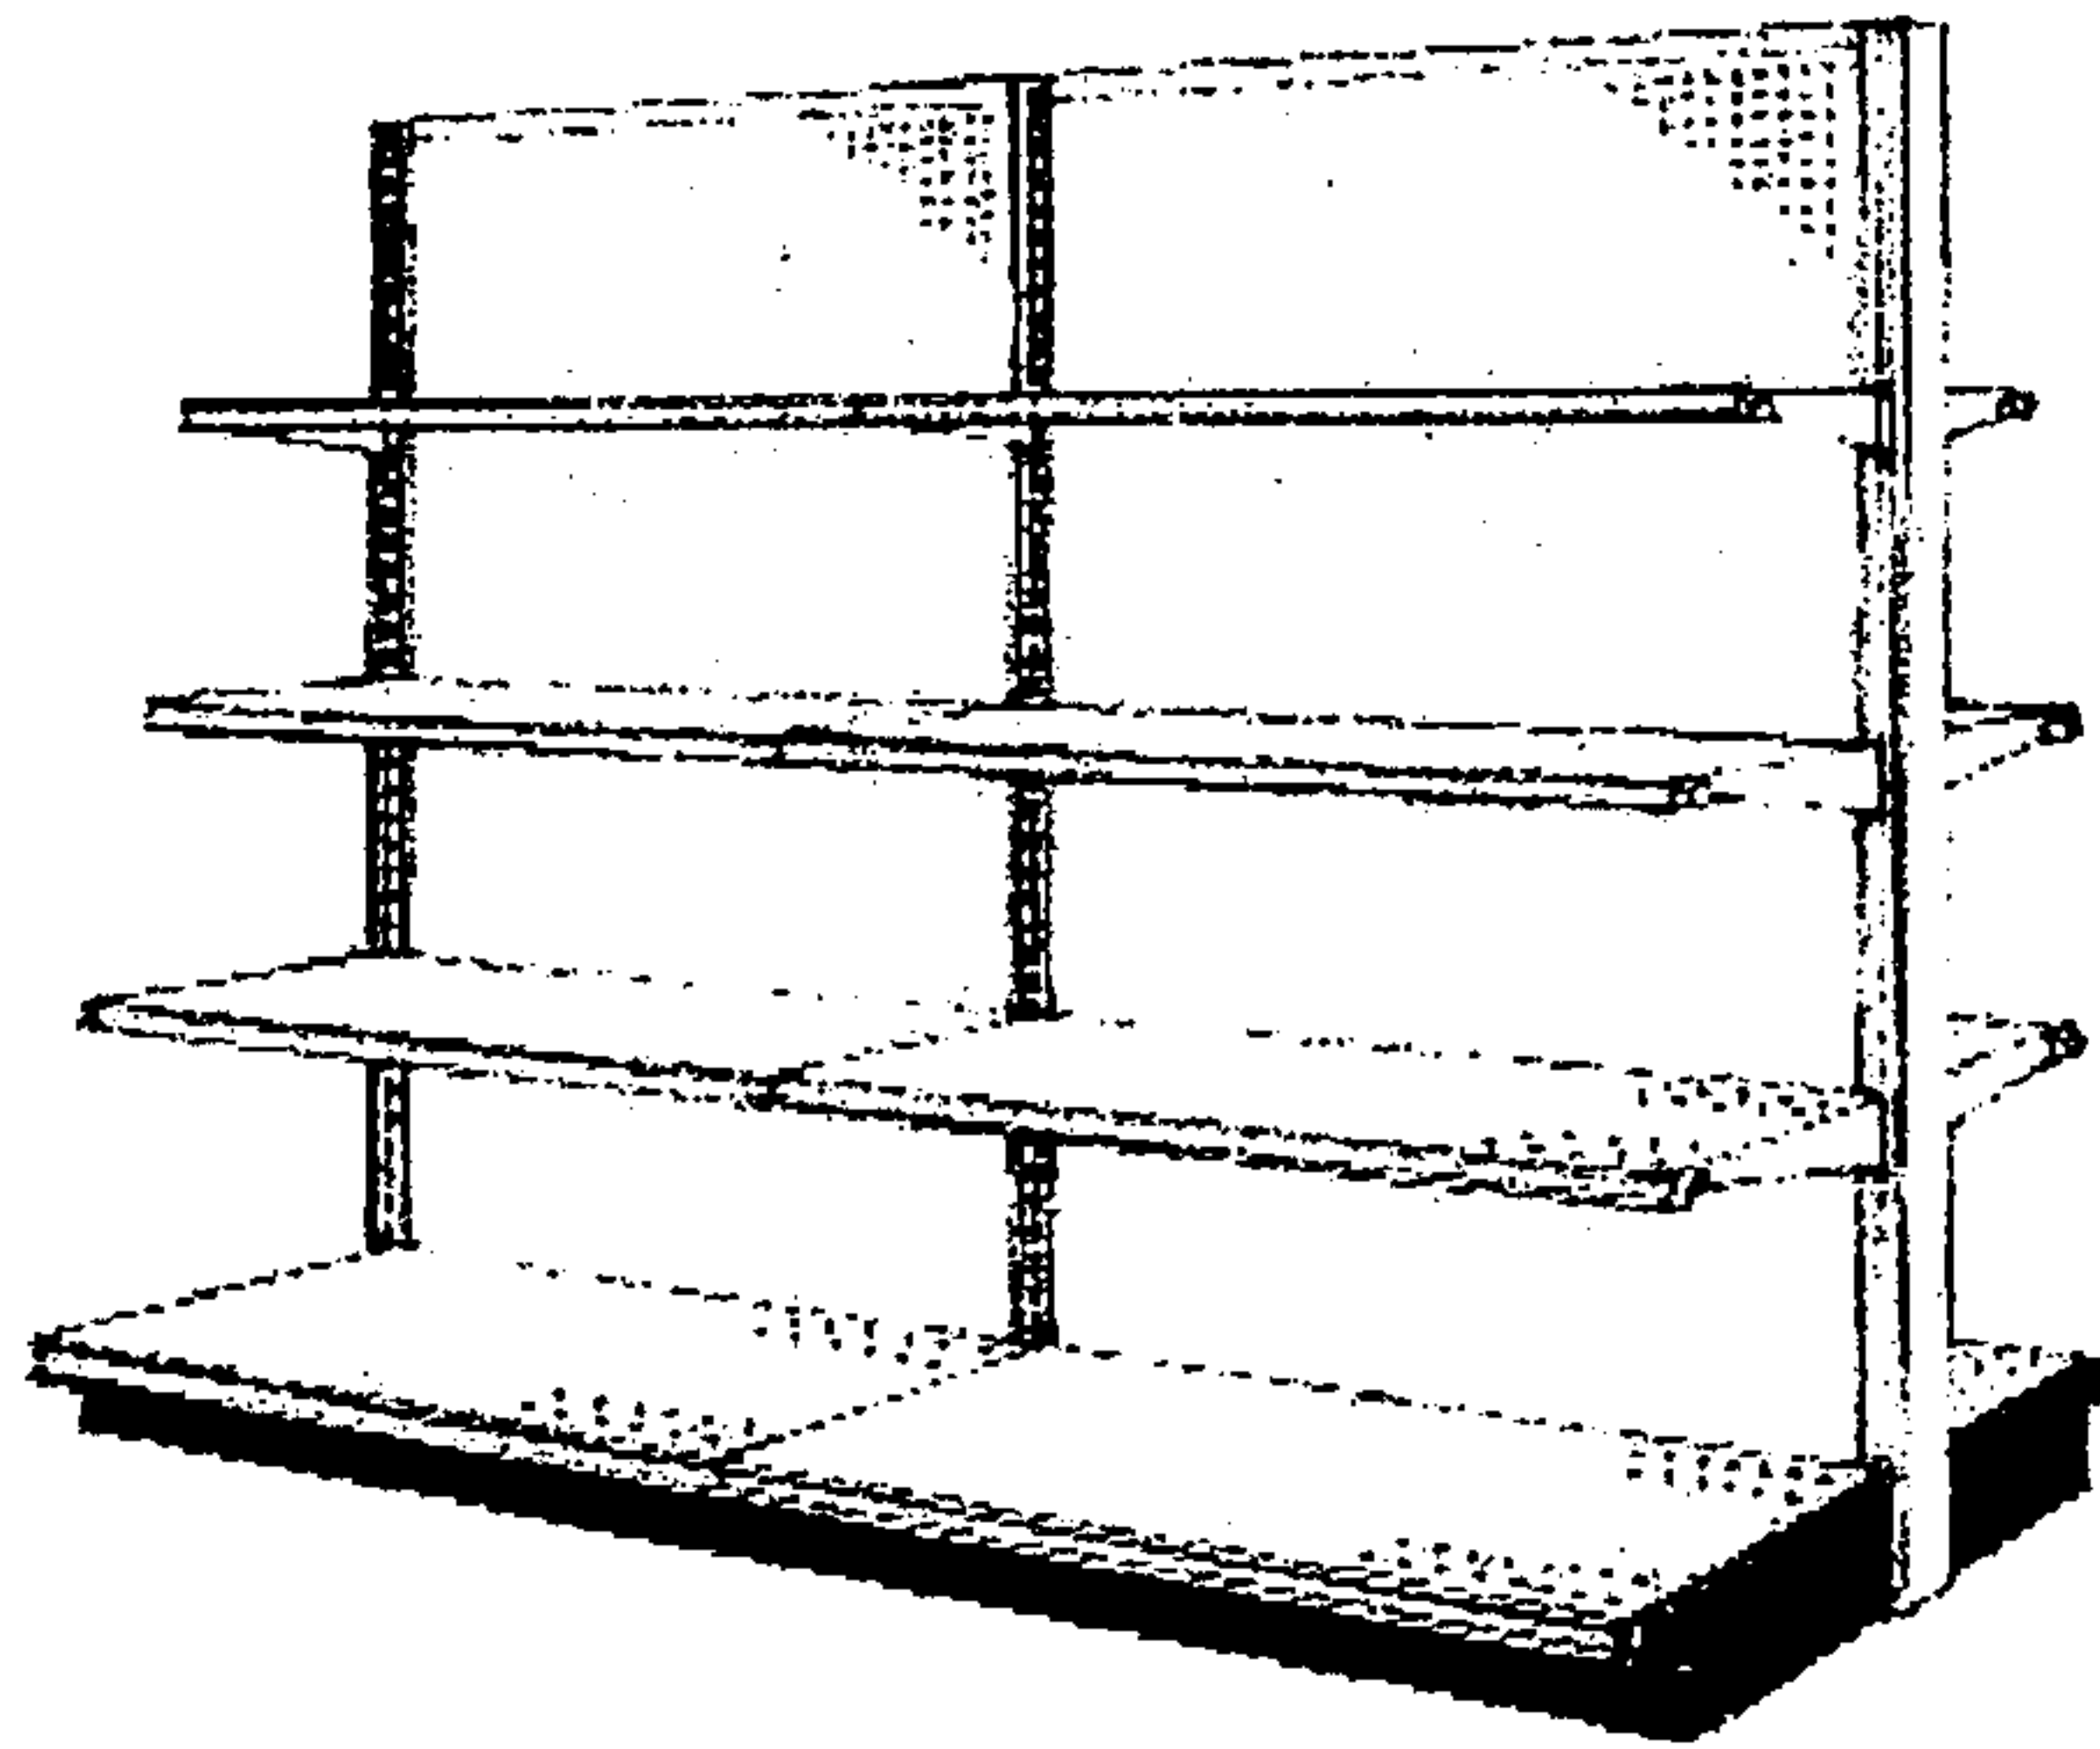


(PRIOR ART)

FIG. 13A

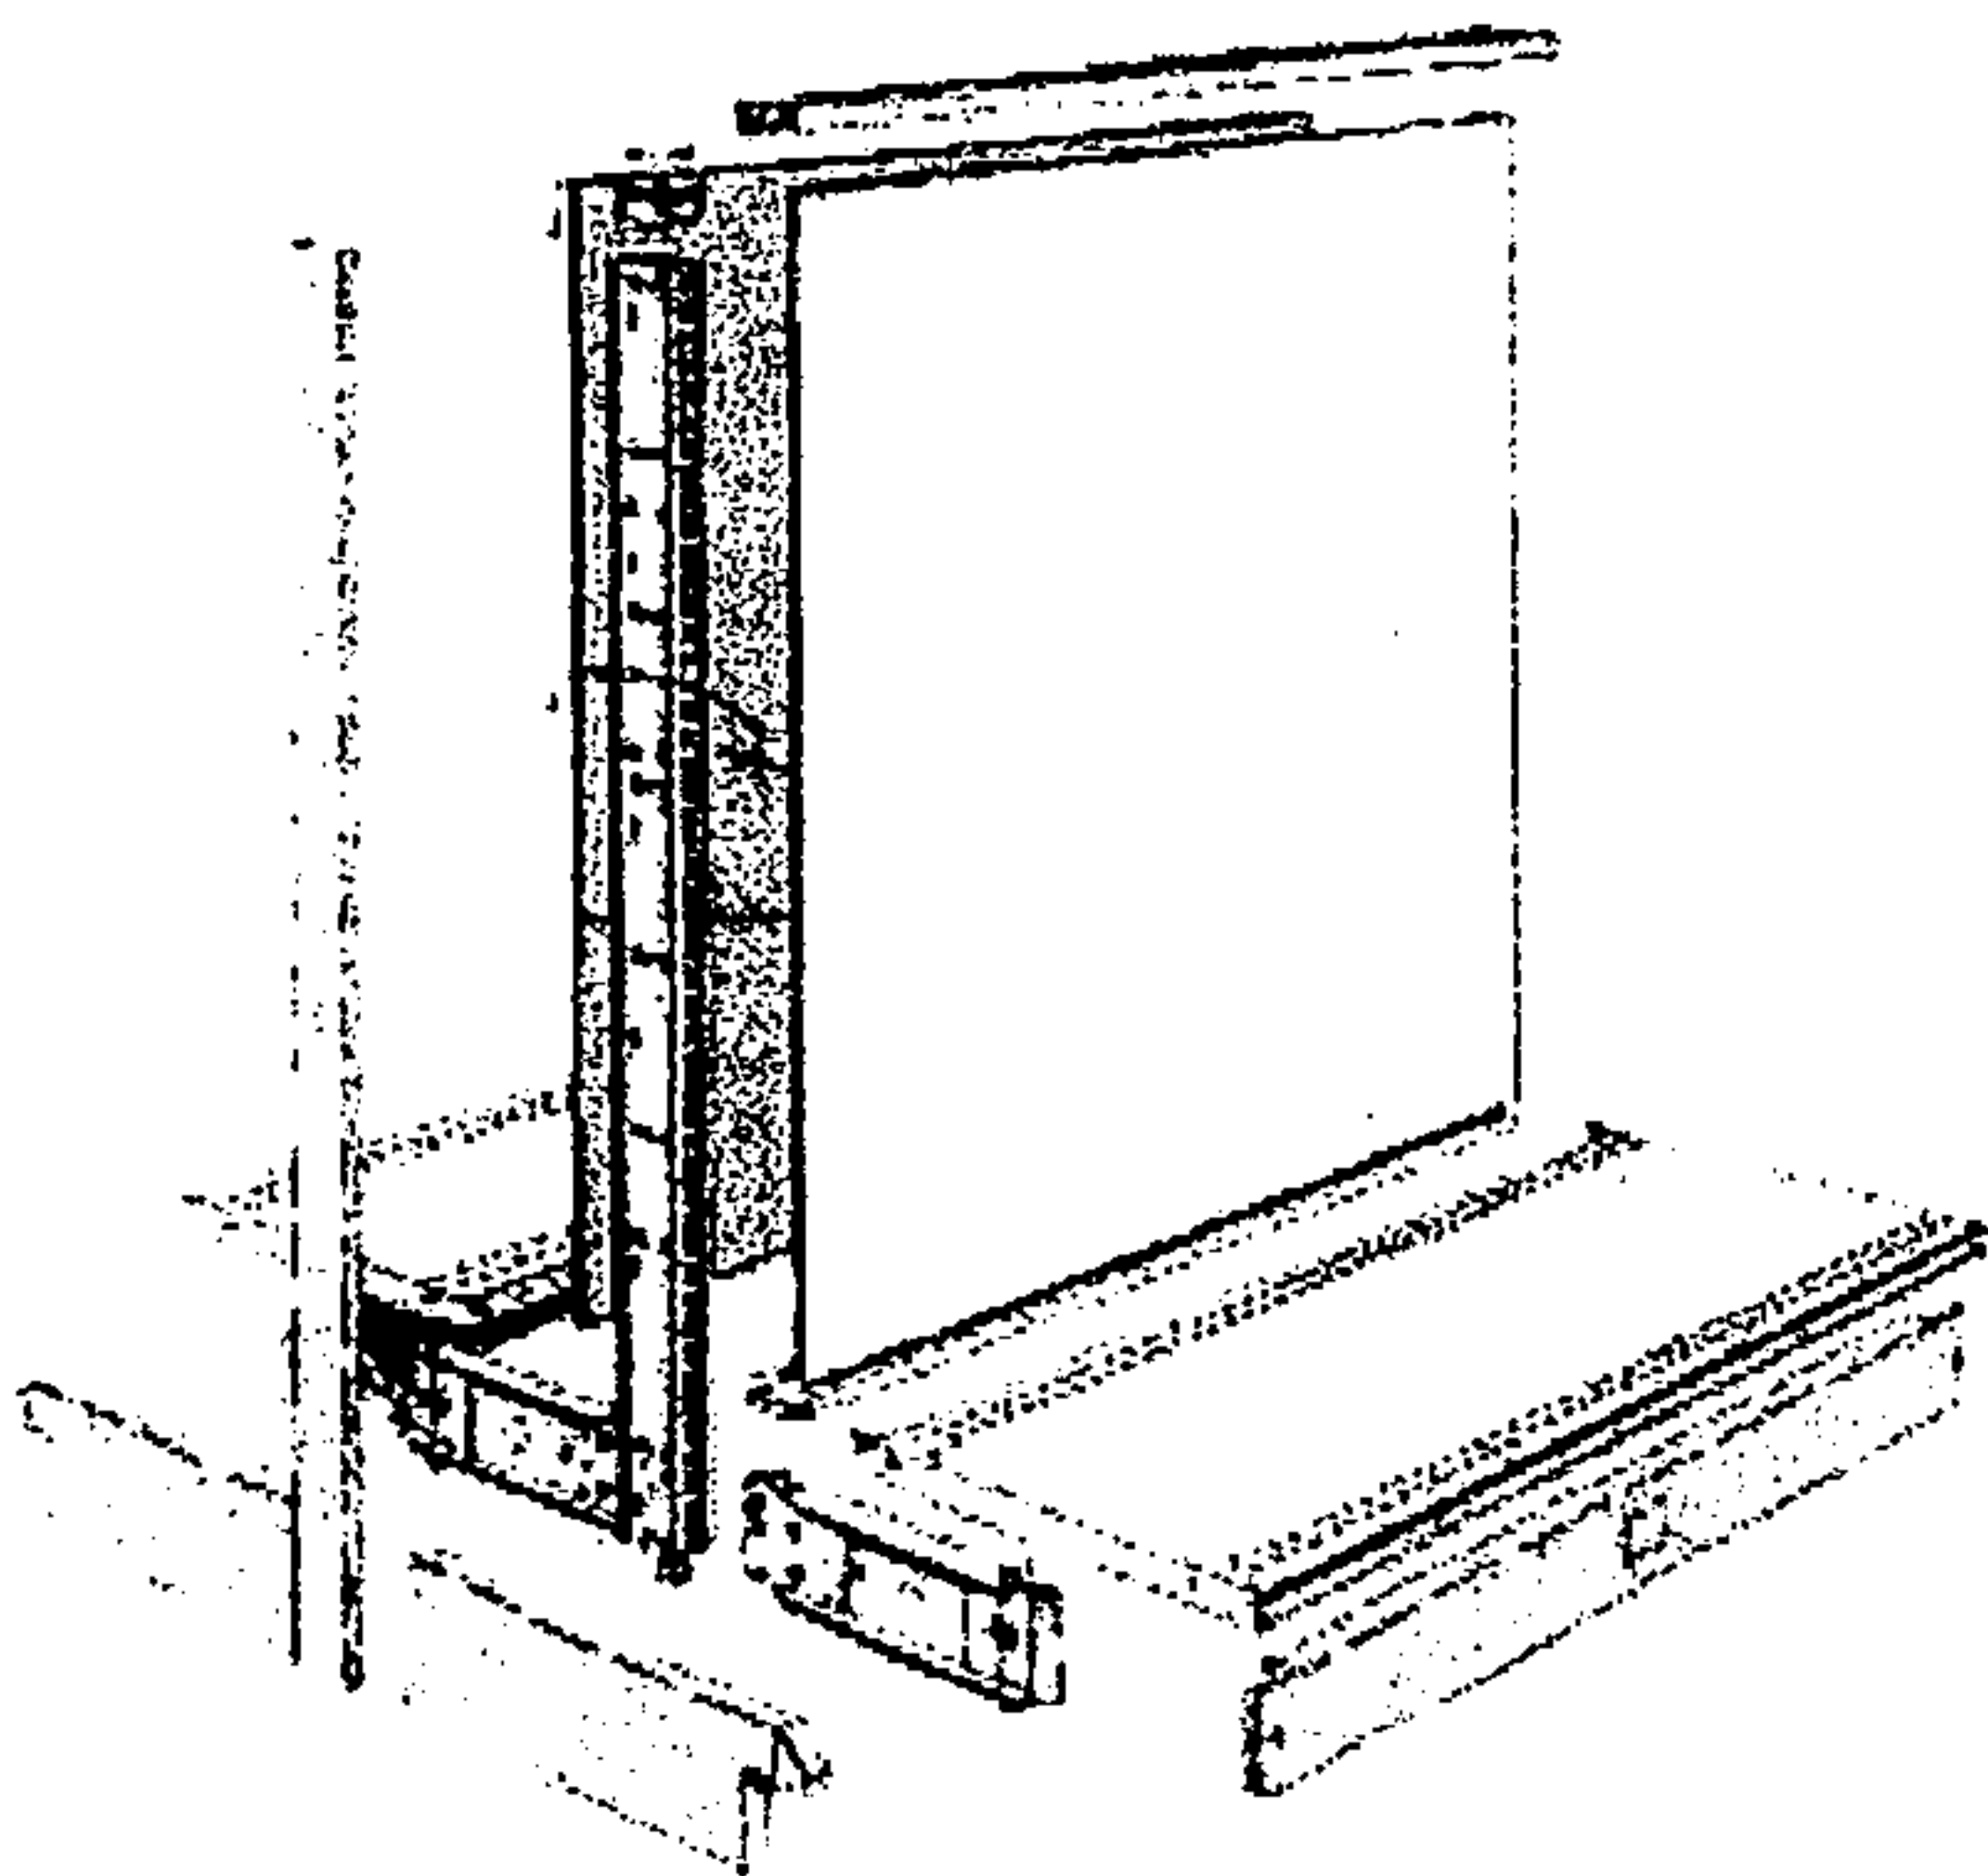

(PRIOR ART)

FIG. 13B

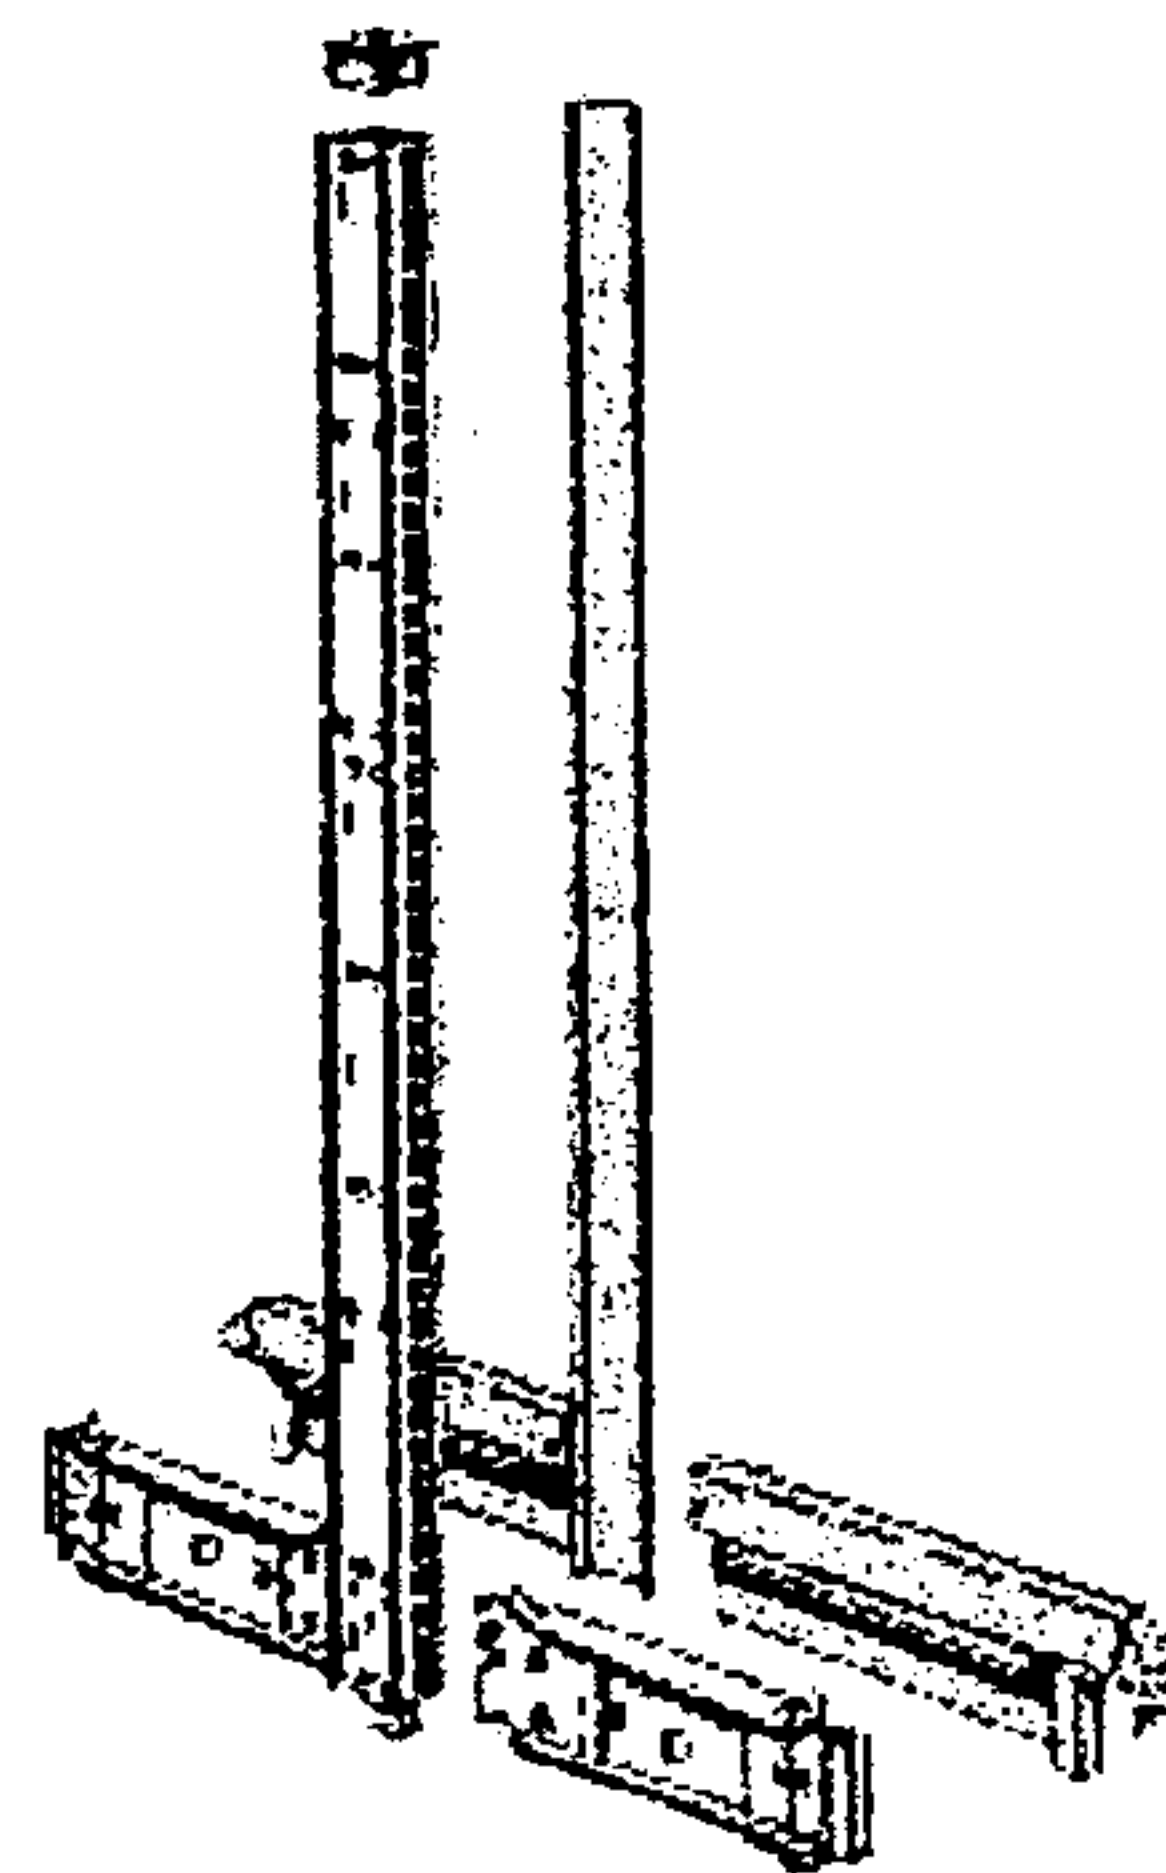

(PRIOR ART)

FIG. 13C

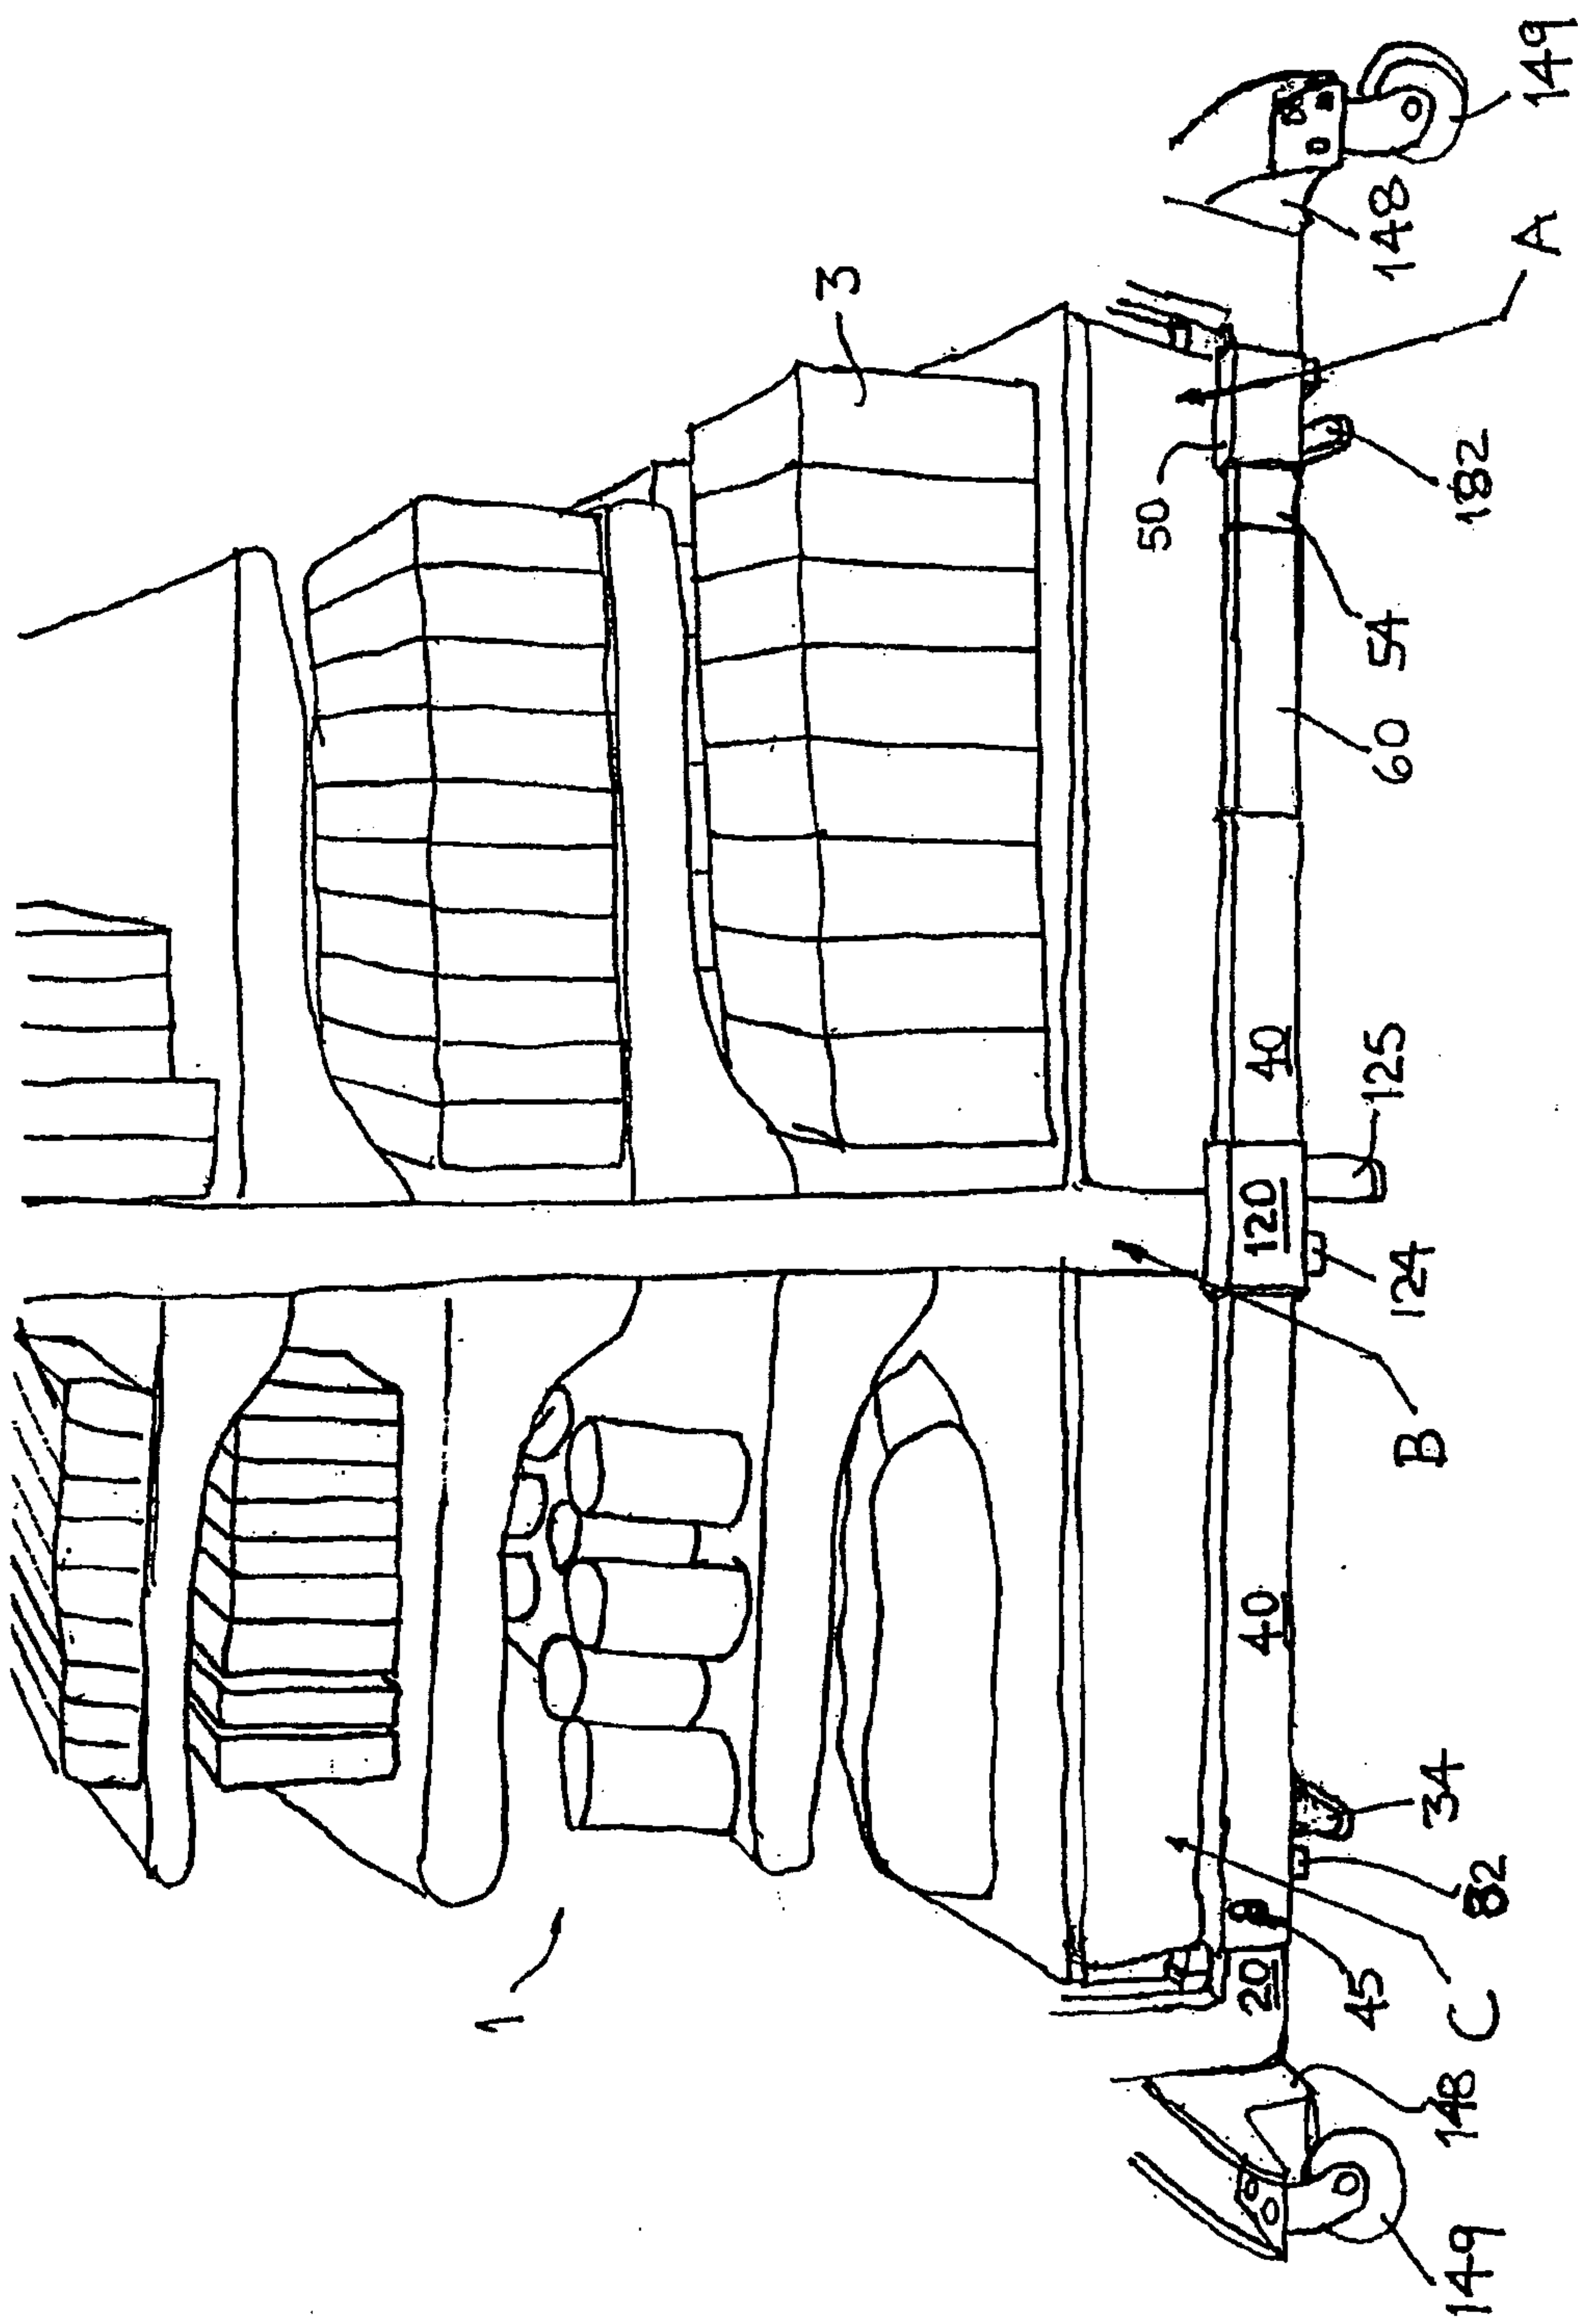
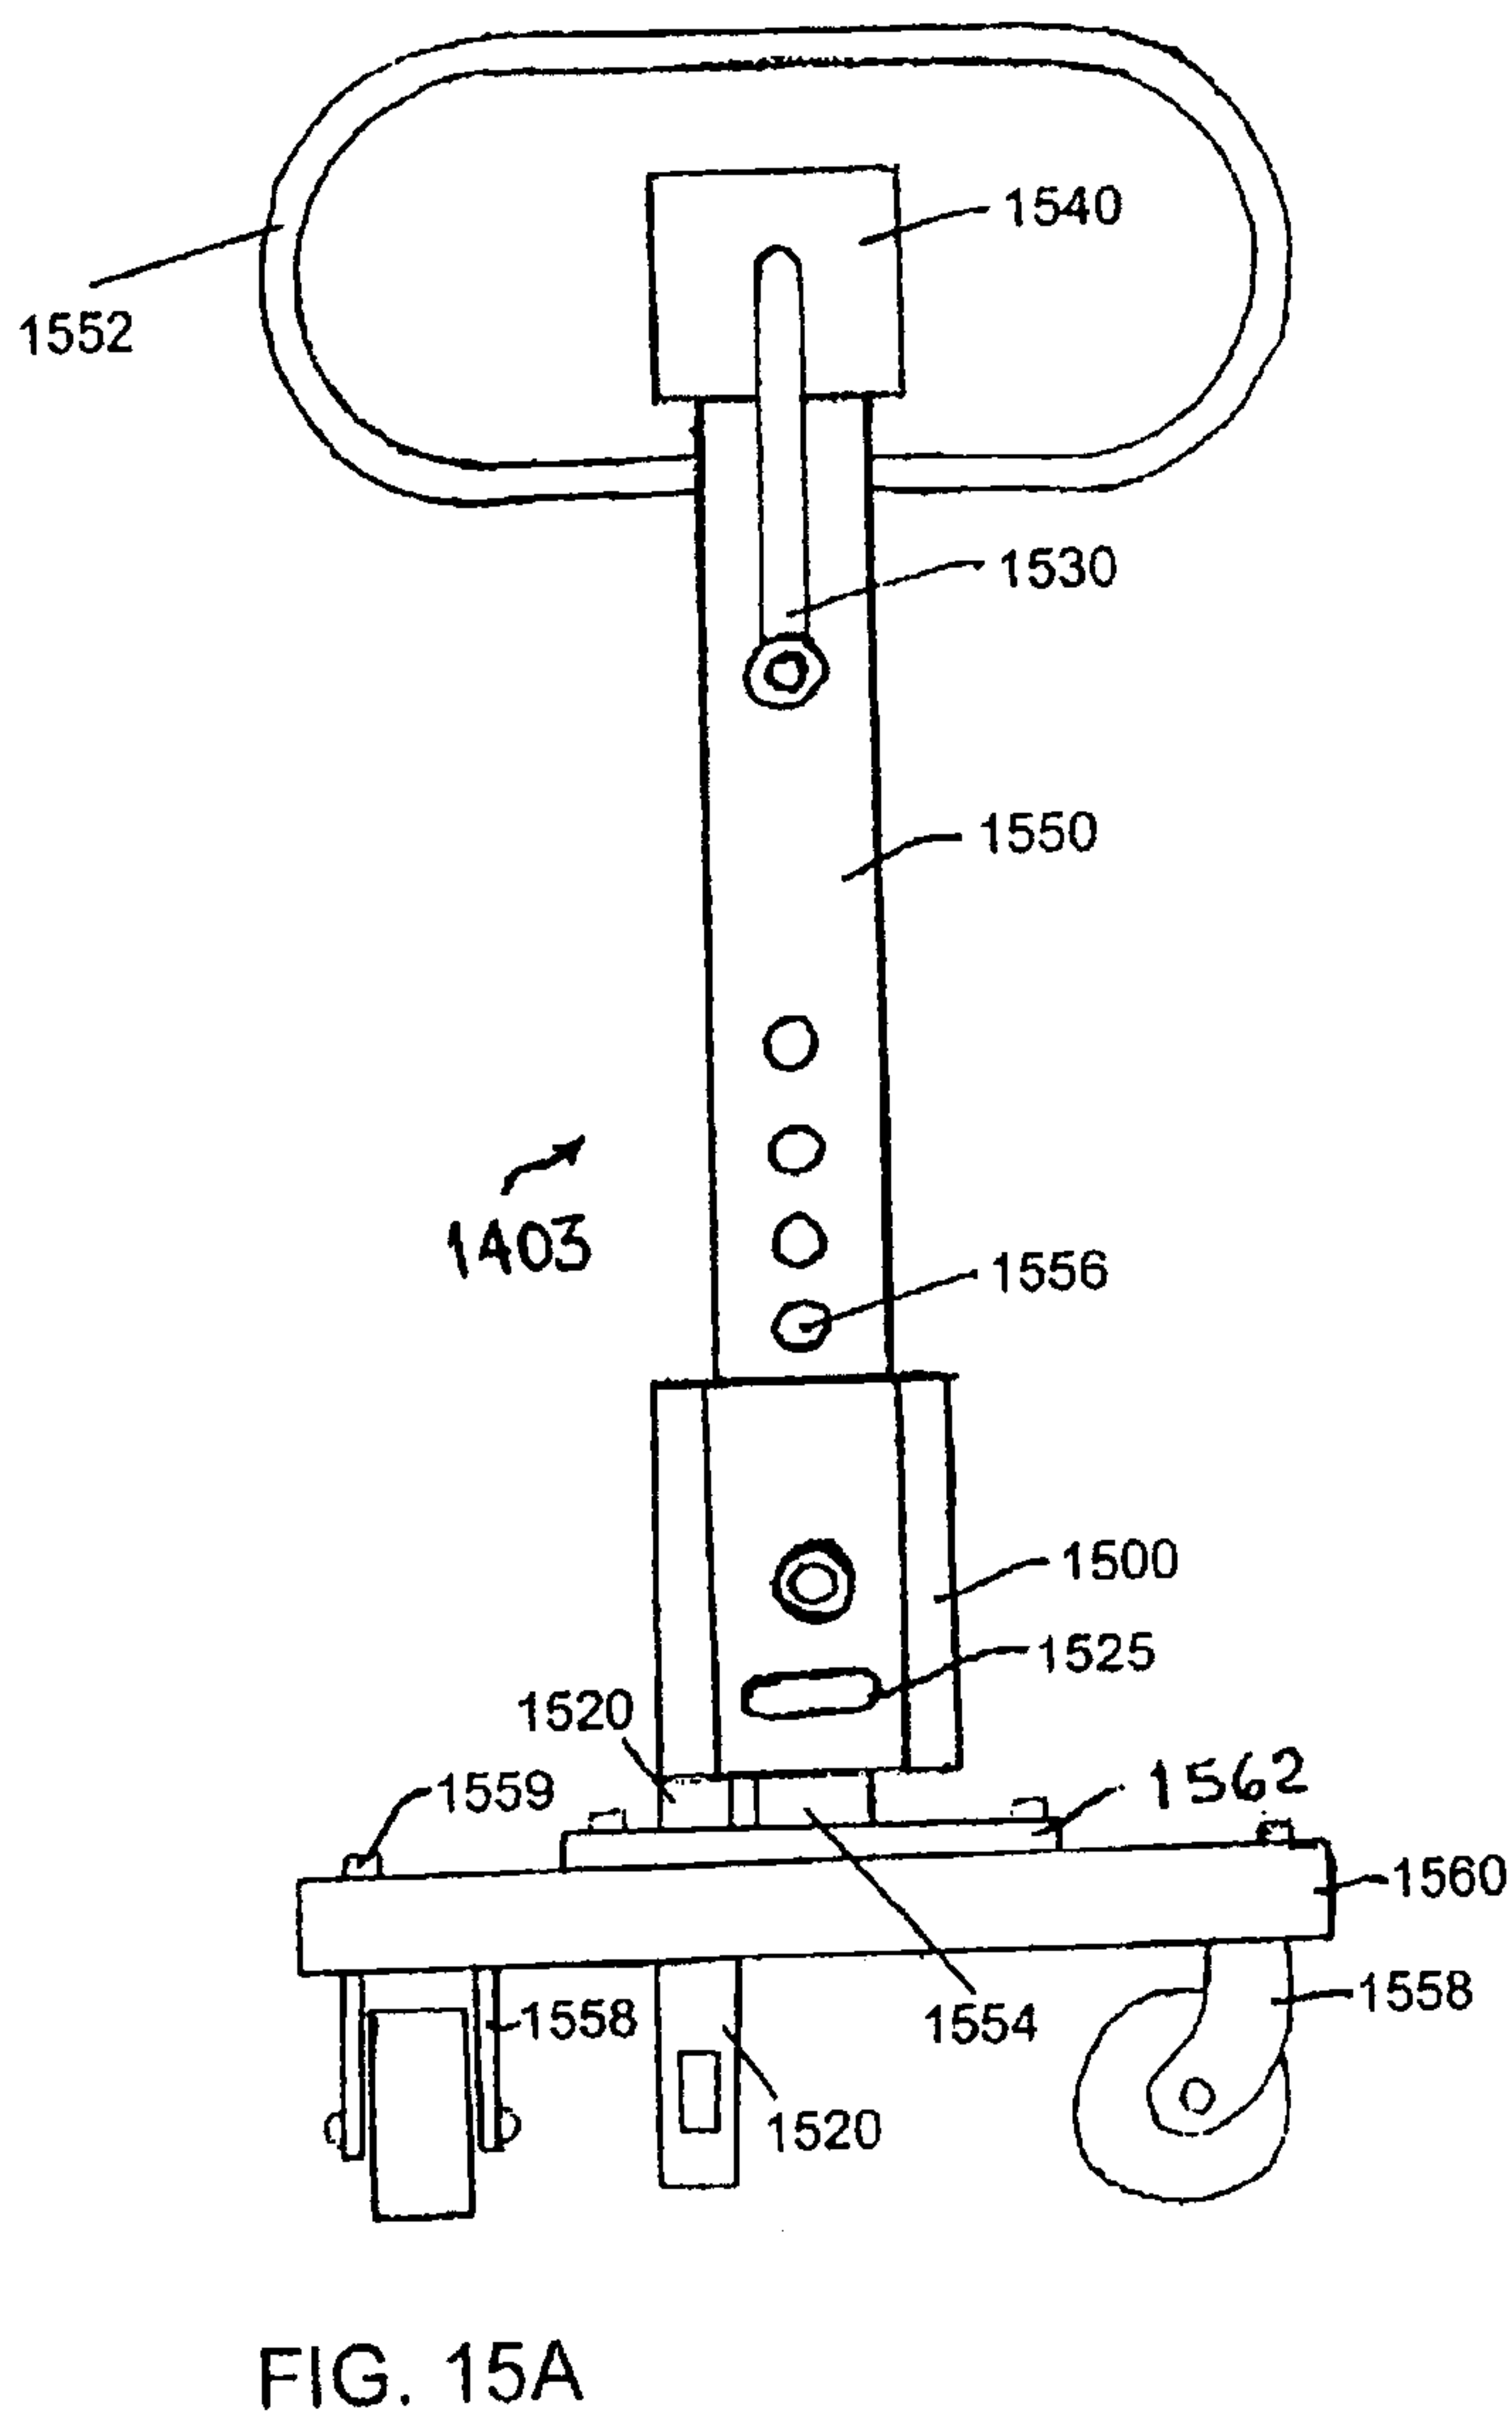
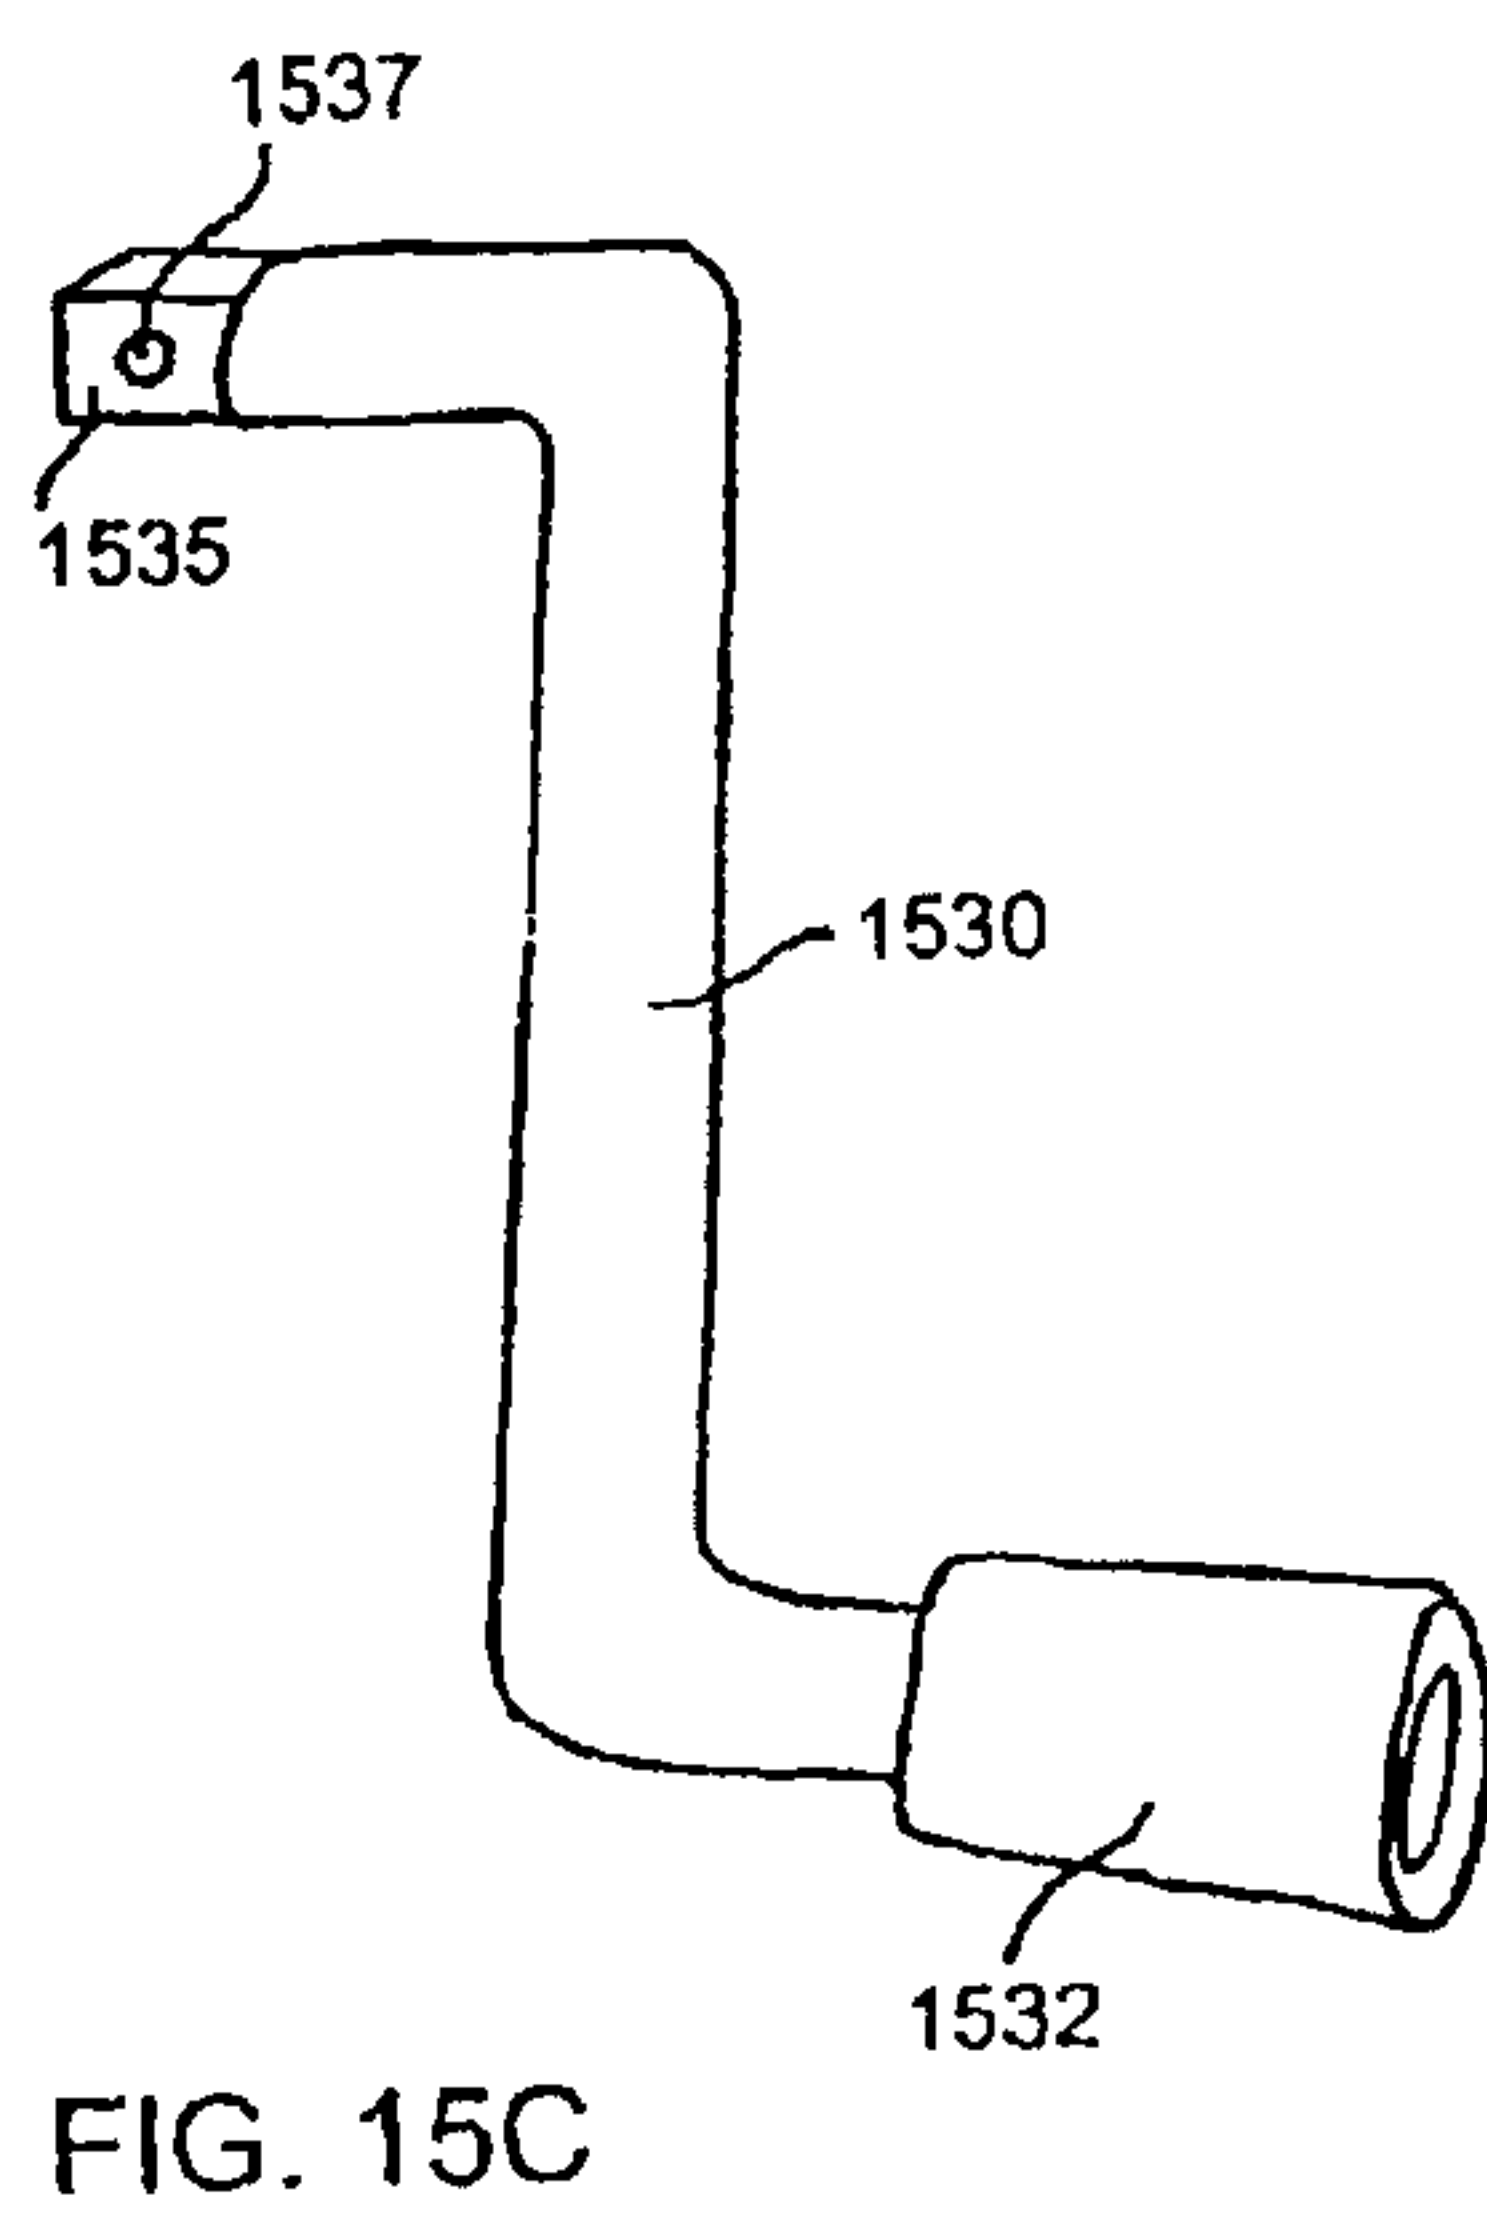
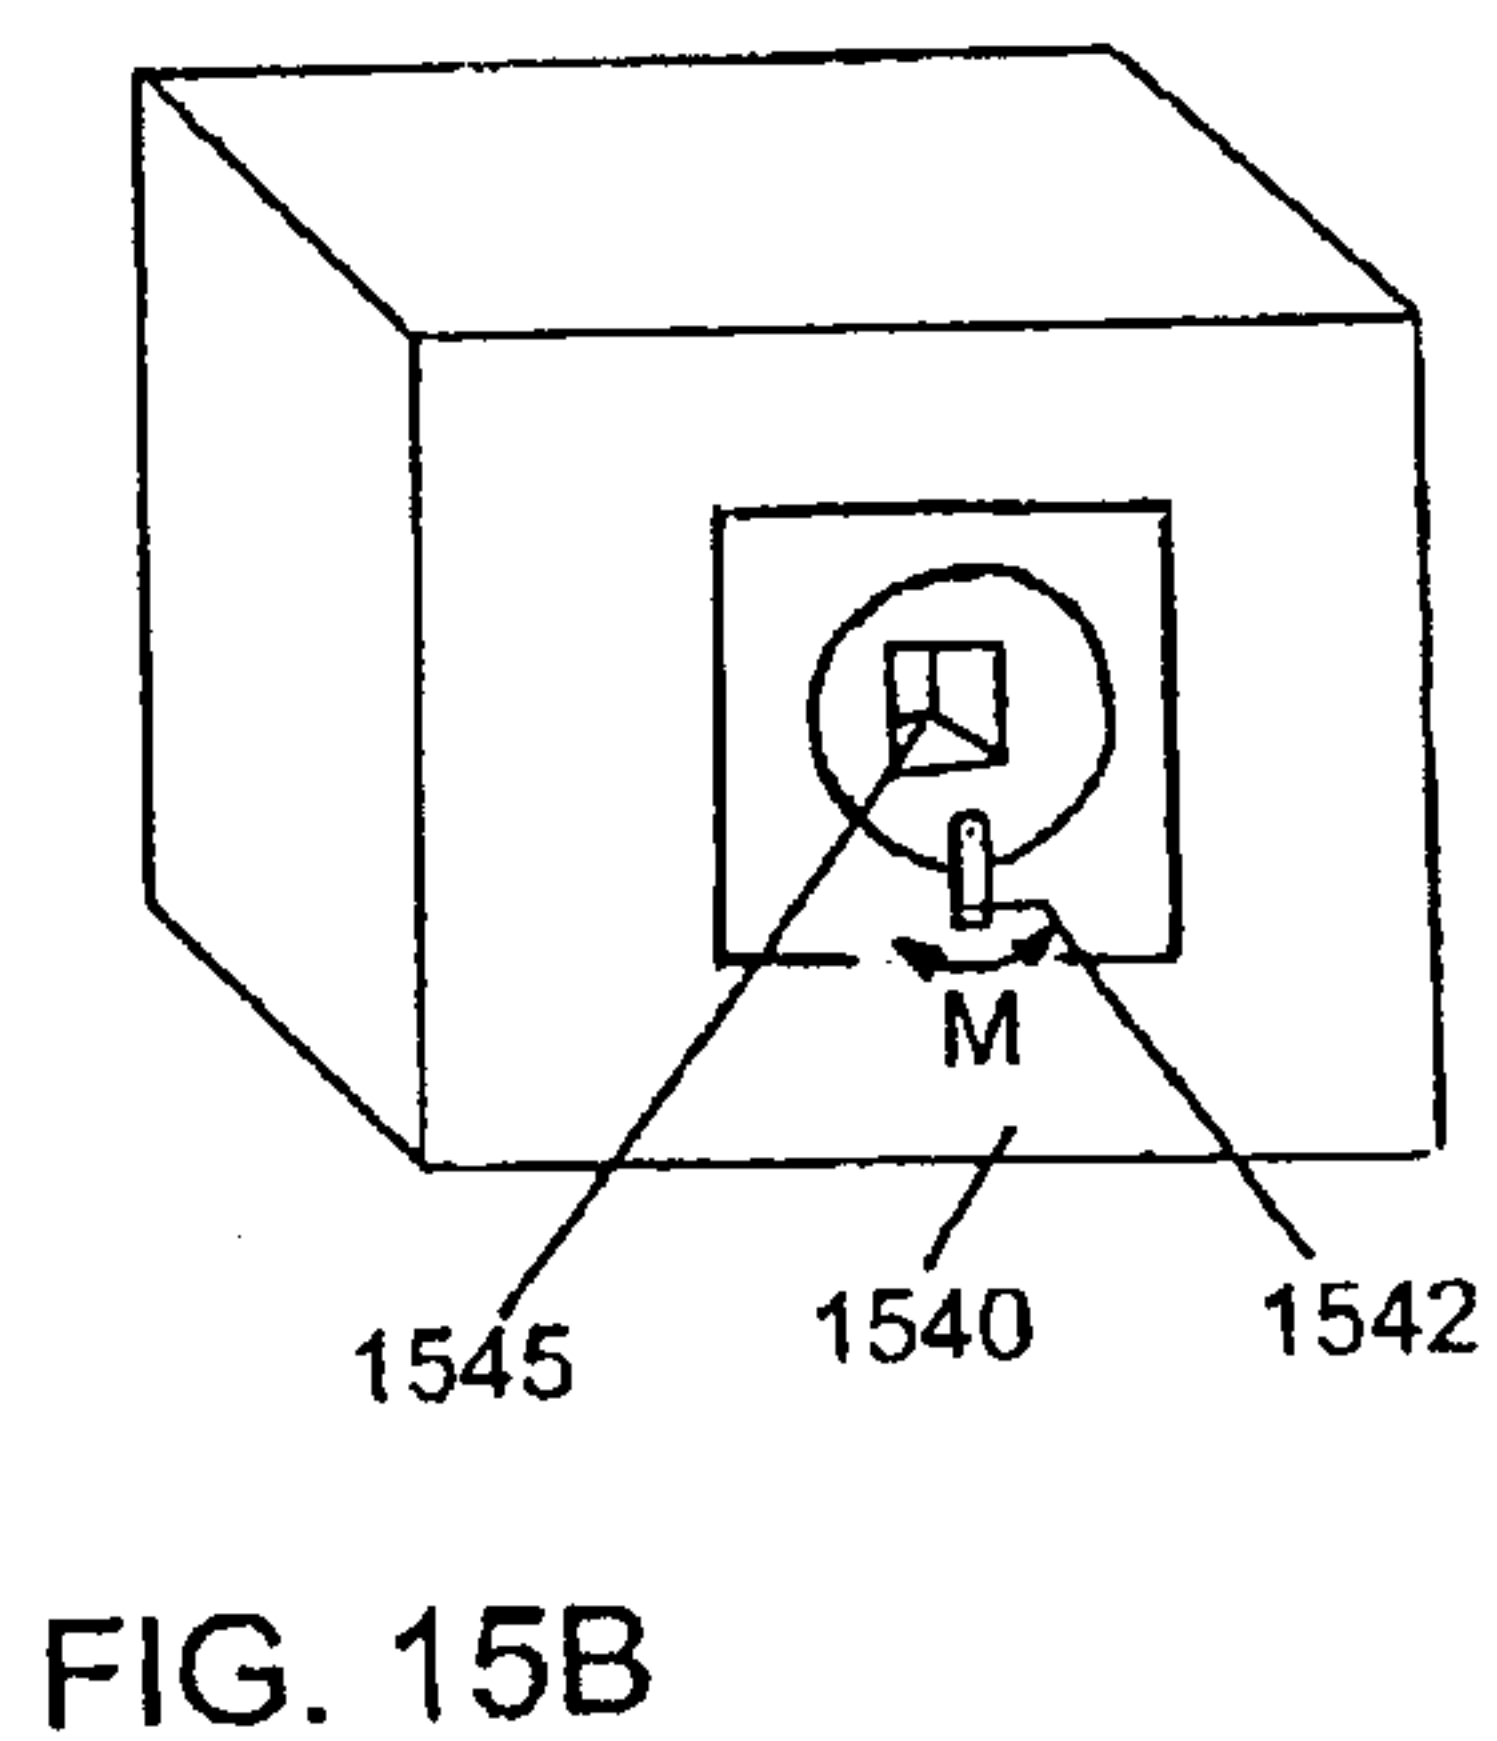
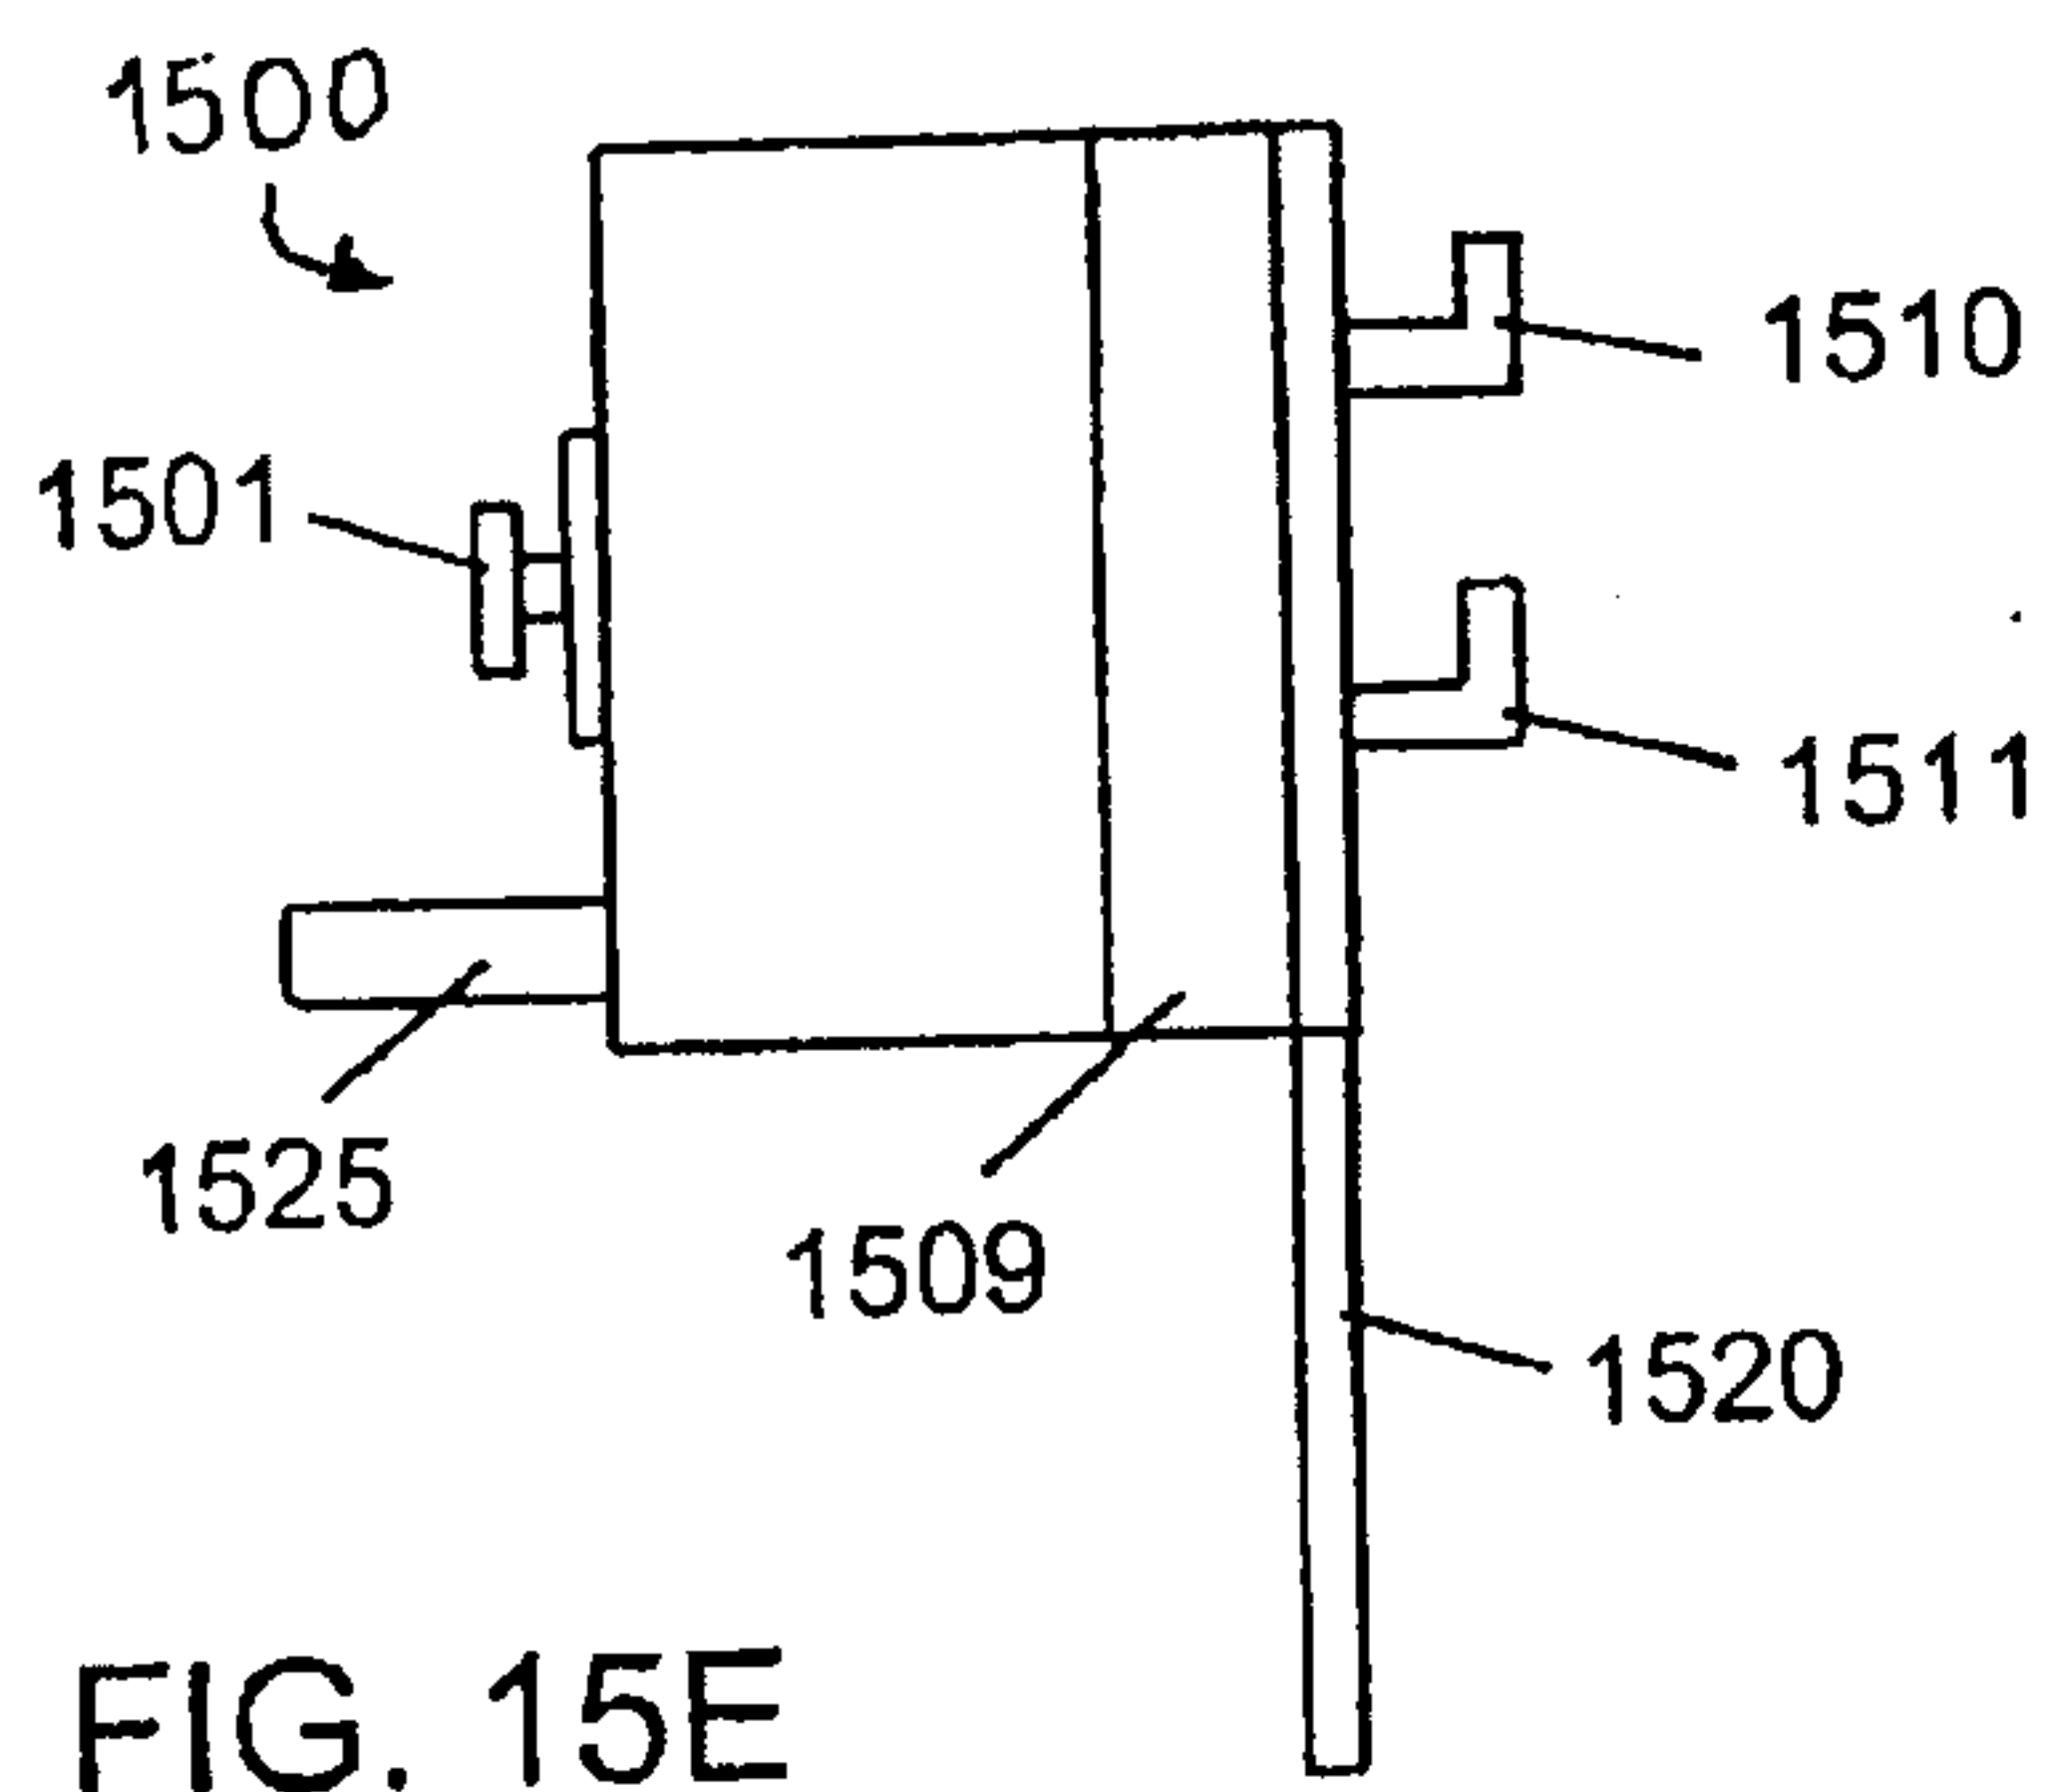
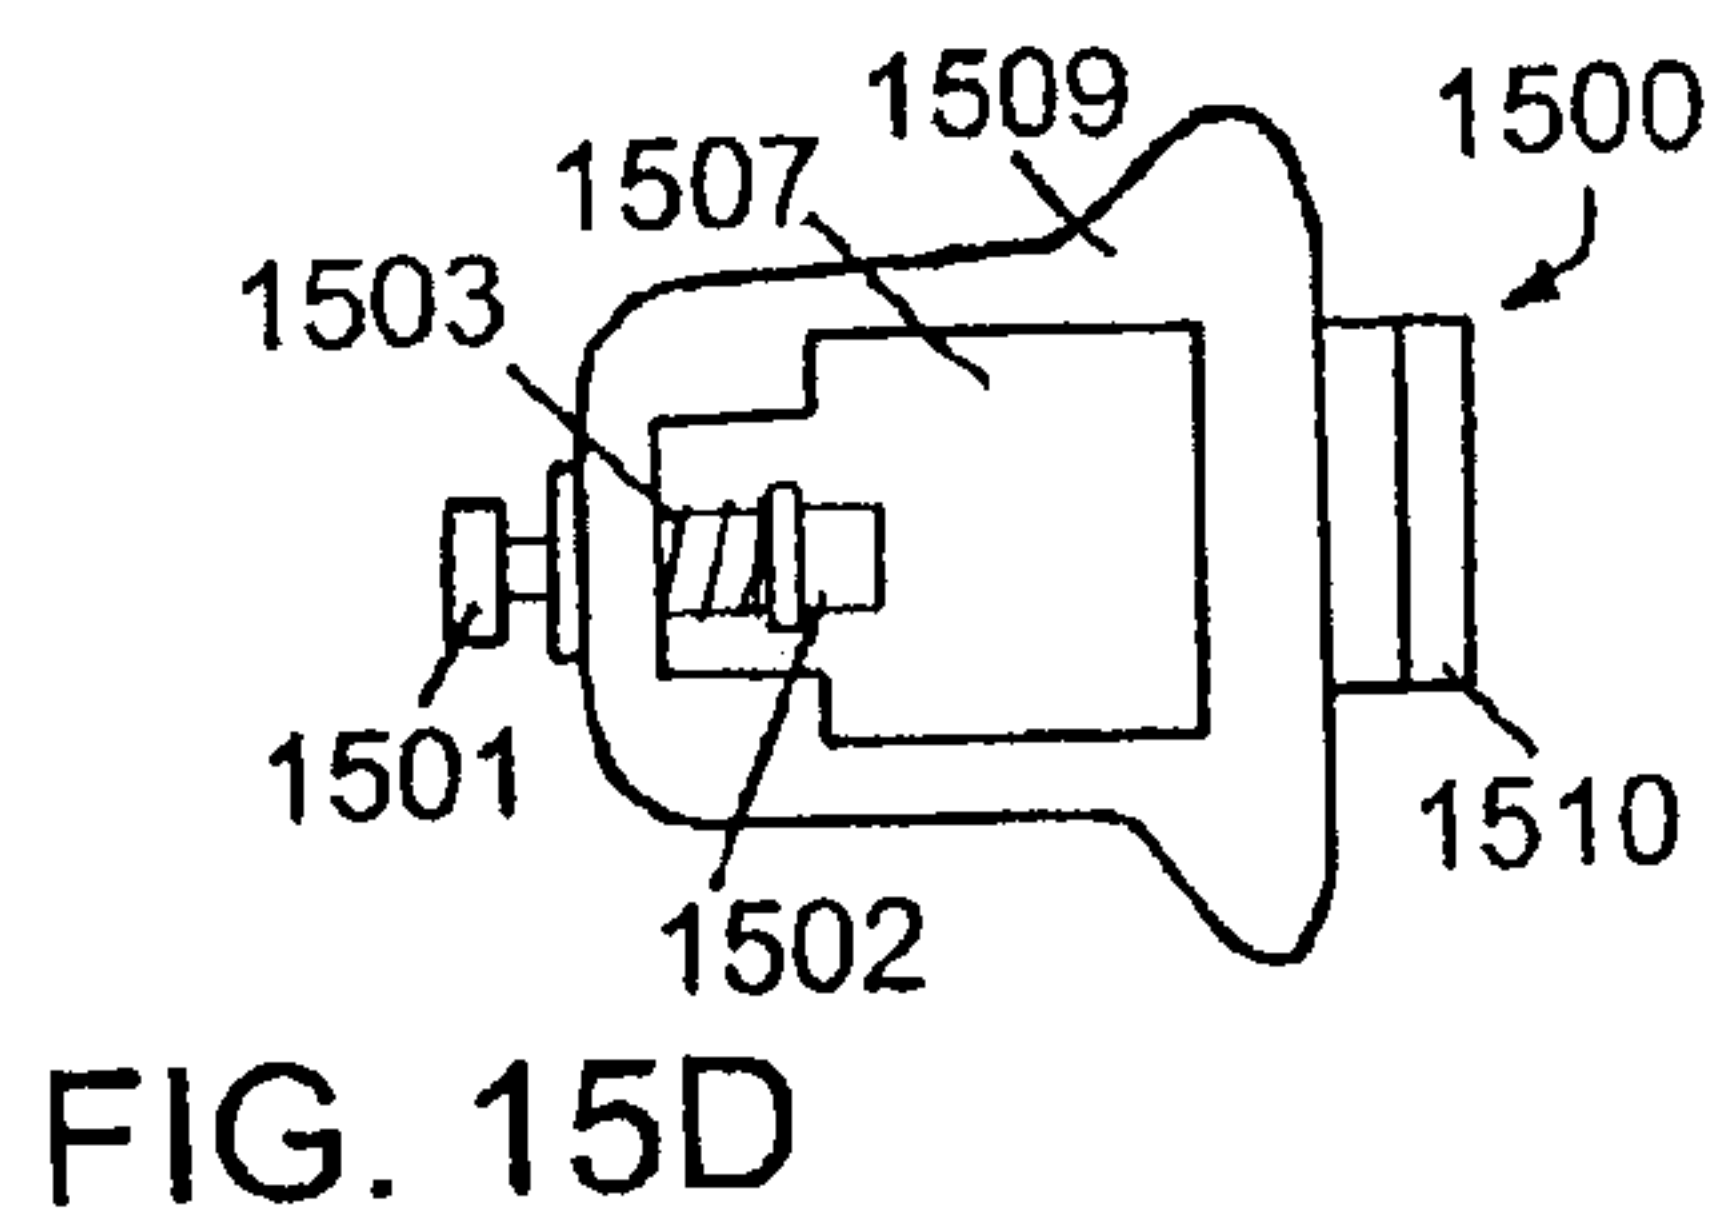


FIG. 14





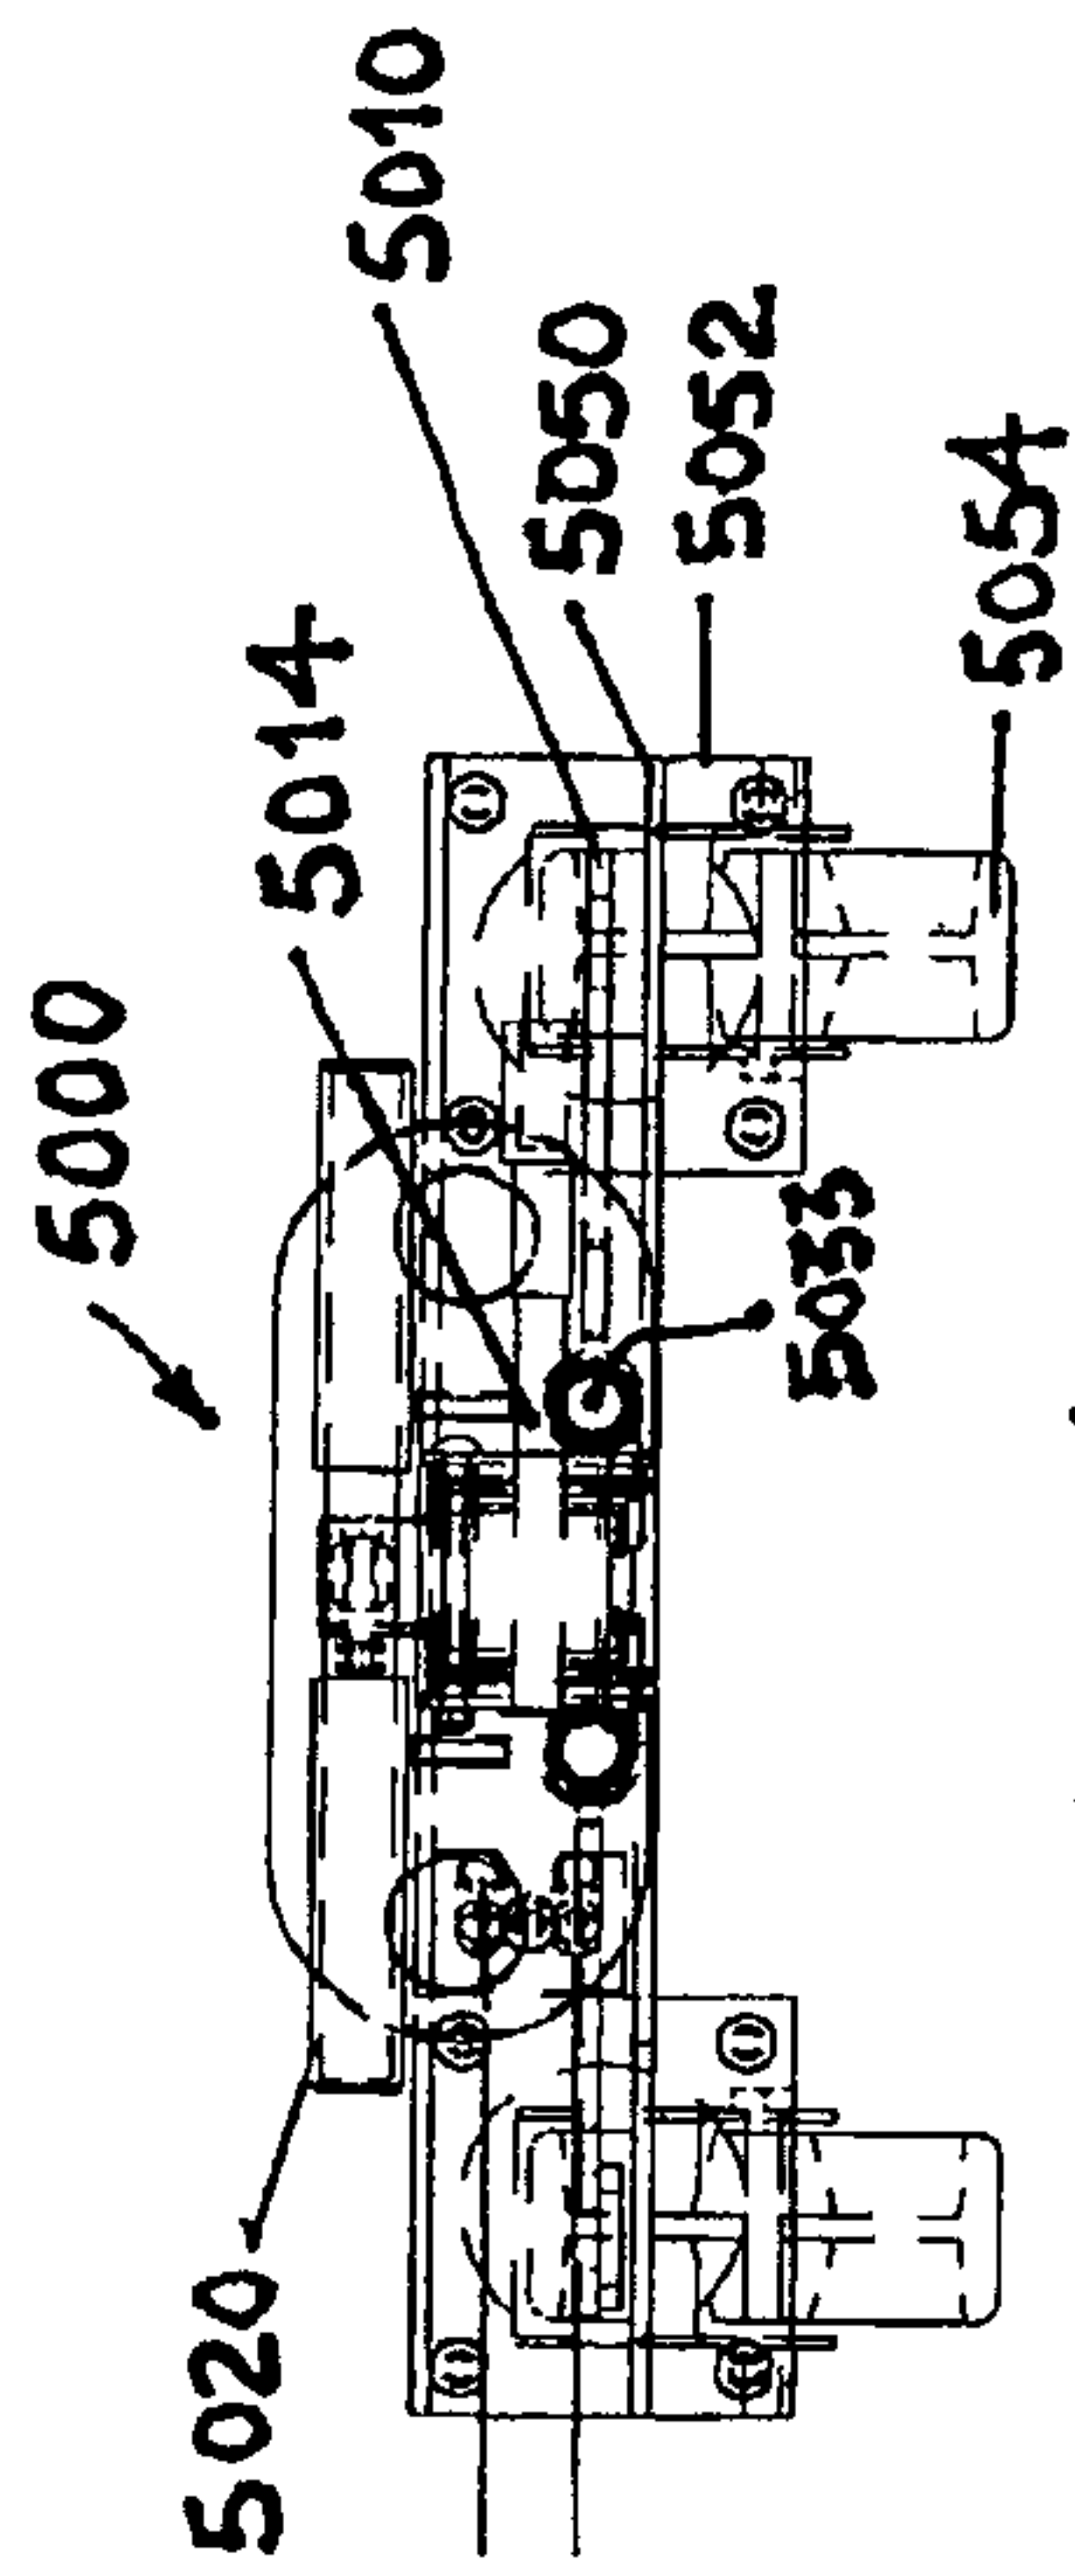


FIG. 18A

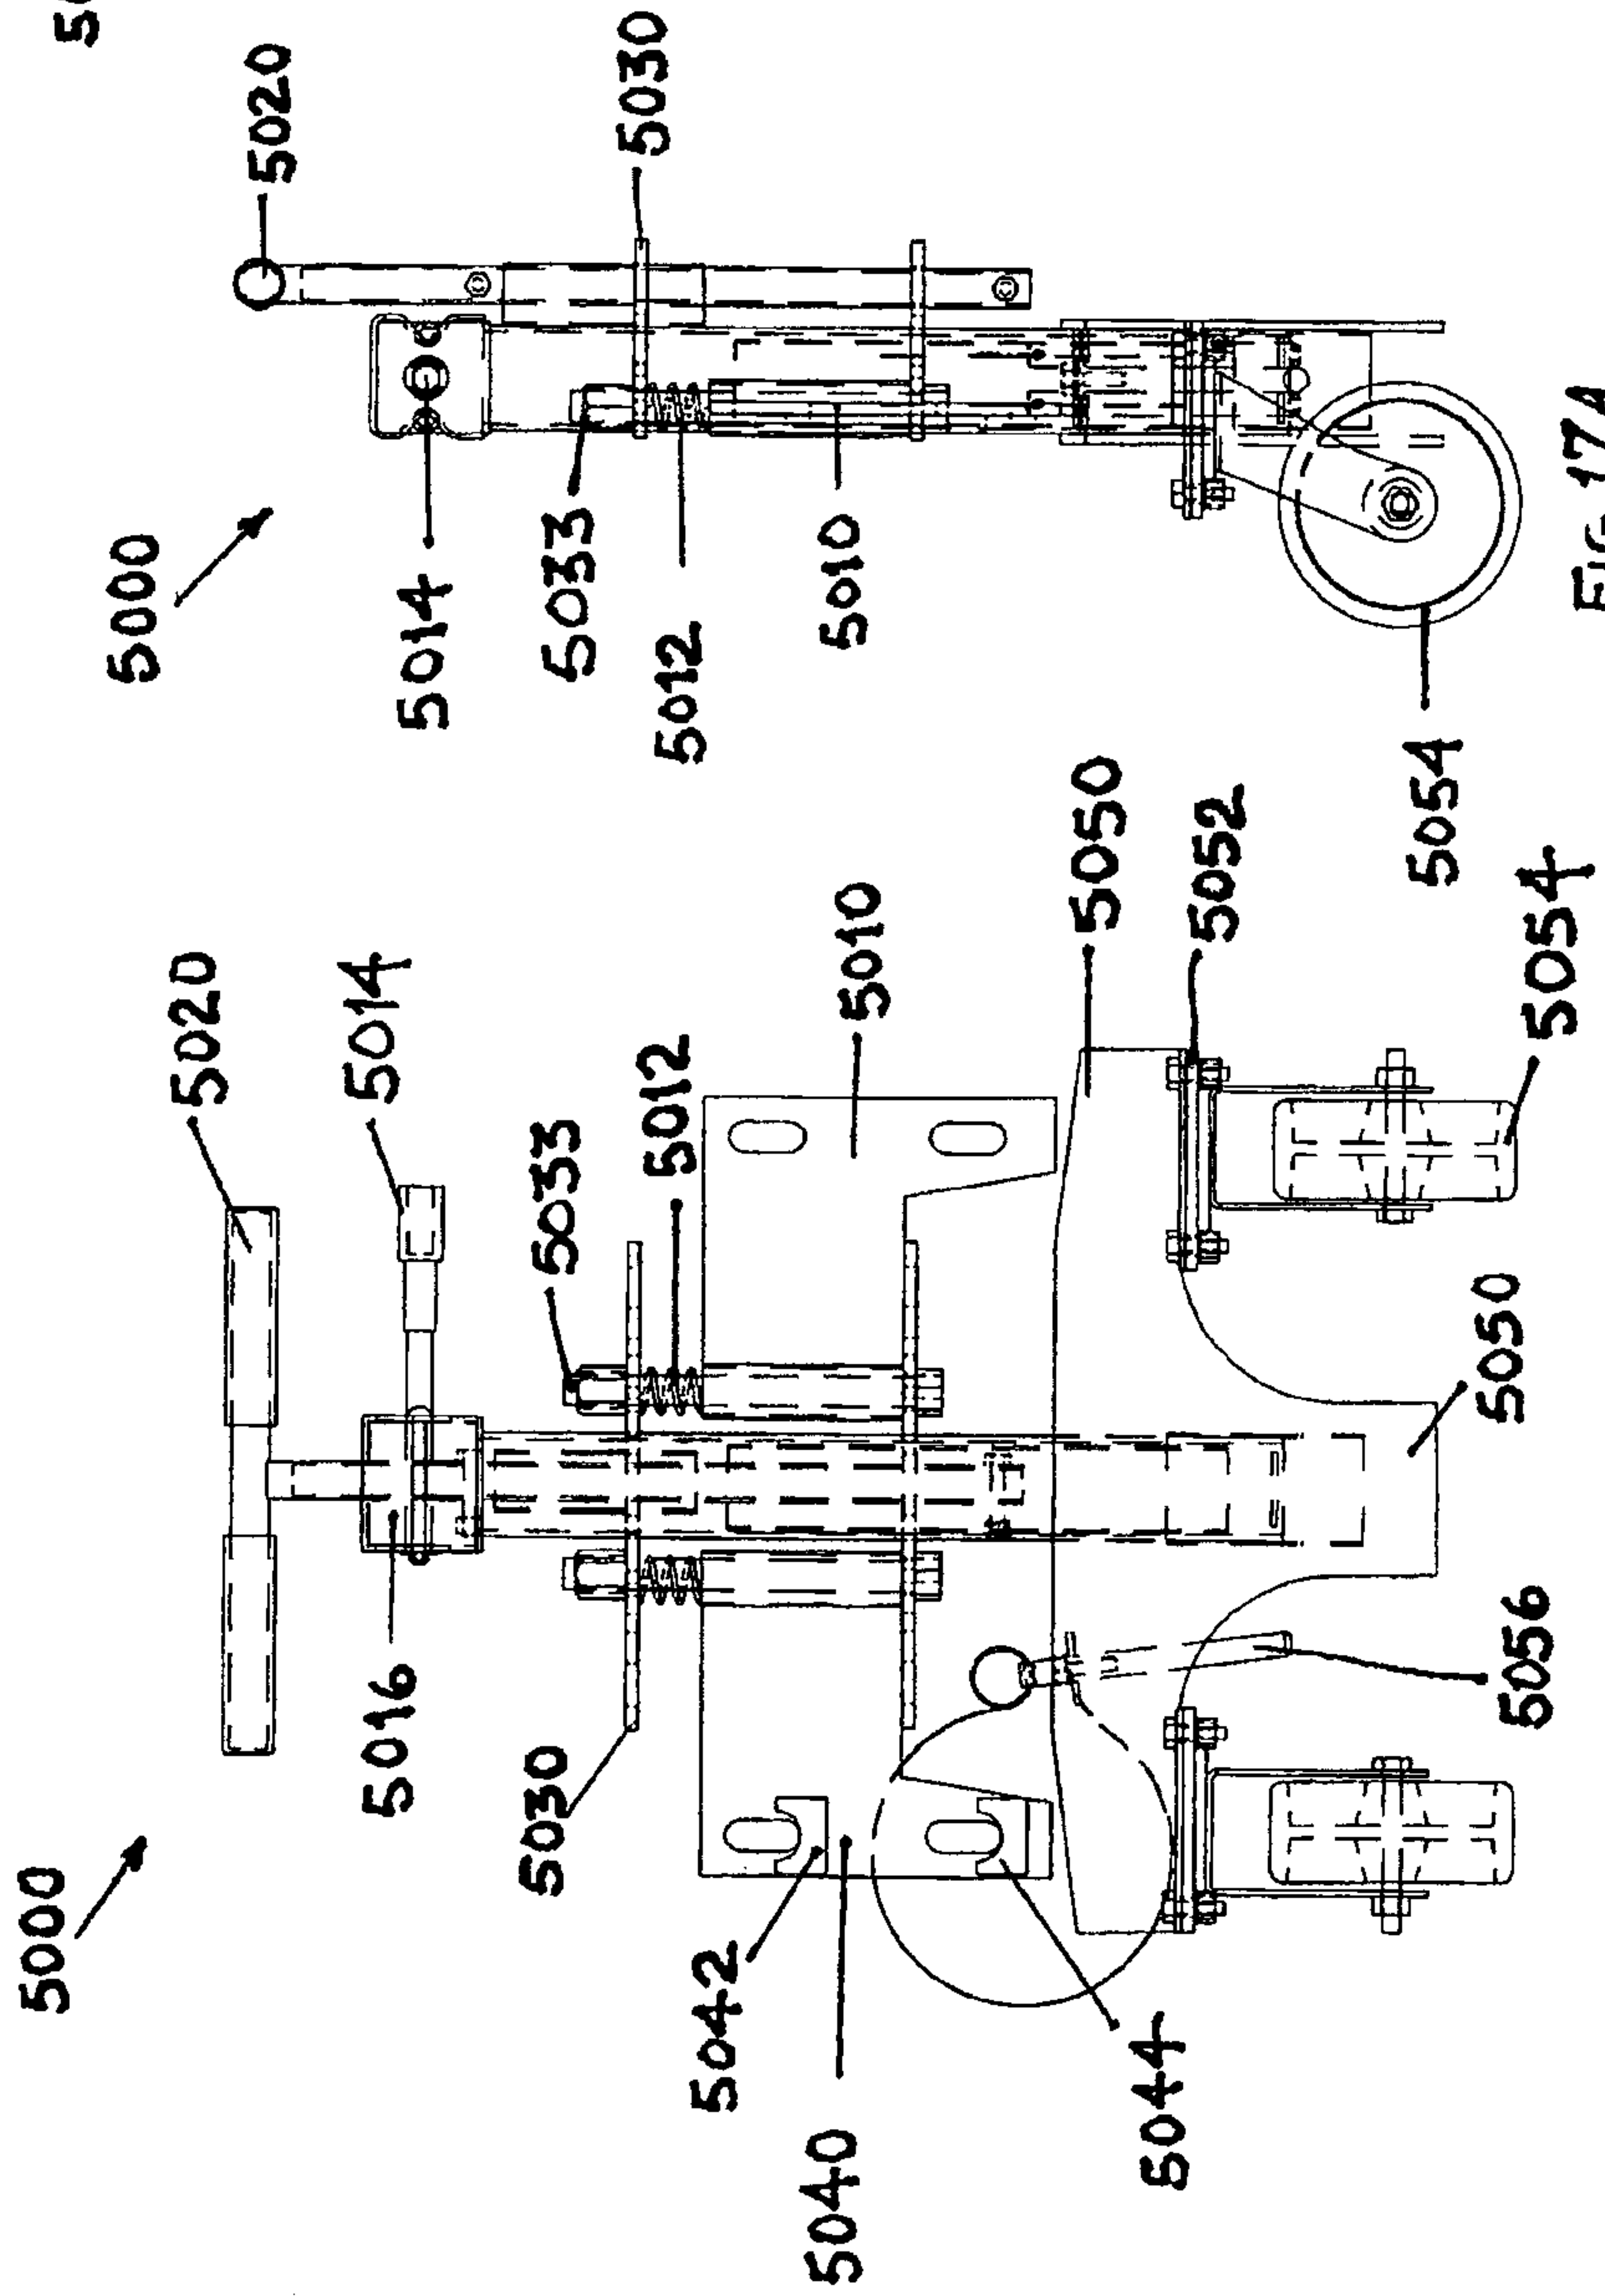


FIG. 16A

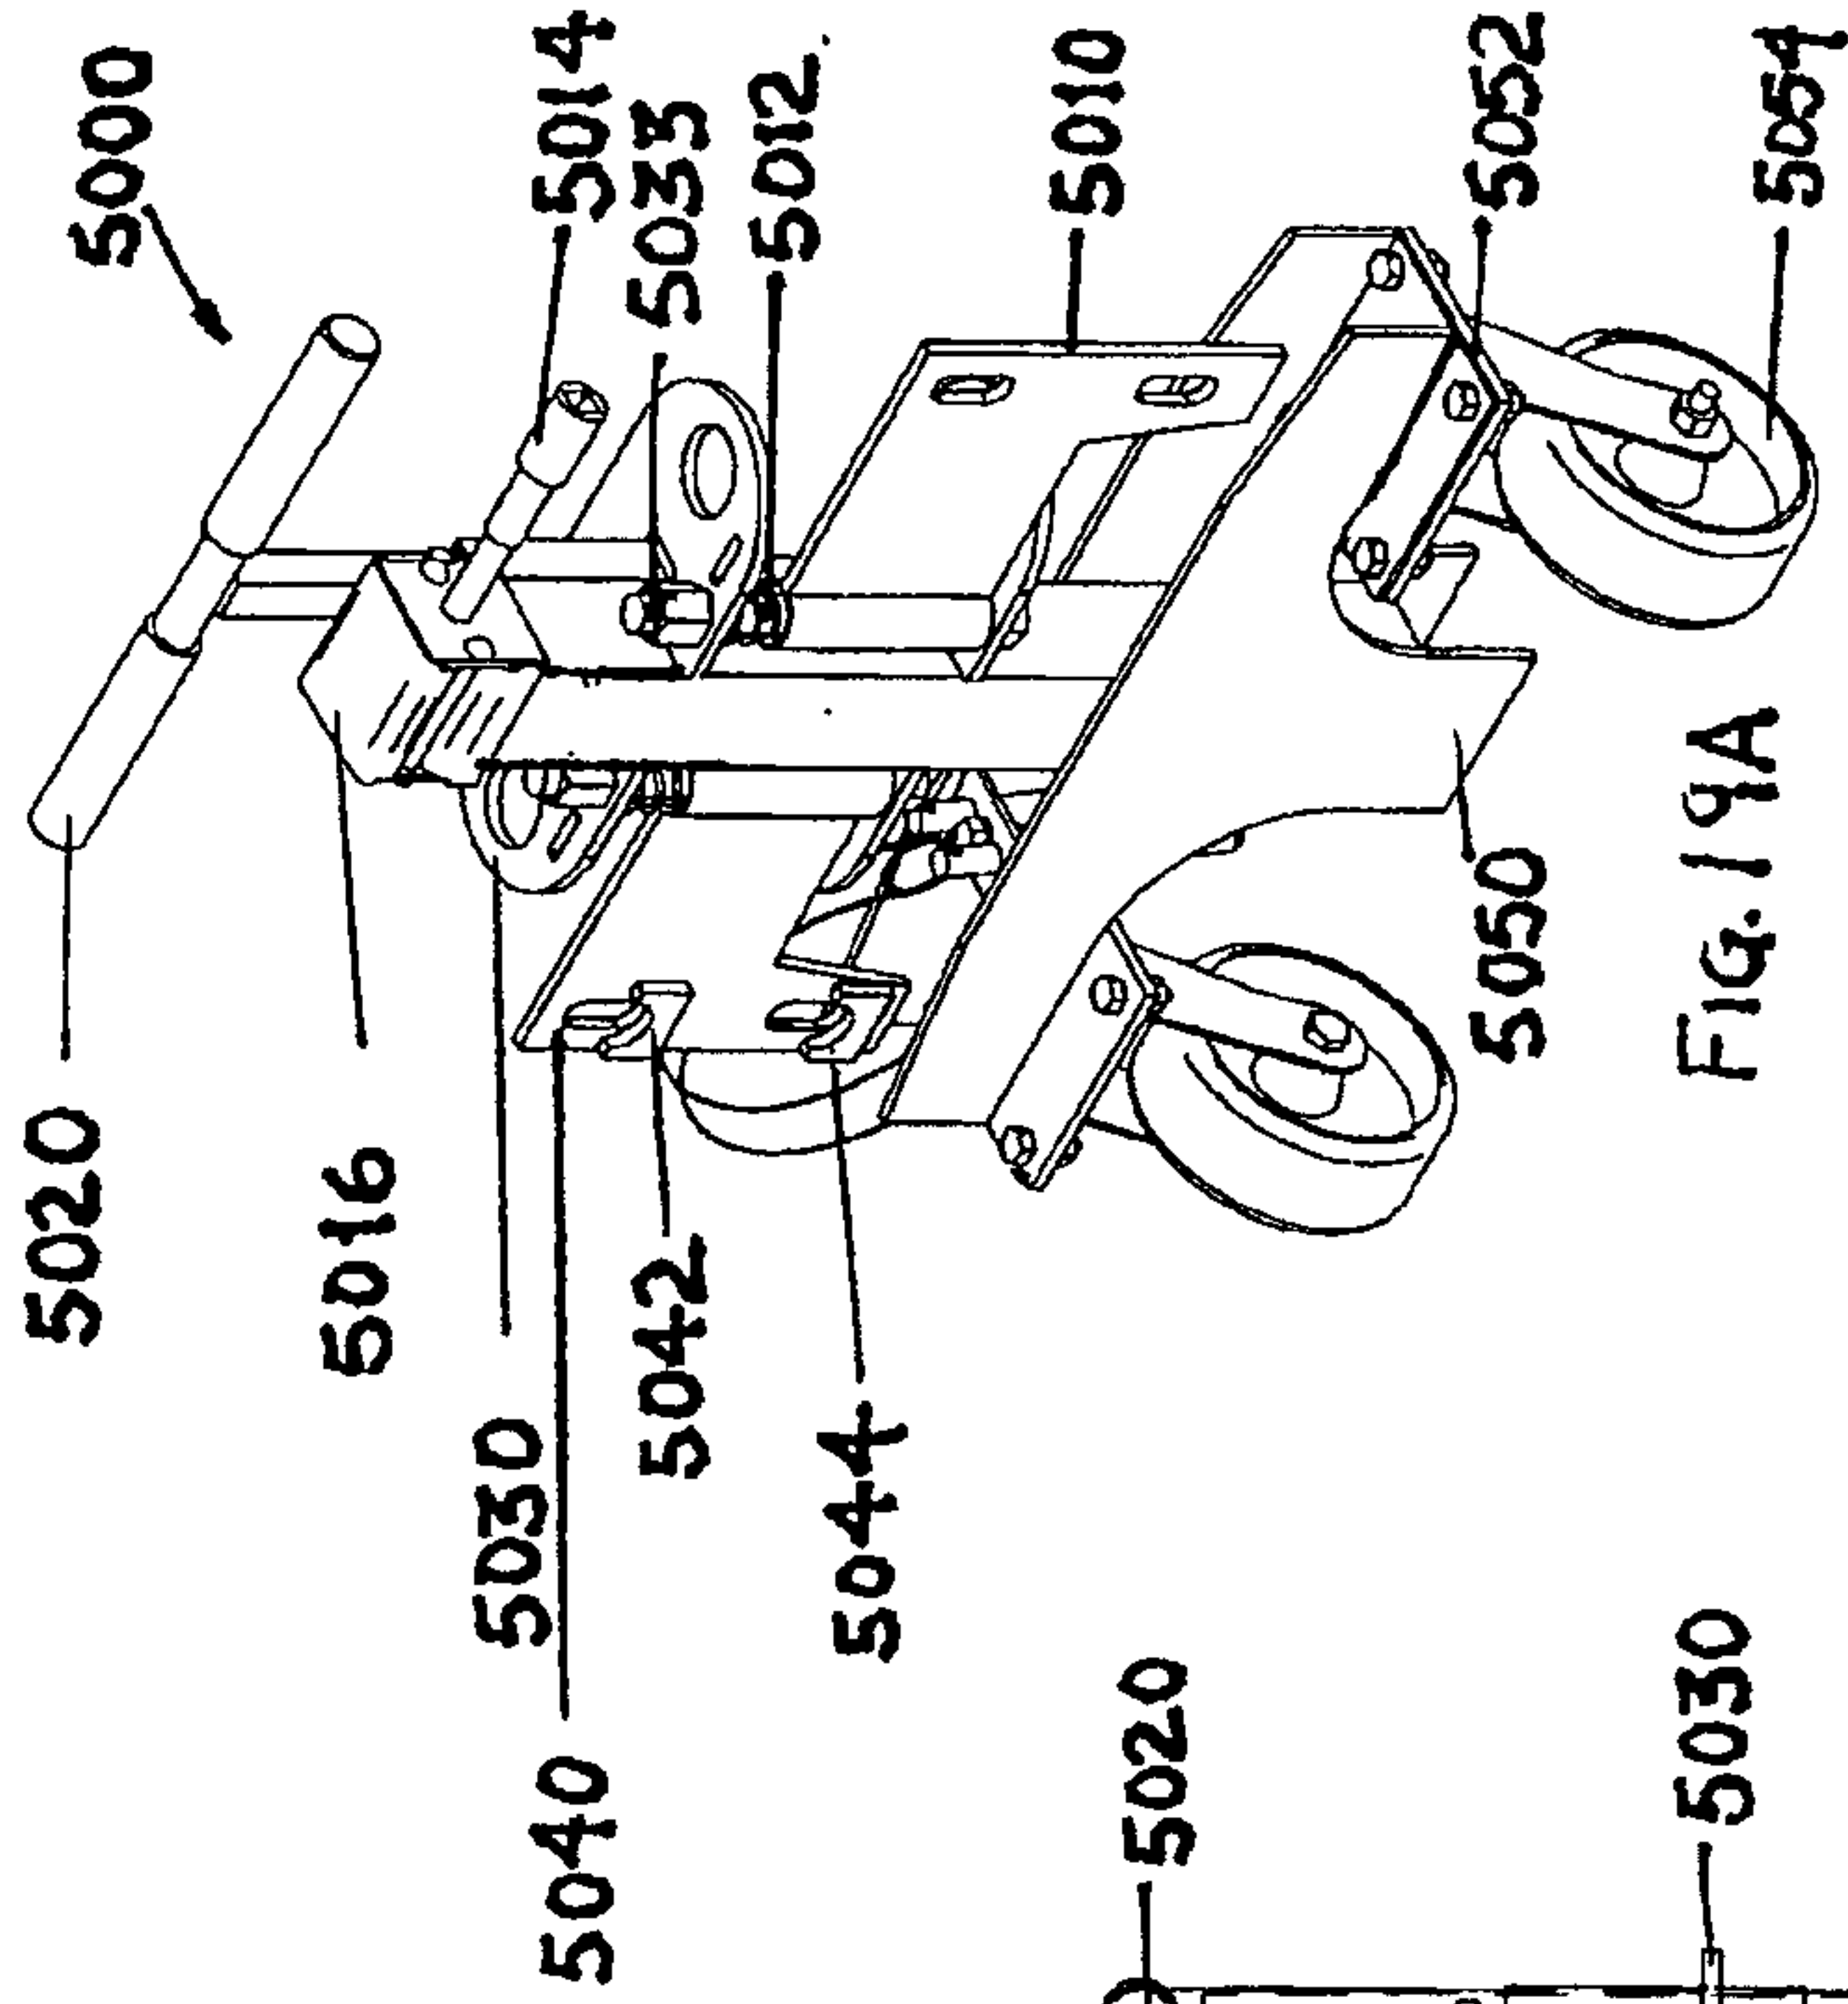


FIG. 19A

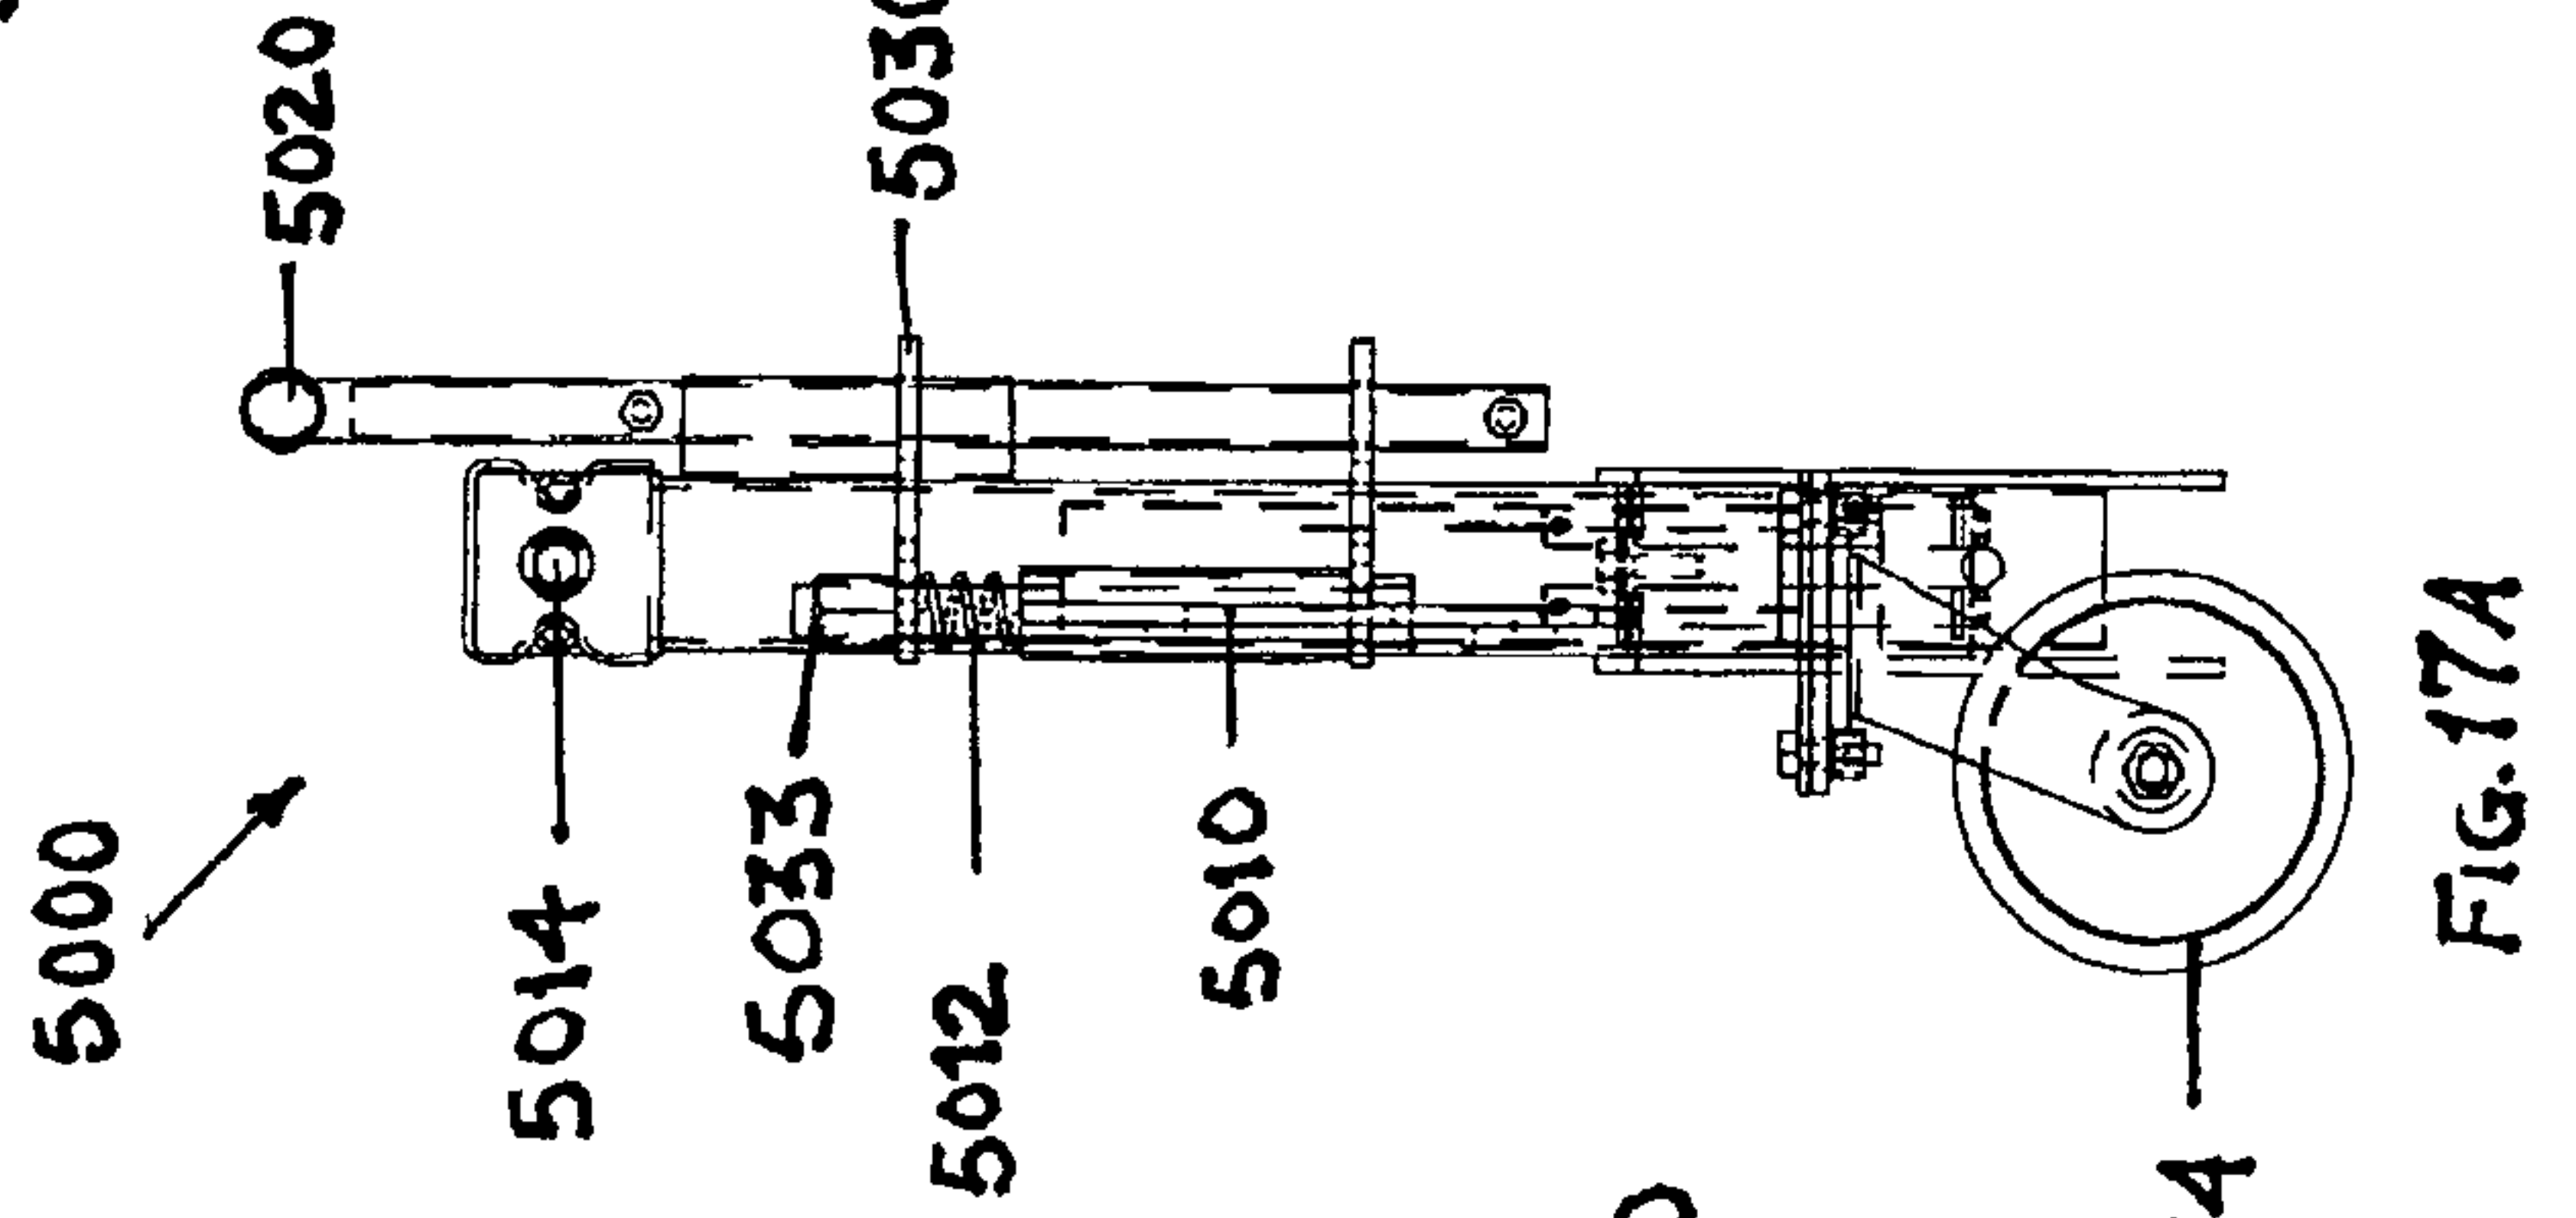


FIG. 17A

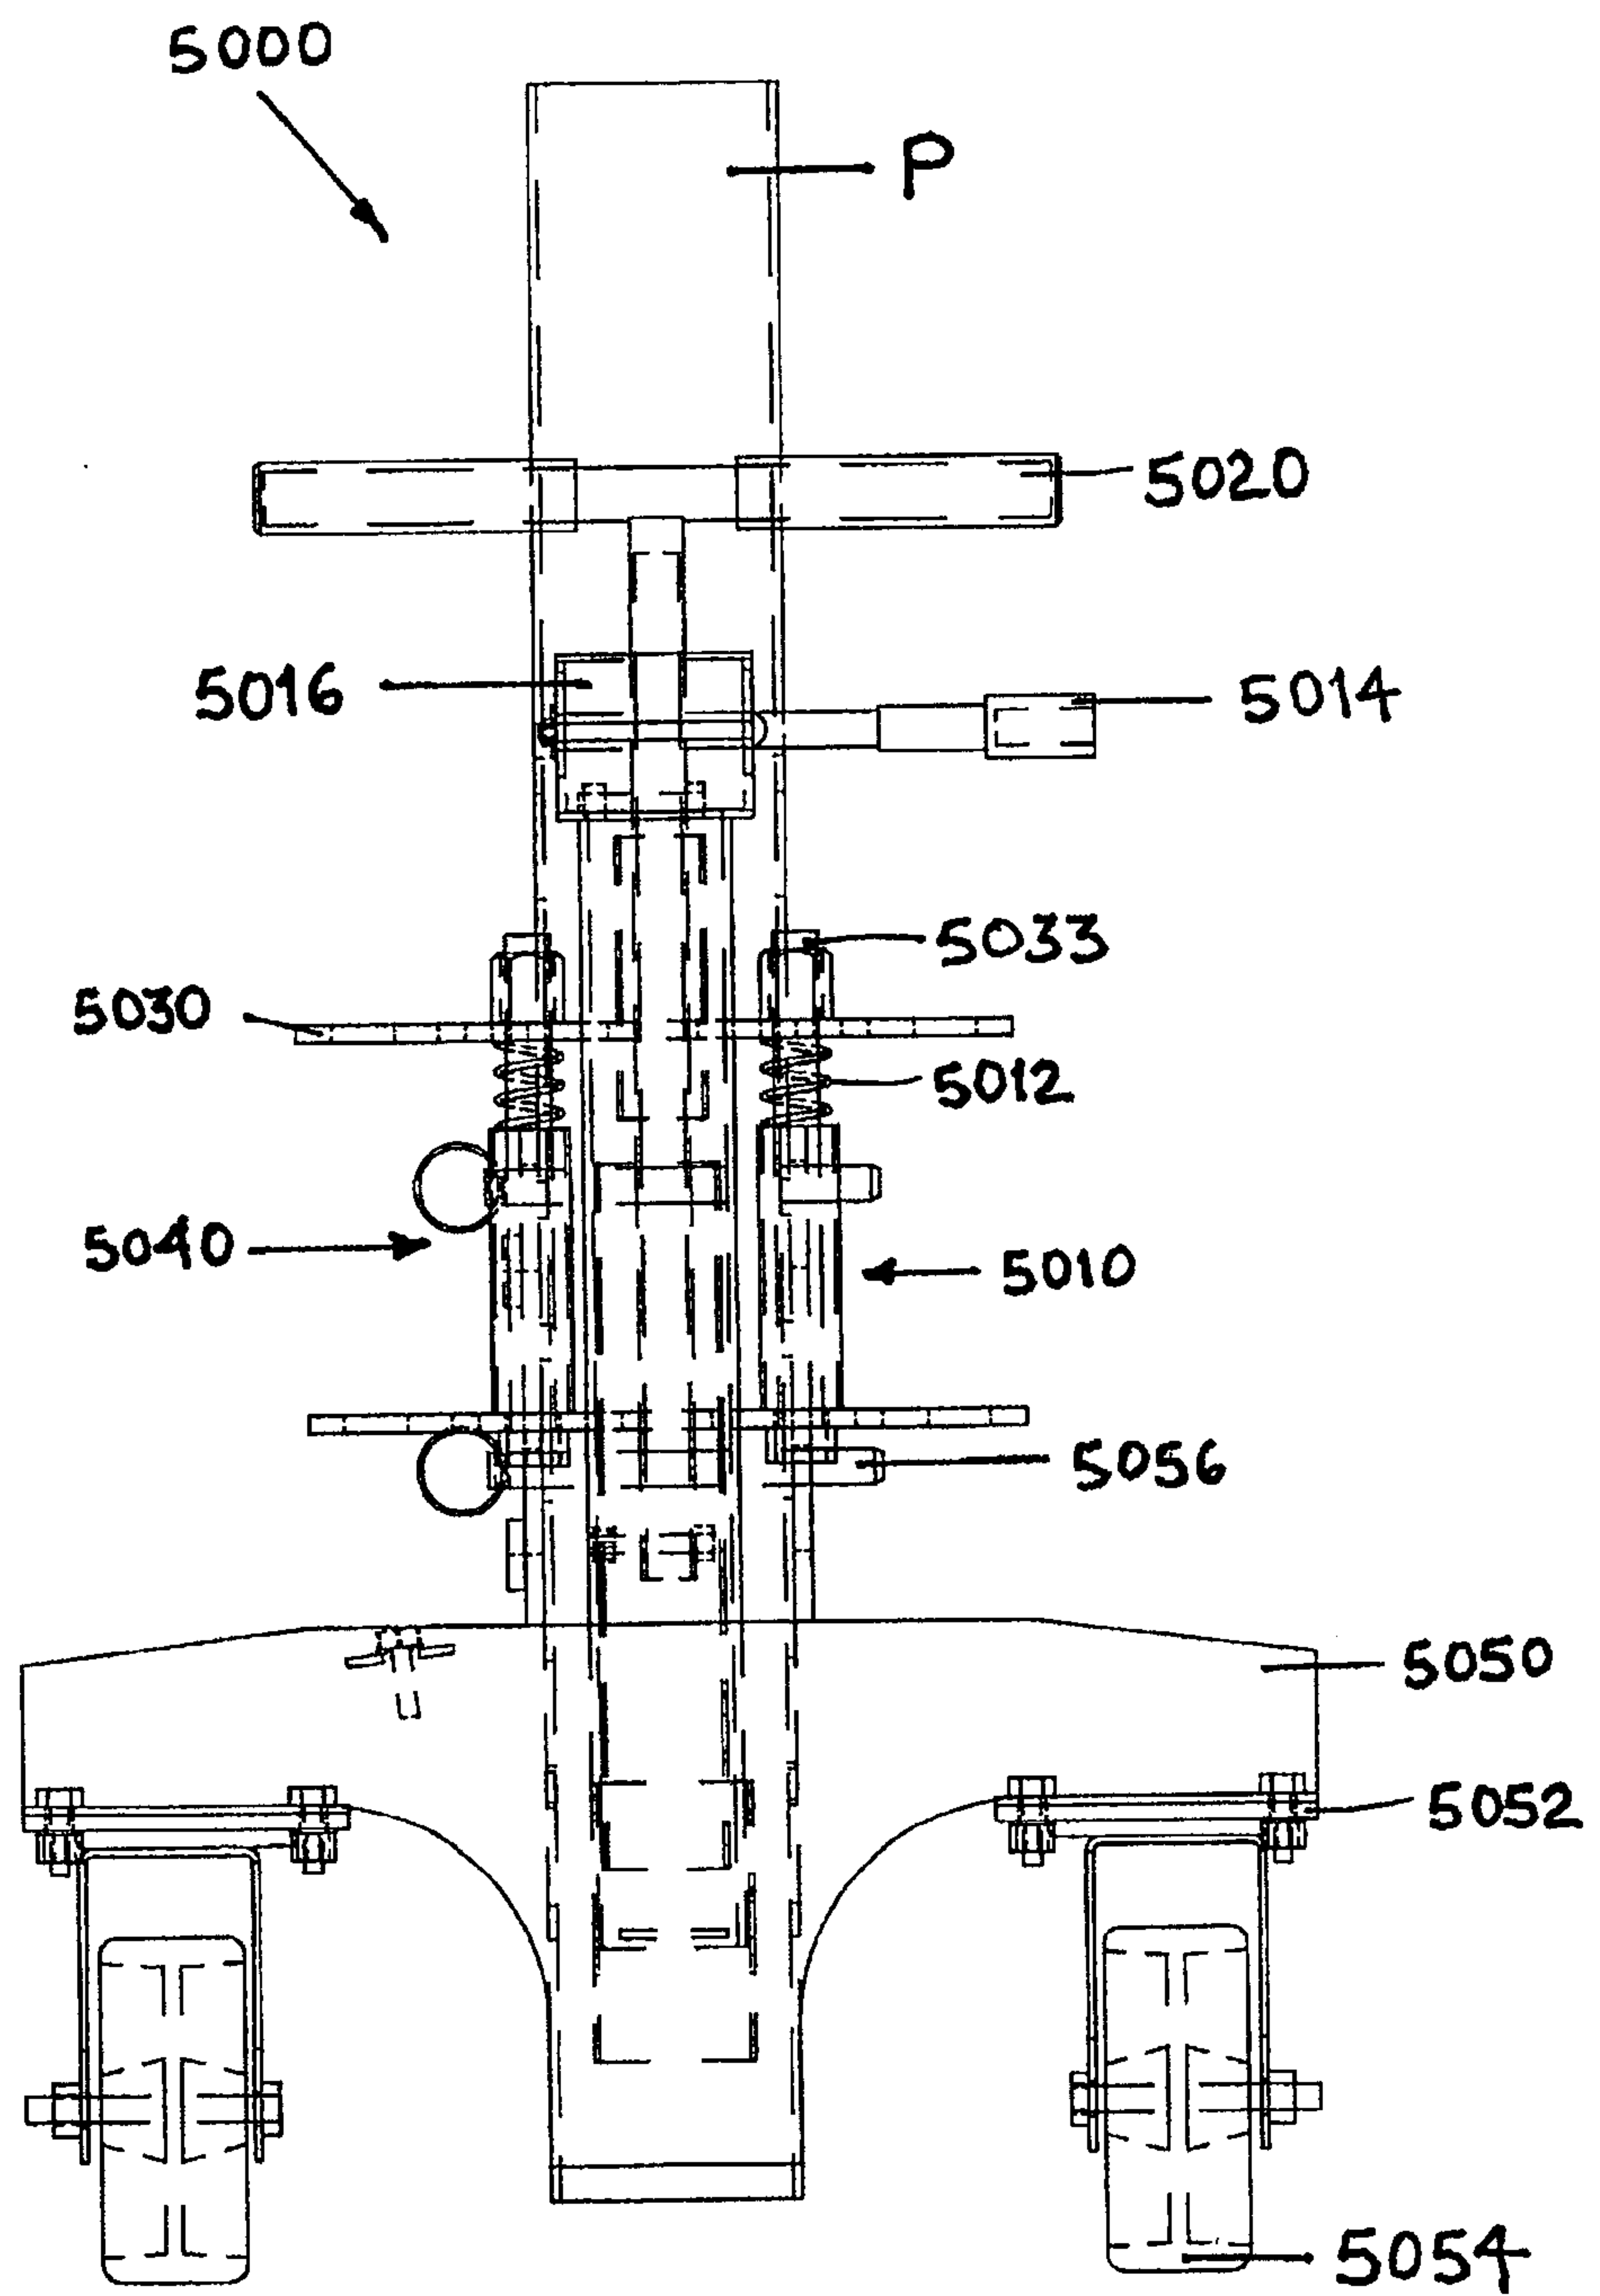


FIG. 16B



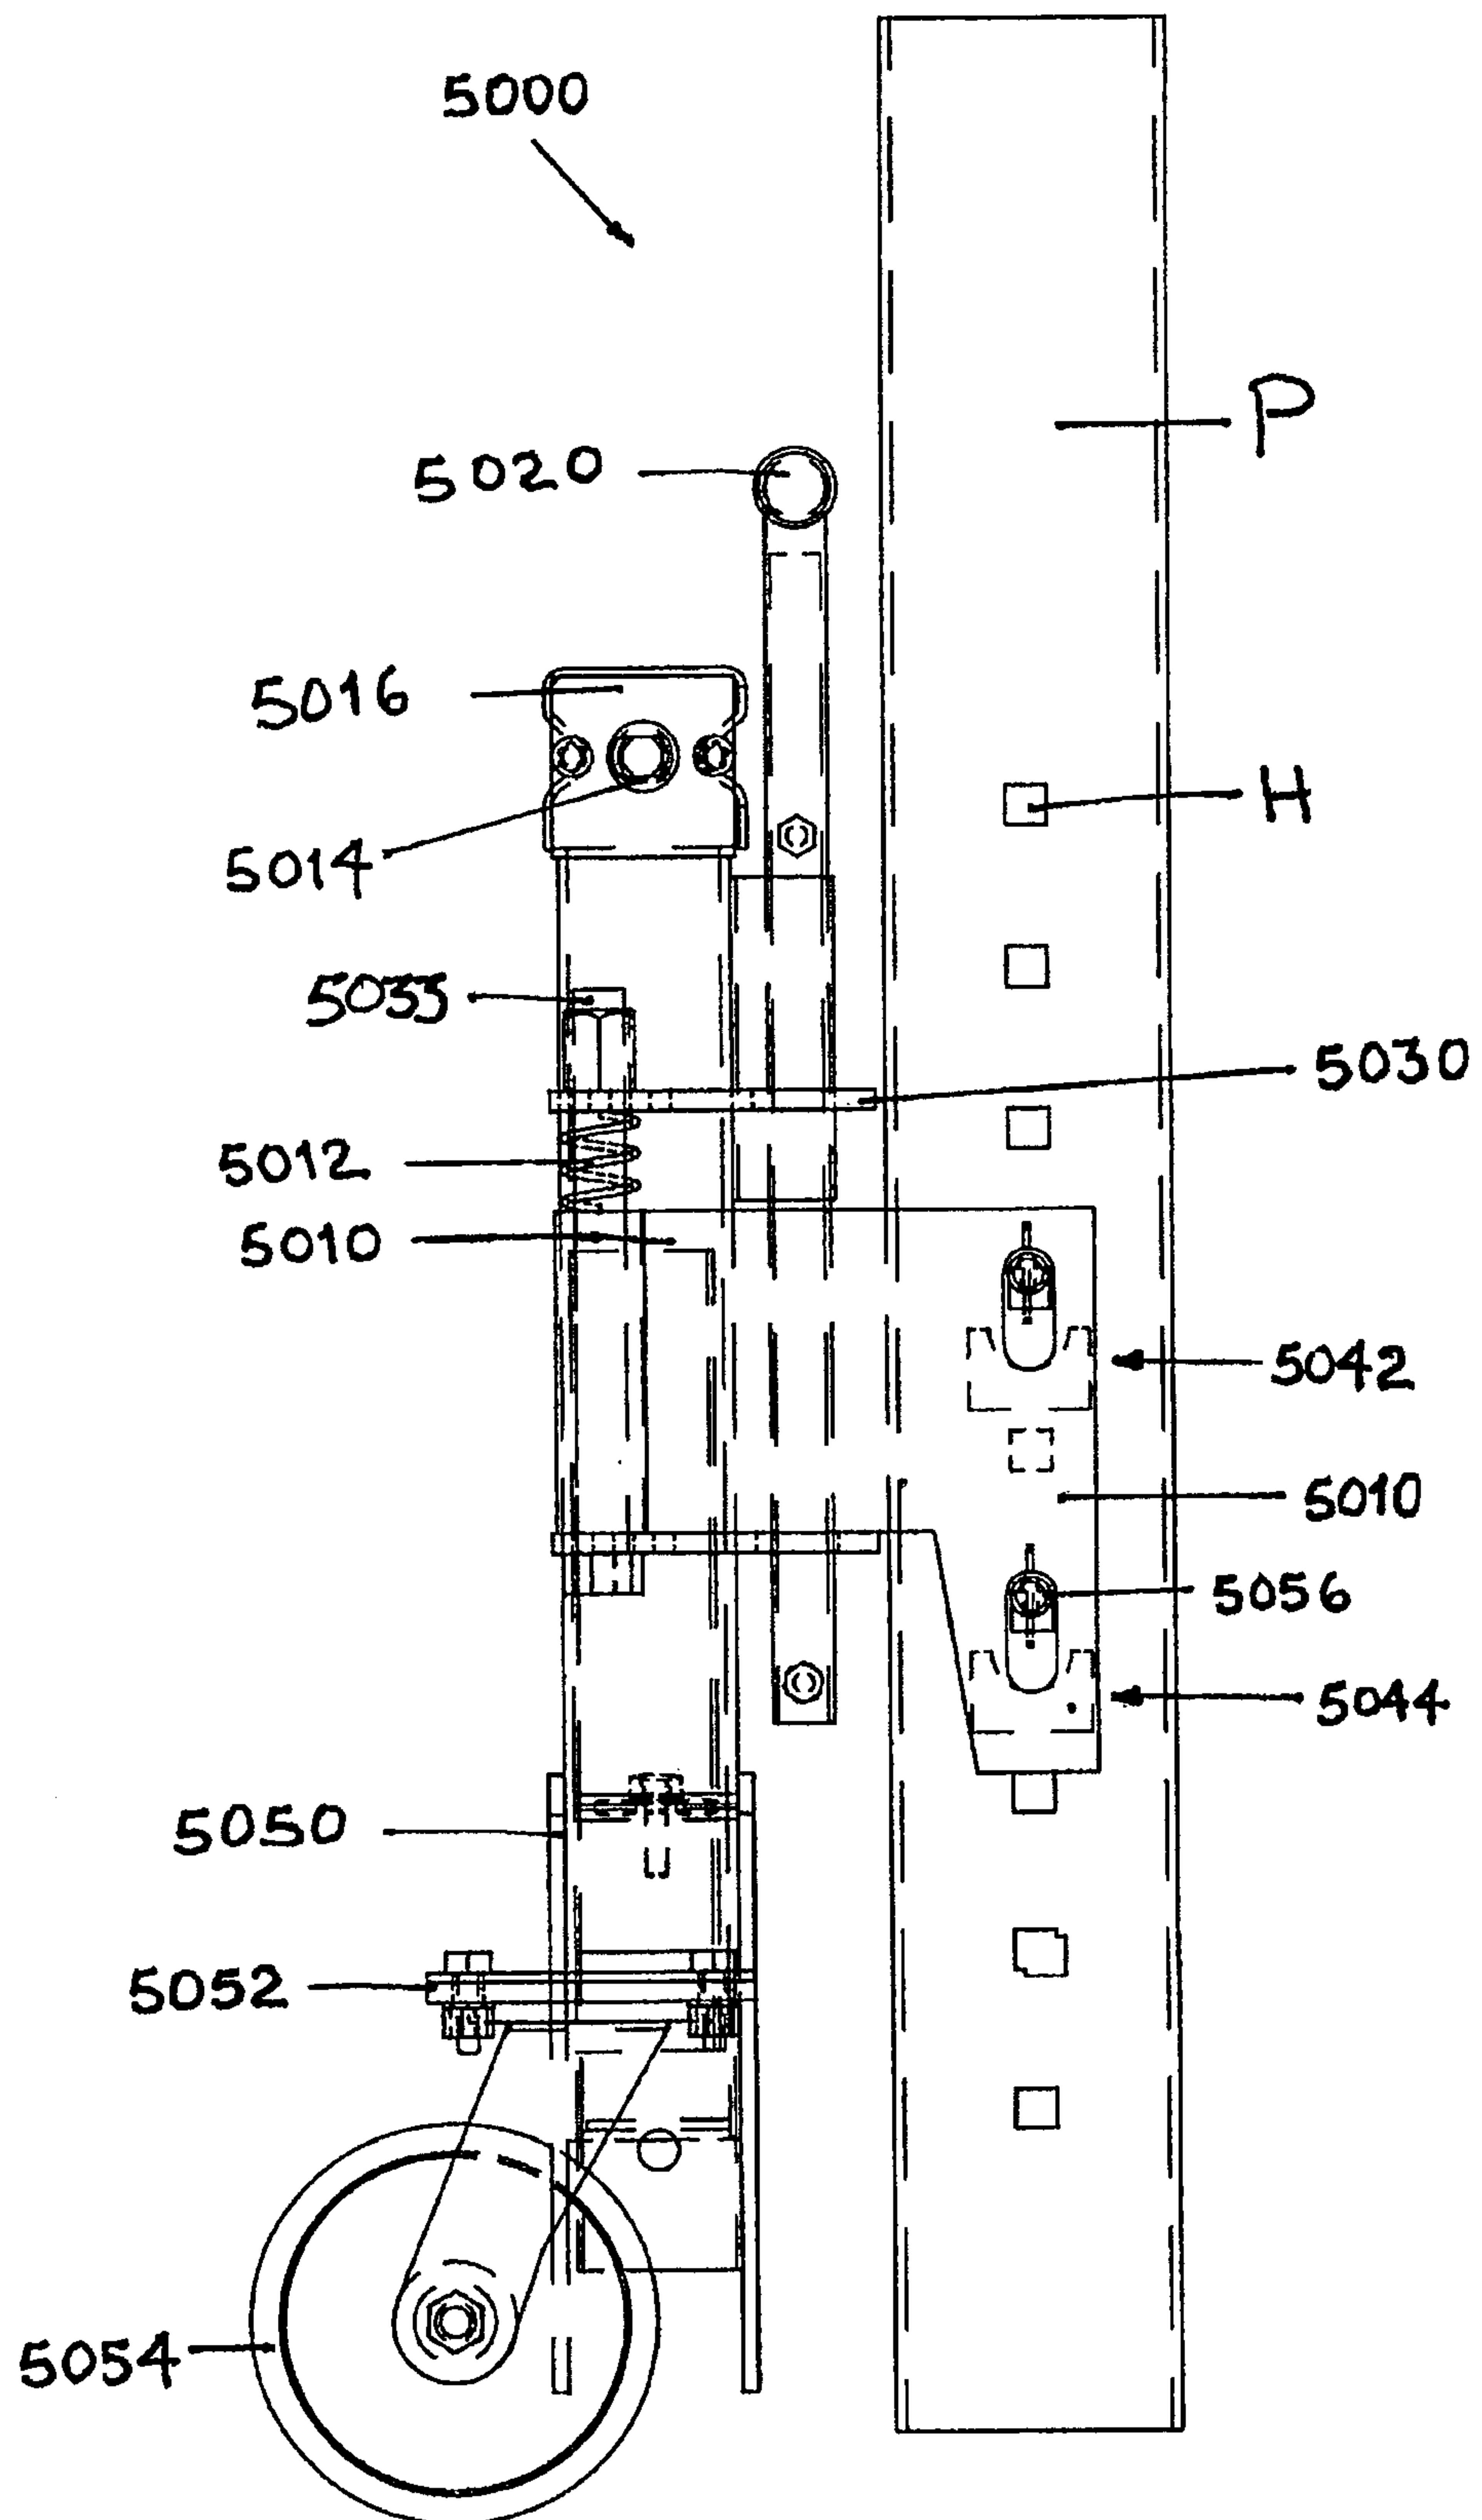


FIG. 17B

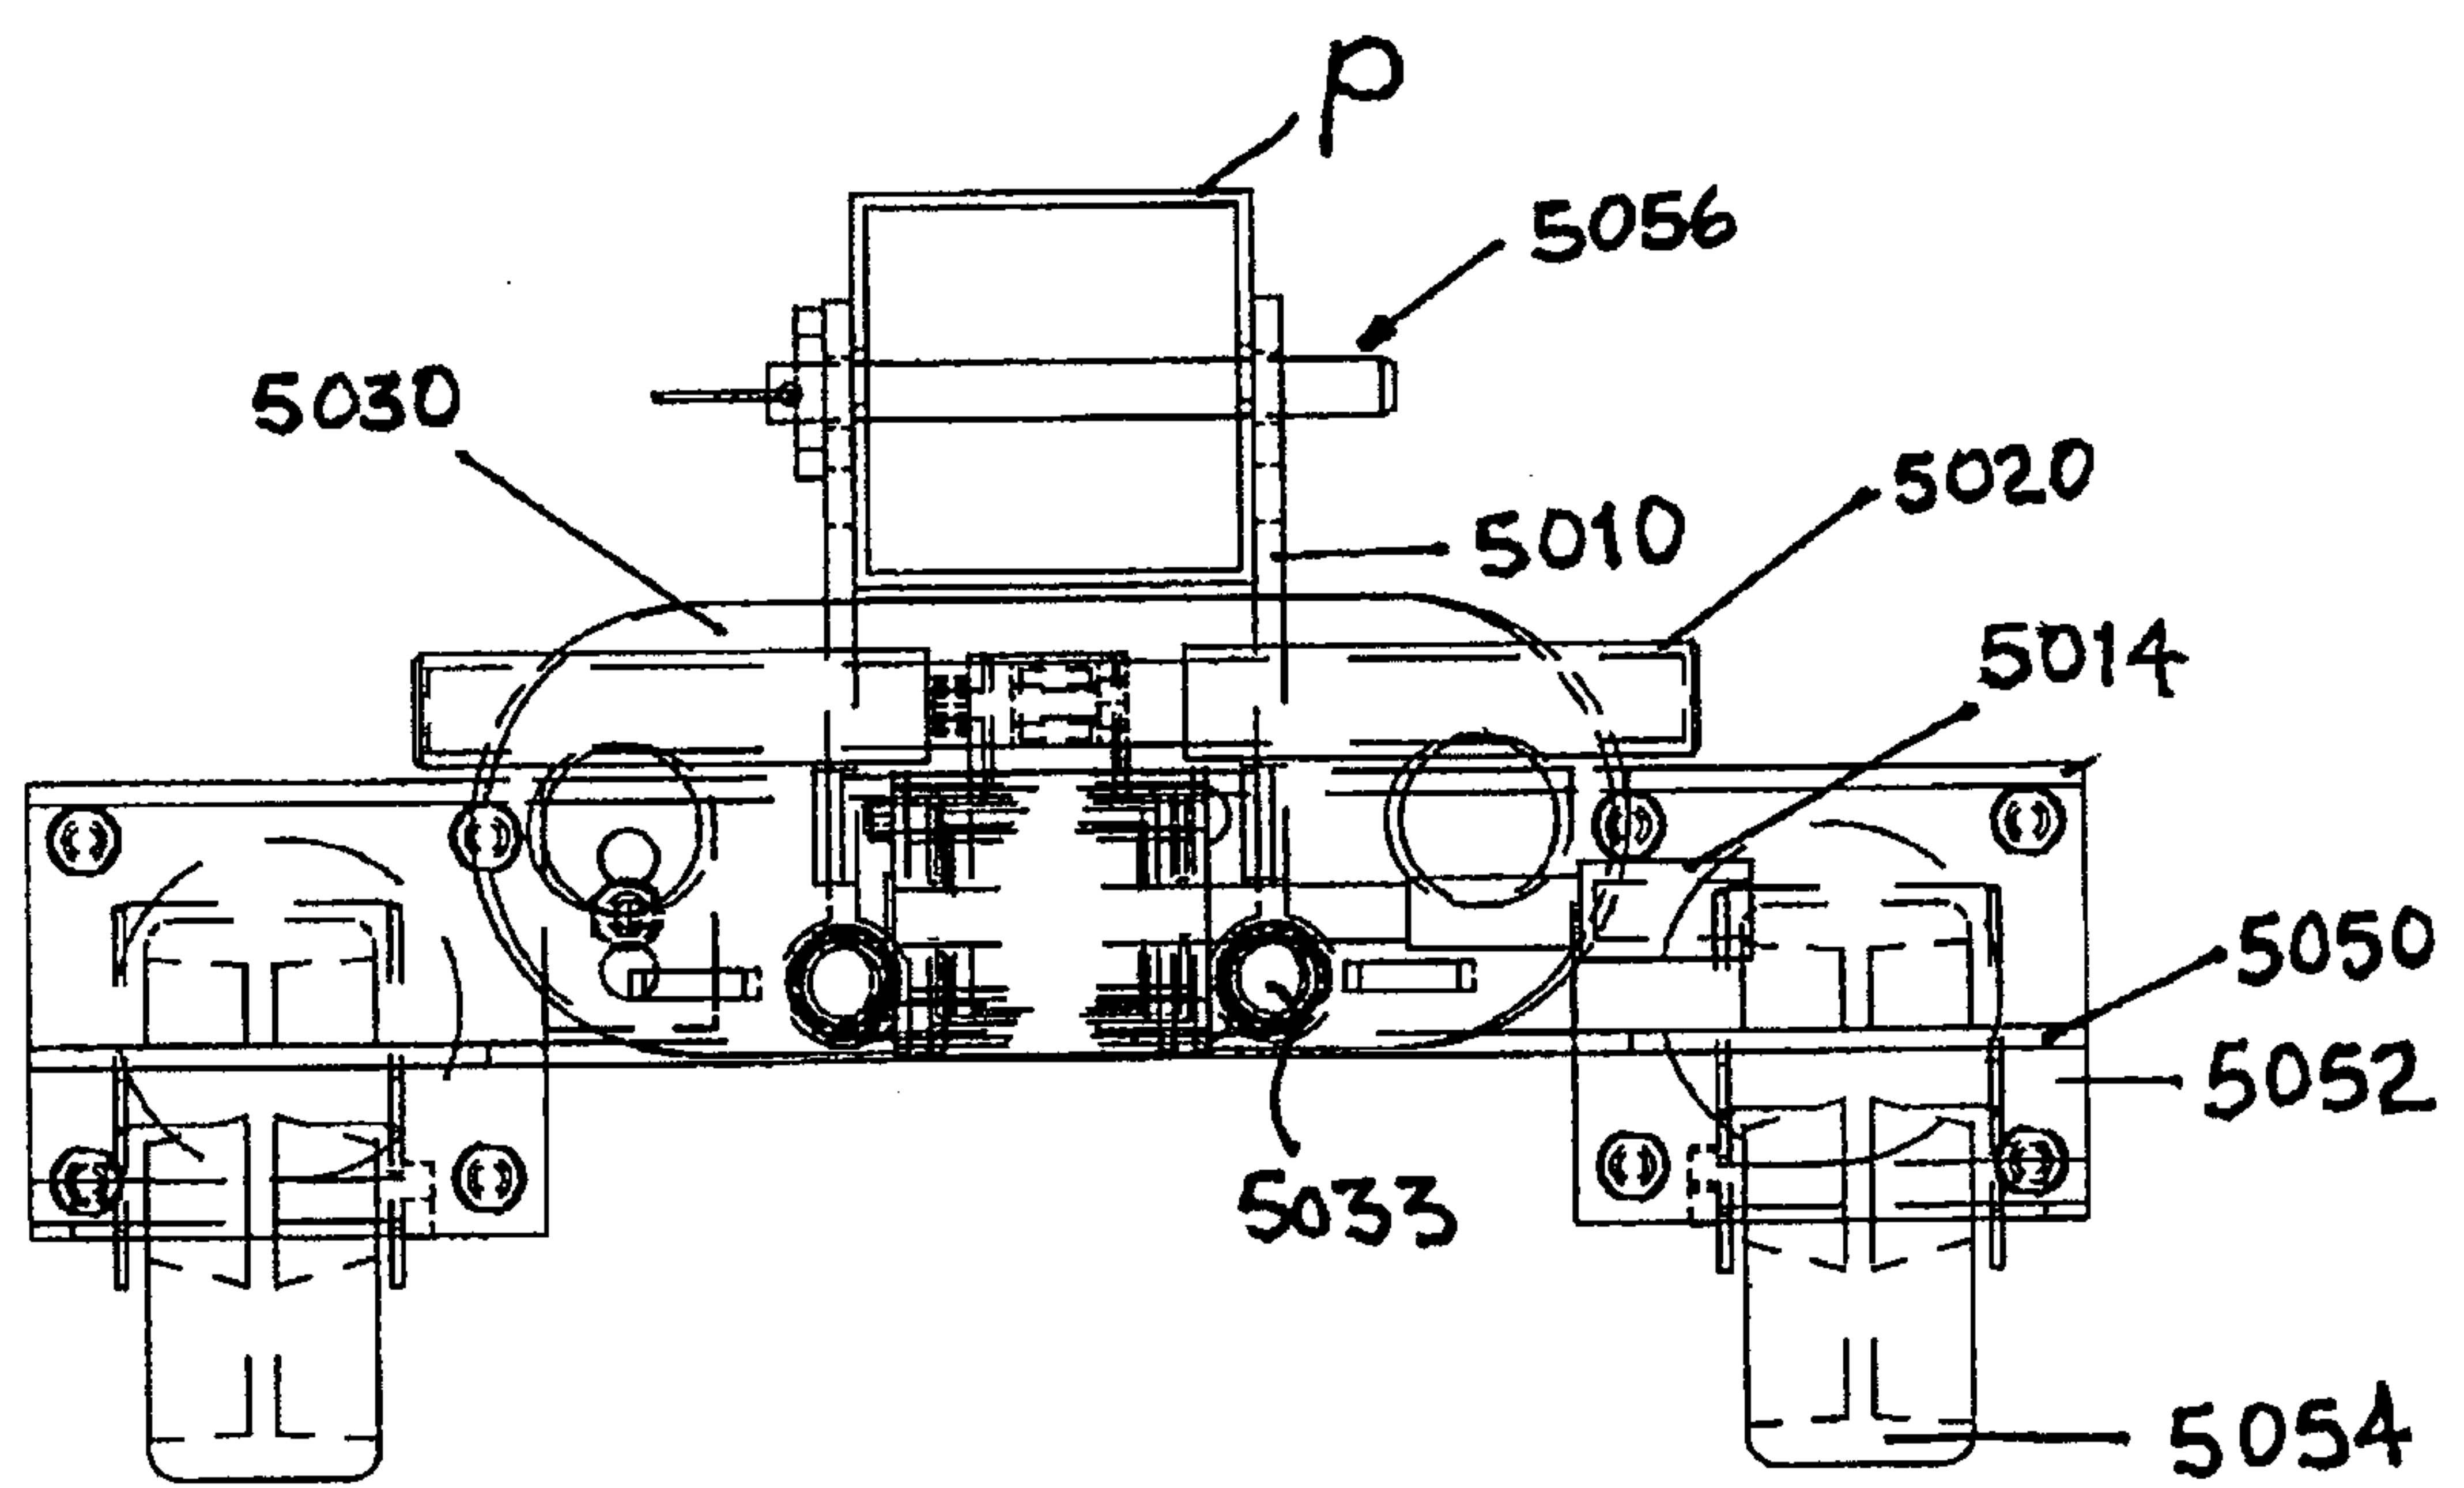


FIG. 18B

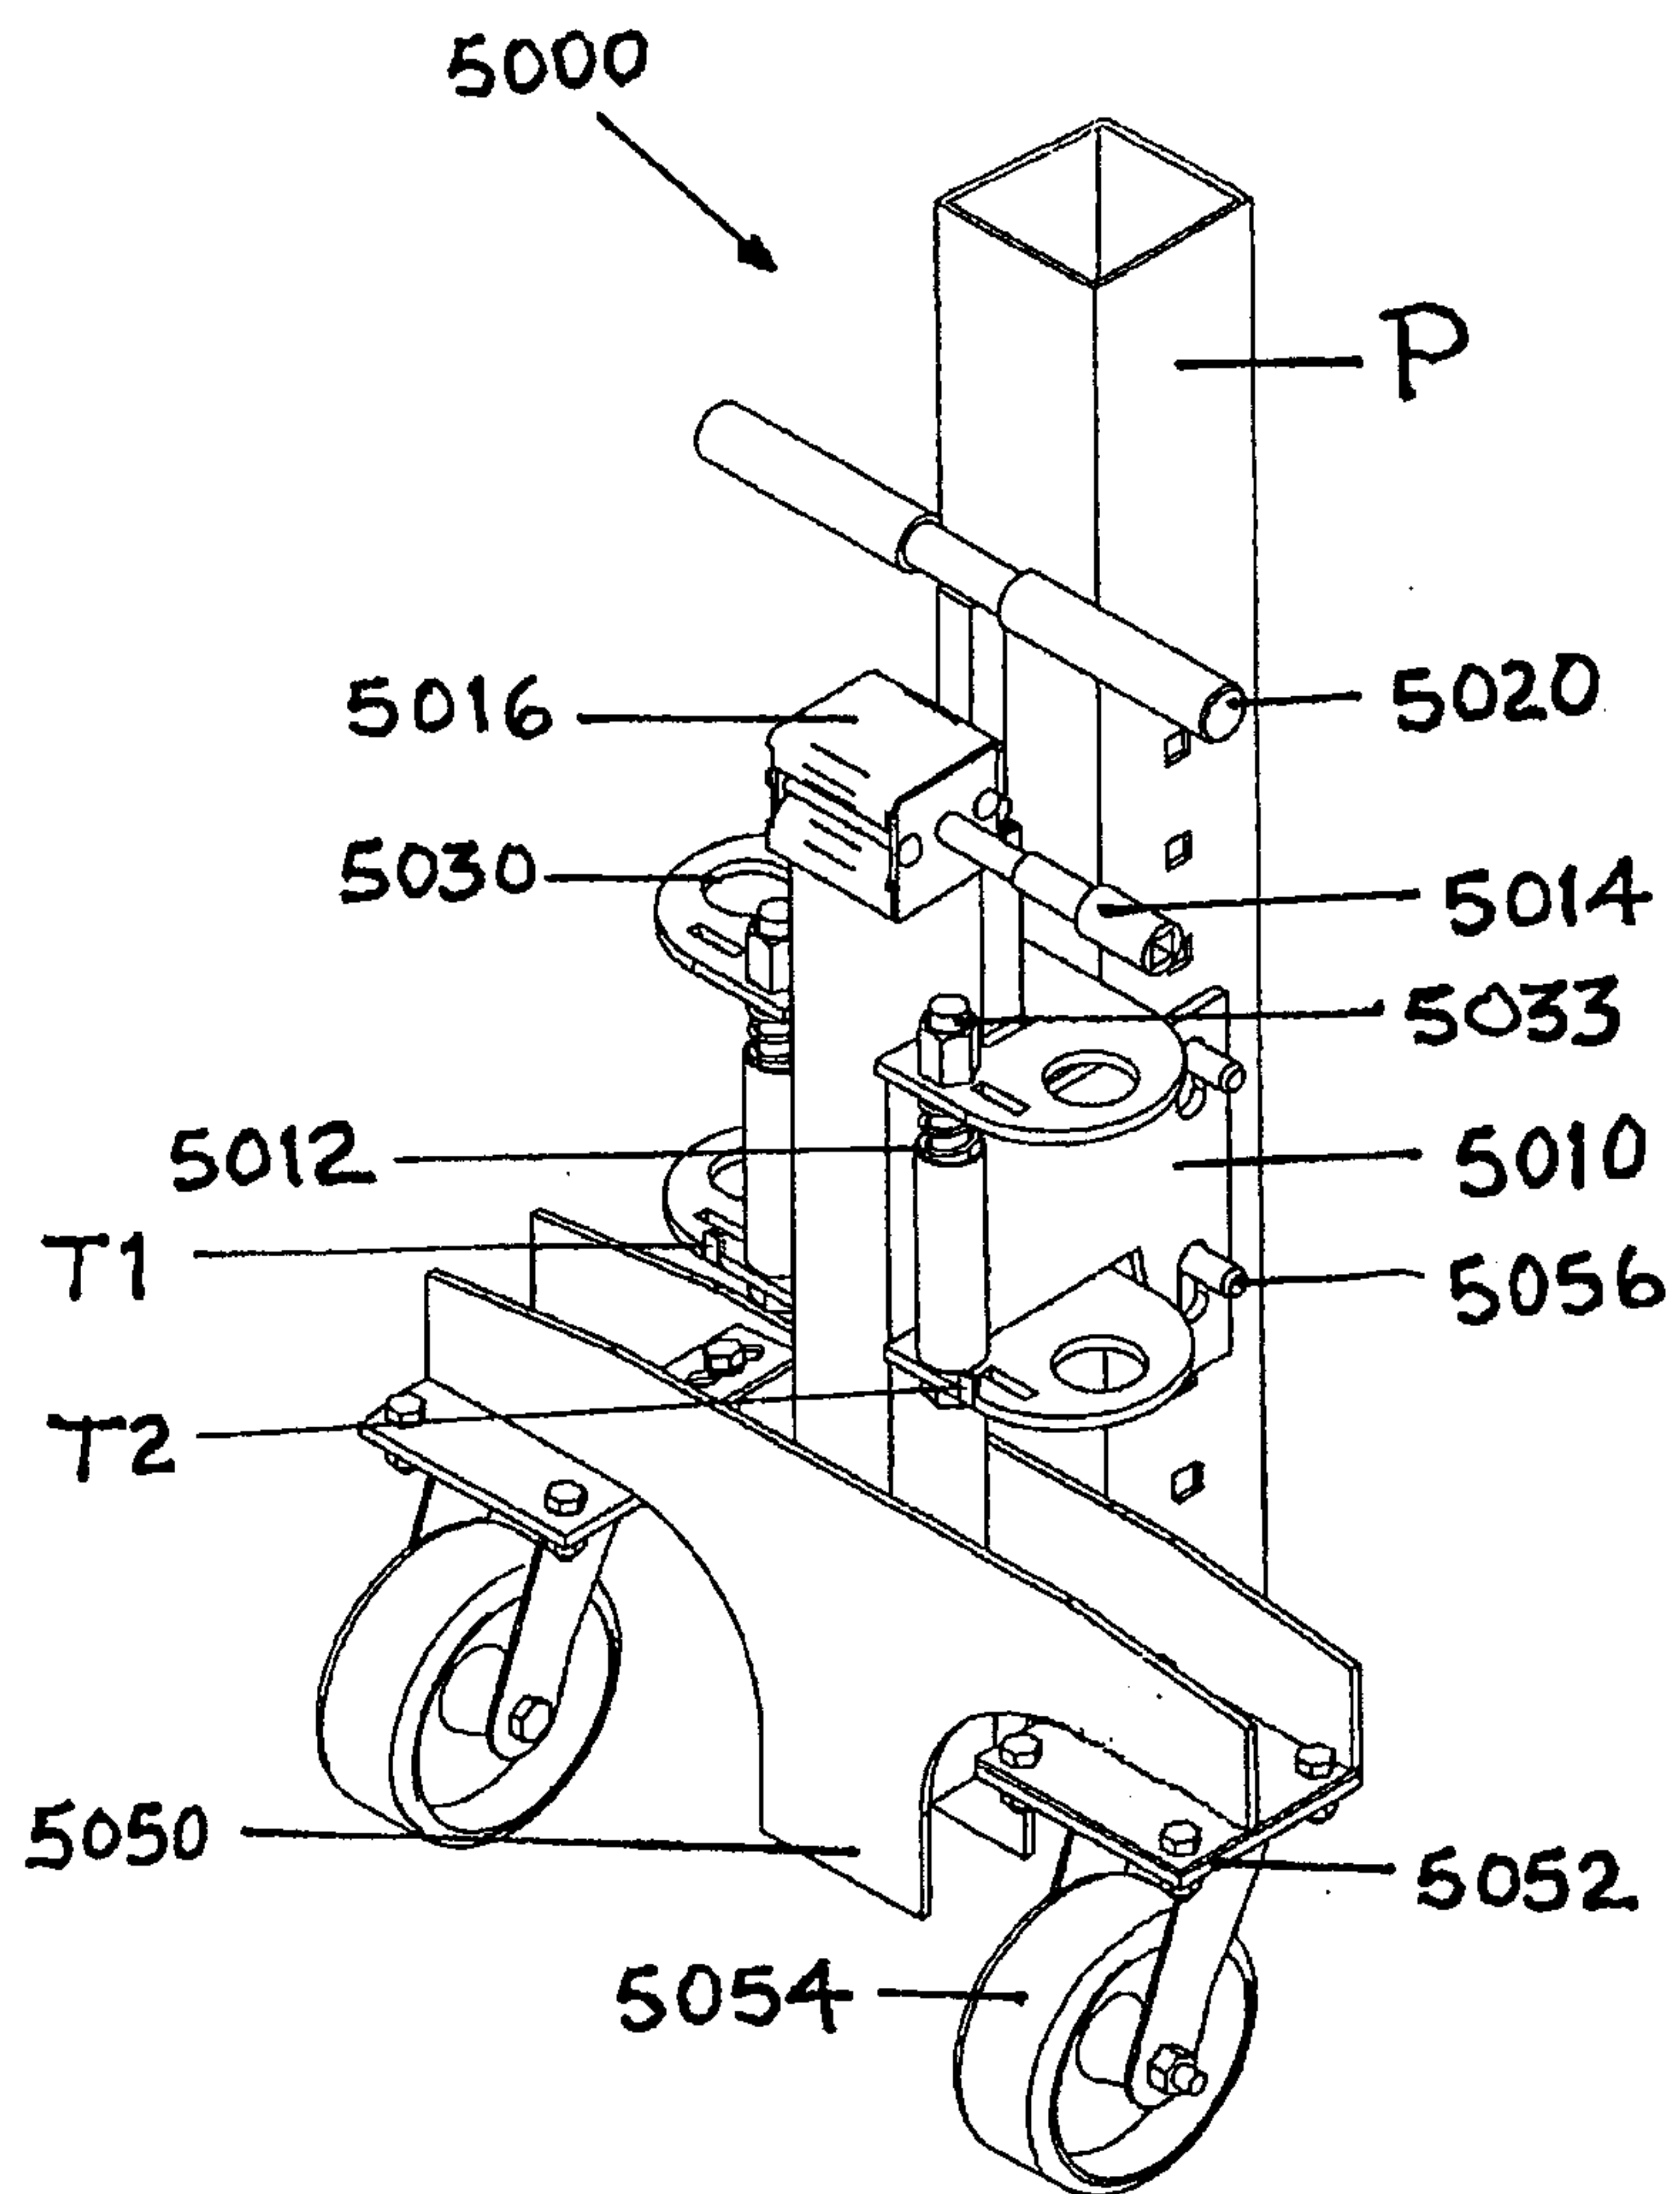
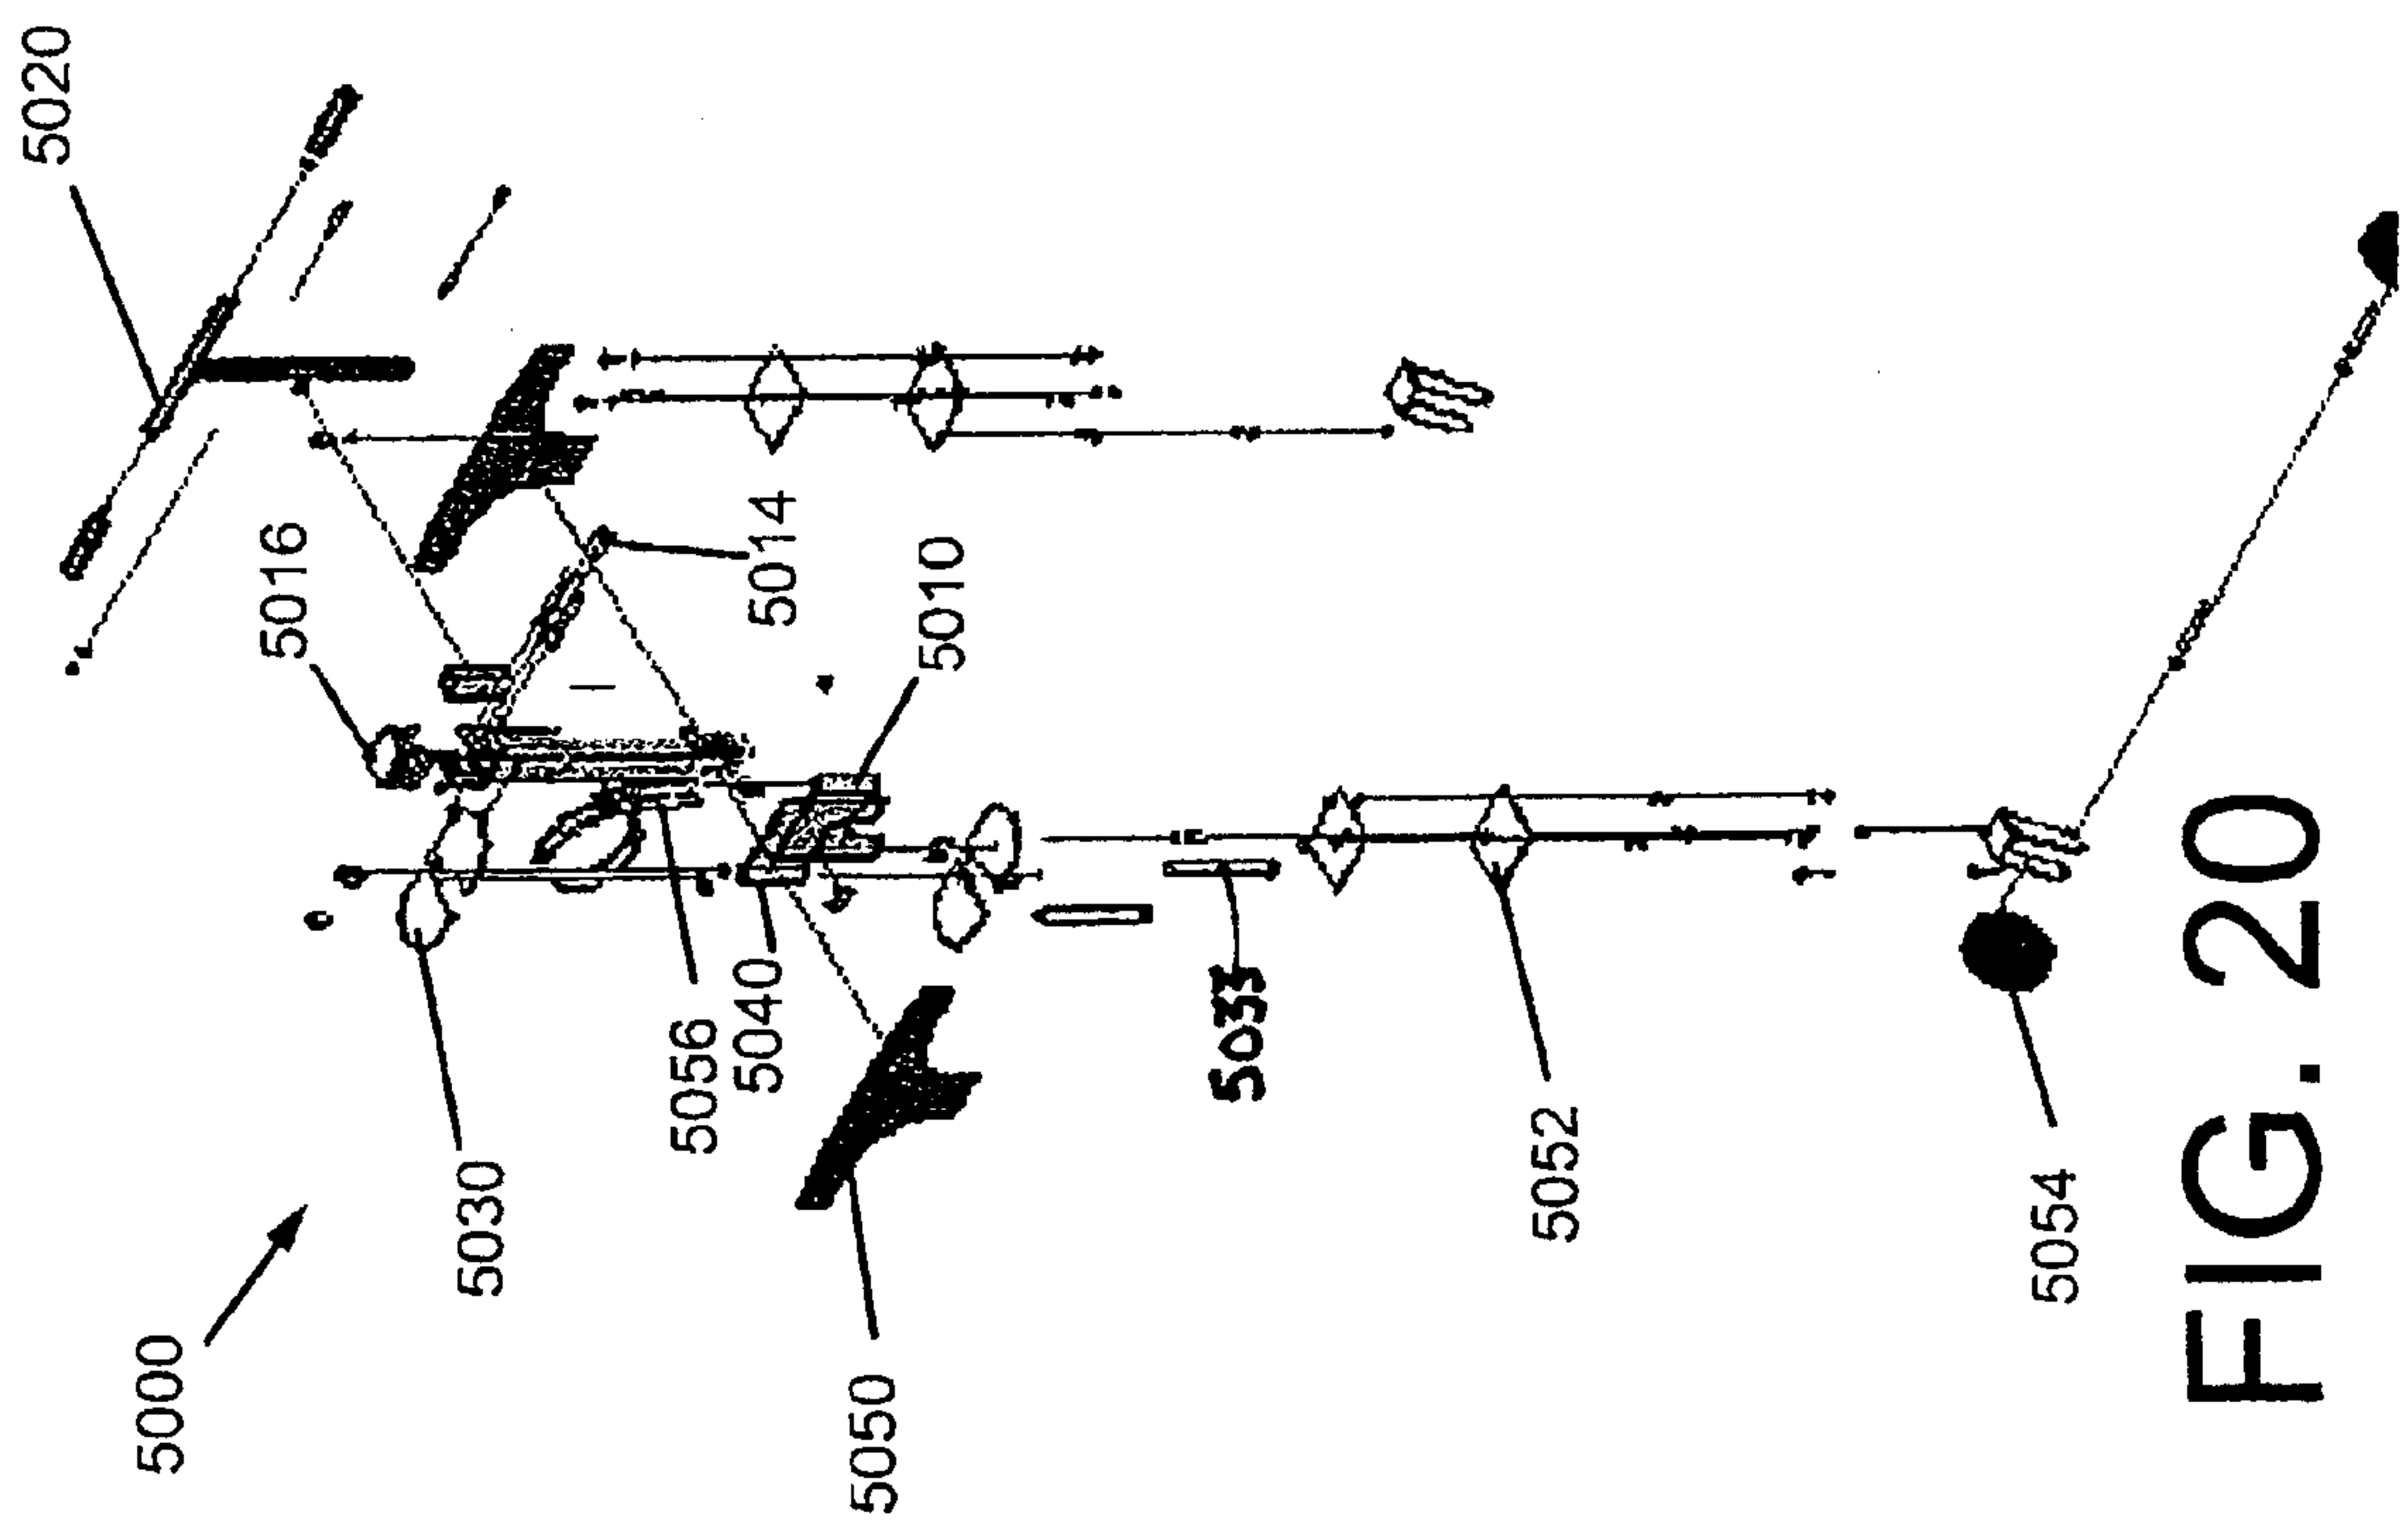


FIG. 19B





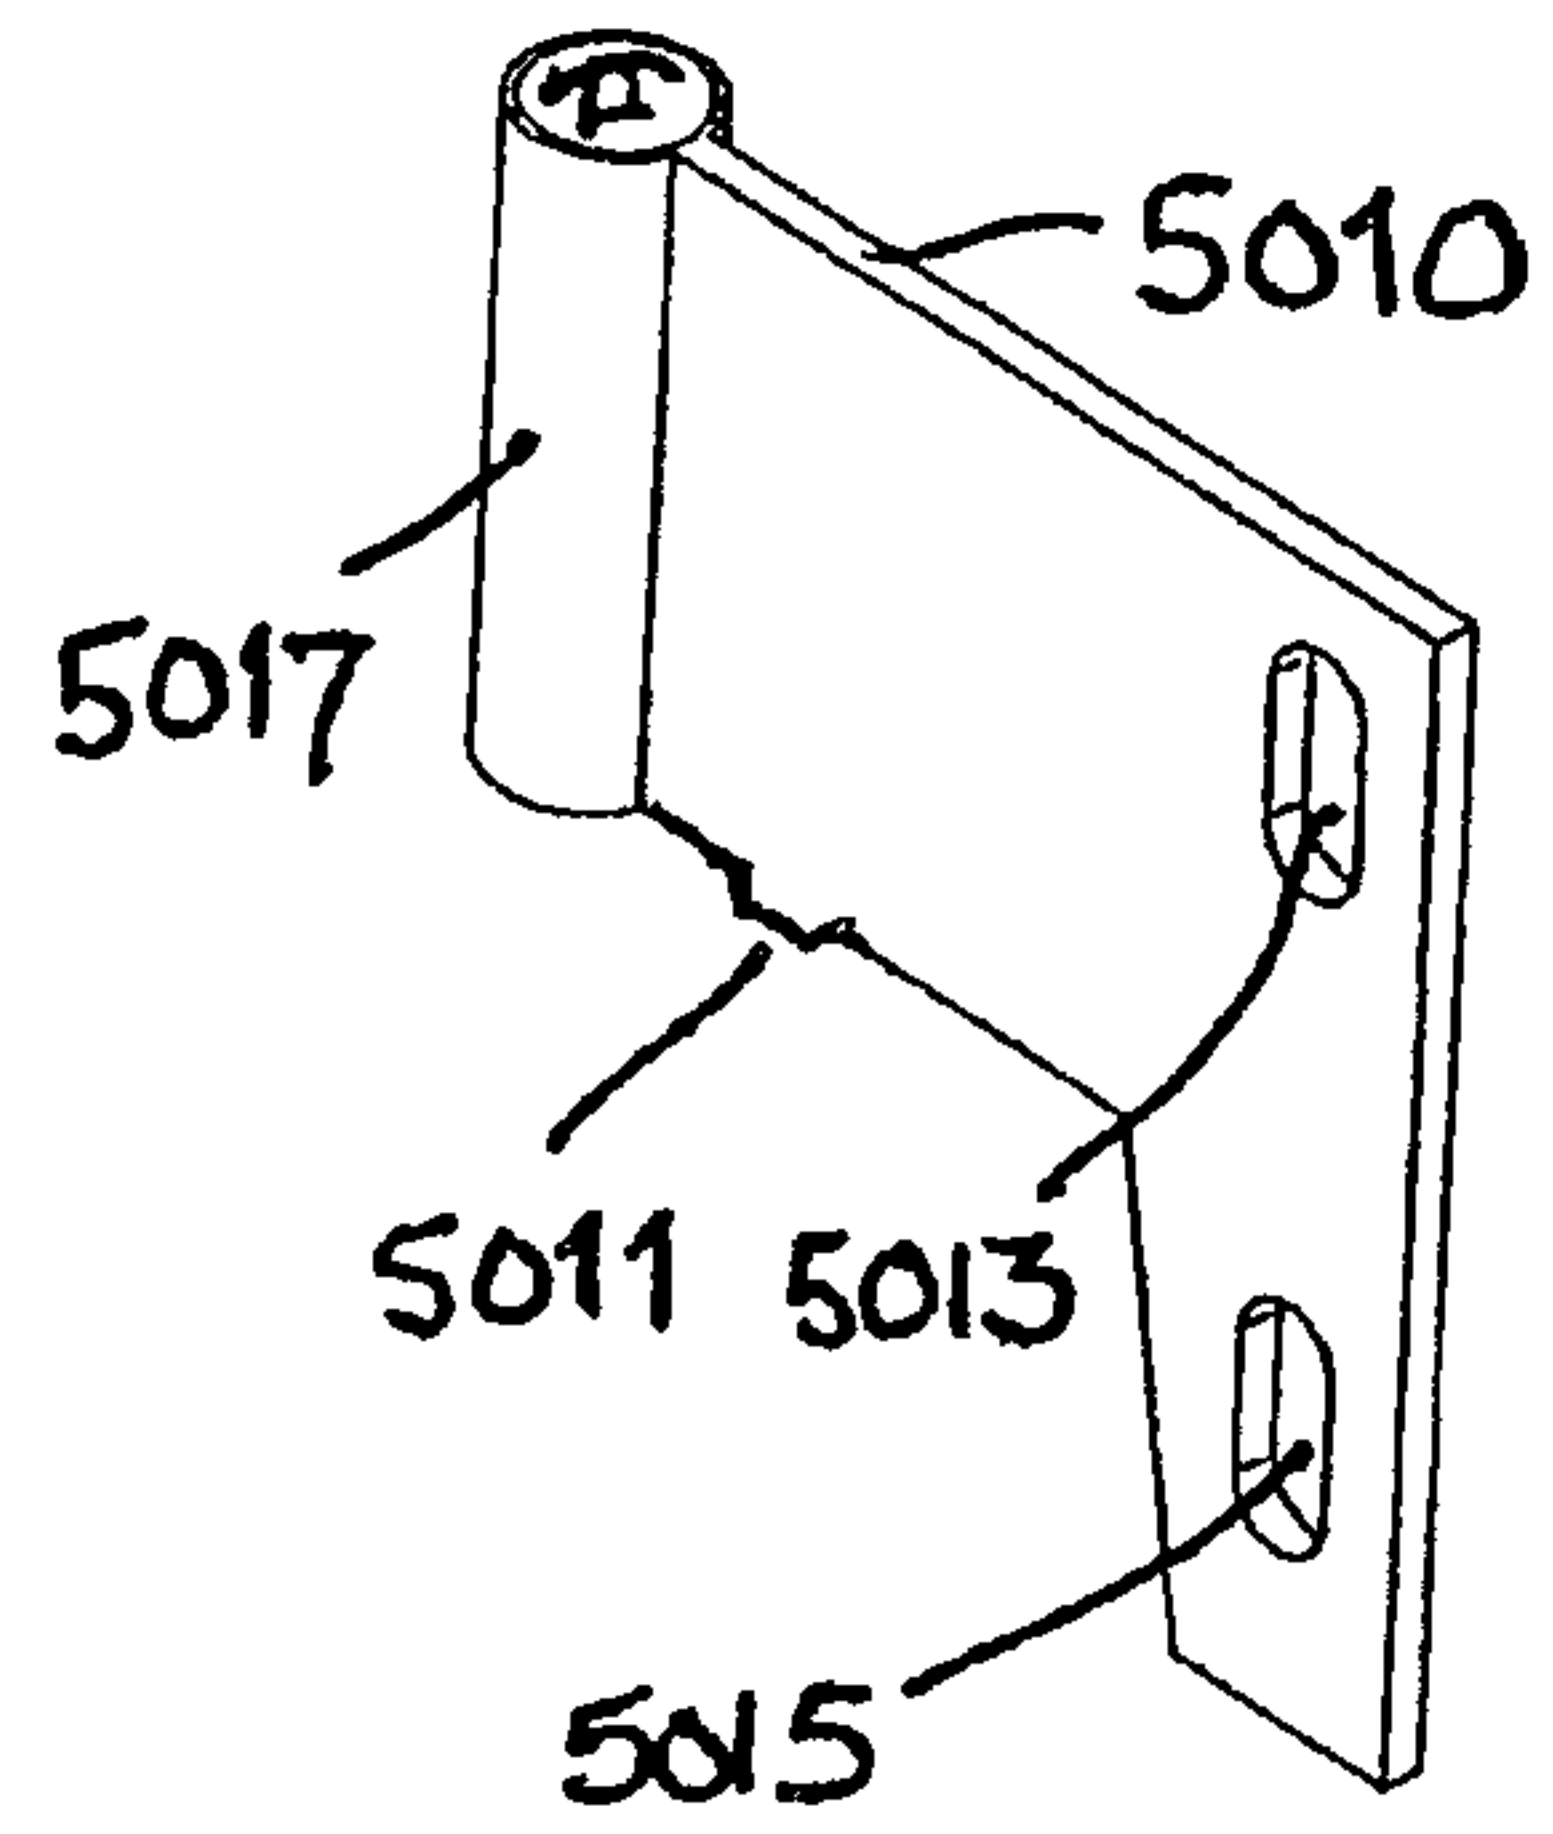


FIG. 21


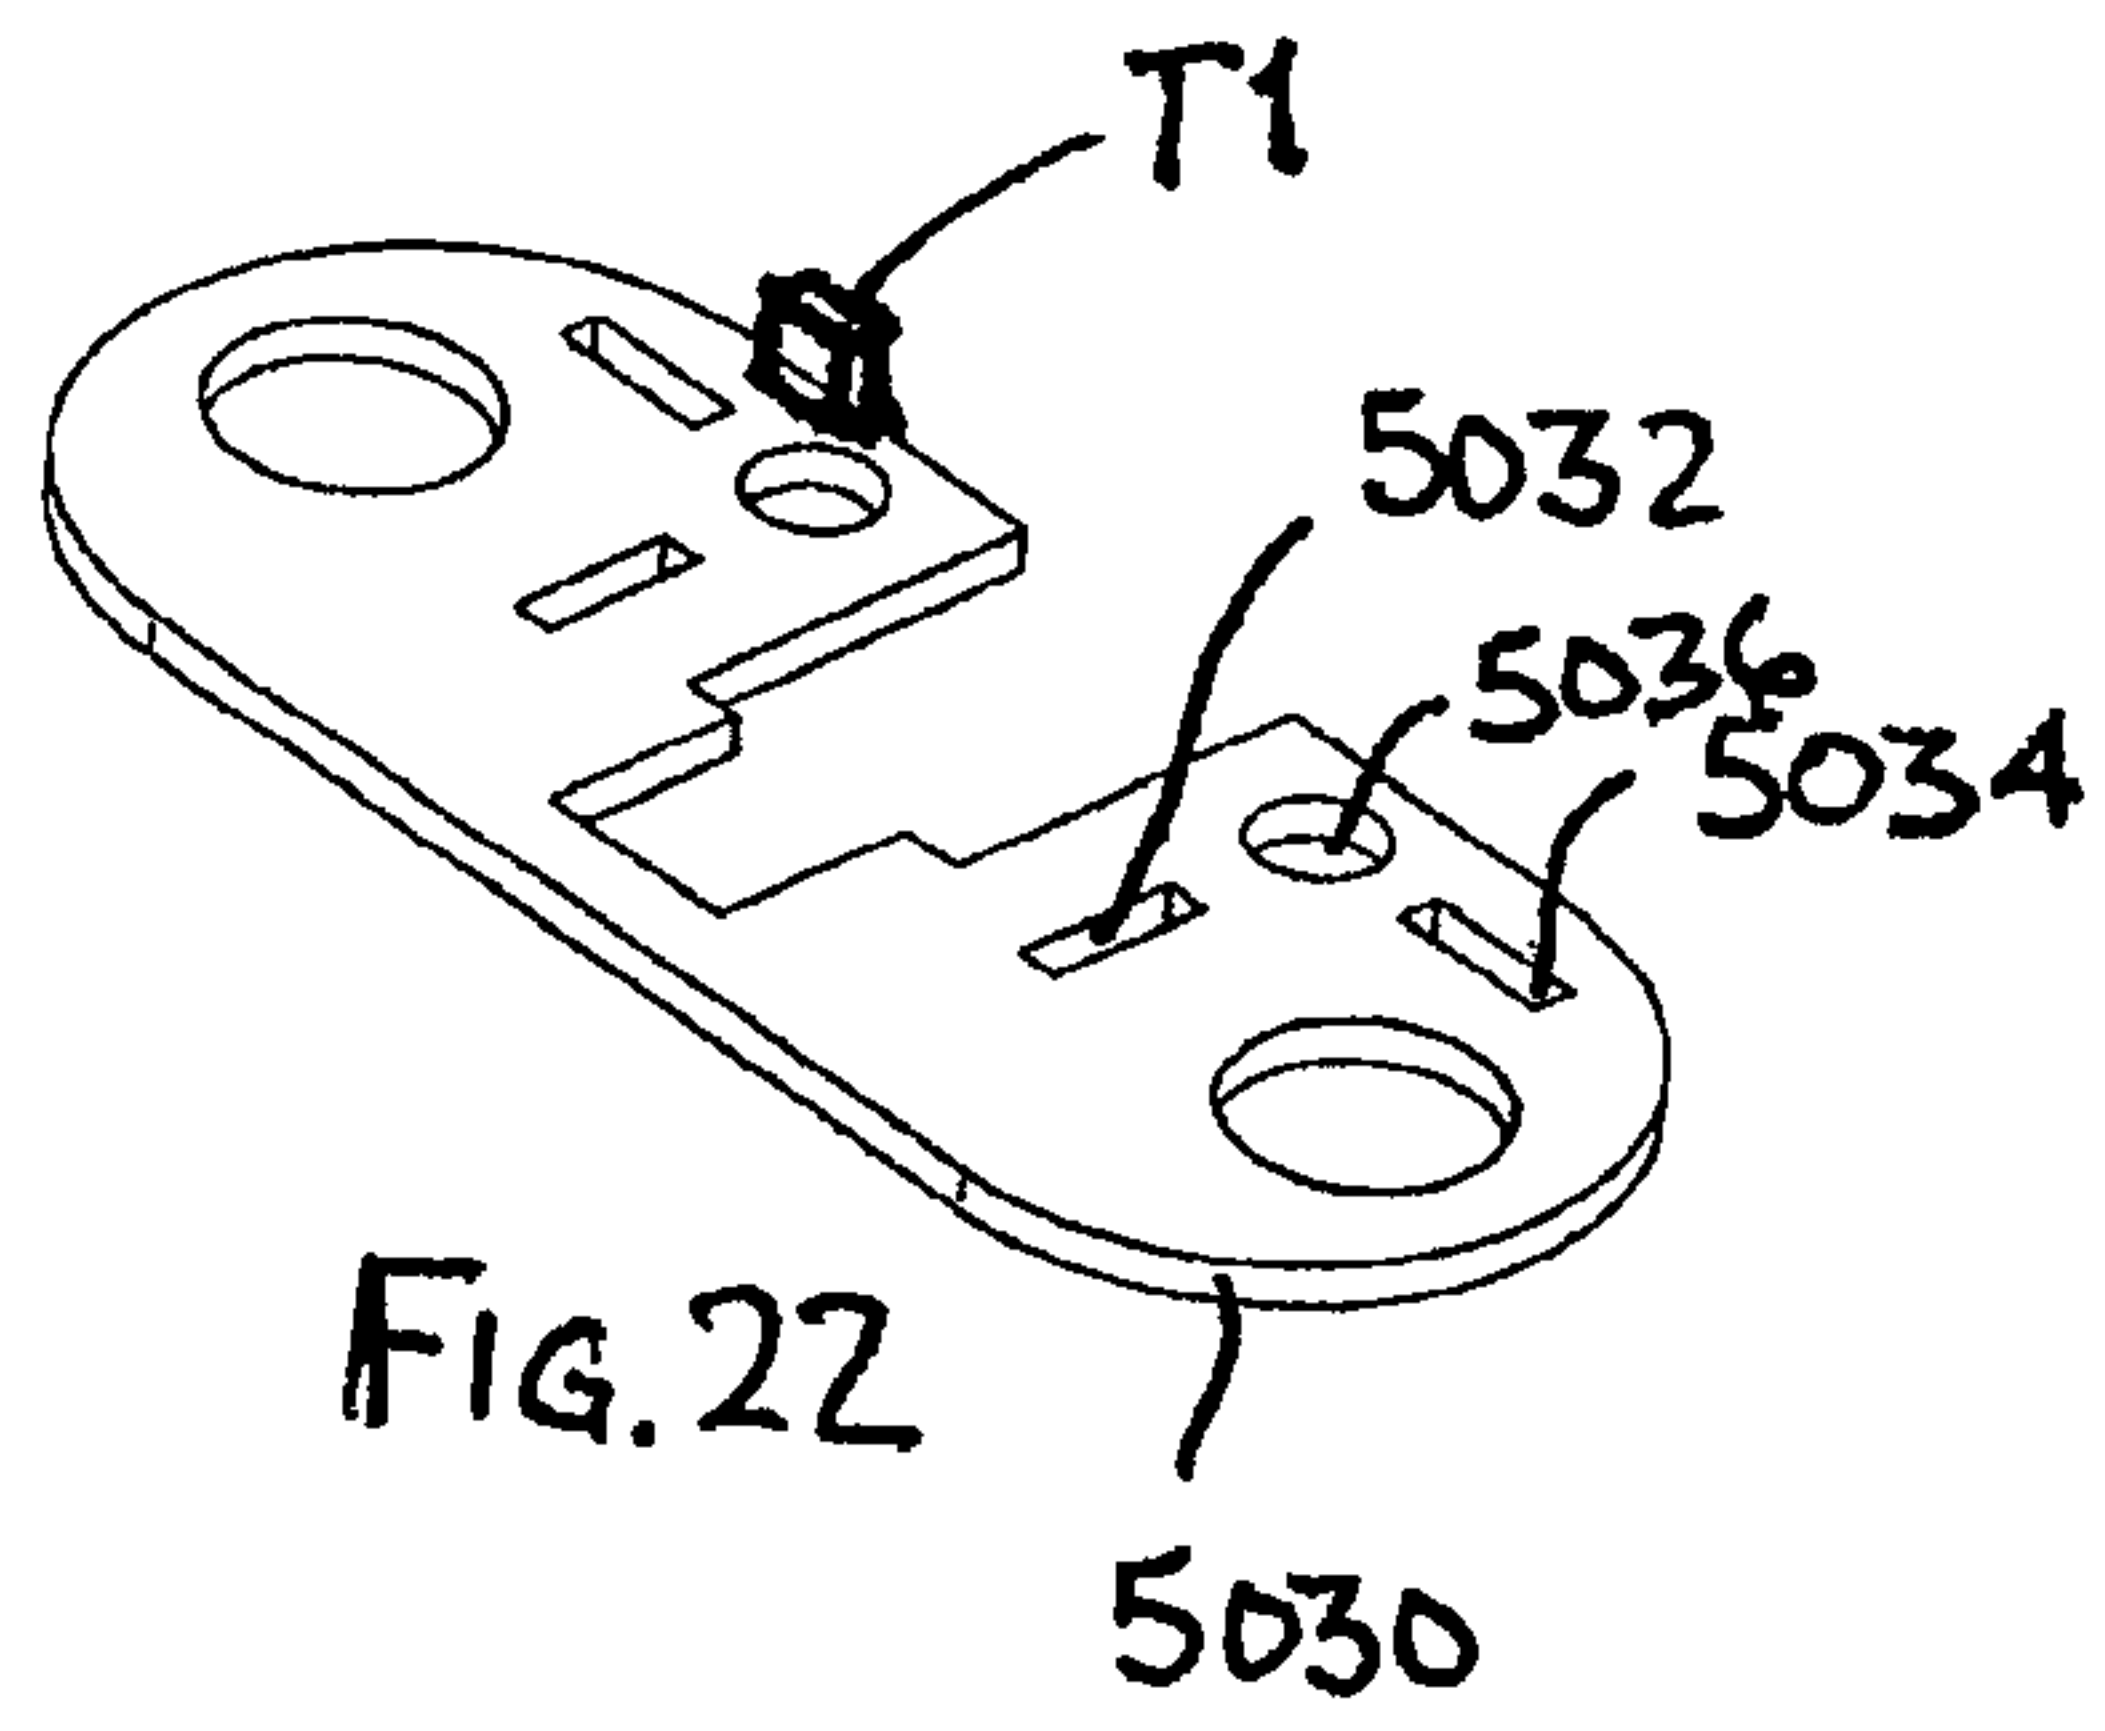


FIG. 22



PRIOR ART

FIG. 23

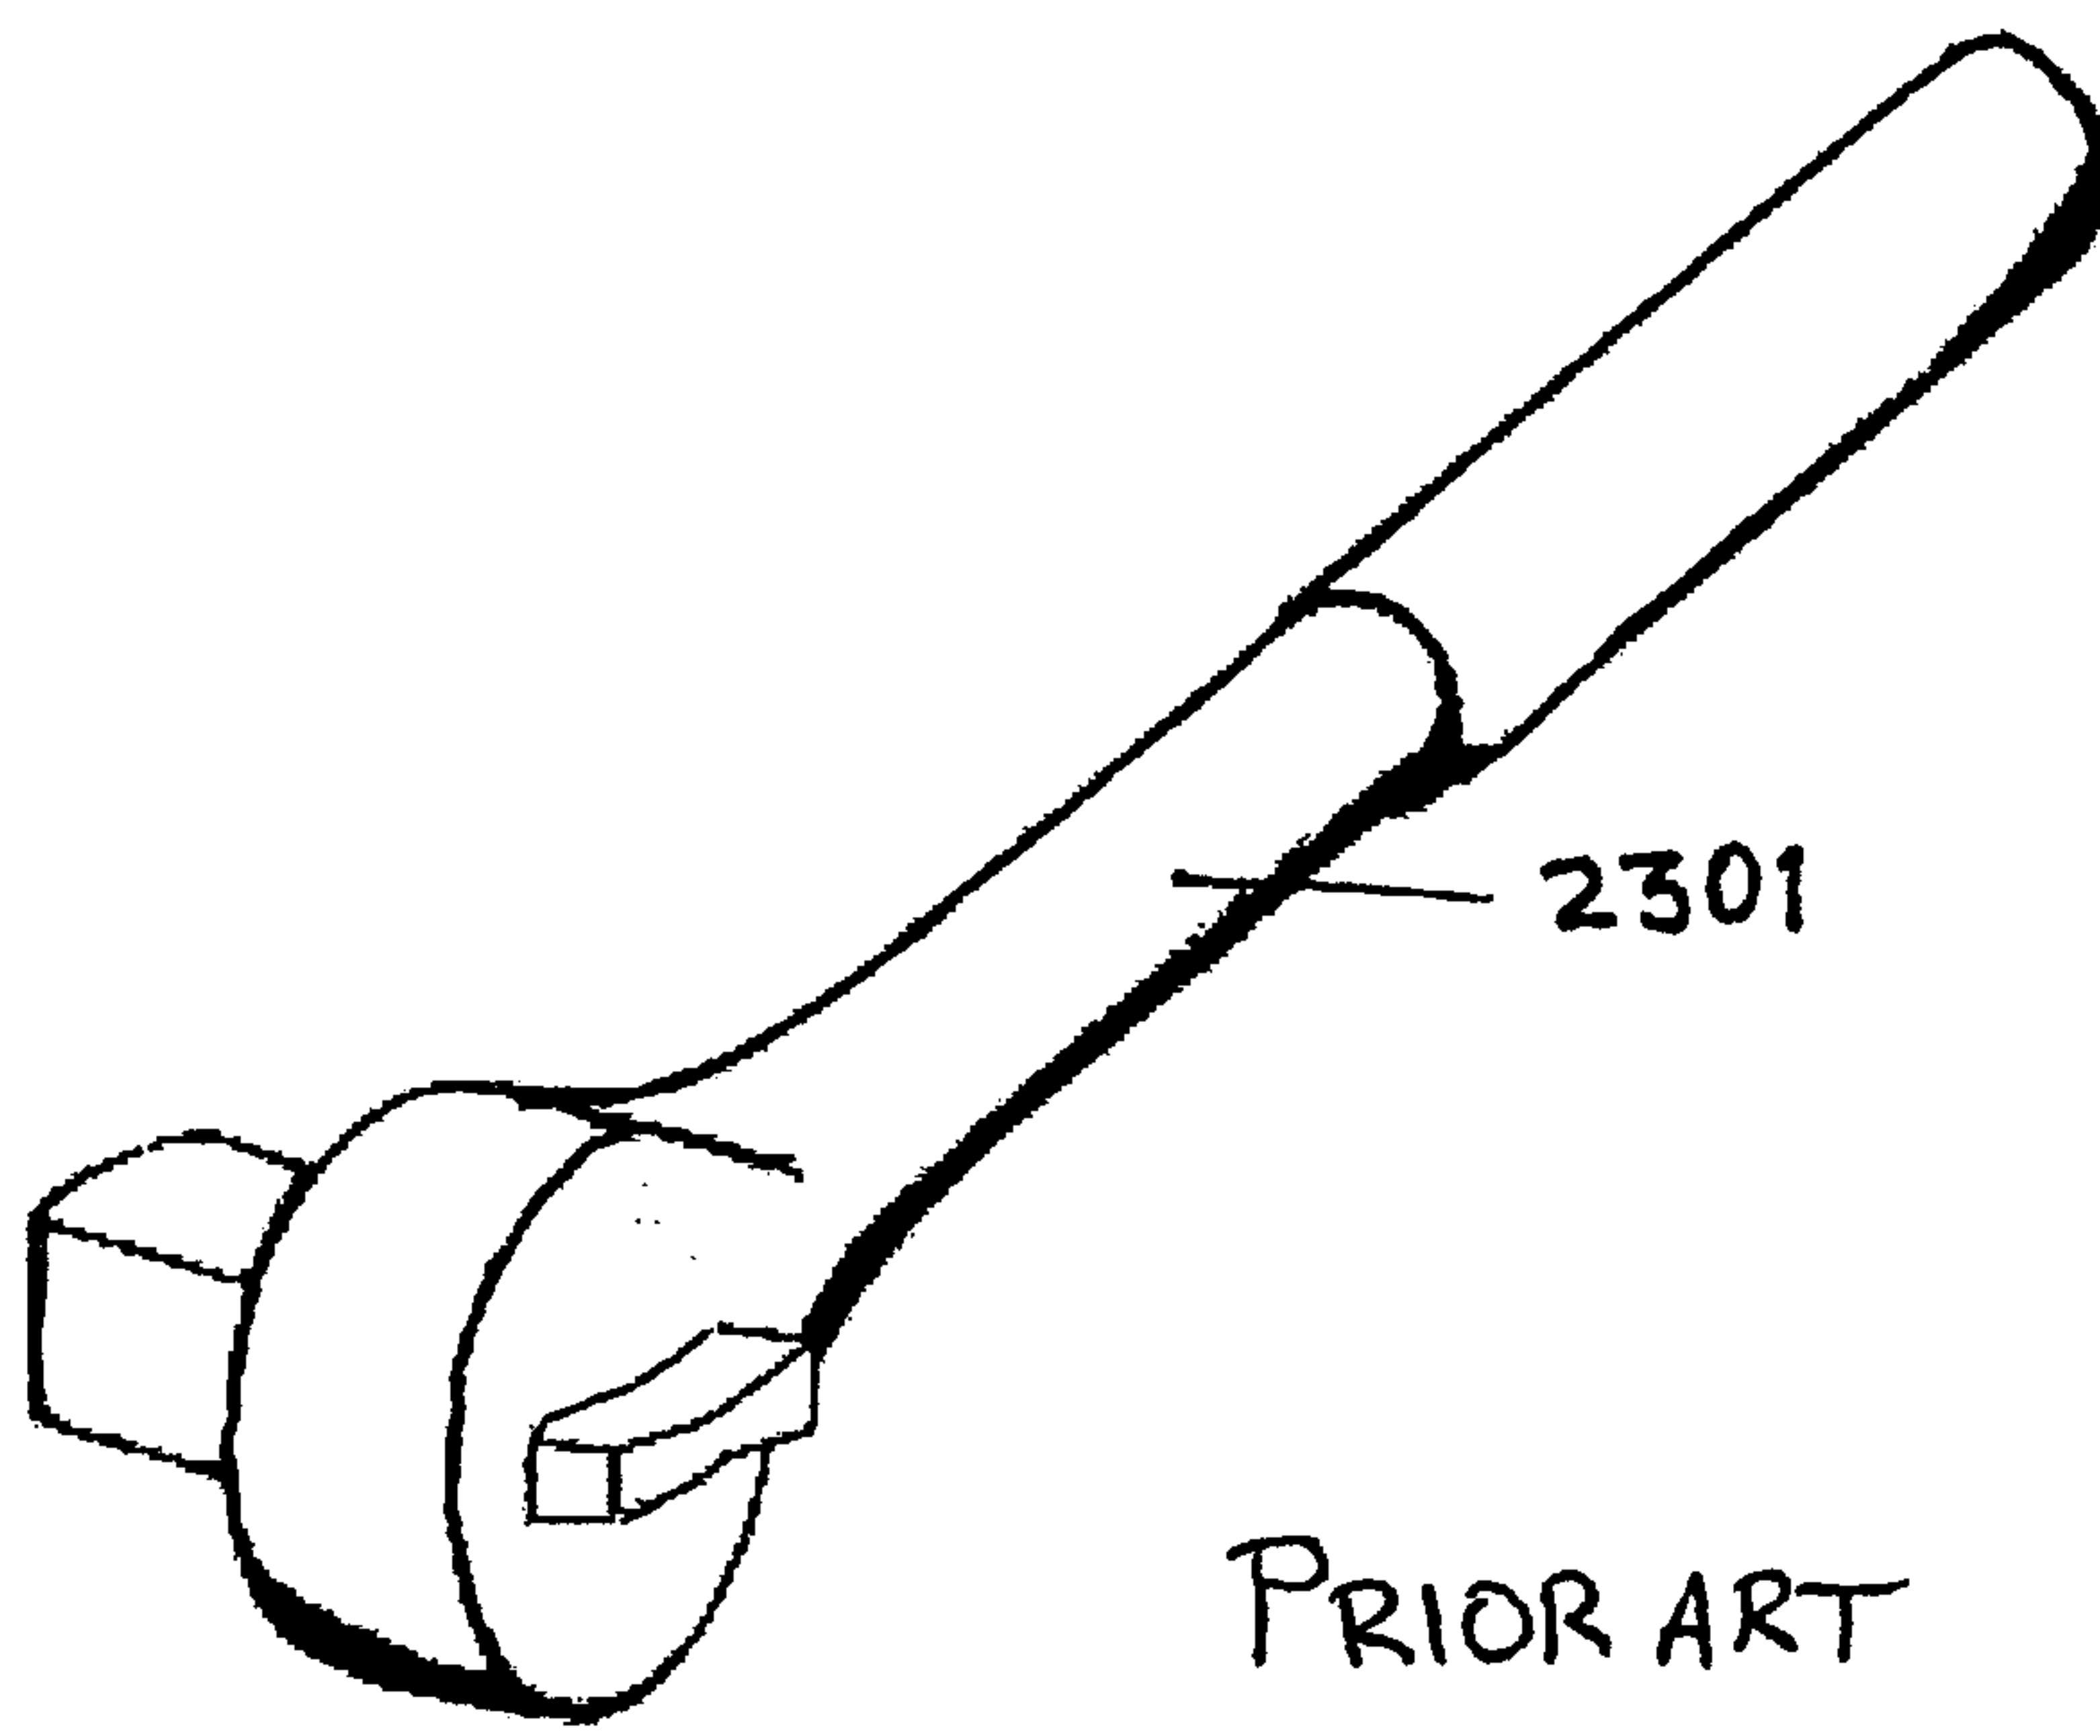

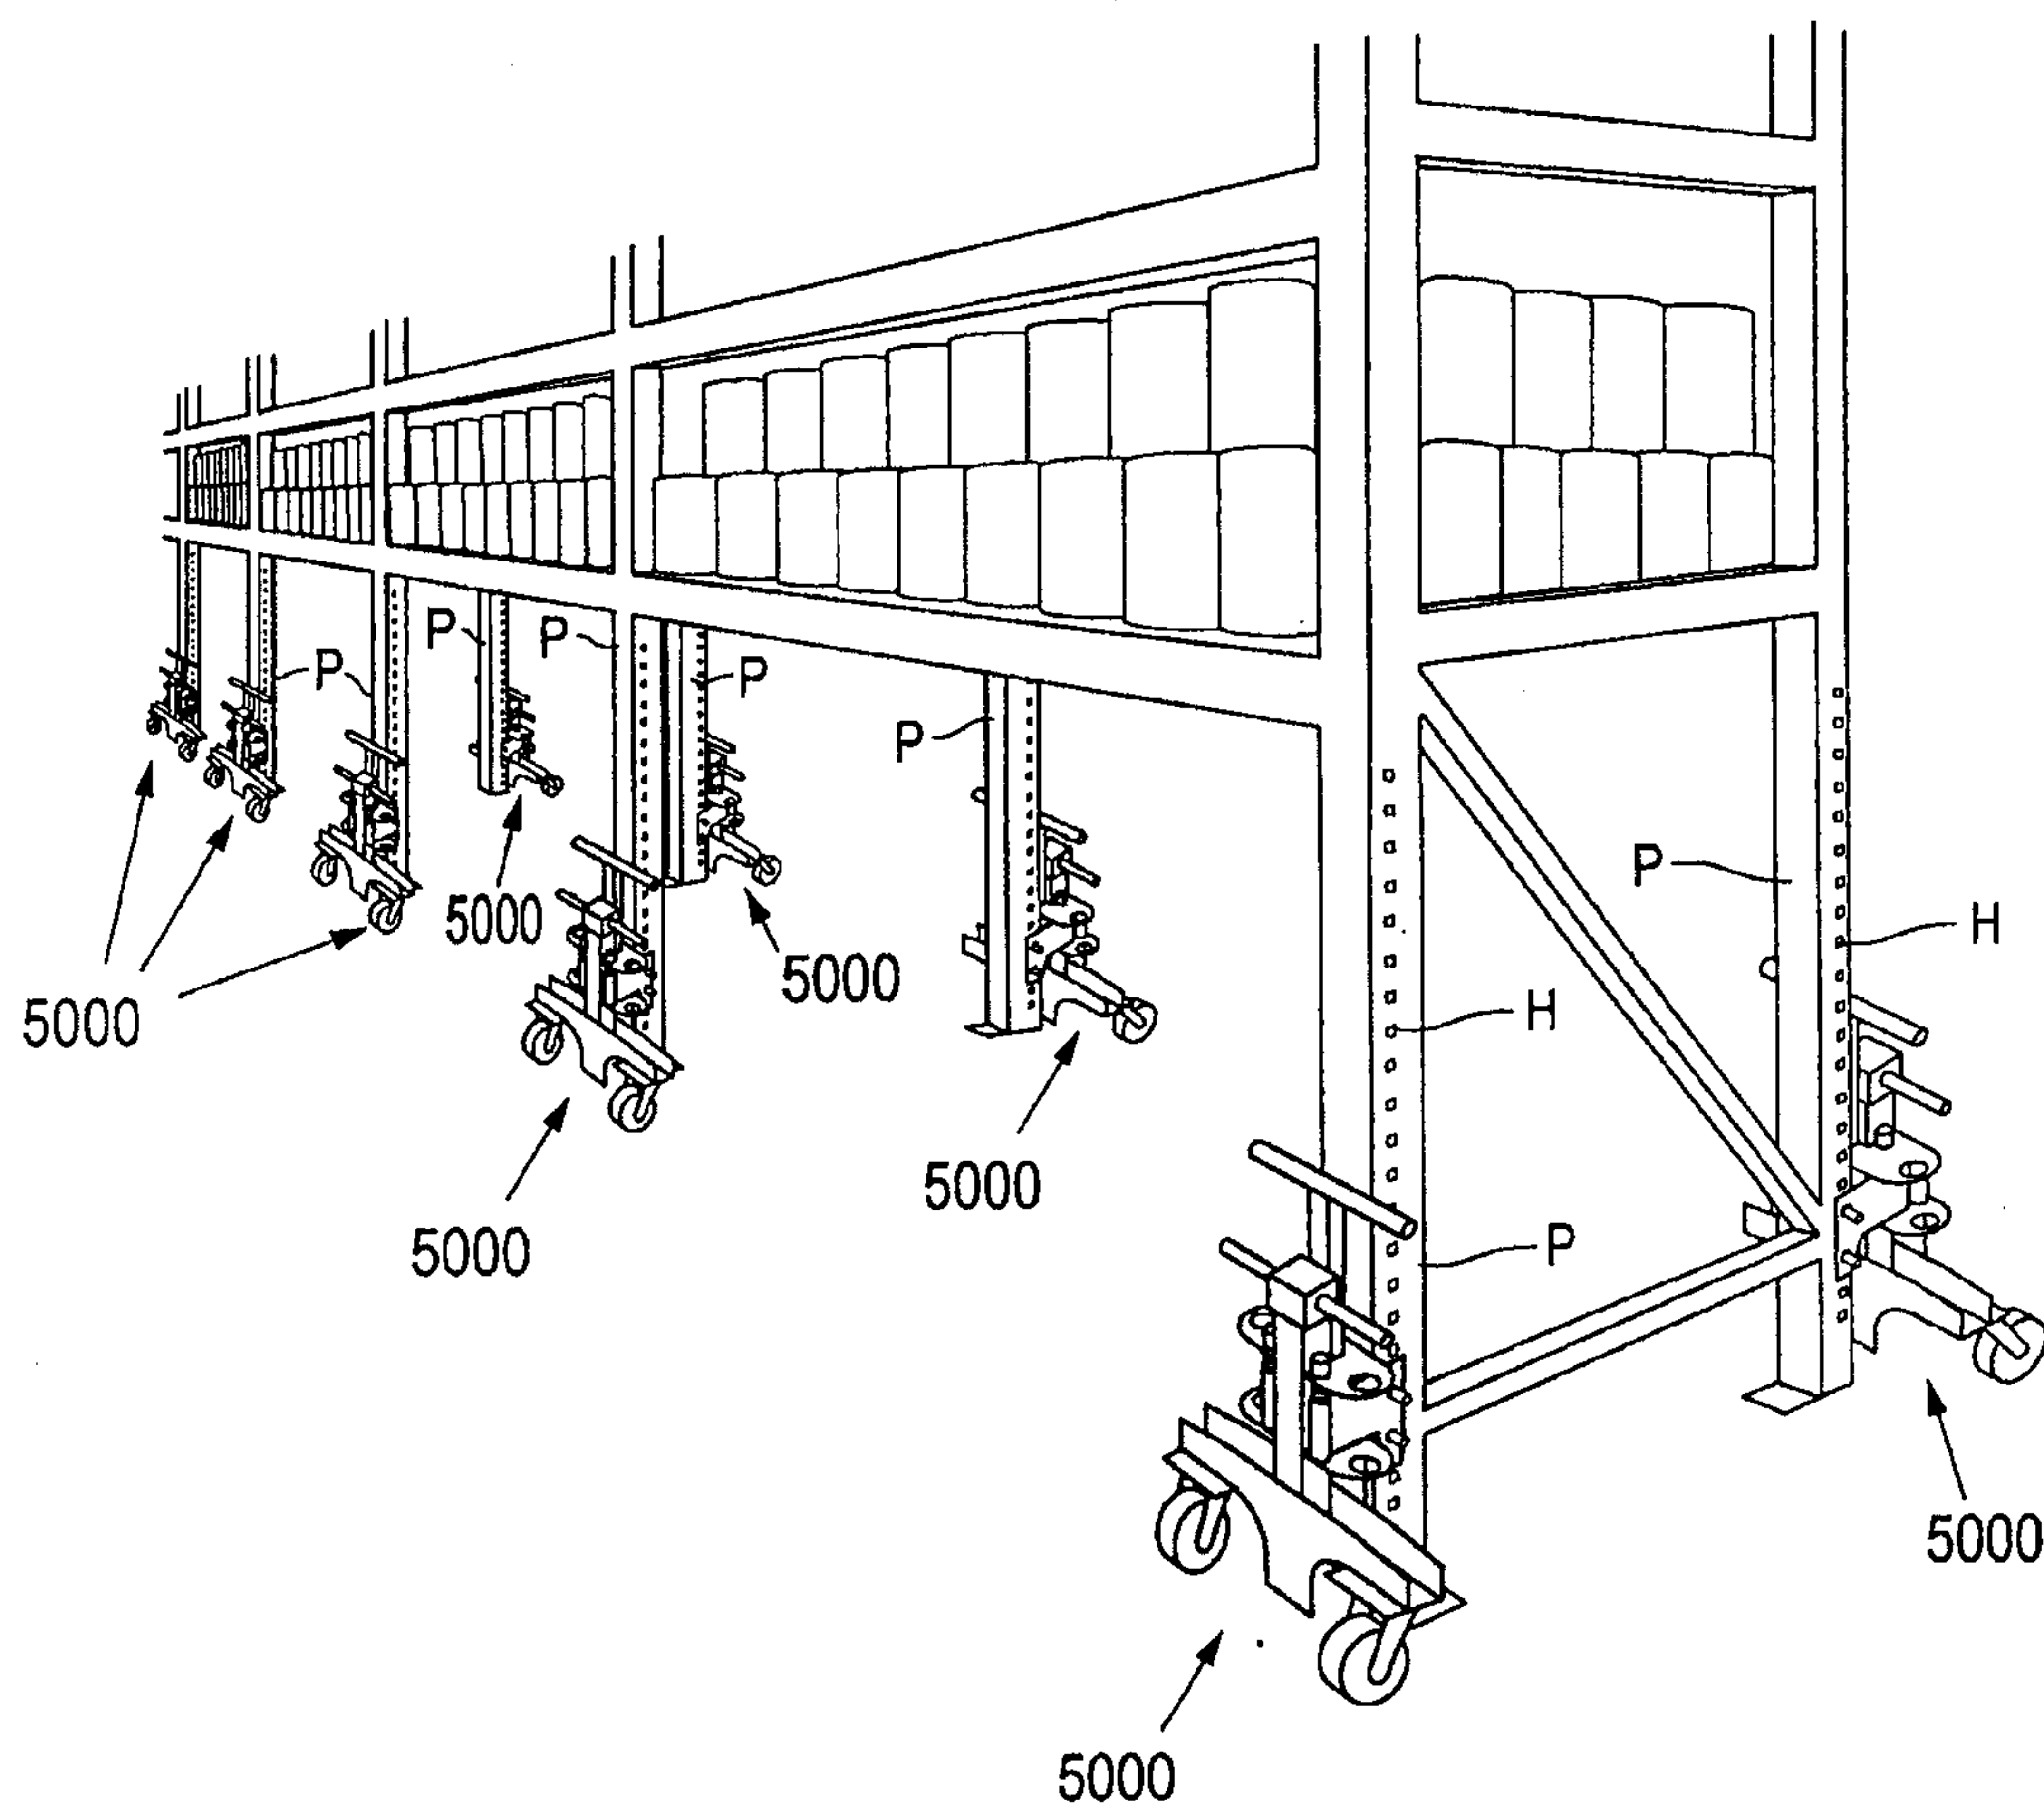
[illegible]

FIG. 24

