



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2576409 C 2014/07/22

(11)(21) **2 576 409**

(12) **BREVET CANADIEN**
CANADIAN PATENT

(13) **C**


(86) Date de dépôt PCT/PCT Filing Date: 2005/08/19
(87) Date publication PCT/PCT Publication Date: 2006/02/23
(45) Date de délivrance/Issue Date: 2014/07/22
(85) Entrée phase nationale/National Entry: 2007/02/07
(86) N° demande PCT/PCT Application No.: NZ 2005/000219
(87) N° publication PCT/PCT Publication No.: 2006/019323
(30) Priorité/Priority: 2004/08/20 (NZ534853)

(51) Cl.Int./Int.Cl. *A61M 16/10* (2006.01),
A61M 16/16 (2006.01)

(72) Inventeurs/Inventors:
PAYTON, MATTHEW JON, NZ;
O'DONNELL, KEVIN PETER, NZ;
CLARK, ANDREW BADEN, NZ;
QUILL, CHRISTOPHER SIMON JAMES, NZ;
HAWKINS, PETER GEOFFREY, NZ

(73) Propriétaire/Owner:
FISHER & PAYKEL HEALTHCARE LIMITED, NZ
(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : APPAREIL DE MESURE DES PROPRIETES DES GAZ ADMINISTRES A UN PATIENT
(54) Title: APPARATUS FOR MEASURING PROPERTIES OF GASES SUPPLIED TO A PATIENT

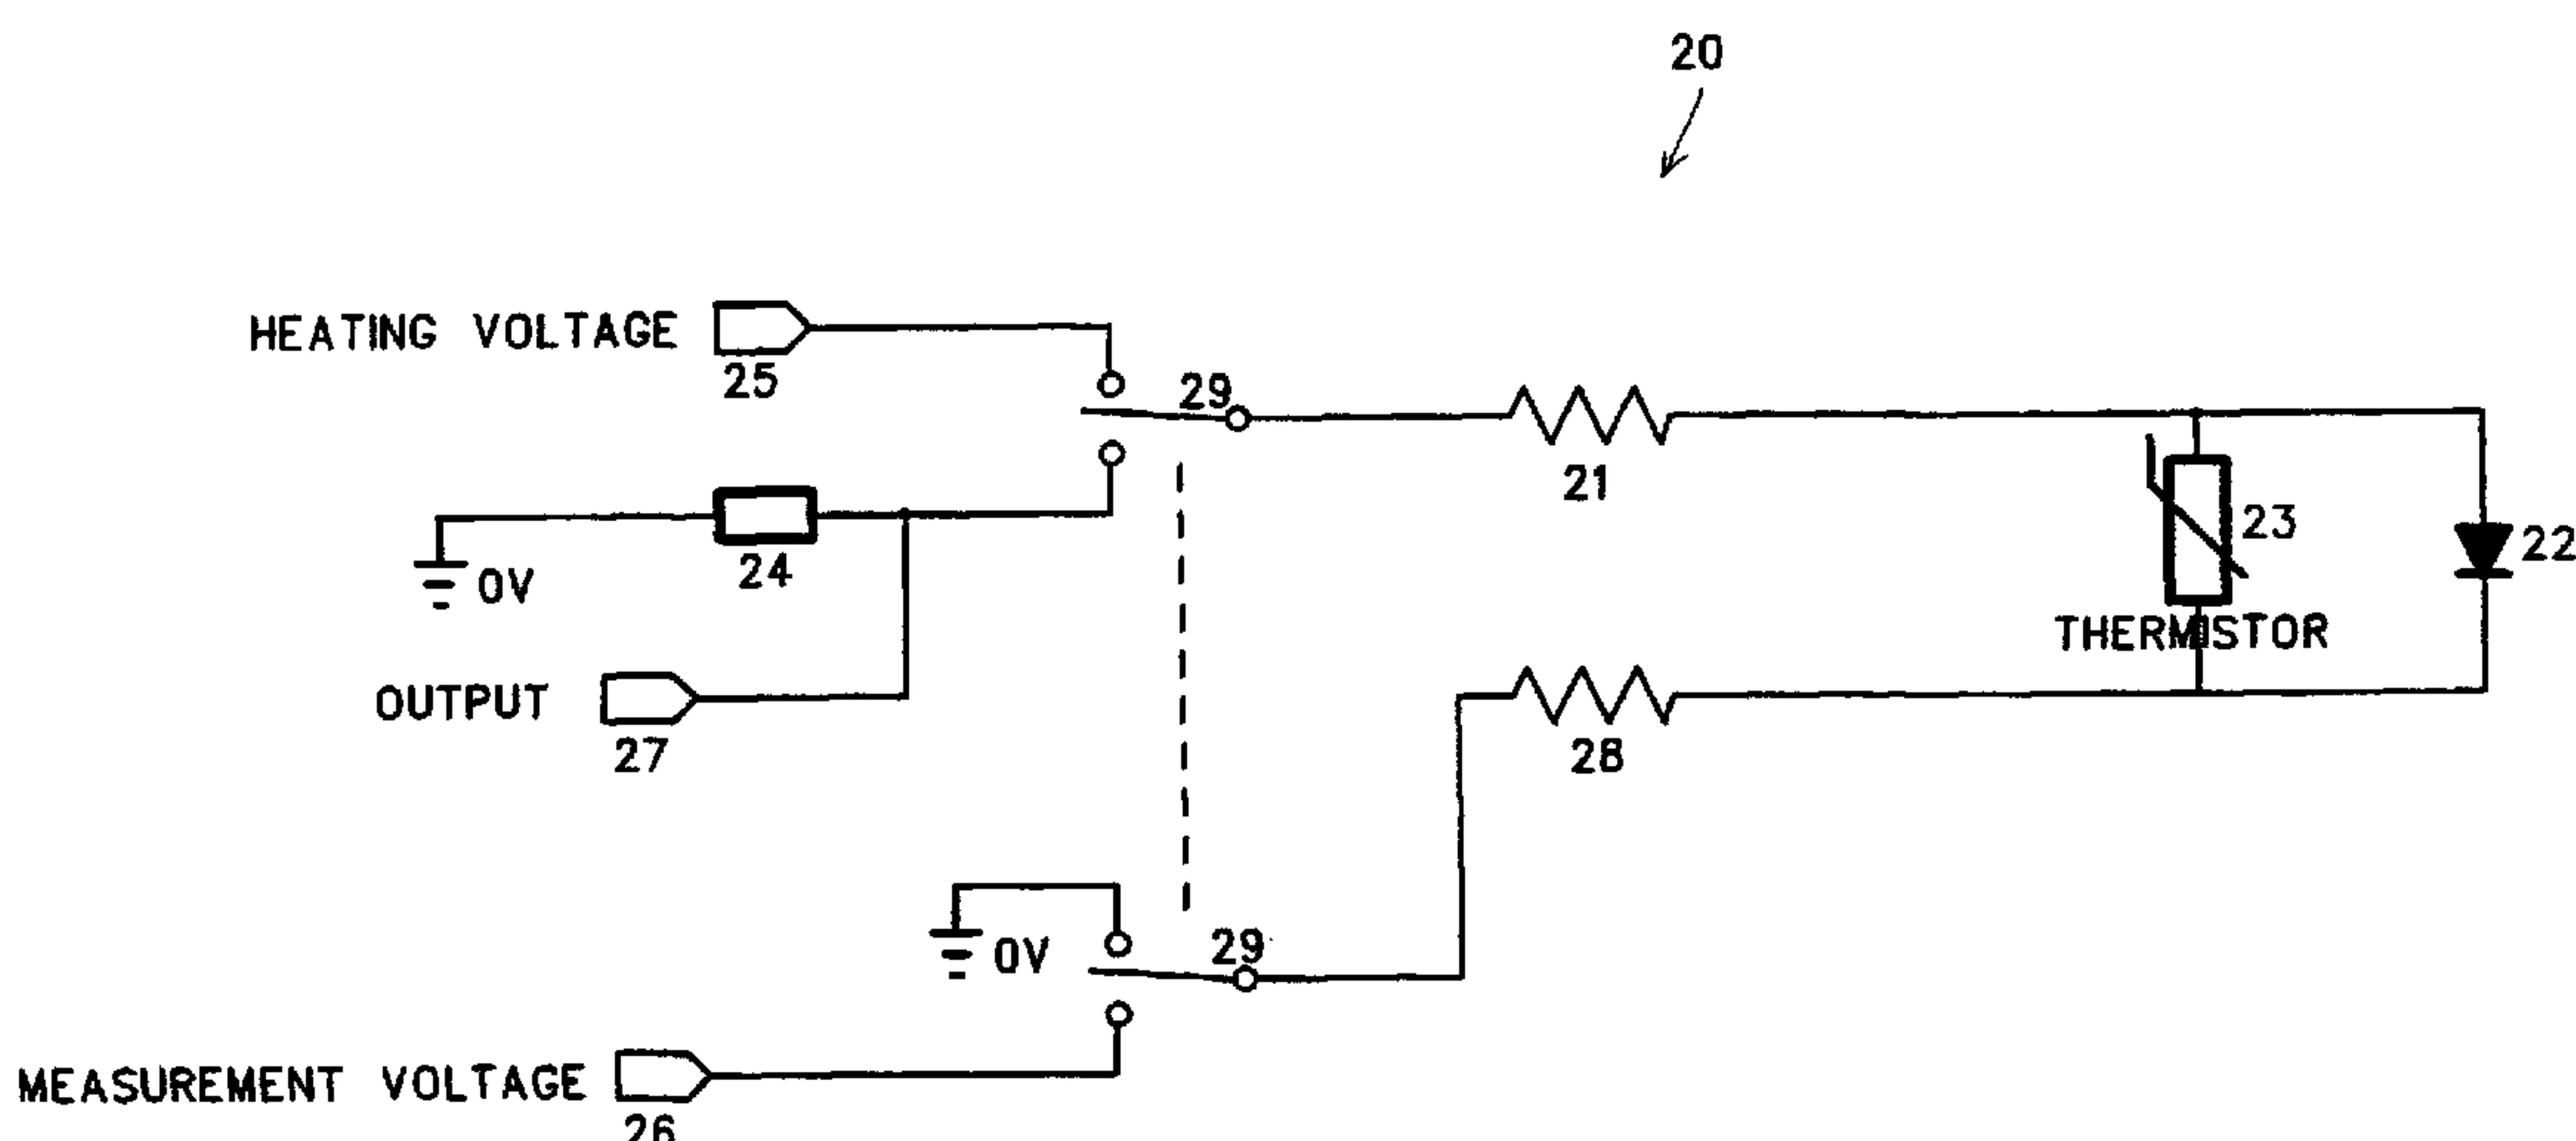

(57) Abrégé/Abstract:

The gases temperature supplied to a patient when the patient is undergoing treatment such as oxygen therapy or positive pressure treatment for conditions such as Obstructive Sleep Apnea (OSA) or Chronic Obstructive Pulmonary Disease (COPD) is often measured for safety and to enable controlling of the humidity delivered to the patient. The invention disclosed is related to measurement of properties, particularly temperature (thermister 23), of gases flowing through a heated tube (3), supplying gases to a patient, which utilises the heating wire (21, 28) within the tube.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
23 February 2006 (23.02.2006)

PCT

(10) International Publication Number
WO 2006/019323 A1

(51) International Patent Classification⁷: A61M 16/10

(21) International Application Number: PCT/NZ2005/000219

(22) International Filing Date: 19 August 2005 (19.08.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 534853 20 August 2004 (20.08.2004) NZ

(71) Applicant (for all designated States except US): **FISHER & PAYKEL HEALTHCARE LIMITED** [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 1706 (NZ).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PAYTON, Matthew, Jon** [NZ/NZ]; 15 Norman Lesser Drive, Meadowbank, Auckland, 1005 (NZ). **O'DONNELL, Kevin, Peter** [NZ/NZ]; 27 The Esplanade, Auckland (NZ). **CLARK, Andrew, Baden** [NZ/NZ]; 7 Bain Place, Bucklands Beach, Auckland, 1705 (NZ). **QUILL, Christopher, Simon, James** [NZ/NZ]; 23 Lewisham Street, Highland Park, Auckland, 1705 (NZ). **HAWKINS, Peter, Geoffrey** [NZ/NZ]; 56 Maungakiekie Avenue, Greenlane, Auckland, 1005 (NZ).

(74) Agents: **ADAMS, Matthew, D** et al.; A J Park, 6th Floor Huddart Parker Building, PO Box 949, Wellington, 6015 (NZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2006/019323 A1

(54) Title: APPARATUS FOR MEASURING PROPERTIES OF GASES SUPPLIED TO A PATIENT

(57) Abstract: The gases temperature supplied to a patient when the patient is undergoing treatment such as oxygen therapy or positive pressure treatment for conditions such as Obstructive Sleep Apnea (OSA) or Chronic Obstructive Pulmonary Disease (COPD) is often measured for safety and to enable controlling of the humidity delivered to the patient. The invention disclosed is related to measurement of properties, particularly temperature (thermister 23), of gases flowing through a heated tube (3), supplying gases to a patient, which utilises the heating wire (21, 28) within the tube.

- 1 -

“APPARATUS FOR MEASURING PROPERTIES OF GASES SUPPLIED TO A PATIENT”

TECHNICAL FIELD

5 This invention relates to an apparatus for measuring properties, such as temperature and humidity, of gases being supplied to a patient. Humidifiers are commonly controlled by measuring the temperature of gas at two points, adjacent to the output of the humidifier and proximal to the patient. This invention predominantly relates to the measurement of temperature of gas supplied to a patient at a point proximal to the patient.

BACKGROUND ART

10 The gases temperature supplied to a patient when the patient is undergoing treatment such as oxygen therapy or positive pressure treatment for conditions such as Obstructive Sleep Apnea (OSA) or Chronic Obstructive Pulmonary Disease (COPD) is often measured for safety and to enable controlling of the humidity delivered to the patient. Measurement of temperature near the patient is commonly performed using a probe inserted into the breathing tube, such as 15 that of Fisher & Paykel Healthcare Limited, US Patent Numbers US6,272,933 and US6,584,972. Such a temperature probe is connected to the humidifier through a cable that runs external to the breathing circuit. This approach has some drawbacks. In particular, the user must correctly install the temperature probe. If the probe is not correctly installed then the 20 humidification system may malfunction which may increase risk to the patient. Existing end of breathing tube sensors require sensor wires to be run down the outside of the breathing tube. This lowers reliability of the sensors due to the vulnerability of these wires. Alternatively, if these wires are run down the inside of the breathing tube there would be an increase of the resistance to airflow and the hygiene of the breathing circuit would be lowered.

DISCLOSURE OF THE INVENTION

25 It is an object of the present invention to provide a method of measuring properties of gases supplied to a patient that goes some way to overcoming the abovementioned disadvantages in the prior art or which will at least provide the industry with a useful choice.

Accordingly in a first aspect the present invention consists in an apparatus for 30 measuring properties of gases being supplied to a patient comprising:

a gases supply,

at least one delivery conduit including a heater wire for heating said conduit,

wherein said heater wire is utilised in an electrical circuit to determine said properties of said gases.

Preferably said electrical circuit is connected in series with said heater wire and provides a measurement or enables a calculation of an indication of at least one of 5 temperature, humidity, pressure and composition of said gases.

Preferably said electrical circuit is mounted and sealed on a printed circuit board that at least partially extends into the gases supplied to said patient through said at least one delivery conduit.

Preferably said electrical circuit is at least partially moulded into the wall of said 10 delivery conduit.

Preferably said electrical circuit includes a sensing means with known properties at ambient temperature such that said sensing means can be matched with said at least one delivery conduit.

Preferably said sensing means is a temperature sensor.

15 Preferably said electrical circuit includes at least one measuring means in series with said heater wire.

Preferably said at least measuring means is a temperature measuring means.

Preferably said temperature measuring means includes a thermistor and diode in parallel and a reference resistor.

20 Preferably said thermistor and said diode are located at the end of said delivery conduit near to said patient and said reference resistor is included in said gases supply means.

Preferably said gases supply means includes a device to supply gas flow, such as a blower, and a humidifier to humidify said gases from said blower.

25 Preferably said gases supply means is a humidifier.

Preferably said electrical circuit includes a gases property measuring means.

Preferably said gases property measuring means includes at least one of a sensor, band pass filter or thermistor and at least one reference resistor.

30 Preferably said at least one of a sensor, band pass filter or thermistor are located at the end of said delivery conduit near to said patient and said at least

- 2a -

one reference resistor and at least one band pass filter is included in said gases supply means.

Accordingly, in one aspect, the invention provides an apparatus for measuring properties of gases being supplied to a patient comprising:

- 5 a gases supply,
- at least one delivery conduit to convey said gases to said patient, including a heater wire to heat said gases flowing through said conduit,
- wherein said heater wire is located within, around or throughout said conduit, and said heater wire forms part of an electrical circuit capable of determining at least one property of said gases.

Accordingly, in a further aspect, the invention provides an apparatus for measuring properties of gases being supplied to a patient comprising: a gases supply, at least one delivery conduit to convey said gases to said patient, including a heater wire that, when carrying a current of a first polarity, heats said gases flowing through said conduit, wherein said heater wire is located within, around or throughout said conduit, and forms part of an electrical circuit also comprising a sensor and a diode connected in parallel, and wherein, when said heater wire carries a current of a second opposite polarity, said electrical circuit is capable of determining at least one property of said gases.

The invention consists in the foregoing and also envisages constructions of which the following gives examples.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred forms of the present invention will now be described with reference to the accompanying drawings.

5 **Figure 1** is an illustration of a respiratory humidifier system that may be used with the method of the present invention of measuring temperature of gases supplied to a patient.

Figure 2 is a circuit diagram of the electronics enabling the measurement of the temperature of gases to a patient, where the circuit is utilised when the system of the present invention is utilising DC heating and measuring voltages.

10 **Figure 3** is a circuit diagram of the electronics enabling the measurement of the temperature of gases to a patient, where the circuit is utilised when the system of the present invention is utilising DC or AC voltages for the heating and signal voltages.

Figure 4 is a cut away of a conduit including a circuit of the present invention on a printed circuit board and residing with the conduit in the area of gases flow.

BEST MODES FOR CARRYING OUT THE INVENTION

15 The present invention seeks to measure various properties, for example temperature or humidity, at the end of a gas delivery tube or conduit using sensors mounted on a wire, such as a wire used for heating the gases flow through the tube or conduit, where the wire resides within the delivery tube or conduit. A heated tube with a heating wire such as that described in Fisher & Paykel Healthcare Limited US Patent Number 6,078,730 or any other similar tube 20 and heating wire could be utilised with the present invention.

25 Referring to Figure 1 a ventilation and humidifying system as might be used with the present invention is shown. A patient 13 is receiving humidified and pressurised gases through a nasal cannula 12 connected to a humidified gases transportation pathway or inspiratory conduit 3 that in turn is connected to a humidifier 8 (including humidification chamber 5) supplied with gases from a blower 15 or other appropriate gases supply means.

30 The inspiratory conduit 3 is connected to the outlet 4 of the humidification chamber 5 that contains a volume of water 6. The humidification chamber 5 is preferably formed from a plastics material and may have a highly heat conductive base (for example an aluminium base) that is in direct contact with a heater plate 7 of humidifier 8. The humidifier 8 is provided with control means or an electronic controller 9 that may comprise a microprocessor based controller executing computer software commands stored in associated memory. Gases flowing through the inspiratory conduit 3 are passed to the patient by way of the nasal cannula

– 4 –

12, but may also be passed to the patient by way of other patient interfaces such as a nasal or full face mask.

The controller 9 receives input from sources such as user input means or dial 10 through which a user of the device may, for example, set a predetermined required value (preset value) of humidity or temperature of the gases supplied to patient 13. In response to the user set humidity or temperature value input via dial 10 and other possible inputs such as internal sensors that sense gases flow or temperature, or by parameters calculated in the controller, controller 9 determines when (or to what level) to energise heater plate 7 to heat the water 6 within humidification chamber 5. As the volume of water 6 within humidification chamber 5 is heated, water vapour begins to fill the volume of the chamber above the surface of the water and is passed out of the humidification chamber 5 outlet 4 with the flow of gases (for example air) provided from a gases supply means or blower 15 which enters the humidification chamber 5 through inlet 16.

The blower 15 may be provided with a variable speed pump or fan 2 which draws air or other gases through the blower inlet 17. The speed of the variable speed pump or fan 2 may be controlled by a further control means or electronic controller 18 which responds either to inputs from controller 9 or to user-set predetermined required values (preset values) of pressure or fan speed, via dial 19. Alternatively, the function of this controller 18 can be combined with the other controller 9.

A heating element or wire 11 is preferably provided within, around and throughout the conduit or tubing 3 to help prevent condensation of the humidified gases within the conduit. Such condensation is due to the temperature of the walls of the conduit being close to the ambient temperature, (being the temperature of the surrounding atmosphere) which is usually lower than the temperature of the humidified gases within the conduit. The heater element effectively replaces the energy lost from the gases through conduction and convection during transit through the conduit. Thus the conduit heater element ensures the gases delivered are at an optimal temperature and humidity.

Such a heater wire is commonly driven either with direct current (DC) or alternating current (AC) and in both cases the heating voltage is usually switched on and off to control the power applied to the heating element. In the present invention the heating element 11, which is most preferably a wire, is used along with an electronic circuit to determine properties of the gases supplied to the patient. The circuit (20 or 40 in Figures 2 and 3) is preferably connected

– 5 –

in series with the heater wire 11. The circuit may be on a printed circuit board, or wired within a housing that may be a plastic moulding in the gases flow, or a circuit board that is at least partially moulded within the wall of the conduit or tubing 3. The properties that may be measured include temperature, pressure, gas composition and humidity. Two embodiments of 5 the present invention are described below, one that operates using only a DC heating voltage and the other that can operate with a DC or AC heating voltage.

DC Heating Voltage

Figure 2 shows a circuit 20 that may be utilised for carrying out the method of measuring temperature of the present invention. When a DC heating voltage 25 is applied to 10 the heater wire the diode 22 conducts and current flows through the heater wire 21, 28 and the heater wire functions as normal and provides heating to the delivery tube 3. When the heating voltage 25 is switched off using switch 29, a measurement voltage 26, which has opposite polarity to the heating voltage 25 is applied to the heater wire. In this case, the current in the heater wire 21, 28 does not flow through the diode 22 but flows through the thermistor 23 and 15 through a reference resistor 24. The voltage across the reference resistor 24 can then be measured at the output 27 and the temperature of the gases determined. The voltage measurement 27 across the reference resistor, 24, is converted to a temperature using a look up table or an equation to calculate a value for temperature. This is similar to a commonly used technique where the thermistor 23 forms a potential divider with the reference resistor 24.

20 More generally, the thermistor may be replaced by an impedance (for example, a resistor and a capacitive sensor) for pressure or humidity measurement. Either the impedance can be measured by measuring the voltage across the reference resistor 24 or the rise-time could be determined by looking at the voltage across the reference resistor 24 in time.

25 Part of the circuit 20 would be included in the delivery conduit 3 and in particular the diode 22 and thermistor 23 (in parallel with one another) are preferably placed in series with the heater wire 21, 28 at a point in the heater wire at or near the end 30 (nearest the user 13, see Figure 1, 2 and 4) of the delivery tube 3, for example they may be interconnected on a printed circuit board, overmoulded with plastic for sealing and mounted in the gases stream through the delivery conduit as shown in Figure 4. Furthermore, the circuit may be formed by 30 interconnected parts in a housing, for example, a plastic housing, that protrudes from the plastic wall of the delivery tube into the gases flow through the conduit, in order to measure that gases properties. All other parts of the circuit 20 including the reference resistor 24 and

– 6 –

the switching circuitry 29 would be included in the control circuitry of the humidifier 8.

The thermistor's value can be chosen to have different resistance curves with known properties at ambient temperature. The choice of a particular thermistor value for use with the circuit allows identification by the control system of the present invention and matching of that 5 thermistor value with a specific conduit or tubing 3. Such that different thermistor values can be matched with a particular and appropriate conduit types and upon connection of the conduit to a humidifier or blower device, the control system can identify that thermistor and apply the appropriate control strategy to the heating of the conduit.

AC or DC Heating Voltage

10 The circuit shown in Figure 2 is intended to be used when a DC heating voltage is used in conjunction with the heater wire, delivery conduit and system as shown in Figure 1. An alternative embodiment of a circuit 40 that would provide measurement of the gases properties, such as temperature and is suitable for AC and DC voltages, is shown in Figure 3. A number of voltage signals 51, 52, 53, which are at different frequencies, are added together 15 at an adder 50. These signals include at least one heating signal 51 and at least one measuring signal 53. The combination of these signals passes down the heater wire 44, creating currents (heating and measuring) in the heater wire 44. A number of parallel paths are established 41, 43, 45 each containing a filter (for example, as shown in Figure 3, one low pass filter 41 and three band pass filters 43, 45, 48) that each pass a different frequency range. These parallel 20 paths (that is, filters, thermistors and/or sensors) are preferably located at the end 30 of the delivery tube 3, in a similar manner as described in relation to Figure 2. The parallel paths allow the heating current to be passed through a different path to the measurement currents. It also allows multiple measurement signals to be passed through the heater wire so that different properties of the gases (e.g. temperature, pressure, humidity, composition) may be measured.

25 The heating and measurement currents return through the heater wire 46 and can be filtered through a number of measurement filters 47, 49, 57 in parallel that pass frequency bands that correspond to the filters, 41, 43, 45 located at the end 30 of the tube 3. The heating current takes a different path than the measurement currents. The measurement currents each take a different path depending on their frequency and this allows each measurement current to 30 be measured by passing it through a reference resistor 48, 54 or similar. Again a look up table or equation may be used to convert the voltage across the reference resistor 48, 54 to, for example, a temperature. In the preferred embodiment of the present invention the

- 7 -

measurement filters 47, 49, 57 would be included in the humidifier 8 control circuitry.

In a further embodiment one or more of the sensing elements 55, 56 at the end 30 of the delivery tube 3 could be replaced by a fixed impedance to allow identification of the tube so that different control algorithms can be used for different conduits or tubes.

5 Figure 4 shows a cutaway view of a conduit 3 with a printed circuit board 60 housing the parts to one of the circuits of the present invention described above with reference to Figures 2 or 3. The circuit board 60 is connected to the heating wires 21, 28 and as such is positioned within the conduit 3. In this manner, the thermistor 23 included on the board 60 is exposed to the gases flowing through the conduit 3 and can provide measurements of the 10 properties of the gases.

The circuits and method of the present invention can be applied to a number of applications of these technologies for humidification and breathing circuit products. For example, the measurement of the temperature or humidity at the end of the delivery tube (or in a patient interface, for example, nasal cannula or mask) can be used to better control the 15 humidifier, such that a more accurate temperature of gases can be supplied to the patient, providing optimal patient comfort and therapy. Additionally, other gases properties may be measured, such as the gases pressure or gas composition near the patient.

The apparatus of the present invention eliminates the need for external wires for 20 sensing gases properties, as is required by the prior art. Furthermore the apparatus of the present invention only uses two pins or contacts (as opposed to four pins as used in current heated tube implementations). This means the system of the present invention is likely to be more reliable as the contacts/pins are likely to be less prone to breakage. The utilisation of the heater wire for measuring gases properties may also reduce the cost of the breathing tube 3 and associated parts, especially if the breathing tube is to be disposable.

WE CLAIM:

1. An apparatus for measuring properties of gases being supplied to a patient comprising:
 - a gases supply,
 - at least one delivery conduit to convey said gases to said patient, including a heater wire that, when carrying a current of a first polarity, heats said gases flowing through said conduit,
 - wherein said heater wire is located within, around or throughout said conduit, and forms part of an electrical circuit also comprising a sensor and a diode connected in parallel, and
 - wherein, when said heater wire carries a current of a second opposite polarity, said electrical circuit is capable of determining at least one property of said gases.
2. An apparatus for measuring properties of gases being supplied to a patient according to any one of claim 1 wherein said electrical circuit is connected in series with said heater wire.
3. An apparatus for measuring properties of gases being supplied to a patient according to any one of claims 1 or 2 wherein said property of said gases is at least one of temperature, humidity, pressure and composition of said gases.
4. An apparatus for measuring properties of gases being supplied to a patient according to any one of claims 1 to 3 wherein said sensor is a thermistor that in use gives an indication of the temperature of the gases in said at least one delivery conduit.
5. An apparatus for measuring properties of gases being supplied to a patient according to any one of claims 1 to 4 wherein said electrical circuit comprises an impedance that in use gives an indication of at least one of pressure and humidity of said gases in said at least one delivery conduit.

6. An apparatus for measuring properties of gases being supplied to a patient according to any one of claims 1 to 5 wherein said electrical circuit is mounted and sealed on a printed circuit board that at least partially extends into the gases supplied to said patient through said at least one delivery conduit.
7. An apparatus for measuring properties of gases being supplied to a patient according to any one of claims 1 to 5 wherein said electrical circuit is mounted and sealed on a printed circuit board that is at least partially moulded into the wall of said delivery conduit.
8. An apparatus for measuring properties of gases being supplied to a patient according to claim 6 wherein said circuit board at least partially moulded into the wall of said delivery conduit.
9. An apparatus for measuring properties of gases being supplied to a patient according to any one of claims 1, 7 or 8 wherein said apparatus includes a control system to control heating of said heater wire and said electrical circuit includes a sensor that is capable of being matched to a particular delivery conduit such that said control system can identify said sensor and apply a particular control strategy to said heater wire and said particular conduit.
10. An apparatus for measuring properties of gases being supplied to a patient according to claim 9 wherein said sensor is a temperature sensor.
11. An apparatus for measuring properties of gases being supplied to a patient according to claim 4 wherein said thermistor and diode are mounted on said circuit board such that they are substantially separated.
12. An apparatus for measuring properties of gases being supplied to a patient according to claim 11 wherein said thermistor and said diode are located at the end of said delivery conduit near to said patient.

- 10 -

13. An apparatus for measuring properties of gases being supplied to a patient according to any one of claims 1 to 12 wherein said gases supply includes a device to supply gas flow, and a humidifier to humidify said gases.

14. An apparatus for measuring properties of gases being supplied to a patient according to claim 13 wherein said device to supply gas flow comprises a blower, said humidifier humidifying said gases from said blower.

15. An apparatus for measuring properties of gases being supplied to a patient according to any one of claims 1 to 12 wherein said gases supply is a humidifier.

1/4

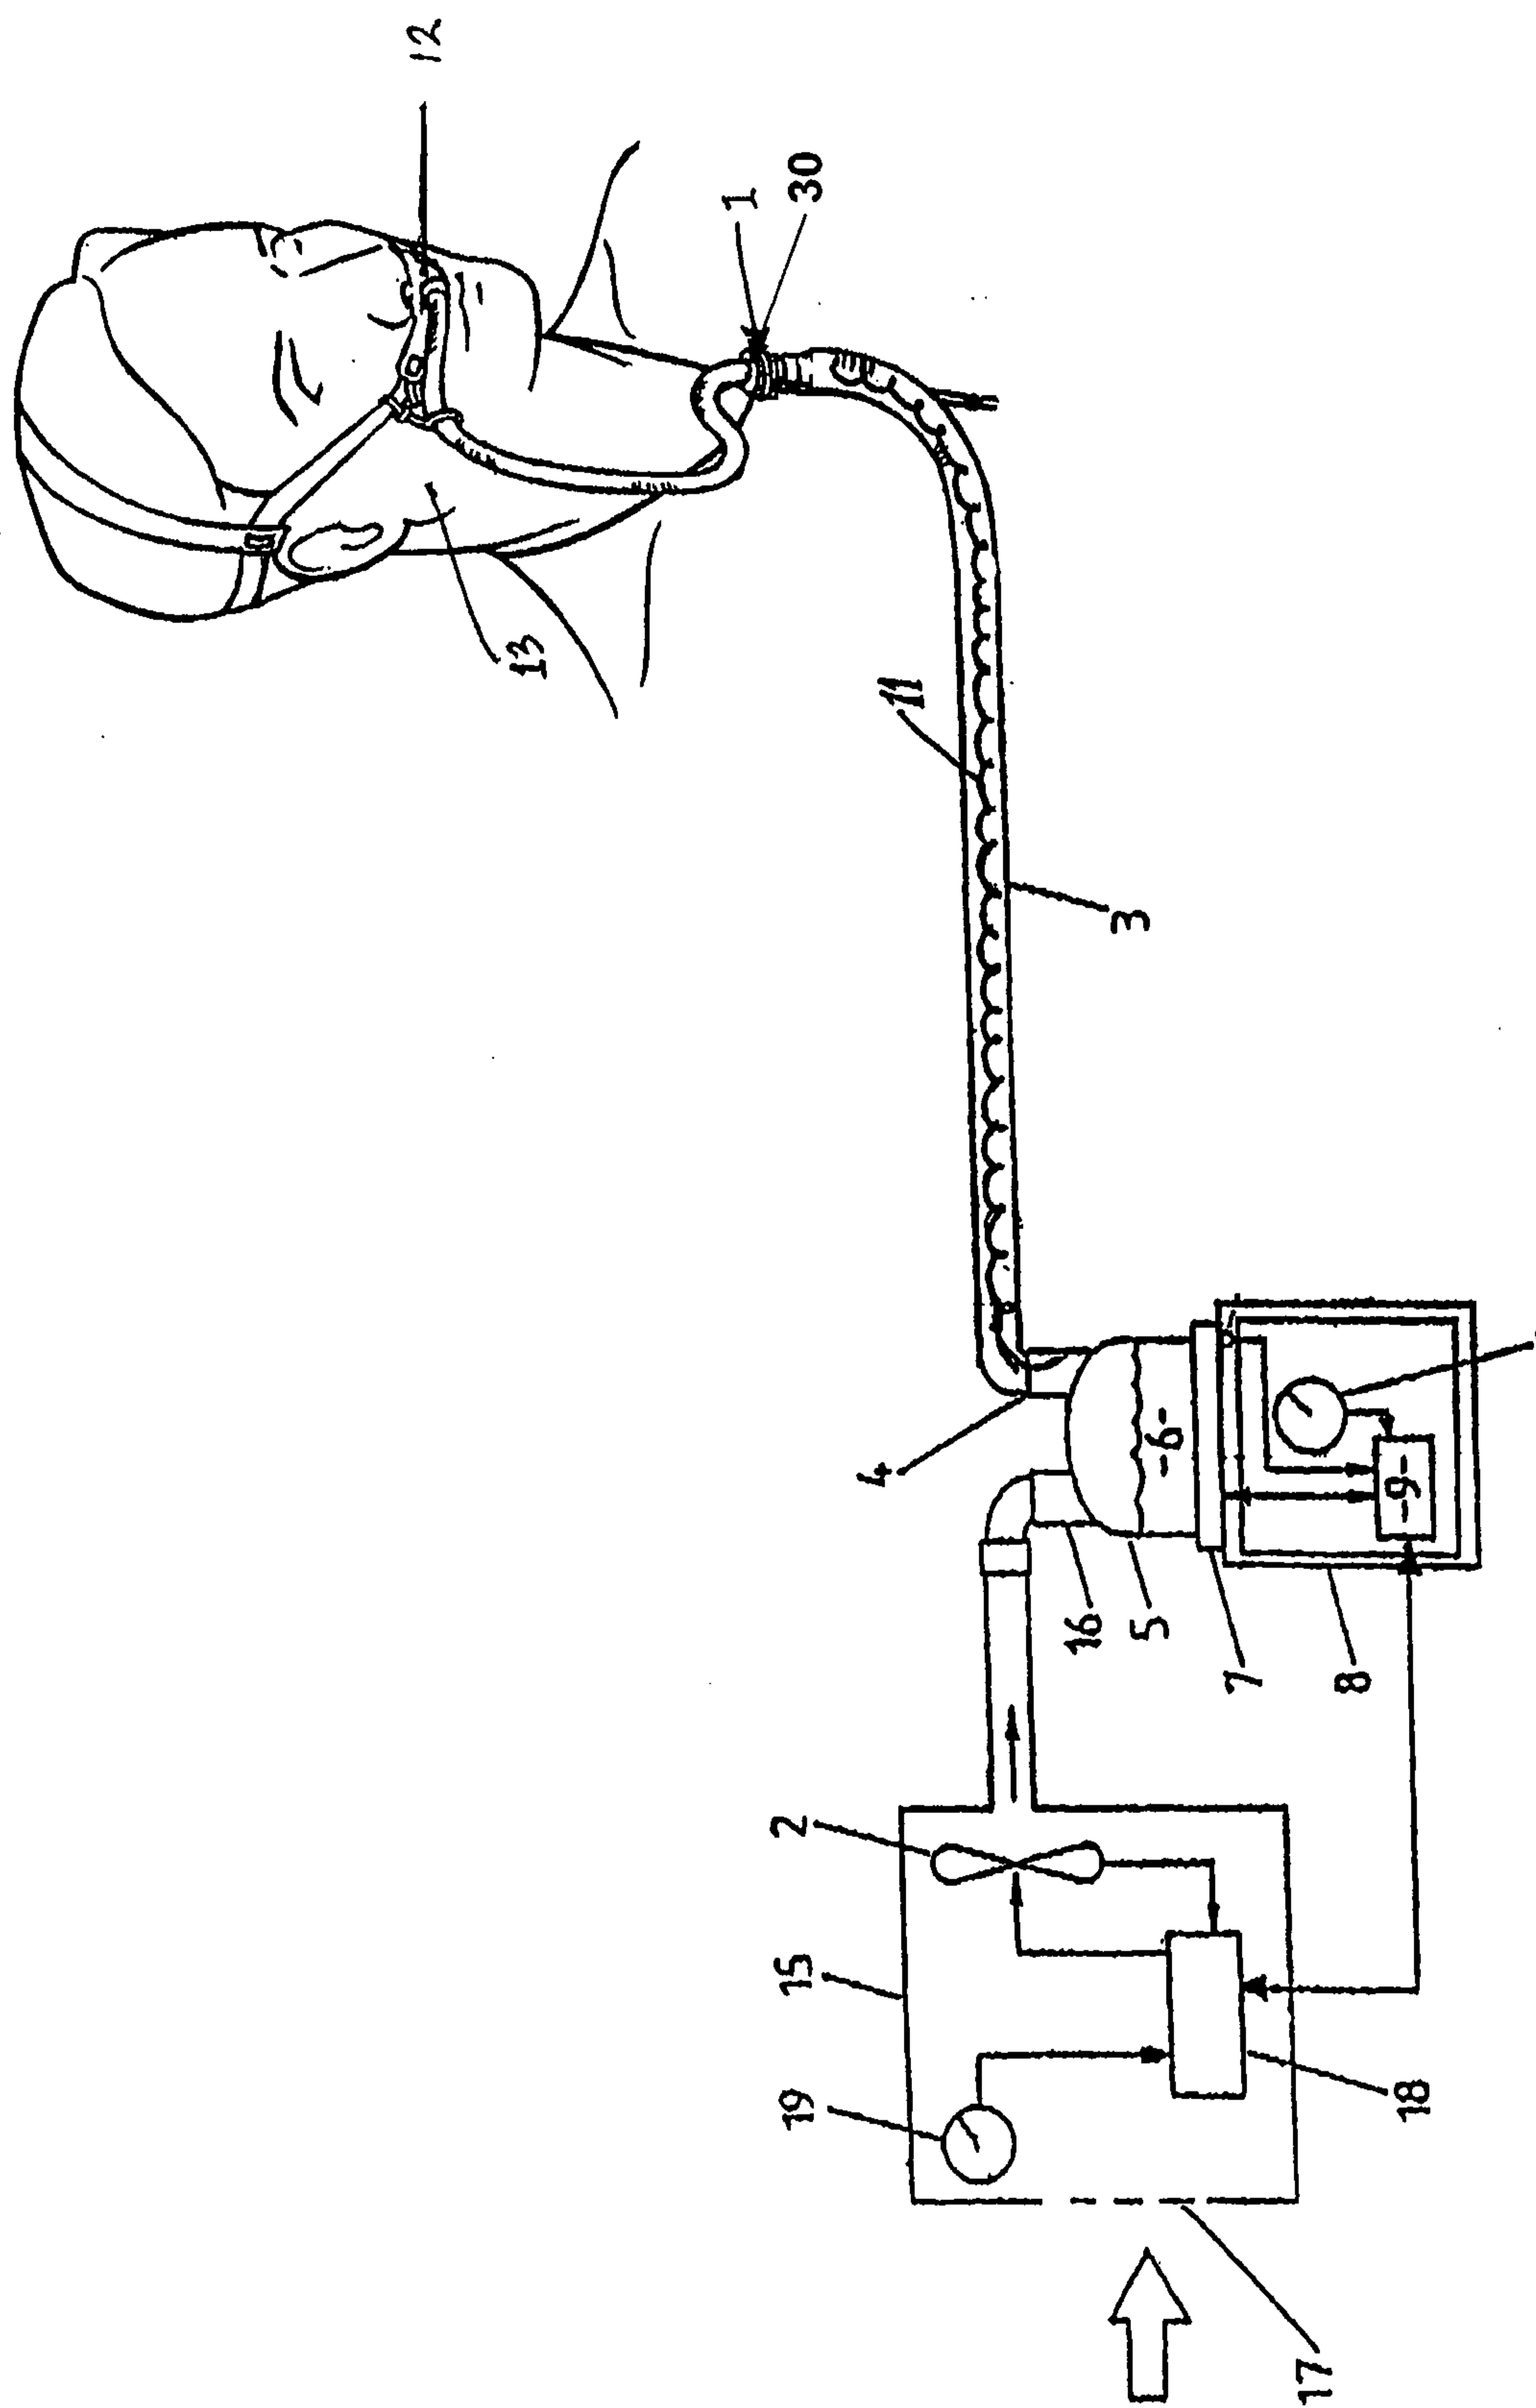


Figure 1

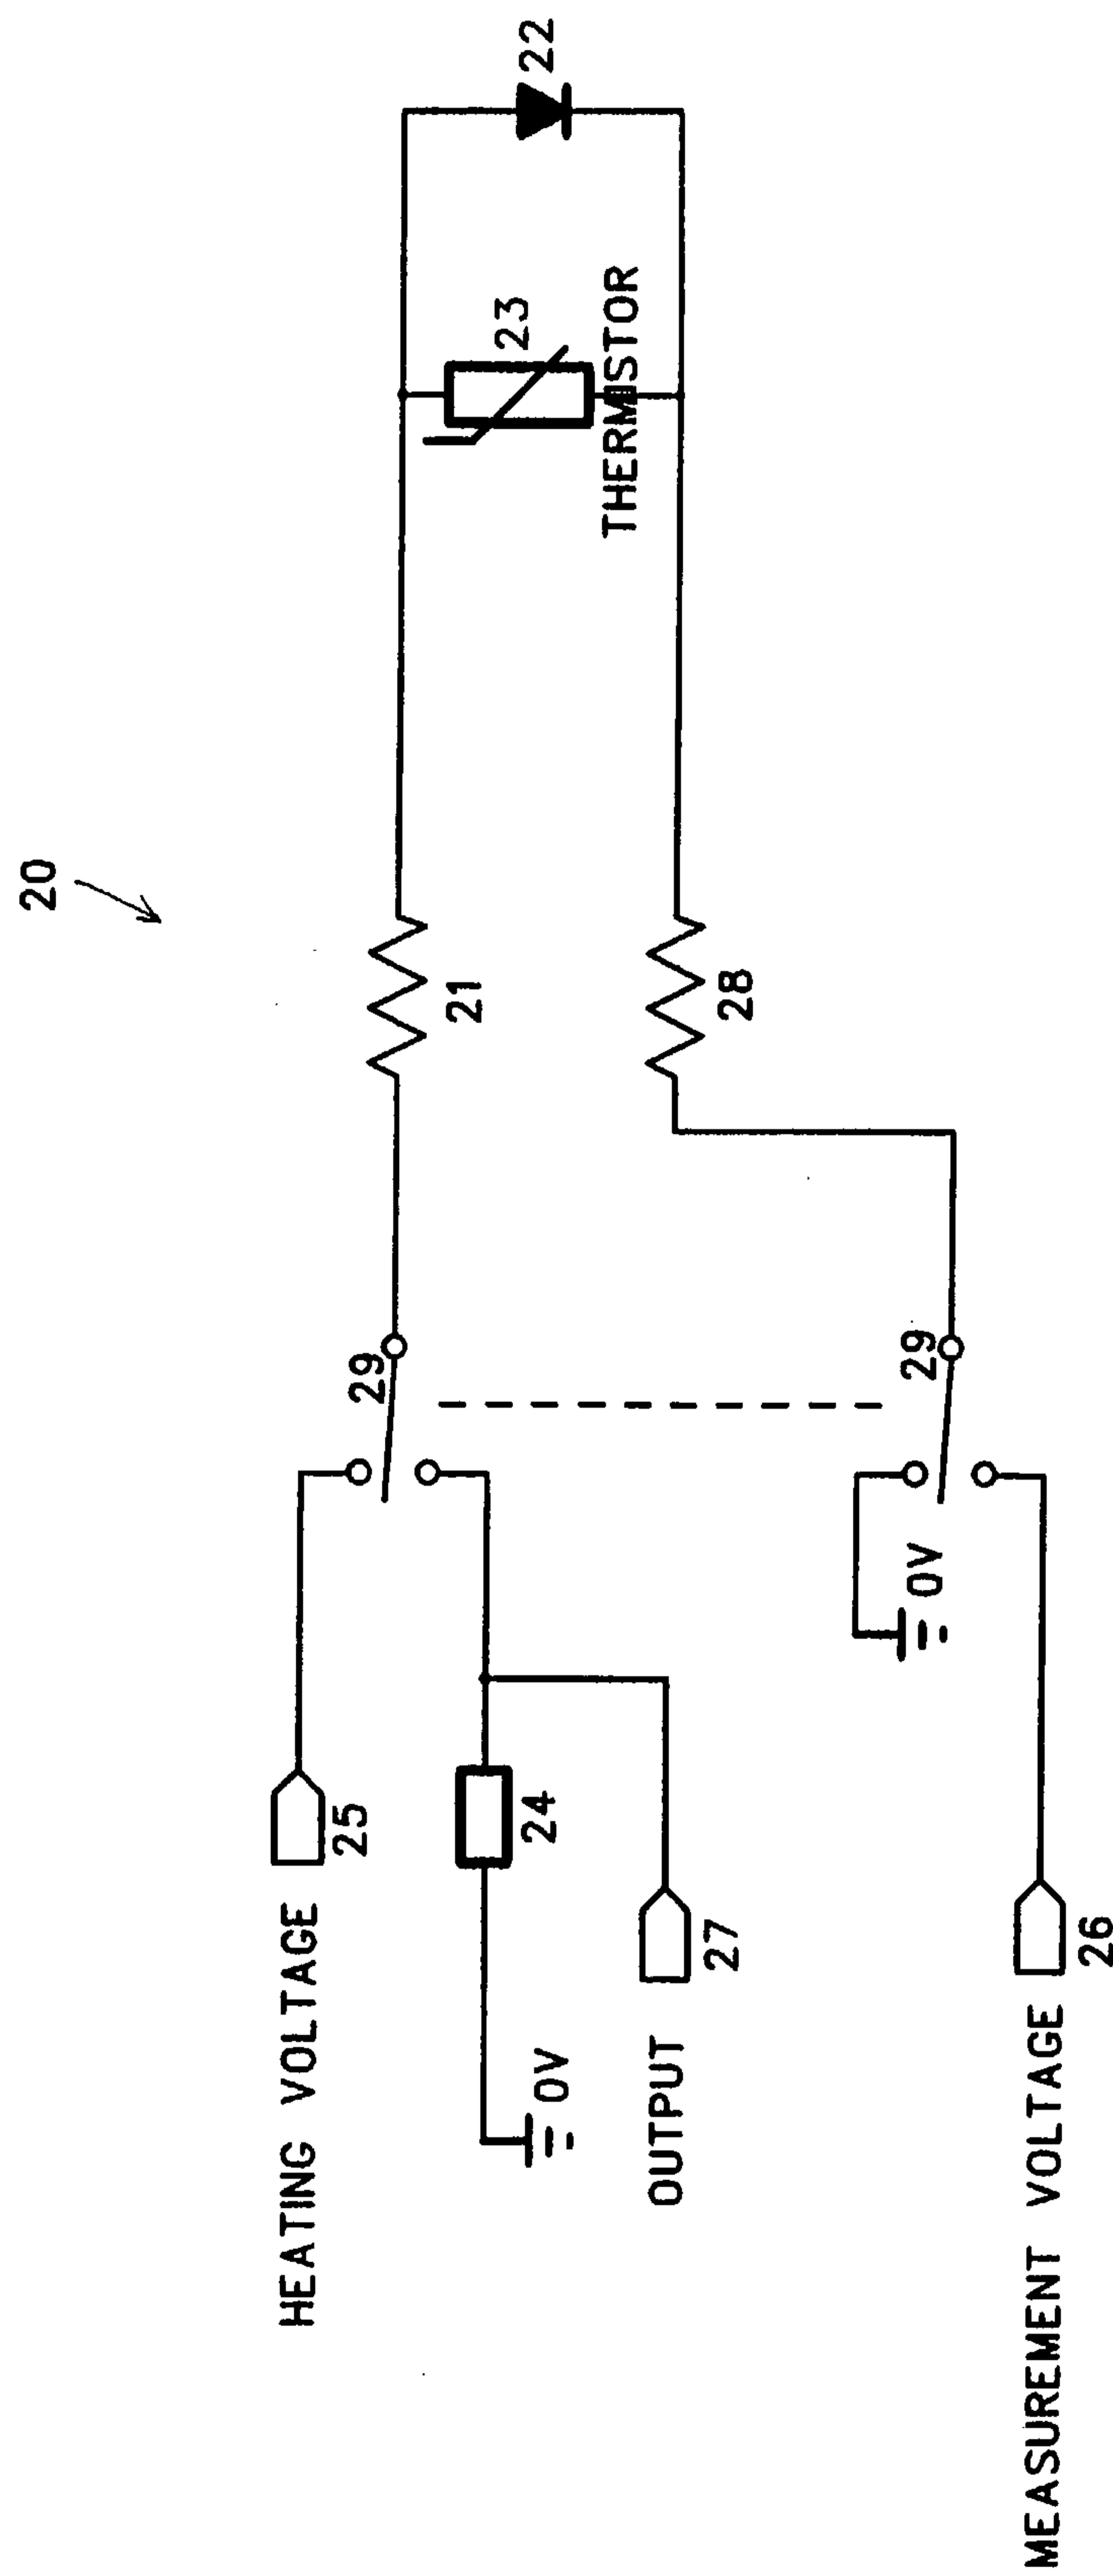


Figure 2

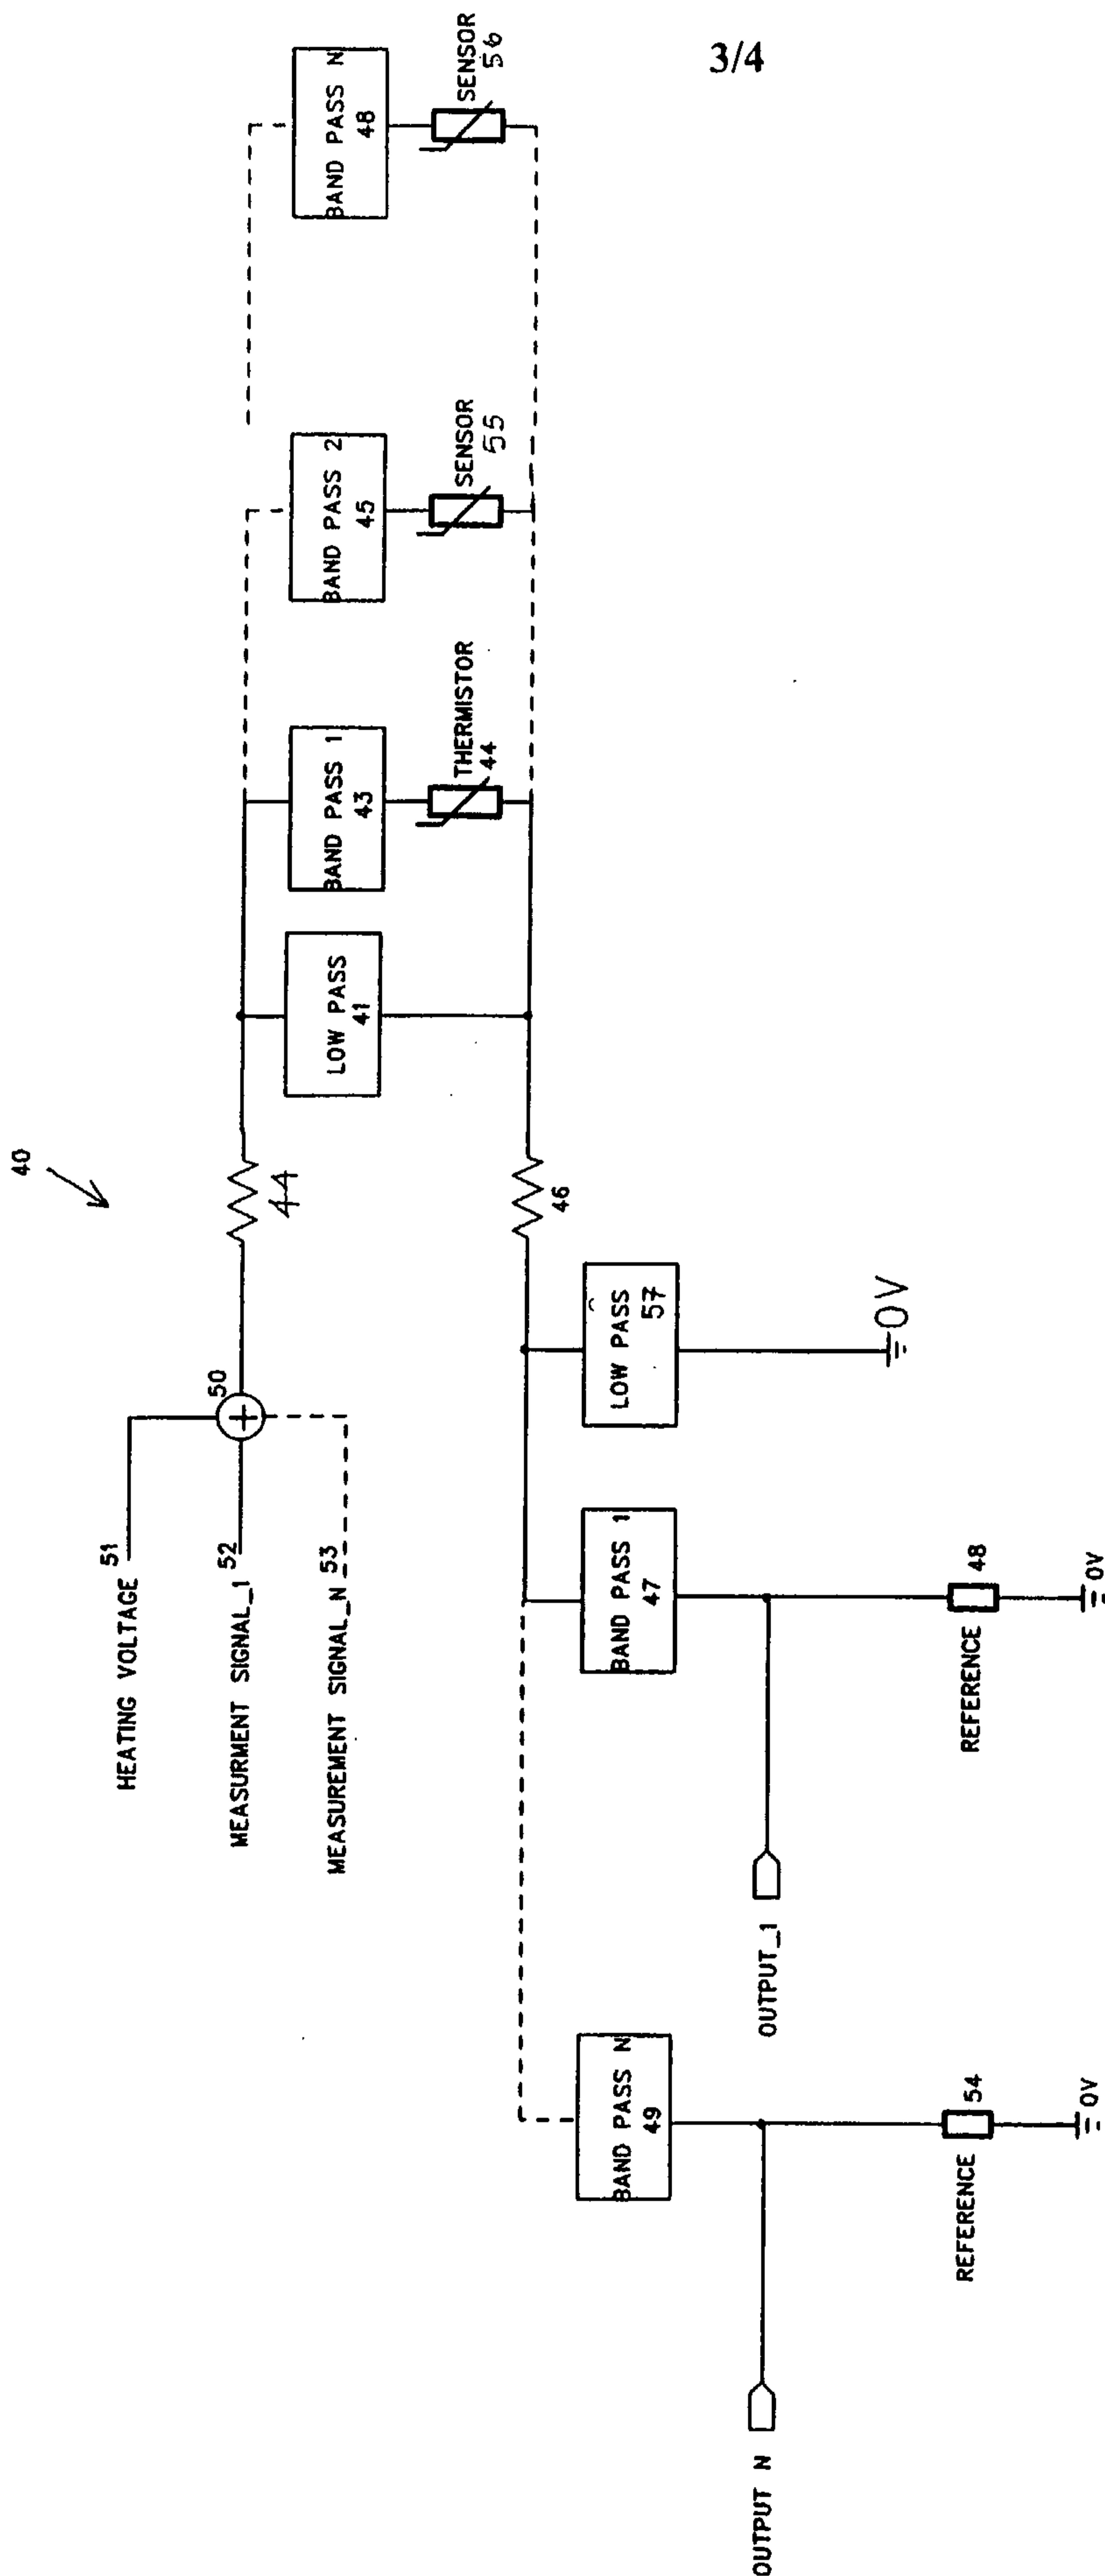


Figure 3

4/4

Figure 4

