

(12) UK Patent Application (19) GB 2547951 (13) A
 (43) Date of A Publication 06.09.2017

(21) Application No: 1603826.7

(22) Date of Filing: 04.03.2016

(71) Applicant(s):

Xaar Technology Limited
 Science Park, CAMBRIDGE, CB4 0XR,
 United Kingdom

(72) Inventor(s):

Athanasiros Kanaris
 Colin Brook
 Alfonso Cameno Salinas

(74) Agent and/or Address for Service:

Mathys & Squire LLP
 The Shard, 32 London Bridge Street, LONDON,
 SE1 9SG, United Kingdom

(51) INT CL:
 B41J 2/14 (2006.01)

(56) Documents Cited:

GB 2520574 A	EP 1366904 A2
EP 1364790 A2	EP 1228876 A2
EP 1172214 A1	EP 1101615 A1
WO 2012/074514 A1	JP 2010149371 A
US 6247782 B1	US 20150266292 A1
US 20150258791 A1	US 20150239243 A1
US 20110102508 A1	US 20090309917 A1
US 20080259115 A1	
JP H1086374	

(58) Field of Search:

INT CL B41J
 Other: EPDOC WPI TXTE TXTT

(54) Title of the Invention: **Droplet deposition head and manifold component therefor**
 Abstract Title: **Droplet deposition head and manifold component therefor**

(57) A droplet deposition head 10 comprises one or more manifold component 100, 50(a) having one or more branched inlet paths 180 and a plurality of widening inlet chambers 55(a), 55(b). The branched inlet paths comprising a main branch 181 which branches into at least two sub-branches 182(a), 182(b). Each branched inlet path is fluidically connected to supply fluid to two or more of the widening inlet chambers. The manifold component comprises a plurality of layers (910, 920, 930, 940, 950, Fig.7A). The plurality of layers provide, in each of a plurality of planes parallel to said layers, multiple curved fluid paths, and a plurality of fluid paths (960, 970, Fig.7B) perpendicular to said layers that fluidically connect together curved paths in different planes. The manifold component comprises a mount (76, Fig.4) for receiving an actuator component that provides at least one array of fluid chambers 150, each array extending in an array direction. The width of each widening inlet chamber in said array direction 500 increasing with distance in the ejection direction 505 from a first end to a second end thereof.

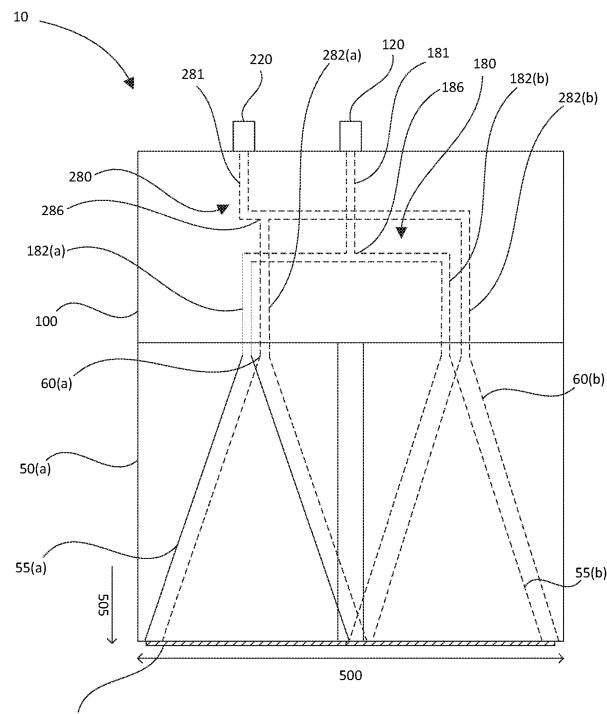
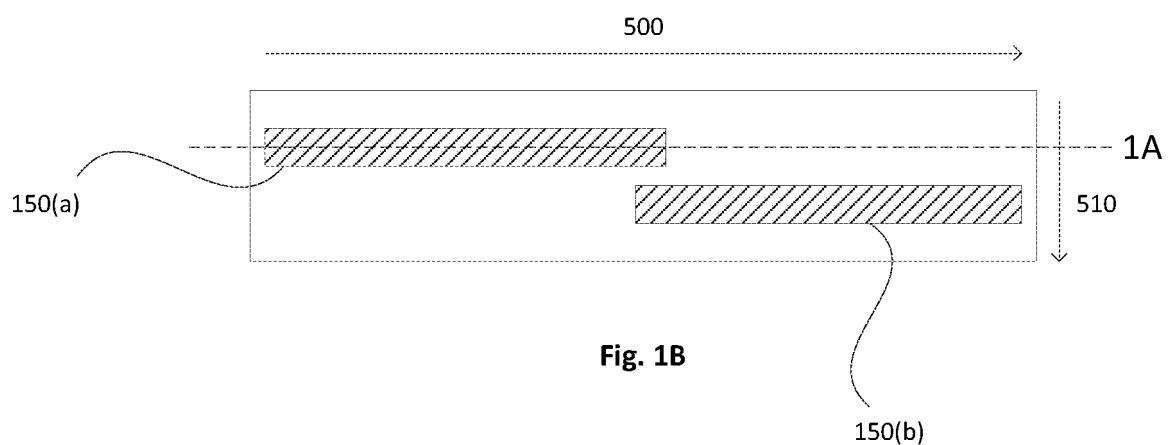
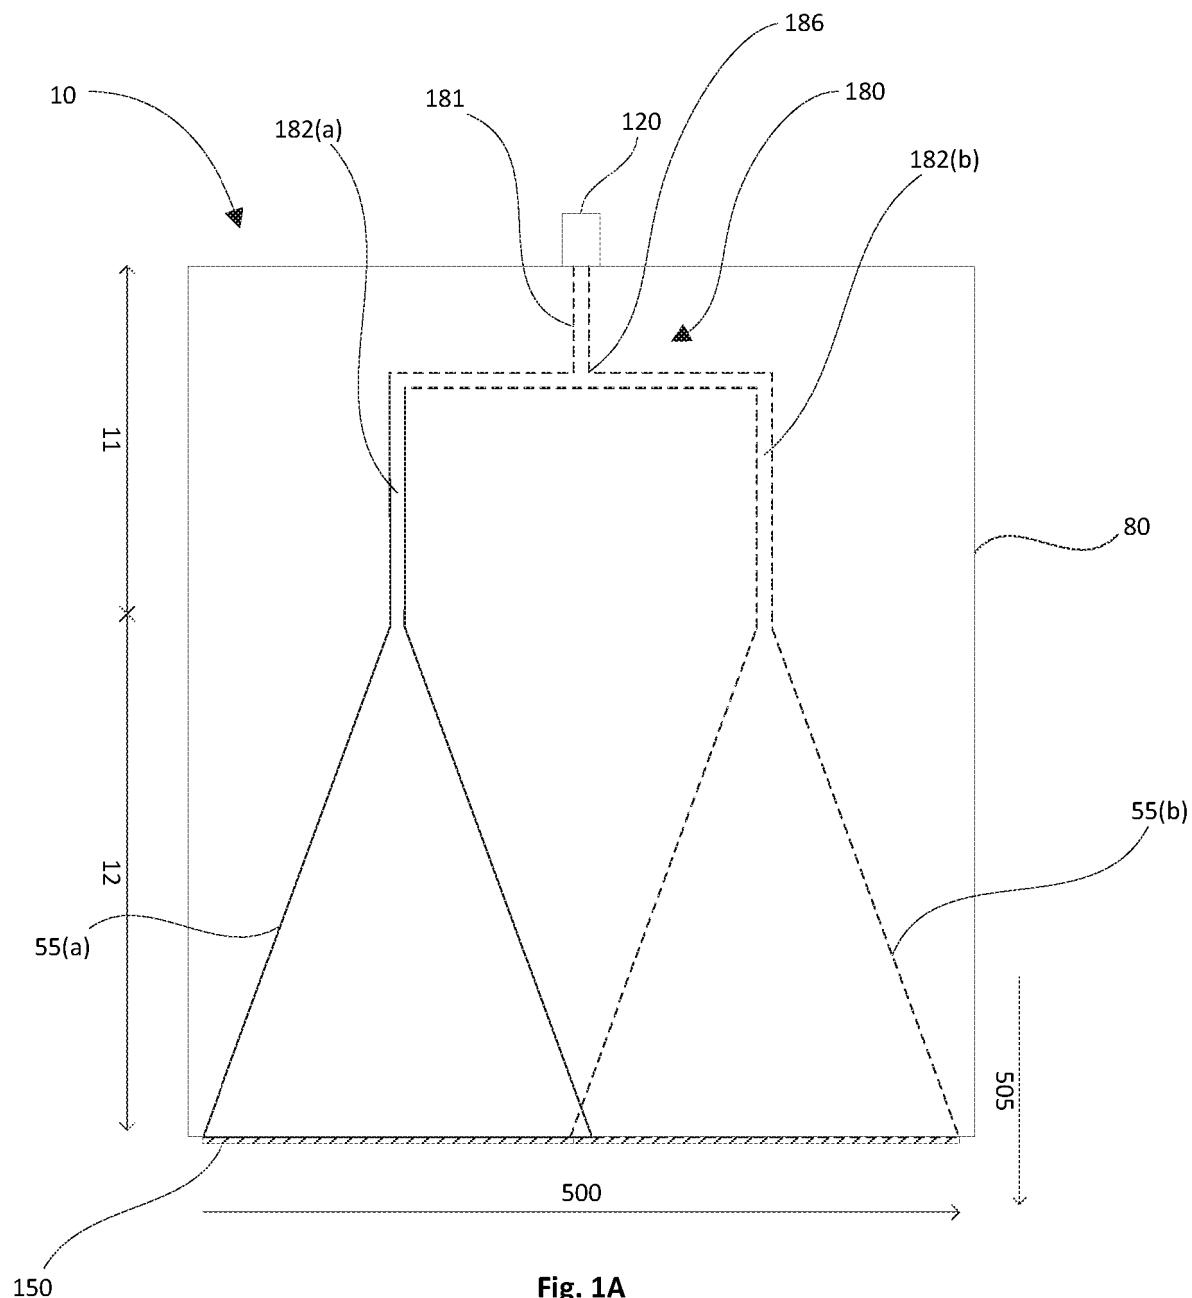
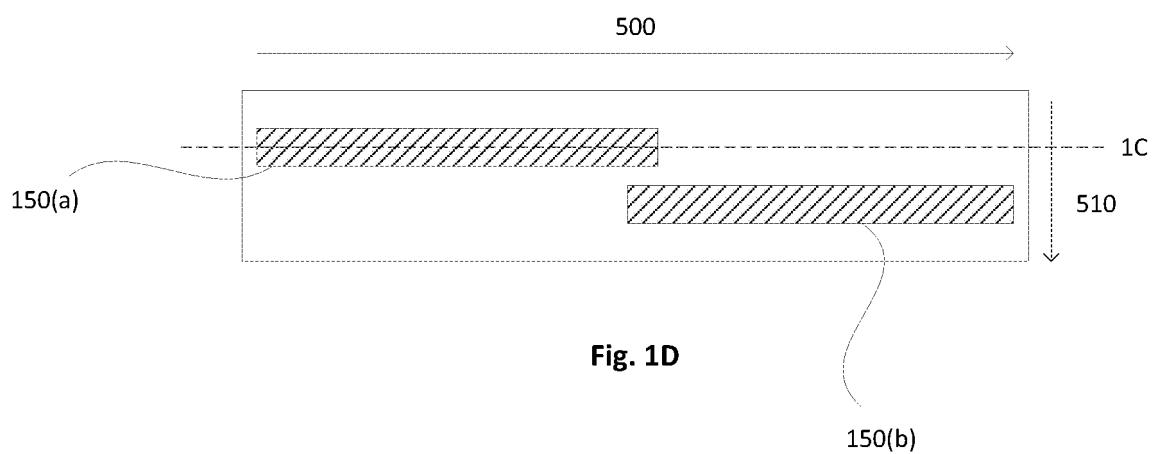
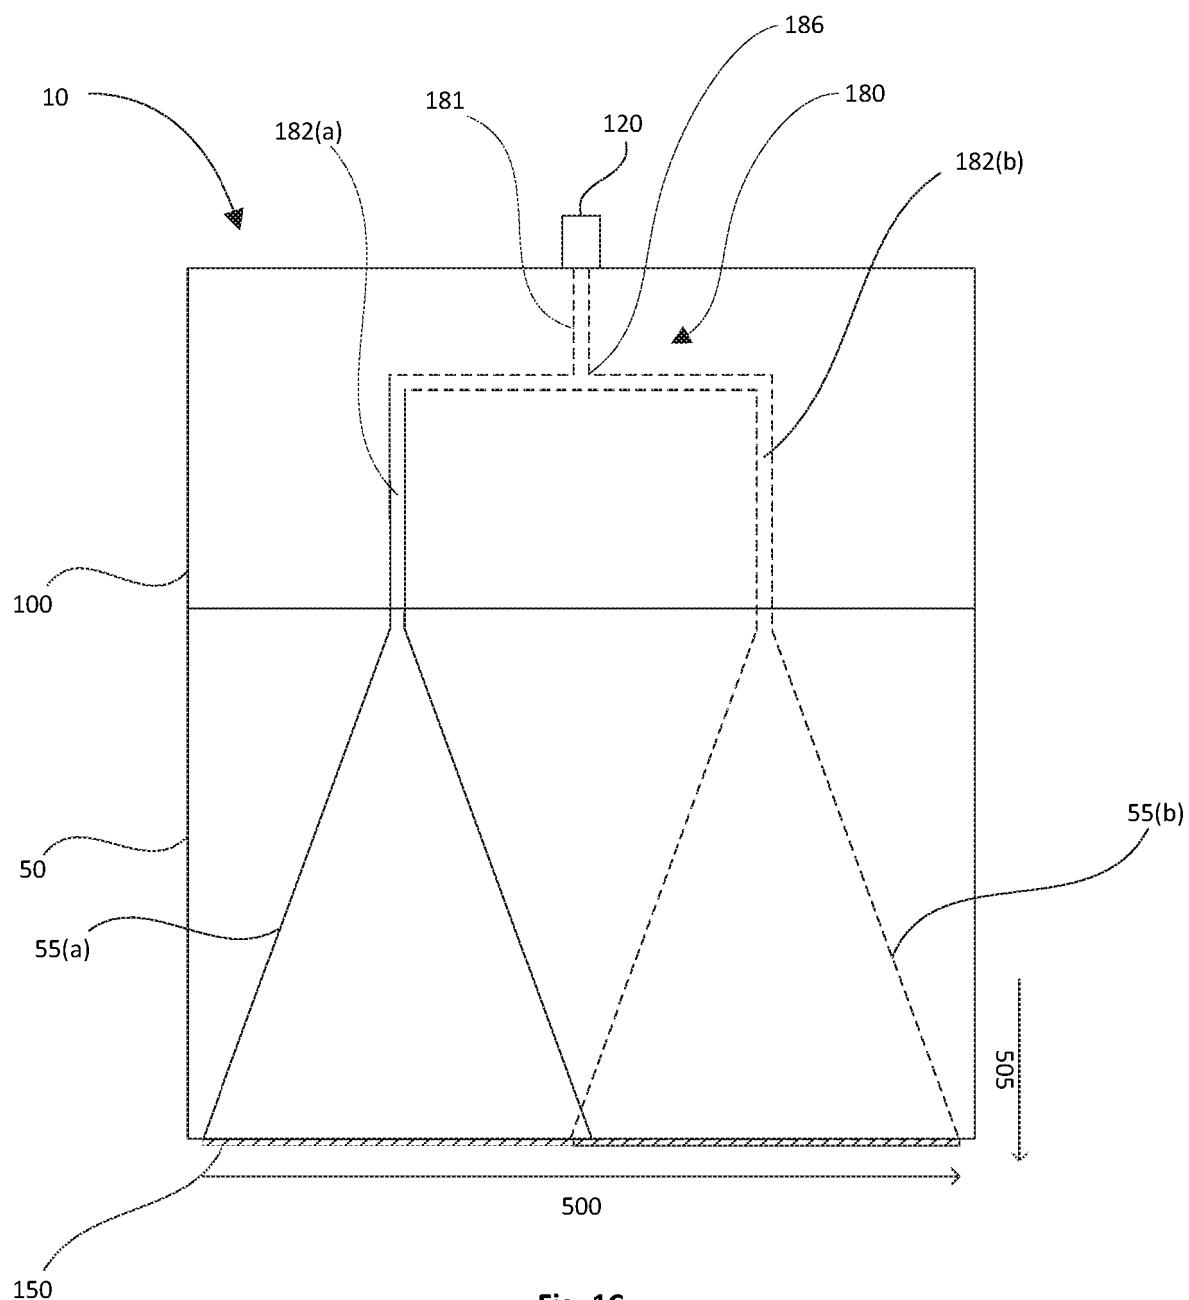
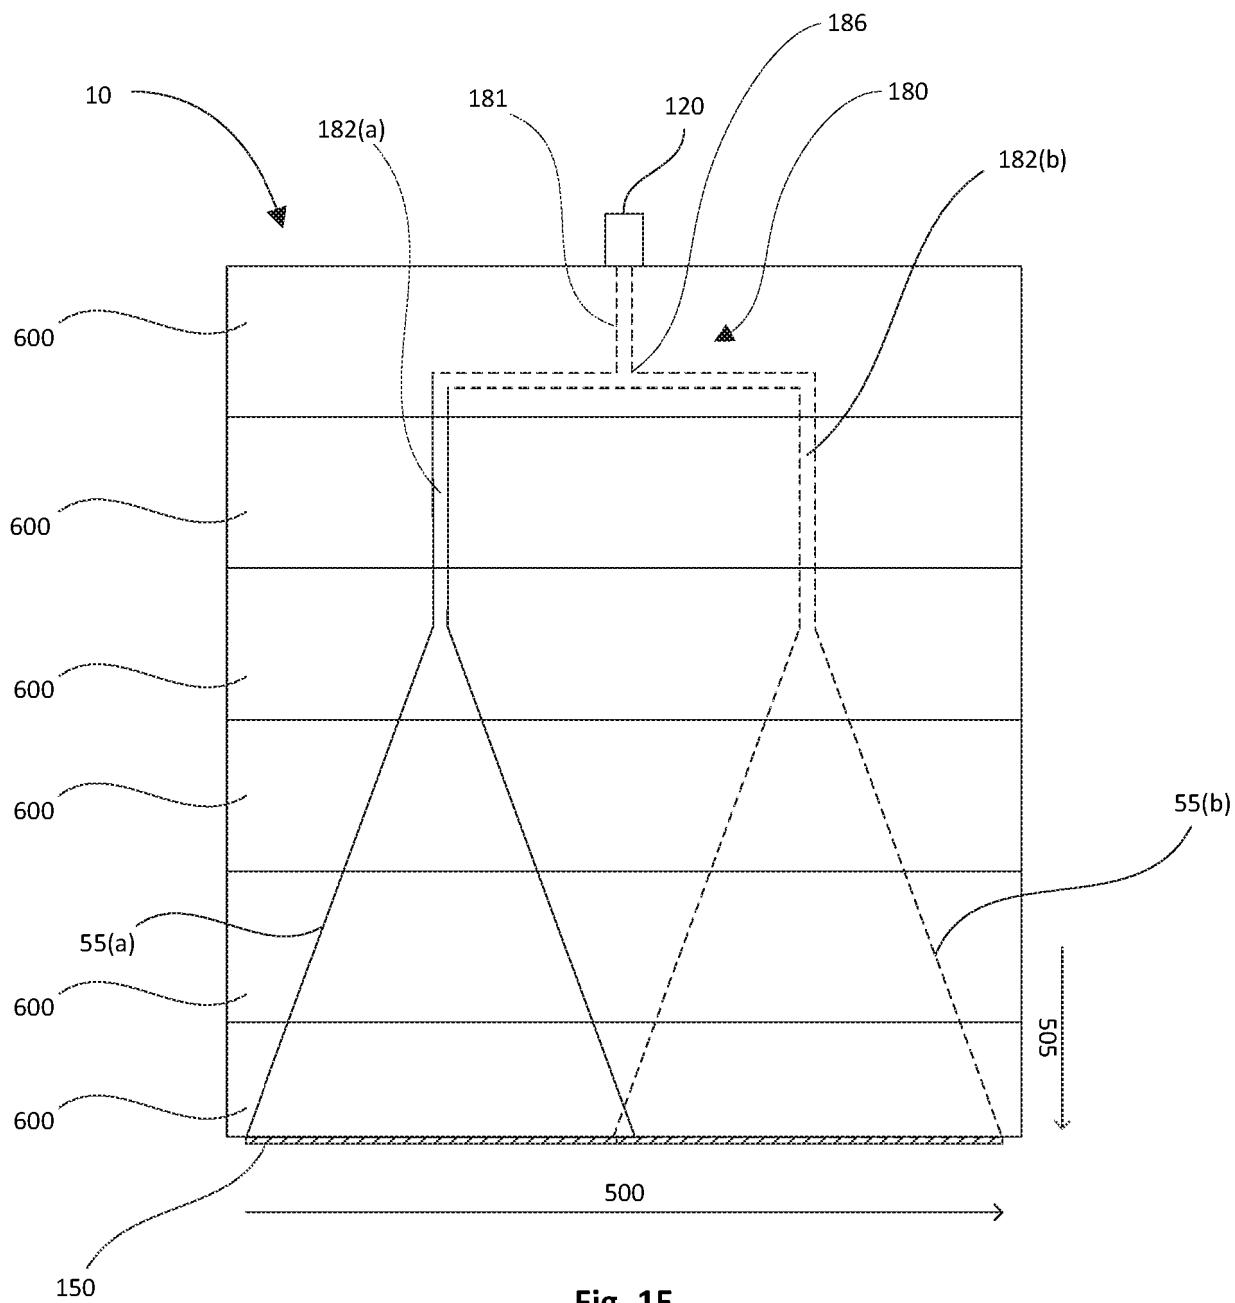
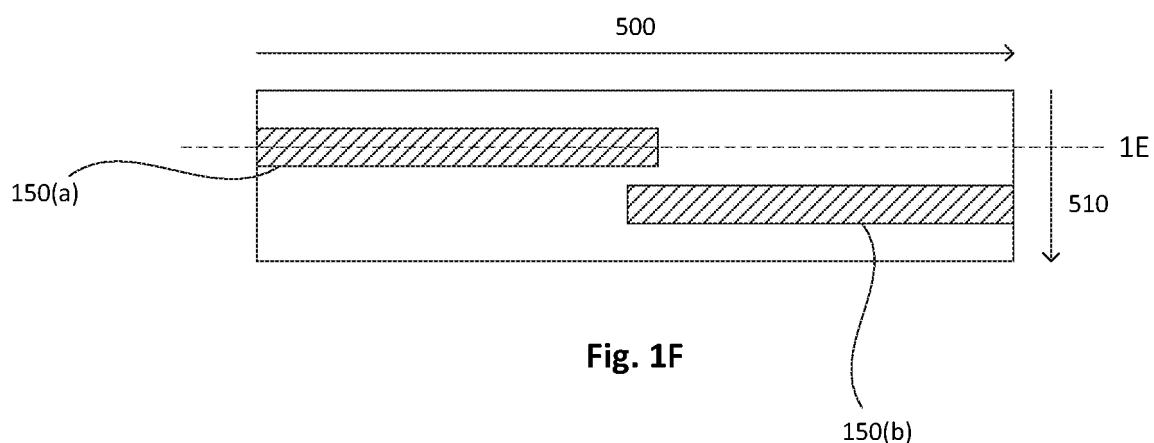


Fig. 3A

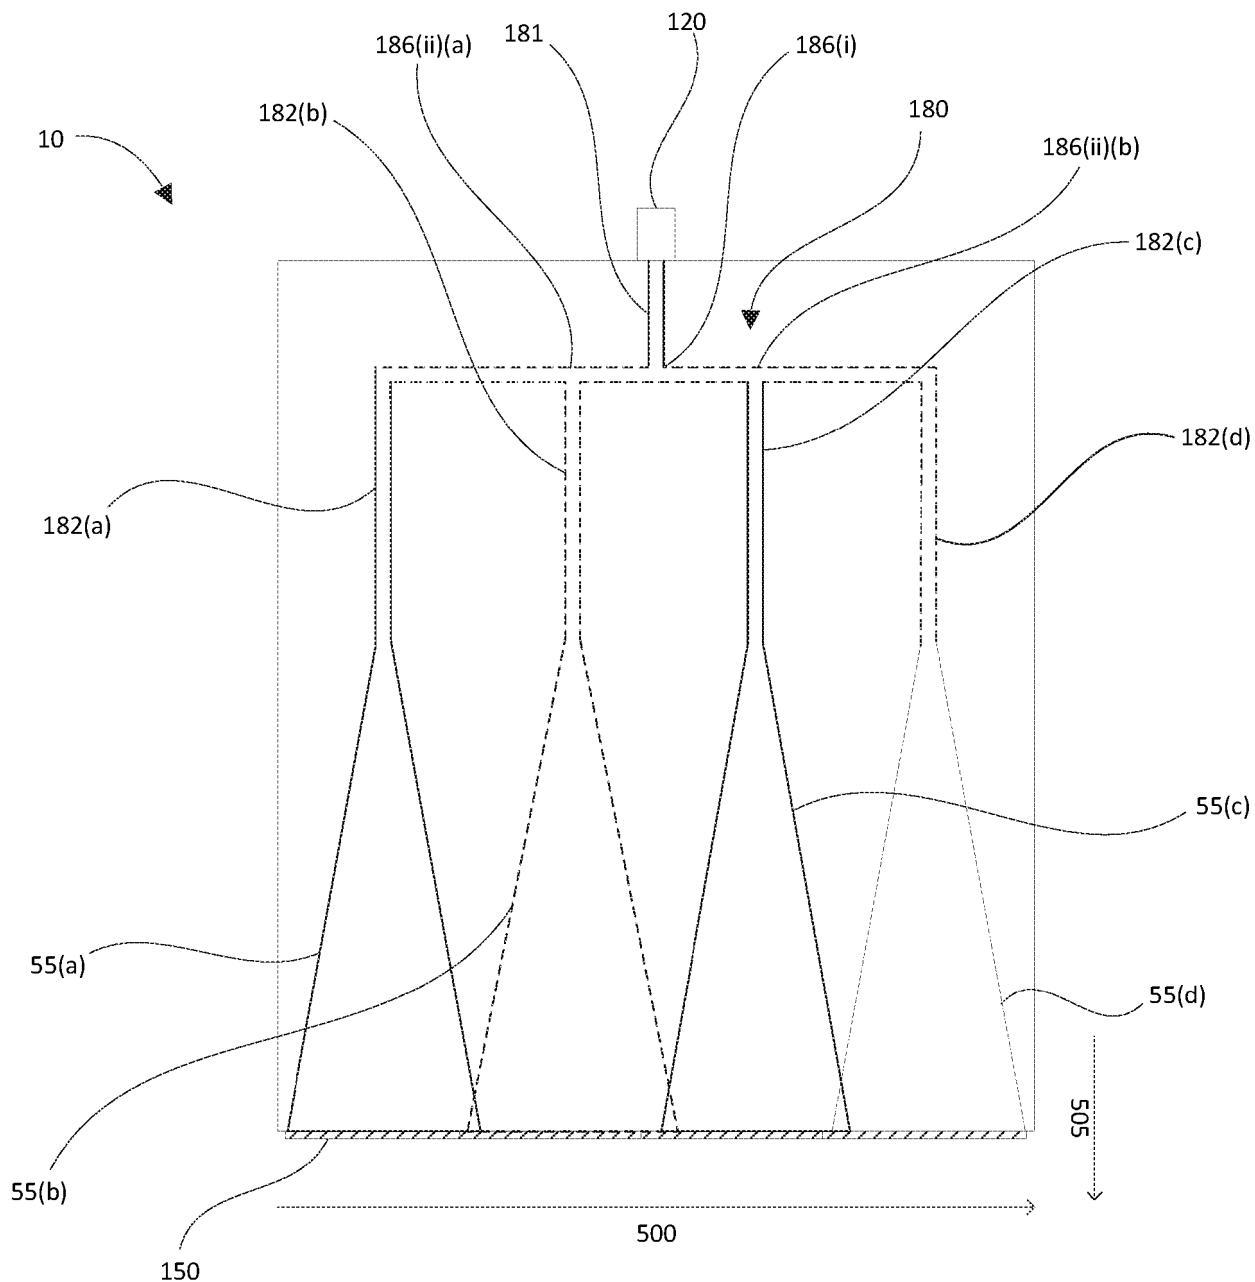
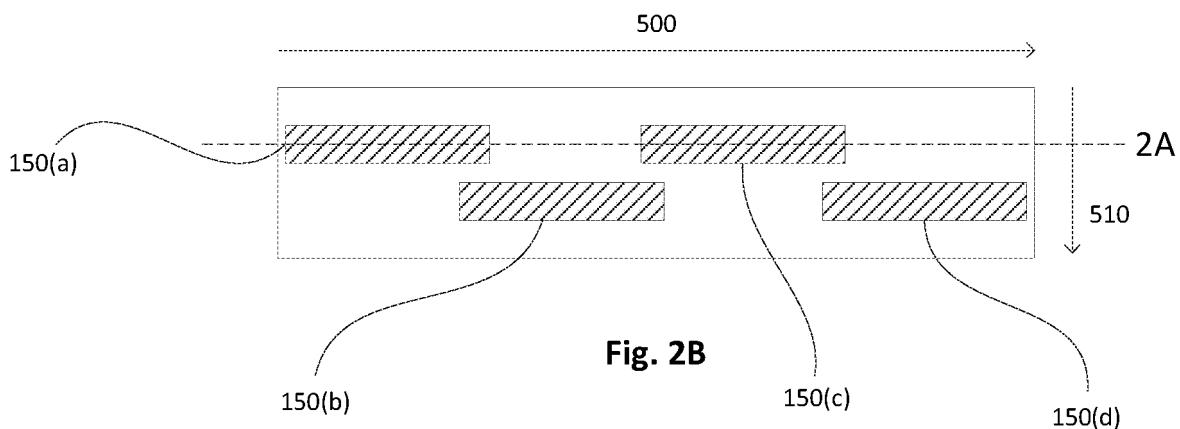
GB 2547951 A





**Fig. 1E****Fig. 1F**

150(b)

**Fig. 2A****Fig. 2B**

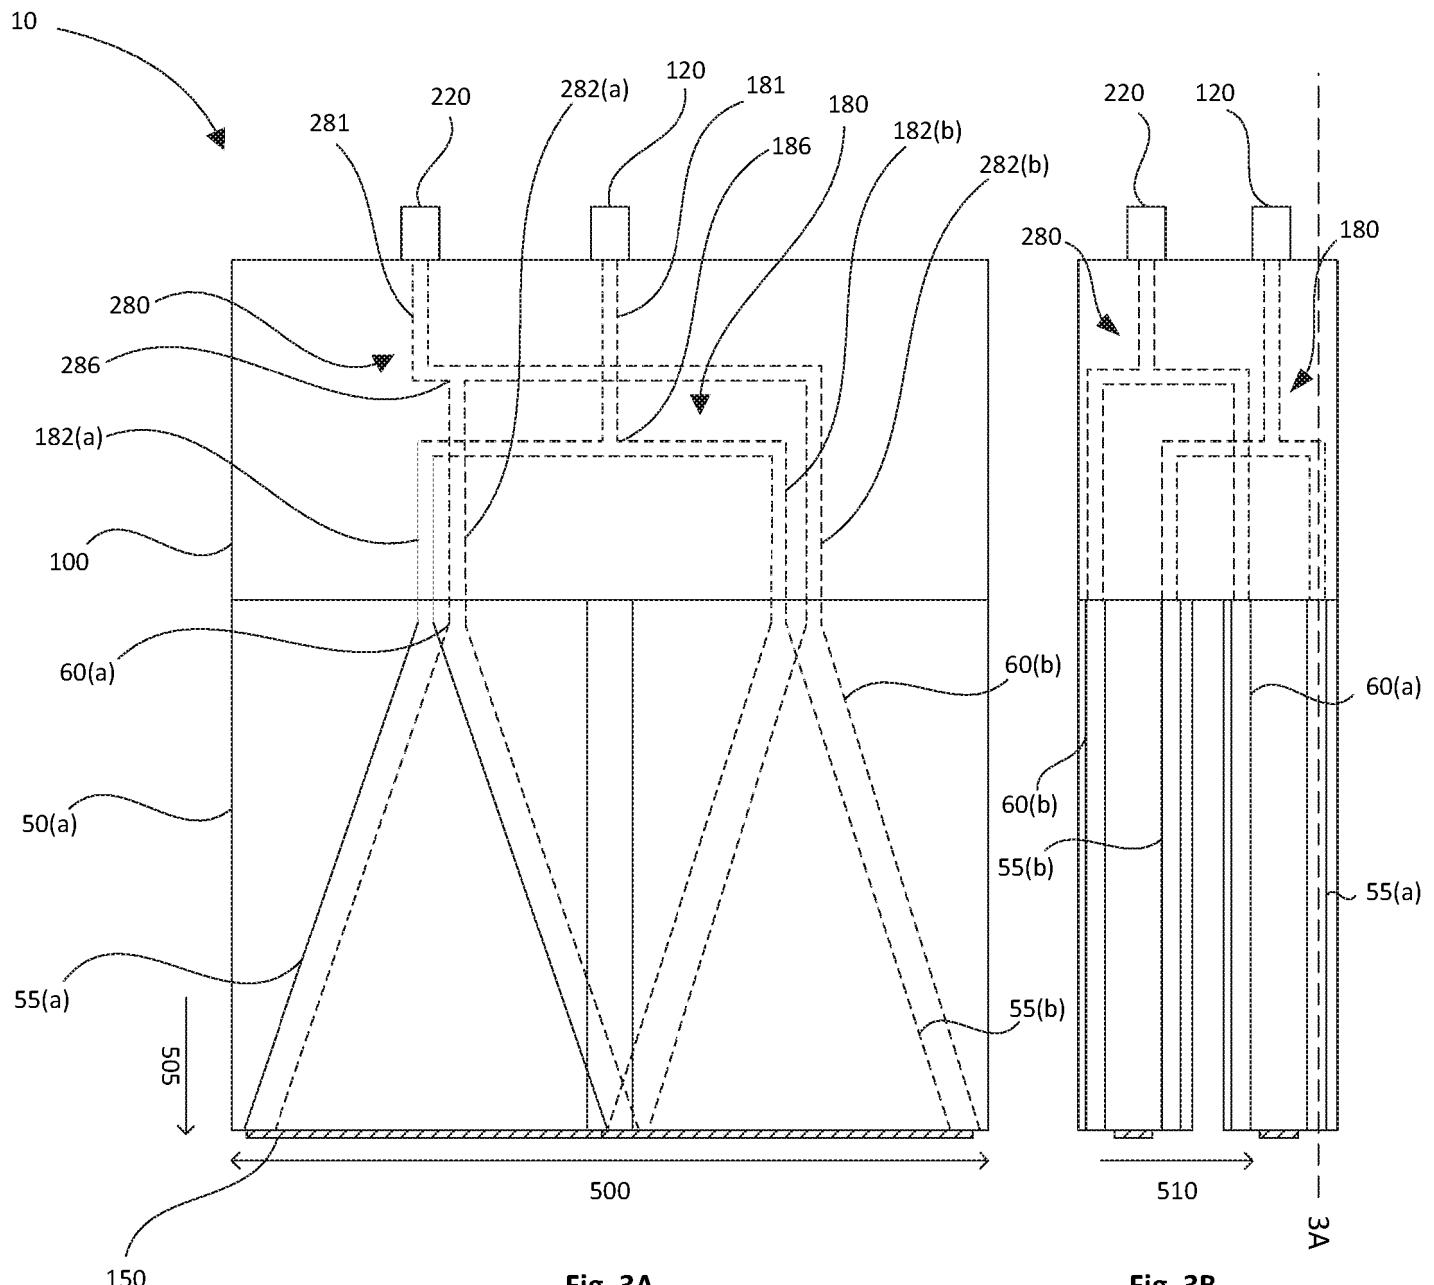


Fig. 3A

Fig. 3B

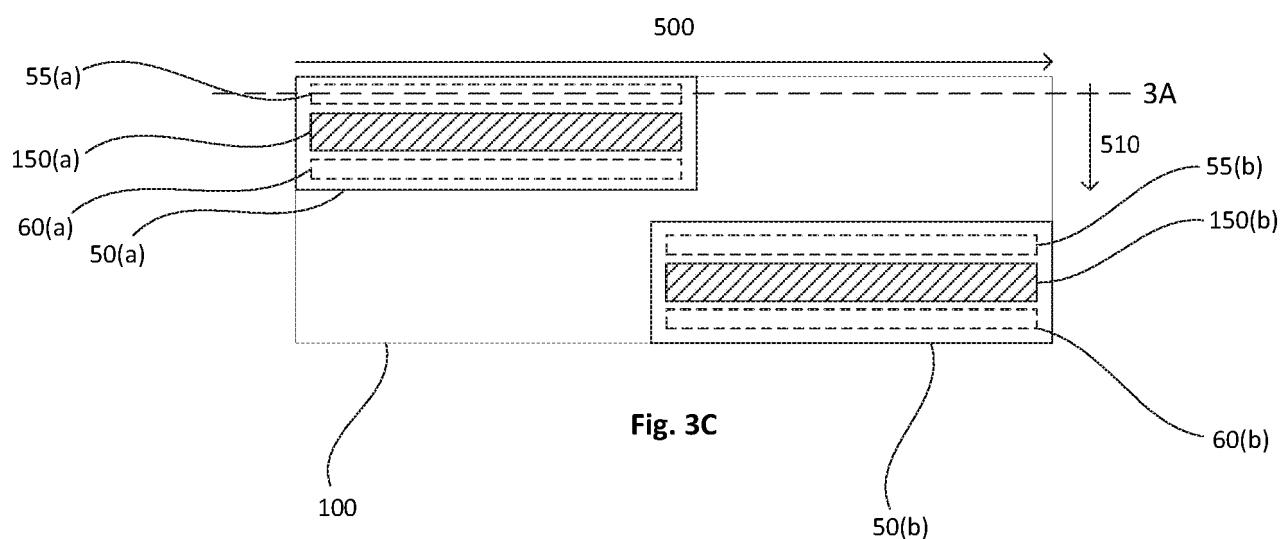


Fig. 3C

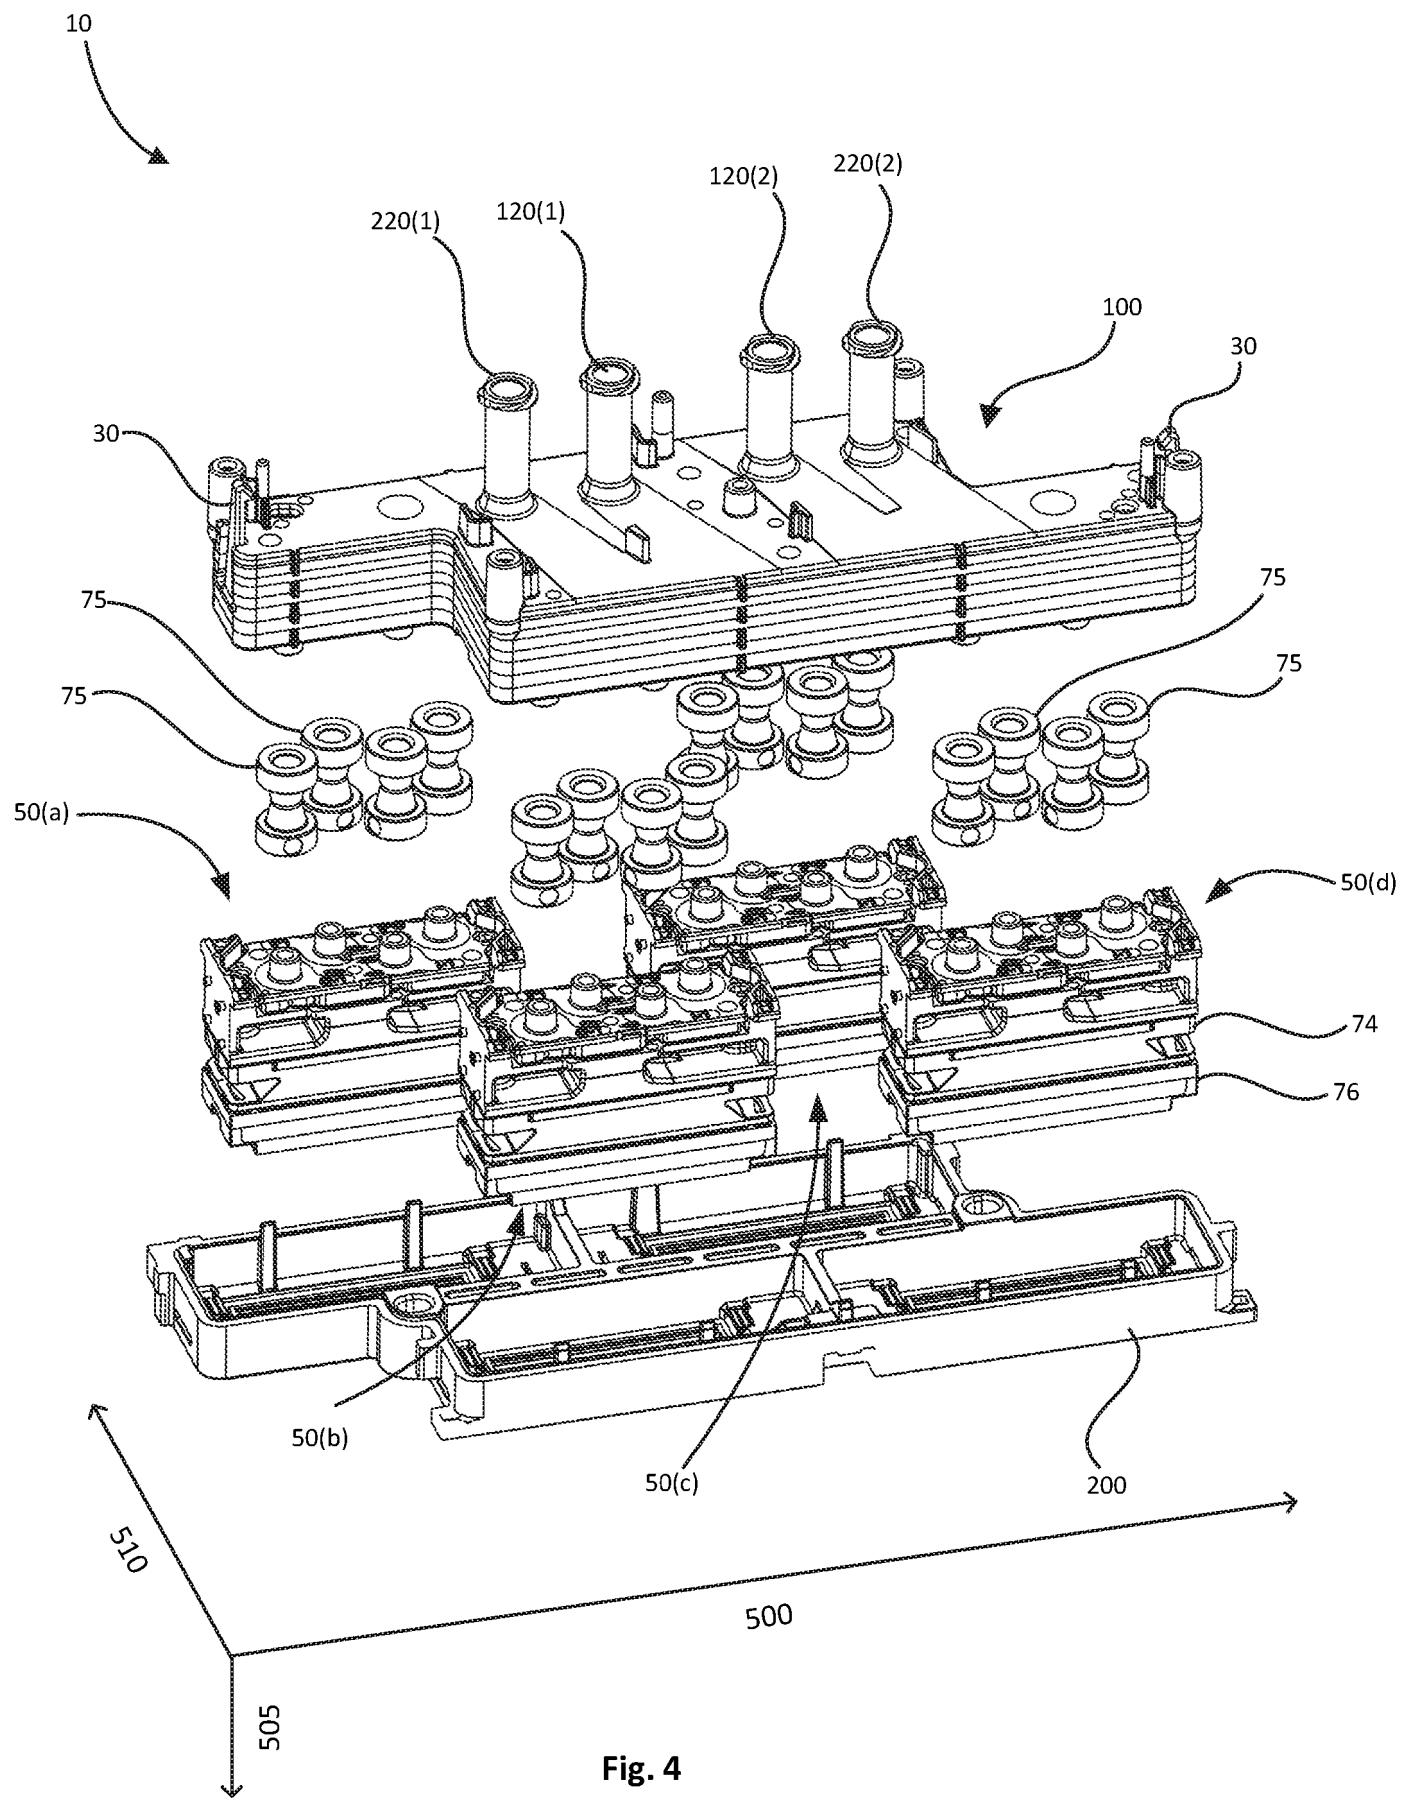
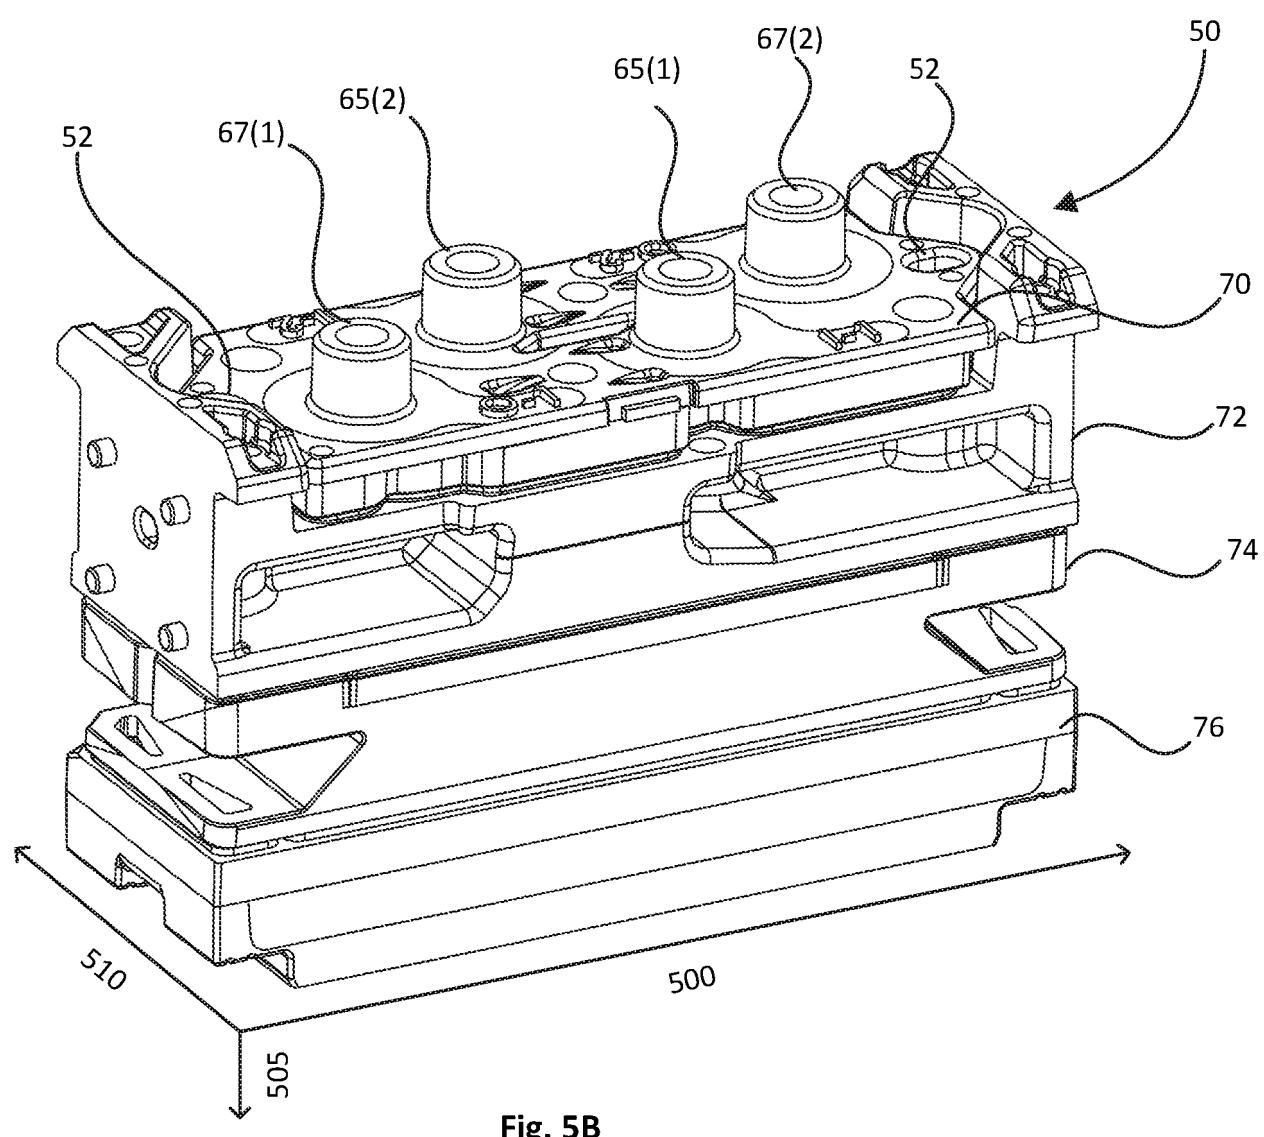
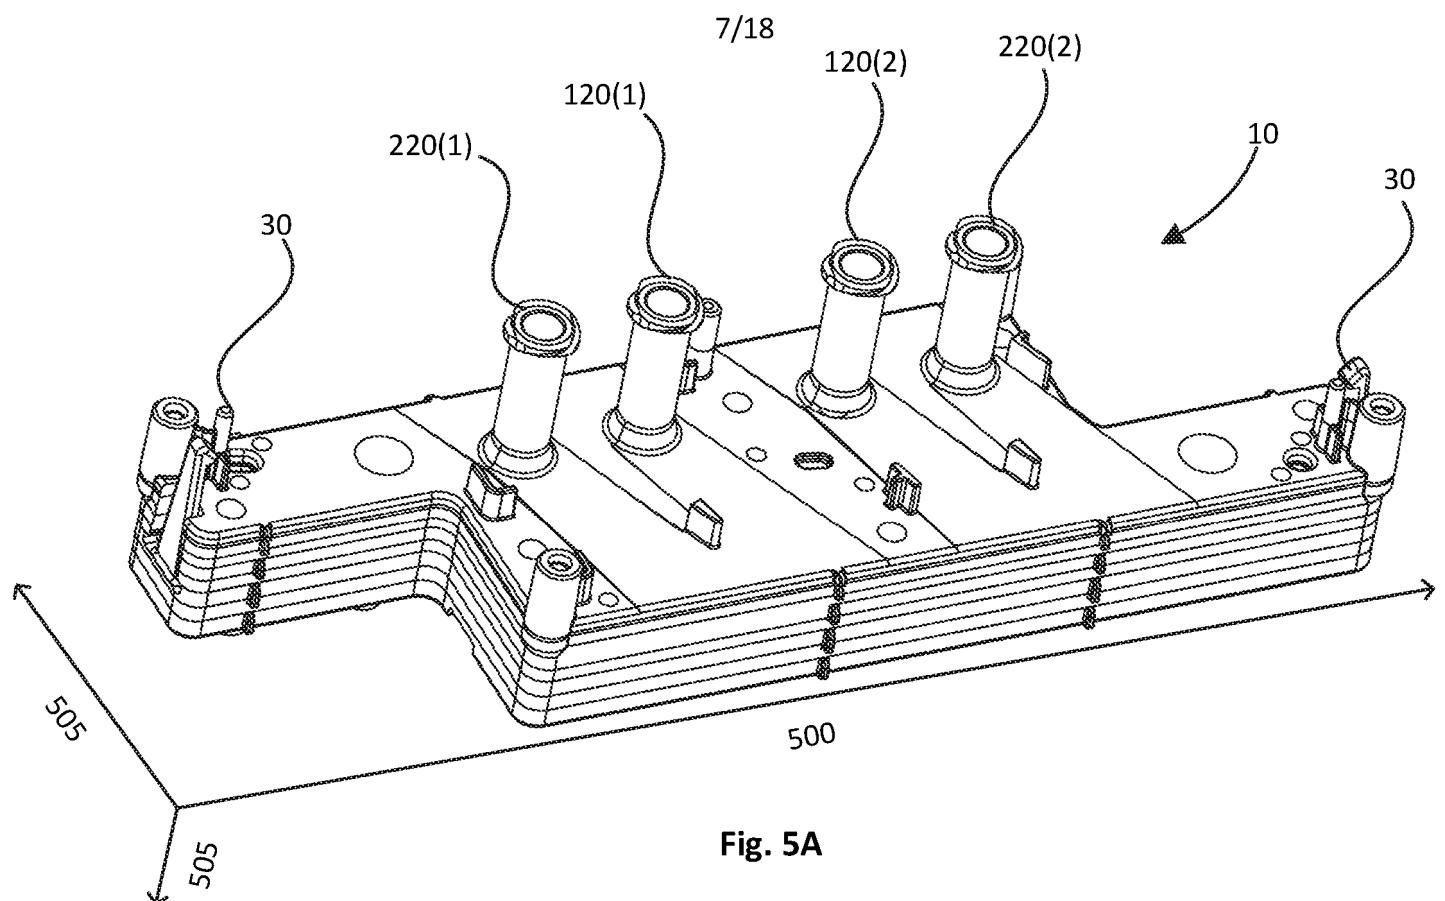
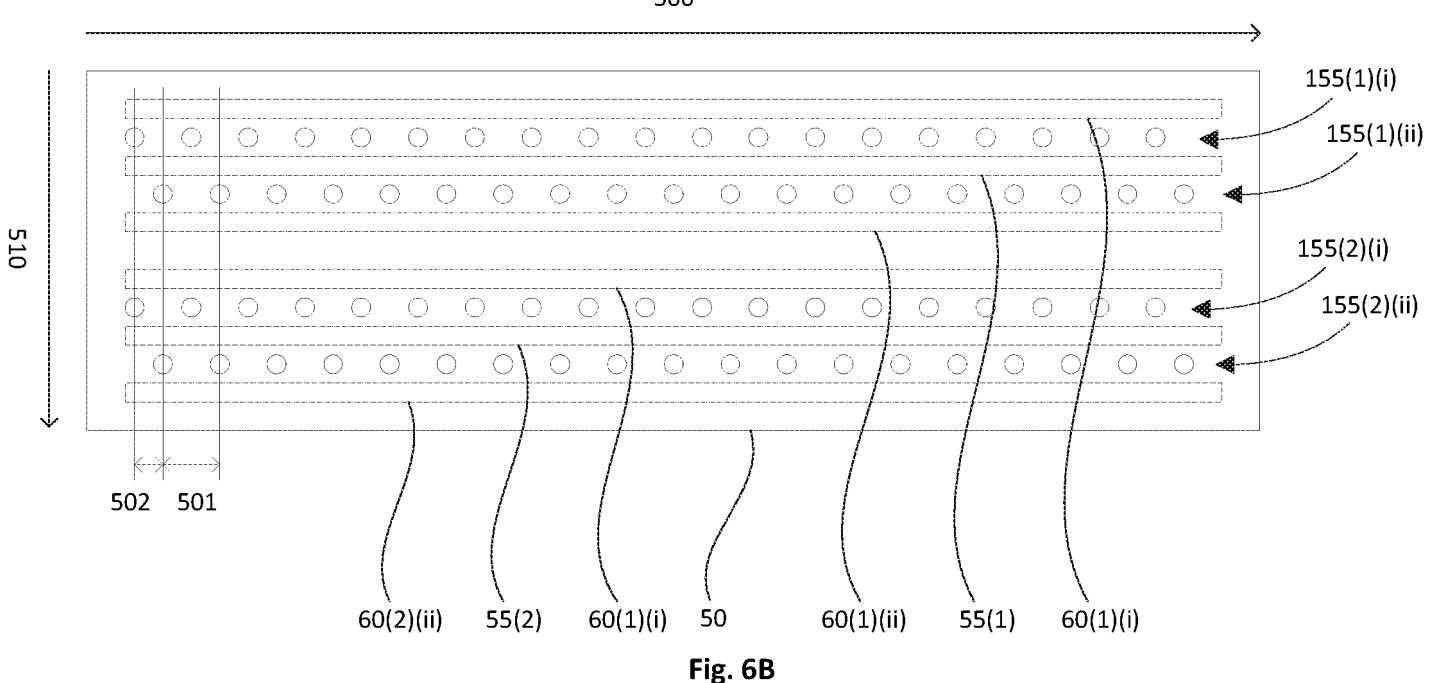
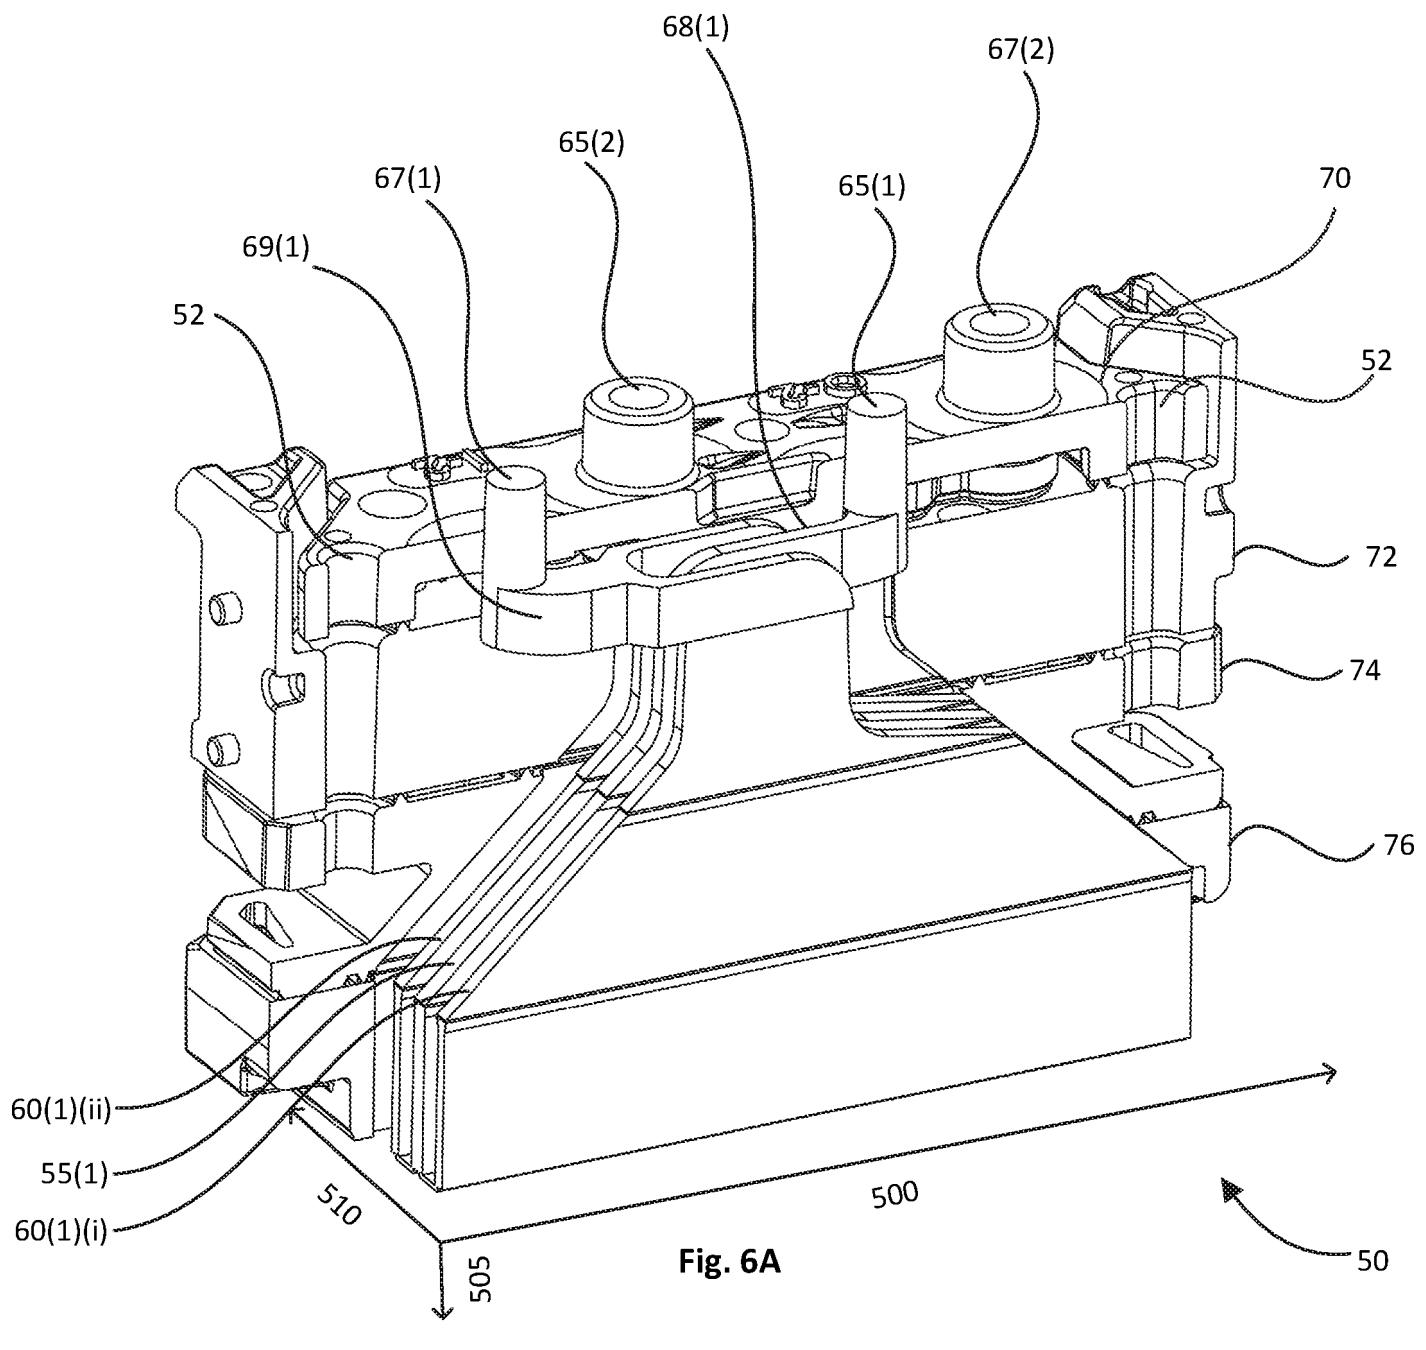


Fig. 4





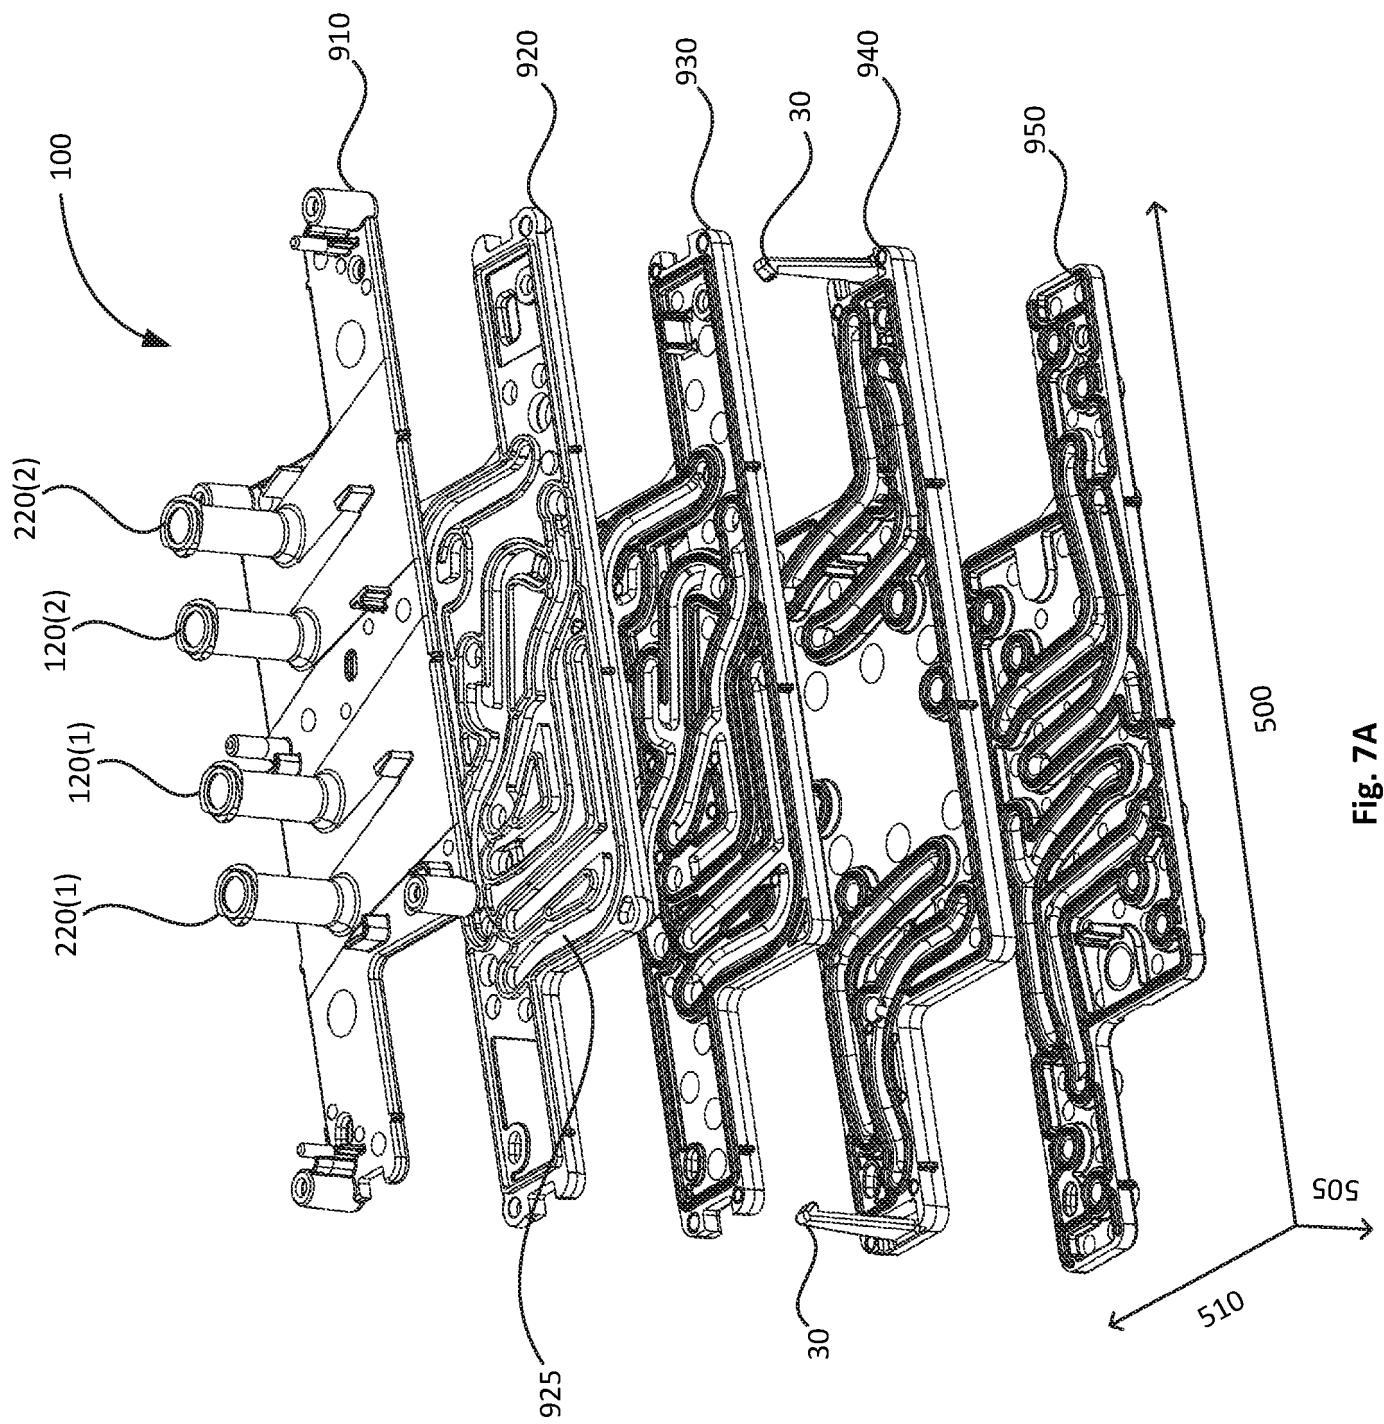


Fig. 7A

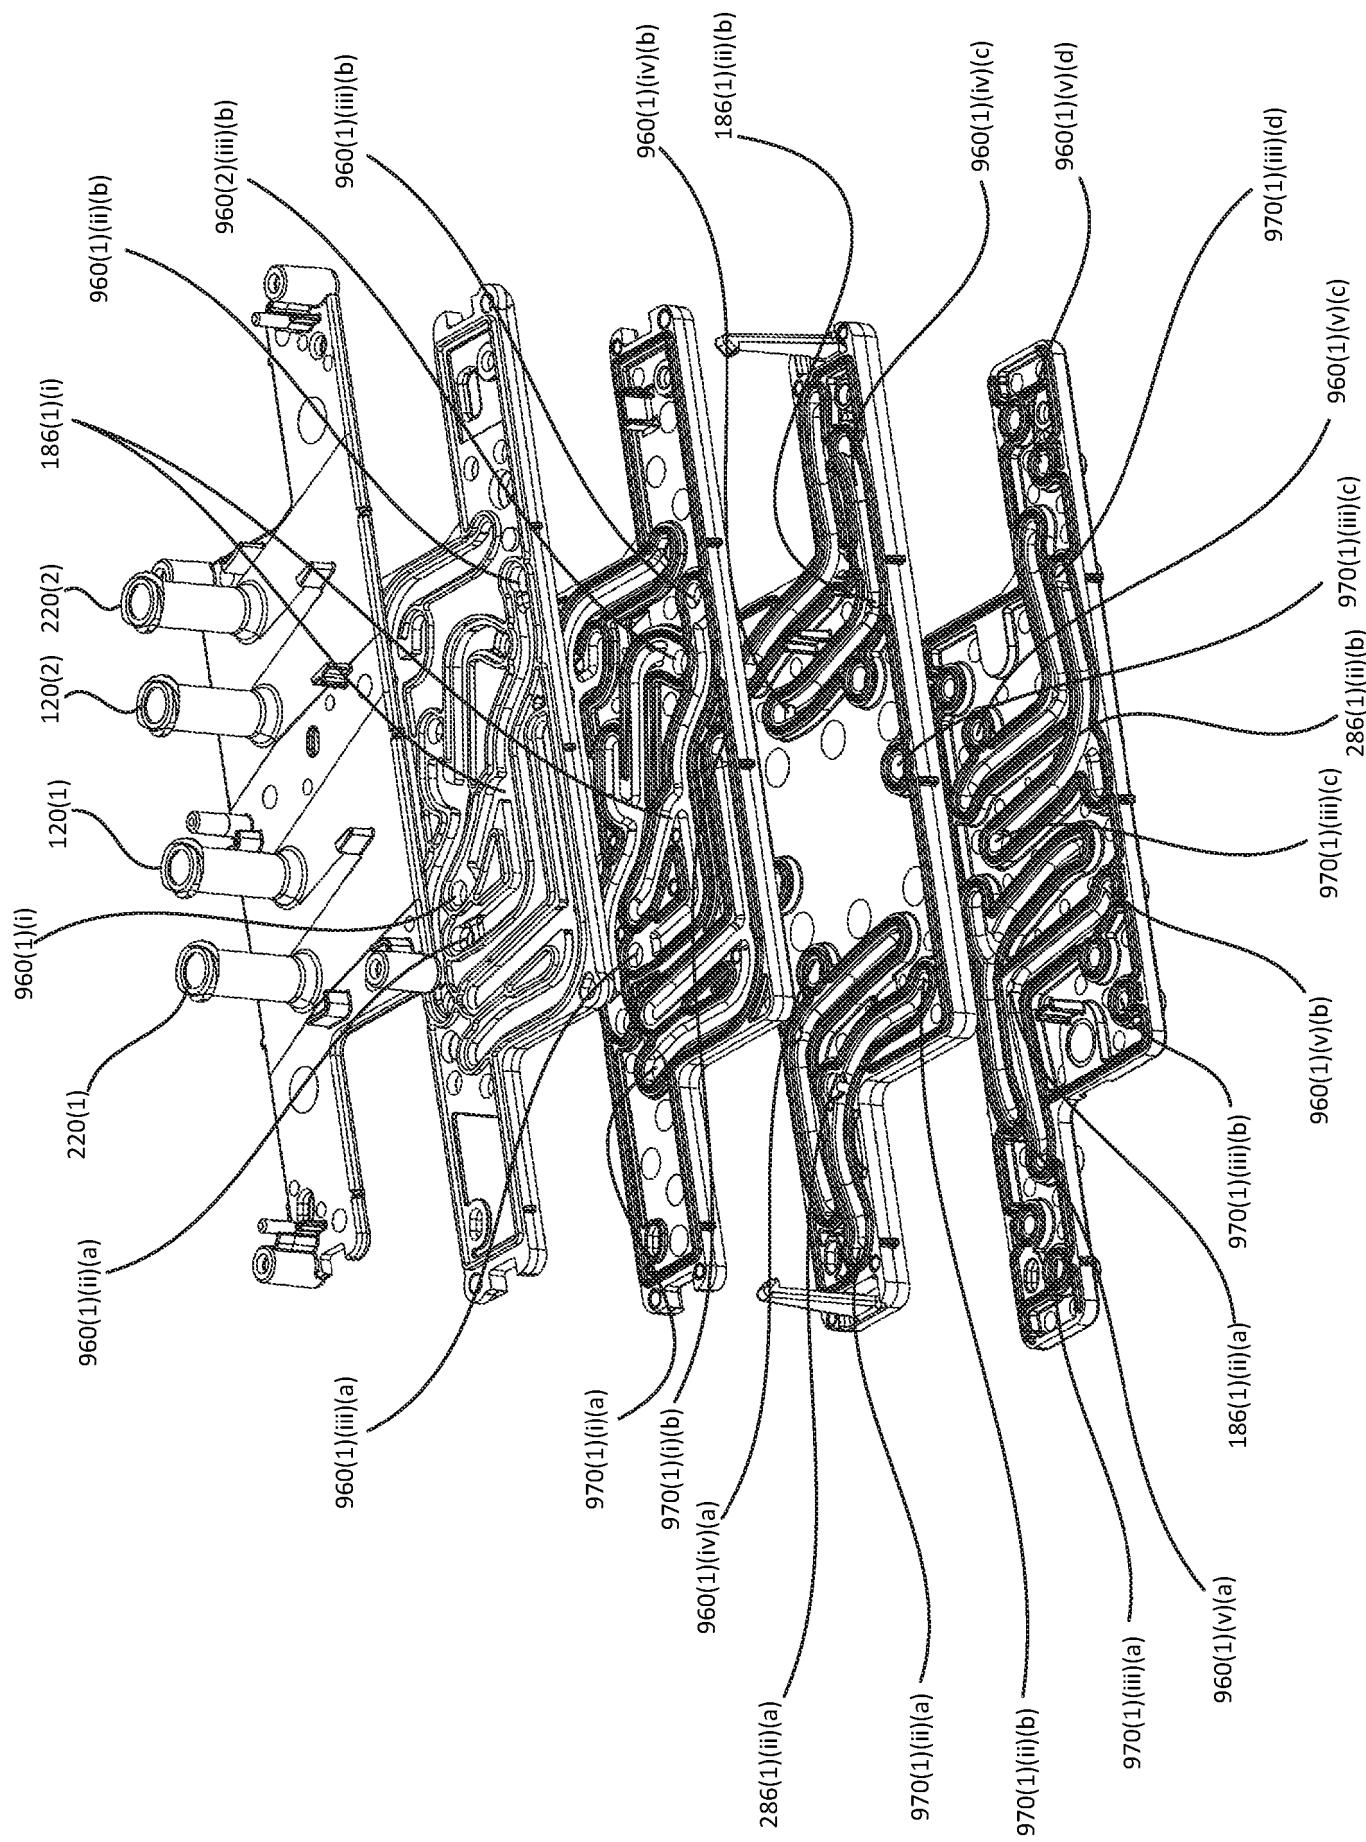


Fig. 7B

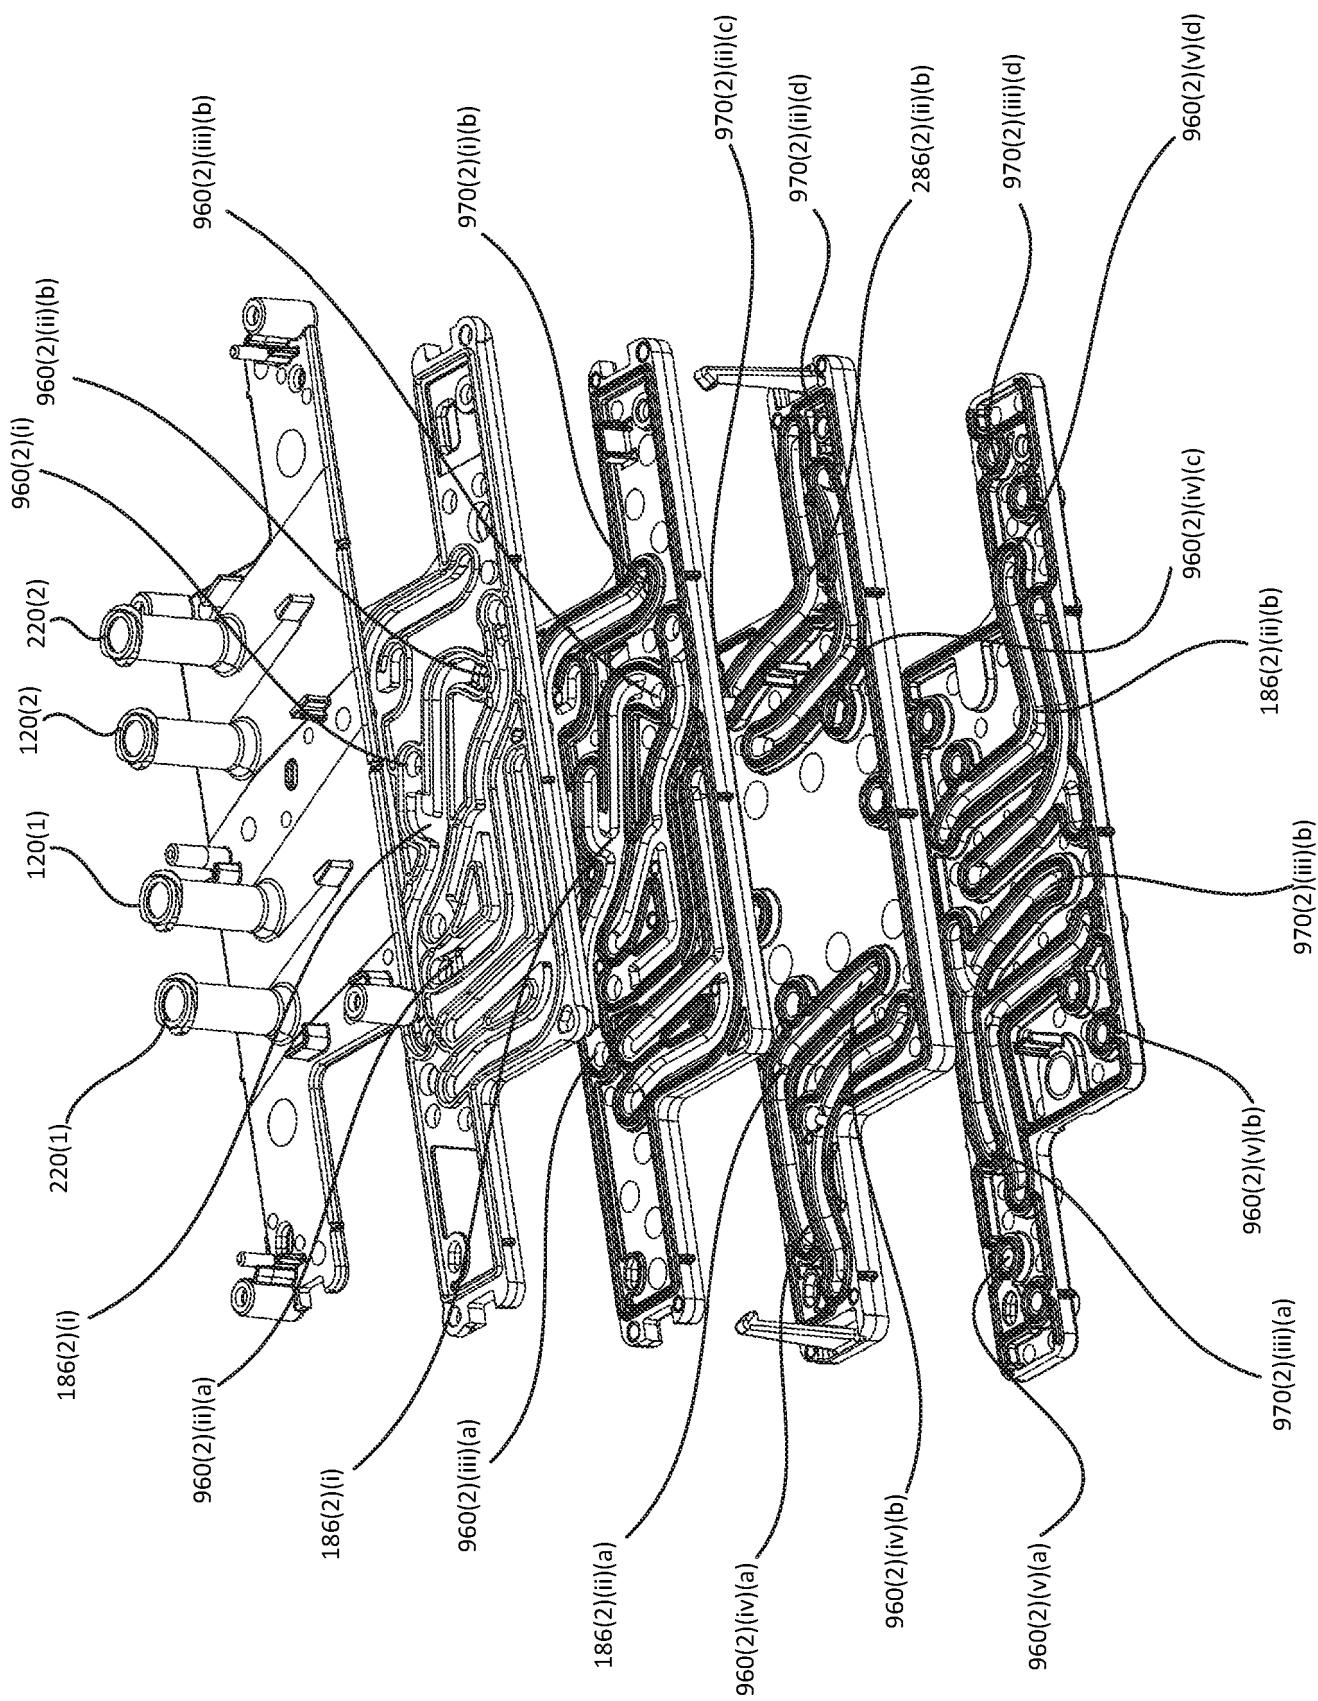


Fig. 7C

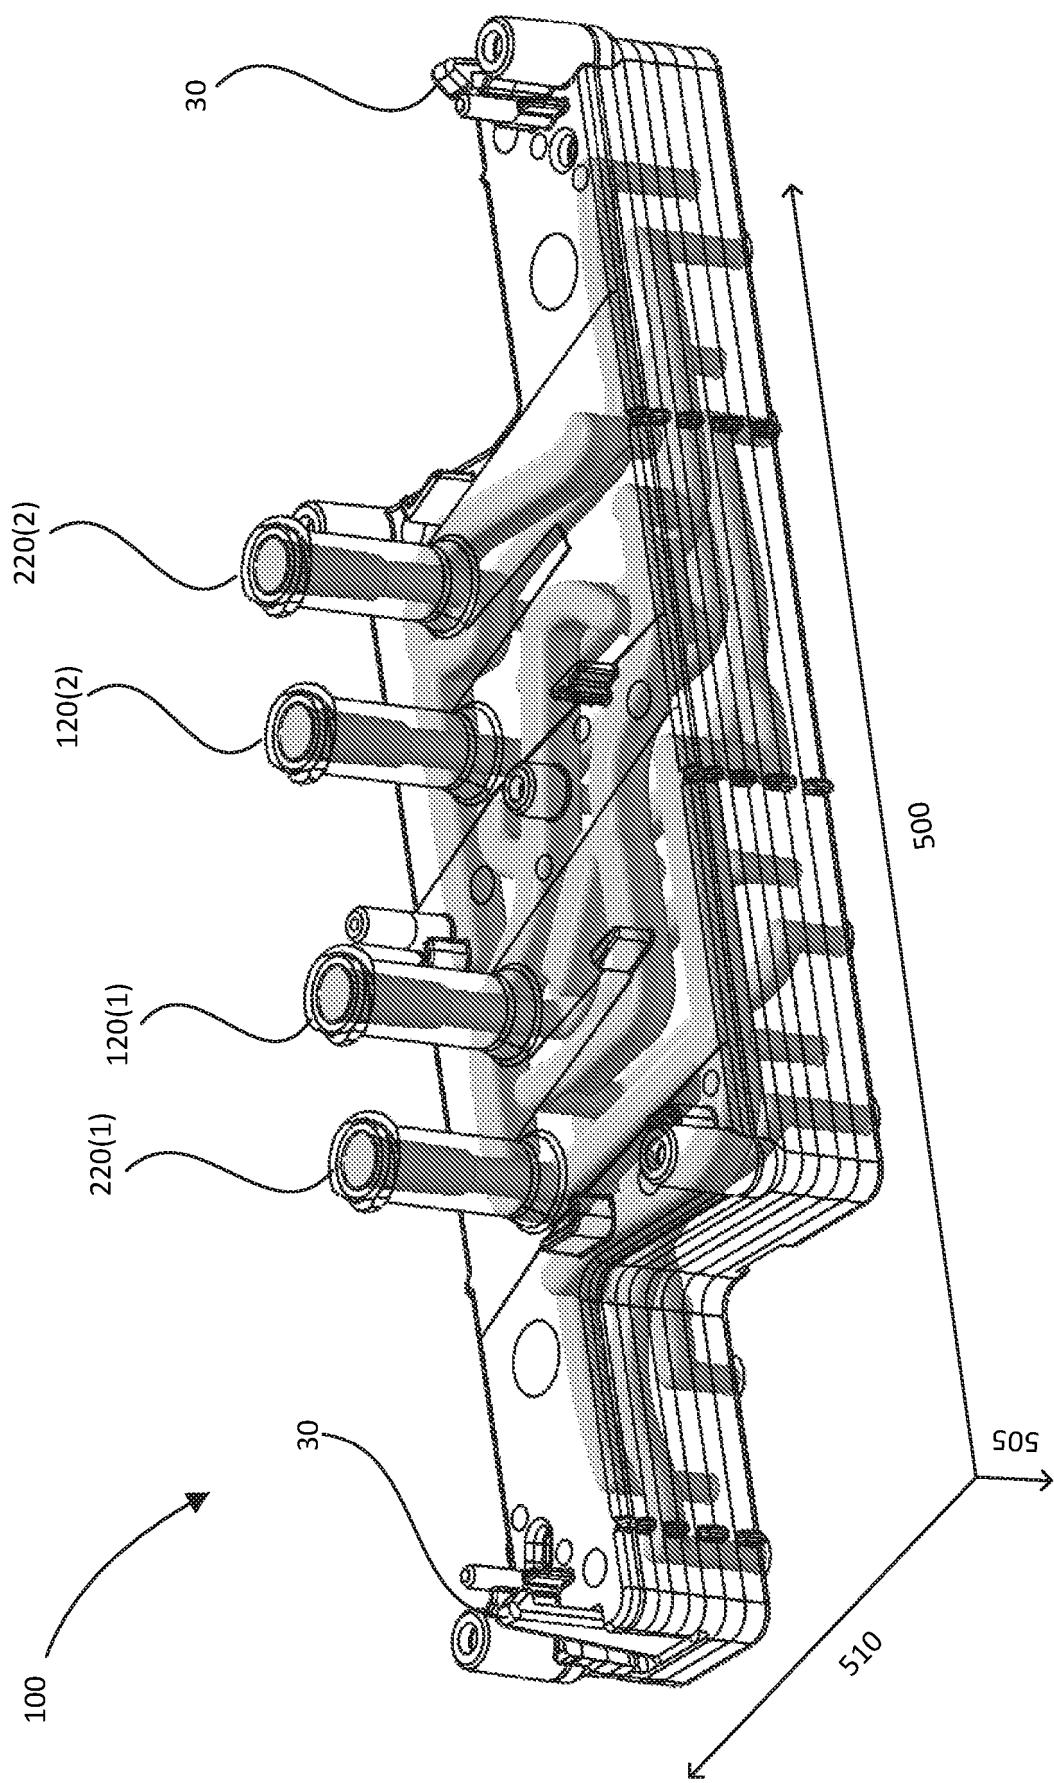


Fig. 8A

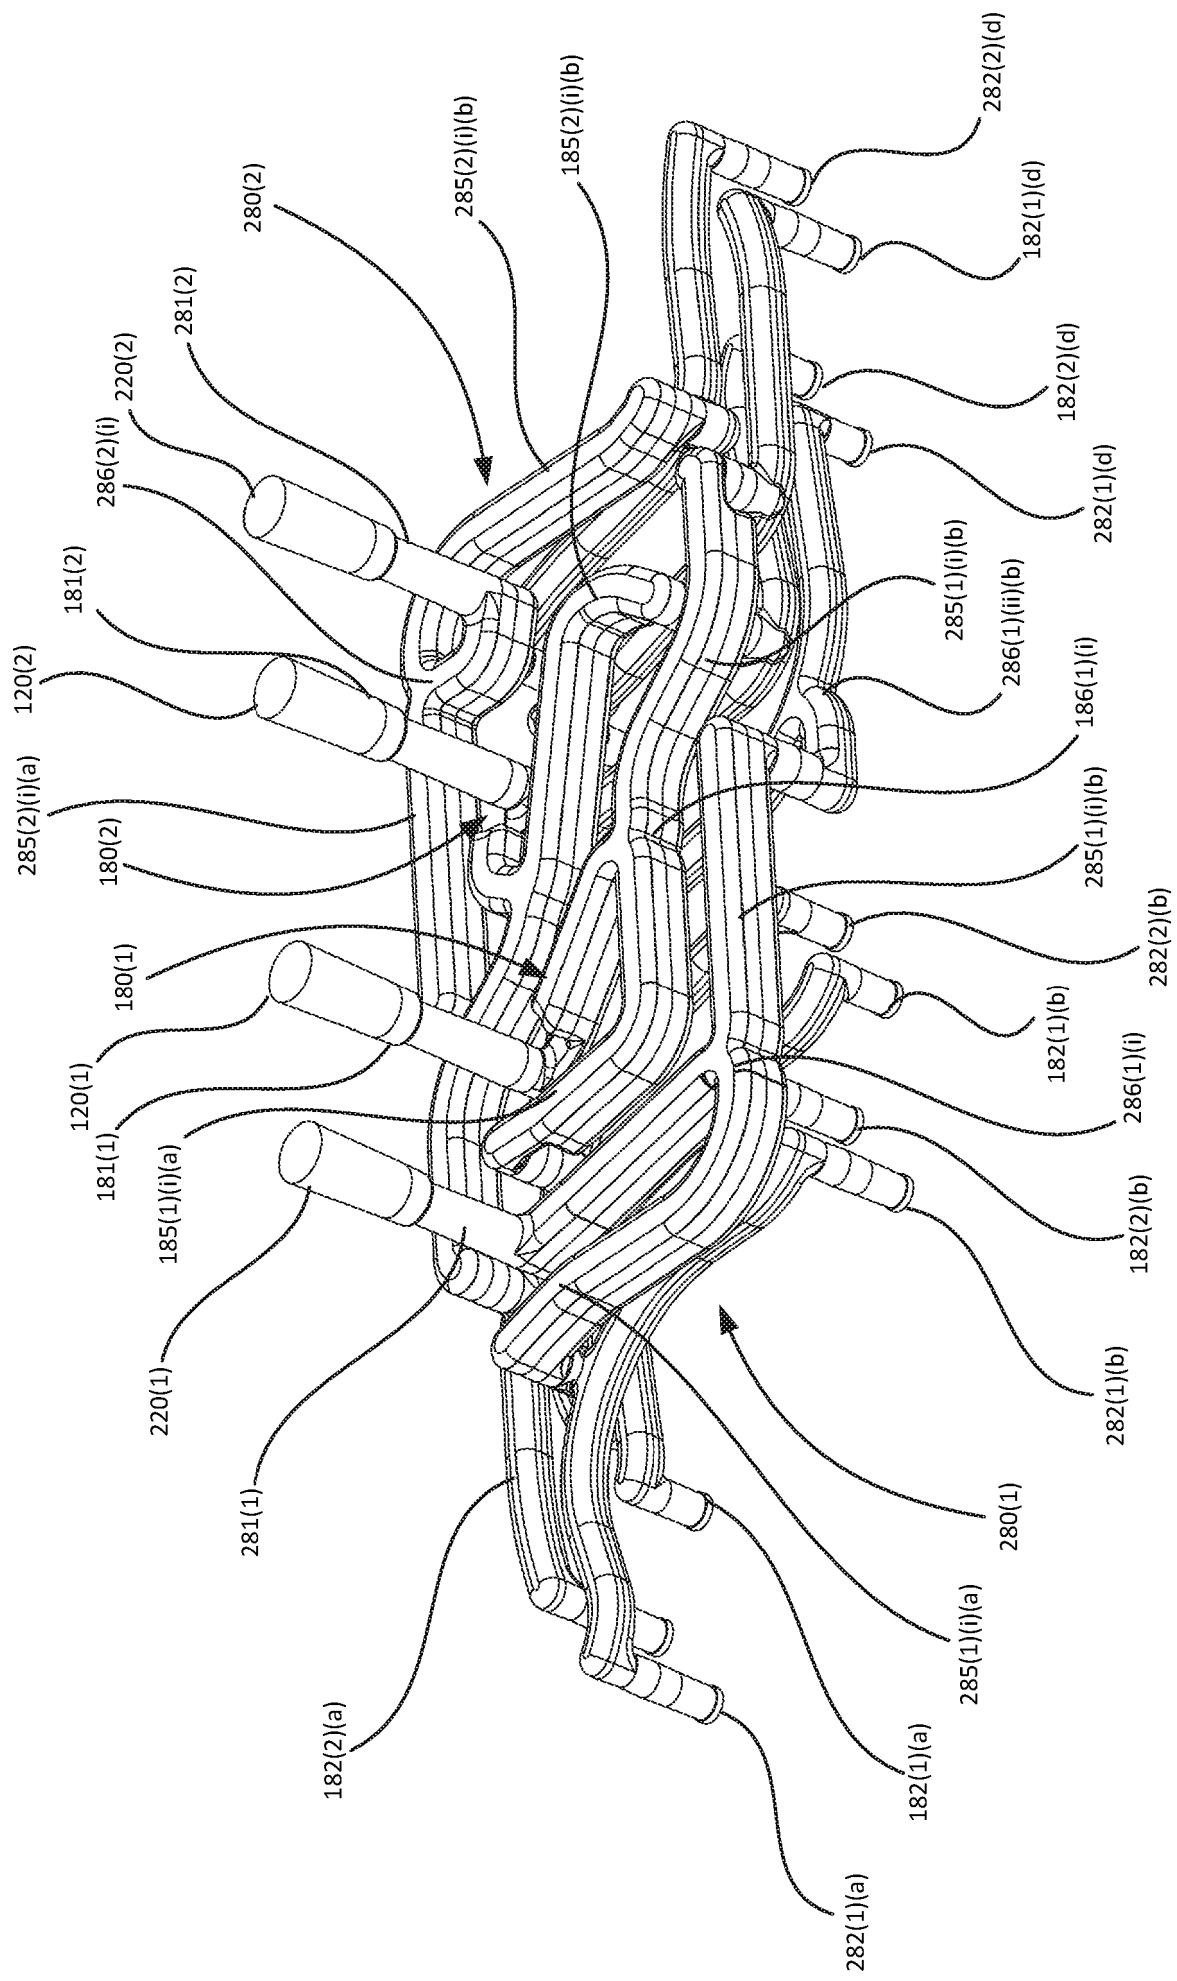


Fig. 8B

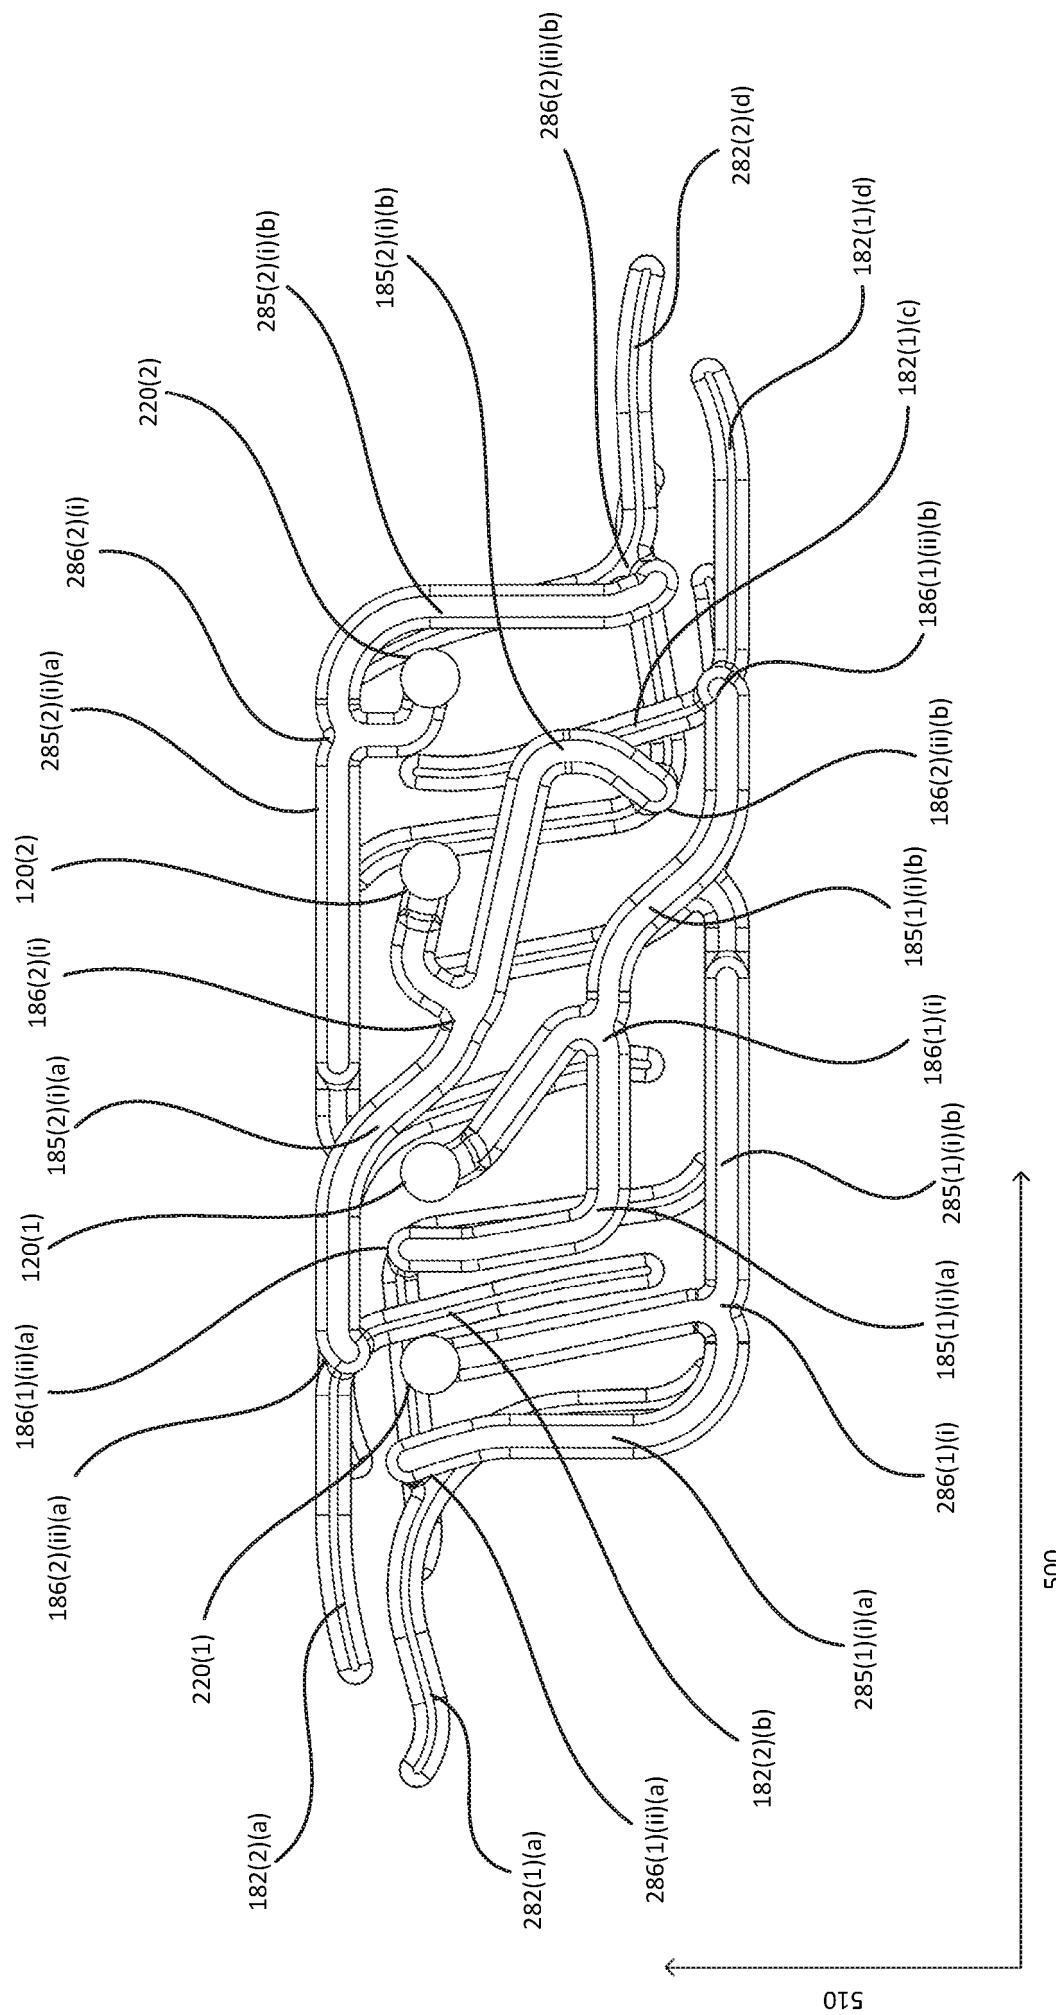


Fig. 8C

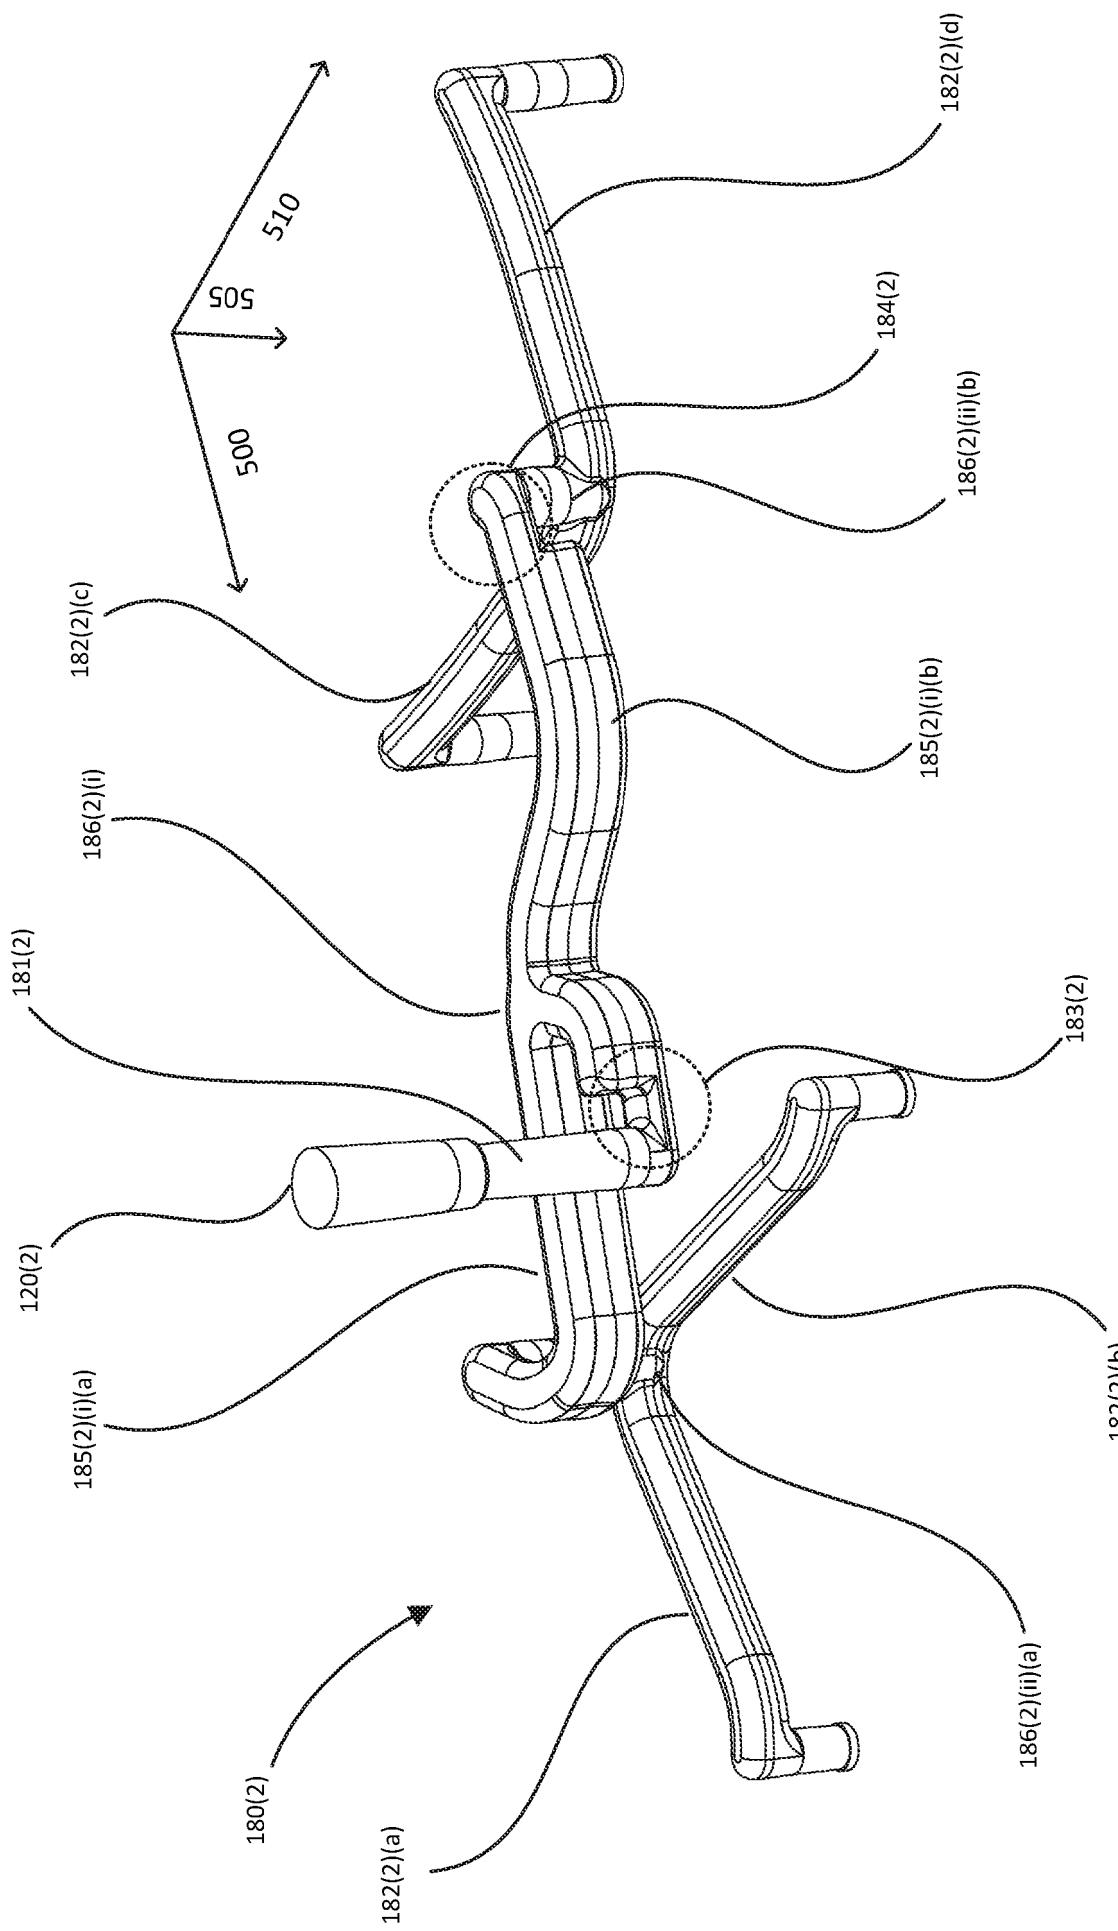


Fig. 9A

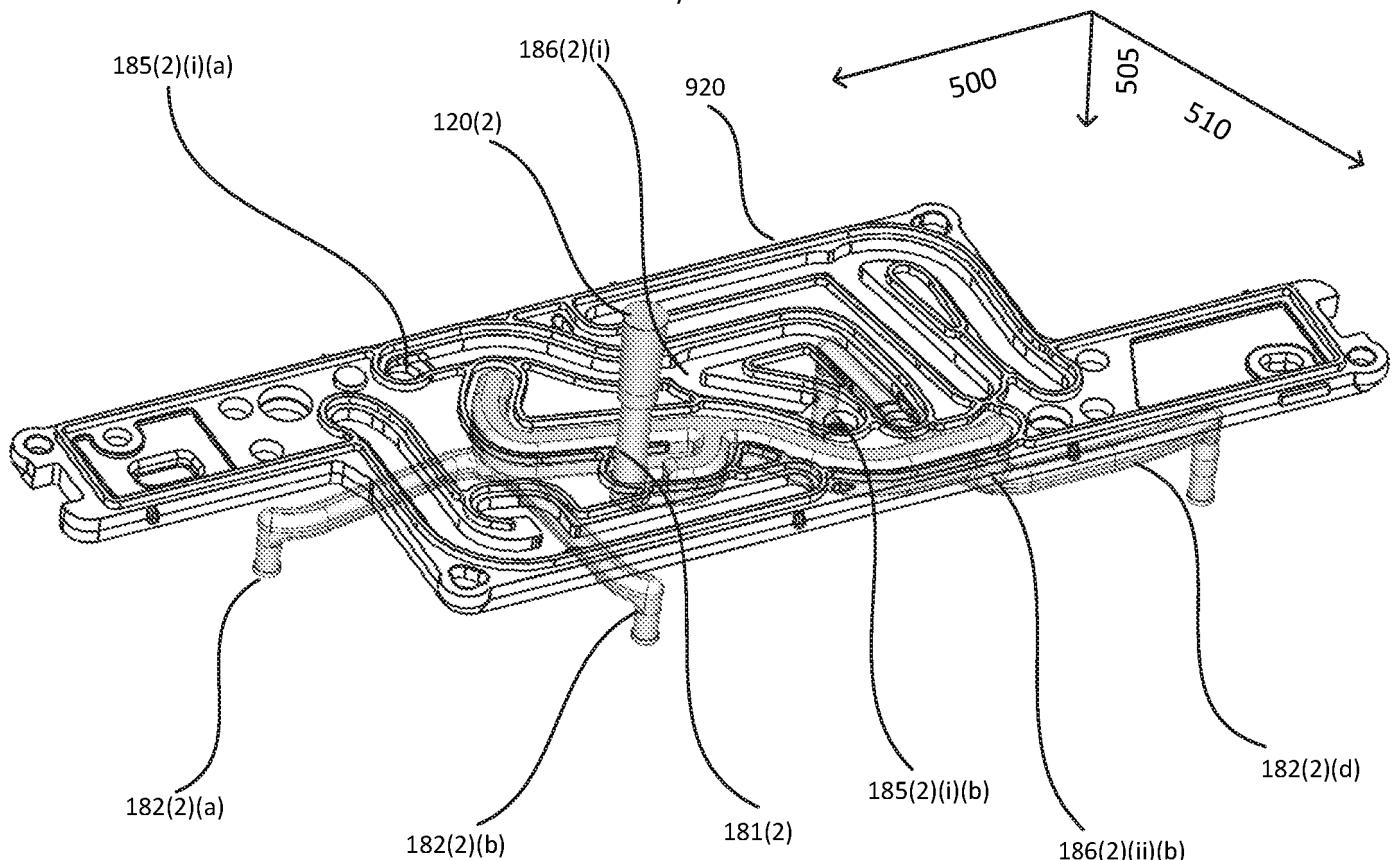


Fig. 9B

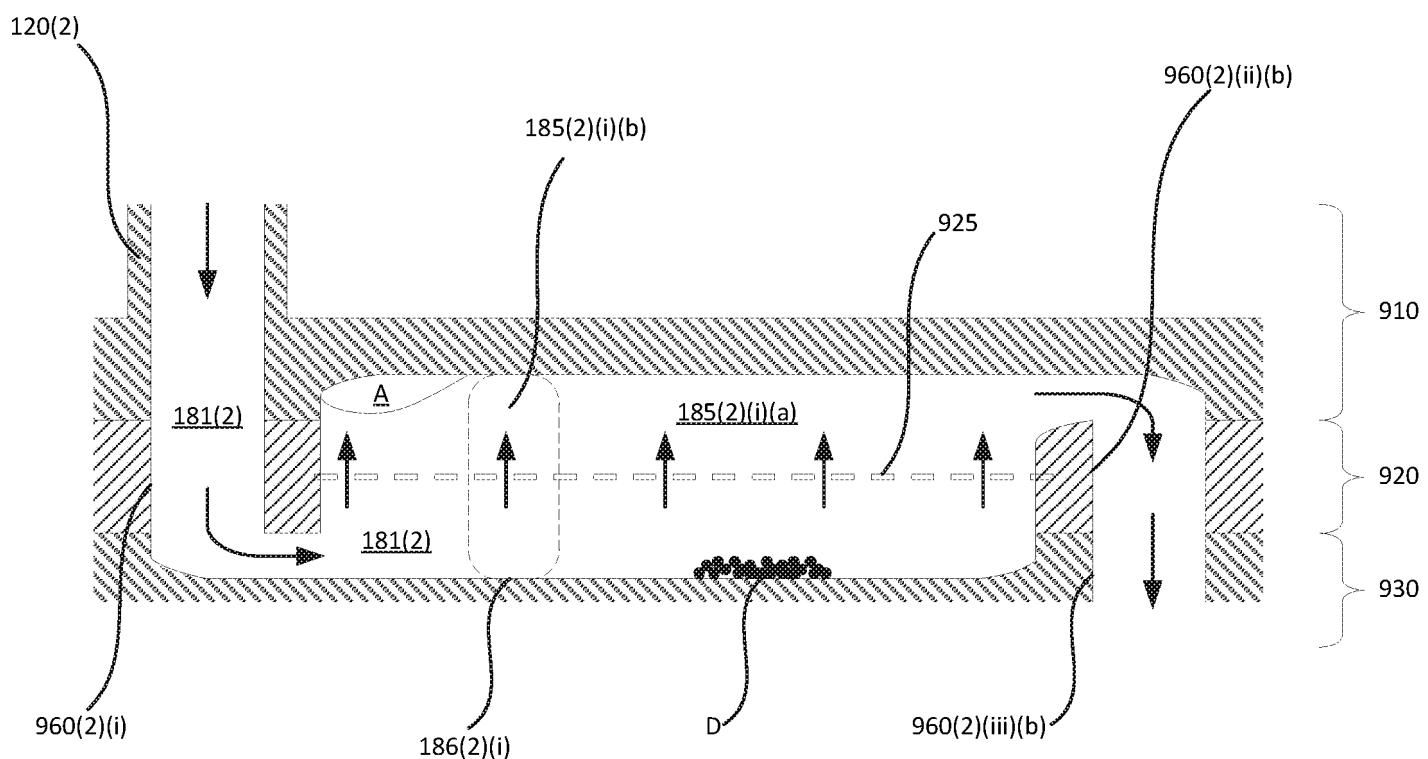


Fig. 10

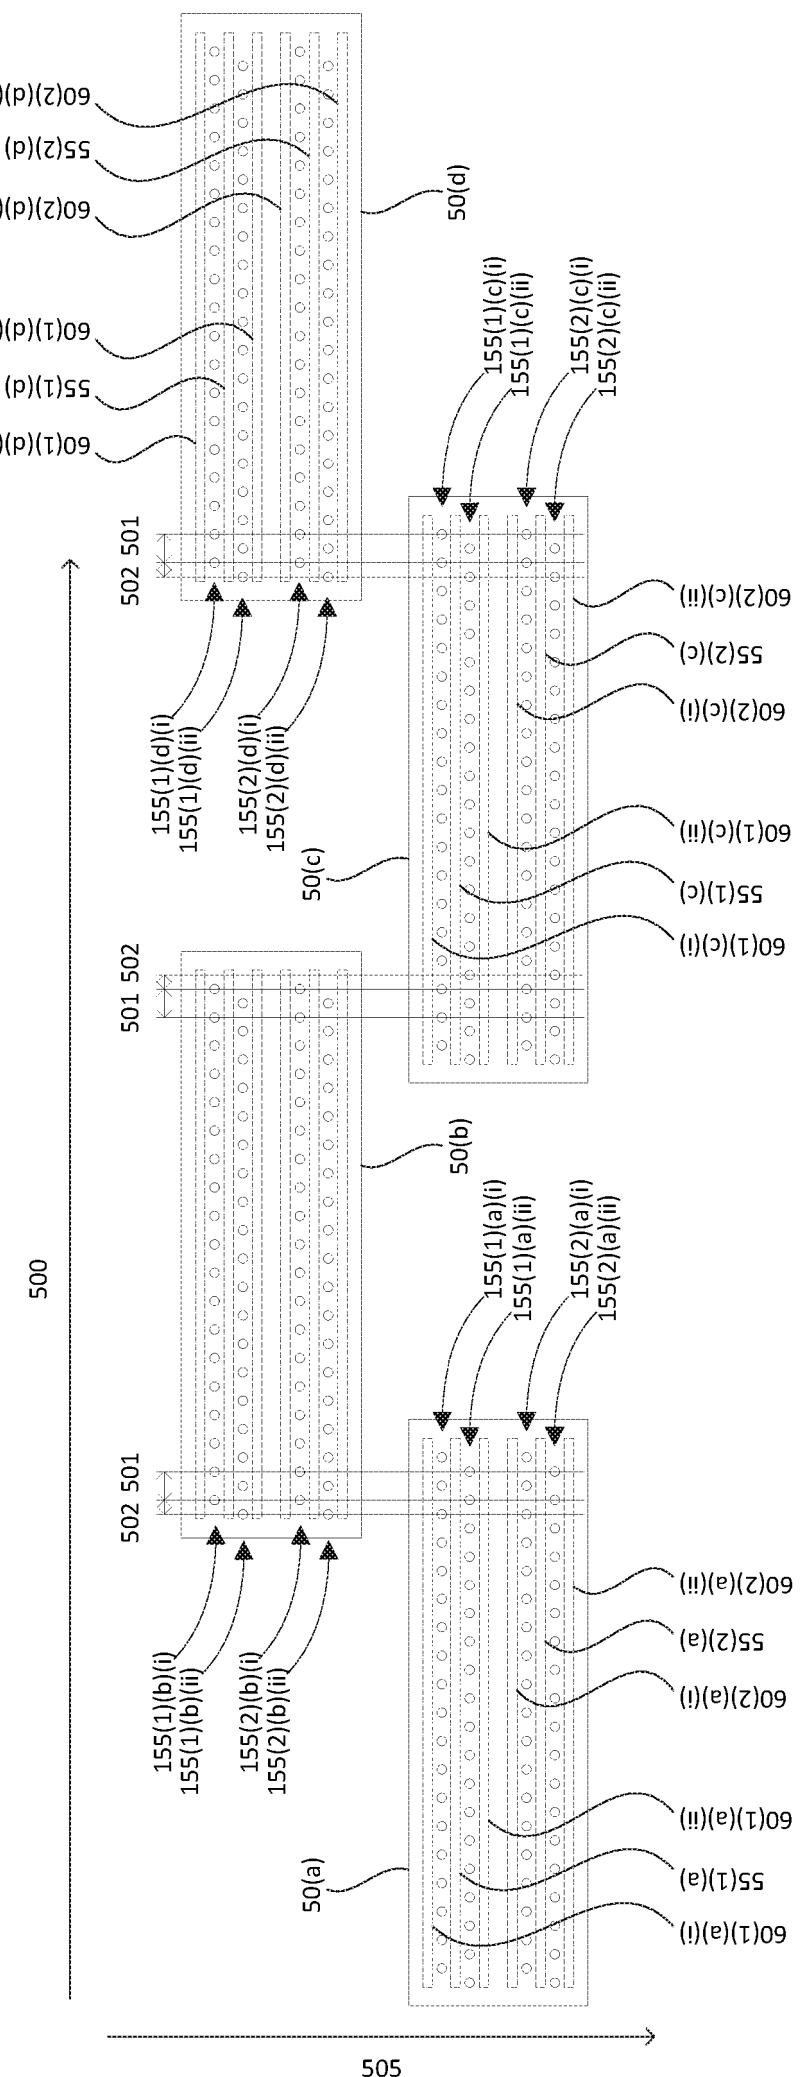


Fig. 11

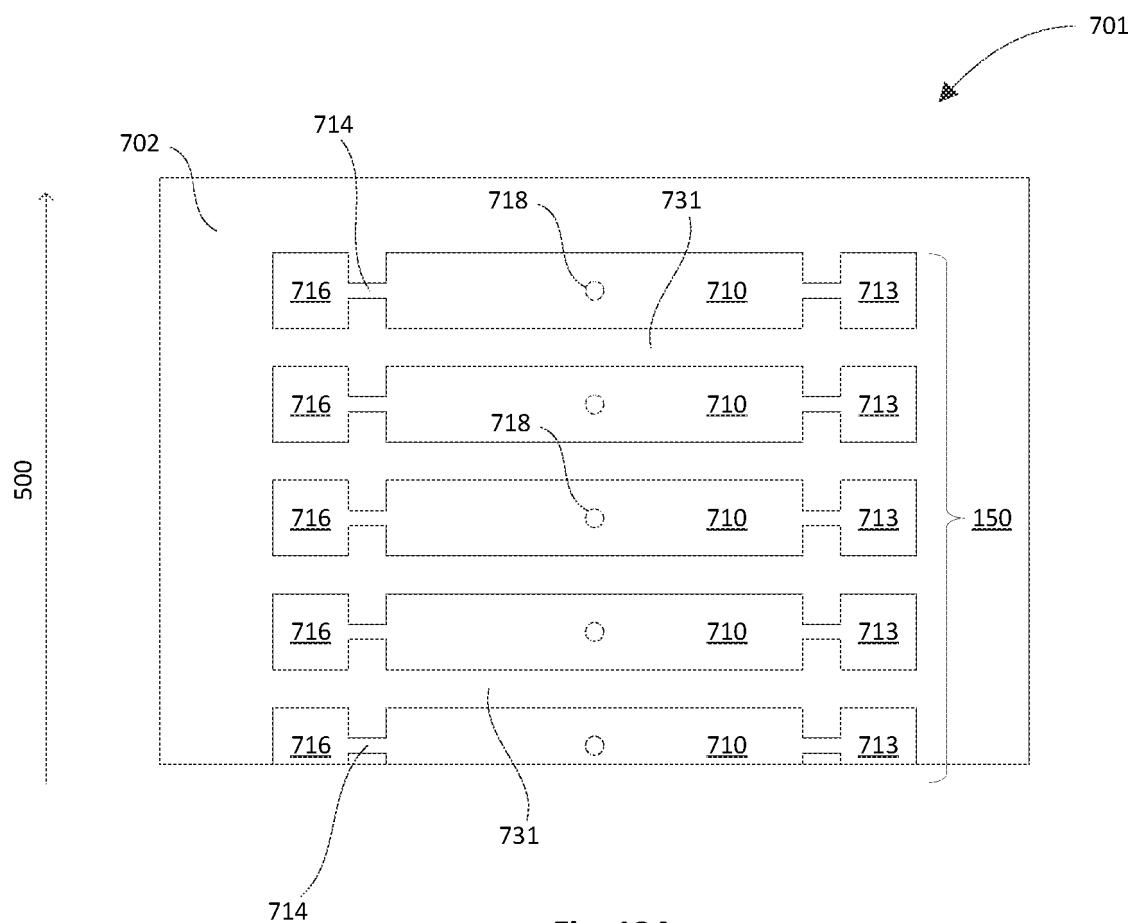


Fig. 12A

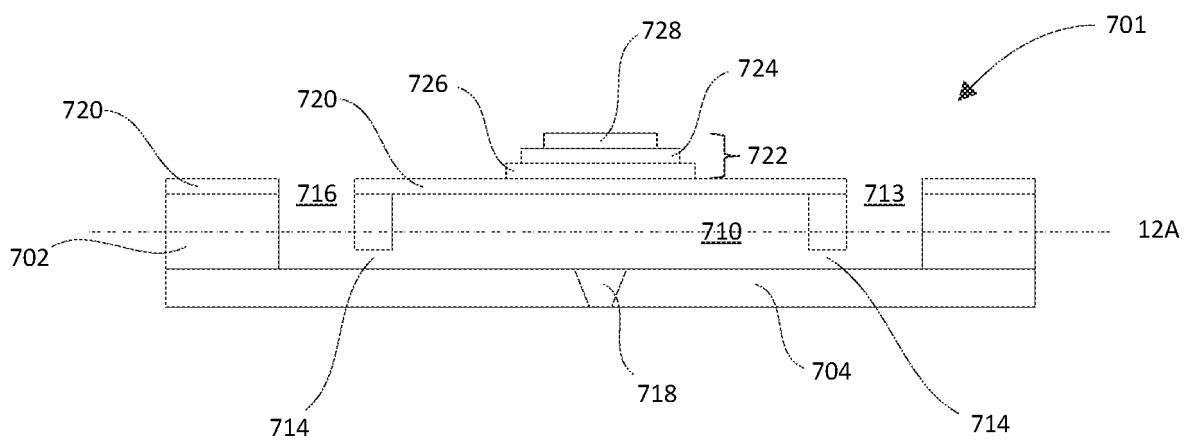


Fig. 12B

DROPLET DEPOSITION HEAD AND MANIFOLD COMPONENT THEREFOR

The present invention relates to a droplet deposition head. It may find particularly beneficial application in a printhead, such as an inkjet printhead.

Droplet deposition heads are now in widespread usage, whether in more traditional applications, such as inkjet printing, or in 3D printing, or other rapid

5 prototyping techniques.

Recently, inkjet printheads have been developed that are capable of depositing ink directly onto ceramic tiles, with high reliability and throughput. This allows the patterns on the tiles to be customized to a customer's exact specifications, as well as reducing the need for a full range of tiles to be kept in stock.

10 In other applications, droplet deposition heads may be used to form elements such as colour filters in LCD or OLED displays used in flat-screen television manufacturing.

It will therefore be appreciated that droplet deposition heads continue to evolve and specialise so as to be suitable for new and/or increasingly challenging

15 deposition applications. However, while a great many developments have been made in the field of droplet deposition heads, in many respects droplet deposition heads have still not been perfected.

SUMMARY

Aspects of the invention are set out in the appended claims.

20 **BRIEF DESCRIPTION OF THE DRAWINGS**

The invention will now be described with reference to the drawings, in which:

Figure 1A is a cross-sectional view of a droplet deposition head according to a first embodiment of the invention;

Figure 1B is an end view of the droplet deposition head shown in Figure 1A;

25 Figure 1C is a cross-sectional view of a droplet deposition head according to another embodiment of the invention;

Figure 1D is an end view of the droplet deposition head shown in Figure 1C;

Figure 1E is a cross-sectional view of a droplet deposition head according to a first embodiment of the invention;

Figure 1F is an end view of the droplet deposition head shown in Figure 1E;

5 Figure 2A is a cross-sectional view of a droplet deposition head according to another embodiment of the invention;

Figure 2B is an end view of the droplet deposition head shown in Figure 2A;

Figure 3A is a cross-sectional view of a droplet deposition head according to another embodiment of the invention;

Figure 3B is an end view of the droplet deposition head shown in Figure 3A;

10 Figure 3C is a side view of the droplet deposition head shown in Figures 3A and 3B;

Figure 4 is an exploded perspective view of a droplet deposition head according to another embodiment of the invention;

15 Figure 5A is a perspective view of an upper manifold component of the droplet deposition head of Figure 4;

Figure 5B is a perspective view of a lower manifold component of the droplet deposition head of Figure 4;

20 Figure 6A is a cross-sectional view of the lower manifold component shown in Figures 4 and 5B that illustrates the internal features of the lower manifold component;

Figure 6B is a schematic end view of the lower manifold component of Figure 6A;

Figure 7A is an exploded perspective view of the upper manifold component of Figure 4 and its constituent layers ;

25 Figure 7B is a further exploded perspective view of the upper manifold component of Figure 4 that indicates the features which provide branched inlet and outlet paths for a first type of fluid;

Figure 7C is a further exploded perspective view of the upper manifold component of Figure 4 that indicates the features which provide branched inlet and outlet paths for a second type of fluid;

5 Figure 8A is a partially exposed perspective view of the upper manifold component of Figure 4;

Figure 8B is a perspective view of the fluid flow paths formed in the upper manifold component of Figure 4;

Figure 8C is a top view of the fluid flow paths in the upper manifold component of Figure 4;

10 Figure 9A is a perspective view of one of the branched inlet paths shown in Figures 8A-8C;

Figure 9B is a perspective view of the branched inlet path of Figure 9A showing the disposition of the flow path relative to one of the layers of the upper manifold component;

15 Figure 10 is an example cross-section through a fluid flow path showing first and second curved paths and respective first and second through-holes;

Figure 11 is a schematic end view of the lower manifold components of Figure 4;

Figure 12A is a cross-section through an example of an actuator component, which provides an array of fluid chambers; and

20 Figure 12B is a further cross-section through the actuator component of Figure 12A, the view being taken in the direction of the array of fluid chambers.

Embodiments of the disclosure in general relate to a droplet deposition head, or a manifold component therefor, that comprises a plurality of branched paths for conveying fluid to, or receiving fluid from a number of sub-branches thereof. In

25 some embodiments of the disclosure, these sub-branches may in turn convey fluid to a plurality of widening chambers, which are each fluidically coupled or connected to an array of fluid chambers. The droplet deposition head may provide two or more such arrays of fluid chambers are provided, where each fluid chamber has a respective actuating element and a respective nozzle.

It should be appreciated that the components that provide such arrays are typically costly to manufacture, especially if such components are fabricated from silicon, where fewer rectangular die of larger sizes can be extracted from a standard circular wafer. A related factor is that, the greater the number of fluid

5 chambers of an array or the smaller the feature size (for example in high resolution arrays), the greater the likelihood that defects arise during manufacturing. Thus, it may be appropriate to provide more than one array, each with with a smaller number of fluid chambers, rather than a a single array with a large number of fluid chambers.

10 In some cases, the effective length of an array that is cost-efficient to produce may be excessively small that, unless multiple such arrays are provided within the same head, the resulting head may be of an impractical size for the user to handle.

Further, where it is desirable to provide a plurality of arrays using a number of

15 separate droplet deposition heads (for instance to enable the heads to collectively address a deposition medium, such as a sheet of paper, ceramic tile, circuit board etc. in a single pass these heads must be carefully aligned so that the pattern of droplets that the heads produce in combination is in corresponding alignment. Typically, this will require alignment of the heads to a

20 high level of accuracy, for example the alignment error may be a fraction of the nozzle spacing. Thus, where multiple arrays are provided over a large number of heads (for instance, where each head has only one array), alignment of the arrays may be time-consuming, as compared with the situation where a smaller number of heads, each with a relatively larger number of arrays, is provided.

25 For instance, the arrays within each head may be pre-aligned during printhead manufacture, thus reducing the amount of alignment operations that must be carried out later.

However, if multiple arrays are provided within a single droplet deposition head,

fluid supply to the chambers of the arrays may be complex. For example, it

30 could be necessary to connect fluid supply pipes to a number of inlet ports in order to supply the chambers within the multiple arrays with fluid that has the appropriate fluidic properties.

The branched inlet paths and widening chambers as described herein may allow fluid to be supplied to multiple arrays, using only a small number of inlet ports, and in some cases a single inlet port (thus allowing simple connection of the head to a fluid supply system, it being noted that the head may be in position

5 that makes it hard for the user to reach), but to be distributed to the chambers of the arrays with appropriate control of flow characteristics. For instance, fluid may be supplied with substantially balanced pressures, and/or with balanced flow rates and/or with balanced velocities, to each of the fluid chambers of the arrays.

10 Providing such a construction, including branched paths and widening chambers may, in some arrangements, reduce the size of the head in a direction perpendicular to that in which the arrays extend. This may assist in achieving a

desired level of accuracy in droplet placement on the deposition medium, since maintaining the medium in a desired spatial relationship with respect to the

15 arrays while the head(s) and the medium are moved relative to each other is typically more complex when the heads are relatively larger in the direction of movement (generally perpendicular to the array direction). This may be particularly important when the deposition medium is curved, such as where printing graphics onto bottles, cans and the like.

20 Additionally, or instead, such a construction, including branched paths and widening chambers may, in some arrangements, be relatively compact in the ejection direction, which may in turn simplify integration of the head (or, indeed, a number of like heads) into a larger droplet deposition apparatus.

In one aspect, the following disclosure describes a droplet deposition head

25 comprising one or more manifold components, providing one or more fluid inlets, each of the fluid inlets being connectable to a fluid supply system so that the head can receive a droplet of fluid.

The droplet deposition head comprises two or more arrays of fluid chambers (which may be spaced in a generally regular manner), each chamber being

30 provided with a respective actuating element and a respective nozzle, each actuating element being actuatable to eject a droplet of fluid in an ejection direction through the corresponding one of said nozzles, each array extending in an array direction.

The head extends, in said ejection direction, from a first end, at which said one or more fluid inlets are located, to a second end, at which said arrays of fluid chambers are located. One or more branched inlet paths are provided within the manifold components over a first portion 11 of their height in said ejection

5 direction, each of the branched paths being fluidically connected so as to receive fluid at a main branch thereof from a respective one of said fluid inlets and branching at one or more branching points such that the branched path in question culminates in a number of end sub-branches, to which fluid is conveyed.

10 A plurality of widening inlet chambers are provided within the manifold components over a second portion of their height in said ejection direction, the width of each widening inlet chamber in said array direction increasing with distance in the ejection direction from a first end to a second end thereof, the first end being fluidically connected so as to receive fluid from one or more of
15 said branched paths and the second end being fluidically connected so as to supply fluid to one or more of said arrays. Fluid flowing within each widening inlet chamber may be described as "fanning out" as it approaches the second end of the widening end.

Each of said branched inlet paths is fluidically connected so as to supply fluid to
20 two or more of said widening inlet chambers.

The first portion and second portion may be non-overlapping; for example, the first portion may be spaced apart from the second portion or may be substantially adjacent or contiguous.

It should be appreciated that, depending on the application, a variety of fluids
25 may be deposited by a droplet deposition head. For instance, a droplet deposition head may eject droplets of ink that may travel to a sheet of paper or card, or to other receiving media, such as ceramic tiles or shaped articles (e.g. cans, bottles etc.), to form an image, as is the case in inkjet printing applications (where the droplet deposition head may be an inkjet printhead or,
30 more particularly, a drop-on-demand inkjet printhead).

Alternatively, droplets of fluid may be used to build structures, for example electrically active fluids may be deposited onto receiving media such as a circuit board so as to enable prototyping of electrical devices.

In another example, polymer containing fluids or molten polymer may be

5 deposited in successive layers so as to produce a prototype model of an object (as in 3D printing).

In still other applications, droplet deposition heads might be adapted to deposit droplets of solution containing biological or chemical material onto a receiving medium such as a microarray.

10 Droplet deposition heads suitable for such alternative fluids may be generally similar in construction to printheads, with some adaptations made to handle the specific fluid in question.

Droplet deposition heads as described in the following disclosure may be drop-on-demand droplet deposition heads. In such heads, the pattern of droplets

15 ejected varies in dependence upon the input data provided to the head.

Turning now to Figures 1A to 1D, the example embodiment shown relates in general to a droplet deposition head 10 comprising one or more manifold components, for instance in the arrangement of Figures 1C and 1D, an upper manifold component 100 and a lower manifold component 50. The droplet

20 deposition head 10 may comprise, at an end of one of the manifold components, two or more arrays 150 with respective fluid chambers together with corresponding actuating elements and nozzles for ejecting fluid in an ejection direction.

As will be discussed in greater detail below, the manifold components comprise

25 one or more branched inlet paths 180 that branch into at least two corresponding sub-branches 182, 185 over a first portion of the height 11 of the droplet deposition head 10 in the ejection direction 505. The one or more branched inlet paths 180 are provided, for instance, within the upper manifold component 10. The manifold components also provide a plurality of widening 30 chambers 55. Specifically, these are provided within the manifold components over a second portion of their height 12 in the ejection direction 505. The plurality of widening chambers 55 may, for instance, be provided within the

lower manifold component 50. Each of the sub-branches 20 may be fluidically coupled to a respective widening chamber 55.

As noted above, the branched paths and widening chambers allow fluid to be supplied to the droplet deposition head via using only a small number of inlet

5 ports, and in some cases a single inlet port, but allow fluid to be distributed, for example at a substantially even pressure and flow rate, to each of the fluid chambers of the array. This may simplify coupling of the droplet deposition head to a fluid supply. Providing such an arrangement of branched paths and widening chambers may enable the droplet deposition head to be relatively
10 compact in the ejection direction, which may in turn simplify integration of the head (or, indeed, a number of like heads) into a larger droplet deposition apparatus.

Additionally, or instead, certain constructions having such branched paths and widening chambers may be compact in a direction perpendicular to the array

15 direction. As noted above, this may assist in achieving a desired level of accuracy in droplet placement on the deposition medium, since maintaining the medium in a desired spatial relationship with respect to the arrays while the head(s) and the medium are moved relative to each other is typically more complex when the heads are relatively larger in the direction of movement
20 (generally perpendicular to the array direction).

In the example embodiment of Figures 1A and 1B, which show a cross-sectional view of a droplet deposition head and an end view of a droplet deposition head respectively according to an embodiment of the invention (with the cross-section of Figure 1A being taken in the plane indicated by line 1A in Figure 1B), the

25 droplet deposition head 10 extends, in an ejection direction, from a first end, at which a fluid inlet 120 is located, to a second end, at which two arrays 150 of fluid chambers are located. As may be seen, the head 10 further includes a manifold component 80, with the two arrays 150 being mounted at an end of the manifold component 80.

30 Each of the fluid chambers in the two arrays 150 is provided with a respective actuating element and a respective nozzle. As may be seen from Figure 1B, each array 150 extends in an array direction 500. The two arrays 150 shown in Figures 1A and 1B are spaced apart, one from the other, in a depth direction 510

(which, in the specific arrangement displayed, is substantially perpendicular to the array direction 500 and to the ejection direction 505), allowing the two arrays 150 to overlap in the array direction 500. It will be understood that the corresponding nozzles for the arrays will be similarly arranged.

- 5 In the specific construction shown in Figures 1A and 1B, each array of fluid chambers is provided by a respective actuator component, which, in the case of a thin-film type droplet deposition head, may be a silicon die stack. An example of such an actuator component is described further below with reference to Figure 12.
- 10 As is also shown in Figure 1B, the amount of overlap in the array direction 500 is small in comparison to the length of each array 150 in the array direction 500. This overlap may allow the two arrays 150 to collectively address a deposition medium (such as a sheet of paper, ceramic tile, circuit board etc.) in a similar manner to a single array having the overall width of the two arrays, as it is indexed past the head 10, for instance in depth direction 510. The two arrays may, for example, enable the medium to be addressed in a single pass, where their overall width is sufficiently large. In some cases, the overlap region may allow for fine alignment between the two arrays by electronic means, for example by selecting suitable nozzles between the arrays in the overlap region
- 15 20 and controlling their droplet ejection properties through their individual drive waveform.

As shown in Figure 1A, the branched inlet path 180 is fluidically coupled to the fluid inlet 120 and is provided within the manifold component 80 over a first portion 11 of the height of the droplet deposition head 10 in the ejection direction 505. The branched inlet path 180 divides, at a branching point 186, into two sub-branches 182(a),(b). In the simple branching structure shown in Figure 1A, which has only one branching point 186, these sub-branches are end sub-branches 182(a),(b); the branched inlet path 180 culminates in these end sub-branches 182(a),(b). Each of the end sub-branches 182(a),(b) is fluidically coupled to the fluid inlet 120 via the main branch 181 of the branched inlet path 180.

As may also be seen from Figure 1A, two widening inlet chambers 55(a), 55(b) are provided over a second portion 12 of the height of the droplet deposition

head 10 in the ejection direction 505. The width of each widening inlet chamber 55(a), 55(b) in the array direction 500 increases with distance in the ejection direction 505 from its first end to its second end. In this way, the width of each widening inlet chamber 55 increases as it approaches the arrays 150.

5 In the specific example shown in Figure 1A, the width of the widening chamber in the array direction 500 increases at a substantially constant rate with increasing distance in the ejection direction 505. The sides of each widening inlet chamber 55 are substantially straight, when viewed in a depth direction 510 (substantially perpendicular to the array direction 500 and the ejection
10 direction 505).

It should be noted that the sides (with respect to the chamber height in the ejection direction 505) of the widening inlet chamber 55(a), 55(b) may be shaped in such a way as to assist in providing fluid to the chambers within the corresponding one of the arrays 150 with balanced flow characteristics (for
15 instance with substantially balanced pressures, and/or with balanced flow rates and/or with balanced velocities). Hence (or otherwise), the sides of each widening inlet chamber 55 in some alternative constructions may instead be convex, or concave, when viewed in the depth direction 510 (though such shapes may, depending on the circumstances, be more difficult to manufacture).

20 More generally, it should be noted that the width of each widening inlet chamber 55 in the array direction 500 may increase with distance in the ejection direction 505 from its first end to its second end in any suitable manner. The increase may, for example, be gradual and/or the width in the array direction may increase substantially monotonically with respect to distance in the ejection
25 direction 505, as is the case in Figure 1A.

It should be noted that, in the specific droplet deposition head of Figures 1A-1D, the depth of each widening inlet chamber 55 does not change significantly over the height of the widening inlet chamber 55; however, in other examples the depth may taper towards the second end of the widening inlet chamber 55,
30 where it is fluidically connected to a corresponding one of the arrays 150. For example, the size of the widening inlet chamber in the depth direction 510 may decrease with increasing distance in the ejection direction 505. The depth and width of the widening inlet chamber might, for example, change in such a way

that the cross-sectional area of the widening inlet chamber remains constant for substantially the whole of its height.

As is shown in Figure 1A, each widening inlet chamber 55 is fluidically connected, at its first end, to a corresponding one of the end sub-branches 5 182(a), 182(b) and, at its second end, to a corresponding one of the arrays 150.

Specifically, as may be seen from Figure 1A, widening inlet chamber 55(a) is fluidically connected at its first end to sub-branch 182(a) and is fluidically connected at its second end to array 150(a), whereas widening inlet chamber 55(b) is fluidically connected at its first end to sub-branch 182(b) and is 10 fluidically connected at its second end to array 150(b).

As may also be seen from Figure 1A, the width, in the array direction 500, of each of the widening inlet chambers 55 at its second end (that nearest the arrays 150) is substantially equal to the width of the array 150 to which it supplies fluid. This may assist in evenly distributing fluid over the length of the 15 array 150.

As may also be seen from Figure 1A, the extent of each widening inlet chamber 55 in the ejection direction 505 is greater than its extent in the array direction 500. This may assist in developing an evenly distributed flow of fluid at the ends 20 of the widening inlet chambers 55 that are connected to the arrays 150. More generally, a similar effect may be experienced where the extent of each widening inlet chamber 55 in the ejection direction 505 is approximately equal to or greater than its extent in the array direction 500.

As may be seen from Figures 1A and 1B, the branched inlet path 180 is fluidically connected so as to receive fluid from the fluid inlet 120, which is then 25 conveyed through the branched inlet path 180, until it reaches the end sub-branches 182(a), 182(b). Each of the end sub-branches 182(a), 182(b) is then fluidically connected so as to supply fluid to a respective one of the widening inlet chambers 55 at a first end thereof (that furthest from the arrays 150). The second end (that nearest the arrays 150) of each of said widening inlet 30 chambers 55 is configured to supply fluid to a corresponding array 150.

In some examples, each sub-branch within the branched inlet path 180 is adapted to provide balancing of the flow characteristics for the fluid in the sub-

branches, for instance so that the sub-branches have balanced pressures, and/or balanced flow rates and/or balanced velocities..

As is apparent from Figure 1A, the two widening inlet chambers 55(a), 55(b) have substantially the same shape. Hence (or otherwise), the widening inlet 5 chambers 55 of the droplet deposition head 10 may be shaped so as to have substantially the same effect on fluid flowing through them.

The fluid inlet 120 is configured to receive fluid from a fluid supply system,

which may supply fluid at a positive pressure. The actuating elements of the arrays 150 are configured to be actuatable by drive circuitry (not shown), such as

10 ICs (Integrated Circuits) or ASICs (Application-Specific Integrated Circuits), to eject droplets from the nozzles of the chambers that are deposited on a deposition medium.

In use (for example, following the connection of the inlet 120 to a suitable fluid supply system and activation of the fluid supply system), fluid is supplied to the

15 droplet deposition head 10 via the fluid inlet 120 and thereby reaches the branched inlet path 180. The fluid flows down along the branched inlet path 180 and splits from a main branch 181, at branching point 186, into each of two sub-branches 182(a), 182(b). As noted above, as there is only one branching point in the branched inlet path 180, these sub-branches are end sub-branches

20 182(a), 182(b). From each end sub-branch 182(a), 182(b), the fluid flows into a first end of a corresponding widening inlet chamber 55(a), 55(b). Each widening inlet chamber 55(a), 55(b) widens as the fluid flows down, in an ejection direction 505, through the droplet deposition head 10 towards the arrays 150. Because each widening inlet chamber 55 widens, the fluid is spread

25 out and distributed over the length of each array 150 at the second end of each widening inlet chamber 55. As discussed above, each widening inlet chamber 55 may be shaped such that fluid is distributed to the chambers within the corresponding one of the arrays 150 with balanced flow characteristics (for example, with balanced pressures, and/or with balanced flow rates and/or with

30 balanced velocities for the chambers of the arrays).

Thus, the combination of the branched inlet path 180 and widening inlet chambers 55 may supply fluid from a single fluid inlet port 120 to the chambers of a number of arrays 150 with balanced flow characteristics.

In some examples, as shown in Figures 1C and 1D, which show, respectively, a cross-sectional view and an end view of a modified version of the droplet deposition head shown in Figures 1A and 1B (with the cross-section of Figure 1C being taken in the plane indicated by dashed line 1C in Figure 1D), the droplet deposition head 10 comprises an upper manifold component 100 and a lower manifold component 50.

The lower manifold component 50 is coupled to the upper manifold component 10. The upper manifold component 100 comprises the branched inlet path 180, including the main branch 181, the branching point 186 and the end-sub branches 182(a), 182(b). The lower manifold component 50 comprises the widening inlet chambers 55.

The upper manifold component 100 may be coupled to the lower manifold component 50 in any suitable manner such as, for example, using adhesive or fixing means, such as a screw or bolt, or via an ultrasonic weld.

In some examples, as illustrated in Figures 1E and 1F, which show, respectively, a cross-sectional view and an end view of a modified version of the droplet deposition head of Figures 1A and 1B (with the cross-section of Figure 1E being taken in the plane indicated by 1E in Figure 1F), the droplet deposition head 10 may be formed, at least in part, from a plurality of layers 600. As may be seen, in the specific example of Figures 1E and 1F, each of the layers extends in a plane that is generally normal to the ejection direction 505. The branched inlet paths 180 and the widening inlet chambers 55 are formed by the different layers 600 being stacked upon each other.

While in the specific example shown in Figures 1C the upper manifold component 100 is illustrated as being attached directly to the lower manifold component 50, the upper manifold component 100 could, for example, be connected to the lower manifold component 50 with a plurality of flexible connectors, each of which providing a fluid path therethrough. An example of such a connection arrangement will be described in more detail below with reference to Figure 4. Such flexible connectors may reduce the transfer of mechanical stress from the upper manifold 100 to the lower manifold 50. This may be an important consideration, for instance, when a user is connecting the inlet port 120 to a fluid supply or reservoir.

While not shown in Figures 1A-1D, a driver IC may be provided on the outer surface of the droplet deposition head 10.

While in the specific examples shown in Figures 1A-1D the branched inlet path 180 includes only one branching point 186 and, therefore, only two sub-

5 branches 182(a), 182(b), it should be appreciated that branched inlet paths 180 could split into more sub-branches 182, 185. This will be demonstrated with reference to the example droplet deposition head 10 shown in Figures 2A and 2B, which is in many respects similar to the droplet deposition head 10 shown in Figures 1A and 1B.

10 In the droplet deposition head 10 shown in Figures 2A and 2B, the branched inlet path 180 in the upper manifold 100 splits from a main branch 181 and culminates in four end sub-branches 182(a)-(d), with each end sub-branch 182(a)-(d) being fluidically coupled to a respective widening inlet chamber 55.

More specifically, main branch 181 branches at a first-level branching point

15 186(i) (where the suffix (i) indicates the first level) into two sub-branches, which in turn branch at respective branching points 186(ii)(a), 186(ii)(b) into the four end sub-branches 182(a)-(d).

It should however be noted that, while in the droplet deposition head 10 of Figures 2A and 2B, the branched inlet path 180 includes only three branching

20 points 186(i), 186(ii)(a), 186(ii)(b), in other examples, each branched inlet path 180, by having the appropriate number of branching points 186 (and/or by branching into more than two sub-branches 185 at each branching point 186), may culminate in any other number of end sub-branches 182.

It may further be noted that in the droplet deposition head 10 shown in Figures

25 1A-1D and 2A-2B only a single fluid inlet 120 is provided. As a result, only a single type of fluid (e.g. one colour of ink, in the case where the droplet deposition head 10 is configured as an inkjet printhead) is supplied to the arrays

150. However, it should be appreciated that, the droplet deposition head 10 could include a first group of two or more arrays 150 for depositing a first type

30 of droplet fluid and a second group of arrays 150 for depositing a second type of droplet fluid. The different types of droplet fluid may, where the droplet deposition head 10 is configured as an inkjet printhead, correspond to different

colours of ink, for instance. Accordingly, more than two such groups may be provided; for example, four groups of arrays could be provided, one for each of the four process colours (cyan, magenta, yellow and black). Where the head is configured for use with several different types of droplet fluid, the fluid paths

5 may be arranged such that the different types of fluid are separated from each other within the head.

In such examples, each type of droplet fluid may be received from a respective fluid inlet 120. Similarly to the example arrays shown in Figures 1B and 2B, adjacent arrays 150 within the same group may be spaced apart in a depth

10 direction 510 so as to allow them to overlap in the array direction 500, for example by a relatively small amount in comparison with the length of the array. In addition, each of the arrays 150 in a first group may be aligned in the array direction 500 with a respective one of the arrays 150 in a second group. In this way, as the deposition medium is indexed past the droplet deposition heads,

15 each portion of the width (in the array direction 500) of the deposition medium is addressed by an array from every group.

In some examples, for each lower manifold component 50, pairs of arrays 150 from the same group (and therefore receiving the same type of fluid) may be provided side-by-side, with both of the arrays within the pair being fluidically

20 connected to the same widening inlet chamber 55. Thus, when viewed from the ejection direction 505 (for instance as shown in Figures 1B and 2C), the arrays 150 within each pair may be disposed on either side of the shared widening inlet 55. The widening inlet 55 may thus appear to divide or separate the arrays 150 when viewed from the ejection direction 505 (though it should be noted that it

25 may not necessarily physically separate the pair of arrays 150, especially where the pair of arrays 150 is provided by a single actuator component, and may thus be offset from the pair of arrays in the ejection direction 505).

Attention is now directed to Figures 3A, 3B and 3C, which show, respectively, a cross-sectional view, a side view and an end view of a droplet deposition head

30 10 according to another embodiment of the invention (with the cross-section of Figure 3A being taken in the plane indicated by dashed line 3A in Figures 3B and 3C). As may be seen, the droplet deposition head 10 of Figures 3A-3C

comprises an upper manifold component 100 and a plurality of lower manifold components 50, in this example two lower manifold components 50.

As may be seen from Figures 3A and 3B, the manifold components provide a fluid outlet 220, in addition to a fluid inlet 120. Thus, the droplet deposition head 10 of Figures 3A, 3B and 3C may be considered an example of a head where the plurality of manifold components 100, 50 provides one or more fluid outlets.

As will be appreciated from the drawings, the example droplet deposition head 10 shown in Figures 3A, 3B and 3C has a similar branched fluid inlet path structure 180 to that described above in relation to Figures 1A, 1B, 2A and 2B, but additionally has a branched fluid outlet path structure 280 for returning fluid to the fluid supply or reservoir. This may enable recirculation of fluid through the head, for example by establishing a continuous flow of fluid through the head during use. More particularly, there may be established a continuous flow of fluid through each of the chambers in the arrays. This flow may, depending on the configuration of the fluid supply system (e.g. the fluid pressures applied at the fluid inlet 120 and fluid outlet 220), continue even during droplet ejection, albeit potentially at a lower flow rate.

As shown in Figures 3A, 3B and 3C, the fluid outlet 220 is located at the same end of the droplet deposition head 10 as the fluid inlet 120 (specifically, the end furthest from the arrays 150 in the droplet ejection direction 505).

In the example shown in Figure 3A, two branched outlet end sub-branches 282(a), 282(b) are provided within the upper manifold component 10. Each of the branched outlet end sub-branches 282(a), 282(b) is fluidically connected, at a branching point 286, to the main branch 281 of the branched outlet path 280. The main branch 281 is, in turn, coupled to the fluid outlet 220. The plurality of sub-branches 282(a), 282(b) and the main branch 281 together form a single branched outlet path 280.

Although, during use, fluid will flow from the end sub-branches 282(a), 282(b) to the main branch 281 to be returned to the fluid outlet 220 (as will be discussed in detail below), the branched outlet path 280 may nonetheless be

described, in a topological sense, as “culminating” in the end sub-branches 282(a), 282(b).

As may be seen from Figures 3B and 3C, one widening inlet chamber 55(a), 55(b) and one narrowing outlet chamber 60(a), 60(b) is provided within each 5 lower manifold component 50. The width of each narrowing outlet chamber 60(a), 60(b) in the array direction decreases with distance in a direction opposition to the ejection direction 505 from a first end (that nearest the arrays 150), which is fluidically coupled to a corresponding fluid array 150, to a second end (that furthest from the arrays 150), which is fluidically coupled to a 10 corresponding one of the end sub-branches 282(a), 282(b) provided by the branched outlet path 280.

As is apparent from Figure 3A, the width in the array direction 500 of each of the narrowing outlet chambers 60 at its first end is substantially equal to the width of the array 150 from which it receives fluid. As noted above, this may assist in 15 evenly distributing fluid over the length of each array 150.

As is also apparent from Figure 3A, the extent of each widening inlet chamber 55 in the ejection direction 505 is greater than its extent in the array direction 500. As also discussed above, this may assist in developing an evenly distributed flow 20 of fluid at the ends of the widening inlet chambers 55 that are connected to the arrays 150.

As illustrated in Figures 3A and 3B, the fluid inlet structure overlaps parts of the fluid outlet structure in the array direction 500. For instance, each narrowing outlet chamber 60 overlaps, in an array direction 500 of the droplet deposition head 10, with a widening inlet chamber 55. In addition, the branched inlet path 25 180 overlaps, in the array direction 500, with the branched outlet path 280. As is apparent from Figure 3B, the branched outlet path 180 overlaps with the branched inlet path 280 in the head depth direction 510 as well (the depth direction 510 being perpendicular to the array direction 500 and to the ejection direction 505).
30 Each lower manifold component 50 provides fluidic connection to at least one array of chambers 150. In the example shown in Figure 3C, each lower manifold component 50 has mounted thereupon a respective array of chambers 150. As

shown in Figure 3C, one lower manifold component 50(a) is spaced apart from the other 50(b) in the depth direction 510, while overlapping in the array direction 500. Similarly, the array 150(a) of one lower manifold component is spaced apart from the array 150(b) of the other lower manifold component 5 50(b) in the depth direction 510, while the arrays 150(a), 150(b) overlap in the array direction 500. It will be understood that the corresponding nozzles for the arrays will be similarly arranged.

The fluid inlet structure shown in Figures 3A, 3B and 3C connects to a fluid supply system using inlet 120 and thereafter functions in generally the same 10 way as that described above in reference to Figures 1A, 1B, 2A and 2B.

The fluid outlet 220 is connectable to a fluid supply system so that the head 10 can return droplet fluid to the fluid supply system. The fluid supply system may, for example, be configured to apply a negative pressure to the fluid outlet 220 so as to draw droplet fluid through the system. In addition, the fluid supply 15 system will typically be configured to apply a positive pressure to the fluid inlet 120 (though, potentially, the negative pressure at the fluid outlet 220 could be used alone in some circumstances).

As may be seen from Figures 3A, 3B and 3C, each of the branched outlet end sub-branches 282(a), 282(b) is configured to receive fluid from a corresponding 20 narrowing outlet chamber 60(a), 60(b). As is also shown, the first end of each of the narrowing outlet chambers 60(a), 60(b) (that nearmost the arrays 150) is configured to receive fluid from a respective array 150.

In the specific example shown in Figures 3A-3C, the width of the widening inlet chambers 55 in the array direction 500 increases at a substantially constant rate 25 with increasing distance in the ejection direction 505. The sides of each widening inlet chamber 55 are substantially straight, or linear, when viewed in depth direction 510 (which is substantially perpendicular to the array direction 500 and the ejection direction).

It should be noted that the sides (with respect to the chamber height in the 30 ejection direction 505) of the widening inlet chamber 55(a), 55(b) may be shaped in such a way as to assist in providing fluid to the chambers within the corresponding one of the arrays 150 with balanced flow characteristics (for

instance with substantially balanced pressures, and/or with balanced flow rates and/or with balanced velocities). Hence (or otherwise), the sides of each widening inlet chamber 55 in some alternative constructions may instead be convex, or concave, when viewed in the depth direction 510 (though such 5 shapes may, depending on the circumstances, be more difficult to manufacture).

More generally, it should be noted that the width of each widening inlet chamber 55 in the array direction 500 may increase with distance in the ejection direction 505 from its first end to its second end in any suitable manner. The increase may, for example, be gradual and/or the width in the array direction may 10 increase substantially monotonically with respect to distance in the ejection direction 505, as is the case in Figure 3A.

It will further be noted that, in the specific example shown in Figures 3A-3C, the width, in the array direction 500, of the narrowing outlet chambers 60 decreases at a substantially constant rate with increasing distance in a direction opposition 15 to the ejection direction 505. The sides of each narrowing outlet chamber 60 are substantially straight, or linear, when viewed in depth direction 510 (which is substantially perpendicular to the array direction 500 and the ejection direction).

It should be noted that the sides (with respect to the chamber height in the ejection direction 505) of each narrowing outlet chamber 60(a), 60(b) may be 20 shaped so as to assist in balancing the flow characteristics of fluid at the arrays 150. For instance, the shape may assist in balancing the pressures and/or flow rates and/or velocities of the fluid in the chambers of the arrays 150. Hence (or otherwise), the sides of each narrowing outlet chamber 60 in some alternative constructions might instead be convex, or concave, when viewed in the depth 25 direction 510 (though such shapes may, depending on the circumstances, be more difficult to manufacture).

More generally, it should be noted that the width, in the array direction 500, of each narrowing outlet chamber 60(a), 60(b) may decrease with distance in a direction opposition to the ejection direction 505 in any suitable manner. The 30 increase may, for example, be gradual and/or the width in the array direction may increase substantially monotonically with respect to distance in the ejection direction 505, as is the case in Figure 3A.

It should still further be noted that, in the specific droplet deposition head of Figures 3A-3C, the depth of each widening inlet chamber 55 does not change significantly with distance 55 in the ejection direction 505. However, in other examples the depth of each widening inlet chamber 55 may taper towards the 5 second end of the widening inlet chamber 55, where it is fluidically connected to a corresponding one of the arrays 150. For example, the size of the widening inlet chamber in the depth direction 510 may decrease with increasing distance in the ejection direction 505. The depth and width of the widening inlet chamber might, for example, change in such a way that the cross-sectional area of the 10 widening inlet chamber 55 remains constant for substantially the whole of its height in the ejection direction 505.

It will similarly be noted that the depth of each narrowing outlet chamber 60 does not change significantly with distance 55 in the ejection direction 505. However, in other examples the depth of each narrowing outlet chamber 60 may 15 taper towards the first end of the narrowing outlet chamber 60, where it is fluidically connected to a corresponding one of the arrays 150. For example, the size of the narrowing outlet chamber 60 in the depth direction 510 may decrease with increasing distance in the ejection direction 505. The depth and width of the widening inlet chamber might, for example, change in such a way that the 20 cross-sectional area of the narrowing outlet chamber 60 remains constant for substantially the whole of its height in the ejection direction 505.

In use, fluid is supplied to each array 150 of the droplet deposition head 10 in generally the same way as described above in relation to Figures 1A, 1B, 2A and 2B.

25 However, once fluid is supplied to each array 150, and more particularly to the chambers thereof, the fluid may, as part of the recirculation of fluid through the head mentioned above, flow through each of the chambers. For example, where the chambers are elongate, the fluid may flow along their lengths. When the actuating elements of the array 150 are then actuated so as to cause the 30 ejection of droplets through the nozzles of the chambers, some fluid will leave the chambers in the form of droplets. Also as part of the recirculation of fluid through the head, fluid that is not ejected will flow from the chambers into a corresponding narrowing fluid outlet chamber 60(a), 60(b) in the lower manifold

50. As the fluid flows through the narrowing fluid outlet chamber 60(a), 60(b), the flow is concentrated in a manner similar to a funnel so that the fluid flows out of the narrowing outlet chamber 60 and into an outlet end sub-branch 282(a), 282(b). Fluid flows through the outlet sub-branches 282(a), 282(b) of

5 the branched outlet path 280 in the upper manifold 100 and is combined at a branching point 286, before flowing into and along the main path 281 of the branched outlet path 280. The fluid flows from the main branch 281 of the branched outlet path 280 to the fluid outlet 220, where it may return to the fluid supply system.

10 While the droplet deposition head 10 of Figures 3A-3C has been described as having only one fluid inlet 120 and one fluid outlet 220, it should be appreciated that, particularly where different groups of arrays are provided, several fluid inlets and several fluid outlets could be included. For instance, a respective fluid inlet and a respective fluid outlet could be provided for each of a number of

15 different types of droplet fluid. A respective group of arrays could be provided for each type of droplet fluid. The different types of droplet fluid may, where the droplet deposition head 10 is configured as an inkjet printhead, correspond to different colours of ink, for instance. Where the head is configured for use with several different types of droplet fluid, the fluid paths may be arranged such that

20 the different types of fluid are separated from each other within the head.

It should further be noted that, while the droplet deposition head 10 of Figures 3A-3C is illustrated as having only one array for each lower manifold component 50, it is envisaged that each lower manifold component may provide fluidic connection to multiple arrays.

25 For instance, a widening inlet chamber 55 may be configured to provide fluid to two arrays 150 from the same group. In such examples, the two arrays may share a widening inlet chamber 55 but have a respective narrowing outlet chamber 60, such that there are two narrowing outlet chambers 60 and one widening inlet chamber 55 per two arrays 150 of the same group. Alternatively,

30 the two arrays 150 could each be provided with a respective widening inlet chamber 55 and share a single narrowing outlet chamber 60.

Indeed, in some examples, each lower manifold component 50 may provide fluidic connection to arrays from two or more groups of arrays, with each group corresponding to a specific type of droplet fluid, as discussed above.

In some examples, arrays 150 that correspond to the same lower manifold

- 5 component 50 and to the same group may be spaced apart from one another in the depth direction 510 and offset from one another in the array direction 500, for example by a small amount, for example, of the order of the nozzle spacing for each array. The offset could, for example be approximately $1/N$ times the nozzle spacing, where N is the number of arrays within the same group that
- 10 correspond to the same lower manifold component (or, potentially, $M+1/N$ times the nozzle spacing, where M is an integer). Hence, or otherwise, the nozzles of the N arrays may together provide an array of nozzles with spacing $1/N$, when viewed in a depth direction 505, perpendicular to the array direction 500 and the ejection direction 510. The nozzles from the N arrays may accordingly be
- 15 interleaved with respect to the array direction 500, for example as shown in Figure 6B. Thus, the multiple arrays may provide the printhead with a higher resolution than a single array.

Hence, or otherwise, arrays 150 may overlap in the array direction 500 by an

- 20 amount less than the distance between pressure chambers, such that their nozzles are interleaved with respect to the array direction 500. Such an arrangement may improve the resolution that can be printed by the droplet deposition head 10.

In some examples, each lower manifold component may provide fluidic connection to arrays from multiple groups. In such cases, the arrays 150

- 25 corresponding to different groups (but to the same lower manifold component 50) may be aligned in the array direction 500. In this way, as the deposition medium is indexed past the droplet deposition heads, each portion of its width in the array direction 500 is addressed by an array from each of the two or more groups

- 30 It is envisaged that at least one of the narrowing outlet chambers 60 for each lower manifold component 50 may be provided adjacent an outer surface of that lower manifold component 50. Such an arrangement may provide cooling to

circuitry coupled to the outer surface of the lower manifold component 50 or the droplet deposition head 10 more generally.

It should be noted that, the droplet deposition head shown in Figures 3A, 3B and 3C may comprise any of the features described above in relation to Figures 1A,

5 1B, 2A and 2B.

Figures 4 to 11B illustrate a droplet deposition head 10 according to a further embodiment of the invention. Figure 4 shows an exploded perspective view of an example droplet deposition head 10. As may be seen, the droplet deposition head 10 comprises an upper manifold component 100 and four lower manifold

10 components 50.

The droplet deposition head of Figures 4 to 11B is configured for use with two different types of droplet fluid and, when connected to a suitable fluid supply system, may provide for recirculation of the droplet fluid, in a similar manner to that described above with reference to Figure 3A-3C. Accordingly, the droplet

15 deposition head includes two fluid inlets 120(1), 120(2) and two fluid outlets 220(1), 220(2) (where the suffixes (1) and (2) indicate that the inlet/outlet is configured for use with, respectively, droplet fluid of the first and of the second type).

As also shown in Figure 4, between the upper manifold component 100 and each

20 lower manifold component 50 are a series of flexible connectors 75. Some of the flexible connectors 75 couple end sub-branches 20 of the branched inlet paths 180 within the upper manifold component 100 to widening inlet chambers 50 within the lower manifold components 50, whereas other flexible connectors 75 couple end sub-branches 32 of the branched outlet paths 280 within the

25 upper manifold component 100 to narrowing outlet chambers 55 within the lower manifold components 50.

The flexible connectors 75 are therefore adapted to transfer fluid from the upper manifold component 100 to the lower manifold components 50, and vice versa.

Accordingly, the flexible connectors may be individually designed so as to make

30 respective small adjustments to individual fluid paths between the lower manifold components 50 and the upper manifold component 100. For instance, these adjustments may improve the balance of the flow characteristics of the

paths (e.g. balancing the pressures, and/or the flow rates and/or the velocities, within the paths). Thus, the flexible connectors might be used to correct small deviations in flow characteristics that arise from manufacturing variability.

The particular flexible connectors 75 in the example shown have an hourglass configuration, so that they narrow at their waists. The narrowing at the waist of each flexible connector 75 may allow it to bend or flex about the waist. This flexibility may assist in compensating for minor misalignments of the upper manifold component 100 with respect to the various lower manifold components 50.

More generally though, the flexible connectors 75 are adapted to flex and bend if one component, for instance the upper manifold component 10, is moved with respect to the other, for instance the lower manifold component 50, but to still maintain a sealed fluidic connection between the two. In this way, the flexible connectors 75 may reduce the transfer of mechanical stress from the upper manifold component to the lower manifold components while still acting to transfer fluid from the upper manifold component 100 to the lower manifold components 50, and vice versa.

As shown in Figure 5A, which shows a perspective view of an upper manifold component 100 of the droplet deposition head of Figure 4, it will be noted that the specific example of an upper manifold component 100 shown is generally z-shaped, when viewed in the ejection direction 505. The z-shape of the upper manifold component 100 is configured to engage with a z-shape of another upper manifold component 100 so that a series of droplet deposition heads 10 can be arranged together on a support (such as a print bar, in the case of an inkjet printhead) in an interlocking, or tessellating manner so as to provide overlap between arrays from different heads. Of course, it will be appreciated that other shapes of the upper manifold component are possible in order to provide tessellation and, more generally, overlap between arrays from different heads. Indeed, the head could have a simple cuboid form.

As may be seen from Figure 5A, the upper manifold component 100 provides the two inlet ports 120(1), 120(2) and the two outlet ports 220(1), 220(2) at a first end of the head 10. As noted above, each inlet port 120(1), 120(2), and each outlet port 220(1), 220(2) may, for example, be configured to supply or receive

a different type of fluid, such as a different colour of ink (the suffixes (1) and (2) indicate that the inlet or outlet port in question is configured for use with, respectively, a first or a second type of fluid). Specifically, inlet port 120(1) and outlet port 220(1) are configured for, respectively, the supply and return of a 5 first type of droplet fluid, while inlet port 120(2) and outlet port 220(2) are configured for, respectively, the supply and return of a second type of droplet fluid.

As will be described in more detail below with reference to Figures 7A-7C, the upper manifold component 100 is formed from a plurality of layers. As is shown 10 in Figure 5A, the upper manifold component 100 comprises a fastening feature 30 at each end for coupling the upper manifold component 100 to a structure, such as a cover component (not shown).

Returning now to Figure 4, it should be noted that lower manifold components 50 are each mounted in a respective recess in a base 200. As may be seen, the 15 base 200 generally mirrors the shape of the upper manifold component 10. The frame 200 is adapted to receive the lower manifold components 50. More particularly, a carrier layer 76 of each lower manifold component is shaped so as to slot into the corresponding recess in base 200. The base 200 may have features to assist in mounting it on a support. For instance, it may include 20 alignment features, such as one or more datums, as well as attachment features, such as screw-holes to allow the base 200 to be attached to the support using screws.

Attention is now directed to Figure 5B, which shows a perspective view of a lower manifold component 50 of the droplet deposition head 10 of Figure 4. As 25 may be seen, each lower manifold component 50 comprises two inlet ports 65(1), 65(2) and two outlet ports 67(1), 67(2). As with the ports of the upper manifold layer 10, each inlet port 65(1), 65(2), and each outlet port 67(1), 67(2) is configured to receive a different type of fluid, such as a different colour of ink.

30 Each lower manifold component 50 supplies fluid to and receives fluid from a number of arrays of fluid chambers 150. More particularly, each lower manifold component 50 supplies fluid of a first type to, and receives fluid of a first type from, two arrays of fluid chambers 150, while also supplying fluid of a second

type to, and receiving fluid of a second type from, two arrays of fluid chambers 150.

As may be seen from Figure 5B, each lower manifold component 50 is formed from a plurality of layers. Each layer extends generally perpendicularly to the

- 5 ejection direction 505. Utilising layers that extend generally perpendicularly to the ejection direction 505 may enable the various narrowing and widening chambers 55, 60 to be formed accurately and relatively straightforwardly, since the layers will generally "cut across" these chambers. Hence, only a small number of layers may be required, it being appreciated that the lower the
- 10 number of layers, the better the alignment will be between the layers. More specifically, the alignment between the top layer 70 in Figure 5B, which provides fluidic connection to the upper manifold component 100, and the bottom layer 76 in Figure 5B, which provides fluidic connection to the arrays 150 may be improved owing to reduced accumulation of alignment error.
- 15 It should however be noted that the lower manifold component 50 may be formed in any suitable manner; for example, it could be formed (at least in part) from a plurality of layers that each extend perpendicularly to the depth direction 505 or, potentially, layers that each extend perpendicularly to the array direction 500.
- 20 In the specific example shown in Figures 5B, 6A and 6B, each lower manifold component has four layers: a first lower manifold layer 70, a second lower manifold layer 72, a third lower manifold layer 74 and a fourth lower manifold layer 76, which is a carrier layer 76.

As is apparent from Figure 5B, in the particular example shown, the first lower

- 25 manifold layer 70 is mounted within the second lower manifold layer 72, with the second lower manifold layer 72 having two arms that cradle the first lower manifold layer 70.

Each lower manifold component 50 also comprises holes 52 that extend through the layers of the lower manifold component 50 at opposing ends. Each hole can

- 30 receive a fastening means such as a screw, bolt, fastening rod etc. that fastens the layers together. In addition (or potentially instead), the layers of the lower manifold component may be coupled by welding, glue bonding, etc.

Figure 6A, which is a cross-sectional view of the lower manifold component shown in Figures 4 and 5B, illustrates the internal features of the lower manifold component. More particularly, Figure 6A illustrates as solid objects the respective spaces within the widening inlet chamber 55(1), the narrowing outlet chambers 60(1)(i), 60(1)(ii) and the inlet and outlet port 65(1), 67(1) for one type of droplet fluid.

Addressing the layers in order of increasing proximity to the arrays 150, the first lower manifold layer 70, as may be seen from Figure 6, comprises inlet ports 65(1), 65(2) and outlet ports 67(1), 67(2). The inlet ports 65(1), 65(2) are located towards the centre of the first layer 70 of the lower manifold component 50 (which is uppermost in Figure 6A), and the outlet ports 67(1), 67(2) are located towards the sides of the first layer 70 of the lower manifold component 50. Thus, the inlet ports 65(1), 65(2) are located relatively more centrally (when viewed from the array direction 500) than the outlet ports 67(1), 67(2).

15 In the specific example shown, the ports 65, 67 are integrally moulded as part of the first lower manifold layer 70. Further towards the arrays 150, the first lower manifold layer 70 also comprises corresponding inlet and outlet ducts 68, 69 for the inlet and outlet ports 65, 67 respectively. Each inlet duct is configured to supply fluid to a single corresponding widening inlet chamber 55, whereas each 20 outlet duct 69 is configured to receive fluid from two corresponding narrowing outlet chambers 60. For example, duct 68(1) supplies fluid to widening inlet chamber 55(1), whereas duct 69(1) receives fluid from both narrowing outlet chamber 60(1)(i) and narrowing outlet chamber 60(1)(ii). These narrowing and widening chambers 55, 60 are in turn fluidically connected to the arrays of fluid 25 chambers 150.

More particularly, each lower manifold chamber, such as the widening inlet chamber 55 or the narrowing outlet chamber 60, may provide fluidic connection to at least two arrays 150 from the same group. In the example shown in Figure 30, each widening outlet chamber 55(1), 55(2), is fluidically connected to two arrays 150; thus, a pair of arrays 150 shares the same widening inlet chamber 55(1), 55(2). However, it should be noted that a pair of arrays 150 could instead (or possibly in addition) share the same narrowing outlet chamber 60.

In the example shown in Figures 6A and 6B, the lower manifold component 50 is configured for use with two types of fluid, with each type of fluid being supplied to the lower manifold component 50 via a respective inlet port 65(1), 65(2) and being returned to the upper manifold component 100 via a respect outlet port

5 67(1), 67(2).

Each widening inlet chamber 55 is configured to distribute a specific type of fluid from a respective inlet port 65(1), 65(2) to two arrays 150 from the same group. Thus, as noted above, the two arrays 150 in the same group receive fluid from the same widening inlet chamber 55. This is illustrated in further

10 detail by Figure 6B, which is a schematic end view of the lower manifold component 50 of Figure 6A.

As may be seen from Figure 6B, two pairs of nozzle rows 155(1)(i)-(ii) and 155(2)(i)-(ii) are provided adjacent the carrier layer 76 of the lower manifold component 50, each nozzle row 155 corresponding to a respective array 150.

15 The nozzle rows 155 within a pair are located adjacent one another, as are the corresponding arrays of fluid chambers.

Each pair of arrays may, for example, be provided by a single actuator component, though in other constructions each array could be provided by a separate actuator component, or all of the arrays for a lower manifold

20 component could be provided by the same actuator component.

The first pair of nozzle rows 155(1)(i)-(ii) is configured for ejection of one type of droplet fluid and the second pair of nozzle rows 155(2)(i)-(ii) is configured for ejection of another type of droplet fluid.

As is illustrated in Figure 6B, widening inlet chamber 55(1) is fluidically connected to the array corresponding to nozzle rows 155(1)(i), 155(1)(ii), whereas widening inlet chamber 55(2) is fluidically connected to nozzle rows

25 155(2)(i), 155(2)(ii). In addition, narrowing outlet chambers 60(1)(i) and 60(1)(ii) are fluidically connected to the array corresponding to nozzle rows 155(1)(i) and 155(1)(ii) respectively, whereas narrowing outlet chambers

30 60(2)(i) and 60(2)(ii) are fluidically connected to the array corresponding to nozzle rows 155(2)(i) and 155(2)(ii) respectively.

As is apparent from Figure 6B, when viewed from the ejection direction 505, the two arrays 150 within a group are disposed on either side of the corresponding shared widening inlet chamber 55. The widening inlet chamber 55 may thus appear to divide or separate the arrays 150 when viewed from the ejection

5 direction 505.

Contrastingly, each narrowing outlet chamber 60 is configured to receive fluid from only a single array 150 and return it to an outlet port 67(1), 67(2). In the specific example of Figure 6A, the two narrowing outlet chambers 60 corresponding to one type of fluid return fluid to the same outlet port 67(1),

10 67(2), such that they share the outlet port 67(1), 67(2).

Returning now to Figure 6B, it will be noted that nozzles 155(1)(i), which correspond to an array within the first group, are aligned with nozzles 155(2)(i), which correspond to an array within the second group. Similarly, nozzles, 155(1)(ii) are aligned with nozzles 155(2)(ii). It will be appreciated that the

15 respective arrays of chambers 150 will be aligned in substantially the same manner. Thus, Figure 6B may be considered an example of where, for arrays corresponding to a particular one of the lower manifold components 50, each array 150 in a first group is aligned in the array direction 500 with a respective array 150 in the second group. In this way, as the deposition medium is

20 indexed past the droplet deposition head 10, each portion of its width in the array direction 500 is addressed by an array 150 from every group within the lower manifold component 50.

As is apparent from Figure 6B, the nozzle rows 155 for arrays 150 within the same group (e.g. nozzle rows 155(1)(i) and 155(1)(ii)) are offset from each

25 other in the array direction 500 by a small amount 502. It will be appreciated that the respective arrays of chambers 150 will be offset in substantially the same manner.

More generally, arrays 150 corresponding to the same group and the same lower manifold component 50 may be offset in the array direction 500 with respect to

30 one another.

This offset may, for example, be of the order of the nozzle spacing 501 for each array. The offset could, for example be approximately $1/N$ times the nozzle

spacing 501, where N is the number of arrays within the same group that correspond to the same lower manifold component (or, potentially, $M+1/N$ times the nozzle spacing, where M is an integer); in the example shown in Figure 6B, $N=2$. Hence, or otherwise, the nozzles of the N arrays may together provide an

5 array of nozzles with spacing $1/N$, when viewed in a depth direction 505, perpendicular to the array direction 500 and the ejection direction 510. The nozzles 155 from the N arrays may accordingly be interleaved with respect to the array direction 500, as shown in Figure 6B. Thus, the multiple arrays may provide the printhead with a higher resolution than a single array.

10 Returning now to Figure 6A, as may be seen from the drawing, each outlet duct 69 for coupling two narrowing outlet chambers 60 to the corresponding one of the outlet ports 67(1), 67(2) combines the two narrowing outlet chambers 60 fluidically in the upper layer 70 of the lower manifold 50. For example, as shown in Figure 6, two narrowing outlet chambers 60(1)(i), 60(1)(ii) may be merged by

15 forming a merging portion between the two parallel upper slots of the two narrowing outlet chambers 60(1)(i), 60(1)(ii) to form a 'U'- shaped fluid path in the plane of layer 70. In this way, each parallel channel of each outlet duct 69 couples to a corresponding narrowing outlet chamber 60, such that each outlet duct 69 fluidically couples to two narrowing outlet chambers 60.

20 The substantially parallel channels of the outlet ducts 69 are configured to extend along either side, with respect to the depth direction 510, of a channel of the inlet duct 68 which couples one of the widening inlet chambers 55 to a corresponding one of the inlet ports 65(1), 65(2).

25 While the specific example shown in Figures 6A and 6B includes a widening inlet chamber 55 that is shared between two arrays within the same group, in other examples one (or more) of the narrowing outlet chambers 60 might be shared between two arrays within the same group in a similar manner. Hence, or otherwise, there may be provided a respective widening inlet chamber 55 for each array (whether within the same group or otherwise). In other examples, 30 each array may be provided with a respective widening inlet chamber 55 and a respective narrowing outlet chamber 60. Thus, there may be one widening inlet chamber 55 for each narrowing outlet chamber 60.

Turning now to the second lower manifold layer 72, this layer is fluidically coupled to the first lower manifold layer 70 and comprises a first portion of the widening inlet chambers 55 and the narrowing outlet chambers 60, where these chambers respectively widen and narrow in the array direction 500. As may be seen from Figure 6A, the widening inlet chambers 55 and the narrowing outlet chambers 60 are substantially aligned with respect to the array direction 500 (though they may be offset with respect to each other by a small amount, e.g. a fraction of the nozzle spacing 501, in the same way as their corresponding arrays of fluid chambers 150).

10 Turning now to the third lower manifold layer 74, this layer is fluidically coupled to the second lower manifold layer 72 and comprises a second portion of the widening inlet chambers 55 and the narrowing outlet chambers 60, where these chambers continue to respectively widen and narrow in the array direction 500.

15 Turning now to the carrier layer 76, as is apparent from Figure 6, this layer is fluidically coupled to the third lower manifold layer 74. The carrier comprises an end portion of the widening inlet chambers 55 and of the narrowing outlet chambers 60, where these chambers remain substantially of constant width in the array direction 500. When viewed in the depth direction 510, the end portions of the narrowing outlet chambers 60 and the widening inlet chambers 20 55 do not narrow or widen; they have sides that generally extend parallel to the ejection direction 505. This constant width portion may allow further flow development to a substantially uniform velocity profile across the array of fluid chambers 150.

25 It should further be appreciated that the actuator components, which each provide at least one array 150 of regularly-spaced fluid chambers (with each chamber being provided with a respective actuating element, such as a piezoelectric actuator, and a respective nozzle) are mounted on the carrier 76 in such a way as to allow fluid to be supplied to and received from the fluid chambers of the arrays 150. Each actuating element is actuatable to eject a 30 droplet of fluid in an ejection direction 505 through a corresponding nozzle. Each array extends in an array direction 500, similar to that shown in Figures 1B, 2B and 3C. The width, in the array direction 500, of the end portion (the "straight" portion) of the narrowing outlet chambers 60 and the widening inlet

chambers 55 is substantially the same as that of the arrays 150. This width may also correspond to the width of the widening inlet chambers 55 and narrowing outlet chambers 60 of the third lower manifold layer 74 at its widest point at the bottom (i.e. nearmost the arrays 150) of the third lower manifold layer 74.

5 The carrier 76 may be made from a different material to the other layers of the lower manifold. For instance, the carrier 76 may be made from a material whose coefficient of thermal expansion is similar to, or matches with, that of the actuator components that are mounted thereupon. Such thermal matching may reduce the amount of mechanical stress that the actuator component
10 experiences during use.

Additionally, (or instead) the carrier 76 may be made from a material that is thermally conductive, for instance more thermally conductive than the other layers of the lower manifold component. This may assist in transferring heat away from the actuator component(s) that are mounted on the carrier 76. For

15 instance, heat may be transferred to fluid within the narrowing outlet chambers 60, with the thus-heated fluid then flowing out of the lower manifold component 50 and therefore drawing heat out away from the actuator component(s). In constructions, such as that shown in Figure 6A, where the carrier layer 76 includes a "straight" portion of the narrowing outlet chambers 60, this heat
20 transfer may be particularly efficient since it can occur over a large surface area. It should further be noted that, even in constructions where no outlet path is provided (e.g. where there is only a widening inlet chamber 55 and no narrowing outlet chambers 60), the carrier 76 may usefully function as a heat sink, drawing heat away from the actuator and transferring it to the environment.

25 Where a driver IC is provided on the outer surface of the lower manifold component, such thermal conductivity may assist in transferring heat away from such a driver IC. Similarly to the heat transfer from the actuator, heat from the driver IC may, for instance, be transferred to fluid within the narrowing outlet chambers 60, with the thus-heated fluid then flowing out of the lower manifold
30 component 50 and therefore drawing heat out away from the driver IC. In cases where one or more of the narrowing outlet chambers 60 for the lower manifold component 50 is provided adjacent an outer surface of that lower manifold component 50 and the driver IC is mounted on that surface, this type of heat

transfer may be particularly efficient. In any case, as noted above, the carrier 76 may function as a heat sink and may thus draw heat away from the driver IC and transfer it to the environment, even where no outlet path is provided.

In some examples, the carrier layer may be made of ceramic material(s). This

5 may be particularly appropriate as many actuator components will themselves be made of ceramic materials. Hence, it may be easier to match the coefficients of thermal expansion of the carrier and of the actuator component. In addition, ceramic materials may provide good thermal conductivity.

The configuration and operation of the upper manifold component 100 of the

10 droplet deposition head 10 shown in Figure 4 will now be described with reference to Figures 7A-7C, 8A-8C and 9 to 11.

Turning first to Figure 7A, which shows an exploded perspective view of the upper manifold component 100 of Figure 4 and its constituent layers, the upper manifold component 100 is made from a plurality of layers which extend 15 generally perpendicularly to the ejection direction 505.

In the specific example shown in Figures 7-10 there are five layers; in order of increasing proximity to the arrays 150 they are: a first, top layer 910, a second, filter layer 920, a third layer 930, a fourth layer 940 and a fifth, bottom layer 950 (though any suitable configuration and number of layers could be used 20 instead).

As may be seen from Figure 7A, the top layer 910 comprises the fluid inlet 120(1), 120(2) and outlet 220(1), 220(2) ports. As with the ports of the lower manifold components 50(a)-(d), these may be integrally moulded with the top layer 910.

25 The plurality of layers 910-950 are shaped so that, in each of a plurality of planes parallel to the layers, multiple curved, serpentine paths are provided. These curved paths are fluidically connected together by paths extending generally perpendicularly to the layers, for example provided by through-holes 960, 970 within the layers.

30 In the specific construction illustrated by Figures 7-10 such multiple curved paths are, on the whole, defined between adjacent layers (once combined, as

illustrated in Figure 5A). However, three, four or more layers might combine to define such multiple curved paths in some cases.

The layers 910-950 are coupled in a fluid-tight manner, so as to prevent leakage of fluid. In addition, one of the layers of the upper manifold component 10, in 5 this example the fourth layer 940, may comprise two fastening features 30 at opposing ends of the upper manifold component 100 for coupling the upper manifold layer 100 to a head cover component (not shown).

In the specific construction illustrated by Figures 7-10, one of the layers of the upper manifold component 100 is a filter layer 920, which comprises a filter 925.

10 The filter 925 is generally planar and may, for example be formed of a mesh. As shown in the drawing, the filter 925 extends in the same plane as the filter layer 920. The filter layer 920 may be manufactured by insert-moulding, where the filter 925 is used as the insert. The filter is adapted,, for example by suitable choice of the pore size of its mesh, to remove impurities from the fluid and 15 prevent them from reaching the array 150. For instance, the filter may have pores with smaller diameter than such impurities. On the other hand, where the droplet fluid is intended to contain particulates, the filter may be adapted (e.g. by providing pores with larger diameter than such particulates) so as to permit such particulates to pass through. Either side of the filter layer 920 are first and 20 third layers 910, 930 respectively.

As may be seen from Figures 7B and 7C, which are further exploded perspective views of the upper manifold component 100 of Figure 4, each layer of the upper manifold component 100 includes one or more through-holes 960, 970.

25 Adjacent layers, once combined, define one or more curved fluid paths therebetween, whereby each of the through-holes 960, 970 allows fluid to pass from a curved path in one plane to a curved path in the consecutive plane. As will now be described with reference to Figures 7B and 7C, the curved paths and the paths defined by the through-holes 960, 970 combine to provide branched inlet and branched outlet paths within the upper manifold component 100.

30 In more detail, Figure 7B illustrates the through-holes 960(1), 970(1) and branching points 186(1) that correspond to a branched inlet path 180(1) and a branched outlet path 280(1) (where 960 and 970 indicate through-holes that define part of, respectively, a branched inlet path 180 and a branched outlet

path 280) for a supplying a first droplet fluid type (as indicated by the suffix (1)). Figure 7C, by contrast, illustrates the through-holes 960(2), 970(2) and branching points 186(2) that correspond to a branched inlet path 180(2) and a branched outlet path 280(2) for a supplying a second droplet fluid type (as indicated by the suffix (2)).

Figures 7B and 7C may be compared with Figures 8B and 8C, which illustrate, in respective elevations, the two branched inlet paths 180(1), 180(2) (one for each type of fluid) and the two branched outlet paths 280(1), 280(2) (again, one for each type of fluid) that are provided within the upper manifold component 100, 10 once the layers 910-950 are assembled. Figure 8B may in turn be compared with Figure 8A, which is a partially exposed perspective view of the upper manifold component 100 and illustrates the relative disposition of the branched inlet and outlet paths 180, 280 within the assembled layers 910-950.

Returning now to Figure 7B, the first type of fluid is supplied to the upper 15 manifold component 100 by fluid inlet 120(1) formed in top layer 910. The fluid inlet 120(1) connects directly to a through-hole 960(1)(i) in the second, filter layer 920 (the suffix (i) indicating the level within the branching structure of the through-hole, with lower numbers indicating proximity to the main branch 181). The fluid inlet 120(1) and through-hole 960(1)(i) in the second, filter layer 920 20 define part of the main branch 181(1) of a branched inlet path 180(1) within the upper manifold component 100.

The through-hole 960(1)(i) then supplies fluid to one of a number of serpentine or curved paths defined by the first (top) 910 layer, second (filter) layer 920 and third layer 930 together. These curved paths lie in the same plane; specifically, 25 they lie in generally the same plane as the filter 925, so that the filter 925 divides each of these curved paths along its length.

It should be noted that, in contrast to these curved paths, filter 925 does not extend across, or divide the through-holes 960(1)(i), 960(2)(i), 960(1)(ii)(a), 960(1)(ii)(b) in the filter layer 920 that correspond to the branched inlet paths 30 180(1), 180(2): these through-holes are free of filter 925. For example, the main branch 181(1), 181(2) of each of the branched inlet paths 180(1), 180(2) may pass through a respective hole in the filter 925. The effect of this will be discussed further below with reference to Figures 9 and 10.

As is apparent from Figure 7B, fluid flows along a curved path leading from through-hole 960(1)(i) and defined by the first, second and third layers 910, 920, 930 to branching point 186(1)(i), from which two further curved paths extend. Each of these two further curved paths is defined by the first, second and third layers 910, 920, 930 and extends from branching point 186(1)(i) to a respective through-hole 960(1)(ii)(a), 960(1)(ii)(b). Each of the curved paths corresponds to part of a respective first-level sub-branch 185(1)(i)(a), 185(1)(i)(b) (where 185 indicates generally a sub-branch, with the suffix (i), as before, indicating the level within the branching structure, with lower numbers 5 indicating proximity to the main branch 181, and (a), (b) etc. indicating the particular sub-branch within the level in question). At branching point 186(1)(i) main branch 181(1) of branched inlet path 180(1) branches into the two first-level sub-branches 185(1)(i)(a), 185(1)(i)(b).

As will also be apparent from Figure 7B, through-hole 960(1)(ii)(a) in the 15 second, filter layer 920 connects directly with through-hole 960(1)(iii)(a) in the third layer 930; similarly, through-hole 960(1)(ii)(b) connects directly with through-hole 960(1)(iii)(b). However, whereas through-hole 960(1)(iii)(a) in the third layer 930 connects directly to through hole 960(1)(iv)(a) in the fourth layer 940, through-hole 960(1)(ii)(b) is fluidically connected to a curved path 20 defined in a plane between the third and fourth layers 930, 940. More particularly, through-hole 960(1)(ii)(b) defines a path that meets the curved path at a junction part-way along its length. This junction thereby provides branching point 186(1)(ii)(b).

At this branching point 186(1)(ii)(b), first-level sub-branch 185(1)(i)(b) 25 branches into two second-level sub-branches, which, as the branched path 180(1) includes only two levels of branching, are end sub-branches 182(1)(c), 182(1)(d) (where 182 indicates generally an end sub-branch, with (a), (b), (c) etc. indicating the particular end sub-branch).

The curved path that includes branching point 186(1)(ii)(b) is fluidically 30 connected, at one end, to through-hole 960(1)(iv)(b) and, at the other end, to through-hole 960(1)(iv)(c), both formed in fourth layer 940. Through-hole 960(1)(iv)(b) is in turn directly connected to through-hole 960(1)(v)(c) in the fifth layer 950; similarly, through-hole 960(1)(iv)(c) is directly connected to

through-hole 960(1)(v)(d) in the fifth layer 950. In this way, end sub-branches 182(1)(c), 182(1)(d) extend through the fourth and fifth layers 940, 950, thus enabling fluid to be supplied to respective lower manifold components 50(c), 50(d).

- 5 Returning now to through-hole 960(1)(iii)(a), as noted above this through-hole in the third layer 930 connects directly to through hole 960(1)(iv)(a) in the fourth layer 940. Thus, through-hole 960(1)(iii)(a) and through hole 960(1)(iv)(a) each define a path that forms a part of first-level sub-branch 185(1)(i)(a).
- 10 As is apparent from Figure 7B, through-hole 960(1)(iv)(a) is fluidically connected to a curved path defined in a plane between the fourth and fifth layers 940, 950. More particularly, through-hole 960(1)(iv)(a) defines a path that meets this curved path at a junction part-way along its length. This junction thereby provides branching point 186(1)(ii)(a).
- 15 At this branching point 186(1)(ii)(a), first-level sub-branch 185(1)(i)(a) branches into two second-level sub-branches, which, as the branched path 180(1) includes only two levels of branching, are end sub-branches 182(1)(a), 182(1)(b).

- 20 The curved path that includes branching point 186(1)(ii)(a) is fluidically connected, at one end, to through-hole 960(1)(v)(a) and, at the other end, to through-hole 960(1)(v)(b), both formed in fifth layer 950. In this way, end sub-branches 182(1)(a), 182(1)(b) extend through the fifth layer 950, thus enabling fluid to be supplied to respective lower manifold components 50(a), 50(b).

- 25 As will also be apparent from Figure 7B, the branched outlet path 280(1) is similarly made up of curved paths in planes parallel to layers 910-950 that are linked by through-holes 970(1).

- 30 For example, through-holes 970(1)(iii)(a)-(d) in the fourth layer 940 each define a path that forms a part of a respective end sub-branch 282(1)(a)-(d) of the branched outlet path 280(1). Through-hole 970(iii)(a) connects directly to through-hole 970(1)(ii)(a), which is at one end of a curved path defined in a plane between the third and fourth layers 930, 940, whereas through-hole 970(iii)(b) connects directly to through-hole 970(1)(ii)(b), which is at the other

end of the same curved path. Through-hole 970(1)(i)(a) in the third layer 930 defines a path that meets this curved path at a junction part-way along its length. This junction thereby provides branching point 286(1)(ii)(a).

At this branching point 286(1)(ii)(a), first-level sub-branch 285(1)(i)(a) 5 branches into end sub-branch 282(1)(a) and end sub-branch 282(1)(b). End sub-branch 282(1)(a) is made up of the paths defined by through holes 970(1)(ii)(a) and 970(1)(iii)(a), as well as the portion of the curved path leading from through hole 970(1)(ii)(a) to branching point 286(1)(ii)(a). Similarly, end sub-branch 282(1)(b) is made up of the paths defined by through holes 10 970(1)(ii)(b) and 970(1)(iii)(b), as well as the portion of the curved path leading from through hole 970(1)(ii)(b) to branching point 286(1)(ii)(a).

As will be apparent from Figure 7B, and Figures 8A-8C, branched outlet path 280(1) continues upwards through the layers 910-950 of the upper manifold component 100, to main branch 281(1), which is connected to fluid outlet 15 220(1).

Thus, at a general level, it will be understood that branched inlet path 180(1) is configured to receive the first type of fluid from the fluid supply system (via inlet 120(1)) and to supply it to each of the lower manifold components 50(a)-(d) via respective end sub-branches 182(1)(a)-(d). Similarly, branched outlet path 20 280(1) is configured to receive the first type of fluid from each of the lower manifold components 50(a)-(d) via respective end sub-branches 282(1)(a)-(d) and to return it to the fluid supply system (via outlet 220(1)).

As noted above, Figure 7C illustrates in a similar manner to Figure 7B the through-holes 960(2), 970(2) and branching points 186(2) that correspond to a 25 branched inlet path 180(2) and a branched outlet path 280(2) for a supplying a second droplet fluid type. As will be apparent, branched inlet path 180(2) and branched outlet path 280(2) are similarly made up of curved paths in planes parallel to layers 910-950 that are linked by through-holes 960(2), 970(2). Therefore, the specific connections shall not be discussed here in detail.

30 However, it will be understood that, at a general level, branched inlet path 180(2) is configured to receive the first type of fluid from the fluid supply system (via inlet 120(2)) and to supply it to each of the lower manifold components

50(a)-(d) via respective end sub-branches 182(2)(a)-(d). Similarly, branched outlet path 280(1) is configured to receive the first type of fluid from each of the lower manifold components 50(a)-(d) via respective end sub-branches 282(2)(a)-(d) and to return it to the fluid supply system (via outlet 220(1)).

5 Therefore, the branched inlet paths 180 and the branched outlet paths 280 combine to supply each type of fluid to all of the lower manifold components 50(a)-(d) and to receive each type of fluid from all of the lower manifold components 50(a)-(d).

Turning now to Figure 8C, which is a top view of the fluid flow paths in the upper 10 manifold component of Figure 4, the arrangement of the branched inlet and outlet paths 180, 280 may be seen clearly. More particularly, it is apparent that each branched path 180, 280 overlaps with the other branched paths 180, 280 in the array direction 500 and the depth direction 505, as well as the ejection direction 510.

15 More subtly, the branched paths 180, 280 may be described as having footprints that overlap, when viewed from the ejection direction 505. More particularly, the footprint for a branched path 180, 280 may be defined as a polygon that lies in a plane normal to the ejection direction 505 and that bounds the outermost (in the array and depth directions 500, 505) end sub-branches. Put differently, 20 each end sub-branch corresponds to a vertex of the polygon. This may assist in supplying a number of different types of fluid to respective groups of arrays of fluid chambers 150, where arrays within each group are distributed over the array direction 500 and the depth direction 505.

It is also apparent from Figures 8B and 8C that the branched paths 180, 280 are 25 intertwined with each other. Thus, when viewed in the ejection direction (as in Figure 8C) sub-branches 182, 185 of one branched path 180, 280 cross sub-branches of other branches paths 180, 280.

More subtly, a first sub-branch 182, 185 of a first branched path 180, 280 may cross a first sub-branch 182, 185 of a second branched path 180, 280 on one 30 side with respect to the ejection direction, whereas a second sub-branch 182, 185 of the first branched path 180, 280 may cross a second sub-branch 182, 185 of the second branched path 180, 280 on the other side with respect to the

ejection direction. An example of this is provided by branched paths 180(1) and 280(1) in Figures 8B and 8C: first level sub-branch 185(1)(i)(b) of branched inlet path 180(1) crosses end sub-branch 282(1)(c) of branched outlet path 280(1) above it, whereas end sub-branch 182(1)(a) of branched inlet path 5 180(1) crosses end sub-branch 282(1)(a) of branched outlet path 280(1) below it.

Such features may assist in providing a compact structure (in the array and depth directions 500, 505) that is able to supply a number of different types of fluid to respective groups of arrays of fluid chambers 150.

10 Details of the routing of fluid through the filter 925 by the branched inlet paths will now be described in further detail with reference to Figures 9A, 9B and 10.

Figure 9A is a perspective view of the branched inlet path 180(2) for the second fluid type. The overall structure of this branched inlet path 180(2) is clearly shown by the drawing: the branched inlet path 180(2) originates at a main 15 branch 181(2), which is connected to fluid inlet 120(2), and then branches, at branching point 186(2)(i), into two first-level sub-branches 185(2)(i)(a), 185(2)(i)(b). Each of these first-level sub-branches 185(2)(i)(a), 185(2)(i)(b) in turn branches, at a respective branching point 186(2)(ii)(a), 186(2)(ii)(b), into two corresponding second-level sub-branches. As the branched inlet path 20 180(2) has only two levels of branching these second-level sub-branches are end sub-branches 182(2)(a). As discussed above, each of these end sub-branches 182(2)(a) supplies fluid (of the second type) to a respective one of the lower manifold components 50(a)-(d).

Figure 9B is a perspective view of the branched inlet path of Figure 9A showing 25 the disposition of the flow path relative to the filter layer 920 of the upper manifold component 100. As is apparent from Figure 9B, the filter 925 cuts across the two first-level sub-branches 185(2)(i)(a), 185(2)(i)(b). In the specific arrangement shown, the filter 925 may be described as generally dividing each of the two first-level sub-branches 185(2)(i)(a), 185(2)(i)(b) along 30 its length.

In addition, the filter cuts across a portion of the main branch 181(2). More particularly, the filter cuts across a portion of the main branch that connects to the branching point 186(2)(i).

However, as noted above, filter 925 does not extend across, or divide the

5 through-holes 960(1)(i), 960(2)(i), 960(1)(ii)(a), 960(1)(ii)(b) in the filter layer 920 that correspond to the branched inlet paths 180(1), 180(2); these through-holes are free of filter 925. For example, the main branch 181(1), 181(2) of each of the branched inlet paths 180(1), 180(2) may pass through a respective hole in the filter 925.

10 As shown in Figure 9A, the main branch 181(2) proceeds through through-hole 960(2)(i) to a space defined between the second, filter layer 920 and the third layer 930. This space provides a narrowed portion 183(2) of the main branch 181(2). Beyond this narrowed portion 183(2) of the main branch 181(2), the main branch 181(2) widens to a portion where it is defined by the first, second

15 (filter) and third layers 910, 920, 930. This portion of the main branch 181(2) is divided along its length by filter 925 and leads to branching point 186(2)(i). Depending on the particular arrangement, a possible consequence of a filter dividing a portion of a main branch of a branched path along its length is that filtering occurs over a large surface area.

20 As noted above, at branching point 186(2)(i) the main branch 181(2) branches into two first-level sub-branches 185(2)(i)(a), 185(2)(i)(b). The portion of each of these first-level sub-branches 185(2)(i)(a), 185(2)(i)(b) that leads from branching point 186(2)(i) is defined by the first, second (filter) and third layers 910, 920, 930. This same portion of each first-level sub-branch 185(2)(i)(a),

25 185(2)(i)(b) is divided along its length by filter 925. As with the main branch, a possible consequence of a filter dividing a portion of a sub-branch of a branched path along its length is that filtering occurs over a large surface area.

Further, this portion leads to a narrowed portion of the same first-level sub-branch 185(2)(i)(a), 185(2)(i)(b) that is defined by just the second, filter layer 920 and the third layer 930 – though not by the filter 925 of the filter layer 920. Each first-level sub-branch 185(2)(i)(a), 185(2)(i)(b) then proceeds through a respective through-hole in the second layer 960(2)(ii)(a), 960(2)(ii)(b) and a respective through-hole in the third layers 960(2)(iii)(a), 960(2)(iii)(b)

The flow of fluid through the filter is illustrated in Figure 10, which is a schematic view of a cross-section through the upper manifold component 100 that is taken along a curved path, which follows the length of the main branch 181(2) from through-hole 960(2)(i), through branching point 186(2)(i), and then follows the 5 length of sub-branch 185(2)(b) to through-hole 960(2)(ii). As may be seen, Figure 10 illustrates clearly the first, second (filter) and third layers 910-930 of the upper manifold component 100.

As may be seen, fluid flows downwards along the main branch 181(2) from the fluid inlet 120(2). The fluid then turns and flows horizontally through the 10 narrowed portion 183(2) of the main branch and then into the wider portion of main branch 181(2) that leads to branching point 186(2)(i). This wider portion of the main branch 181(2) is divided by filter 925. Fluid flows from one side of the filter 925 to the other in this wider portion of the main branch 181(2). More particularly, in this wider portion of the main branch, the fluid adjacent to the 15 filter 925 is flowing perpendicularly to the plane of the filter 925. As a result, when the head is arranged so that the ejection direction 505 is vertically downwards, i.e. in the same direction as gravity, fluid flows vertically – against gravity – through the filter 925 within this wider portion of the main branch 181(2).

20 At branching point 186(2)(i) the flow splits, with a portion of the flow proceeding along sub-branch 185(2)(i)(a) and the remainder flowing along sub-branch 185(2)(i)(b) (it being noted that, in the specific example shown in Figures 4, 5, and 7-9 the sub-branches 182, 185 of the branched paths 180(1), 180(2) are configured such that a substantially even split in flow occurs at each branching 25 point 186).

The portion of each sub-branch 185(2)(i)(a), 185(2)(i)(b) that leads from the branching point 186(2)(i) to the narrower portion 184(2) thereof is divided by filter 925. Fluid flows from one side of the filter 925 to the other within this portion of each sub-branch 185(2)(i)(a), 185(2)(i)(b). More particularly, within 30 this portion of each sub-branch 185(2)(i)(a), 185(2)(i)(b), the fluid adjacent to the filter 925 is flowing perpendicularly to the plane of the filter 925. As a result, when the head is arranged so that the ejection direction 505 is vertically

downwards, fluid flows vertically – against gravity – through the filter 925 within this portion of each sub-branch 185(2)(i)(a), 185(2)(i)(b).

Where fluid flows against gravity through the filter 925, detritus D that is filtered from the fluid may, when it sinks within the fluid, naturally tend to move away

5 from the filter 925. This may reduce instances of the detritus D blocking the filter. For example, if fluid flowed vertically downwards through the filter 925, detritus could settle on the filter and, over time, reduce the effectiveness of the filtering.

Also as a result of the fluid flowing against gravity through the filter 925, air

10 bubbles are forced through the filter 925 and collect above the filter 925 as a small pocket of air A. Having the air A collect on the far side of the filter 925 in this way may allow efficient use to be made of the area of the filter 925. For example, if fluid flowed vertically downwards through the filter 925, the air could collect in pockets above the filter 925 that might impede the spreading of fluid

15 over the surface of the filter 925.

On the other hand, it should be noted that the head 10 will nonetheless function when arranged such that the ejection direction 505 is not vertically downwards.

20 Moreover, substantially the same flow patterns as illustrated in Figure 10 and as described above (aside from references to fluid flowing against gravity) may be expected. However, in such cases, detritus D and/or air A may not collect in the same manner as illustrated in Figure 10.

It should be appreciated that, in the upper manifold component 100 of Figures 4, 5, 7 and 8, the branched path 180(1) for the first type of droplet fluid has a substantially similar structure, with its main branch 181(1) including a similar

25 narrowed portion defined between the second and third layers and its first-level sub-branches 185(1)(i)(a), 185(1)(i)(b) also including similar narrowed portions defined between the first and second layers. Further, when the head 10 is arranged such that the ejection direction 505 is vertically downwards (i.e. in the same direction as gravity) the branched path 180(1) for the first type of droplet 30 fluid is similarly arranged so that fluid flows against gravity through the filter 925.

It should be noted that the upper manifold component 100 of Figures 4, 5, and 7-10 is only an example of a droplet deposition head where a branched path directs fluid against gravity through a filter and that other arrangements that operate according to the same principle are possible. For example, other droplet deposition heads may be constructed such that a filter does not divide a main branch and/or a sub-branch of a branched path along its/their lengths (though as noted above this may allow filtering to occur over a large area).

Conversely, it should be noted that other arrangements are possible where a filter divides a main branch and/or one or more sub-branches of a branched path along its/their lengths, but where the branched path is not arranged so as to direct fluid against gravity through the filter.

It should still further be noted that, in some examples, the filter 925 may be omitted. For instance, sufficient filtering of the droplet fluid may have taken place in the fluid supply system before it reaches the head 10.

From this description, it should be understood that forming (at least in part) manifold components, such as the upper manifold component 100, from a number of layers that each extend normal to the ejection direction (so that the layers, as a whole, may be described as being stacked in the ejection direction) may enable relatively complex branched path arrangements to be provided in a relatively straightforward manner. Moreover, the thus-manufactured manifold component may be relatively compact in the ejection direction 505.

Further, because each layer may be manufactured separately, a complex three-dimensional structure for each branched inlet 180 or outlet 280 path can be more accurately manufactured, ensuring, for instance, that fluid is provided to each end sub-branch 182 within the branched path 180, 280 with balanced flow characteristics. For instance fluid may be supplied with substantially balanced pressures, and/or with balanced flow rates and/or with balanced velocities, to each of the end sub-branches 182. This may assist in ensuring that fluid is provided to the chambers within the arrays 150 of the head with balanced flow characteristics. For instance fluid may be supplied with substantially balanced pressures, and/or with balanced flow rates and/or with balanced velocities, to each of the fluid chambers of the head.

As will be seen from Figures 7 to 10, the layout of the branched inlet 180 and outlet paths 280 and sub-branches 20, 32 is carefully designed so that the paths are intertwined with each other.

Making the upper manifold component 100 out of a plurality of layers may 5 reduce the complexity of providing such a structure. For example, it may be relatively straightforward to provide in each of a plurality of planes parallel to such layers, a fairly complex pattern of multiple curved, serpentine paths, each of which corresponds to one or more sub-branches within a particular branched path. These curved paths may be formed between adjacent layers, or between 10 three, four or more consecutive layers. These curved paths may be shaped to curve around each other, while being suitably offset from each other to enable proper fluidic sealing of each path. As discussed above, these paths may additionally or instead be suitably shaped so as to provide desirable fluidic properties, such as balancing the flow rate, pressure etc. of sub-branches of the 15 same level within a branched inlet or outlet path.

By then providing through-holes (through the layers of the manifold component, such as upper manifold component 100), which link these complex patterns of curved paths together, branched paths with complex, intertwining geometry and suitable control of fluidic properties may be provided in a relatively 20 straightforward manner. Further, because much of the complexity of the structure is provided in planes parallel to the layers, the manifold component, such may have such beneficial properties while still being relatively compact in the direction in which the layers are stacked. Thus, where the layers extend perpendicularly to the ejection direction, as in the droplet deposition head shown 25 in Figure 4, the manifold component may be relatively compact in the ejection direction 505. As noted above, this may simplify the integration of the droplet deposition head 10 within a larger droplet deposition apparatus.

It is envisaged that constructions that do not specifically include an upper manifold component may be provided that nonetheless include multiple layers, 30 which provide, in each of a number of planes parallel to the layers, multiple curved fluid paths, and a number of fluid paths perpendicular to the layers that fluidically connect together curved paths in different planes. As discussed above

these perpendicular and curved paths may provide complex branched inlet and/or outlet paths in a manner that is straightforward to manufacture.

On the other hand, it should be appreciated that this is only an example of a way of providing such intertwined branched paths and that such intertwined 5 branched paths may be formed in any suitable manner.

It is envisaged that the manifold components described herein, including those discussed above with reference to Figures 1-11, may be formed by moulding, for instance by injection moulding. For example, where a manifold component is made up of a number of stacked layers, each layer may be moulded as a 10 separate part, with these parts then assembled together.

The manifold component(s) may therefore (or otherwise) be formed substantially from polymeric materials and/or plastic materials. Factors that may be take into account when selecting an appropriate material for the manifold components include:

- 15 • Chemical compatibility with the droplet fluid (particularly where it is desired that the droplet fluid be heated prior to ejection);
 - Little difference in coefficient of thermal expansion as compared with components that the manifold component is attached to, such as the actuator component (which may reduce stress in the connections, such as glue bonds, 20 between components);
 - Mechanical stability, for example so that the geometry of each moulded part is maintained following moulding (e.g. a planar part remains flat);
 - Adhesion / cure rates to any adhesive used to connect the parts of a manifold component together, or to connect the manifold components together;
- 25 Suitable materials may include injectable thermoplastics, of which a number of examples are known, such as polystyrene, polyethylene, polyetherketone (PEK), polyetheretherketone (PEEK), or polyphenylene sulphide (PPS). However, injectable thermosetting materials may also be appropriate in some circumstances.

To achieve the desired performance, an engineering plastic or high performance plastic may be used, such as PPS, PEK, PEEK, etc.

In addition, the use of filled polymeric materials may be desirable in some cases owing to their generally greater mechanical strength and thermal resistance.

- 5 For instance, a glass, mineral and/or ceramic filled polymeric material might be used, depending on the particular design of the component. Filling may also aid in achieving a particular coefficient of thermal expansion (CTE) for the component, for example where efforts are being made to reduce the difference in CTE between the manifold component and components attached thereto.
- 10 The alignment of the arrays 150 belonging to the various groups and lower manifold components 50(a)-(d) of the droplet deposition head 10 of Figure 4 will now be described with reference to Figure 11, which is a schematic end view of the lower manifold components of Figure 4.

The four lower manifold components 50(a)-(d) are shown clearly in the drawing.

- 15 In the specific example illustrated, two groups of arrays are provided: a first group configured to eject droplets of a first type of fluid from corresponding nozzles 155(1); and a second group configured to eject droplets of a first type of fluid from corresponding nozzles 155(2). However, further groups of nozzles could be provided in other constructions.
- 20 As may be seen, the arrays 150 belonging to each lower manifold component 50 and their corresponding nozzles 155 are arranged in substantially the same manner as described above with reference to Figure 6B. Accordingly, two pairs of nozzle rows 155(1)(i)-(ii) and 155(2)(i)-(ii) are provided for each lower manifold component 50 (each nozzle row 155 corresponding to a respective array 150). The first pair of nozzle rows 155(1)(i)-(ii) belongs to the first group and therefore is configured for ejection of a first type of droplet fluid; the second pair of nozzle rows 155(2)(i)-(ii) belongs to the second group and therefore is configured for ejection of the second type of droplet fluid. The nozzle rows 155 within a pair are located adjacent one another, as are the corresponding arrays of fluid chambers.
- 25
- 30

Each pair of arrays may, for example, be provided by a single actuator component, though in other constructions each array could be provided by a

separate actuator component, or all of the arrays for a lower manifold component could be provided by the same actuator component.

Further, for arrays corresponding to a particular one of the lower manifold components 50(a)-(d), each array 150 in a first group is aligned in the array

5 direction 500 with a respective array 150 in the second group. This is apparent, for example, from the alignment of nozzle row 155(1)(a)(ii) with nozzle row 155(2)(a)(ii). In this way, as the deposition medium is indexed past the droplet deposition head 10, each portion of its width in the array direction 500 is addressed by an array 150 from every group within a lower manifold component

10 50(a)-(d).

Furthermore, arrays 150 that correspond to the same lower manifold component 50 and to the same group are offset from each other in the array direction 500 by a small amount 502. This is apparent, for example, from considering nozzle row 155(1)(a)(i) and nozzle row 155(2)(a)(ii).

15 As discussed above, this offset may, for example, be of the order of the nozzle spacing 501 for each array. The offset could, for example be approximately $1/N$ times the nozzle spacing 501, where N is the number of arrays within the same group that correspond to the same lower manifold component (or, potentially, $M+1/N$ times the nozzle spacing, where M is an integer); in the example shown

20 in Figure 11, $N=2$. Hence, or otherwise, the nozzles of the N arrays may together provide an array of nozzles with spacing $1/N$, when viewed in a depth direction 505, perpendicular to the array direction 500 and the ejection direction 510. As also discussed above, the nozzles 155 from the N arrays may accordingly be interleaved with respect to the array direction 500, as shown in

25 Figure 6B. Thus, the multiple arrays may provide the printhead with a higher resolution than a single array.

As may also be seen from Figure 11, a nozzle row belonging to one group is aligned in the depth direction 505 with a nozzle row within the same group, but corresponding to a different lower manifold component (for instance such that

30 the nozzles of the two rows generally lie on a single line). For example, nozzle row 155(1)(b)(i), which corresponds to the first group and to lower manifold component 50(b), is aligned in the depth direction 505 with nozzle row 155(1)(d)(i), which also corresponds to the first group, but corresponds to lower

manifold component 50(d). It will be appreciated that the corresponding arrays of chambers 150 are similarly arranged.

As a result such arrangement of multiple arrays 150 corresponding the same group but different lower manifold components, the multiple arrays address a

5 width, in the array direction 500, that is significantly greater than the length of a single array in the array direction – and address this width with a higher resolution than a single array.

While in the constructions described with reference to Figures 1-10 above the branching paths have branched into two sub-branches at each branching point,

10 it should be appreciated that they could branch into any suitable number of sub-branches, such as three, four, or more sub-branches.

While the droplet deposition heads described above with reference to Figures 1-10 have at most two levels of branching, it should be appreciated that other constructions might have any suitable number of branching levels.

15 It should also be noted that, while in the constructions described with reference to Figures 1-10 above the end sub-branches have been of the same level in the branching structure, in other constructions the end sub-branches could belong to different levels; for example, some end-sub-branches could belong to the first level, whereas others could belong to the second level.

20 It should still further be noted that, while the droplet deposition head of Figures 4 to 11B has been described as being configured for use with two different types of droplet fluid, it could of course be utilised – in some cases without modification – with only one type of fluid. In such a situation, a point on the deposition medium may be addressed by two fluid chambers from respective
25 arrays. Thus, such an arrangement may allow for the single fluid to be deposited in greater volumes.

It will be appreciated that the various features of the manifold components described above may be implemented with a wide range of designs for the component(s) that provide the arrays of fluid chambers. However, purely by

30 way of example, a suitable structure for an actuator component that provides an array of fluid chambers, where each chamber is provided with a respective actuating element and a respective nozzle, and where each actuating element is

actuable to eject a droplet of fluid, shall now be described with reference to Figures 12A and 12B.

Figure 12A shows a cross-section through such an actuator component 701, with the view being taken along the ejection direction. More particularly, as indicated 5 by the dashed line in Figure 12B, the cross-section shown in Figure 12A is taken in a plane that passes through each of the fluid chambers 710 within the array 150.

The actuator component 701 of Figures 12A and 12B is a thin film piezoceramic 10 actuator and comprises a die stack. The die stack 701 comprises a fluid chamber substrate 702 and a nozzle layer 704, which includes nozzles 718. As also shown in Figures 12A and 12B, the actuator component 701 comprises an array 150 of fluid chambers 710, which are arranged side-by-side in an array direction 500. As will be apparent, each fluid chamber is elongate in a direction 15 perpendicular to the array direction 500. In addition, neighbouring chambers within the array 150 are separated, one from the next, by partition walls 731.

As may be seen from Figure 12A, each of the fluid chambers 710 has a fluidic inlet port 713 in fluidic communication therewith.

As may be seen from Figure 12B, the fluidic inlet port 713 is provided at a top 20 surface of the fluidic chamber substrate 702 towards one end of the fluidic chamber 710 along a length thereof.

During use, droplet fluid is supplied to the fluidic chamber 710 from the fluidic inlet port 713. Hence, the inlet port 713 is fluidically connected so as to receive fluid from a widening inlet chamber 55.

The actuator component 701 further includes a fluidic channel 714 provided 25 within the fluidic chamber substrate 702 in fluidic communication with the fluidic chamber 710, and arranged to provide a path for droplet fluid to flow therebetween.

Furthermore, the actuator component 701 includes a fluidic outlet port 716 in 30 fluidic communication with the fluidic chamber 710, whereby ink may flow from the fluidic chamber 710 to the fluidic outlet port 716 via a fluidic channel 714

formed in the fluidic chamber substrate 702. The fluidic outlet port 716 may be fluidically connected so as to return fluid to a narrowing outlet chamber 60.

As shown in Figure 12B, the fluidic outlet port 716 is provided at the top surface of the fluidic chamber substrate 702 towards an end of the fluidic chamber 710
5 opposite the end towards which the fluidic inlet port 713 is provided.

The actuator component 701 may be arranged to allow droplet fluid to flow continuously from the fluidic inlet port 713 to the fluidic outlet port 716, along the length of the fluidic chamber 710, for example when the upper manifold component 100 described above is connected to a fluid supply system. Thus,
10 the actuator component 701 may be considered to operate in a recirculation mode or "through-flow" mode.

In alternative arrangements, fluid may be supplied to the fluidic chamber 710 from both fluidic ports 713 and 716 (for example two widening inlet chambers are provided in the lower manifold component 50 described above). In a further
15 alternative, the fluidic outlet port 716 may be omitted such that substantially all of the ink supplied to the fluidic chamber 710 via fluidic inlet port 713 is ejected from the nozzle 718, whereby the inkjet printhead may be considered to operate in a non through-flow mode.

The fluidic chamber substrate 702 may comprise silicon (Si), and may, for
20 example, be manufactured from a Si wafer, whilst the associated features, such as the fluidic chamber 710, fluidic inlet/outlet ports 713/716 and fluidic channels 714 may be formed using any suitable fabrication process, e.g. an etching process, such as deep reactive ion etching (DRIE) or chemical etching.

Additionally or alternatively, the associated features of the fluidic chamber substrate 702 may be formed from an additive process e.g. a chemical vapour deposition (CVD) technique (for example, plasma enhanced CVD (PECVD)), atomic layer deposition (ALD), or the features may be formed using a combination of removal and/or additive processes.

In the present example, the nozzle layer 704 is provided at a bottom surface of
30 the fluidic chamber substrate 702, whereby "bottom" is taken to be a side of the fluidic chamber substrate 702 having the nozzle layer 704 thereon.

The surfaces of various features of the die 701 may be coated with protective or functional materials, such as, for example, a suitable coating of passivation material or wetting material.

The actuator component 701 further includes a nozzle 718 in fluidic communication with the fluidic chamber 710, whereby the nozzle 718 is formed in the nozzle layer 704 using any suitable process e.g. chemical etching, DRIE, laser ablation etc.

The actuator component 701 further includes a membrane 720, provided at the top surface of the fluidic chamber substrate 702, and arranged to cover the fluidic chamber 710. The top surface of the fluidic chamber substrate 702 is taken to be the surface of the fluidic chamber substrate 702 opposite the bottom surface.

The membrane 720 is deformable to generate pressure fluctuations in the fluidic chamber 710, so as to change the volume within the fluidic chamber 710, such that ink may be ejected from the fluidic chamber 710 via the nozzle 718, as a droplet.

The membrane 720 may comprise any suitable material, such as, for example a metal, an alloy, a dielectric material and/or a semiconductor material. Examples of suitable materials include silicon nitride (Si₃N₄), silicon dioxide (SiO₂), aluminium oxide (Al₂O₃), titanium dioxide (TiO₂), silicon (Si) or silicon carbide (SiC). The membrane 720 may additionally or alternatively comprise multiple layers.

The membrane 720 may be formed using any suitable processing technique, such as, for example, ALD, sputtering, electrochemical processes and/or a CVD technique. When the membrane 720 is provided on the top surface, apertures corresponding to the fluidic ports 713/716 may be provided in the membrane 720, e.g. using a suitable patterning technique for example during the formation of the membrane 720.

The droplet unit 6 further comprises an actuating element 722 provided on the membrane 720, which is arranged to deform the membrane 720, such that the inkjet printhead operates in roof mode.

However, any suitable type of actuator or electrode configuration capable of effecting droplet generation may be used, for example inkjet printheads operating in a shared-wall configuration, whereby the actuating elements are configured as actuatable walls formed of piezoelectric material that separate adjacent fluid chambers within the array.

The actuating element 722 is a piezoelectric element 724 provided with two electrodes 726 and 728. The piezoelectric element 724 may, for example, comprise lead zirconate titanate (PZT), however any suitable material may be used.

10 An electrode is provided in the form of a lower electrode 726 on the membrane 720. The piezoelectric element 724 is provided on the lower electrode 726 using any suitable deposition technique. For example, a sol-gel deposition technique may be used to deposit successive layers of piezoelectric material to form the piezoelectric element 724 on the lower electrode 726, or the piezoelectric element 724 may be formed using any suitable technique.

A further electrode in the form of an upper electrode 728 is provided on the piezoelectric element 724 at the opposite side of the piezoelectric element 724 to the lower electrode 726, however any suitable configuration of the electrodes could be used.

20 The electrodes 726/728 may comprise any suitable material e.g. iridium (Ir), ruthenium (Ru), platinum (Pt), nickel (Ni) iridium oxide (Ir₂O₃), Ir₂O₃/Ir and/or gold (Au). The electrodes 726/728 may be formed using any suitable technique, such as a sputtering technique.

25 The electrodes 726/728 and the piezoelectric element 724 may be patterned separately or in the same processing step to define the actuating element 722.

When a voltage differential is applied between the electrodes 726/728, a stress is generated in the piezoelectric element 724, causing the actuating element 722 to deform on the membrane 720. This deformation changes the volume within the fluidic chamber 710 and ink droplets may be discharged from the nozzle 718 by driving the piezoelectric actuator 722 with an appropriate signal. The signal may be supplied from a controller (not shown), for example, as a voltage waveform. The controller may comprise a power amplifier or switching circuit

connected to a computer running an application which generates signals in response to print data provided thereto e.g. uploaded thereto by a user.

Further material/layers (not shown) may also be provided in addition to the electrodes 726/728 and piezoelectric elements 724 as required.

5 A wiring layer comprising electrical connections is provided on the membrane 720, whereby the wiring layer may comprise two or more electrical tracks for example, to connect the upper electrode 728 and/or lower electrode 726 of the actuating element 722 to the controller, directly or via further drive circuitry.

The electrical tracks comprise a conductive material, e.g. copper (Cu), gold (Ag),

10 platinum (Pt), iridium (Ir), aluminium (Al), titanium nitride (TiN). The electrical tracks may, for example, have a thickness of between 0.01 μ m to 2 μ m, and, in some embodiments, the thickness may be between 0.1 μ m and 1 μ m, and in further embodiments the thickness may be between 0.3 μ m and 0.7 μ m.

The wiring layer may comprise further materials (not shown), for example, a

15 passivation material to protect the electrical tracks from the environment and from contacting the ink.

Additionally or alternatively, the passivation material may comprise a dielectric material provided to electrically insulate electrical tracks from each other e.g. when stacked atop one another or provided adjacent each other.

20 The passivation material may comprise any suitable material, for example: SiO₂, Al₂O₃ or Si₃N₄.

The wiring layer may further comprise adhesion electrical tracks, the passivation material, the electrodes 726/728 and/or the membrane 720.

The actuator component 701 may include further features not described herein.

25 For example, a capping substrate (not shown) may be provided atop the fluidic chamber substrate 702, for example at the top surface, the membrane 720 and/or the wiring layer to cover the actuating element 722 and to further protect the actuating element 722. The capping substrate may further define fluidic channels for supplying ink to the fluidic inlet ports 713 e.g. from the lower 30 manifold component 50 and for receiving ink from the fluidic outlet port 716.

It is again noted that the construction shown in Figures 12A and 12B is only an example of an actuator component that may be used within a droplet deposition head 10 described above. In other arrangements the actuator component might include arrays of chambers that are provided with any suitable type of actuating element. For instance, the actuator component could be of shared-wall design, with the actuating elements being walls comprising piezoelectric material that separate adjacent chambers within the array. Indeed, in some arrangements, the actuating elements could be electrostatic or thermal actuating elements.

Features of the droplet deposition head 10 described with respect to one example embodiment may be combined with other example droplet deposition heads described above.

For instance, as described above, each lower manifold component may provide fluidic connection to at least two arrays 150 from each of a group of arrays, or to only one array from each of a group of arrays.

In some examples, no provision may be made for returning fluid to the fluid supply system. Accordingly, the upper manifold component 100 and the lower manifold component 50 may only supply fluid along a branched inlet path 180 in one direction to the arrays; that is, there may be no fluid outlet ports 220(1), 220(2), 67(1), 67(2), no branched outlet path 280 or narrowing outlet chambers 60.

In some examples, any number of layers of the upper manifold component 100 or the lower manifold component 50 may be replaced or duplicated. For instance, in some examples, there is no filter 925.

Other examples and variations are contemplated within the scope of the appended claims.

It should be noted that the foregoing description is intended to provide a number of non-limiting examples that assist the skilled reader's understanding of the present invention and that demonstrate how the present invention may be implemented.

CLAIMS

1. A droplet deposition head comprising:

one or more manifold components, providing one or more fluid inlets, each of the fluid inlets being connectable to a fluid supply system so that the head can receive a droplet fluid; and

two or more arrays of fluid chambers, each chamber being provided with a respective actuating element and a respective nozzle, each actuating element being actuatable to eject a droplet of fluid in an ejection direction through the corresponding one of said nozzles, each array extending in an array direction;

wherein the head extends, in said ejection direction, from a first end, at which said one or more fluid inlets are located, to a second end, at which said arrays of fluid chambers are located;

wherein one or more branched inlet paths are provided within the manifold components over a first portion of their height in said ejection direction, each of the branched paths being fluidically connected so as to receive fluid at a main branch thereof from a respective one of said fluid inlets, branching at one or more branching points into two or more sub-branches, and culminating in a number of end sub-branches, to which fluid is conveyed;

wherein a plurality of widening inlet chambers are provided within the manifold components over a second portion of their height in said ejection direction, the width of each widening inlet chamber in said array direction increasing with distance in the ejection direction from a first end to a second end thereof, the first end being fluidically connected so as to receive fluid from one or more of said branched paths and the second end being fluidically connected so as to supply fluid to one or more of said arrays;

wherein each of said branched inlet paths is fluidically connected so as to supply fluid to two or more of said widening inlet chambers.

2. The droplet deposition head of Claim 1, wherein the width, in the array direction, of each of each widening inlet chamber at its second end is substantially equal to the width of the array to which it supplies fluid.

3. The droplet deposition head of Claim 1 or Claim 2, wherein the extent of each widening inlet chamber in the ejection direction is approximately equal to or greater than its extent in the array direction.
4. The droplet deposition head of any preceding claim, wherein each of said inlets extends in a direction parallel to said ejection direction and/or directs fluid in a direction parallel to said ejection direction.
5. The droplet deposition head of any preceding claim, wherein each of said end sub-branches is fluidically connected so as to supply fluid to a respective one of said widening inlet chambers.
6. The droplet deposition head of any preceding claim, wherein there are two or more of said branched inlet paths.
7. The droplet deposition head of Claim 6, wherein each branched inlet path overlaps with another branched inlet path in the array direction and in a depth direction, which is perpendicular to said array direction and to said ejection direction;

preferably wherein said branched inlet paths all overlap in the array direction and the depth direction.
8. The droplet deposition head of Claim 6 or Claim 7, wherein the footprint of each branched inlet path, viewed from the ejection direction, overlaps with the footprint of another branched inlet path;

preferably wherein the footprints, viewed from the ejection direction, of all of said branched inlet paths overlap.
9. The droplet deposition head of any one of claims 6 to 8, wherein at least one of the branched inlet paths intertwines with another branched inlet path and preferably wherein each branched inlet path intertwines with another branched inlet path.
10. The droplet deposition head of any one of claims 6 to 9, wherein a sub-branch of one branched inlet path crosses a sub-branch of another branched inlet path, when viewed in the ejection direction and preferably wherein at least

one sub-branch of each branched inlet path crosses a sub-branch of another branched inlet path, when viewed in the ejection direction.

11. The droplet deposition head of Claim 10, wherein a first sub-branch of a first branched inlet path crosses a first sub-branch of a second branched inlet path on one side with respect to the ejection direction and a second sub-branch of the first branched inlet path crosses a second sub-branch of the second branched inlet path on the other side with respect to the ejection direction.

12. The droplet deposition head of any preceding claim, further comprising a generally planar filter that cuts across said branched inlet paths, preferably wherein said filter is formed of a mesh.

13. The droplet deposition head of Claim 12, wherein each of said branched inlet paths directs fluid against gravity through said filter.

14. The droplet deposition head of any preceding claim, wherein the plurality of manifold components further provides one or more fluid outlets, each of the fluid outlets being connectable to a fluid supply system so that the head can return a droplet fluid to the fluid supply system; and

wherein one or more branched outlet paths are provided within the manifold components over a third portion of their height in said ejection direction, each of the branched outlet paths being fluidically connected so as to supply fluid from a main branch thereof to a respective one of said fluid outlets, branching at one or more branching points into two or more sub-branches, and culminating in a number of end sub-branches, from which fluid is conveyed;

wherein a plurality of narrowing outlet chambers are provided within the manifold components over a fourth portion of their height in said ejection direction, the width of each narrowing outlet chamber in said array direction decreasing with distance in the ejection direction from a first end to a second end thereof, the first end being fluidically connected so as to receive fluid from a one or more of said arrays and the second end being fluidically connected so as to supply fluid to one or more of said branched paths;

wherein each of said branched outlet paths is fluidically connected so as to receive fluid from two or more of said narrowing outlet chambers.

15. Wherein said first portion of the height of the manifold components is the same as said third portion and/or said second portion of the height of the manifold components is the same as said fourth portion.

16. The droplet deposition head of Claim 14 or Claim 15, wherein the width, in the array direction, of each of each narrowing outlet chamber at its first end is substantially equal to the width of the array from which it receives fluid.

17. The droplet deposition head of any one of claims 14 to 16, wherein the extent of each narrowing outlet chamber in the ejection direction is approximately equal to or greater than its extent in the array direction.

18. The droplet deposition head of any one of claims 14 to 17, wherein each of said outlets extends in a direction antiparallel to said ejection direction and/or directs fluid in a direction antiparallel to said ejection direction.

19. The droplet deposition head of any one of claims 14 to 18, wherein the first end of each of said narrowing outlet chambers is fluidically connected so as to receive fluid from a respective one of said arrays.

20. The droplet deposition head of any one of claims 14 to 19, wherein each of said end sub-branches is fluidically connected so as to receive fluid from a respective one of said narrowing outlet chambers.

21. The droplet deposition head of any one of claims 14 to 20, wherein each branched path overlaps with another branched path in the array direction and in a depth direction, which is perpendicular to said array direction and to said ejection direction;

preferably wherein said branched paths all overlap in the array direction and the depth direction.

22. The droplet deposition head of any one of claims 14 to 21, wherein the footprint of each branched path, viewed from the ejection direction, overlaps with the footprint of another branched path;

preferably wherein the footprints, viewed from the ejection direction, of all of said branched paths overlap.

23. The droplet deposition head of any one of claims 14 to 22, wherein at least one of the branched paths intertwines with another branched path and preferably wherein each branched path intertwines with another branched path.

24. The droplet deposition head of any one of claims 14 to 23, wherein a sub-branch of one branched path crosses a sub-branch of another branched path, when viewed in the ejection direction and preferably wherein at least one sub-branch of each branched path crosses a sub-branch of another branched path, when viewed in the ejection direction.

25. The droplet deposition head of Claim 24, wherein a first sub-branch of a first branched path crosses a first sub-branch of a second branched path on one side with respect to the ejection direction and a second sub-branch of the first branched path crosses a second sub-branch of the second branched path on the other side with respect to the ejection direction.

26. The droplet deposition head according to any preceding claim, wherein at least two of said arrays overlap in said array direction.

27. The droplet deposition head according to any preceding claim including a first group of two or more arrays for depositing a first type of droplet fluid and a second group of arrays for depositing a second type of droplet fluid, wherein each type of droplet fluid is received from a respective one of said fluid inlets.

28. The droplet deposition head of Claim 27, wherein, arrays within the same group overlap in said array direction.

29. The droplet deposition head of Claim 27 or Claim 28, wherein each of said arrays in said first group is aligned in said array direction with a respective one of said arrays in said second group.

30. The droplet deposition head of any one of claims 27 to 29, when dependent upon Claim 14, wherein each type of droplet fluid is conveyed to a respective one of said fluid outlets.

31. The droplet deposition head of any preceding claim, wherein said one or more manifold components are formed, at least in part, from a plurality of layers, each of which preferably extends generally normal to said ejection direction.

32. The droplet deposition head of Claim 31, wherein the plurality of layers provide, in each of a plurality of planes parallel to said layers, multiple curved fluid paths, and a plurality of fluid paths perpendicular to said layers that fluidically connect together curved paths in different planes;

wherein said branched inlet paths and/or said branched outlet paths comprise said perpendicular paths and said curved paths.

33. The droplet deposition head of Claim 32, wherein said perpendicular paths are defined by through-holes within said layers.

34. The droplet deposition head of Claim 32 or Claim 33, wherein $N+1$ of said curved paths that lie within the same plane meet at a junction, said junction providing a branching point where one of said branched paths branches into N sub-branches.

35. The droplet deposition head of any one of claims 32 to 34, wherein a first perpendicular path meets a first curved path part-way along its length at a junction, said junction providing a branching point of one of said branched paths.

36. The droplet deposition head of Claim 35, wherein second and third perpendicular paths meet said first curved path at the ends thereof, preferably wherein said second and third perpendicular paths extend in the opposite direction to said first perpendicular path.

37. The droplet deposition head of any one of claims 32 to 36, further comprising a generally planar filter that extends parallel to said layers, said filter cutting across at least some of said branched paths, preferably wherein said filter is formed of a mesh.

38. The droplet deposition head of Claim 374, wherein one of said layers provides said filter.

39. The droplet deposition head of Claim 37 or Claim 38, when dependent upon any one of claims 34 to 36, wherein said filter lies in the same plane as one of, or the junction.

40. The droplet deposition head of any one of claims 37 to 39, wherein the filter lies in the same plane as a plurality of curved paths, so that it divides each of these curved paths along their lengths.

41. The droplet deposition head of Claim 40, wherein one or more of the thus-divided curved paths each form a part of the main branch of a respective one of the branched paths

42. The droplet deposition head of Claim 40 or Claim 41, wherein at least some of the thus-divided curved paths each form a part of a sub-branch of a branched path.

43. The droplet deposition head of any preceding claim, wherein said one or more manifold components includes at least one upper manifold component and one or more lower manifold components, said branched paths being provided within said upper manifold component, with said widening inlet chambers and, where present, said narrowing outlet chambers, being provided within said lower manifold components.

44. The droplet deposition head of Claim 43, wherein the upper manifold component is formed, at least in part, from a plurality of layers, preferably wherein the layers of the upper manifold component extend generally normal to said ejection direction.

45. The droplet deposition head of Claim 44, wherein the layers of the upper manifold component provide, in each of a plurality of planes parallel to said layers, multiple curved fluid paths, and a plurality of fluid paths perpendicular to said layers that fluidically connect together curved paths in different planes;

wherein said branched inlet paths and/or said branched outlet paths comprise said perpendicular paths and said curved paths.

46. The droplet deposition head of Claim 45, wherein said perpendicular paths are defined by through-holes within said layers.

47. The droplet deposition head of Claim 45 or Claim 46, wherein $N+1$ of said curved paths that lie within the same plane meet at a junction, said junction providing a branching point where one of said branched paths branches into N sub-branches.

48. The droplet deposition head of any one of claims 45 to 47, wherein a first perpendicular path meets a first curved path part-way along its length at a junction, said junction providing a branching point of one of said branched paths.

49. The droplet deposition head of Claim 48, wherein second and third perpendicular paths meet said first curved path at the ends thereof, preferably wherein said second and third perpendicular paths extend in the opposite direction to said first perpendicular path.

50. The droplet deposition head of any one of claims 45 to 49, further comprising a generally planar filter that extends parallel to said layers, said filter cutting across at least some of said branched paths, preferably wherein said filter is formed of a mesh.

51. The droplet deposition head of Claim 50, wherein one of the layers of the upper manifold component provides said filter.

52. The droplet deposition head of Claim 50 or Claim 51, when dependent upon any one of claims 47 to 49, wherein said filter lies in the same plane as one of, or the, junction.

53. The droplet deposition head of Claim 50 or Claim 51, wherein the filter lies in the same plane as a plurality of curved paths, so that it divides each of these curved paths along their lengths.

54. The droplet deposition head of Claim 53, wherein one or more of the thus-divided curved paths each forms a part of the main branch of a respective one of the branched paths

55. The droplet deposition head of Claim 53 or Claim 54, wherein at least some of the thus-divided curved paths each forms a part of a sub-branch of a branched path

56. The droplet deposition head of any one of claims 43 to 55, when dependent upon any one of claims 27 to 30, wherein each lower manifold component provides fluidic connection to arrays from two or more of said groups of arrays.

57. The droplet deposition head of Claim 56, wherein each array in said first group that corresponds to a lower manifold component is aligned in said array direction with a respective array in said second group that corresponds to the same lower manifold component.

58. The droplet deposition head of Claim 56 or Claim 57, wherein each lower manifold component provides fluidic connection to at least two arrays from each of said groups of arrays.

59. The droplet deposition head of Claim 58, wherein arrays that correspond to the same lower manifold component and to the same group are offset relative to one another in the array direction such that their nozzles are interspersed with respect to the array direction.

60. The droplet deposition head of Claim 58 or Claim 59, when dependent upon Claim 14, wherein, for each lower manifold component, pairs of the corresponding arrays from the same group are provided side-by-side and are both fluidically connected to the same widening inlet chamber or the same narrowing outlet chamber, preferably wherein, when viewed from said ejection direction, the arrays within each pair are disposed on either side of the shared widening inlet or narrowing outlet chamber.

61. The droplet deposition head of any one of claims 43 to 60, when dependent upon Claim 14, wherein at least one of the narrowing outlet chambers for each lower manifold component is provided adjacent an outer surface of that lower manifold component.

62. The droplet deposition head of Claim 61, wherein a driver IC is provided on said outer surface.

63. The droplet deposition head of any one of claims 43 to 62, wherein each lower manifold component is formed, at least in part, from a plurality of layers.

64. The droplet deposition head of Claim 63, wherein the layers the lower manifold components each extend generally normal to said ejection direction.

65. The droplet deposition head of Claim 64, wherein the layers of the lower manifold components each extend generally normal to a depth direction, which is perpendicular to said array direction and said ejection direction.

66. The droplet deposition head of any one of claims 43 to 65, wherein said lower manifold components overlap in said array direction.

67. The droplet deposition head of any one of claims 43 to 66, wherein said upper manifold component(s) is/are connected to said lower manifold components with a plurality of flexible connectors, each of which providing a fluid path therethrough;

wherein said flexible connectors reduce the transfer of mechanical stress from said upper manifold to said lower manifold.

68. The droplet deposition head of any preceding claim, wherein each branched path culminates in at least four end sub-branches.

69. The droplet deposition head of any preceding claim where each branched path comprises at least two levels of branching.

70. A droplet deposition head substantially as described herein with reference to the drawings.

71. A manifold component for a droplet deposition head, comprising a plurality of layers, each of which extends generally normal to a first direction;

wherein the plurality of layers provide, in each of a plurality of planes parallel to said layers, multiple curved fluid paths, and a plurality of fluid paths perpendicular to said layers that fluidically connect together curved paths in different planes;

wherein said perpendicular paths and said curved paths provide one or more branched fluid paths within the manifold component, each of said branched paths: having a main branch; branching at one or more branching points into two or more sub-branches; and culminating in a number of end sub-branches.

72. The manifold component of Claim 71, wherein the main branch of each branched fluid path is located towards a first end of said manifold component, with respect to said first direction and the end sub-branches of each branched fluid path are located towards a second end of said manifold component.

73. The manifold component of Claim 71 or Claim 72, wherein said perpendicular paths are defined by through-holes within said layers.

74. The manifold component of any one of claims 71 to 73, wherein each main branch is fluidically connected to a fluid inlet or fluid outlet port provided on the exterior of said manifold component.

75. The manifold component of any one of claims 71 to 74, wherein there are two or more of said branched fluid paths.

76. The manifold component of Claim 75, wherein the footprint of each branched path, viewed from the first direction, overlaps with the footprint of another branched path;

preferably wherein the footprints, viewed from the first direction, of all of said branched paths overlap.

77. The manifold component of Claim 75 or Claim 76, wherein at least one of the branched paths intertwines with another branched path and preferably wherein each branched path intertwines with another branched path.

78. The manifold component of any one of claims 75 to 77, wherein a sub-branch of one branched path crosses a sub-branch of another branched path, when viewed in the first direction and preferably wherein at least one sub-branch of each branched path crosses a sub-branch of another branched path, when viewed in the first direction.

79. The manifold component of Claim 78, wherein a first sub-branch of a first branched path crosses a first sub-branch of a second branched path on one side with respect to the first direction and a second sub-branch of the first branched path crosses a second sub-branch of the second branched path on the other side with respect to the first direction.

80. The manifold component of any one of claims 71 to 79, wherein $N+1$ of said curved paths that lie within the same plane meet at a junction, said junction providing a branching point where one of said branched paths branches into N sub-branches.

81. The manifold component of any one of claims 71 to 80, wherein a first perpendicular path meets a first curved path part-way along its length at a junction, said junction providing a branching point of one of said branched paths.

82. The manifold component of 81, wherein second and third perpendicular paths meet said first curved path at the ends thereof, preferably wherein said second and third perpendicular paths extend in the opposite direction to said first perpendicular path.

83. The manifold component of any one of claims 71 to 82, further comprising a generally planar filter that extends parallel to said layers, said filter cutting across at least some of said branched paths, preferably wherein said filter is formed of a mesh.

84. The manifold component of Claim 83, wherein one of said layers provides said filter.

85. The manifold component of Claim 83 or Claim 84, when dependent upon any one of claims 80 to 82, wherein said filter lies in the same plane as one of, or the junction.

86. The manifold component of Claim 83 or Claim 84, wherein the filter lies in the same plane as a plurality of curved paths, so that it divides each of these curved paths along their lengths.

87. The manifold component of Claim 86, wherein one or more of the thus-divided curved paths each form a part of the main branch of a respective one of the branched paths

88. The manifold component of Claim 86 or Claim 87, wherein at least some of the thus-divided curved paths each form a part of a sub-branch of a branched path.

89. The manifold component of any one of 71 to 88, wherein said first direction is the direction in which the droplet deposition head ejects droplets.

90. The manifold component of any one of claims 71 to 89, wherein each branched path culminates in at least four end sub-branches.

91. The manifold component of claim 90, wherein each branched path comprises at least two levels of branching.

92. The manifold component of any one of claims 71 to 91, wherein most and preferably substantially all of said layers are formed of polymeric material.

93. The manifold component of Claim 92, wherein said polymeric material is a filled polymeric material.

94. A manifold component for a droplet deposition head, comprising:

a plurality of layers, each of which extends generally normal to an ejection direction;

at least one fluid inlet located at a first end of the manifold component with respect to said ejection direction;

wherein the manifold component provides, at a second end of the manifold component with respect to said ejection direction, the second end being opposite to said first end, a mount for receiving an actuator component that provides at least one array of fluid chambers, each chamber being provided with a respective actuating element and a respective nozzle, each actuating element being actuatable to eject a droplet of fluid in said ejection direction through the corresponding one of said nozzles, each array extending in an array direction;

wherein at least one widening inlet chamber is provided within the manifold component, the width of each widening inlet chamber in said array direction increasing with distance in the ejection direction from a first end to a second end thereof, the first end being fluidically connected so as to receive fluid from one or more of said fluid inlets and the second end providing a fluid connection at said mount, so as to supply fluid to one or more of said arrays.

95. The manifold component of Claim 94, wherein said mount is generally elongate in said array direction.

96. The manifold component of Claim 94 or Claim 95, wherein the fluid connection of each of said widening inlet chamber is an opening that is elongate in the array direction and preferably has an extent in the array direction generally equal to that of the mount.

97. The manifold component of any one of claims 94 to 96, wherein the width, in the array direction, of each of each widening inlet chamber at its second end is generally equal to the width of the mount in the array direction.

98. The manifold component of any one of claims 94 to 97, wherein the extent of each widening inlet chamber in the ejection direction is approximately equal to or greater than its extent in the array direction.

99. The manifold component of any one of claims 94 to 98, further comprising at least one fluid outlet located at said first end of the manifold component;

wherein at least one narrowing outlet chamber is provided within the manifold components, the width of each narrowing outlet chamber in said array direction decreasing with distance in the ejection direction from a first end to a second end thereof, the first end providing a fluid connection at said mount, so as to receive fluid from one or more of said arrays and the second end being fluidically connected so as to return fluid to one of said fluid outlets.

100. The manifold component of Claim 99, wherein at least one narrowing outlet chamber is provided adjacent an exterior surface of the manifold component, said exterior surface being configured to enable a driver IC to be mounted thereupon.

101. The manifold component of Claim 100, wherein the or each narrowing outlet chamber adjacent an exterior surface of the manifold component is generally planar, extending in a plane parallel to the corresponding exterior surface.

102. The manifold component of any one of claims 94 to 101, wherein each widening inlet chamber and, where present, each narrowing outlet chamber, is generally planar and extends in a plane defined by said ejection direction and said array direction.

103. The manifold component of any one of claims 94 to 102, wherein said widening inlet chamber(s) and, where present, said narrowing outlet chamber(s) are aligned in said array direction.

104. The manifold component of any one of claims 94 to 103, wherein most of said layers are formed of polymeric material, preferably wherein said polymeric material is a filled polymeric material.

105. The manifold component of any one of claims 94 to 104, wherein one or more layers nearmost said mount is/are formed of a different, more thermally

conductive material than the other layers of the manifold component, preferably wherein said one or more layers nearmost the mount is/are formed substantially from a ceramic material.

106. The manifold component of Claim 105, when dependent upon Claim 100, wherein said exterior surface is configured so as to enable the driver IC to be mounted such that it is in thermal contact with said one or more layers nearmost said mount.



Application No: GB1603826.7

Examiner: Marc Collins

Claims searched: 1-70

Date of search: 5 September 2016

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	1 at least	US 2015/239243 A1 (MURAOKA et al.) See whole document especially figure 2.
X	1 at least	EP 1228876 A2 (CANON) See whole document especially figures.
X	1 at least	EP 1172214 A1 (CANON) See whole document especially paragraph [0054] and figures 14-17.
X	1 at least	US 2008/259115 A1 (YAMAGUCHI et al.) See whole document especially figures 8-10.
X	1 at least	GB 2520574 A (XAAR TECHNOLOGY LTD.) See whole document especially figure 13.
X	1 at least	JP H1086374 A (CANON) See WPI Abstract Accession No. 1998-266069 and figure 3.

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

Worldwide search of patent documents classified in the following areas of the IPC

B41J

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI



International Classification:

Subclass	Subgroup	Valid From
B41J	0002/14	01/01/2006



Application No: GB1603826.7

Examiner: Marc Collins

Claims searched: 94-106

Date of search: 20 February 2017

Patents Act 1977

Further Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	94-98, 102-106 at least	EP 1101615 A1 (SEIKO EPSON CORP.) See whole document especially figures 13, 17 and 20.
X	94-98, 102-106 at least	GB 2520574 A (XAAR TECHNOLOGY LTD.) See whole document especially figures 13.
X	94-98, 102-106 at least	US 2015/239243 A1 (MURAOKA et al.) See whole document especially figures.
X	94-98, 102-106 at least	US 2009/309917 A1 (INADA et al.) See whole document especially figures.
X	94-98, 102-106 at least	US 2015/258791 A1 (TOGASHI) See whole document especially figure 16.
X	94-98, 102-106 at least	US 6247782 B1 (TAKATA) See whole document especially figures.

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

Worldwide search of patent documents classified in the following areas of the IPC

B41J

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI



International Classification:

Subclass	Subgroup	Valid From
B41J	0002/14	01/01/2006



Application No: GB1603826.7

Examiner: Marc Collins

Claims searched: 71-93

Date of search: 19 February 2017

Patents Act 1977

Further Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X	71, 73, 75, 77, 81, 89, 92-93 at least	US 2011/102508 A1 (KIM et al.) See whole document especially figures.
X	71, 73, 75, 77, 81, 89, 92-93 at least	EP 1366904 A2 (BROTHER IND. LTD) See whole document especially figure 4.
A	-	JP 2010149371 A (BROTHER IND. LTD) See WPI Abstract Accession No. 2010-H86307 and figures.
A	-	US 2015/266292 A1 (YOSHIDA)
A	-	WO 2012/074514 A1 (HEWLETT PACKARD DEVELOPMENT CO.)
A	-	EP 1364790 A2 (BROTHER IND. LTD)

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

Worldwide search of patent documents classified in the following areas of the IPC



B41J

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI, TXTE, TXTT

International Classification:

Subclass	Subgroup	Valid From
B41J	0002/14	01/01/2006