

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 September 2006 (28.09.2006)

PCT

(10) International Publication Number
WO 2006/100511 A1

(51) International Patent Classification:

B08B 7/00 (2006.01) **F26B 11/04** (2006.01)
B08B 11/00 (2006.01) **B44D 3/12** (2006.01)

(21) International Application Number:

PCT/GB2006/001105

(22) International Filing Date: 24 March 2006 (24.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0506034.8 24 March 2005 (24.03.2005) GB

(71) Applicants and

(72) Inventors: **PERRY, Ophneil, Henry** [GB/GB]; 11 Blencartha Close, Gamston, Nottingham NG2 6RL (GB). **ALCHALABI, Rifat** [US/US]; 93 Chetwood Terrace, Fanwood, NJ 07023 (US).

(74) Agents: **CHAPPLE, Colin, Richard** et al.; Marks & Clerk, 144 New Walk, Leicester LE1 7JA (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):


ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD FOR THERMALLY REMOVING COATINGS AND/OR IMPURITIES

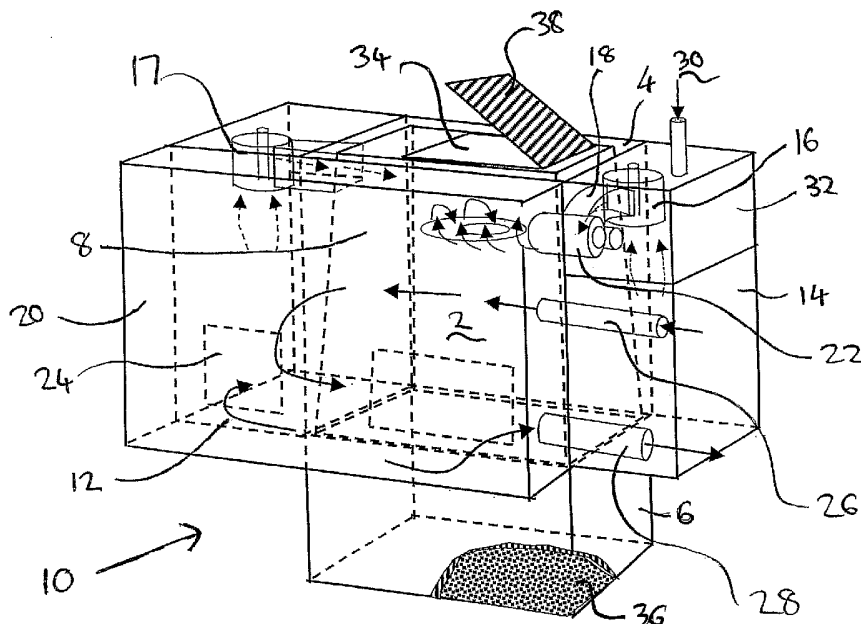

(57) Abstract: This invention relates to apparatus for de-coating and/or drying coated and/or contaminated materials. The apparatus comprising a support: and an oven (10) mounted to the support for receiving material to be treated. The oven (10) maybe moved between a first position in which a first portion is higher than a second portion, and a second position in which the converse is true. In use, the oven can be repeatedly moved between the first and second positions so material falls from one portion to the other portion.

WO 2006/100511 A1

Title: Apparatus and Method for Thermally Removing Coatings and/or Impurities

This invention relates to apparatus and a method for thermally removing coatings and/or impurities from materials, particularly from materials which are particularly suited to batch processing. In particular the present invention relates to a development of the type of oven described in the
5 applicants International Patent Application published as WO 01/98092 A1, the content of which is hereby incorporated by reference in its entirety.

There is an increasing requirement to recycle materials such as aluminium, magnesium and other metals and non-metals. Often such materials will be coated in paint, oil, water, lacquers, plastics, or other volatile organic compounds (V.O.C.s) which must be removed prior to re-melting the
10 materials. For materials which are capable of being processed at relatively high temperatures without melting, such impurities are typically removed using a thermal process which is sometimes known as de-coating. Such thermal de-coating processes can also be used to dry and/or sterilize materials prior to remelting.

For example, aluminium is often used in the production of beverage cans which are typically coated
15 in paint, lacquers and/or other V.O.C.s. Before used beverage cans (U.B.C.s) or scrap material produced during the manufacture of beverage cans can be melted down for recycling, any coatings or other impurities must be removed in order to minimize metal loss.

Thermal de-coating, however, is not limited in application to aluminium but can be used to clean or purify any metal or non-metallic materials which are capable of withstanding the temperatures
20 present in the thermal de-coating process. Thermal de-coating can be used to de-coat or purify, for example, magnesium or magnesium alloys, or titanium or titanium alloys.

Known thermal de-coating processes involve exposing the material to be treated to hot gases in order to oxidise the coatings and/or impurities which are to be removed. This exposure takes place in a closed environment in which the temperature and oxygen content of the hot gases can be

controlled. Temperatures in excess of 300 C are required to remove most organic compounds and an oxygen level in the range of 6% to 12% is normally required.

If the temperature and oxygen levels of the hot gases are not carefully controlled the decoating process can result in an uncontrolled operation which may be very dangerous.

- 5 The material will usually be shredded before treatment and it is important for effective de-coating that all the surfaces of the shredded material are exposed to the hot gases. If this does not occur then the treatment becomes less effective and, in the case of U.B.C.s in particular, a black stain may be left on the surface of the treated material. It is also desirable for the material to be agitated during the treatment to physically remove loose coatings or impurities from the material.
- 10 At present there are three main systems which are used for thermal de-coating, these are:

1. Static Oven

In a static oven, the material is stacked on a wire mesh and hot gases are recirculated through the oven to heat the material to the required process temperature.

- 15 This arrangement is not efficient because the hot gases do not come into contact with the materials that are enclosed within the stack of materials on the mesh. As discussed previously, it is important in de-coating that all the surfaces of the materials being treated are exposed to the hot gases. Also there is no agitation of the material being treated.

2. Conveying Oven

- 20 This system uses a mesh belt conveyor to transport materials for treatment through an oven. Hot gasses are passed through the material on the belt as it passes through the oven. The problems with this method are as follows:

The depth of materials on the belt limits the process. The materials are stacked, causing similar problems to those found with the static oven in which materials at the centre of the stack do not come into contact with the hot gases.

There is no agitation of the materials, so loose coatings are not removed.

5 The conveyor belt life is short.

The materials have to be constantly fed.

The process is not suitable for low volume or continuously changing product.

3. Rotating Kiln

10 A large kiln is inclined to the horizontal so that material fed or charged into the kiln at its highest end travels towards the lowest end, where it is discharged, under the influence of gravity. The kiln is rotated so that material within the kiln is agitated and a flow of hot gases is provided to heat up the material as it travels through the kiln. A number of problems are associated with this method:

The material has to be constantly fed.

15 The process is not suitable for low volume or continuously changing product.

The continuous process requires air locks at both ends, materials charge end and materials discharge end.

The kiln requires a rotating seal leading to a high level of maintenance.

WO 01/98092 A1 describes a pivotable or tiltable oven that overcomes many of the disadvantages of the previously known apparatus and methods for thermal de-coating. For a detailed description of the construction and operation of the oven, the reader should refer to WO 01/98092 A1. However, briefly, the oven has a charging portion for receiving material to be treated and a
5 changeover portion. Incorporated within the changeover portion is a heat treatment chamber through which a stream or flow of hot gasses can be passed. The oven is pivotally moveable between a first position in which the changeover portion is higher than the charging portion and a second position in which the charging portion is higher than the changeover portion. The arrangement is such that the oven can be repeatedly moved between the first and second positions
10 so that material within the oven falls from one portion to the other portion, passing through the stream of hot gasses in the heat treatment chamber. A method of using the apparatus is also disclosed.

The above known oven has the advantage that it can be used to treat comparatively low volumes of material in a batch process. A further advantage is that by controlling the movement of the oven,
15 the material being treated can be brought into and out of the heat treatment chamber at will, enabling the oven to be operated safely without having an excessive amount of VOC released that could cause self sustained process heating (also known as an autothermic process). This controlled movement ensures that the VOCs are released in a controlled manner and allows a fine degree of control of the treatment process.

20 In the preferred embodiment of the oven described in WO 01/98092 A1, the charging box is removably mounted to the oven. This conveniently enables materials to be loaded into and removed from the charging box at a location separate from the oven. The charging box once attached to the oven becomes an integral part of the structure of the oven and hence rotates with the oven so that material is transferred into and out of the charging box, and through the treatment chamber. It is
25 taught that, preferably, the charging box is adapted for removal using a fork lift truck or any other suitable means for transporting the charging box to and from the oven.

The oven described in WO 01/98092 A1 has been found to work well, providing a commercially and technically acceptable means of thermally de-coating relatively low volumes of materials. However, it has been found that the use of a removable charging box is not ideal for certain applications.

- 5 It is an object of the present invention to provide an improved oven in which the problems of the known ovens are overcome or at least reduced.

Thus, in accordance with a first aspect of the invention there is provided an apparatus for thermally de-coating and/or drying coated and/or contaminated materials, the apparatus comprising:

a support;

- 10 an oven mounted to the support and adapted for receiving material to be treated;

the oven being moveable relative to the support between a first position in which a first portion of the oven is generally higher than a second portion and a second position in which the second portion is generally higher than the first portion and the arrangement being such that, in use, the oven can be repeatedly moved between the first and second positions so that material within the

- 15 oven falls from one portion to the other portion,

characterised in that the first portion incorporates a closable aperture through which material to be treated can be charged and in that a treatment zone through which a stream of hot gasses can be passed is provided.

- 20 The treatment zone may be located in the first or second portion of the oven, or partially in each portion, dependent upon the material to be treated and its topology.

In accordance with a second aspect of the invention, there is provided a method of thermally de-coating and/or drying coated and/or contaminated materials comprising:

providing an oven adapted for receiving material to be treated and a changeover portion, the oven being moveable between a first position in which a first portion of the oven is generally higher than a second portion and a second position in which the second portion is generally higher than the first portion;

placing the material in the oven;

repeatedly moving the oven between the first and second positions so that the material in the oven falls from the one portion to the other portion

characterised in that the first portion incorporates a closable aperture through which material to be treated can be charged and in that a treatment zone through which a stream of hot gasses can be passed is provided.

The treatment zone may be located in the first or second portion of the oven, or partially in each portion, dependent upon the material to be treated and its topology.

A preferred embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a schematic, perspective view of an oven of an apparatus in accordance with the invention;

Figure 2 is a side view of the oven of Figure 1 and

Figures 3A - 3J are a series of schematic diagrams showing the various phases of operating cycle

of an apparatus in accordance with the invention comprising the oven of Figure 1.

Detailed Description of the Preferred Embodiments

Referring to Figures 1 to 3, there is shown an oven, indicated generally at 10, which forms part of an apparatus for thermally de-coating and/or drying coated and/or contaminated materials.

5 The oven 10 comprises a process chamber shown generally at 2 and comprising a first portion 4 and a second portion 6, with a central zone 8. The treatment zone comprises the first portion 4 and the central zone 8. A stream of hot gasses 12 can be passed from one side of the oven 10 to the other through the treatment zone.

10 On one side of the oven is a recirculation chamber 14 into which the gasses are drawn from the central zone 8 by a first recirculating fan 16 and a second recirculating fan 17. An air-mixing jacket 18 guides the gases from the recirculation chamber 14 into an afterburner chamber 20 in which the gasses are heated by a burner 22. The walls of the afterburner chamber 20 can be air-cooled stainless steel walls or alternatively may be lined with a suitable refractory material.

15 The burner 22 which heats the gasses may be designed to run on either a gaseous or a liquid fuel or both. In a preferred embodiment the burner is also designed so as to be able to burn the volatile organic compounds (V.O.C.s) which are thermally stripped from the materials in the treatment zone. These V.O.C.s are drawn out of the treatment zone with the gases 12 by the recirculating fan 16 and are mixed with the air 30, if needed, in the mixing jacket 18. The air mixing jacket 18 is designed to ensure that the gasses enter the afterburner with a helical flow, as indicated by the
20 arrows, which ensures that V.O.C.s have a maximum residence time and exposure to the hot zone of the burner flame.

By burning the V.O.C.s the overall thermal efficiency of the oven is increased since less fuel need be supplied to heat the gases 12 to the required operating temperature. If sufficient V.O.C.s are

present, no additional fuel need be added to heat the gases to the required temperature so that the process can operate autothermally.

Burning the V.O.C.s also improves the control of emissions by removing these pollutants from the re-circulating gases and reducing the need for further and expensive treatment of gases which are
5 exhausted from the afterburner chamber as will be described later.

From the afterburner chamber 20, the hot gases enter the treatment zone which extends over the first portion 4 and the central zone 8 of the process chamber 2 through an aperture 24 formed in a side wall of the process chamber 2 on the opposite side of the oven from the recirculation chamber 14.

10 A control system monitors and controls the level of oxygen and the temperature of the gases in the treatment zone to ensure the system operates within safe and effective limits for thermal de-coating of the material being treated. Typically, the oxygen level will be maintained below 16% whilst temperatures in excess of 300 °C are required to remove most organic compounds. A lance 26, regulated by the control system, supplies fresh air into the afterburner chamber 20 so as to control
15 both the required level of oxygen and temperature of the gases. The afterburner chamber 20 exhausts combustion gases through an exhaust pipe 28, the flow of exhaust gases being controlled via temperature and pressure controlled damper (not shown).

An auxiliary fresh air inlet 30 is also provided in the recirculation chamber 14. The auxiliary inlet 30 allows air to enter the recirculation chamber via an air supply chamber 32 to mix with the hot gases
20 and to cool the fan 16 if needed. The control system monitors the temperature of the fan and operates a valve to control the flow of air through the auxiliary inlet to maintain the temperature of the fan below its maximum permitted operating temperature. The control system balances the flow of air through the lance 26 and the auxiliary inlet 30 in order to maintain the required oxygen content and temperature of the gases in the treatment zone.

An outer wall of the first portion 4 of the process chamber 2 includes an aperture 34 for initially receiving scrap material 36 to be treated. The aperture 34 is closed by a door 38.

The oven 10 is pivotably mounted to a support structure 44 having a base frame 46 (see Figure 3A). As shown in Figures 3B to 3J, the oven can be moved between a first position 3B in which the first portion 4 is higher than the second portion 6 and a second position 3D in which the second portion 6 is higher than the first portion 4. In an alternative mode of operation, the movement could be in a continuous rotational movement, completing 360-degree rotation.

Means (not shown) are provided for automatically moving the oven between the first and second positions under the control of the control system for the apparatus. This means can be of any suitable form and may for example comprise one or more electric or hydraulic motors. The motors may act through a gearbox if required. Alternatively the means may comprise one or more hydraulic or pneumatic rams. The means could also comprise a combination of motors and rams.

Operation of the apparatus will now be described with reference to Figures 3A to 3J in particular.

The material 36 to be processed is loaded via the aperture 34 into the process chamber 2 and falls under gravity to the second portion 6. The treatment process can then be initiated under the control of the control system.

The gases passing through the treatment zone are heated and the oven rotated from the first position as shown in Figure 3B until it reaches the second position shown in Figure 3D in which the oven is nearly inverted.

As the oven is rotated, the materials in the process chamber 2 will fall under the influence of gravity into the first portion 4 passing through the stream of hot gases in the treatment zone. It should be noted that the material passes through the stream of hot gases 12 transversely to the direction of flow of the hot gases through the treatment zone.

The rotary movement of the oven can continue to complete 360 degrees or be reversed, as shown in Figures 3E and 3F, until the oven reaches the first position. During this rotary movement, the materials will fall from the first portion 4 into the second portion 6, again passing through the stream of hot gases 12. The rotational movement of the oven between the first and second positions
5 is repeated a number of times as required by the process control until the material 36 is fully treated.

The treatment process goes through a number of phases or cycles: a heating cycle during which the hot gases and the materials are brought up to the required treatment temperature, a treatment cycle in which the temperature of the gasses and materials is maintained at the treatment temperature, and finally a cooling cycle during which the temperature of the gases and the treated material is brought
10 down to a level at which the material can be safely removed.

Once the treatment process is completed, the oven is returned to the position as shown in Figure 3I and the door 38 is opened, as shown in Figure 3J, so that the treated material can be transported for cooling, storage or further processing as required.

The rotary motion of the oven ensures that the material to be treated passes through the stream of
15 gases in the treatment chamber in a controlled manner. The falling action of the material also ensures that all the surfaces of the material become fully exposed to the gases promoting an efficient and effective de-coating and/or decontamination.

The control system controls the speed and frequency of the rotary movement of the oven along with the temperature and oxygen level of the gases in order to oxidize coatings or impurities on the
20 material 36 whilst ensuring the process is carried out safely and efficiently with minimum loss of the material being treated.

A particular feature of the apparatus is the ability for the system to stop the rotary motion of the oven at any time. This can be particularly useful when treating heavily coated materials to ensure that the temperature in the afterburner does not increase in an uncontrolled manner due to the high

level of V.O.C.s present in the gases. When the apparatus stops rotating, the amount of combustible material in the gases is reduced and the combustion process slows down and hence the temperature drops back to the controlled level. As the temperature returns to acceptable levels, the apparatus resumes rotation and the treatment process continues. This ability to stop the rotation
5 of the oven ensures a controlled volatile release throughout the treatment process. The combustion process can be further slowed down by stopping the oven in a position in which the material drops into the second portion 6. This ensures the material is out of the gas flow and away from the hot surfaces of the treatment zone.

In addition to the rotary movement of the oven, the apparatus may be provided with means, such
10 as an electro/mechanical vibrator (not shown), for vibrating the oven or at least a part of the oven. The vibration means can also be controlled by the control system. This additional vibrating action allows the apparatus to transfer the materials between the first portion 4 and the second portion 6 in a finer and more controlled quantity to promote a better exchange between the hot gases and the material.

15 The vibration motion can also be used to facilitate mechanical stripping of the coating and contaminates from the material 36. For example, the arrangement can be such that the material is vibrated at a frequency which is equal or close to its natural or resonance frequency. Alternatively, the oven (or at least parts of the oven such as the first portion 4 and/or the second portion 6) can be vibrated at its natural or resonance frequency. Hence allowing the material to vibrate efficiently
20 which increases the abrasion forces and allows the gases to penetrate and treat the material 36.

The apparatus in accordance with the invention is particularly suited for treatment of relatively small quantities of material. This enables a cost effective treatment of materials on much smaller scales than the known rotary kiln or conveying oven apparatus but without the drawbacks of the static
25 oven. Because the materials are processed in batches, the apparatus can be adapted to treat a variety of materials by resetting of the control system between batches.

The apparatus according to the invention can be made relatively small compared with the known rotary kilns or conveying ovens and so takes up much less floor space. The apparatus in accordance with the invention is also relatively simple and requires less maintenance than the known apparatus.

- 5 A further advantage of the apparatus in accordance with the invention is that it requires less supporting equipment than the known rotary kiln and conveying oven apparatus which typically require in feed conveyor belts, discharging conveyor belts, and storage hoppers to maintain a continuous operation.

10 The apparatus as described above can be modified in a number of ways. For example, a jet stirring system (not shown) can be provided to agitate and stir the material in the heat treatment chamber. This allows the hot gases in the heat treatment chamber to reach more of the material being treated and so improves the efficiency of the process. Such a system may comprise one or more jets which can emit a constant stream or blasts of a gaseous material to stir the material in the heat treatment chamber. The gaseous material may be fresh air and may form part of the control system for
15 controlling the oxygen and temperature levels in the oven. Alternatively, the gaseous material can be part of the gases 12 recirculating about the oven.

It is also possible to incorporate one or more tools (not shown) into the apparatus in order to carry out further treatment or control of the material in the oven. Examples of the type of tools (not shown) which may be incorporated into the apparatus include:

- 20 A shredding means for shredding the material as it drops from the first portion 4 into the second portion 6. Such a shredding means may be a rotary shear shredder or any other suitable form of shredder known in the art.

Alternatively or in addition, the apparatus may hold an electromagnetic non-ferrous metal separator for separating non-ferrous metals from the rest of the material being treated. The separator acts on

the material passing between the first portion 4 and the second portion 6. Typically such a separation will be carried out towards the end of the cooling cycle of the process and the non-ferrous metal will be collected in a separate bin from the rest of the material. The separator may be of any suitable type such as those which are known in the art.

- 5 A feeding means may also be provided in the apparatus to control the movement of the material between the first portion 4 and the second portion 6. The feeding means may comprise a damper system or any other suitable system for controlling the release of material from the second portion 6. The use of such a feeding means allows material to be slowly released from the second portion 6 into the first portion 4 for treatment in a substantially continuous manner. This can be useful in
- 10 controlling the release of V.O.C.s.

Claims

1. Apparatus for thermally de-coating and/or drying coated and/or contaminated materials, the apparatus comprising:

a support;

5 an oven mounted to the support and adapted for receiving material to be treated;

the oven being moveable relative to the support between a first position in which a first portion of the oven is generally higher than a second portion and a second position in which the second portion is generally higher than the first portion and the arrangement being such that, in use, the oven can be repeatedly moved between the first and second positions so
10 that material within the oven falls from one portion to the other portion,

characterised in that the first portion incorporates a closable aperture through which material to be treated can be charged and in that a treatment zone through which a stream of hot gasses can be passed is provided.
2. Apparatus as claimed in claim 1, in which the treatment zone is located in the first or
15 second portion of the oven, or partially in each portion, dependent upon the material to be treated and its topology.
3. A method of thermally de-coating and/or drying coated and/or contaminated materials comprising:

providing an oven adapted for receiving material to be treated and a changeover portion,
20 the oven being moveable between a first position in which a first portion of the oven is generally higher than a second portion and a second position in which the second portion

is generally higher than the first portion;

placing the material in the oven;

5 repeatedly moving the oven between the first and second positions so that the material in the oven falls from the one portion to the other portion

characterised in that the first portion incorporates a closable aperture through which material to be treated can be charged and in that a treatment zone through which a stream of hot gasses can be passed is located in the oven.

4. Apparatus as claimed in any preceding claim, wherein the oven comprises a process
10 chamber including a first portion and a second portion with a central zone.
5. Apparatus as claimed in claim 4, wherein a recirculation chamber can be attached to the oven into which chamber the gases are drawn from the central zone.
6. Apparatus as claimed in claim 5, wherein an air-mixing jacket guides the gases from the recirculation chamber into an afterburner chamber in which the gases are heated by a burner.
- 15 7. Apparatus as claimed in any preceding claim, wherein the burner burns the volatile organic compounds which are thermally stripped from the materials in the treatment zone.
8. Apparatus as claimed in any preceding claim, wherein a control system monitors and controls the level of oxygen and the temperature of the gases in the treatment zone to ensure the system operates within safe and effective limits for thermal de-coating of the
20 material being treated.
9. A method as claimed in claim 8, wherein the method includes controlling the oxygen level

to be below 16% whilst temperatures are in excess of 300°C.

10. A method as claimed in claim 8 or claim 9, wherein the treatment zone (15) may be located in the first or second portion of the oven, or partially in each portion, dependent upon the material to be treated and its topology.

FIGURE 2

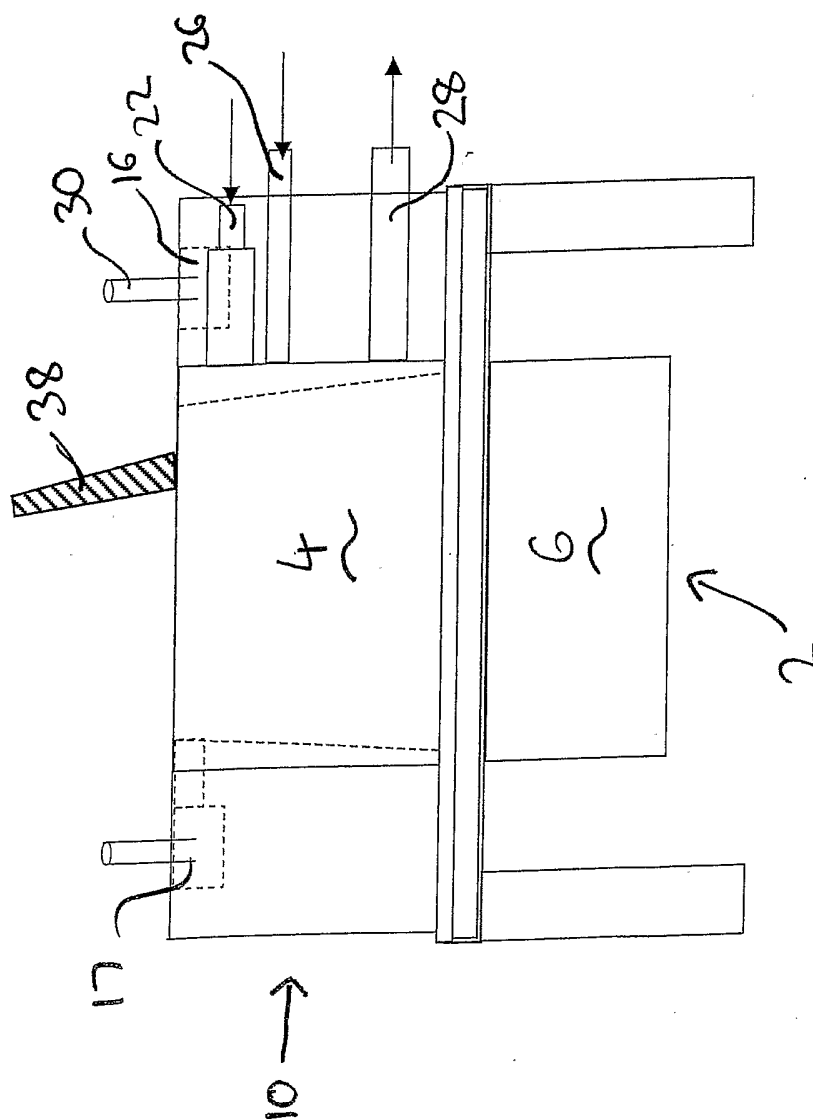


FIGURE 3A

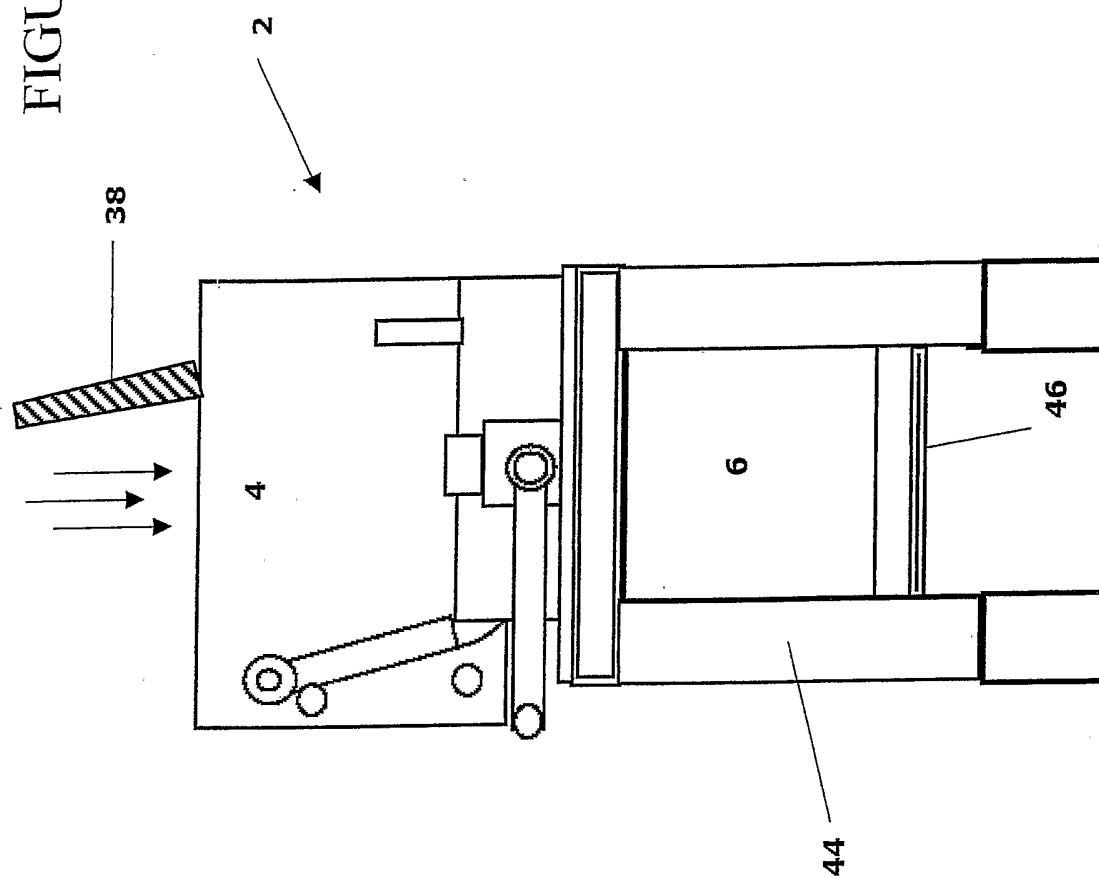


FIGURE 3B

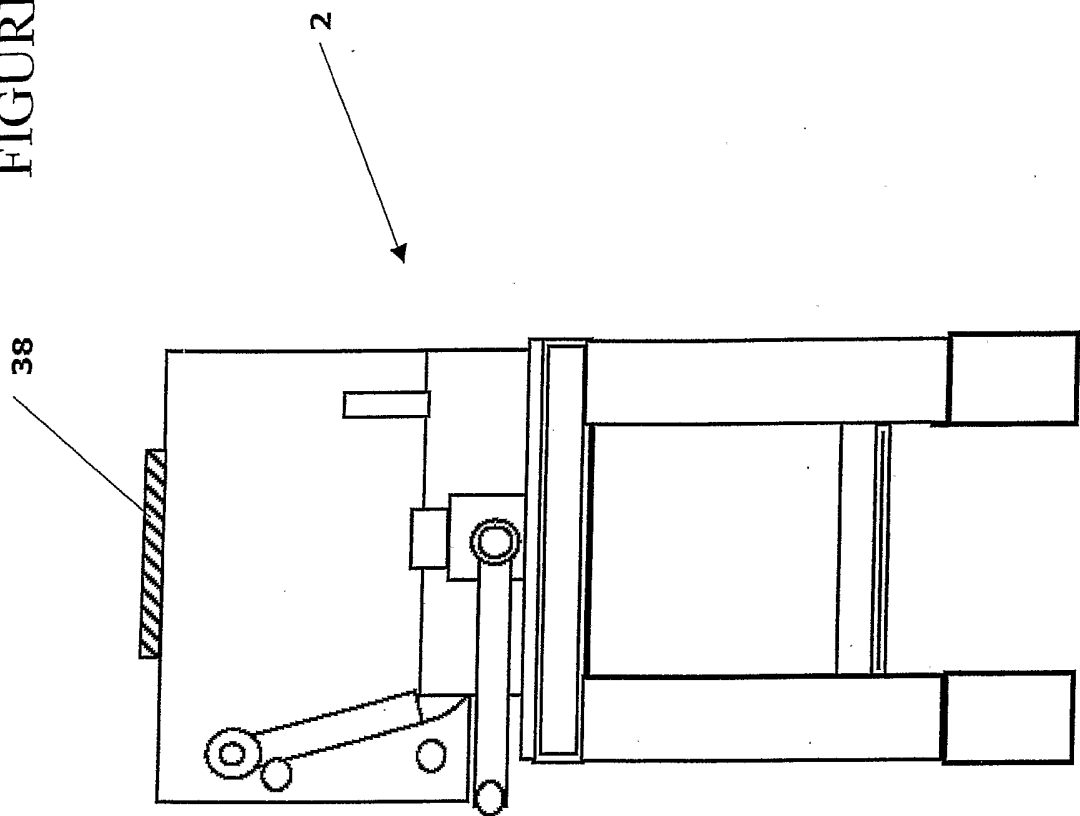


FIGURE 3C

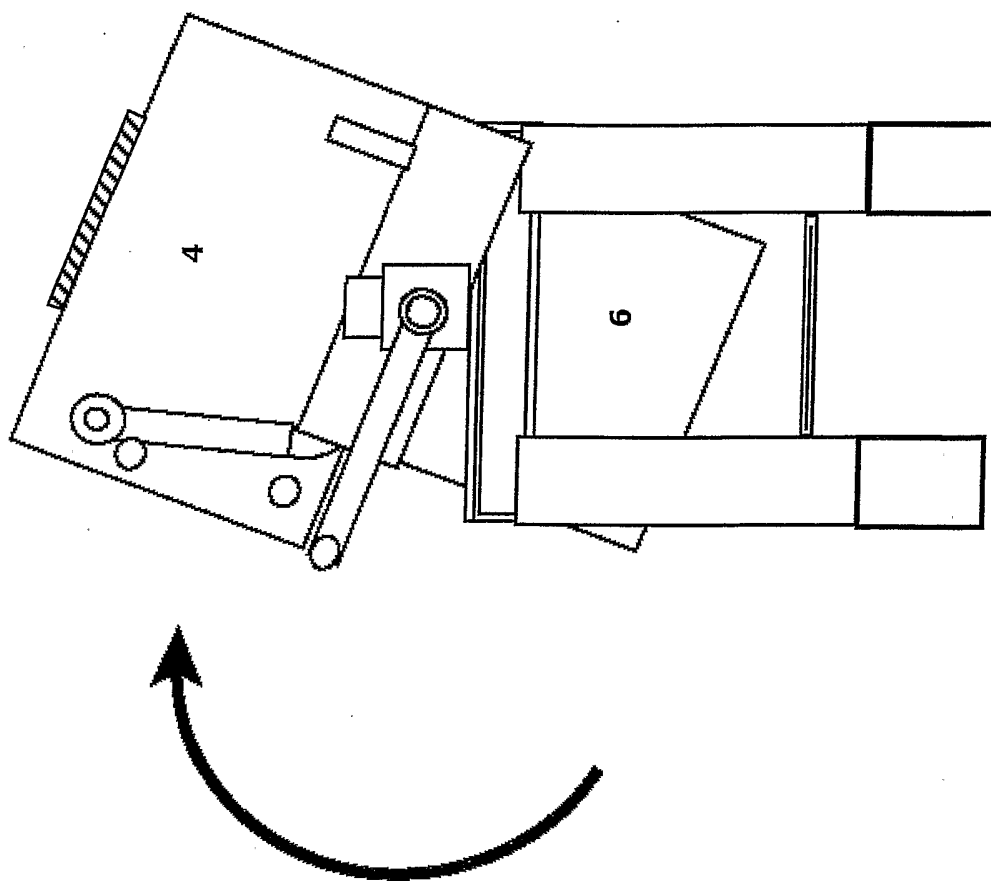


FIGURE 3D

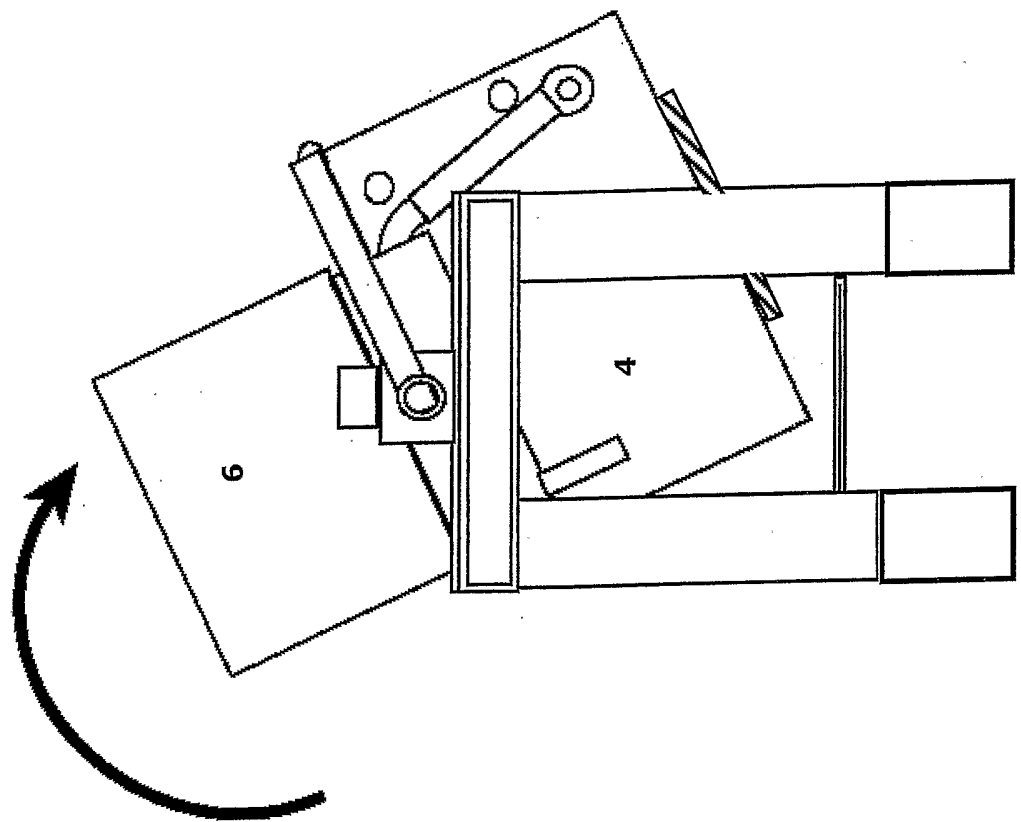


FIGURE 3E

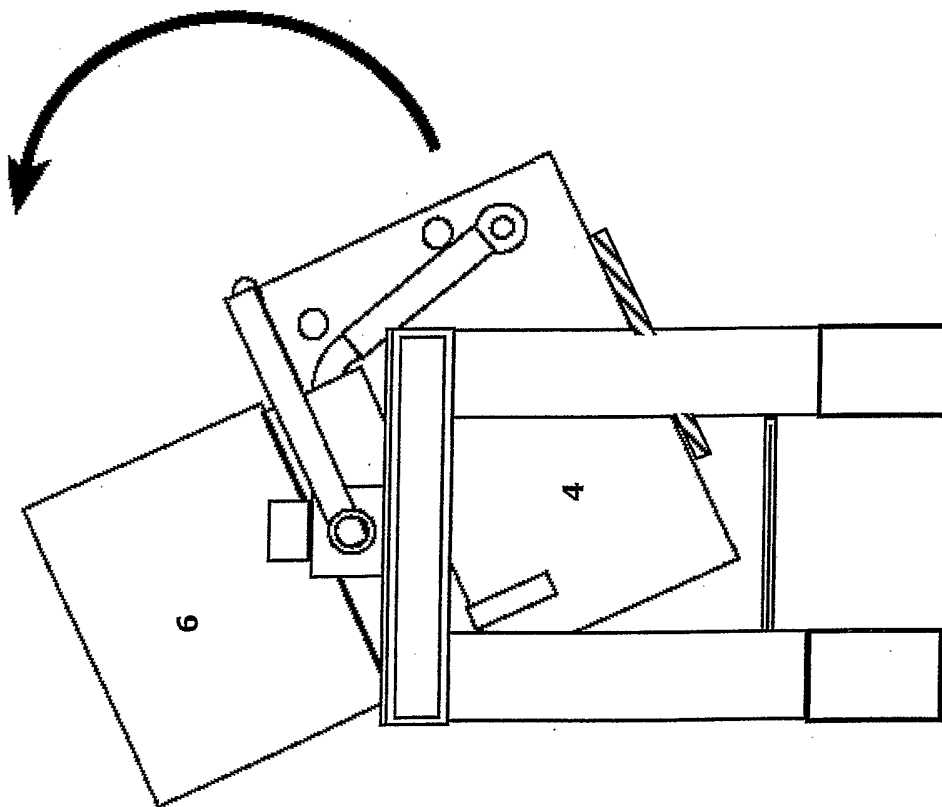


FIGURE 3F

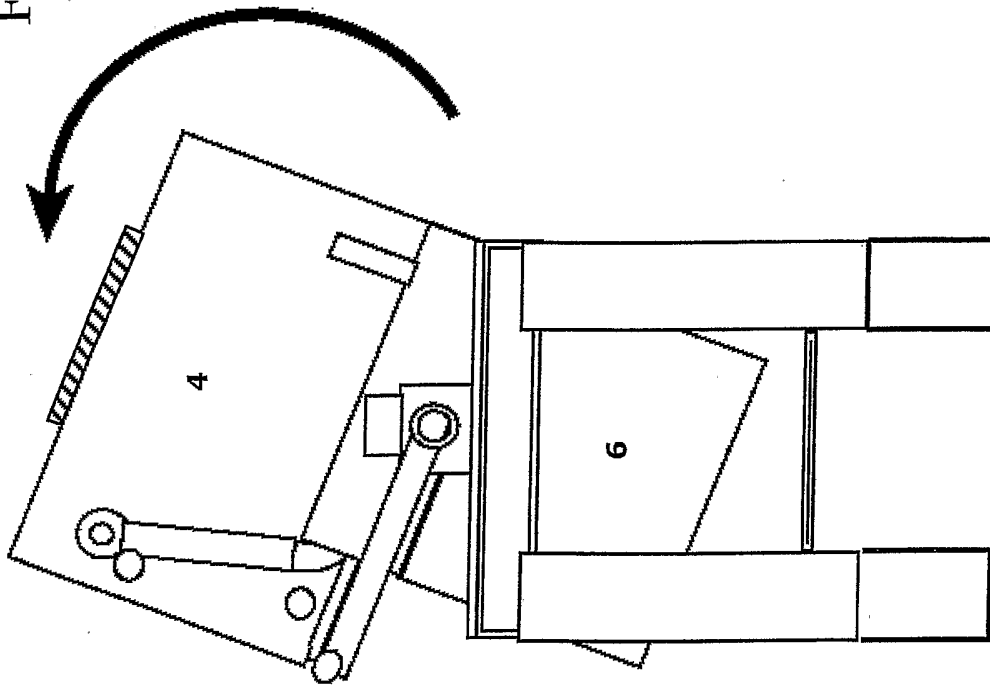


FIGURE 3G

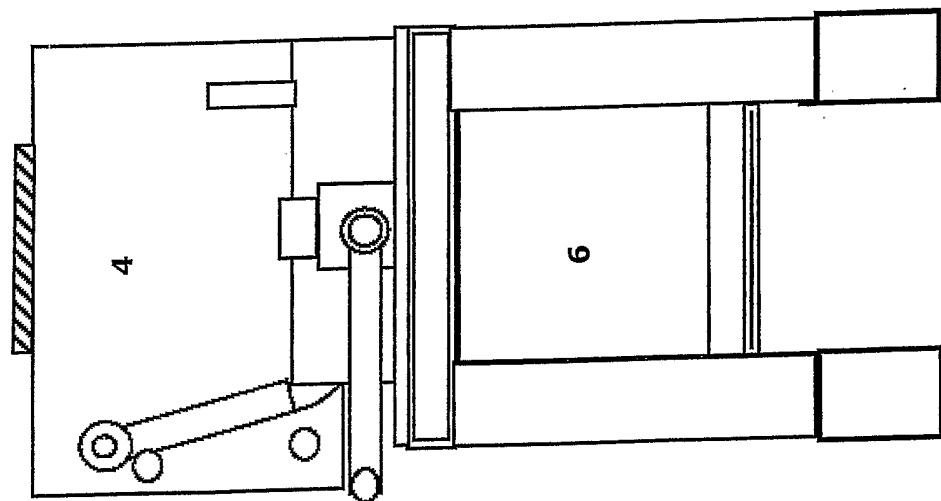


FIGURE 3H


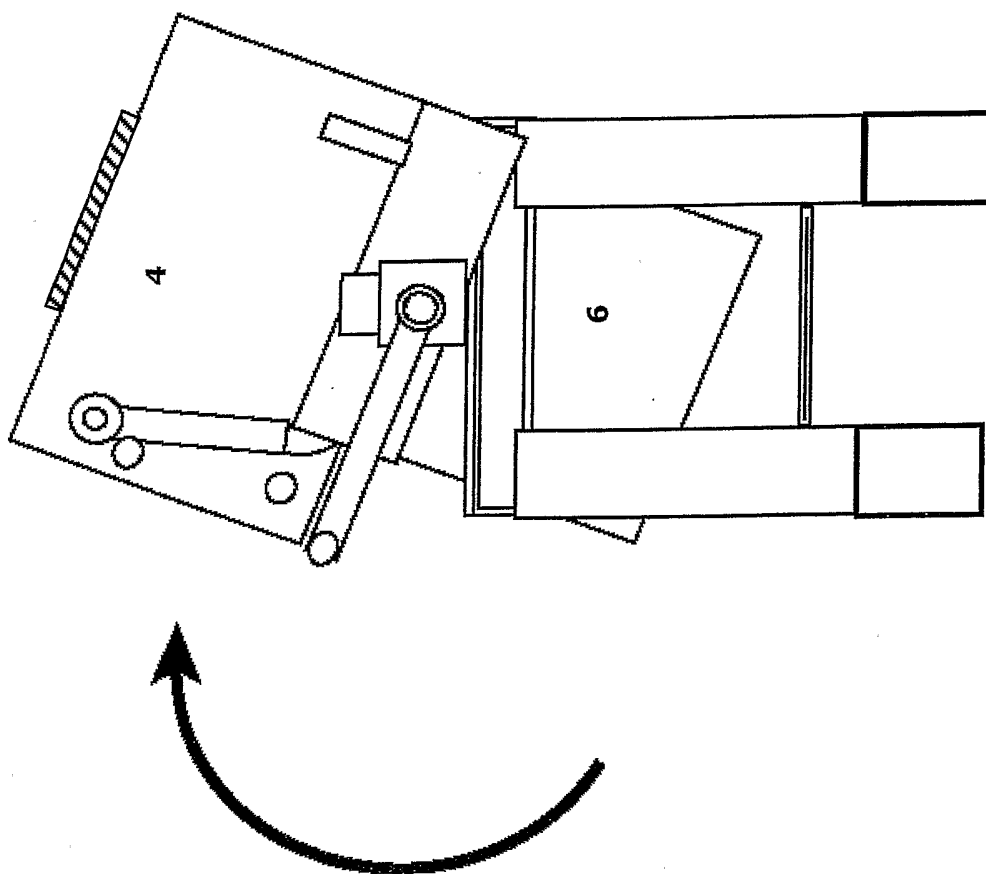


FIGURE 3I



FIGURE 3J

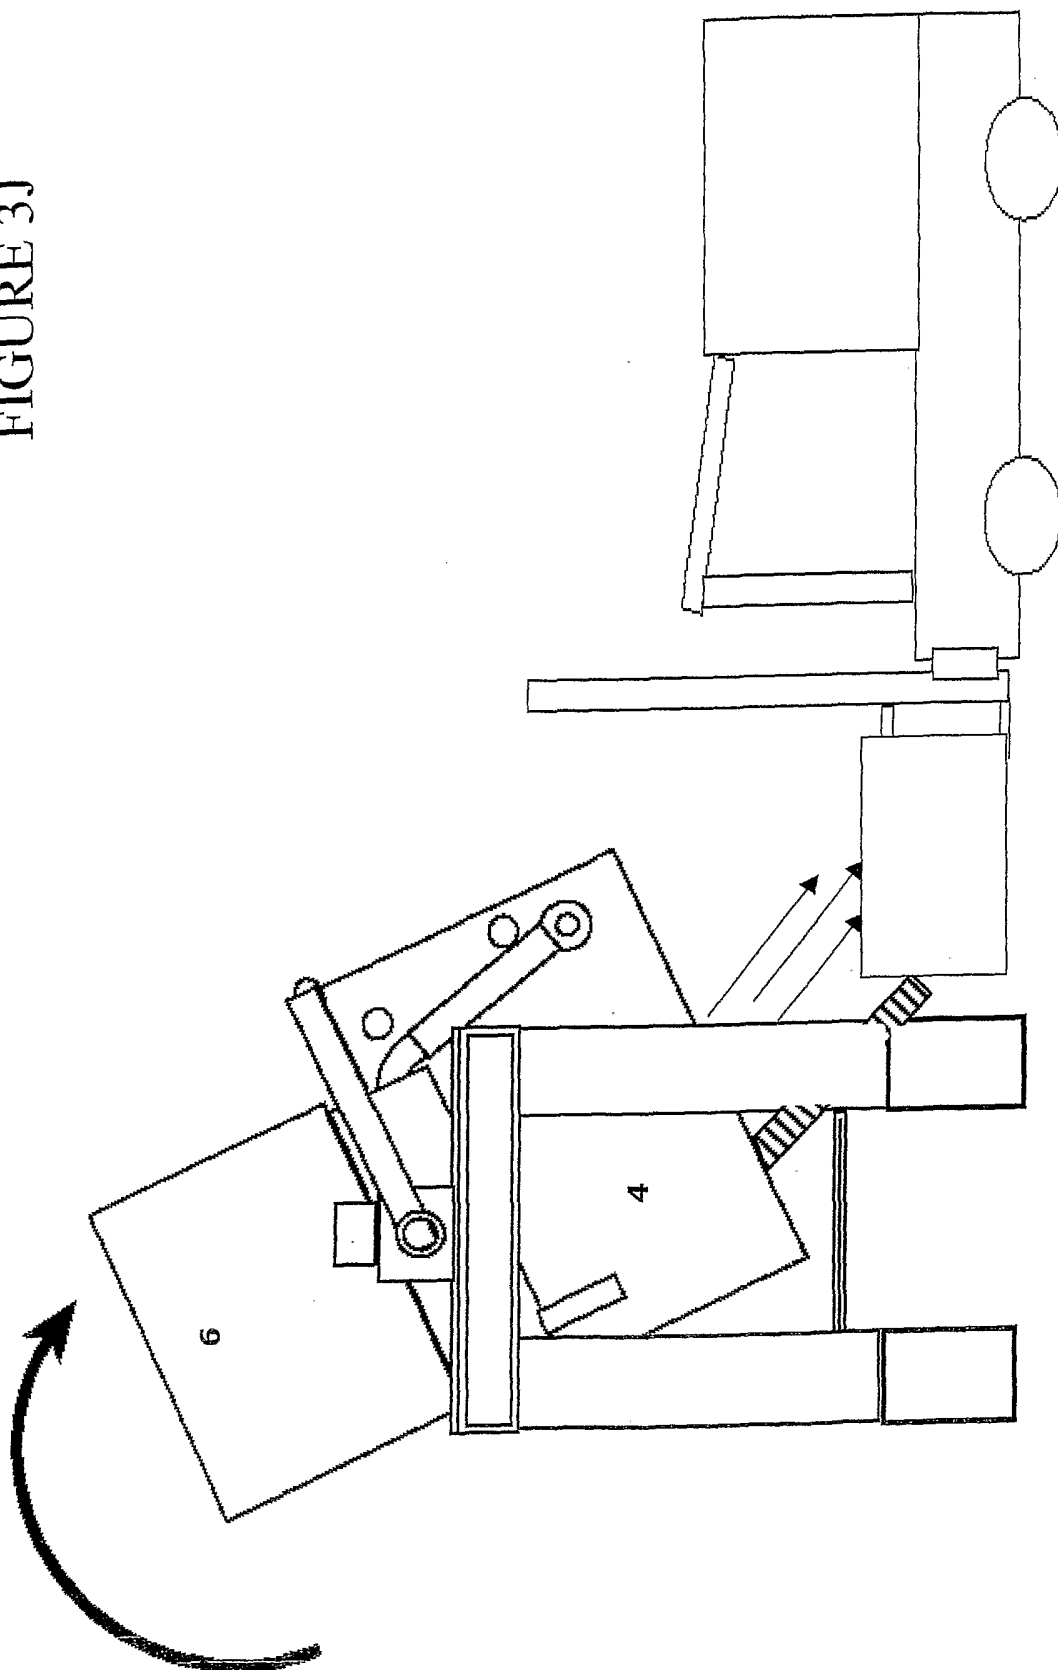

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2006/001105

A. CLASSIFICATION OF SUBJECT MATTER
INV. B08B7/00 B08B11/00 F26B11/04 B44D3/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B08B F26B B44D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2004/059229 A (PERRY, OPHNEIL, HENRY; ALCHALABI, RIFAT) 15 July 2004 (2004-07-15) page 7, line 26 - page 8, line 13; figure 4	1-10
A	WO 01/98092 A (PERRY, OPHNEIL, HENRY; ALCHALABI, RIFAT) 27 December 2001 (2001-12-27) cited in the application page 7, line 1 - page 10, line 3; figure 1	1-10
A	FR 880 701 A (ETABLISSEMENTS P. DUCLOS; ANCIENS ATELIERS CHAVASSIEUX) 2 April 1943 (1943-04-02) the whole document	1-10

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

13 June 2006

Date of mailing of the international search report

21/06/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sartor, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2006/001105

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2004059229 A	15-07-2004	AU 2003290274 A1	22-07-2004
		BR 0317745 A	22-11-2005
		CA 2511611 A1	15-07-2004
		CN 1748115 A	15-03-2006
		EP 1581778 A1	05-10-2005
		JP 2006512558 T	13-04-2006
		US 2006099543 A1	11-05-2006
WO 0198092 A	27-12-2001	AT 314209 T	15-01-2006
		AU 7426001 A	02-01-2002
		CA 2413372 A1	27-12-2001
		CN 1437534 A	20-08-2003
		DK 1292457 T3	15-05-2006
		EP 1292457 A1	19-03-2003
		JP 2003536046 T	02-12-2003
		SK 92003 A3	11-09-2003
		US 2003145482 A1	07-08-2003
FR 880701 A	02-04-1943	NONE	