



(11) **EP 1 523 929 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
20.01.2010 Bulletin 2010/03

(51) Int Cl.:
A47L 15/42^(2006.01) E05F 1/12^(2006.01)

(21) Application number: **04024203.4**

(22) Date of filing: **11.10.2004**

(54) **Balancing device for a door of an household appliance**

Gewichtsausgleichseinrichtung für eine Tür von einem Haushaltsgerät

Dispositif d'équilibrage d'une porte d'un appareil électroménager

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PL PT RO SE SI SK TR

(30) Priority: **13.10.2003 IT BO20030592**

(43) Date of publication of application:
20.04.2005 Bulletin 2005/16

(73) Proprietor: **C.M.I. S.r.l.**
40056 Crespellano (BO) (IT)

(72) Inventors:
• **Degli Esposti, Ermes**
40100 Bologna (IT)

• **Gherardi, Eros**
40100 Bologna (IT)
• **Ghedini, Teresa**
40100 Bologna (IT)

(74) Representative: **Negrini, Elena**
Agazzani & Associati S.r.l.
Via dell'Angelo Custode 11/6
40141 Bologna (IT)

(56) References cited:
EP-A- 1 302 150 EP-A1- 0 046 314
WO-A-03/039322 DE-U1- 8 329 611
US-A- 4 163 344

EP 1 523 929 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention concerns the technical field of the hinges, and refers to a balancing device for a door of an household appliance particularly for stopping, in intermediate positions, a door, a shutter or a porthole in general, of an electrical appliance device, such an oven, a dishwasher and similar, having rotation hinges with horizontal axis and below the same door.

[0002] There are known ovens, dishwasher and similar provided with horizontal axis hinges for the rotation of a door from a closed condition, in which such door is vertical, to an open condition in which the door is lowered to an almost horizontal position,

[0003] Such appliances sometimes have known balancing devices, connected to their body and to the door to avoid that this last, during descent opening, can reach, due to the falling, an excessive speed and to allow the door stop in at least some intermediate positions between opening and closing.

[0004] A drawback of such known balancing devices consists in the fact that they include complex and numerous elements, generally at least three main stiff elements with at least two special cam profiles having high surface finishing for regularity and fluidity of the mutual matching, being therefore expensive, complex and critical production.

[0005] Other drawback consists in that mutual matching portions, of such known devices, are wearing provoking irregularity and defects of operations or breakups.

[0006] Documents WO03/039322, DE8329611, US4163344 and EP1046314 disclose a balancing device for a door of an household appliance provided with a chassis to which is hinged the door. Said device includes an articulated means provided with a balance means equipped with swiveling connection means first, second and third respectively for the appliance chassis, for an elastic mean, for an end of a tension rod mean whose remaining end has a coupler (8) for the appliance door. The first swiveling connection means is intermediary and misaligned to the remaining two and the elastic mean transmitting to the balance means a force opposing the door weight and transmitted to the balance means by the tension rod mean. The balance means is approximately triangular shaped with the vertexes having the connection means and it is made of a shaped plate.

[0007] A object of the present invention is to propose a simple balancing device and including a reduced number of parts, balancing, at least partially, the door in intermediate opening conditions.

[0008] Other object is to propose a device of smaller dimension, reliable and few wearing. The above-mentioned objects are achieved according to the content of the claims.

[0009] The characteristics of the invention are underlined in the following, with particular reference to the attached drawings, in which:

- figures 1 and 2 show side views of articulated means respectively right and left of the balancing device for a door of an household appliance object of the present invention;
- 5 - figures 3 and 4 illustrate views, not in scale, respectively from the top and from left of a balance means of figure 1;
- figure 5 illustrates a side view, not in scale, of a tension rod mean of figure 1;
- 10 - figure 6 illustrates a side view of a variant of the device of figure 1;
- figures 7 and 8 illustrate section and plant views respectively of a slide mean of figure 6.

15 **[0010]** With reference to the figures 1 - 5, numeral 1 indicates, right or left articulated means of the balancing device for a vertical door of an appliance provided with a chassis to which is hinged the door at bottom.

20 **[0011]** The articulated means 1, right or left, are connected to respective side portions of door and of chassis close to the hinges having fixed horizontal rotation axis or translating axis for lifting the lower edge of the door in the opening conditions.

25 **[0012]** Each articulated means 1 is provided with a balance means 2 having swiveling connection means at least first 3, second 4 and third 5 respectively for the appliance chassis, for an elastic mean 6 and for an end of a tension rod mean 7, made of cut plate, whose remaining end has a coupler 8 for the appliance door.

30 **[0013]** The first swiveling connection means 3 is intermediary and misaligned to the remaining two.

35 **[0014]** The elastic mean 6, for instance a helical spring, transmits to the balance means 2, triangular plain shaped, a force opposing the door weight and transmitted to the balance means 2 by the tension rod mean 7.

40 **[0015]** The rotation axis of the swiveling connection means 3, 4, 5 are nearly perpendicular to the plan defined by the balance means 2 and the elastic mean 6 and the tension rod mean 7 lie approximately on a same plan nearly parallel to said plain defined by the balance means 2.

45 **[0016]** The linking line of the first connection means 3 to the second 4 forms, with the linking line of the first connection means 3 to the third 5, an angle A ranging from 90° to 70°, preferably of around 80°.

50 **[0017]** The distance between the connection means first 3 and second 4 is less than the distance between the connection means first 3 and third 5 and this last distance is less of the distance between the connection means second 4 and third 5.

[0018] In such way the connection means are located in the vertex of an irregular almost right triangle.

55 **[0019]** The distance between the connection means first 3 and second 4 is bigger than half distance between the third mean of connection 5 and the coupler 8 of the tension rod mean 7 for the door.

[0020] The couplers to the chassis for the free ends of the tension rod mean and of the elastic mean and for the

first connection mean 3 are positioned in way that this last first connection mean 3 is interposed between the elastic means 6 and the tension rod mean 7.

[0021] The balance means 2 is made of a shaped plate having, close to vertexes, the connection means 3, 4, 5.

[0022] The plate of the balance means 2 has a linear linear folding 12 linking a first flat wall 9, having all of the connection means 3, 4, 5, with a second flat wall 10 placed at least close to the first connection means 3.

[0023] Walls 9, 10 have respective projections 11 fit for maintaining the mutual parallelism in cooperation with the folding 12.

[0024] The first connection mean 3 consists in a passing hole carried out in the walls first 9 and second 10.

[0025] The folding 12 constitutes a stop fit for matching an arrest of the appliance chassis in a extreme door opening condition.

[0026] The connection means second 4 and third 5 include respective hardened steel pivots fixed by orbital forming of a fixing end.

[0027] The pivot of the third connection means 5 is double diameter type and has a stop shoulder for the tension rod mean 7.

[0028] The coupler 8 of the tension rod mean 7 consists in an open buttonhole for a pivot of the door.

[0029] The tension rod mean 7 has a respective projection fit to reduce the transversal clearance slidingly matching a flat element of the chassis.

[0030] The edge opposite to the balance means 2 of the tension rod mean 7 has a housing 13 carried out by a simultaneous cutting.

[0031] In the variant of the device illustrated in the figures 6 - 8, the housing 13 is engaged by a slide mean 14 designed, for instance, to the driving of door hinge means for the translation of the rotation axis.

[0032] The slide mean 14 is made of material having a low friction coefficient, for instance nylon or teflon, and is approximately ice skate shaped, in other words having a rectilinear portion joined to a curved portion.

[0033] The slide mean 14 has fixing holes 15 for a fixing pivot to the tension rod mean 7 and it has a groove 16 for the housing 13.

[0034] The operation of the device provides that the spring of the elastic means 6 transmits to the balance means an antagonist torque of the door weight torque.

[0035] The above described conformation and geometry of the articulated means, causes an increase of the antagonist torque the door is opening allowing the balancing of the later also in intermediate opening conditions.

[0036] An advantage of the present invention is to provide a simple balancing device for balancing the door in intermediate opening conditions.

[0037] Further advantage is to provide a smaller, reliable and few wearing device, and having a fluid and silent operation.

[0038] The aforesaid invention is described, with reference to the attached drawings, by way of example not

limiting, and therefore it is evident that all its possible modifications of variants suggested by the practice or by the operation and use, are in any case included in the ambit defined by the following claims.

Claims

1. Balancing device for a door of an household appliance provided with a chassis to which is hinged the door; the device includes at least an articulated means (1) provided with a balance means (2) equipped with swiveling connection means at least first (3), second (4) and third (5) respectively for the appliance chassis, for an elastic mean (6), for an end of a tension rod mean (7) whose remaining end has a coupler (8) for the appliance door; the first swiveling connection means (3) being intermediary and misaligned to the remaining two and the elastic mean (6) transmitting to the balance means (2) a force opposing the door weight and transmitted to the balance means (2) by the tension rod mean (7); the balance means (2) is approximately triangular shaped with the vertexes having the connection means (3, 4, 5) and it is made of a shaped plate; said device being **characterized in that** the walls (9, 10) have respective projections (11) fit to maintain the parallelism between the themselves walls, in cooperation with the folding (12); the first connection mean (3) consists in a passing hole carried out in the walls first (9) and second (10).
2. Device according to claim 1 **characterized in that** it includes two articulated means (1) each associated to a respective side of the door.
3. Device according to the claim 1 **characterized in that** the rotation axis of the swiveling connection means (3, 4, 5) are nearly perpendicular to the plan defined by the balance means (2).
4. Device according to the claim 1 **characterized in that** the elastic means (6) and connecting rod mean (7) lie approximately on a same plain.
5. Device according to the claim 4 **characterized in that** the lying plan of elastic means (6) and of connecting rod mean (7) is parallel to the plan defined by the balance means (2).
6. Device according to the claim 1 **characterized in that** the linking line of the connection means first (3) and second (4) forms, with the linking line of the connection means first (3) and third (5), an angle (A) ranging from 90° to 70°, preferably of about 80°.
7. Device according to claim 1 or to claim 6 **characterized in that** the distance between the connection

means first (3) and second (4) is less than the distance between the connection means first (3) and third (5) and this latter is less than the distance between the connection means second (4) and third (5).

8. Device according to claim 1 or claim 7 **characterized in that** the distance between the connection means first (3) and second (4) is bigger than half of the distance between the third connection mean (5) and the coupler (8) of the tension rod mean (7) for the door.
9. Device according to claim 1 or claim 8 **characterized in that** the first connection means (3) is interposed between the elastic mean (6) and the tension rod mean (7).
10. Device according to claim 9 **characterized in that** the plate of the balance means (2) has a folding (12) for linking a first wall (9), having the connection means (3, 4, 5), with a second wall (10) placed at least close to the first connection means (3).
11. Device according to claim 10 **characterized in that** the folding (12) forms a stop destined to match an arrest of the appliance chassis in a door extreme opening condition.
12. Device according to claim 1 **characterized in that** the connection means second (4) and third (5) comprise respective pivots.
13. Device according to claim 1 **characterized in that** the coupler (8) of the tension rod mean (7) consists in an open buttonhole for a pivot of the door.
14. Device according to claim 1 **characterized in that** the tension rod mean (7) includes a respective projection destined to the sliding matching of a plain element of the chassis.
15. Device according to claim 1 **characterized in that** the edge opposed to the balance means (2) of the tension rod mean (7) has a housing (13) for a slide mean (14) for driving the hinge means of the door.
16. Device according to claim 15, **characterized in that** the slide mean (14) provides fixing holes (15) for a block pivot to the tension rod mean (7) and provides a groove (16) for the housing (13).
17. Device according to any one of the preceding claims **characterized in that** the slide mean (14) is approximately ice skate shaped.

Patentansprüche

1. Ausgleichsvorrichtung für eine Tür eines Haushaltsgerätes, das mit einem Chassis versehen ist, an das die Tür angelenkt ist, wobei die Vorrichtung mindestens eine Gelenkeinrichtung (1) aufweist, die mit einer Ausgleichseinrichtung (2) versehen ist, welche mindestens eine erste (3), zweite (4) und dritte (5) Drehverbindungseinrichtung für das Gerätechassis für eine elastische Einrichtung (6) und für ein Ende einer Zugstangeneinrichtung (7) aufweist, deren verbleibendes Ende einen Verbinder (8) für die Gerätetür besitzt, wobei die erste Drehverbindungseinrichtung (3) eine Zwischeneinrichtung bildet und nicht zu den verbleibenden zwei Drehverbindungseinrichtungen ausgerichtet ist, wobei die elastische Einrichtung (6) eine dem Türgewicht entgegenwirkende Kraft auf die Ausgleichseinrichtung (2) überträgt, die von der Zugstangeneinrichtung (7) auf die Ausgleichsrichtung (2) übertragen wird, und wobei die Ausgleichseinrichtung (2) etwa dreieckförmig ausgebildet ist, wobei die Scheitelpunkte mit den Verbindungseinrichtungen (3, 4, 5) versehen sind, und aus einer geformten Platte hergestellt ist, **dadurch gekennzeichnet, dass** die Wände (9, 10) entsprechende Vorsprünge (11) aufweisen, die in der Lage sind, die Parallelität zwischen diesen Wänden in Zusammenwirkung mit einer Faltung (12) aufrechtzuerhalten, und dass die erste Verbindungseinrichtung (3) aus einem Durchgangsloch besteht, das in der ersten (9) und zweiten (10) Wand ausgebildet ist.
2. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** sie zwei Gelenkeinrichtungen (1) aufweist, die jeweils einer entsprechenden Seite der Tür zugeordnet sind.
3. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die Drehachse der Drehverbindungseinrichtungen (3, 4, 5) nahezu senkrecht zu der von der Ausgleichseinrichtung (2) gebildeten Ebene verläuft.
4. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die elastische Einrichtung (6) und die Verbindungsstangeneinrichtung (7) etwa auf der gleichen Ebene liegen.
5. Vorrichtung nach Anspruch 4, **dadurch gekennzeichnet, dass** die Lageebene der elastischen Einrichtung (6) und der Verbindungsstangeneinrichtung (7) parallel zu der von der Ausgleichseinrichtung (2) gebildeten Ebene verläuft.
6. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die Verbindungslinie zwischen der ersten (3) und der zweiten (4) Verbindungseinrichtung

tung mit der Verbindungslinie der ersten (3) und dritten (5) Verbindungseinrichtung einen Winkel (A) bildet, der von 90° bis 70° reicht und vorzugsweise etwa 80° beträgt.

7. Vorrichtung nach Anspruch 1 oder 6, **dadurch gekennzeichnet, dass** der Abstand zwischen der ersten (3) und zweiten (4) Verbindungseinrichtung geringer ist als der Abstand zwischen der ersten (3) und dritten (5) Verbindungseinrichtung und dass letzterer geringer ist als der Abstand zwischen der zweiten (4) und dritten (5) Verbindungseinrichtung.
8. Vorrichtung nach Anspruch 1 oder 7, **dadurch gekennzeichnet, dass** der Abstand zwischen der ersten (3) und zweiten (4) Verbindungseinrichtung größer ist als die Hälfte des Abstandes zwischen der dritten Verbindungseinrichtung (5) und dem Verbinder (8) der Zugstangeneinrichtung (7) für die Tür.
9. Vorrichtung nach Anspruch 1 oder 8, **dadurch gekennzeichnet, dass** die erste Verbindungseinrichtung (3) zwischen der elastischen Einrichtung (6) und der Zugstangeneinrichtung (7) angeordnet ist.
10. Vorrichtung nach Anspruch 9, **dadurch gekennzeichnet, dass** die Platte der Ausgleichseinrichtung (2) eine Faltung (12) zum Verbinden einer ersten Wand (9), die mit den Verbindungseinrichtungen (3, 4, 5) versehen ist, mit einer zweiten Wand (10), die mindestens eng benachbart zur ersten Verbindungseinrichtung (3) angeordnet ist, aufweist.
11. Vorrichtung nach Anspruch 10, **dadurch gekennzeichnet, dass** die Faltung (12) einen Anschlag bildet, der dazu dient, mit einer Arretierung des Gerätechassis in einem extremen Türöffnungszustand zusammenzuwirken.
12. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die zweite (4) und dritte (5) Verbindungseinrichtung entsprechende Gelenkzapfen aufweisen.
13. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der Verbinder (8) der Zugstangeneinrichtung (7) aus einem offenen Knopfloch für einen Gelenkzapfen der Tür besteht.
14. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die Zugstangeneinrichtung (7) einen entsprechenden Vorsprung aufweist, der für eine gleitende Zusammenwirkung mit einem ebenen Element des Chassis bestimmt ist.
15. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der der Ausgleichseinrichtung (2) der Zugstangeneinrichtung (7) gegenüberliegende

Rand ein Gehäuse (13) für eine Gleiteinrichtung (14) zum Antreiben der Scharniereinrichtung der Tür aufweist.

- 5 16. Vorrichtung nach Anspruch 15, **dadurch gekennzeichnet, dass** die Gleiteinrichtung (14) Fixierlöcher (15) für einen Blockzapfen an der Zugstangeneinrichtung (7) und eine Nut (16) für das Gehäuse (13) bildet.
- 10 17. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Gleiteinrichtung (14) etwa schlitshuhförmig ausgebildet ist.
- 15

Revendications

- 20 1. Dispositif d'équilibrage pour une porte d'un appareil électroménager dotée d'un châssis par rapport auquel est articulée la porte, le dispositif comprend au moins un moyen articulé (1) doté d'un moyen à balancier (2) équipé au moins de premier (3), deuxième (4) et troisième (5) moyens de raccordement pivotants respectivement pour le châssis de l'appareil électroménager, pour un moyen élastique (6), pour une extrémité d'un moyen de tige de tension (7) dont l'extrémité restante a un dispositif de couplage (8) pour la porte de l'appareil ; les premiers moyens de raccordement pivotants (3) étant entre et présentant un défaut d'alignement avec les deux moyens restants et le moyen élastique (6) transmettant au moyen à balancier (2) une force opposée au poids de la porte et transmise au moyen à balancier (2) par le moyen de tige de tension (7) ; le moyen à balancier (2) a une forme approximativement triangulaire avec les sommets qui comportent les moyens de raccordement (3, 4, 5) et est réalisé avec la forme d'une plaque ; ledit dispositif étant **caractérisé en ce que** les parois (9, 10) ont des saillies (11) respectives adaptées pour maintenir le parallélisme entre les parois elles-mêmes, en coopération avec le repliage (12), les premiers moyens de raccordement (3) se composent d'un trou de passage réalisé dans les première (9) et seconde (10) parois.
- 25
- 30 2. Dispositif selon la revendication 1, **caractérisé en ce qu'il** comprend deux moyens articulés (1), chacun associé à un côté respectif de la porte.
- 35 3. Dispositif selon la revendication 1, **caractérisé en ce que** les axes de rotation des moyens de raccordement pivotants (3, 4, 5) sont presque perpendiculaires au plan défini par le moyen à balancier (2).
- 40 4. Dispositif selon la revendication 1, **caractérisé en ce que** le moyen élastique (6) et le moyen de tige de raccordement (7) se trouvent approximativement
- 45
- 50
- 55

- sur un même plan.
5. Dispositif selon la revendication 4, **caractérisé en ce que** le plan de disposition du moyen élastique (6) et du moyen de tige de raccordement (7) est parallèle au plan défini par le moyen à balancier (2). 5
6. Dispositif selon la revendication 1, **caractérisé en ce que** la ligne de liaison des premier (3) et deuxième (4) moyens de raccordement forme, avec la ligne de liaison des premier (3) et troisième (5) moyens de raccordement un angle (A) de l'ordre de 90° à 70°, de préférence d'environ 80°. 10
7. Dispositif selon la revendication 1 ou la revendication 6, **caractérisé en ce que** la distance entre les premier (3) et deuxième (4) moyens de raccordement est inférieure à la distance entre les premiers (3) et troisième (5) moyens de raccordement et cette dernière est inférieure à la distance entre les deuxième (4) et troisième (5) moyens de raccordement. 15
8. Dispositif selon la revendication 1 ou la revendication 7, **caractérisé en ce que** la distance entre les premier (3) et deuxième (4) moyens de raccordement est supérieure à la moitié de la distance entre le troisième moyen de raccordement (5) et le dispositif de couplage (8) du moyen de tige de tension (7) pour la porte. 25
9. Dispositif selon la revendication 1 ou la revendication 8, **caractérisé en ce que** le premier moyen de raccordement (3) est intercalé entre le moyen élastique (6) et le moyen de tige de tension (7). 30
10. Dispositif selon la revendication 9, **caractérisé en ce que** la plaque du moyen à balancier (2) a un repliement (12) pour relier une première paroi (9), ayant les moyens de raccordement (3, 4, 5), avec une seconde paroi (10) placée au moins à proximité du premier moyen de raccordement (3). 35
11. Dispositif selon la revendication 10, **caractérisé en ce que** le repliement (12) forme une butée destinée à rencontrer un arrêt du châssis de l'appareil dans une condition d'ouverture extrême de la porte. 40
12. Dispositif selon la revendication 1, **caractérisé en ce que** les deuxième (4) et troisième (5) moyens de raccordement comprennent des pivots respectifs. 45
13. Dispositif selon la revendication 1, **caractérisé en ce que** le dispositif de couplage (8) du moyen de tige de tension (7) se compose d'une boutonnière ouverte pour un pivot de la porte. 50
14. Dispositif selon la revendication 1, **caractérisé en ce que** le moyen de tige de tension (7) comprend une saillie respective destinée à rencontrer de manière coulissante un élément plat du châssis.
15. Dispositif selon la revendication 1, **caractérisé en ce que** le bord opposé au moyen à balancier (2) du moyen de tige de tension (7) a un logement (13) pour un moyen formant patin (14) afin d'entraîner les moyens de charnière de la porte. 55
16. Dispositif selon la revendication 15, **caractérisé en ce que** le moyen formant patin (14) présente des trous de fixation (15) pour un pivot de blocage par rapport au moyen de tige de tension (7) et présente une rainure (16) pour le logement (13).
17. Dispositif selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen formant patin (14) est approximativement en forme de patin à glace.

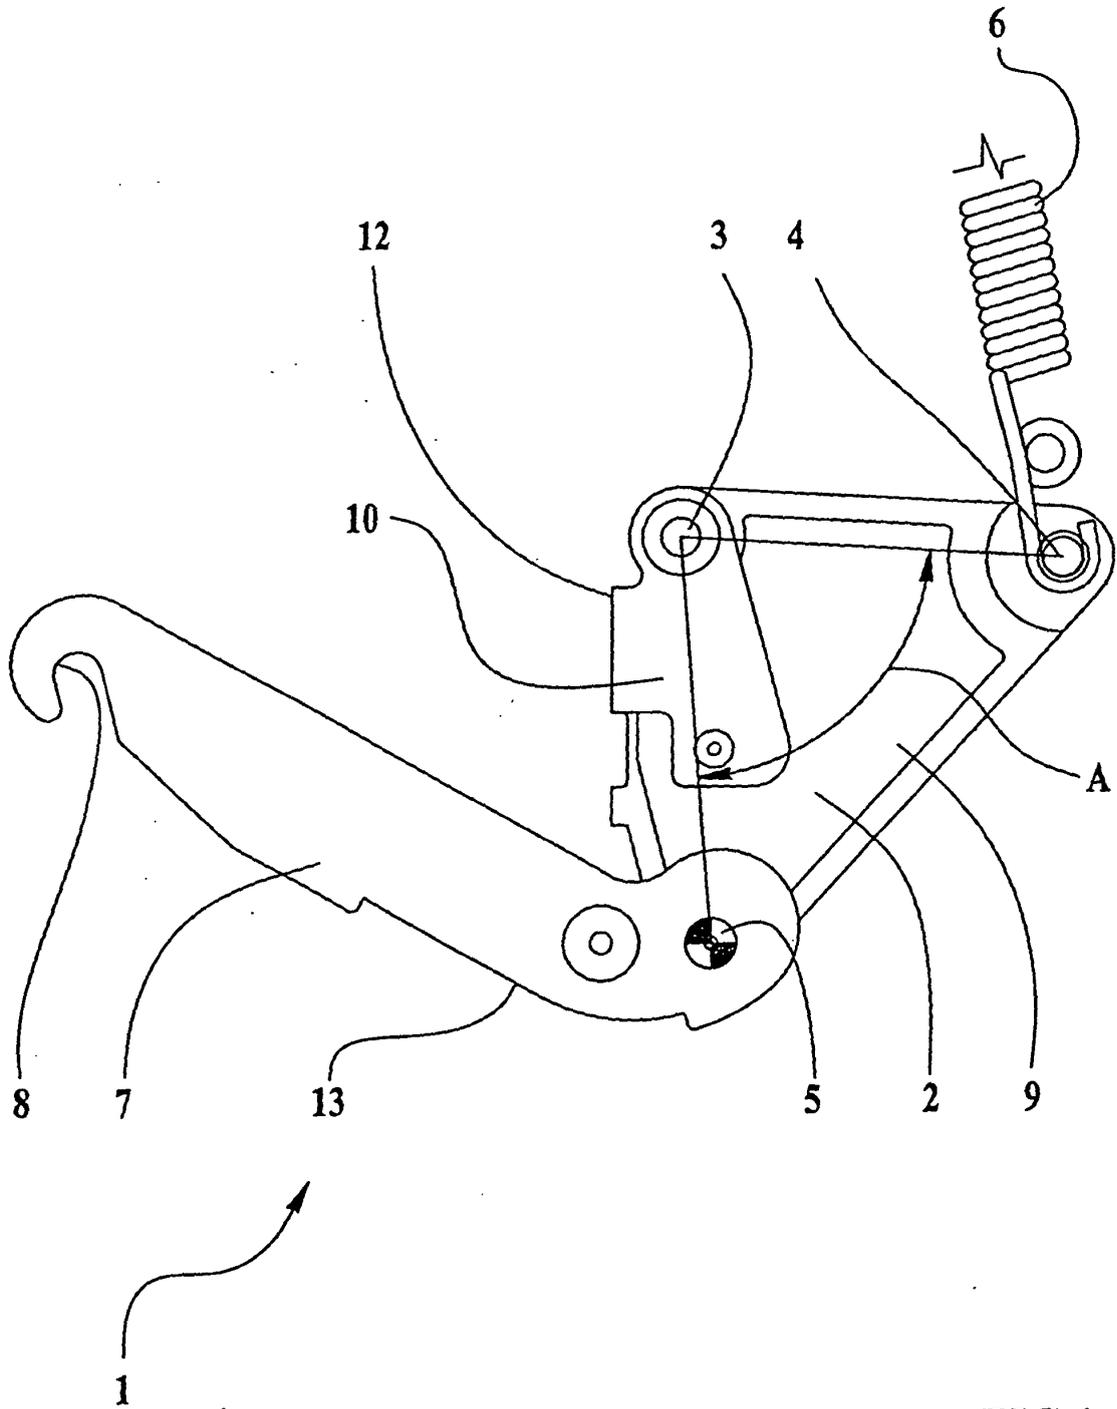


FIG.1

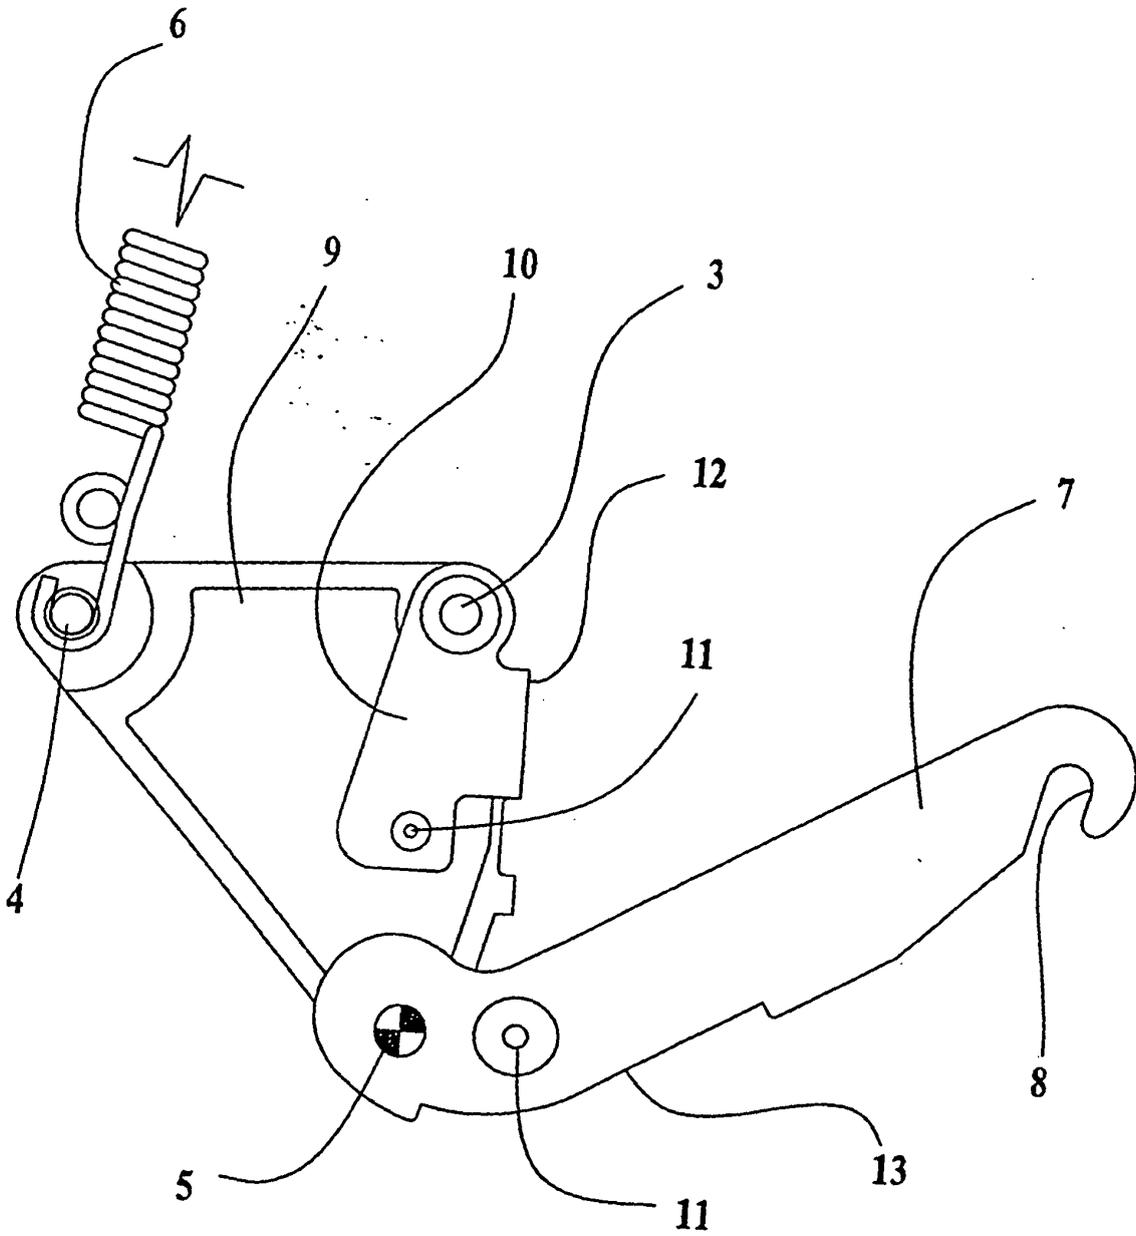


FIG.2

FIG.3

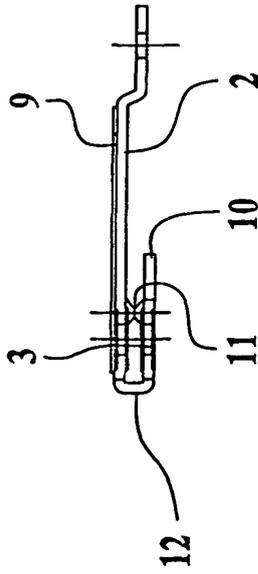


FIG.7

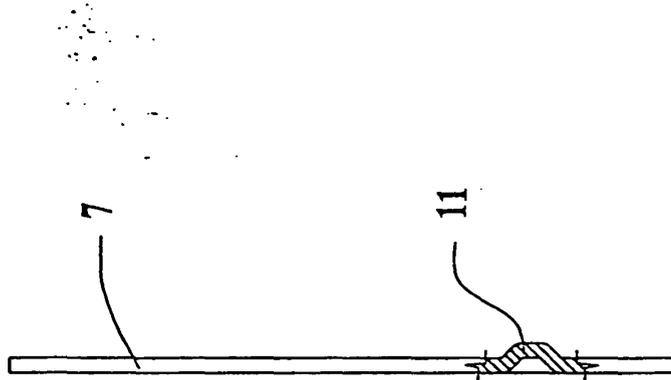



FIG.4

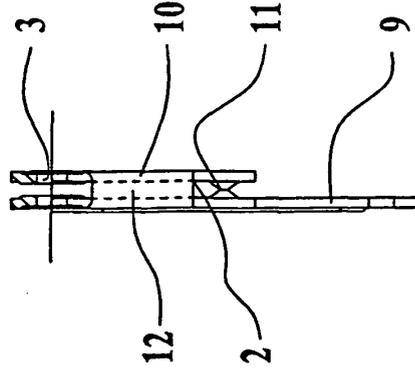


FIG.5

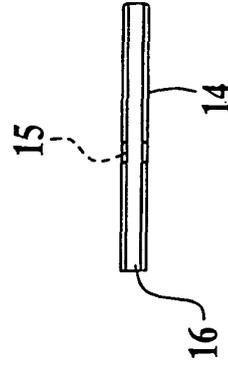


FIG.8

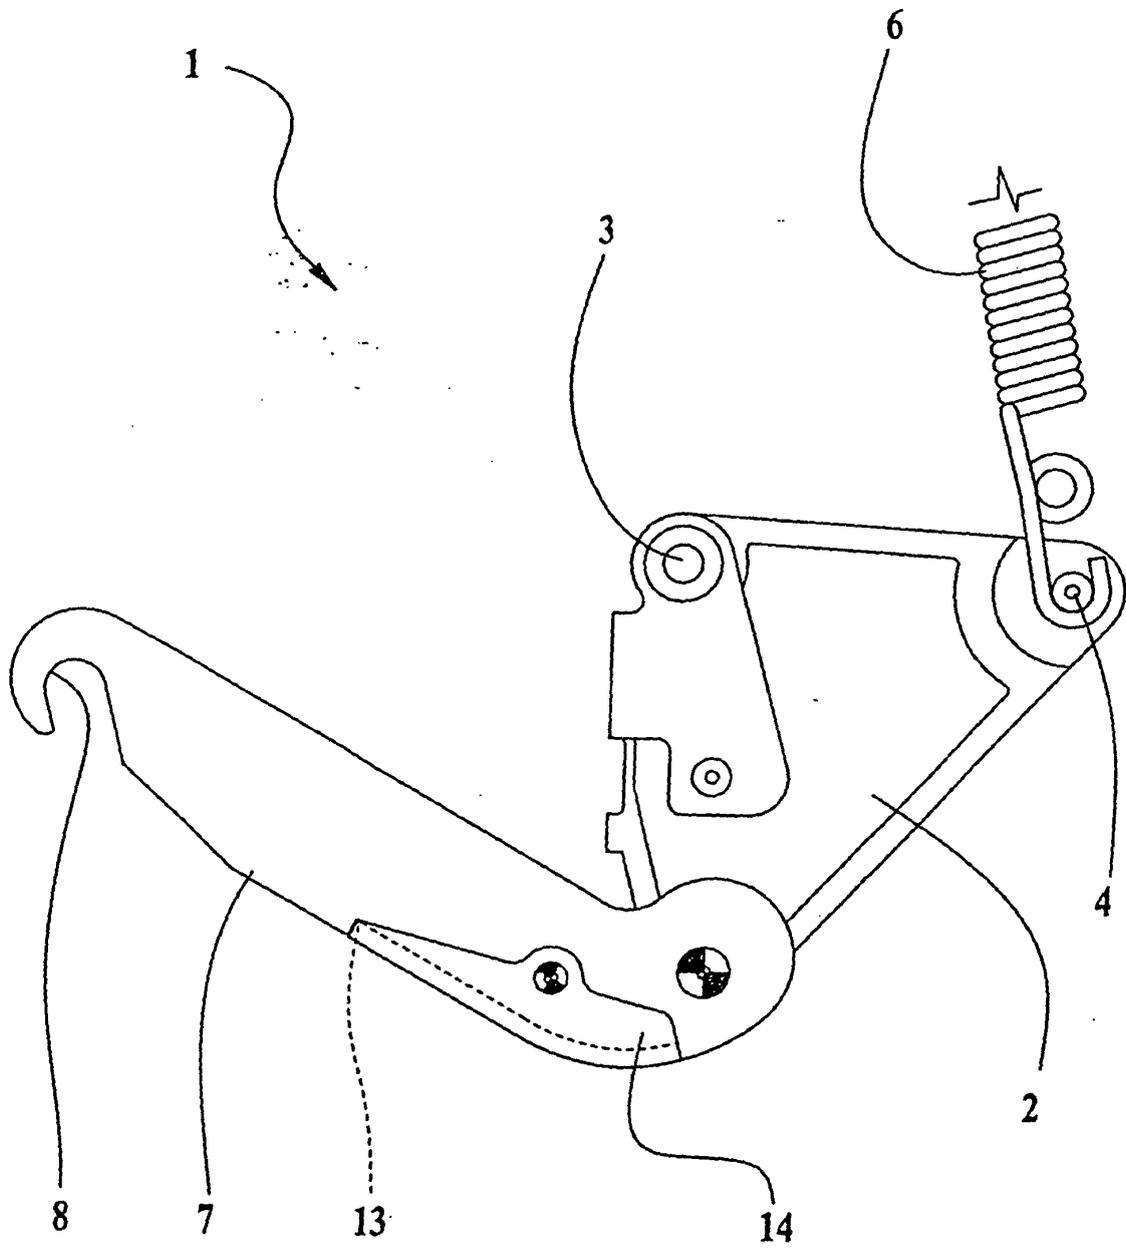


FIG.6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 03039322 A [0006]
- DE 8329611 [0006]
- US 4163344 A [0006]
- EP 1046314 A [0006]