

(12) UK Patent Application (19) GB (11) 2 352 254 (13) A

(43) Date of A Publication 24.01.2001

(21) Application No 0010387.9

(22) Date of Filing 02.05.2000

(30) Priority Data

(31) 9909989 (32) 30.04.1999 (33) GB

(31) 9910892 (32) 11.05.1999

(71) Applicant(s)

Anthony Donnellan
Maskells Farm House, Boxford Lane, BOXFORD,
Suffolk, CO10 5JY, United Kingdom

(72) Inventor(s)

Anthony Donnellan

(74) Agent and/or Address for Service

William Jones
Willow Lane House, Willow Lane, NORWICH, Norfolk,
NR2 1EU, United Kingdom

(51) INT CL⁷

E04F 13/08

(52) UK CL (Edition S)

E1D DLEKMSV D2121 D2132 D2134 D401

E1S SAB

(56) Documents Cited

GB 2279375 A

GB 2253878 A

GB 2228953 A

EP 0544604 A1

US 4233792 A

(58) Field of Search

UK CL (Edition R) **E1D DLEKH DLEKMCV DLEKMNW**

DLEKMNW DLEKMSV DLEKMSW DLEKN

INT CL⁷ **E04F , E04G**

ON - LINE: EPODOC, PAJ, WPI

(54) Abstract Title

Tiling aid

(57) A tiling aid comprises an elongate substantially flat strip 2 securable to a surface 4 and having a ridge 3 against which tiles may be aligned, and sized so as to be obscured from view following conventional grouting 6. The ridge may be castellated (Fig 8, not shown) to facilitate rolling up, or the strip 2 may be castellated for use with curved tile edges (Fig 3, not shown). Strip 2 may be supplied with adhesive covered by a peelable strip, or may be attached by screws or the like.

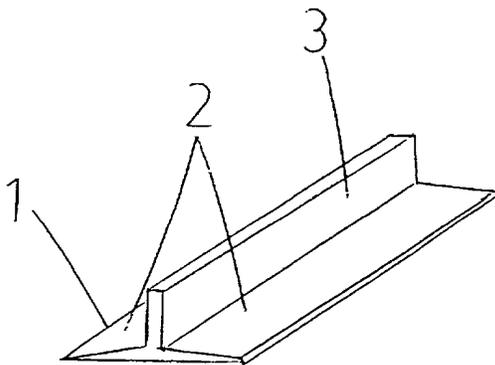


Fig 1

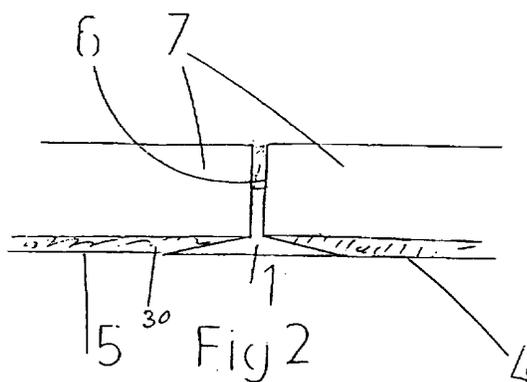


Fig 2

GB 2 352 254 A

1/4

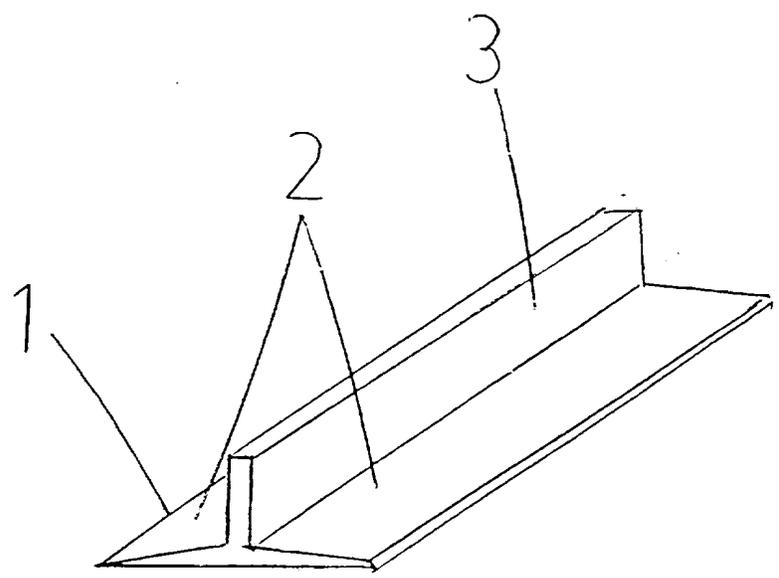


Fig 1

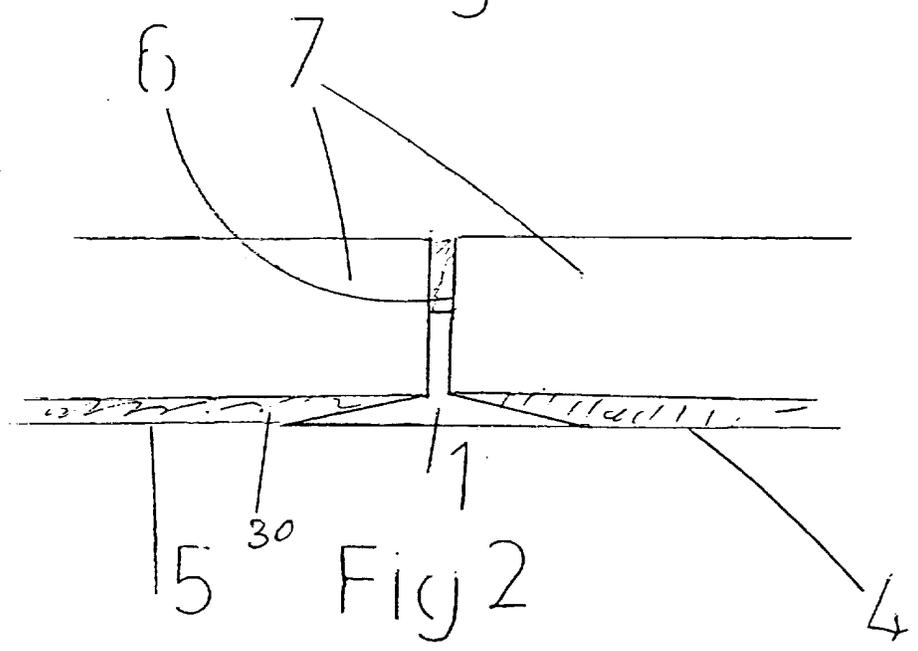


Fig 2

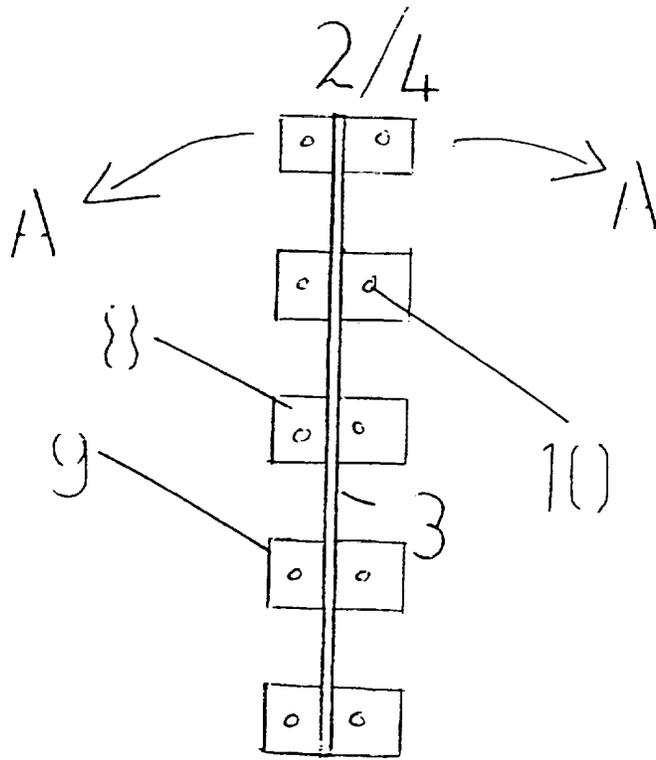


Fig 3






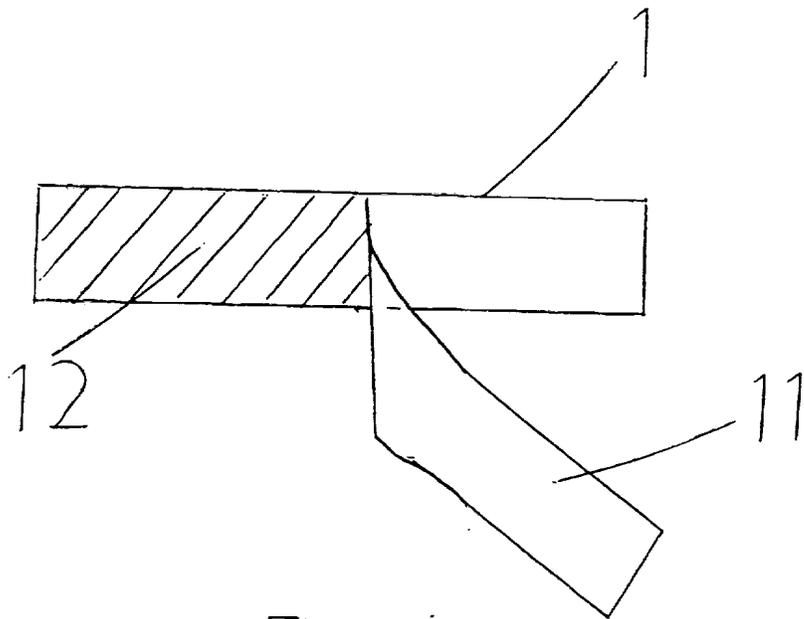


Fig 4

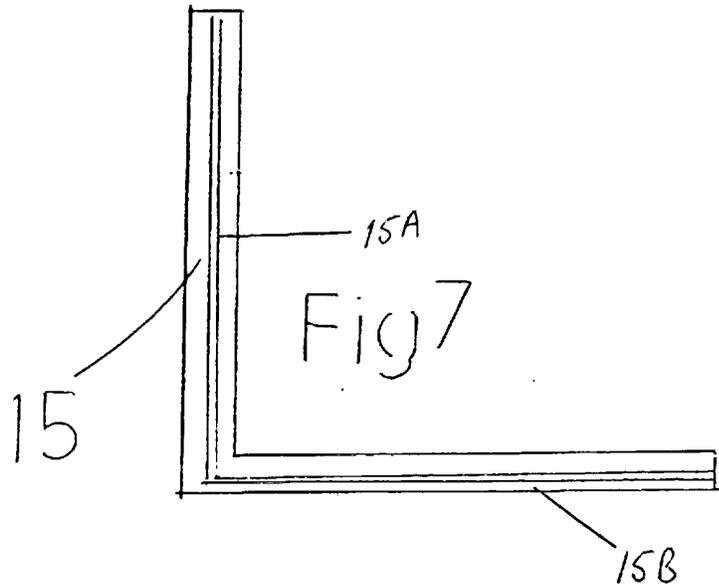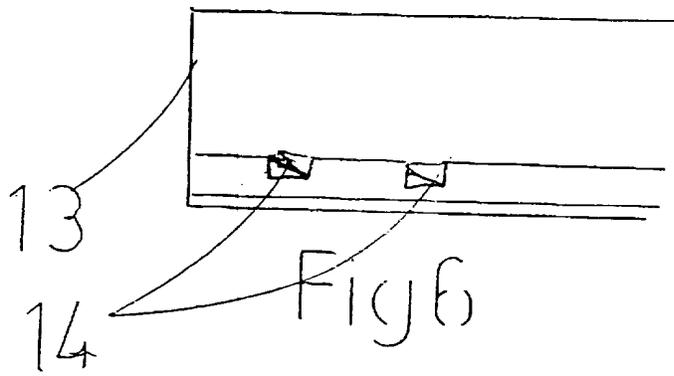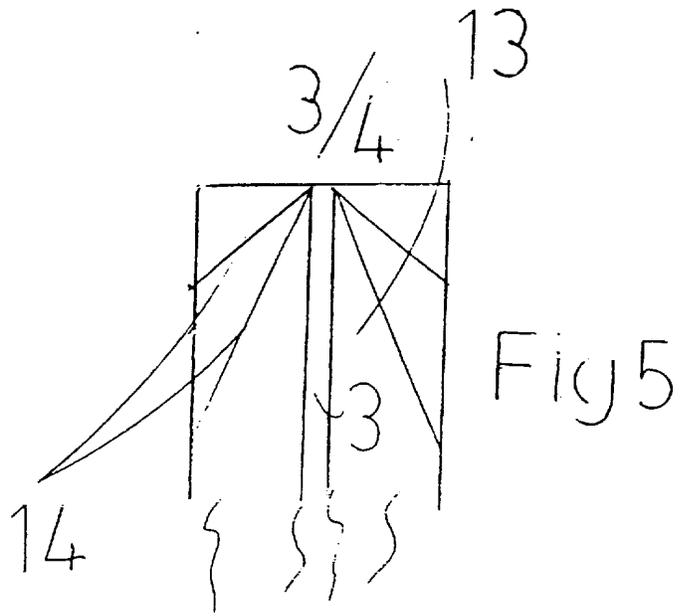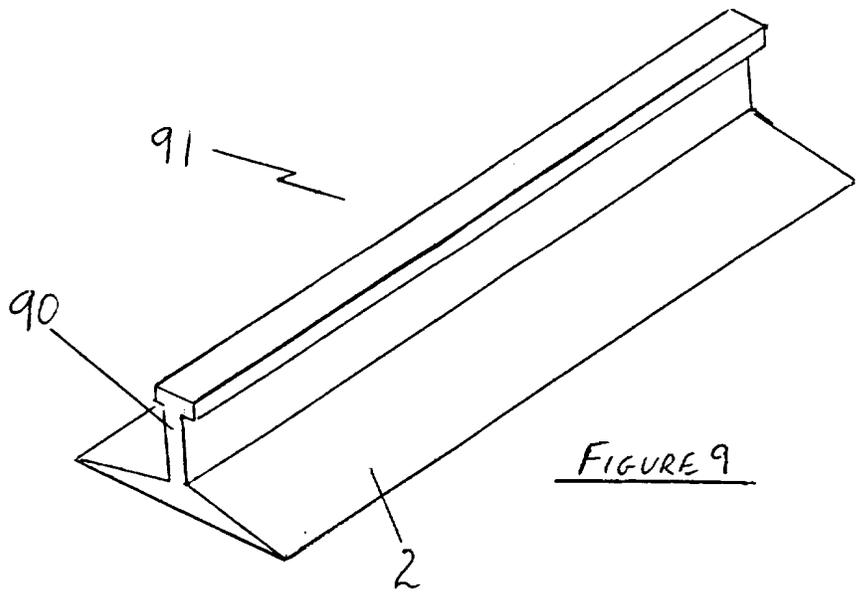

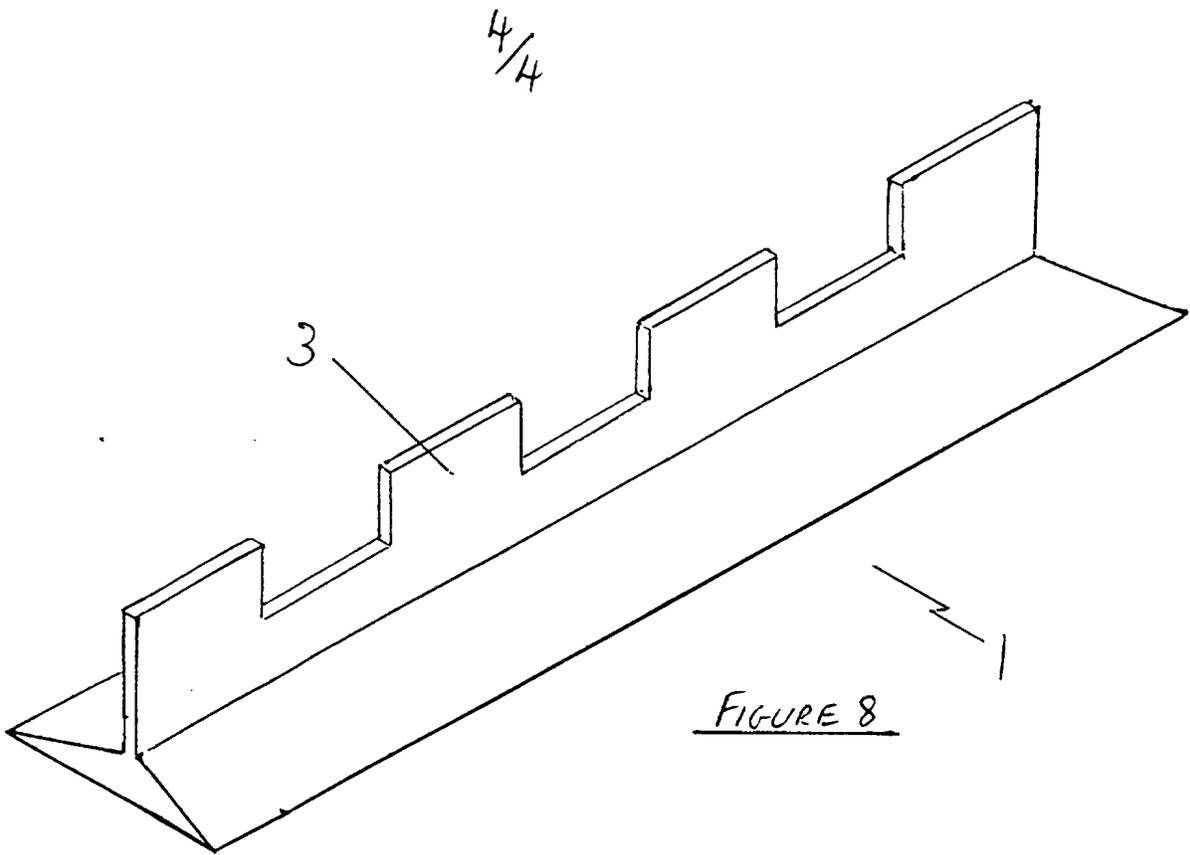

A TILING AID

Field of the Invention

5 The present invention relates to a tiling aid and in particular to a guide to ensure the correct alignment of tiles when tiling a surface. It further relates to an improved method of tiling a surface.

Background Art Known to the Applicant

10 When tiling a wall a D.I.Y. enthusiast or a professional tiler is normally faced with the problem of placing the first tile "square-on", that is ensuring that the edges of the tile are correctly aligned. For example, when tiling a wall using square tiles, this entails ensuring that the edges of the tile lie in a horizontal or a vertical plane.

15 Similarly, when tiling a floor or indeed any other tileable surface, the initial problem of orientation of the first tile will always arise. The problem cannot be overcome by simply placing the first tile in a corner of the surface to be covered as most corners in a building tend not to have perfect right angles. To start tiling from such a position would inevitably cause problems by the time the tiles had reached the diametrically opposite corner. Therefore D.I.Y. enthusiasts and professional tilers always start tiling away from a corner.

20 Solutions to the above problem have been proposed. For example, where an edge of the surface to be tiled is defined by a lip of a bath, it is usually assumed (sometimes incorrectly) that the bath has been correctly levelled. In this case the first row of tiles is simply "butt-up", that is an edge of the tile is aligned against

the lip of the bath. Plumb lines can also be used where there is no convenient horizontal or vertical marker. Where the surface to be tiled is a floor, then set squares can be used.

5 Nevertheless, if there is nothing against which each tile in a particular row or column can "butt-up". The problem may arise of a non-flush row or column of tiles being initially created. This causes any subsequent rows or columns of tiles which "butt-up" against the first row or column to also be non-flush leading to a finish that is not aesthetically pleasing.

10 In essence, the laying of the first tile and the first row or column of tiles is all important when tiling a surface and none of the conventional solutions associated with establishing this first tile and first row or column of tiles overcome the problems as outlined above. At best, the tiler spends an inordinate amount of time establishing this first row or column of tiles.

15 The present invention seeks to overcome the problems as outlined above and to provide a solution to this problem of benefit to the D.I.Y. enthusiast and expert alike.

Summary of the Invention

20 According to a first aspect of the present invention there is provided a tiling guide to aid the placement of tiles onto a surface, the guide having surface engaging means which enables the guide to be secured to a surface characterised in that the guide comprises tile abutment means to align the edge of a tile and one or more substantially flat elongate portions, each portion having a tile-engaging side and a surface-engaging side, the guide being so sized as to be completely obscured from view once the completed tiling has been conventionally grouted.

25 The tile abutment means conveniently comprises a ridge extending from the tile-engaging side. The ridge is advantageously located along the central longitudinal axis of the guide. Preferably, the ridge comprises one or more discontinuities along its length. Such an arrangement minimises the amount of material required to produce any one particular guide. The ridge particularly advantageously has a

castellated cross-section along its length, which allows the guide to be more easily rolled up for storage purposes. The ridge advantageously has a "T"-shaped cross-section in the plane perpendicular to its longitudinal axis, to allow grout to key into the guide.

5 In a preferred embodiment of the convention, the guide comprises two non-parallel elongate portions. The angle subtended between the two non-parallel elongate portions is conveniently selected from the group comprising 60°, 45°, 90° and 120°.

In a particularly preferred embodiment, the guide consists of one elongate portion.

10 Preferably, the or each end of the guide is provided with one or markings to enable the or each end to be cut away at a specific angle. In this manner other guides are able to contact the cut end at this particular angle.

15 Preferably, the fixing means comprises an adhesive along the surface engaging side of the guide. Prior to use, the adhesive is conveniently protected by a removable protective sheet.

The guide is preferably formed from a plastics material.

According to a second aspect of the present invention there is provided a method of tiling a surface comprising the steps of:

establishing a line on or adjacent the surface to be tiled;

20 securing a tiling guide of the type specified herein above to the surface using the established line to assist alignment of the guide;

applying adhesive to the surface to be tiled;

aligning one or more tiles along the guide;

tiling the remainder of the surface; and

applying grout to fill in the space between the tiles and obscure the guide from view,

whereby an initial tile or tiles having the correct alignment can be rapidly established from which initial tile or tiles subsequent tiles can be aligned.

5 Conveniently, the tile is aligned by abutment against an outwardly extending ridge located on the tiling guide.

Optionally, the second tiling guide is secured at an angle adjacent the tiling guide to enable two edges of a tile to be aligned.

10 The invention further includes within its scope a pack of tiles incorporating a tiling guide of the type specified above.

Brief Description of the Drawings

Preferred embodiments of the invention will now be more particularly described by way of example only, with reference to the accompanying sheets of drawings wherein:

15 Figure 1 is a perspective view of one embodiment of the present invention;

Figure 2 is an end view of the embodiment illustrated in Figure 1 in use, once the completed tiling has been conventionally grouted;

Figure 3 is a plan view of an alternative embodiment of the present invention that is capable of being fixed to a surface in a non-rectilinear manner;

20 Figure 4 illustrates the wall engaging surface of the embodiment illustrated in Figures 1 and 2 with the partial removal of a protective strip of material exposing an adhesive layer;

Figure 5 is a plan view of part of an alternative embodiment of the present invention;

Figure 6 is a side view of that which is shown in Figure 5 to emphasise the grooved cut-outs;

Figure 7 is a plan view of a further alternative embodiment of the present invention, having an integral 90° angle;

5 Figure 8 illustrates a further alternative embodiment of the present invention to emphasise a different type of cut-out; and

Figure 9 is a perspective view of a guide having a T-shaped ridge.

Description of the Preferred Embodiments

10 Throughout the specification, the use of the word “integral” is intended to cover not only something which is formed from the outset as one single-entity component, but also anything which, whilst being assembled from a plurality of initially separate independent integers, ends up as a single and normally non-demountable structure.

15 Figure 1 illustrates a tiling guide to aid the fitment of tiles on to a surface and is generally referenced 1. The guide comprises an elongate substantially flat strip whose in-use outer surface 2 is slightly bevelled and angled away from the lower surface. The centre of the guide 1 is provided with an integral ridge 3 located on the outer surface 2 of the guide 1 and continuous along its length. The top surface of the ridge 3 is substantially parallel to the lower surface of the strip throughout
20 its entire length.

25 Figure 2 shows the guide 1 in use on a surface 5 when tiles 7 are applied, the tiles 7 being held to the surface 5 by a layer of adhesive 30. The ridge 3 is of sufficient dimensions to enable an edge of a tile 7 to “butt-up” against it without the ridge 3 deforming in any noticeable fashion. The height of the ridge 3 is approximately half the height of the thickness of the tile 7. Conventional grout 6 fills in the remaining gap between the top of the tiles 7 and covers the top of the ridge 3 such that the grout 6 completely obscures from view, the tile guide 1.

In an alternative embodiment, illustrated in Figure 3 and generally referenced 9 the elongate flat strip has a series of cut-outs along its length. The remaining sections 8 of the strip have fixing holes 10 to enable the guide 1 to be screwed or hammered on to a surface. The cut-outs enable a degree of flexibility in the direction denoted by the arrows "A" when securing the guide 1 to a surface 5. Therefore, the ridge 3 need not necessarily be in the form of a substantially rectilinear surface against which a tile can butt-up but can be bent to allow for curved tiles (or tiles cut into the curved shape) to fit the curved ridge 3 created.

Figure 4 illustrates another means of fixing the guide 1 to a surface 5 prior to the tiling of the surface 5. In Figure 4, the substantially flat elongate strip has a peelable strip of paper 11 of the type generally known *per se* which can be removed from the guide 1 to expose a pre-gummed or otherwise pre-glued surface 12 to enable the guide 1 to be stuck to the surface 5. This obviates the need for a plurality of counter-sunk apertures running the length of the guide 1, either side of the ridge 3, and as illustrated in Figure 3.

Figures 5 and 6 illustrate part of a further alternative embodiment generally referenced 13, wherein at least one end of the guide 1 is provided with markings. In this case the markings comprise a series of straight grooves 14 set at specific angles to the longitudinal axis of the ridge 3, most notably 45° and 60°. Placing a cutting implement, for example a StanleyTM knife, hacksaw blade etc. along the grooves 14 and sawing along the grooves 14 will result in a new, cut guide 1, that can be placed adjacent or in otherwise contiguous contact with another guide 1 (cut or uncut), to enable tiles cut at the angle subtended by the two guides 1, 1 to be slid and "butted-up" into place.

In Figure 7 the integral guide 15 has two non-parallel portions 15A, 15B the angle between portions 15A, 15B being 90°.

Alternative non-illustrated embodiments of the present invention will now be described which do not depart from the scope of the present invention. The ridge 3 need not necessarily be continuous or substantially parallel throughout its length. The ridge 3 could be provided with a number of cut-outs that could for example, result in a sloping top edge, or a curved or fluted top edge.

5 The angled outer surface 2 of the guide 1 as shown in Figure 1, is so angled to allow grout 6 to occupy as much of the outer surface 2 of the guide 1 as possible (see Figure 2). Alternatively, the outer surface 2 could be provided with a number of ribbed or grooved cut-outs running along the longitudinal length of the guide 1 to enable grout 6 to key-in to the guide 1.

10 The edge of the ridge 3 against which the tile 7 “butts-up” need not necessarily be flat as illustrated in the Figures and could also incorporate a number of ribbed or grooved cut-outs to aid the keying in of grout 6. In one embodiment, the ridge 3, when seen end on (as illustrated in Figure 2) has a “T” shaped cross-section which enables grout 6 to fill the gaps separating the head of the “T” from the stem of the “T”.

15 The angle subtended by the guide 1 in Figure 7 need not necessarily be 90° and could for example be selected from the group comprising 60° , 45° , 90° and/or 120° . Furthermore, these angles could also apply to the grooves 14 illustrated in Figure 5. This enables a non-integral pair of guides 1 to achieve the same end result as the integral guide generally referenced 15 having two elongate portions 16A, 16B at right angles to each or the end illustrated in Figure 7, i.e. that of a fixed angle.

20 When using a guide of the type herein described, a plumb-line can initially be used to establish a straight line on a wall. The guide can then be secured to the wall using the plumb-line as a guide and tiling commenced in the manner described herein. Alternatively, the plumb-line can be used to cast a shadow on the wall and a vertical line drawn with a pencil on to the wall to help the placement of the guide. A set square can be used in a similar manner when tiling a floor.

25 For the avoidance of doubt, the term grouting is intended to include conventional grouting and “in-fill” with sand/dirt brushed into place with a broom for patio type tiling as demonstrated by the “ground-force” team on BBC television. Similarly a tile is intended to include paving slabs.

30 Furthermore, in alternative embodiments, the upper in use surface of the ridge 3

could also be ribbed or otherwise provided with a number of cut outs to also aid the keying in of the grout 6. As shown in Figure 9 the ridge 90 of the guide 91 can have a "T"-shaped cross-section to enable the grout to key in. The angle subtended by the outer surface 2 with the surface being tiled is typically 2-10°.

5 In further alternative embodiments not illustrated, the guide 1 can be provided with a pair of parallel grooved cut-outs running the length of the guide 1 and located on either side of the ridge 3. Each respective one of the pair of grooved cut-outs is located adjacent the ridge 3 so that once the tile has been positioned against the ridge 3, the ridge 3 can be cut away with the aid of a sharp knife by
10 simply running the sharp knife down the longitudinal axis of the guide 1 along the length of the cut-out adjacent the ridge 3.

The guide 1 can be made from plastics material, preferably a thermoplastic plastics material and may be formed into the required shape by extrusion from a mould. As an alternative to, or in addition to cut-outs or indentations, the plastics
15 material from which the guide is formed can be sufficiently pliable so that the guide 1 can be curved in the plane of the surface covered so that curved tiles may be more easily placed.

The pliability of the guide 1 can be such that when it is not in use, e.g. packed for sale, the guide 1 could be rolled up into a spiral, the axis of the spiral being
20 perpendicular to the longitudinal axis of the guide.

In order to assist rolling-up of the guide along its longitudinal axis, the ridge 3 of a guide 1 may comprise a number of cut-outs or indentations. An example of this is shown in Figure 8 where the ridge 3 has a castellated appearance. When the strip of material is rolled up onto a spiral, the indentations reduce the stress along
25 the ridge 3 which would otherwise resist the rolling process and/or cause plastic flow and hence deformation of the ridge 3.

Such a spiral of material could be sold in conventional see-through plastics cartons, or sold with boxes of tiles as an additional feature. Furthermore, as an alternative to the provision of the guides 1 in rolled up spirals, they can be sold in
30 very short lengths, each respective end of each respective length being provided

with a male-female interference type fit so that each respective length can be “clipped” together to form one long strip.

5 It will of course be understood that the invention is not limited to these specific details described herein, which are given by way of example only, and that various modifications and alterations are possible within the scope of the appended claims.

CLAIMS

1. A tiling guide to aid the placement of tiles onto a surface, the guide comprising surface-engaging means which enable the guide to be secured to the surface and characterised in that the guide comprises one or more substantially flat elongate portions each portion having a tile engaging side and a surface engaging side, the guide further comprising tile abutment means to align the edge of a tile, the guide being so sized as to be completely obscured from view once the completed tiling has been conventionally grouted.
5
2. A tiling guide according to Claim 1 characterised in that the tile abutment means comprises a ridge extending away from the tile engaging side.
10
3. A tiling guide according to Claim 2 characterised in that the ridge is located along the central longitudinal axis of the tiling guide.
4. A tiling guide according to either of Claims 2 or 3 characterised in that the ridge comprises one or more cut-outs.
15
5. A tiling guide according to Claim 4 characterised in that the ridge has a castellated cross-section parallel to its longitudinal axis.
6. A tiling guide according to any of Claims 2 to 5 characterised in that the ridge has a T-shaped cross-section 91 the T-shape allowing the grout to key into the guide.
20
7. A tiling guide according to any preceding claim characterised in that the guide comprises two non-parallel substantially flat elongate portions.
8. A tiling guide according to Claim 7 characterised in that the angle between the two non-parallel substantially flat elongate portions is selected from the group comprising 60°, 45°, 90° and 120°.
25

9. A tiling guide according to Claims 1 to 5 characterised in that the guide comprises a single elongate portion.
- 5 10. A tiling guide according to any preceding claim characterised in that the or each end of the guide is provided with one or more markings to enable the or each end to be cut away at a specific angle.
11. A tiling guide according to any preceding claims characterised in that the surface-engaging means comprises an adhesive along the surface-engaging side of the guide.
- 10 12. A tiling guide according to Claim 11 characterised in that prior to use of the guide the adhesive is protected by a removable sheet.
13. A tiling guide according to any preceding claims characterised in that the or each elongate portion comprises a number of cut outs along the or each edge to enable the guide to bent into a desired curved shape.
- 15 14. A tiling guide according to any preceding claim characterised in that the tile engaging side of the guide is roughened by means of scratches or grooves.
15. A tiling guide according to any preceding claim characterised in that the tile engaging side subtends an angle of from 2 to 10° with the surface.
- 20 16. A tiling guide substantially as herein described with reference to as and illustrated in the accompanying drawings.
17. A method of tiling comprising the steps of :

establishing a line on or adjacent the surface to be tiled;

securing a tiling guide of the type specified herein above to the surface using the established line to assist alignment of the guide;

applying adhesive to the surface to be tiled;

aligning one or more tiles along the guide;

tiling the remainder of the surface; and

applying grout to fill in the space between the tiles and obscure the guide from view.

5

18. A method of tiling according to Claim 17 characterised in that, the tile is aligned by abutment against an outwardly extending ridge located on the tiling guide.

10

19. A method of tiling according to either of Claims 17 or 18 characterised in that a second tiling guide is secured at an angle, adjacent the tiling guide to enable two edges of a tile to be aligned.

20. A pack of tiles incorporating a tiling guide of the type defined in Claim 1.

15



INVESTOR IN PEOPLE

Application No: GB 0010387.9
Claims searched: 1 - 20

Examiner: J D Cantrell
Date of search: 13 November 2000

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK Cl (Ed.R): E1D: DLEKH, DLEKMNV, DLEKMCV, DLEKMSV, DLEKMSW, DLEKMNW, DLEKN EIS: SAB, SAD
Int Cl (Ed.7): E04F E04G
Other: ON - LINE: EPODOC, PAJ, WPI

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	GB 2279375 A WILLIAMS	1 - 5, 7 - 9, 17, 19
X	GB 2228953 A APPLEBY	1 - 3, 9
Y	GB 2253878 A WILDMAN	11, 12
X, Y	EP 0544604 A1 FUKUVI	1-3, 7, 8, 17, 19 Y: 11, 12
X, Y	US 4233792 MALAVASI	1 - 3, 7, 8, 17, 19 Y: 11, 12

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.