



(51) International Patent Classification:

Not classified

(21) International Application Number:

PCT/IB2020/000437

(22) International Filing Date:

13 February 2020 (13.02.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16/280,364	20 February 2019 (20.02.2019)	US
62/902,471	19 September 2019 (19.09.2019)	US
16/686,955	18 November 2019 (18.11.2019)	US
62/939,341	22 November 2019 (22.11.2019)	US
16/698,858	27 November 2019 (27.11.2019)	US

(71) Applicant: STANG TECHNOLOGIES LTD. [CA/CA];
P.O. Box 598, Macklin, Saskatchewan, SOL 2C0 (CA).

(72) Inventors: STANG, Jonathan, M.; P.O. Box 598, Macklin, SK S0L 2C0 (CA). MAGNER, Daryl, E.; 9731 W. 57th Place, Arvada, CO 80002 (US).

(74) Agent: DEETH WILLIAMS WALL LLP; 150 York Street, Suite 400, Toronto, Ontario M5H 3S5 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

(54) Title: APPARATUS AND METHOD FOR ABRASIVE PERFORATING AND CLEAN-OUT

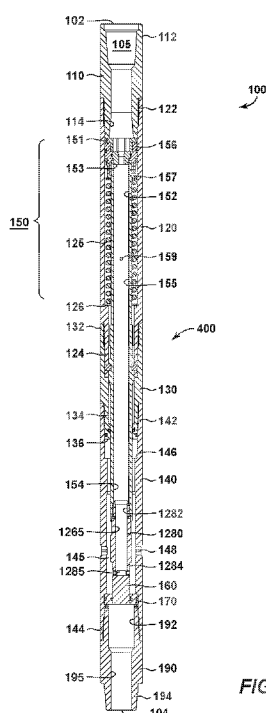


FIG. 12A

(57) Abstract: A perforating tool and method of use in a wellbore. The perforating tool is placed at the end of a coiled tubing or other conveyance string. The perforating tool comprises a tubular housing providing an elongated bore through which fluid flows. The tubular housing has jetting ports used for hydraulic perforating. The tool is configured to operate in a flowthrough mode when working fluid is pumped into the tubular housing at a first flow rate, with all of the fluid flowing through the end of the tool. The perforating tool is further configured to operate in a perforating mode when the working fluid is pumped into the bore of the tubular housing at a second flow rate. In this mode, all of the working fluid flows through the jetting ports. In an embodiment, the perforating tool includes a sequencing mechanism responsive to a sequence of flow rates to cycle the tool through operating modes.

Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

APPARATUS AND METHOD FOR ABRASIVE PERFORATING AND CLEAN-OUT

BACKGROUND OF THE INVENTION

[0001] This section is intended to introduce selected aspects of the art, which may be associated with various embodiments of the present disclosure. This discussion is believed to assist in providing a framework to facilitate a better understanding of particular aspects of the present disclosure. Accordingly, it should be understood that this section should be read in this light, and not necessarily as admissions of prior art.

Field of the Invention

[0002] The present disclosure relates to the field of hydrocarbon recovery operations. More specifically, the invention relates to wellbore completions and remediation operations. Further still, the invention relates to a tool that may be connected to a string of coiled tubing (or other working string) and used for wellbore clean-out.

Discussion of Technology

[0003] During the course of a well operation, it is sometimes desirable to clean out the wellbore. For example, after a well is completed and before a string of production tubing is hung, the operator may wish to run a clean-out tool down the hole to circulate out cement chips, sand, and other debris. In addition, it is sometimes desirable to clean out a producing well that has become filled with sand. Such incidents may occur because the well is producing from an unconsolidated formation, or due to a poorly designed fracturing operation.

[0004] In either of these instances, a simple nozzle may be run into a wellbore at the end of a coiled tubing string. A coiled tubing connector may be used to connect the coiled tubing string with the nozzle. An aqueous circulating fluid is pumped down the working string, through the nozzle and then up the back side (or annulus) of the working string. Preferably, a

surfactant, an acid or other chemical is injected down the coiled tubing string following the aqueous circulating fluid as part of the clean-out.

[0005] A separate type of tool that also involves circulating fluid down a working string is an abrasive perforating tool. Abrasive perforating tools utilize custom lateral jetting ports that allow a fluid containing abrasive particles, e.g., sand, to be pumped downhole through the working string at high pressures and then out of the jetting ports. The abrasive fluid erodes through the surrounding casing at a designated depth, then through the cement and out into the surrounding rock formation. This is an alternative to explosive charge perforating and the use of detonators and gun barrels.

[0006] Some abrasive perforating tools frequently offer a clean-out function using reverse circulation. In one aspect, an abrasive perforating tool may be part of a bottom hole assembly containing a reverse ball check valve. The BHA components include a CT connector, a disconnect, a stabilizer, an abrasive cutting sub having at least one jetting nozzle, the reverse ball check valve, and then the nozzle. A schematic view of such a device is shown in Figure 1 of U.S. Patent No. 9,115,558.

[0007] The reverse ball check valve of the '558 patent includes a pin and a ball. When fluid is pumped down the coiled tubing, the reverse ball check valve is forced closed, preventing fluid from exiting the nozzle at the bottom of the BHA. Fluid is then directed through the lateral jetting ports for hydraulic perforating. Subsequently, when sand or other particulates are required to be cleaned out, a "reverse clean-out" procedure is conducted.

[0008] To perform the reverse clean-out, an aqueous fluid is injected down the back side of the coiled tubing. The fluid is pumped downhole where it then flows back up the BHA, through the reverse ball check valve, through the bore of the coiled tubing string and to the surface. The fluid returns will include the abrasive fluid used in the perforating process. A somewhat schematic reverse clean-out flow for a BHA having a known reverse ball check valve is shown in Figure 2 of the same '558 patent.

[0009] As described in greater detail in the '558 patent, the use of reverse flow clean-out valves is often impractical in connection with horizontal wellbores. This is because of the significant likelihood of fill material gathering around the outer diameter of the BHA during the reverse circulation phase. In this respect, the BHA cannot take advantage of gravity to bring the fill material down to the nozzle as is present in a vertical well. Depending on the size of the wellbore, the length of the horizontal leg of the well and the cleanout medium used, the annular velocity (governed by gauge pressure at the surface) likely will not be high enough to sweep the entire fill to the end of the bottom hole assembly.

[0010] Due to this limitation, the '558 patent disclosed a novel abrasive perforating tool capable of being cycled during pumping operations to provide clean-out. This allows for a multi-cycle adjustment of tool function carried out by manipulating pumping rates. The '558 patent is incorporated herein in its entirety by reference.

[0011] The abrasive perforating tool of the '558 patent utilizes a plunger that is moved up and down in response to pumping rates applied at the surface. Depending on the pumping mode, the tool operates in either a flow-through mode where the plunger resides above a seat, or a perforating mode, where the plunger lands on the seat. In the flow-through mode, working fluids are circulated around the plunger, through the seat, and then back up the wellbore along the back side of the coiled tubing string. In the perforating mode, all fluids are forced through lateral nozzles and are directed against the surrounding casing. Beneficially, fluids can be pumped down the bore of the working string and through an end nozzle in the same direction for both abrasive perforating and for clean-out, using a cycling mechanism.

[0012] A need exists for an improved abrasive perforating tool that operates with a similar cycling mechanism for wellbore clean-out, but wherein a feature is provided to ensure that circulating fluids do not exit the tool through the lateral nozzles while the tool is in its flow-through mode. Stated another way, a need exists for a multi-cycle wellbore perforating tool that does not offer, as an option, split flow. A need further exists for a method of cleaning out a well, wherein a positive displacement motor is disposed below a perforating tool, with the

motor taking advantage of a full flow of fluids moving through the seat during a flow-through mode.

SUMMARY OF THE INVENTION

[0013] An abrasive perforating tool for controlling a direction of an injected fluid within a wellbore is first provided herein. The perforating tool is configured to cycle between a flow-through mode wherein all fluid is pumped under pressure through the tool and then circulated back up to the surface on the back side of the tool, and a perforating mode wherein an abrasive fluid is pumped under pressure into the tool and through lateral jetting ports to cut or “perforate” a surrounding casing string.

[0014] The perforating tool first includes a tubular housing. The tubular housing defines a series of tubular bodies threadedly connected end-to-end. The tubular housing provides an elongated bore through which fluid may flow. The tubular housing includes one or more jetting ports disposed there along. The jetting ports are designed to receive the abrasive fluid when the tool is in a perforating mode.

[0015] The perforating tool also includes a piston. The piston defines a short cylindrical body that is disposed at an upstream end of the housing. The piston has an orifice configured to deliver fluids from a wellbore conveyance tubing to the elongated bore of the housing. Of interest, the piston forms a pressure shoulder as fluids are injected through the conveyance tubing.

[0016] The perforating tool additionally includes a tubular mandrel. The tubular mandrel is slidably positioned within the housing. The mandrel has a proximal end connected to or otherwise acted upon by the piston, and a distal end comprising a plunger. In one embodiment, the plunger is a separate body threadedly connected to the distal end of the mandrel.

[0017] As part of the tubular housing, The perforating tool may comprise a spring housing. The spring housing has an internal shoulder that supports a spring. An upper end

of the spring acts against the piston, biasing the piston and connected mandrel in the raised position. This is a flow-through mode.

[0018] The perforating tool further includes a seat. The seat is disposed along the tubular housing below the distal end of the tubular mandrel. The seat is dimensioned to receive the plunger when the piston and connected tubular mandrel slide from a raised position to a lowered position along the tubular housing. Of interest, the seat provides a central flow-through opening through which fluids flow when the tool is in its flow-through mode.

[0019] Preferably, the tubular housing further includes an upper sub having a first upper end and a second lower end, wherein the lower end is threadedly connected to an upper end of the spring housing. Preferably, the tubular housing also includes a lower sub having a first upper end and a lower end, with the lower end being threadedly connected to a downhole rotary tool.

[0020] In one aspect, the wellbore clean-out tool further comprises:

- an annular region formed between the mandrel and the surrounding tubular housing;

- one or more slots residing along the mandrel;

- one or more flow ports also residing along the mandrel, but below the slots;

- an upper seal residing along an inner diameter of the tubular housing; and

- a separate lower seal also residing along the inner diameter of the tubular housing, wherein the upper and lower seals straddle the jetting ports.

[0021] When the perforating tool is in its raised position, pumped fluid exits the mandrel through the flow ports, but the lower seal prevents the pumped fluid from flowing all the way up the annular region and to the jetting ports, thereby forcing all of the fluid to flow around the plunger and through the seat. Reciprocally, when the perforating tool is in its lowered position, abrasive fluid exits the mandrel through the slots, with the abrasive fluid being confined by the upper and lower seals to flow through the jetting ports.

[0022] The perforating tool is configured to cycle a position of the mandrel and connected plunger in response to fluid pumping rate into the wellbore. Preferably, the tool is configured to cycle between two operating modes – a flow-through (or a clean-out) mode and a perforating mode. All fluid flows through the flow-through opening in the seat when the mandrel and connected plunger are in the raised position, which is the flow-through mode. Reciprocally, all fluid flows through the jetting ports when the mandrel and connected plunger are in the lowered position, which is the abrasive perforating position.

[0023] In one embodiment, a positive displacement motor is disposed below the tubular housing as the rotary tool. The positive displacement motor is operatively connected to the lower sub at its distal end. The positive displacement motor, in turn, is connected to a milling tool or a drill bit.

[0024] In the flow-through mode, fluid is pumped into the bore of the tubular housing at a first flow rate. In this mode, all of the pumped fluid flows into the mandrel, through flow ports located along the mandrel, around the plunger, and then through the flow-through opening in the seat.

[0025] In the perforating mode, the fluid is pumped into the bore of the tubular housing at a second higher flow rate. In this mode, all of the pumped fluid flows into the mandrel, through the slots located along the mandrel, and then through the jetting ports. In this instance, the pumped fluid is preferably mixed with sand, forming an abrasive perforating fluid.

[0026] In the preferred embodiment, the mandrel and connected plunger remain in a raised position during run-in. The plunger is maintained a sufficient distance above the seat to permit fluid to travel through the flow ports in the mandrel and through the seat below. Once the pump rate is raised to an activation rate (referred to in some instances herein as the “second flow rate”), the plunger is lowered onto the seat, providing for the perforating mode. The upper and lower seals serve to direct flow in the two modes, ensuring that there is no split flow.

[0027] To facilitate the cycling of injection modes, the abrasive perforating tool may also include a sequencing mechanism. The sequencing mechanism is responsive to a sequence of pump rates applied above the piston. In one aspect, the sequencing mechanism comprises a cylindrical body configured to cycle the mandrel between its flow-through mode (wherein all fluid flows through the seat at the end of the tool) and its perforating mode (wherein all fluid is directed laterally through the jetting ports). In one aspect, an intermediate position is provided wherein the mandrel and connected plunger reside between the raised position and the lowered position but the mandrel remains in its flow-through mode.

[0028] Preferably, the sequencing mechanism is a J-slot sequencing mechanism. The J-slot mechanism will cooperate with one or perhaps two pins that are disposed along the tubular housing as a J-slot collar. The pins are configured to ride in slots along the J-slot mechanism to cycle the mandrel and connected plunger between the raised position and the lowered position. In this instance, the pins are fixed from axial movement and ride in the slots of the J-slot channel of the mandrel to restrict axial movement of the mandrel on alternating downward strokes.

[0029] A method of operating an abrasive perforating tool in a wellbore is also provided. The method first includes running a multi-cycle perforating tool into the wellbore. The perforating tool is run in on a lower end of a string of coiled tubing. The perforating tool is arranged in accordance with the perforating tool as described above, in any of its embodiments.

[0030] The method additionally includes locating the perforating tool at a selected depth along the wellbore. In one aspect, the wellbore has been completed with a string of production tubing. In this instance, the perforating tool is run into the production tubing in order to clean out fill that may have accumulated within the production tubing and casing. More preferably, the perforating tool is run into production casing during well completion, enabling the tool to both mill out plugs or clean out wellbore debris, and perforate casing. It is observed that the tool is particularly suited for clean-out operations or tool setting operations along a horizontal section of a wellbore.

[0031] The method further includes pumping a working fluid down the coiled tubing and into the bore of the tubular housing. This injection is done at a first flow rate. This injection causes the pumped fluid to flow through the bore of the tubular housing, out of the mandrel through radial flow ports and into the annular area, around the plunger, and then through the flow-through opening in the seat. In other words, the pumped fluid flows entirely through the end of the tool. This is a flow-through mode.

[0032] The method also includes further pumping the working fluid down the coiled tubing and into the bore of the tubular housing at a second flow rate. Here, the second flow rate is higher than the first flow rate. This increases a hydraulic force acting on the pressure shoulder of the piston, and causes the mandrel and connected plunger to slide downward along the tubular housing.

[0033] As the mandrel and connected plunger move down the tubular housing, the plunger will land on the seat, sealing flow through the flow-through opening. In this position, the fluid will flow down the mandrel, through slots in the mandrel and into the annular area, and then through the lateral jetting ports. This is a perforating mode. Of interest, in this position the upper and lower seals confine the fluid so that all working fluid exits the tool through the lateral jetting ports. In this mode, the pumped fluid will likely include sand.

[0034] In one aspect, the perforating tool employs a sequencing mechanism to cycle the tool between positions. Preferably, the sequencing mechanism is a so-called J-slot mechanism. In one aspect, the J-slot mechanism has slots that cycle the plunger between the flow-through mode and the perforating mode. Specifically, the J-slot mechanism is configured to:

- (i) maintain the perforating tool in its raised position while pumping at or below the first pump rate, placing the perforating tool in its flow-through mode wherein all of the pumped fluid flows through the bottom of the tool;
- (ii) maintain the perforating tool in an intermediate position while increasing pump rate above the first pump rate (which may meet or exceed a second pump rate),

and wherein all of the pumped fluid continues to flow through the mandrel and out of the bottom of the tool;

(iii) upon dropping the pump rate back down to or below the first pump rate, allowing the spring to move the perforating tool back to its raised position, which again is the flow-through mode;

(iv) upon raising the pump rate to a rate that meets or exceeds the second pump rate, move the perforating tool to its lowered position, placing the perforating tool in its perforating mode wherein all pumped fluid is forced through the lateral jetting nozzles; and

(v) repeat the cycle of steps (i) through (iv), such as at a different depth.

[0035] A second embodiment of a perforating tool is also provided herein. The perforating tool is again used for controlling a direction of a working fluid within a wellbore, with the wellbore having been lined with a string of production casing. In this embodiment, the perforating tool comprises:

a tubular housing providing an elongated bore through which fluids may be injected, the tubular housing having one or more lateral jetting ports;

a piston disposed proximate an upstream end of the housing, the piston forming a pressure shoulder and having an orifice configured to deliver the working fluid from a wellbore conveyance tubing into the elongated bore of the housing;

a tubular mandrel slidably positioned within the housing, the mandrel having a proximal end connected to or acted upon by the piston, and a distal end forming a plunger;

one or more flow ports; and

a seat disposed along the tubular housing and having a through-opening, the through-opening being configured to slidably receive the plunger when the piston and connected mandrel slide from a raised position to a lowered position along the tubular housing.

[0036] In this arrangement, the perforating tool is configured to cycle a position of the mandrel and connected plunger in response to changes in fluid pumping rate into the conveyance tubing. The tool is biased to an abrasive perforating position such that (i) all working fluid flows through the flow ports in the mandrel and out of the lateral jetting ports in the tubular housing above the seat when the mandrel and connected plunger are in the raised position. In response to an increase in pump rate (ii) all working fluid flows through the flow ports and out of the tubular housing below the seat when the mandrel and connected plunger are in the lowered position.

[0037] The plunger comprises a solid body that is operatively connected to the distal end of the mandrel. Preferably, the perforating tool further comprises a stem wherein an upper end of the stem is threadedly connected to a lower end of the mandrel, and the plunger resides at a lower end of the stem. In this instance, the one or more flow ports comprises two or more flow ports radially disposed around the stem proximate to and above the plunger.

[0038] In one aspect, the tubular housing comprises a spring housing having an internal shoulder. The perforating tool then further comprises a spring residing within the spring housing, with an upper end of the spring acting against the piston, biasing the tool in its raised position.

[0039] In one arrangement, the tubular housing further comprises an upper sub having a first upper end and a second lower end, wherein the lower end is threadedly connected to an upper end of the spring housing, and a lower sub having a first upper end and a lower end, with the lower end being threadedly connected to a downhole tool. In this way, the perforating tool is part of a larger bottom hole assembly, or BHA.

Brief Description of the Drawings

[0040] So that the manner in which the present inventions can be better understood, certain illustrations, charts and/or flow charts are appended hereto. It is to be noted, however, that the drawings illustrate only selected embodiments of the inventions and are therefore not to be

considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

[0041] Figure 1A is a first cross-sectional view of a perforating tool (or “flow diverter”) of the present invention, in one embodiment. In this view, the perforating tool is in its run-in position. A plunger is in a raised position, allowing injected fluids to flow through a flow-through opening at the bottom of the tool.

[0042] Figure 1B is a second cross-sectional view of the perforating tool of Figure 1A. The perforating tool is again in its raised position, or flow-through mode. Here, a flow path of injected fluid is shown.

[0043] Figure 1C is a third cross-sectional view of the perforating tool of Figure 1A. Here, the perforating tool has been cycled to an intermediate position. In this position, the plunger has advanced partially down the tool, but all of the injected fluid continues to flow through the seat at the bottom of the tool.

[0044] Figure 2A is a cross-sectional view of the perforating tool of Figure 1A. Here, the tool has advanced to its lowered position. This is an abrasive perforating mode, with all of the injected fluids being diverted from the tool through lateral jetting ports.

[0045] Figure 2B is a second cross-sectional view of the perforating tool of Figure 2A. The perforating tool again is in its lowered position, or abrasive perforating mode. Here, a flow path of injected perforating fluid is shown.

[0046] Figure 3A is a perspective view of a positive displacement motor as may be placed below the perforating tool of Figures 1A and 2A.

[0047] Figure 3B is an example of a suitable sliding sleeve shifting tool that may be used as part of a bottom hole assembly with the perforating tool of Figures 1A and 2A.

[0048] Figure 3C is an example of a bridge plug that may be set, retrieved or drilled out using a bottom hole assembly that includes the perforating tool of Figures 1A and 2A.

[0049] Figure 3D is an example of an extended reach tool that may be used as part of a bottom hole assembly with the perforating tool of Figures 1A and 2A.

[0050] Figure 4A is a side view of a j-slot mechanism. In this view, pins are in a default position along the slots.

[0051] Figure 4B is another side view of the j-slot mechanism of Figure 4A. In this view, the pins have advanced along the channel and are in an intermediate position. To achieve this, a mandrel has been pushed down along a spring housing.

[0052] Figure 4C is another side view of the j-slot mechanism of Figure 4A. In this view, the pins have advanced along the channel to a second slot, allowing the mandrel to return to its default position of Figure 4A.

[0053] Figure 4D is still another side view of the j-slot mechanism of Figure 4A. In this view, the pins have advanced to a new slot along the channel, allowing the mandrel to move into its fully lowered position. In this position, the plunger lands on the seat per Figure 2A.

[0054] Figure 5A is side view of the mandrel of Figures 1A and 2A. So called J-slots are visible along the outer diameter of the mandrel. These are part of a sequencing mechanism.

[0055] Figure 5B is a cross-sectional view of the mandrel of Figure 5A. The view of the J-slots is retained in phantom.

[0056] Figure 6A is cross-sectional view of a J-slot collar, in one embodiment. The J-slot collar includes a pair of opposing pins that ride in the J-slots of Figure 5A. The J-slot collar is also part of the sequencing mechanism.

[0057] Figure 6B is a perspective view of the J-slot collar of Figure 6A.

[0058] Figure 7 is a cross-sectional view of the jetting port housing of Figures 1A and 2A. Jetting ports are visible in the body of the housing.

[0059] Figure 8A is a side view of the piston assembly of Figures 1A and 2A.

- [0060] Figure 8B is a cross-sectional view of the piston assembly of Figure 8A.
- [0061] Figure 8C is a perspective view of the piston assembly of Figure 8A.
- [0062] Figure 9A is a side view of the plunger of Figures 1A and 2A.
- [0063] Figure 9B is a cross-sectional view of the plunger of Figure 9A.
- [0064] Figure 9C is a perspective view of the plunger of Figure 9A.
- [0065] Figure 10 is a cross-sectional view of an illustrative wellbore. Here, the wellbore has received the perforating tool of Figures 1A and 2A.
- [0066] Figure 11 is a flow chart showing operational steps for controlling a flow of fluid through the perforating tool, in one arrangement.
- [0067] Figure 12A is a first cross-sectional view of a perforating tool (or “flow diverter”) of the present invention, in an alternate embodiment. In this view, the perforating tool is in its run-in position. This is an abrasive perforating mode, with all of the injected fluids being diverted from the tool through lateral jetting ports.
- [0068] Figure 12B is a second cross-sectional view of the perforating tool of Figure 12A. Here, the perforating tool has been cycled to an intermediate position. In this position, the plunger has advanced partially down the tool, but all of the injected fluid continues to flow through the lateral jetting ports.
- [0069] Figure 12C is a third cross-sectional view of the perforating tool of Figure 12A. Here, the tool has advanced to its lowered position. This is a flow-through mode where all of the injected fluid flows through a seat at the bottom of the tool.

Detailed Description of Certain Embodiments

Definitions

[0070] For purposes of the present application, it will be understood that the term “hydrocarbon” refers to an organic compound that includes primarily, if not exclusively, the elements hydrogen and carbon. Examples of hydrocarbon-containing materials include any form of oil, natural gas, coal, and bitumen that can be used as a fuel or upgraded into a fuel.

[0071] As used herein, the term “hydrocarbon fluids” refers to a hydrocarbon or mixtures of hydrocarbons that are gases or liquids. For example, hydrocarbon fluids may include a hydrocarbon or mixtures of hydrocarbons that are gases or liquids at formation conditions, at processing conditions, or at ambient condition.

[0072] As used herein, the terms “produced fluids,” “reservoir fluids” and “production fluids” refer to liquids and/or gases removed from a subsurface formation, including, for example, an organic-rich rock formation. Produced fluids may include both hydrocarbon fluids and non-hydrocarbon fluids. Production fluids may include, but are not limited to, oil, natural gas, pyrolyzed shale oil, synthesis gas, a pyrolysis product of coal, nitrogen, carbon dioxide, hydrogen sulfide and water.

[0073] As used herein, the term “fluid” generally refers to gases, liquids, and combinations of gases and liquids, as well as to combinations of gases and fines, combinations of liquids and fines, and combinations of gases, liquids, and fines.

[0074] As used herein, the term “wellbore fluids” means water, hydrocarbon fluids, formation fluids, or any other fluids that may be within a wellbore during a production operation.

[0075] As used herein, the term “formation” refers to any definable subsurface region regardless of size. The formation may contain one or more hydrocarbon-containing layers, one or more non-hydrocarbon containing layers, an overburden, and/or an underburden of any geologic formation. A formation can refer to a single set of related geologic strata of a specific

rock type, or to a set of geologic strata of different rock types that contribute to or are encountered in, for example, without limitation, (i) the creation, generation and/or entrapment of hydrocarbons or minerals, and (ii) the execution of processes used to extract hydrocarbons or minerals from the subsurface region.

[0076] As used herein, the term “wellbore” refers to a hole in the subsurface made by drilling or insertion of a conduit into the subsurface. The term “well,” when referring to an opening in the formation, may be used interchangeably with the term “wellbore.”

[0077] As used herein, the term “subsurface” refers to geologic strata occurring below the earth's surface.

[0078] The terms “zone” or “zone of interest” refer to a portion of a formation containing hydrocarbons. Sometimes, the terms “target zone,” “pay zone,” or “interval” may be used.

[0079] As used herein, the terms “working fluid” and “clean-out fluid” refer to any fluid that may be pumped into a wellbore in connection with a downhole flow-diverter tool. Such fluids may include aqueous fluids, fluids containing an abrasive material used for perforating casing, a hardware treating fluid, or a fluid containing a surfactant.

[0080] The terms “tubular” or “tubular member” refer to any pipe, such as a joint of casing, a portion of a liner, a joint of tubing, a pup joint, or coiled tubing. The terms “production tubing” or “tubing joints” refer to any string of pipe through which reservoir fluids are produced.

Description of Specific Embodiments

[0081] The present disclosure relates to hydraulic clean-out operations for pipe. The tools and methods disclosed herein are ideally suited for wellbore operations, including using the perforating tool in combination with a downhole positive displacement motor and mill bit.

[0082] **Figure 1A** is a cross-sectional view of a wellbore clean-out tool **100** of the present invention, in one embodiment. In some cases herein, the perforating tool **100** may be referred

to as a flow diverter. The perforating tool **100** is used to inject fluids into a wellbore for clean-out and for abrasive perforating. An illustrative wellbore is shown at **1000** in **Figure 10** and is discussed below.

[0083] The perforating tool **100** defines a generally tubular body formed from a series of components. As shown, the perforating tool **100** has a first (or upstream) end **102** and a second (or downstream) end **104**. A central bore **105** is formed within the body extending from the first end **102** to the second end **104**.

[0084] As will be discussed, the perforating tool **100** is configured to cycle or otherwise move a position of a mandrel **155** and a connected plunger **160** within the tubular body, in response to fluid pumping rates into the wellbore **1000** by an operator. In this way, a flow of working fluid through the tool **100** may be adjusted. In the view of **Figure 1A**, the perforating tool **100** is in its run-in position wherein all of the injected fluid flows through the tool **100** from the top (or upstream) end **102** to the bottom (or downstream) end **104** en route to a next downhole tool or to the bottom of the wellbore **1000** or to a plug, as the case may be. Specifically, the fluid will flow into the bore **105**, out of the mandrel **155** through side ports **185**, then through an annular area **145** around the plunger **160**, and through a seat **170**.

[0085] Of interest, a lower seal **164** resides along a lower mandrel seal sub **160** and inside of a jetting port housing **140**. This is just above the flow ports **185**. A seal **164** prevents working fluids from flowing up the annular area **145** to a level of lateral jetting nozzles (or jetting ports) **148** when the tool **100** is in its flow-through mode.

[0086] The perforating tool **100** is comprised of a series of tubular bodies that are threadedly connected end-to-end. A first of these represents a top sub **110**. The top sub **110** defines a tubular body wherein a first (or upstream) end **112** comprises female threads while a second (or downstream) end **114** comprises male threads. The female threads are configured to threadedly connect to a CT connector (not shown), which in turn is connected to a string of coiled tubing (or other conveyance medium).

[0087] The perforating tool **100** next includes a spring housing **120**. The spring housing **120** also defines a generally tubular body wherein a first end **122** comprises female threads while a second opposite end **124** comprises male threads. The first end **122** of the spring housing **120** threadedly connects to the second (or downstream) end **114** of the top sub **110**.

[0088] The perforating tool **100** also includes a spring **125**. The spring **125** resides along an inner diameter of the spring housing **120**. The spring **125** is held in compression within the tool **100**. In one aspect, the spring **125** is an Inconel[®] spring. Alternatively, the spring material is 17-7 stainless steel. Of interest, a shoulder **126** resides along an inner diameter of the spring housing **120**. The shoulder **126** serves as a face against which the spring **125** resides.

[0089] Moving down the tool **100**, the perforating tool **100** next includes an upper mandrel seal sub **130**. The upper mandrel seal sub **130** also defines a generally tubular body wherein a first (or upstream) end **132** comprises female threads while a second opposite (or downstream) end **134** comprises male threads. The upstream end **132** threadedly connects to the second (or downstream) end **124** of the spring housing **120**. Of interest, the upper mandrel seal sub **130** encompasses a sequencing mechanism **400**, discussed below.

[0090] The perforating tool **100** also comprises a jetting port housing **140**. The jetting port housing **140** also defines a generally tubular body wherein a first (or upstream) end **142** comprises female threads while a second (or downstream) opposite end **144** also comprises female threads. The jetting port housing **140** resides downstream from the upper mandrel seal sub **130**. Specifically, the first end **142** of the jetting port housing **140** threadedly connects to the second end **134** of the upper mandrel seal sub **130**.

[0091] Of importance, the jetting port housing **140** comprises one or more jetting ports **148**. Preferably, the jetting ports **148** are placed within the jetting port housing **140** at a 90° angle, or transverse to a longitudinal axis of the tool **100**. In this way, when the tool **100** is in its perforating mode, jetting fluid may exit the jetting port housing **140** directly at the surrounding casing to be perforated. Preferably, a plurality of lateral jetting ports **148** are placed radially around the jetting port housing **140** along at least two levels.

[0092] As a next component, the perforating tool **100** includes a lower mandrel seal sub **180**. The lower seal sub **180** defines a generally tubular body that is essentially a mirror image of the upper mandrel seal sub **130**. Seal subs **130** and **180** are the same component, but with sub **160** being turned upside down. An upper end **182** of the lower seal sub **180** is threadedly connected to the lower end **144** of the jetting port housing **140**.

[0093] Below the lower seal sub **180** is a bottom sub **190**. The bottom sub **190** also defines a tubular body having an upper end **192** and a lower end **194**. The upper end **192** comprises male threads that connect to a female bottom end **184** of the lower mandrel seal sub **180**. The bottom sub **190** forms a bore **195** that is in fluid communication with and forms a part of the bore **105**.

[0094] The top sub **110**, the spring housing **120**, the upper mandrel seal sub **130**, the jetting port housing **140**, the lower mandrel seal sub **180** and the bottom sub **190** together make up a tubular housing for the perforating tool **100**.

[0095] The perforating tool **100** additionally includes a piston assembly **150**. The piston assembly **150** defines a series of components that are configured to slide together along the spring housing **120** in response to fluid pressure. The piston assembly **150** includes an orifice retainer **151**, a piston body **156**, a piston orifice **153** and a piston scraper retainer **157**. The piston assembly **150** essentially serves as a pressure shoulder, moving down the spring housing **120** in response to fluid pressure applied from the surface.

[0096] It is observed here that while it is pressure that moves the piston assembly **150** down, it is also accurate to refer to changes in flow rate that actuate the piston assembly **150**. This is because the piston orifice **153** is configured according to a desired flow rate to cause the tool **100** to change between operational modes. In this respect, the orifice **153** is sized to generate the required differential pressure across itself to function. External pressures do not have an impact on the piston assembly **150**; only pressure from the flow rate through the orifice **153** changes the tool mode.

[0097] The orifice retainer **151** secures the piston assembly **150** in place below the top sub **110**. Specifically, the orifice retainer **151** abuts the lower end **114** of the top sub **110** to prevent the piston assembly **150** from moving further upstream. Various o-rings (not numbered) may be disposed around the piston body **156** and the piston orifice **153** to prevent pressure communication between the area above the piston assembly **150** and below the piston assembly **150**. Additional details concerning the piston assembly **150** are provided below in connection with **Figures 8A** through **8C**.

[0098] As stated above, the piston assembly **150** is operatively connected to a mandrel **155**. The mandrel **155** has an upper (or upstream) end **152** connected to (or acted upon by) the piston assembly **150**, and a lower (or downstream) end **154**. The upper end **152** of the mandrel **155** is threadedly connected to the piston body **156**. The piston assembly **150** and connected mandrel **155** reside within the inner diameter of the spring housing **120**. Of interest, an upper end of the spring **125** acts against the piston scraper retainer **157**, biasing the piston assembly **150** against the top sub **110**.

[0099] In operation, hydraulic pressure (generated by fluid flow through the piston orifice **153**) acts on the shoulder that is the upper side of the piston assembly **150** above the piston orifice **153**. In response, the piston assembly **150** and connected mandrel **155** move down the tubular housing **110** together. Specifically, the piston assembly **150** (and connected mandrel **155**) moves from its raised position (shown in **Figure 1A**), to a lowered position (shown in **Figure 2A**).

[0100] It is noted that the spring **125** resides in an annular region formed between the mandrel **155** and the surrounding spring housing **120**. This first annular region is pressure-balanced via ports **159** in the mandrel **155**. These ports let the fluid volume inside the spring housing **120** change as the piston assembly **150** moves up and down.

[0101] A second annular area **145** is reserved between the mandrel **155** and the surrounding jetting port housing **140**. A pair of annular seals **162**, **164** resides within the annular area **145**. The seals **162**, **164** may be mechanically or adhesively affixed to inner diameters of the upper

mandrel seal sub **130** and the lower mandrel seal sub **180**, respectively. Thus, the seals **162**, **164** do not slide along the bore **105** with the mandrel **155**.

[0102] It is observed that the seals represent an upper seal **162** and a lower seal **164**. The two seals **162**, **164** straddle the jetting ports **148** along the jetting port housing **140**.

[0103] At the lower end **154** of the mandrel **155** is a plunger **160**. The plunger **160** defines a short body that is configured to sealingly land onto a seat **170** (described below). An upper end **162** of the plunger **160** is connected to the lower end **154** of the mandrel **155**. In this way, the plunger **160** moves up and down along the bore **105** of the perforating tool **100** with the mandrel **155**.

[0104] The mandrel **155** also includes one or more flow ports **185**. The flow ports **185** preferably reside immediately above the plunger **160**. The flow ports **185** provide fluid communication between the bore **105** of the tool **100** and the annular region **145** when the wellbore clean-out tool **100** is in its flow-through mode.

[0105] Finally, the perforating tool **100** comprises a seat **170**. The seat **170** defines a short tubular body having a flow-through opening **175**. The seat **170** is configured to sealingly receive the plunger **160** when the piston body **150** is moved to a lowered position (seen in **Figure 2A**). Of interest, the opening **175** is sized to provide little to no restriction in downhole fluid flow when the plunger **160** is in the flow-through mode of **Figure 1A**.

[0106] In the view of **Figure 1A**, the piston body **150** is at its uppermost position. This is its default (or raised) position wherein the orifice retainer **155** is abutting the lower end **114** of the top sub **110**. As noted, the piston body **150** is held in this default position due to the upward mechanical force provided by the spring **125**.

[0107] A piston o-ring may be disposed around the piston body **156** to prevent pressure communication between the area above the piston body **156** and below the piston body **156** when fluid is passing through the orifice **153**. Additionally, an orifice o-ring may be disposed around the orifice **153** to prevent pressure communication between the area above the orifice **153** and below the orifice **153** when fluid is passing through the orifice **153**.

[0108] In the raised position of **Figure 1A**, fluid is injected by an operator into the bore **105** of the perforating tool **100** under a first pressure. The first pressure correlates to a first flow rate. Those of ordinary skill in the art will understand that there is a correlation between flow rate, tubular dimension and pressure. At the first flow rate, the hydraulic pressure acting on the piston assembly **150** is not great enough to cause the piston assembly **150** to compress the spring **125**.

[0109] In the position of **Figure 1A**, the plunger **160** remains in its raised position above the seat. As working fluid is injected into the wellbore **1000** at the first flow rate, fluid will pass through the bore **105** of the tool **100**, through the flow ports **185**, into the annular region **145**, around the plunger **160**, and then down through the flow-through opening **175** of the seat **170**.

[0110] **Figure 1B** is another cross-sectional view of the perforating tool **100** of **Figure 1A**. In this view, line **50A** is provided to demonstrate a path of the injected fluids for the tool in its flow-through mode. Fluids are shown entering the upper end **102** of the tool **100**, and then ultimately passing out of the lower end **104** according to the flow path described immediately above. Of interest, all pumped fluids pass through the flow ports **185**, into the annular area **145**, around the plunger **160**, through the opening **175** in the seat **170**, and on to any bottom hole assembly that may reside below the tool **100**. Beneficially, the lower seal **164** prevents pumped fluids from flowing back up the annular area **145** to a level of lateral jetting nozzles (or jetting ports) **148** when the tool **100** is in its flow-through mode.

[0111] In operation, once the wellbore clean-out tool **100** is set at a desired depth within the wellbore **1000**, the operator will begin pumping. During pumping, the operator will increase the pump rate. This will apply a greater hydraulic force to the shoulder of the piston assembly **150** and will start to overcome the biasing force of the spring **125** (plus any friction created by o-rings). The piston assembly **150**, the mandrel **155** and its connected plunger **160** will then start to move down the bore **105**.

[0112] The aperture size of the orifice **153** defines the activation rate. Thus, one aspect of using the abrasive perforating tool **100** involves the selection of the aperture size of the orifice

153. Alternatively or in addition, the operator may select an opening size for the flow ports **185** and the seat **170**.

[0113] **Figure 1C** is still another cross-sectional view of the perforating tool **100** of **Figure 1A**. Here, an increase in fluid pumping pressure from the surface is acting on the piston body **156**, causing the piston body **156** and connected mandrel **155** and plunger **160** to advance down the spring housing **120**. Stated another way, hydraulic pressure acting on the piston body **156** overcomes the upward biasing force of the spring **125**, causing the mandrel **155** and plunger **160** to move towards the seat **170**.

[0114] In **Figure 1C**, the perforating tool **100** is in an intermediate position. In this position, all of the injected fluid continues to flow through the end **104** of the tool **100**. In this respect, fluids continue to flow through the flow ports **185**, into the annular area **145**, around the plunger **160**, and through the flow-through opening **175** of the seat **170**. Lower seal **164** prevents the fluids from moving up the annular region **145** and accessing the jetting ports **148**.

[0115] **Figure 2A** is another cross-sectional view of the multi-cycle perforating tool **100** of **Figure 1A**. Here, the perforating tool **100** has further translated (that is, has moved down the spring housing **120**) to its abrasive perforating position. This is done by further increasing the hydraulic force acting on the piston assembly **150**. Specifically, an increased flow rate from the surface acts on the body **156** of the piston assembly **150**.

[0116] The increased hydraulic force is achieved by increasing pump rate of the hydraulic fluid into the wellbore from the surface. In response to the increased pressure (or increasing flow rate), the piston body **156** and operatively connected mandrel **155** and plunger **160** have slid down to a position where the lower end **164** of the plunger **160** lands on the seat **170**.

[0117] It is observed from **Figure 2A** that in addition to flow ports **185**, the mandrel **155** also includes slots **165**. The slots **165** reside higher up the mandrel **155**, that is, above flow ports **185**. The slots **165** also provide fluid communication between the bore **105** and the annular region **145**. In the flow-through mode of **Figures 1A** and **1C** circulation fluids that flow through the slots **165** are blocked from leaving the tool **100** by the upper seal **162**.

However, in the perforating mode of **Figure 2A**, as the mandrel **155** has moved down, the slots **165** have moved into a position adjacent the jetting ports **148**. Thus, abrasive perforating fluids are injected through the slots **165** and through the jetting ports **148**.

[0118] **Figure 2B** is another cross-sectional view of the multi-cycle abrasive perforating tool **100** of **Figure 2A**. The perforating tool **100** again is in its lowered position, or abrasive perforating mode. In this view, line **50B** is provided to demonstrate a flow path of the perforating fluids for the tool **100**. Fluids are shown entering the upper end **102** of the tool **100**, and then exiting out of the jetting ports **148**. Of interest, all fluids exit the tool **100** through the slots **165**, and are confined to exit through the jetting ports **148** by the upper **162** and lower **164** seals.

[0119] It is also observed that in the perforating position of **Figures 2A** and **2B**, fluid communication remains between the bore **105** and the annular region **145** through the flow ports **185**. However, any fluids that exit the flow ports **185** or that reside in the annular region **145** below the lower seal **164** are trapped. Fluids can exit neither the flow-through opening **175** of the seat **170** nor the jetting ports **148**. Thus, complete fluid isolation is provided in both the flow-through mode and the perforation mode, meaning there is no “split flow.”

[0120] As described above, the cycling of the tool **100** between its raised position (**Figure 1A**) and its lowered position (**Figure 2A**) may be accomplished by applying pumping pressure against the biasing force of the spring **125**. However, in a more preferred embodiment a mechanical sequencing mechanism is also used. The sequencing mechanism is preferably a J-slot mechanism as shown at **400** in **Figures 4A-4D**, discussed below. The sequencing mechanism **400** allows the operator to cycle the flow rates to move the tool **100** between settings so that:

(i) In a first setting, the plunger **160** is in a raised position in response to the biasing mechanical force exerted by the spring **125** on the mandrel **155**, placing the tool in its flow-through mode. This is the view of **Figure 1A**.

(ii) In a second setting, the pumping rate is increased and the J-slot mechanism **400** advances to a next slot, allowing the plunger **160** to move down to

an intermediate position. In the intermediate position, the tool **100** remains in its flow-through mode, allowing the operator to inject hydraulic fluid into the bore **105** of the tubular housing **110** and through the seat **170** at a second rate, or at any rate higher than the second rate. This is the view of **Figure 1C**.

(iii) In the first setting again, hydraulic pumping rate is reduced to its first rate, or any rate below the first rate, allowing the plunger **160** to return to its raised position. The perforating tool **100** remains in its flow-through mode.

(iv) Finally, in a third setting, the plunger **160** is forced down into a lowered position in response to the injection of hydraulic fluid through the piston assembly **150** and into the perforating tool **100** at a second rate, or at any rate higher than the second rate. The J-slot mechanism **400** advances to a next slot, placing the perforating tool **100** in its abrasive perforating mode. This is the view of **Figure 2A**.

[0121] Beneficially, in the second setting the operator may ramp up the pumping pressure and be assured that all fluids are passing through the seat. This allows the operator to place a bottom hole assembly at the end of the bottom sub, conducting an additional wellbore function.

[0122] An example of such a function is the milling out of a plug or drilling through the bore of a section of horizontal casing that is screened out or contains debris. In this respect, the bottom end **194** of the sub **190** is configured to threadedly connect to a separate tool that may be placed in the wellbore **1000** below the perforating tool **100**. For example, a positive displacement motor may be placed downstream from the perforating tool **100**.

[0123] **Figure 3A** is a perspective view of a positive displacement motor **300A**. This provides an example of a rotary tool that may be connected to the bottom sub **190**. It can be seen that the motor **300A** includes an elongated tubular body **310**. The body **310** defines a fluid in-take end **312** and a fluid outlet end **314**. The positive displacement motor **300A** operates with a rotor and a stator residing within the tubular body **310**. In one aspect, the positive displacement motor **300A** is used as an agitator, sending pressure pulses across the wellbore downhole while cleaning. In another aspect, a small drill bit (not shown) is connected

to the outlet end **314**, and is turned by the rotor of the motor **300A**. The drill bit may be used to mill through plugs or debris.

[0124] It is understood that the positive displacement motor **300A** is merely illustrative; other positive pressure tools may be placed downstream of the seat **170**.

[0125] As noted, to enable the cycling, a sequencing mechanism such as a J-slot mechanism may be provided. A J-slot mechanism is a cylindrical device having a circuitous channel forming slots. One or more pins ride along the slots, rotating from slot-to-slot in response to changes in fluid pressure.

[0126] **Figure 4A** is a side view of a portion of a J-slot mechanism **400**. It can be seen that a pair of pins **482** reside in respective lower slots **484A**. This is a slot position that would correlate with the default, or raised position of the plunger **160** as presented in **Figures 1A** and **1B**. In this position, the pump rate is below the activation rate. This cycle position will allow injected fluid to flow to the flow ports **185**, sending the fluid on through the bottom end **194** of the bottom sub **190**.

[0127] **Figure 4B** is another side view of the J-slot mechanism **400** of **Figure 4A**. In this view, the pins **482** have advanced one slot **484B**. In slot **484B**, the pins **482** are in an intermediate position. This is a slot position that would correlate to the operator increasing pump rate from the surface as shown in **Figure 1C**. In this position, the location of the J-slot pins **482** restricts the movement of the plunger **160** while allowing the flow-rate to beneficially move above the activation rate. In other words, the plunger **160** will not advance along the mandrel **155** even when the pump rate is well above the activation rate, allowing operation of the positive displacement motor **300A**.

[0128] **Figure 4C** is another side view of the J-slot mechanism **400** of **Figure 4A**. In this view, the pumping rate has been dropped back below the activation rate, causing the pins **482** to follow along the channel and to advanced one slot **484A**. In this position **484A**, the plunger **160** has returned to its raised position per **Figure 1A**.

[0129] **Figure 4D** is still another side view of the J-slot mechanism **400** of **Figure 4A**. In this view, the pump rate has again been increased above the activation rate, causing the pins **482** to advance along the channel to a next slot **484D**. In this position, the plunger **160** is seated, exposing the slots **165** to the jetting ports **148** per **Figure 2A**. In this position, the operator may inject at high rates to perforate a surrounding section of production casing.

[0130] In operation, the pins **482** advance from slot-to-slot in response to alternating cycles of the piston body **150** and connected internals moving longitudinally. The pins **482** cause the piston assembly **150** and connected internals to ratchet, or rotate, in a circular path. Also, the component housing the J-slot pin or pins **482** may ratchet, or rotate, in a circular path. The J-slot grooves (**484A**) are configured so that the piston body **150** and connected internals travel is unrestricted in the upward direction so that every time the flow rate is brought below the activation rate the plunger **160** is in its raised position and cannot seal against the seat **170**. Additionally, on alternating cycles of the flow rate being brought to or above the activation rate, the J-slot grooves allow the piston body **150** and connected internals to move down so the plunger **160** seals against the seat **170**.

[0131] **Figure 5A** is side view of the mandrel **155** of **Figures 1A** and **2A**. So called J-slots **410** are visible along the outer diameter of the mandrel **155**. Also of interest, flow ports **185** can be seen below the J-slots **410** while radial slots **165** can also be seen below the J-slots **410**.

[0132] **Figure 5B** is a cross-sectional view of the mandrel **155** of **Figure 5A**. In both **Figures 5A** and **5B**, slot **484D** of the J-slots **410** is visible. Here, the J-slots **410** themselves are shown in phantom.

[0133] It is understood that the J-slots **410** of **Figures 5A** and **5B** are part of the sequencing mechanism **400**. The J-slots **410** work in tandem with a J-slot collar (shown at **420** in **Figure 6A**).

[0134] **Figure 6A** is cross-sectional view of the J-slot collar **420**. The J-slot collar **420** includes a pair of opposing pins **482** that ride in the J-slots **410** of **Figure 5A**.

[0135] **Figure 6B** is a perspective view of the J-slot collar **420** of **Figure 6A**. Visible in this view is one of the pins **482** extending inwardly into a bore **425**.

[0136] **Figure 7** is a cross-sectional view of the jetting port housing **140** of **Figures 1A** and **2A**. The proximal (or upstream) end **142** and the distal (or downstream) end **144** are indicated. It is observed that the jetting port housing **140** defines a wall **141** forming a bore **146**. The bore **146** extends from the proximal **142** to the distal **144** end. The jetting ports **148** are visible in the wall **141** making up the housing **140**.

[0137] **Figure 8A** is a side view of the piston assembly **150** of **Figures 1A** and **2A**.

[0138] **Figure 8B** is a cross-sectional view of the piston assembly **150** of **Figure 8A**.

[0139] **Figure 8C** is a perspective view of the piston assembly **150** of **Figure 8A**. The piston assembly **150** will be discussed with reference to **Figures 8A – 8C** together.

[0140] The piston assembly **150** includes an orifice retainer **151**, a piston body **156**, a piston orifice **153** and a piston scraper retainer **157**. The piston orifice **153** resides below the orifice retainer **151**. The piston orifice **153** comprises a shoulder, with the shoulder being exposed to fluid pressure above the fluid assembly **150**. The piston orifice **153** includes a central through-opening that permits working fluids to flow through the piston assembly **150** during clean-out operations. Piston scrapers (not shown) may be disposed around the piston body **156** to ensure debris is not able to reach the piston body o-ring.

[0141] **Figure 9A** is a side view of the plunger **160** of **Figures 1A** and **2A**. **Figure 9B** is a cross-sectional view of the plunger **160**. **Figure 9C** is a perspective view of the plunger **160** of **Figure 9A**. The plunger **160** will be discussed with reference to **Figures 9A, 9B** and **9C** together.

[0142] The plunger **160** comprises an upper end **162** and a lower end **164**. The upper end **162** is mechanically or adhesively connected to a lower end of the mandrel **155**. The lower end **164**, in turn, is dimensioned to sealingly land onto the seat **170**, above the flow-through opening **175**. The plunger **160** defines a short body **166**. The body **166** may comprise a solid

steel, plastic or elastomeric material. Preferably, an upper portion (representing the upper end **162**) of the body **166** is fabricated from plastic or steel while a lower portion (representing the lower end **164**) represents a separate elastomeric body. A flat portion **168** is provided on each of opposing sides of the body **166** to facilitate threadedly connecting the plunger **160** to the mandrel **155**.

[0143] An opening **161** is preserved internal to the body **166**. The opening **161** is dimensioned to threadedly receive a bolt **163**. More specifically, the opening **161** receives a threaded stud **167** of the bolt **163**. An opening **169** for an Allen wrench is provided in the bolt **163** for securing the stud **167** into the opening **161**.

[0144] When the piston assembly **150** and connected plunger **160** are in their lowered position (or abrasive perforating mode), the bottom **164** of the plunger **160** lands on the seat **170**. At the same time, the slots **165** in the mandrel **155** advance to a position intermediate the upper **162** and lower **164** seals, exposing the slots **165** to the jetting ports **148**. In this position, all of the jetting fluids flow down through the bore **105** of the tool **100**, through the slots **165**, into the annular region **145** and through the lateral jetting ports **148**.

[0145] As noted above, the perforating tool **100** (with or without rotary tool **300A** or some bottom hole assembly below) is intended to be run into a wellbore. **Figure 10** is a cross-sectional view of an illustrative wellbore **1000**. The wellbore **1000** penetrates into a subsurface formation **1050** and is completed for producing hydrocarbon fluids. Of interest, for purposes of the present disclosure, the wellbore **1000** has received a multi-cycle clean-out tool such as the tool **100** of **Figure 1A**.

[0146] It can be seen that the wellbore **1000** has been completed with a series of pipe strings referred to as casing. First, a string of surface casing **1010** has been cemented into the formation **1050**. The cement resides in an annular region **1015** around the casing **1010**, forming an annular sheath **1012**. The surface casing **1010** has an upper end in sealed connection with a bottom wellhead valve **1064**.

[0147] Next, at least one intermediate string of casing **1020** is cemented into the wellbore **1000**. The intermediate string of casing **1020** is in sealed fluid communication with a top wellhead valve **1062**. A cement sheath **1022** resides in an annular region **1025** of the wellbore **1000**. The combination of the casing **1010** / **1020** and the cement sheaths **1010**, **1022** in the annular regions **1015**, **1025** strengthens the wellbore **1000** and facilitates the isolation of aquitards and formations behind the casing **1010** / **1020**. It is understood that a wellbore **1000** may, and typically will, include more than one string of intermediate casing.

[0148] Finally, a production string **1030** is provided. The production string **1030** is hung from the intermediate casing string **1020** using a liner hanger **1031**. The production string **1030** is a liner that is not tied back to the surface **1001**. In the arrangement of **Figure 10**, a cement sheath **1032** is provided around the liner **1030**. The cement sheath **1032** fills an annular region **1035** between the liner **1030** and the surrounding rock matrix in the subsurface formation **1050**.

[0149] The production liner **1030** has a lower end **1034** that extends to an end **1054** (or “toe”) of the wellbore **1000**. For this reason, the wellbore **1000** is said to be completed as a cased-hole well. Those of ordinary skill in the art will understand that for production purposes, the liner **1030** will be perforated after cementing to create fluid communication between a bore **1045** of the liner **1030** and the surrounding rock matrix making up the subsurface formation **1050**. In one aspect, the production string **1030** is not a liner but is a casing string that extends back up to the surface **1001**. In this instance, the cement sheath **1032** will not be extended to the surface **1001**.

[0150] As an alternative, end **1054** of the wellbore **1000** may include joints of sand screen (not shown). The use of sand screens with gravel packs allows for greater fluid communication between the bore **1045** of the liner **1030** and the surrounding rock matrix **1050** while still providing support for the wellbore **1000**. In this instance, the wellbore **1000** would include a slotted base pipe as part of the sand screen joints. Of course, the sand screen joints would not be cemented into place.

[0151] It is also noted that the bottom end **1054** of the wellbore **1000** is completed substantially horizontally. This is a common orientation for wells that are completed in so-called “tight” or “unconventional” formations. Indeed, in the United States well over half of all wells are now completed horizontally.

[0152] Horizontal completions not only dramatically increase exposure of the wellbore to the producing rock face, but also enable the operator to create fractures that are substantially transverse to the direction of the wellbore. Those of ordinary skill in the art may understand that a rock matrix will generally “part” in a direction that is perpendicular to the direction of least principal stress. For deeper wells, that direction is typically substantially vertical. However, the present inventions have equal utility in vertically completed wells or in multi-lateral deviated wells.

[0153] When completed, the wellbore **1000** will include a string of production tubing (not shown). However, before that is done, it is desirable to clean out the wellbore **1000**. Accordingly, the wellbore **1000** includes a perforating tool **100** as shown in **Figure 1A**.

[0154] It is noted that the perforating tool **100** is connected to a string of coiled tubing **1040**. The coiled tubing string **1040** serves as a working string for delivering an aqueous fluid under high pressures downhole. Such pressures may exceed 500 psi, or even 3,000 psi. The perforating tool **200** is preferably extended along the horizontal leg of the wellbore within the subsurface formation **1055**.

[0155] A lubricator **1060** or frac tree is placed over the wellbore **1000**. The lubricator **1060** is positioned at the surface **1001** to control wellbore pressures during a completion (or other wellbore) operation and to isolate tools such as a string of coiled tubing **1040** being moved into and back out of the wellbore **1000**.

[0156] As can be seen, a unique abrasive perforating tool **100** has been provided. The perforating tool acts as a flow diverter that increases the efficiency of fill removal operations. Fluid flow can be entirely in a straight-through path of the tool to an optional bottom hole assembly below. In addition, the fluid flow can also be entirely diverted to jetting ports. The

cycling of fluid flow modes is possible an unlimited number of times and does not require dropping a ball or reversing circulation.

[0157] Using the perforating tool **100** described above, a method **1100** of conducting a wellbore operation is also provided. The method **1100** is presented in the flow chart of **Figure 11**.

[0158] The method **1100** first includes providing a wellbore. This is indicated at Box **1110**. The wellbore is being completed for the production of hydrocarbon fluids. Of interest, the wellbore has been completed with a string of casing, including a string of production casing along a selected subsurface formation.

[0159] The wellbore may be completed vertically. Alternatively, the wellbore may be a deviated well formed from a lateral drilling operation. More preferably, the wellbore is completed horizontally as shown in **Figure 10**. However, the methods are not limited to the orientation of the wellbore unless expressly stated in the claims.

[0160] It is understood that for purposes of Box **1110**, the term “providing” includes but is not limited to “forming” or “completing.” The term “providing” may also mean that a service company accesses a wellbore that has already been drilled and completed, or accesses a wellbore that has been undergoing production operations for a period of time.

[0161] The method **1100** also includes running a perforating tool into the wellbore. This is provided in Box **1120**. The perforating tool is run into the wellbore at the lower end of a string of coiled tubing **1040**. The perforating tool may be constructed in accordance with any of the embodiments described above. Particularly, the perforating tool is a multi-cycle tool having a tubular housing that includes an elongated bore. Fluids are pumped from the surface, down the string of coiled tubing, and into the bore.

[0162] The perforating tool includes one or more lateral jetting ports. The jetting ports are spaced apart radially around the housing, and preferably constitute two levels of ports in close proximity to one another. The jetting ports deliver an abrasive fluid to the casing when the tool is in its perforating mode.

[0163] The method **1100** may additionally include tuning the various openings along the tool in order to provide a desired total cross-sectional area of fluid flow in the perforating tool. This is seen at Box **1130**. For example, the step of Box **1130** may include setting or adjusting an aperture size of an orifice associated with the piston. This has the effect of varying flow rates associated with the raised and lowered positions.

[0164] In order for the perforating tool to change modes, the piston orifice needs to be sized small enough to ensure the required activation rate will be achievable during the operation. Although the perforating tool will change modes correctly, sizing the piston orifice too small for a planned pump-rate will cause excessive and unnecessary pressure drop that may limit the total flow capacity of the operation in flow-through mode. Optimally, the piston orifice is sized appropriately to ensure the activation rate will be achievable in both modes throughout the operation with minimal back-pressure.

[0165] Additionally, the Box **1130** may include a step of selecting or adjusting the cross-sectional area of the flow ports along the mandrel, and/or a step of selecting or adjusting a diameter of the lateral slots associated with the mandrel and the flow-through opening associated with the seat. A larger cross-sectional area in the opening of the seat enables more working fluid to flow from the perforating tool en route to the PDM **300A**.

[0166] Additionally, the Box **1130** may also include a step of adjusting a size of the lateral jetting ports. The ports should be small enough to provide ample flow restriction for effective jetting.

[0167] It is observed that while Box **1130** is shown after the step of running the perforating tool into the wellbore, it is understood that these adjustments of Box **1160** will be taken during tool design and before the tool is run into the wellbore in Box **1120**.

[0168] The method **1100** also includes the step of locating the perforating tool. This is seen at Box **1140**. The perforating tool is located at a selected depth along a tubular body within the wellbore. Subsurface formation **1055** of **Figure 10** is an example of a location or depth for the perforating tool, although the operator will choose specific total depths for

perforation and clean-out. Thus, the term “depth” includes “total depth” along a horizontal wellbore.

[0169] The method **1100** further includes injecting a working fluid down a coiled tubing string. This is provided at Box **1150**. The fluid is a hydraulic fluid that is pumped into the wellbore under pressure. The fluid is pumped down the coiled tubing and into the bore of the tubular housing making up the perforating tool at a first flow rate. The first flow rate is below an activation rate. The pumping at the first flow rate causes the pumped fluid to flow through the mandrel, through the radial flow ports of the mandrel, into the annular area, around the plunger and through the seat.

[0170] The method **1100** also includes further injecting the working fluid down the coiled tubing and into the bore of the tubular housing at a second flow rate. This is shown at Box **1160**. The second flow rate is higher than the first flow rate. In this instance, the higher flow rate increases a hydraulic force acting on a pressure shoulder of a piston, causing the mandrel and connected plunger to slide along the tubular housing such that the plunger is landed on the seat. The result is that the tool is moved into its perforating mode. In this mode, all pumped fluid flows into the bore of the tubular housing, down the mandrel, through the radially-disposed slots, into the annular area and through the lateral jetting ports.

[0171] As noted above, during the perforating mode the pumped fluid will preferably include abrasive particles such as sand. In addition, a water-soluble polymer may be used in the concentration range of about 10 pounds to about 40 pounds per 1,000 gallons of liquid. The polymer keeps the abrasive particles suspended and reduces friction pressure loss during flow of fluid through the tubing **1040**. A concentration of abrasive particles may be selected depending on wellbore conditions, but normally concentrations up to about one-half pound of abrasive per gallon may be used. Chemicals such as KCl and HCl may be added to the working fluid to assure that the fluid is compatible with the reservoir rock. Preferably, the fluid pumped is filtered to minimize plugging of jetting ports **148**.

[0172] To effectuate the method **1100**, it is preferred that a sequencing mechanism be placed along the tubular housing. The sequencing mechanism may be a J-slot mechanism. The J-slot mechanism may be configured to cycle between three settings. Those include:

(i) a first setting wherein a pin associated with the J-slot mechanism resides in a first slot that places the plunger in a raised position in response to a biasing mechanical force exerted by a spring on the mandrel while pumping at a first rate, maintaining the perforating tool in a flow-through mode (shown in **Figure 1A**);

(ii) a second setting wherein the pin moves higher in the first slot in response to the injection of fluids into the wellbore at a second increased rate, placing the plunger into an intermediate position while allowing the tool to remain in its flow-through mode (shown in **Figure 1C**);

(iii) the first setting again wherein the pin resides in a second slot that returns the plunger to its raised position in response to the upward biasing force of the spring; and

(iv) a third setting wherein the pin moves higher along a third slot in response to the injection of fluids into the wellbore at a second increased rate, and wherein the plunger slides from the raised position to the lowered position, placing the perforating tool in its abrasive perforating mode (shown in **Figure 2A**).

[0173] It is observed that the second increased rate is an activation rate. The pump rate in both the second setting and the third setting may be higher than the activation rate.

[0174] The method **1100** may include repeating the step of Box **1150** to provide further clean-out. During this step, a rotary tool below the perforating tool such as (positive displacement motor **300A**) may be activated in order to mill out a plug or other wellbore obstacle.

[0175] In one aspect of the method **1000**, the perforating tool **100** is part of a bottom hole assembly that includes a downhole tool. The downhole tool is threadedly (or otherwise

operatively) connected to the lower end of the lower sub. An upper end of the lower sub supports or abuts or is otherwise proximate to the seat.

[0176] In one embodiment, the downhole tool is a positive displacement motor. The positive displacement motor is configured to rotate a connected mill bit in response to hydraulic pressure received when the perforating tool is in its flow-through mode. In this instance, the method further comprises milling out a plug or debris located in the wellbore below the bottom sub using the positive displacement motor.

[0177] Milling operations may also be conducted to remove plugs that have been placed in the well bore. The operator may mill through wellbore obstacles using the flow-through mode, then switch the tool to its perforating mode to create perforations at the desired location. The tool can then be cycled back to the flow-through mode to resume circulation through the motor to circulate out the sand that was used for creating the perforations. Changing the flow path to the motor has the benefit of maintaining circulation around the entire BHA to avoid getting stuck, as well as enabling a higher pump rate than would be achievable through the perforating nozzles.

[0178] In another embodiment, the downhole tool is a sliding sleeve shifting tool. The setting tool is configured to shift a sliding sleeve along the wellbore in response to hydraulic pressure received when the perforating tool is in its flow-through mode. In this instance, the method further comprises shifting a sliding sleeve located in the wellbore below the bottom sub using the sliding sleeve shifting tool.

[0179] **Figure 3B** is an example of a suitable sliding sleeve shifting tool **300B** that may be used as part of a bottom hole assembly with the perforating tool **100** of **Figures 1A** and **2A**. This illustrative tool **300B** is a bi-directional shifting tool that is available from Hunting Energy Services, LLC of Houston, Texas.

[0180] In still another embodiment, the downhole tool is a bridge plug. The bridge plug may be either a permanently installed bridge plug or a resettable bridge plug. In this instance, the method further comprises setting the bridge plug in the wellbore below the bottom sub in

response to hydraulic pressure received when the perforating tool is in its flow-through mode. In another instance the bridge plug may be set in response to movement of the conveyance tubing.

[0181] **Figure 3C** presents an example of a suitable bridge plug **300C**. This illustrative tool **300C** is a Crownstone™ GTV tubing-retrievable well barrier (or retrievable bridge plug) that is available from Baker Hughes (a GE Company) also of Houston, Texas.

[0182] In another embodiment, the downhole tool is an extended reach tool. The extended reach tool creates pressure pulses in the flow through the coiled tubing, which reduces friction between the coiled tubing and the wellbore. An operator may utilize the extended reach tool while in clean-out (that is, flow-through) mode to achieve deeper depths that would otherwise not be attainable and then switch to perforating mode to perforate the wellbore. In perforating mode, the sand laden fluid is isolated from the extended reach tool, which typically would be damaged by such fluid.

[0183] **Figure 3D** presents an example of a suitable extended reach tool **300D**. This illustrative tool **300D** is a Toe Tapper™ extended reach tool that is available from CT Energy Ltd. of Calgary, Alberta.

[0184] Further, variations of the tool and of methods for operating a flow diverter tool may fall within the spirit of the claims, below. For example, the location of the upper **162** and lower **164** seals, and the corresponding locations of the slots **165** and the flow ports **185**, may be reconfigured such that the raised position of the perforating tool **100** correlates to the perforating mode rather than the flow-through mode, and such that the lowered position correlates to the flow-through mode rather than the perforating mode.

[0185] **Figures 12A** through **12C** demonstrate a perforating tool **1200** wherein the tool is biased in its abrasive perforating mode. This means that in the raised position abrasive perforating fluid is injected through lateral jetting nozzles, while in the lowered position a working fluid is entirely injected through a seat at the bottom of the perforating tool. This

allows the fluid to serve as a working fluid for operating a positive displacement motor **300A** or for activating a sliding sleeve **300B** or for setting a bridge plug **300C** in the wellbore.

[0186] **Figure 12A** is a first cross-sectional view of the perforating tool (or “flow diverter”) **1200**. In this view, the perforating tool **1200** is in an abrasive perforating mode. Here, all of the injected fluids are diverted from the tool **1200** and through lateral jetting ports **1248**. Thus, the tool **1200** is spring-biased to the abrasive perforating mode rather than to the flow-through mode.

[0187] The perforating tool **1200** defines a generally tubular body formed from a series of components. As shown, the perforating tool **1200** has a first (or upstream) end **102** and a second (or downstream) end **104**. A central bore **105** is formed within the body extending from the first end **102** to the second end **104**.

[0188] As with clean-out tool **100** described above, the perforating tool **1200** is configured to cycle a position of a mandrel **155** and connected plunger **160** in response to fluid pumping rates into the wellbore **1000** by an operator. In this way, a flow of fluid through the tool **1200** may be adjusted. In the view of **Figure 12A**, the perforating tool **1200** is in its run-in position wherein all the injected fluid flows through the tool **1200** from the top (or upstream) end **102**, then out through side ports **1285** and into an annular area **1245**, then through lateral jetting ports **1248**. Of interest, the lowered end of the plunger **160** has no through-bore and is sealingly inserted in a seat **170**, preventing the injected fluids from flowing through the bottom end **104** of the tool **1200**.

[0189] It is observed here that some of the tubular components in the perforating tool **1200** correspond to components of the perforating tool **100**, or at least very closely there to. Examples include the top sub **110**, the piston assembly **150**, the spring housing **120** and spring **125**, the upper mandrel seal sub **130**, the jetting port housing **140** with one or more jetting ports **148**, the mandrel **155** and the bottom sub **190**. Accordingly, those components need not be described again here.

[0190] The spring housing 120, the mandrel seal sub 130 and the jetting housing 140 together make up a tubular housing for the perforating tool 1200. Of interest, a shoulder 146 resides along an inner diameter of the jetting port housing 140. The shoulder 146 forms a profile above the jetting ports 148. A separate shoulder 136 resides at the bottom end 134 of the mandrel seal sub 130. O-rings are placed inside the bottom end 134, helping to keep perforating fluid from flowing from an annular area between the mandrel 155 and the spring housing 120 during perforating.

[0191] An annular area 145 is reserved between the mandrel 155 and the surrounding jetting port housing 140. The annular area 145 has an upper portion where the spring 125 resides, and a lower portion where jetting ports 148 are placed. Appropriate o-rings reside around and inside the downstream end 134 of the mandrel seal sub 130 to provide a fluid seal between the upper and lower annular regions 145. The annular region the spring 125 resides in is pressure balanced via ports 159 in the mandrel 155. These ports 159 let the fluid volume inside the spring housing 120 change as the piston body 156 moves up and down.

[0192] At the lower end 154 of the mandrel 155 is a stem 1280. The stem 1280 defines a short tubular body having an upper (or upstream) end 1282 and an opposing lower (or downstream) end 1284. A bore 1265 is formed from the upper 1282 to the lower 1284 end, allowing working fluids to flow through the side ports 1285. Preferably, two or more equi-radially disposed slots are provided for the side ports 1285. The upper end 1282 comprises male threads that connect to the lower end 154 of the mandrel 155. In this way, the stem 1280 moves up and down along the bore 105 of the perforating tool 1200 with the mandrel 155.

[0193] The lower end 1284 of the stem 1280 is connected to a plunger 160. As noted above, the plunger 160 is a solid body that may be fabricated from plastic, steel or an elastomeric material. In this instance, the plunger 160 is dimensioned to move through a seat 170. Appropriate seals are provided along the I.D. of the seat 170 to prevent fluids from bypassing the plunger 160.

[0194] In the raised position of **Figure 1A**, fluid is injected by an operator into the bore 105 of the perforating tool 1200 under a first pressure. The first pressure correlates to a first

flow rate. Those of ordinary skill in the art will understand that there is a correlation between flow rate, tubular dimension and pressure. At the first flow rate, the hydraulic pressure acting on the piston assembly **150** is not great enough to cause the piston assembly **150** to compress the spring **125**.

[0195] **Figure 12B** is a second cross-sectional view of the perforating tool **1200** of **Figure 12A**. Here, the perforating tool **1200** has been cycled to an intermediate position. Stated another way, the perforating tool **1200** is translating (that is, sliding down the spring housing **120**) to its intermediate position. This is done by increasing the hydraulic force acting on the piston assembly **150**. In this position, the plunger **160** has advanced partially down the tool **1200**, but all of the injected fluid continues to flow through the lateral jetting ports **148**.

[0196] **Figure 12C** is a third cross-sectional view of the perforating tool **1200** of **Figure 12A**. Here, the tool **1200** (or the plunger **160** in the tool **1200**) has advanced to its lowered position. This is a flow-through mode where all of the injected fluid flows through the side ports **1285** below the seat **170**. Advancing the plunger **160** is done by further increasing the pump rate above an activation rate, thereby increasing the hydraulic force acting on the shoulder that is the piston assembly **150**.

[0197] The cycling of the tool **1200** between its raised position (**Figure 12A**), its intermediate position (**Figure 12B**) and its lowered position (**Figure 12C**) is preferably accomplished by using a sequencing mechanism. The sequencing mechanism is preferably the J-slot mechanism as shown in **Figures 4A-4D**, discussed above. The sequencing mechanism **400** allows the operator to cycle the flow rates to move the tool **1200** between settings so that:

- (i) in a first setting, the plunger **160** is in a raised position in response to the biasing mechanical force exerted by the spring **125** on the mandrel **155**, placing the perforating tool in an abrasive perforating mode;

- (ii) in a second setting, pumping rate is increased and the J-slot mechanism **400** advances to a next slot, allowing the plunger **160** to move down no more than to its intermediate position and allowing the operator to inject hydraulic fluid (typically the perforating fluid) into the bore **105** of the tubular housing **110** and through the

piston orifice **153** at a second rate, or at any rate higher than the second rate, and keeping the perforating tool **1200** in its abrasive perforating mode;

(iii) in the first setting again, hydraulic pumping rate is reduced to its first rate, or any rate below the first rate, and the perforating tool **1200** remains in its perforating mode; and

(iv) in a third setting, the plunger **160** is forced through the seat **170** in response to the injection of hydraulic fluid through the piston assembly **150** and into the perforating tool **1200** at a second rate, or at any rate higher than the second rate, moving the J-slot mechanism **400** to a next slot and causing the plunger **160** to slide from the raised position to the lowered position, placing the perforating tool **1200** in its flow-through mode.

[0198] Using the perforating tool **1200** of **Figures 12A-12C**, a method of cleaning out a wellbore is also provided herein. The wellbore may be the wellbore **1000** of **Figure 10**, for example. In one aspect, the method includes the steps of:

- (a) placing a perforating tool in the wellbore along a string of production casing;
- (b) locating the perforating tool and connected downhole tool within the wellbore;
- (c) pumping working fluid down the wellbore and into the perforating tool at or above an activation rate, causing the tubular mandrel and connected plunger to move through a seat to a lowered position such that all fluid flows through the perforating tool (a flow-through mode);
- (d) lowering the pumping rate to advance the J slot pins to the next setting, therefore placing the tool in its perforating mode;
- (e) pumping the working fluid down the wellbore and into the perforating tool at a rate at or above the activation rate such that all fluid flows through lateral jetting ports (a perforating mode); and

- (f) continuing to pump the working fluid down the wellbore and into the perforating tool at a rate at or above the activation rate in order to hydraulically perforate a surrounding string of production casing.

[0199] In one aspect of the method, the perforating tool is part of a bottom hole assembly that includes a downhole tool. The downhole tool is threadedly (or otherwise operatively) connected to the lower end of the lower sub. An upper end of the lower sub supports the seat.

[0200] In one embodiment, the downhole tool is a positive displacement motor. The positive displacement motor is configured to rotate a connected mill bit in response to hydraulic pressure received when the perforating tool is in its flow-through mode. In this instance, the method further comprises milling out a plug or debris located in the wellbore below the bottom sub using the positive displacement motor.

[0201] In another embodiment, the downhole tool is a sliding sleeve shifting tool. The setting tool is configured to shift a sliding sleeve along the wellbore in response to hydraulic pressure received when the perforating tool is in its flow-through mode. In this instance, the method further comprises shifting a sliding sleeve located in the wellbore below the bottom sub using the sliding sleeve shifting tool.

[0202] In still another embodiment, the downhole tool is a bridge plug. The bridge plug may be either a permanently installed bridge plug or a resettable bridge plug. In one instance, the method further comprises setting the bridge plug in the wellbore below the bottom sub in response to hydraulic pressure received when the perforating tool is in its flow-through mode. In another instance, the method further comprises setting the bridge plug in the wellbore below the bottom sub in response to movement of the conveyance tubing.

[0203] In another embodiment, the downhole tool is an extended reach tool. The extended reach tool creates pressure pulses in the flow through the coiled tubing, which reduces friction between the coiled tubing and the wellbore. An operator may utilize the extended reach tool while in flow-through mode to achieve deeper depths that would otherwise not be attainable and then switch to perforating mode to perforate the wellbore. In perforating mode, the sand

laden fluid is isolated from the extended reach tool, which typically would be damaged by such fluid.

[0204] It will be appreciated that the inventions are susceptible to other modifications, variations and changes without departing from the spirit thereof.

CLAIMS

1. A multi-cycle perforating tool for controlling a direction of a working fluid within a wellbore, the wellbore having been lined with a string of production casing, and the perforating tool comprising:

a tubular housing providing an elongated bore through which a working fluid may be injected, the tubular housing having one or more lateral jetting ports;

a piston disposed proximate an upstream end of the housing, the piston forming a pressure shoulder and having an orifice configured to deliver the working fluid from a wellbore conveyance tubing into the elongated bore of the housing;

a tubular mandrel slidably positioned within the housing, the mandrel having a proximal end connected to or acted upon by the piston, and a distal end forming a plunger; and

a seat disposed along the tubular housing below the distal end of the tubular mandrel, the seat being configured to receive the plunger when the piston and connected mandrel slide from a raised position to a lowered position along the tubular housing, and the seat providing a central flow-through opening for receiving the working fluid;

an annular region formed between the tubular mandrel and the surrounding tubular housing;

one or more slots residing along the tubular mandrel; and

one or more flow ports also residing along the mandrel, but below the one or more slots;

and wherein the perforating tool is configured to cycle a position of the mandrel and connected plunger in response to changes in fluid pumping rate into the conveyance tubing such that (i) all fluid flows through the flow-through opening in the seat when the mandrel and connected plunger are in the raised position, and (ii) all fluid flows through the jetting ports when the mandrel and connected plunger are in the lowered position.

2. The perforating tool of claim 1, wherein:

the plunger comprises a solid body that is mechanically or adhesively connected to the distal end of the mandrel;

the tubular housing comprises a spring housing having an internal shoulder; and

the perforating tool further comprises a spring residing within the spring housing, with an upper end of the spring acting against the piston, biasing the tool in its raised position.

3. The perforating tool of claim 2, wherein the tubular housing further comprises:

an upper sub having a first upper end and a second lower end, wherein the lower end is threadedly connected to an upper end of the spring housing; and

a lower sub having a first upper end and a lower end, with the lower end being threadedly connected to a downhole tool.

4. The perforating tool of claim 3, wherein the downhole tool is (i) a positive displacement motor, (ii) a resettable bridge plug, (iii) a sliding sleeve shifting tool, or (iv) an extended reach tool.

5. The perforating tool of claim 2, further comprising:

an upper seal residing along an inner diameter of the tubular housing, and a separate lower seal also residing along the inner diameter of the tubular housing, wherein the upper and lower seals straddle the jetting ports;

and wherein:

when the perforating tool is in its raised position, the working fluid exits the mandrel through the flow ports, but the lower seal prevents working fluid from flowing up the annular region and to the jetting ports, thereby forcing all of the working fluid to flow around the plunger and through the seat; and

when the perforating tool is in its lowered position, the working fluid exits the mandrel through the slots, and the upper and lower seals confine all of the working fluid to flow through the jetting ports.

6. The perforating tool of claim 5, wherein:

the one or more slots comprises a plurality of radially-disposed slots; and
the one or more flow ports comprises a plurality of radially disposed flow ports placed along the mandrel below the slots.

7. The perforating tool of claim 6, wherein:
the wellbore further comprises a string of production tubing; and
the perforating tool is dimensioned to be run into or through the string of production tubing.

8. The perforating tool of claim 5, wherein:
the spring resides between the tubular mandrel and the surrounding tubular housing above the internal shoulder, the spring being pre-loaded in compression to bias the mandrel and connected plunger in a position above the seat; and
a sequencing mechanism comprising a cylindrical body, wherein the sequencing mechanism is responsive to a sequence of the fluid pumping rates applied above the piston.

9. The perforating tool of claim 8, wherein the sequencing mechanism is configured to cycle the mandrel between:
its raised position wherein the perforating tool is in the flow-through mode;
an intermediate position wherein the perforating tool remains in its flow-through mode, and
its lowered position wherein the perforating tool is in its perforating mode.

10. The perforating tool of claim 9, wherein:
the sequencing mechanism is a J-slot sequencing mechanism;
the J-slot sequencing mechanism resides above the slots and the flow ports;
the J-slot sequencing mechanism cooperates with at least one pin disposed along the tubular housing configured to ride in slots along the cylindrical body to cycle the mandrel and connected plunger between the raised position, the intermediate position and the lowered position;

and wherein the pin is fixed from axial movement and rides in J-slots of the mandrel to restrict axial movement of the mandrel on alternating downward strokes.

11. The perforating tool of claim 10, wherein the J-slot mechanism and spring are configured to:

(i) maintain the mandrel and connected plunger in a raised position while pumping at or below a first pump rate;

(ii) maintain the mandrel and connected plunger in an intermediate position while increasing pump rate above the first pump rate, wherein the perforating tool remains in its flow-through mode;

(iii) upon dropping the pump rate back down to or below the first pump rate, release the mandrel and connected plunger back to the raised position;

(iv) upon raising the pump rate to a rate that meets or exceeds a second pump rate, move the mandrel and connected plunger to a lowered position, placing the perforating tool in its perforating mode; and

(v) repeat the cycle of steps (i) through (iv).

12. The perforating tool of claim 10, wherein the J-slot mechanism is configured to cycle between three settings, comprising:

(i) a first setting wherein the pin resides in a first slot that places the plunger in the raised position in response to the biasing mechanical force exerted by the spring on the mandrel while pumping at a first rate;

(ii) a second setting wherein the pin moves higher in the first slot in response to the injection of the working fluid into the conveyance tubing at an increased pump rate, placing the plunger in an intermediate position;

(iii) the first setting again wherein the pin resides in a second slot that returns the plunger to its raised position in response to the biasing mechanical force exerted by the spring; and

(iv) a third setting wherein the pin moves higher in a third slot in response to the injection of the working fluid into the conveyance tubing at a second increased rate, or at any rate higher than the second rate, and wherein the plunger slides from the raised position to the lowered position.

13. A method of cleaning out a wellbore using a perforating tool, the wellbore having been lined with a string of casing along a selected subsurface formation, and the method comprising:

running a perforating tool into the wellbore on a lower end of a working string, the perforating tool comprising:

a tubular housing providing an elongated bore through which fluids are injected, the tubular housing having one or more lateral jetting ports;

a piston disposed proximate an upstream end of the housing, the piston forming a pressure shoulder and having at least one orifice configured to deliver working fluid from the working string to the elongated bore of the housing;

a tubular mandrel slidably positioned within the housing, the mandrel having a proximal end connected to or acted upon by the piston, and a distal end forming a plunger;

an annular region formed between the mandrel and the surrounding tubular housing;

one or more slots residing along the mandrel;

one or more flow ports also residing along the mandrel, but below the one or more slots; and

a seat disposed along the tubular housing below the distal end of the tubular mandrel, the seat being dimensioned to sealingly receive the plunger when the piston and connected tubular mandrel slide from a raised position to a lowered position along the tubular housing, and the seat providing a central flow-through opening for receiving the working fluid;

locating the perforating tool at a selected depth along the wellbore;

injecting working fluid down the coiled tubing and into the bore of the tubular housing at a first flow rate, thereby causing all of the working fluid to flow through the mandrel, through flow ports in the mandrel, around the plunger and through the flow-through opening in the seat; and

further injecting the working fluid down the coiled tubing and into the bore of the tubular housing at a second flow rate that is higher than the first flow rate, thereby increasing a hydraulic force acting on the pressure shoulder of the piston and causing the mandrel and connected plunger to slide along the tubular housing such that the plunger moves from a raised position above the seat to a lowered position where the plunger is landed on the seat, thereby forcing all of the injected working fluid to flow through slots in the mandrel and through the lateral jetting ports.

14. The method of claim 13, wherein injecting the working fluid through the lateral jetting ports abrasively perforates the production casing.

15. The method of claim 14, wherein:

the plunger comprises a solid body that is operatively connected to the distal end of the mandrel;

the tubular housing comprises a spring housing having an internal shoulder; and

the perforating tool further comprises a spring residing within the spring housing, with an upper end of the spring acting against the piston, biasing the plunger in its raised position.

16. The method of claim 15, wherein the tubular housing further comprises:

an upper sub having a first upper end and a second lower end, wherein the lower end is threadedly connected to an upper end of the spring housing; and

a lower sub having a first upper end and a lower end, with the lower end being threadedly connected to a downhole tool.

17. The method of claim 16, wherein the downhole tool is (i) a positive displacement motor, (ii) a resettable bridge plug, (iii) a sliding sleeve shifting tool, or (iv) an extended reach tool.

18. The method of claim 15, wherein:

the downhole tool is a sliding sleeve shifting tool; and
the method further comprises:

placing the perforating tool in a flow-through mode wherein all working fluid flows through the mandrel, through flow ports in the mandrel, around the plunger, through the flow-through opening in the seat and to the sliding sleeve shifting tool; and

shifting a sliding sleeve associated with the sliding sleeve shifting tool in the wellbore.

19. The method of claim 15, wherein the perforating tool further comprises:

an upper seal residing along an inner diameter of the tubular housing, and a separate lower seal also residing along the inner diameter of the tubular housing, wherein the upper and lower seals straddle the jetting ports;

and wherein:

when the perforating tool is in its raised position, the working fluid exits the mandrel through the flow ports, but the lower seal prevents working fluid from flowing up the annular region and to the jetting ports, thereby forcing all of the working fluid to flow around the plunger and through the seat; and

when the perforating tool is in its lowered position, the working fluid exits the mandrel through the slots, and the upper and lower seals confine all of the working fluid to flow through the lateral jetting ports.

20. The method of claim 15, wherein:

the one or more slots comprises a plurality of radially-disposed slots; and

the one or more flow ports comprises a plurality of radially disposed flow ports.

21. The method of claim 20, wherein:
- the spring resides between the tubular mandrel and the surrounding tubular housing above the internal shoulder, the spring being pre-loaded in compression to bias the mandrel and connected plunger in a position above the seat; and
 - a sequencing mechanism comprising a cylindrical body, wherein the sequencing mechanism is responsive to a sequence of the fluid pumping rates applied above the piston.
22. The method of claim 14, wherein the sequencing mechanism is configured to cycle the mandrel and connected plunger between:
- the raised position wherein the perforating tool is in a flow-through mode;
 - an intermediate position wherein the perforating tool remains in its flow-through mode, and
 - the lowered position wherein the perforating tool is in a perforating mode.
23. The method of claim 22, wherein
- the sequencing mechanism is a J-slot sequencing mechanism;
 - the J-slot sequencing mechanism resides above the slots and the flow ports;
 - the J-slot sequencing mechanism cooperates with at least one pin disposed along the tubular housing configured to ride in slots along the cylindrical body to cycle the mandrel and connected plunger between the raised position, the intermediate position and the lowered position;
 - and wherein the pin is fixed from axial movement and rides in the J-slots of the mandrel to restrict axial movement of the mandrel on alternating downward strokes.
24. The method of claim 23, wherein the J-slot mechanism and spring are configured to:
- (i) maintain the mandrel and connected plunger in a raised position while pumping at or below a first pump rate;

(ii) maintain the mandrel and connected plunger in an intermediate position while increasing pump rate above the first pump rate, wherein the perforating tool remains in its flow-through mode;

(iii) upon dropping the pump rate back down to or below the first pump rate, return the mandrel and connected plunger back to the raised position;

(iv) upon raising the pump rate to a rate that meets or exceeds a second pump rate, move the mandrel and connected plunger to a lowered position, placing the perforating tool in its perforating mode; and

(v) repeat the cycle of steps (i) through (iv).

25. The method of claim 24, wherein step (v) is done without reverse circulating in the wellbore.

26. The method of claim 23, wherein the J-slot mechanism and spring are configured to cycle between three settings, comprising:

(i) a first setting wherein the pin resides in a first slot that places the plunger in the raised position in response to the biasing mechanical force exerted by the spring on the mandrel while pumping at a first rate;

(ii) a second setting wherein the pin moves higher in the first slot in response to the injection of the working fluid into the conveyance tubing at an increased pump rate, placing the plunger in an intermediate position;

(iii) the first setting again wherein the pin resides in a second slot that returns the plunger to its raised position in response to the biasing mechanical force exerted by the spring; and

(iv) a third setting wherein the pin moves higher in a third slot in response to the injection of the working fluid into the conveyance tubing at a second increased rate, or at any rate higher than the second rate, and wherein the plunger slides from the raised position to the lowered position.

27. The method of claim 23, further comprising:
adjusting an aperture size of the orifice associated with the piston, thereby accommodating flow rate variations associated with the raised and lowered positions arising from changes in mandrel dimensions.
28. The method of claim 27, further comprising:
selecting a cross-sectional area of the piston orifice,
selecting a cross-sectional area of the one or more jetting ports;
selecting a cross-sectional area of the slots in the mandrel;
selecting a cross-sectional area of the flow ports in the mandrel;
selecting a cross-sectional area of the flow-through opening in the seat; or
combinations thereof, before running the perforating tool into the wellbore.
29. The method of claim 23, further comprising:
monitoring a pressure of the working fluid from the surface as it is injected into the tubular housing; and
receiving confirmation that the perforating tool has entered its perforating mode when pressure reaches a designated level.
30. A method of operating a perforating tool in a wellbore, comprising:
(a) placing a perforating tool in the wellbore along a string of production casing;
(b) locating the perforating tool and a connected downhole tool within the wellbore;
(c) pumping working fluid down the wellbore and into the perforating tool at or above an activation rate, causing a tubular mandrel and connected plunger to move to a lowered position on a seat such that all of the working fluid flows through lateral jetting ports;
(d) continuing to pump the working fluid down the wellbore and into the perforating tool at a rate above an activation rate in order to hydraulically perforate a surrounding string of production casing, wherein all of the pumped fluid flows through the jetting ports (a perforating mode); and

(e) pumping the fluid down the wellbore and into the perforating tool at a rate below the activation rate such that all fluid flows through the flow-through opening in the seat (a flow-through mode).

31. The method of claim 30, wherein the perforating tool comprises:

a tubular housing providing an elongated bore through which the working fluid is injected, the tubular housing containing the lateral jetting ports;

a piston disposed at an upstream end of the housing, the piston forming a pressure shoulder and having an orifice configured to deliver working fluid from a conveyance string to the elongated bore of the housing;

a tubular mandrel slidably positioned within the housing, the mandrel having a proximal end connected to or acted upon by the piston, and a distal end forming a plunger;

a seat disposed along the tubular housing below the distal end of the tubular mandrel, the seat being dimensioned to receive the plunger when the piston and connected mandrel slide from a raised position to a lowered position within the tubular housing, and the seat providing a central flow-through opening for receiving the working fluid; and

a lower sub having a first upper end proximate to the seat, and a lower end operatively connected to a downhole tool;

32. The method of claim 31, wherein:

the downhole tool is a positive displacement motor, with the positive displacement motor being configured to rotate a connected mill bit in response to hydraulic pressure received when the perforating tool is in its flow-through mode; and

the method further comprises milling out a plug or debris located in the wellbore below the bottom sub using the positive displacement motor.

33. The method of claim 31, wherein:

the downhole tool is a shifting tool, with the shifting tool being configured to shift a sliding sleeve along the wellbore in response to hydraulic pressure received when the perforating tool is in its flow-through mode; and

the method further comprises shifting a sliding sleeve located in the wellbore below the bottom sub using the shifting tool.

34. The method of claim 31, wherein:

the downhole tool is a bridge plug; and

the method further comprises setting the bridge plug in the wellbore below the bottom sub in response to hydraulic pressure received when the perforating tool is in its flow-through mode.

35. The method of claim 31, wherein the perforating tool further comprises:

an annular region formed between the mandrel and the surrounding tubular housing;

one or more slots residing along the mandrel;

one or more flow ports also residing along the mandrel, but below the slots; and

an upper seal residing along an inner diameter of the tubular housing, and a separate lower seal also residing along the inner diameter of the tubular housing, wherein the upper and lower seals straddle the jetting ports;

and wherein:

when the perforating tool is in its flow-through mode, the working fluid exits the mandrel through the flow ports, but the lower seal prevents working fluid from flowing up the annular region and to the jetting ports, thereby forcing all of the working fluid to flow around the plunger and to the seat; and

when the perforating tool is in its perforating mode, the working fluid exits the mandrel through the slots, and confines all of the working fluid to flow through the jetting ports.

36. A perforating tool for controlling a direction of a working fluid within a wellbore, the wellbore having been lined with a string of production casing, and the perforating tool comprising:

a tubular housing providing an elongated bore through which fluids may be injected, the tubular housing having one or more lateral jetting ports;

a piston disposed proximate an upstream end of the housing, the piston forming a pressure shoulder and having an orifice configured to deliver the working fluid from a wellbore conveyance tubing into the elongated bore of the housing;

a tubular mandrel slidably positioned within the housing, the mandrel having a proximal end connected to or acted upon by the piston, and a distal end forming a plunger;

one or more flow ports; and

a seat disposed along the tubular housing and having a through-opening, the through-opening being configured to slidably receive the plunger when the piston and connected mandrel slide from a raised position to a lowered position along the tubular housing;

and wherein the perforating tool is configured to cycle a position of the mandrel and connected plunger in response to changes in fluid pumping rate into the conveyance tubing such that (i) all working fluid flows through the flow ports in the mandrel and out of the lateral jetting ports in the tubular housing above the seat when the mandrel and connected plunger are in the raised position, and (ii) all working fluid flows through the flow ports and out of the tubular housing below the seat when the mandrel and connected plunger are in the lowered position.

37. The perforating tool of claim 36, wherein:

the plunger comprises a solid body that is operatively connected to the distal end of the mandrel;

the tubular housing comprises a spring housing having an internal shoulder; and

the perforating tool further comprises a spring residing within the spring housing, with an upper end of the spring acting against the piston, biasing the tool in its raised position.

38. The perforating tool of claim 37, wherein the tubular housing further comprises:

an upper sub having a first upper end and a second lower end, wherein the lower end is threadedly connected to an upper end of the spring housing; and

a lower sub having a first upper end and a lower end, with the lower end being operatively connected to a downhole tool.

39. The perforating tool of claim 38, wherein:
the perforating tool further comprises a tubular stem;
an upper end of the stem is threadedly connected to a lower end of the mandrel;
the plunger resides at a lower end of the stem; and
the one or more flow ports comprises two or more flow ports radially disposed around the stem proximate to and above the plunger.
40. The perforating tool of claim 39, wherein the downhole tool is (i) a positive displacement motor, (ii) a bridge plug, or (iii) an extended reach tool.
41. A method of operating a perforating tool in a wellbore, comprising:
(a) placing a perforating tool in the wellbore along a string of production casing;
(b) locating the perforating tool and a connected downhole tool within the wellbore;
(c) pumping fluid down the wellbore and into the perforating tool at or above an activation rate, causing the tubular mandrel and connected plunger to move through a seat to a lowered position such that all fluid flows through the perforating tool (a flow-through mode);
(d) pumping the fluid down the wellbore and into the perforating tool at a rate at or above the activation rate such that all fluid flows through lateral jetting ports; and
(e) continuing to pump the perforating fluid down the wellbore and into the perforating tool at a rate at or above the activation rate in order to hydraulically perforate a surrounding string of production casing.
42. The method of claim 41, wherein the perforating tool comprises:
a tubular housing providing an elongated bore through which the fluid is injected, the tubular housing containing the lateral jetting ports;
a piston disposed at an upstream end of the housing, the piston forming a pressure shoulder and having an orifice configured to deliver working fluid from a conveyance string to the elongated bore of the housing;

a tubular mandrel slidably positioned within the housing, the mandrel having a proximal end connected to or acted upon by the piston, and a distal end forming a plunger; one or more flow ports; and

a seat disposed along the tubular housing and having a through-opening, the through-opening being configured to slidably receive the plunger when the piston and connected mandrel slide from a raised position to a lowered position along the tubular housing.

43. The method of claim 42, wherein the perforating tool further comprises:

a lower sub having a first upper end proximate to the seat, and a lower end operatively connected to a downhole tool.

44. The method of claim 43, wherein:

the downhole tool is a positive displacement motor, with the positive displacement motor being configured to rotate a connected mill bit in response to hydraulic pressure received when the perforating tool is in its flow-through mode; and

the method further comprises milling out a plug or debris located in the wellbore below the bottom sub using the positive displacement motor.

45. The method of claim 43, wherein:

the downhole tool is a shifting tool, with the shifting tool being configured to shift a sliding sleeve along the wellbore in response to hydraulic pressure received when the perforating tool is in its flow-through mode; and


the method further comprises shifting a sliding sleeve located in the wellbore below the bottom sub using the shifting tool.


46. The method of claim 43, wherein:


the downhole tool is a bridge plug; and

the method further comprises setting the bridge plug in the wellbore below the bottom sub in response to hydraulic pressure received when the perforating tool is in its flow-through mode.

47. The method of claim 43, wherein:
the downhole tool is a bridge plug; and
the method further comprises setting the bridge plug in the wellbore below the bottom sub in response to movement of the conveyance tubing.
48. The method of claim 43, wherein:
the downhole tool is an extended reach tool, with the extended reach tool being configured to generate fluid pressure pulses in response to hydraulic pressure received when the perforating tool is in its flow-through mode; and
the method further comprises reducing coiled tubing friction by generating fluid pressure pulses below the bottom sub using the extended reach tool.

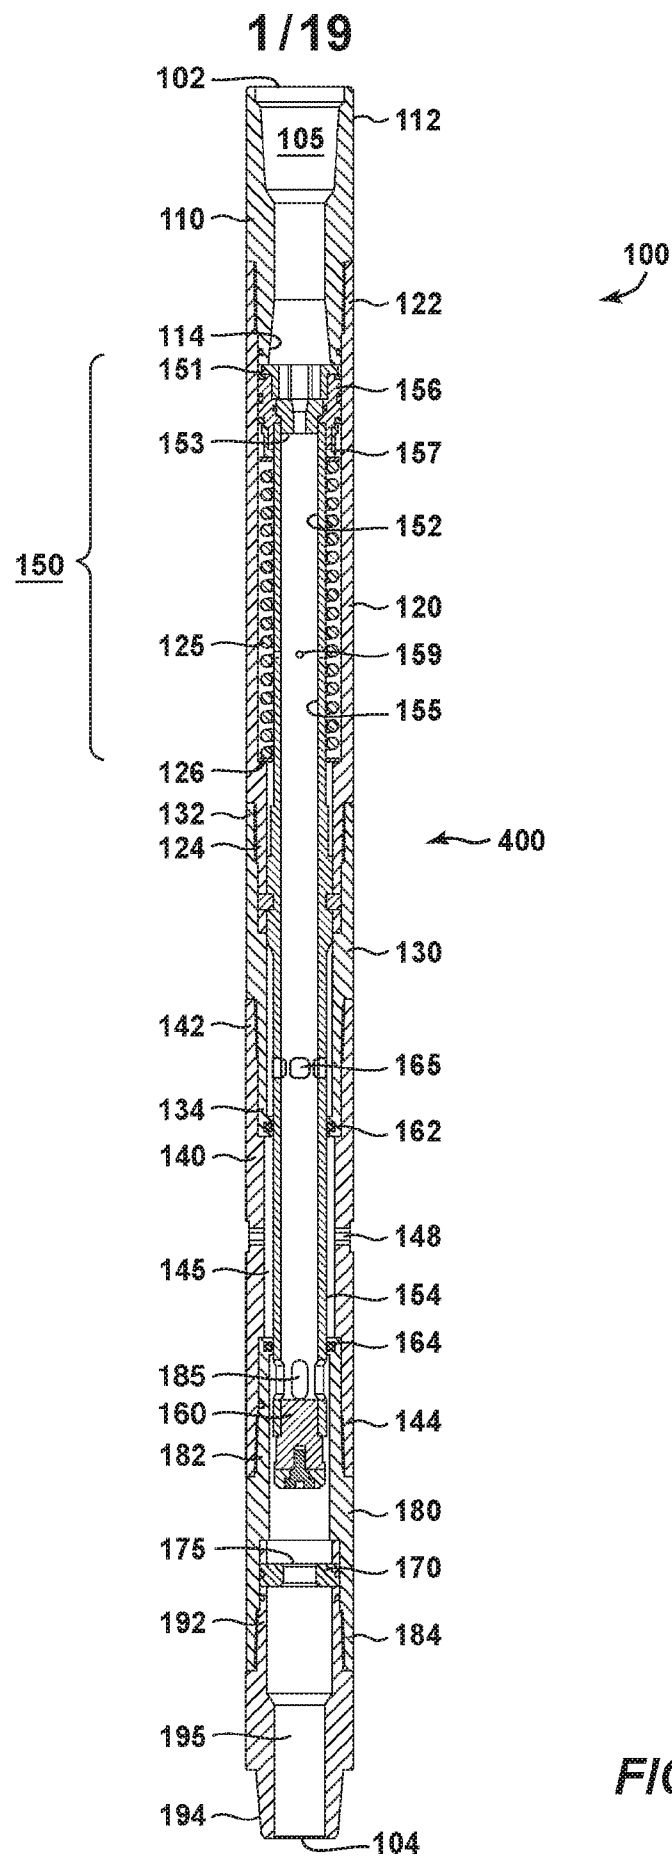

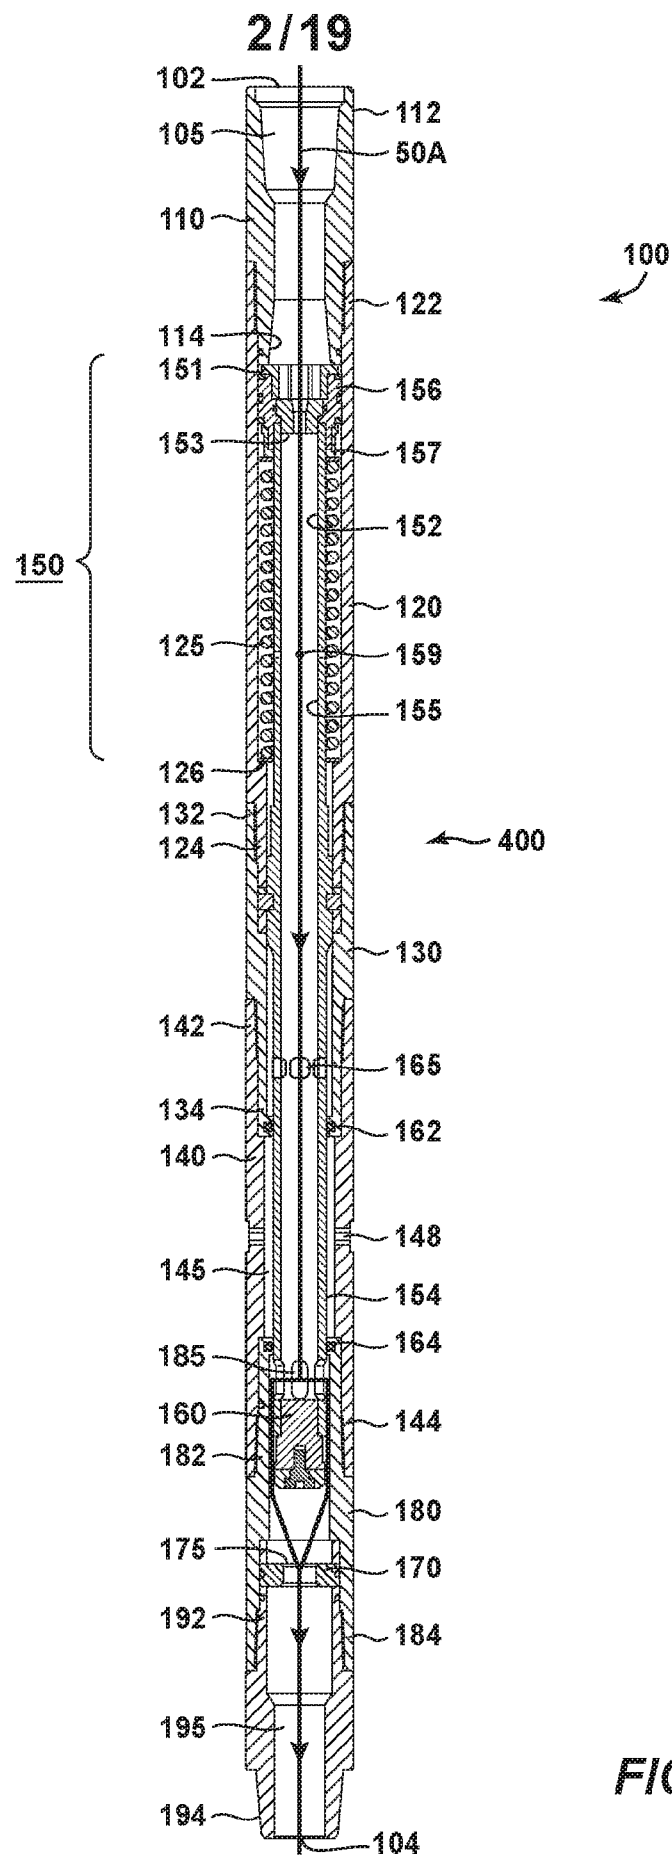

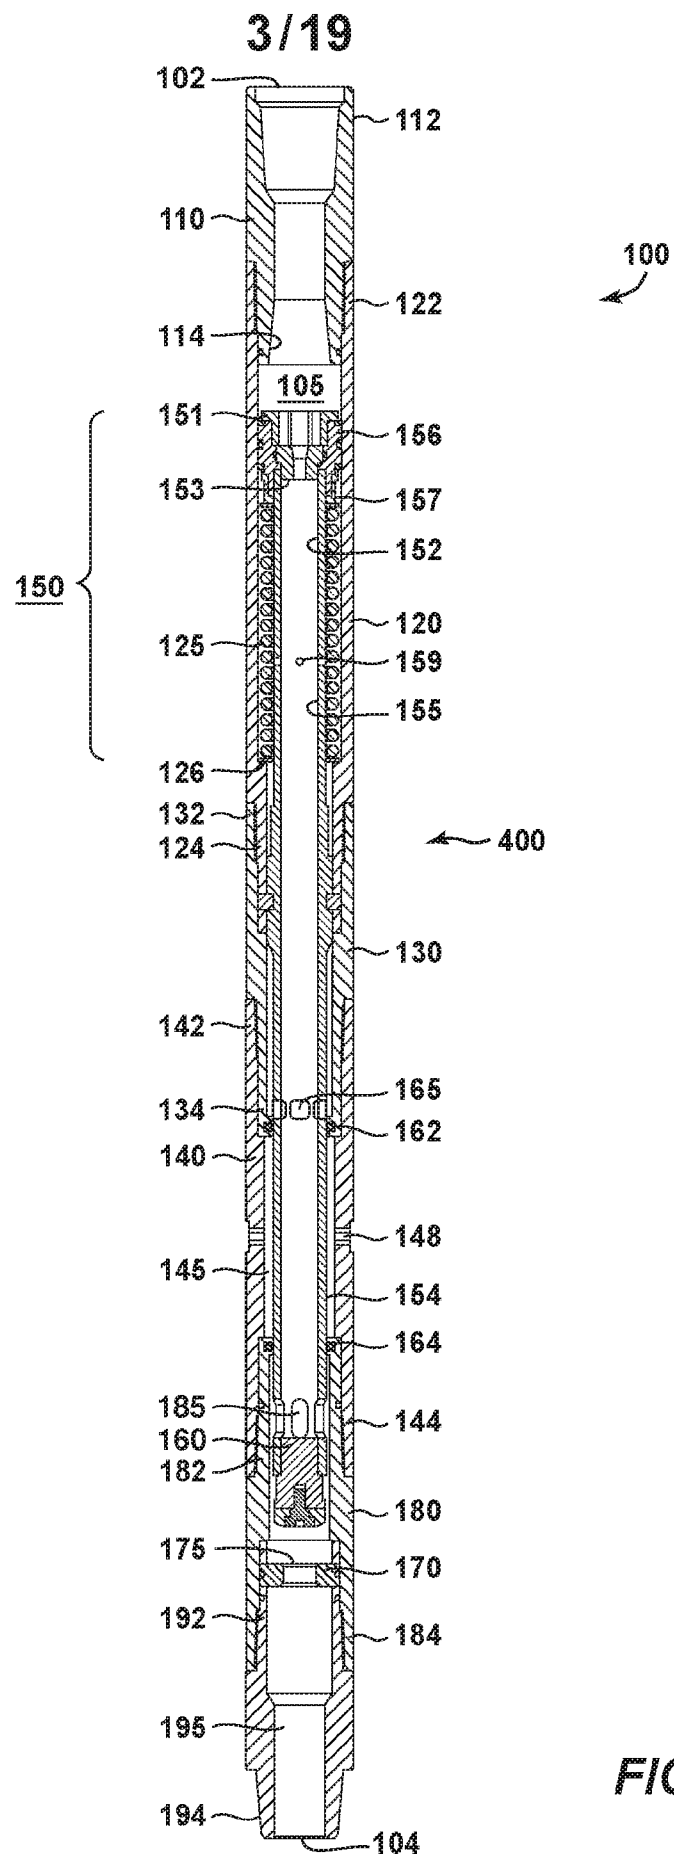


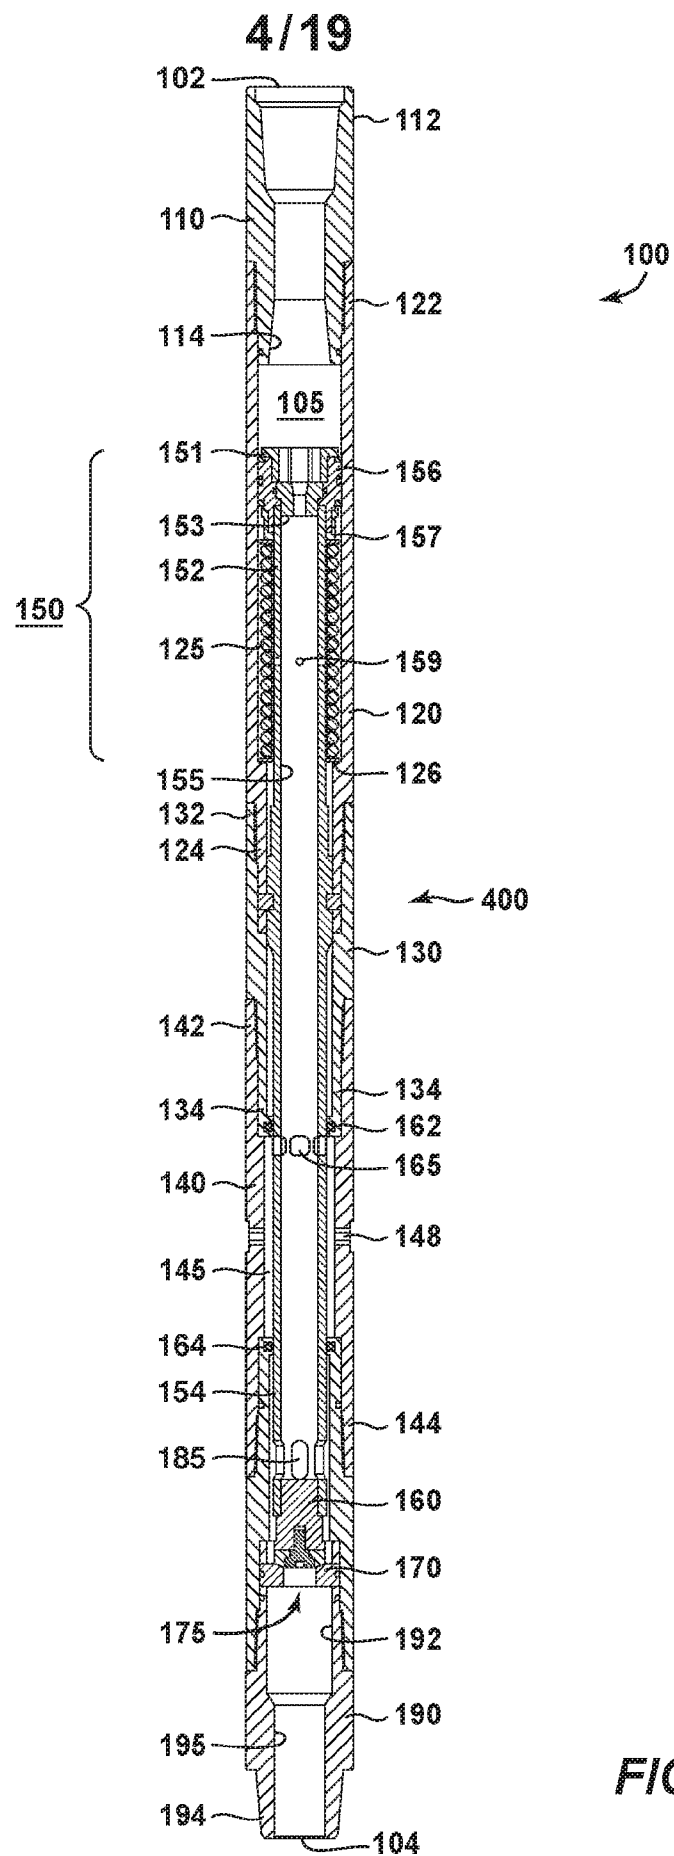


FIG. 2A

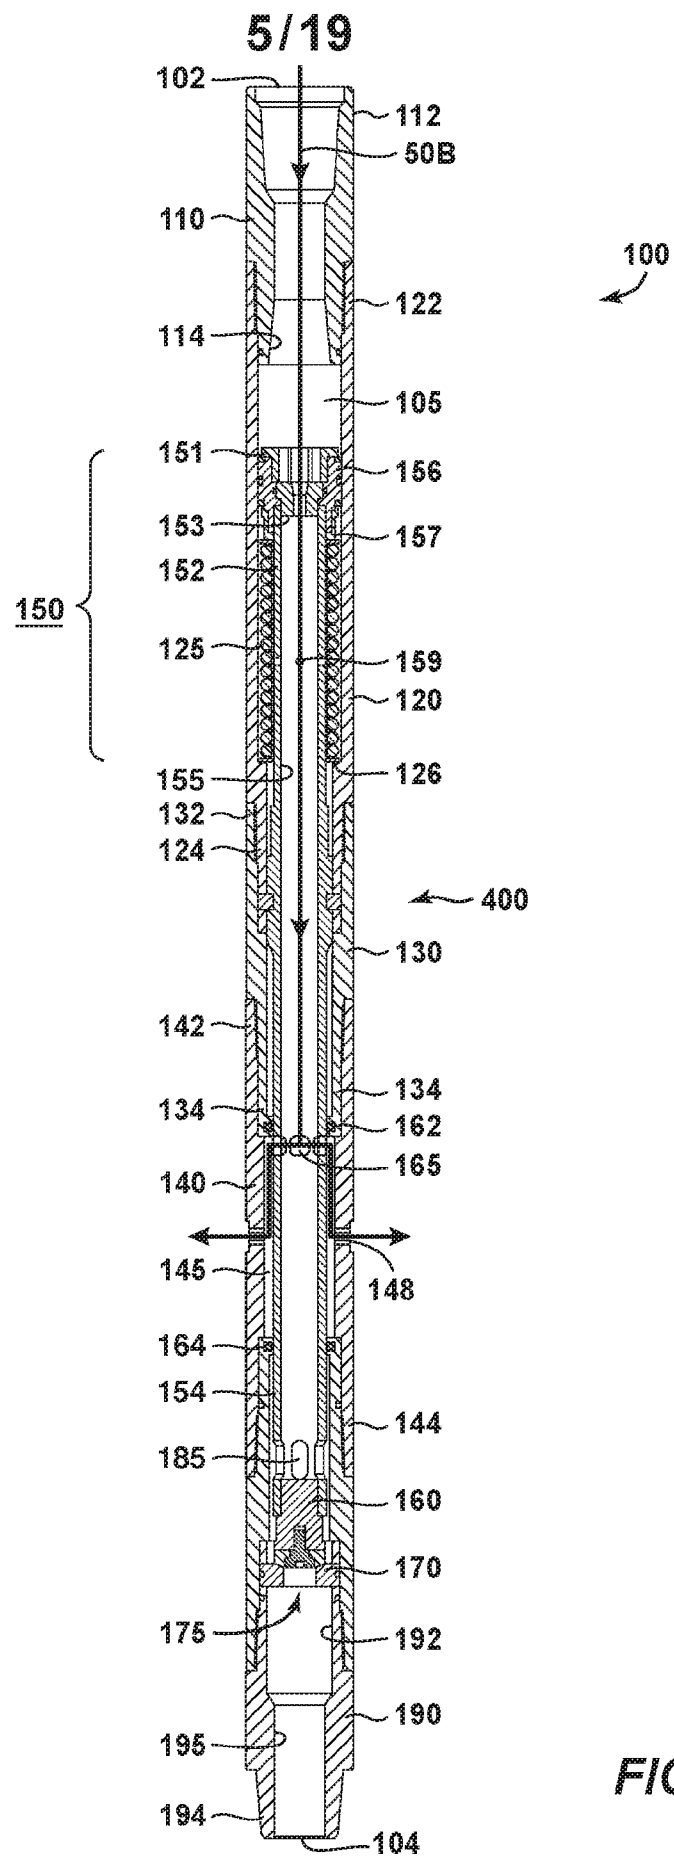

6/19

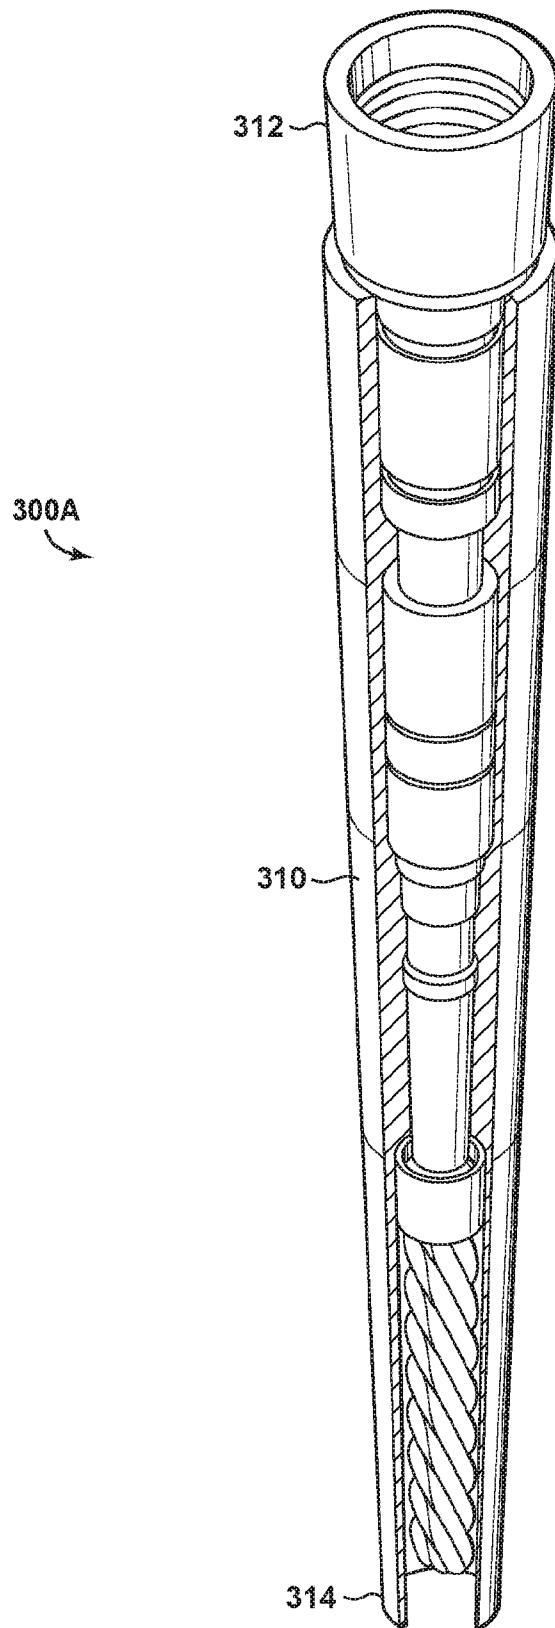


FIG. 3A

7/19

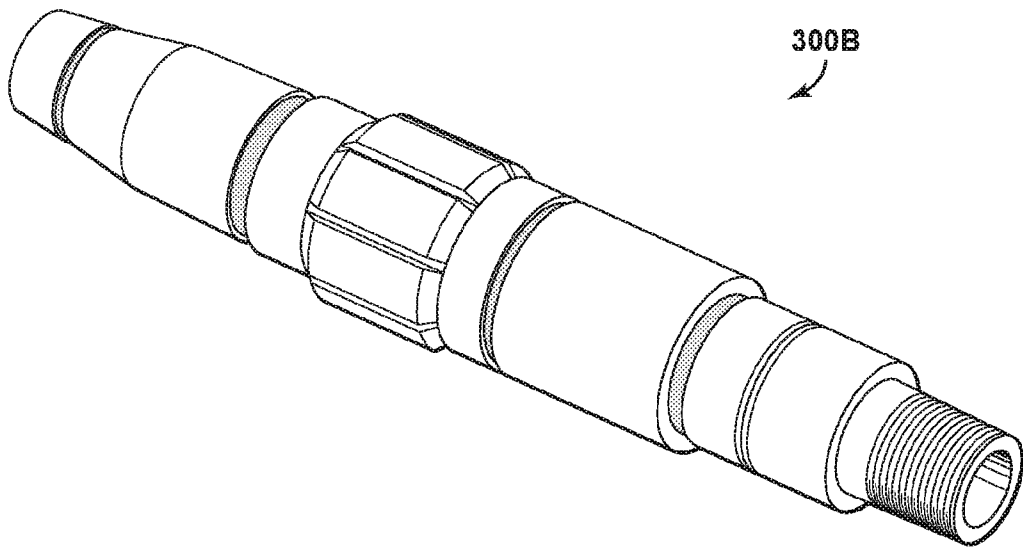


FIG. 3B

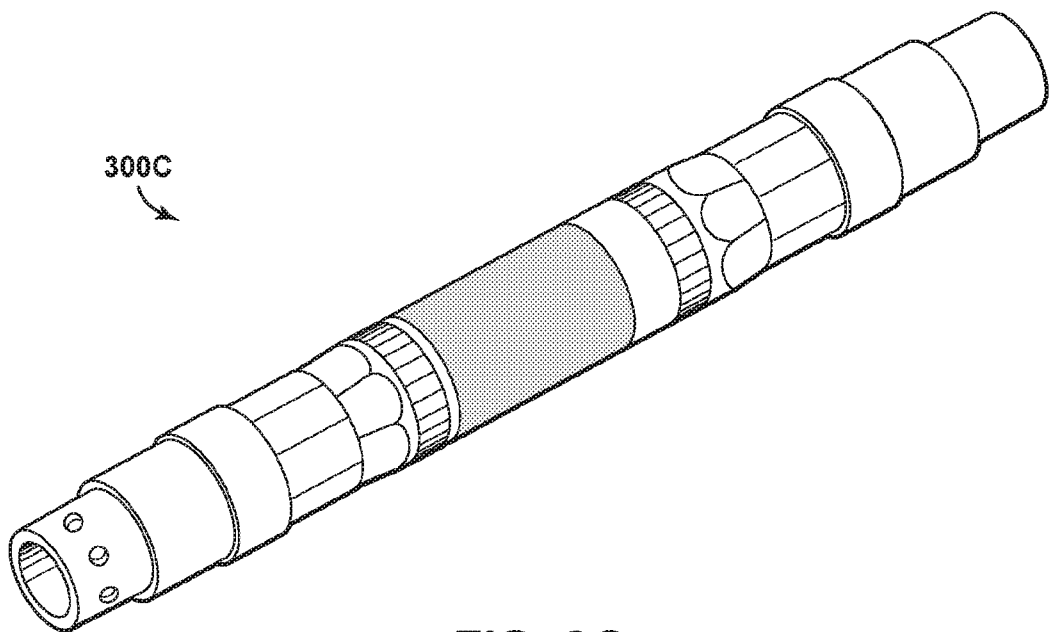


FIG. 3C

8/19

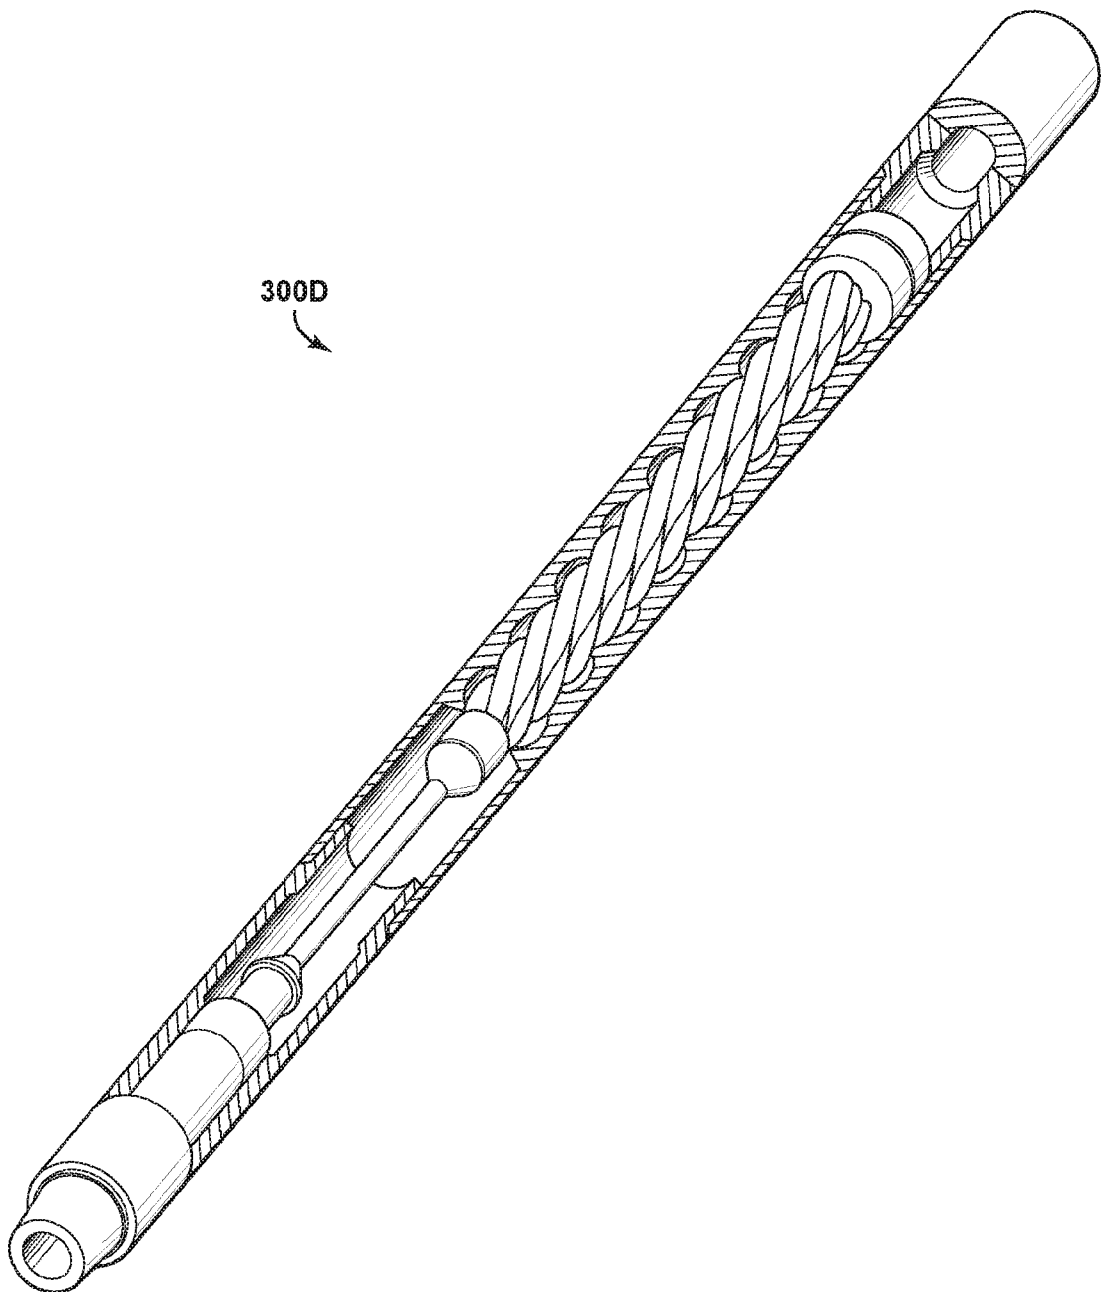


FIG. 3D

9/19

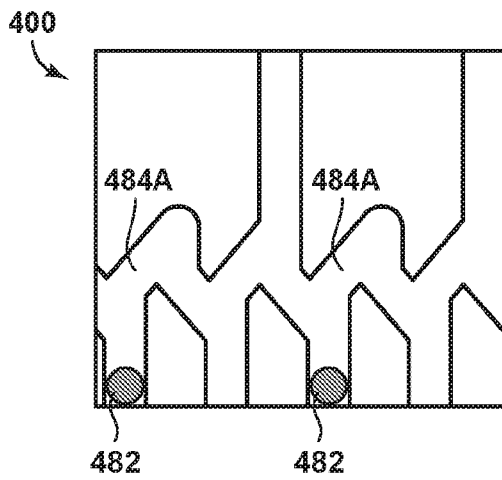


FIG. 4A

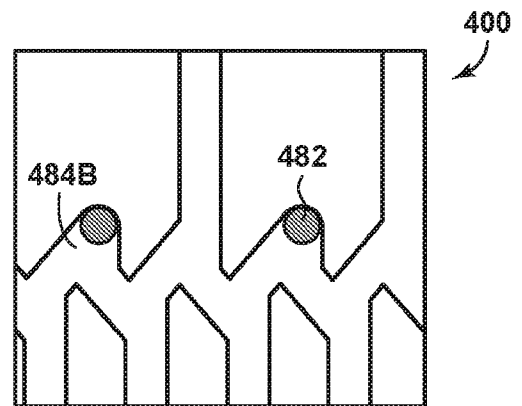


FIG. 4B

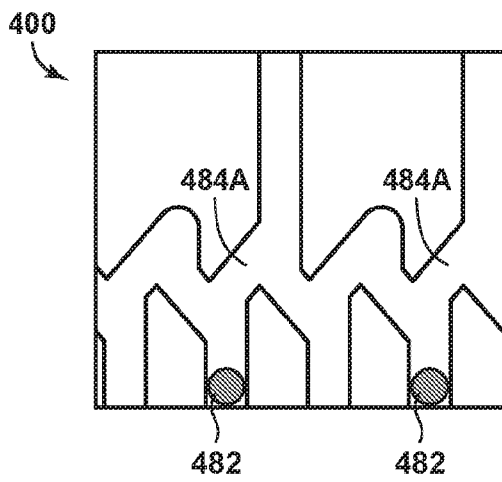


FIG. 4C

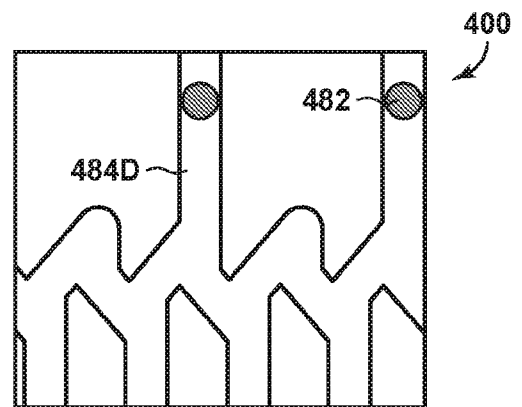


FIG. 4D

10/19

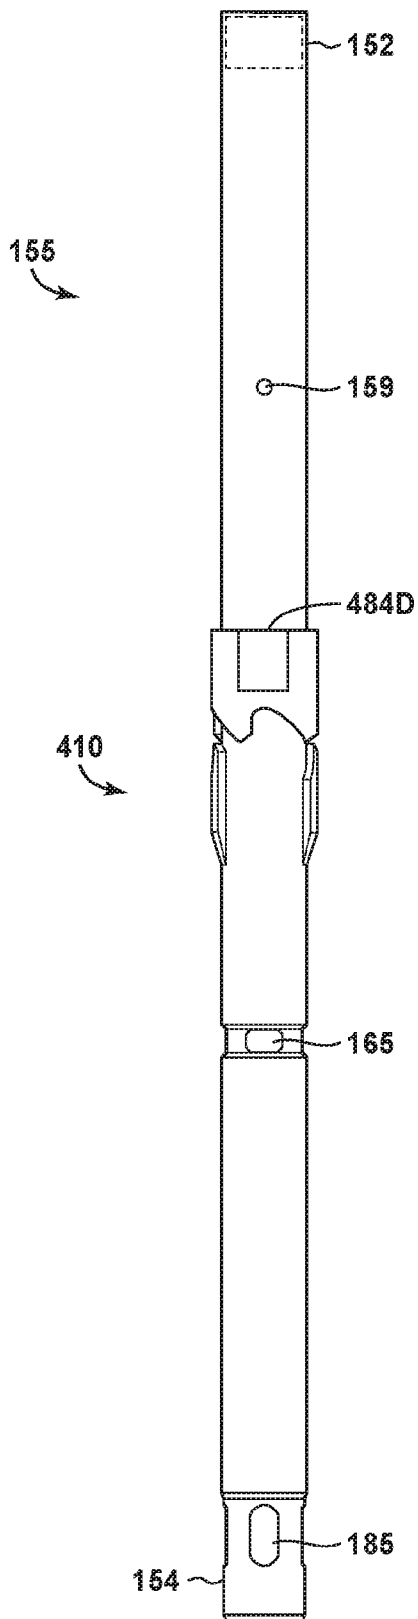


FIG. 5A

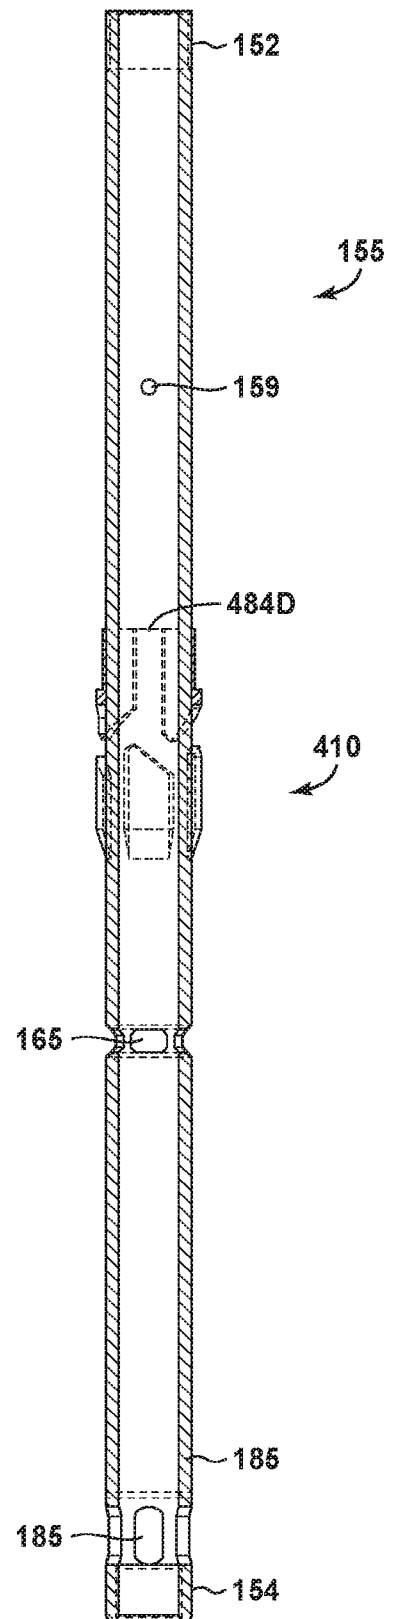


FIG. 5B

11/19

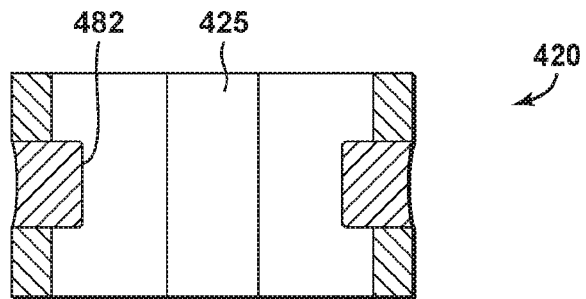


FIG. 6A

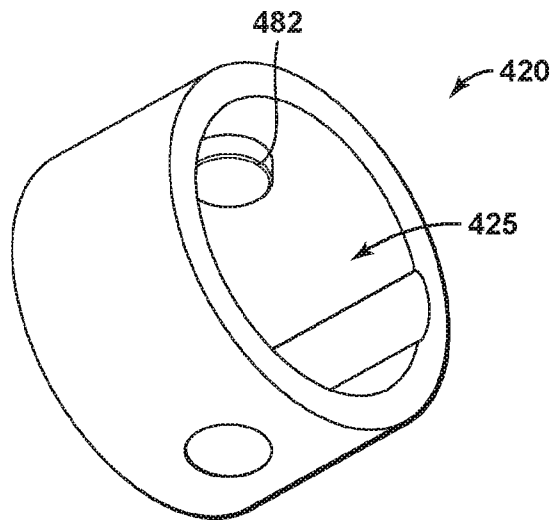


FIG. 6B

12/19

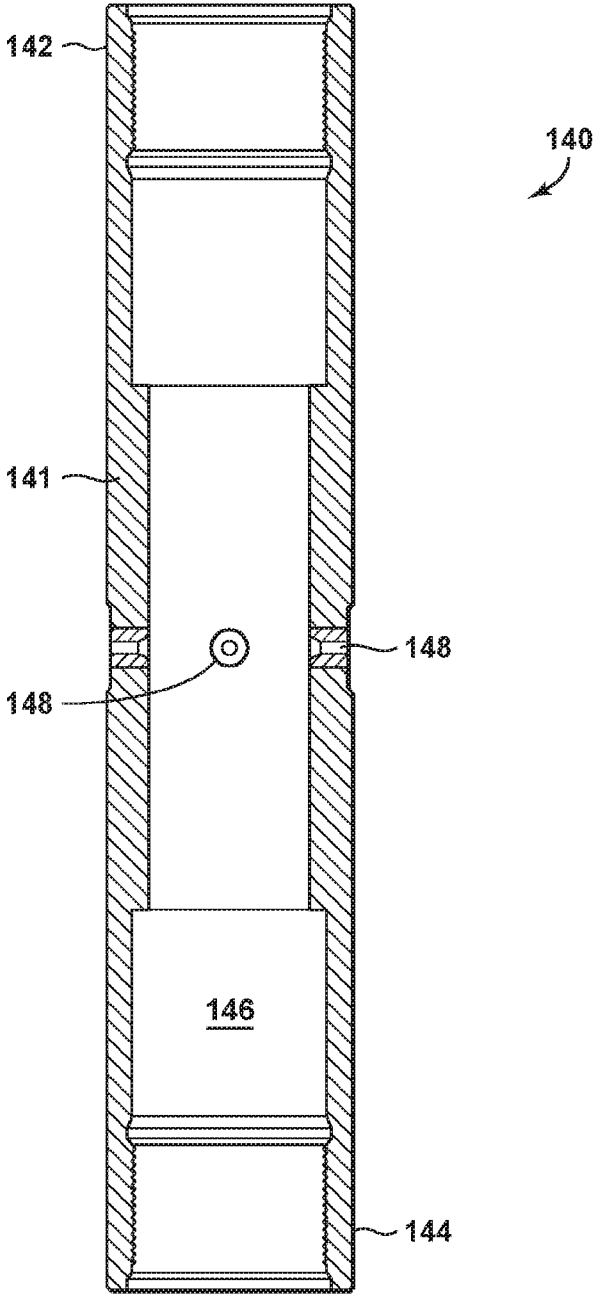


FIG. 7

13/19

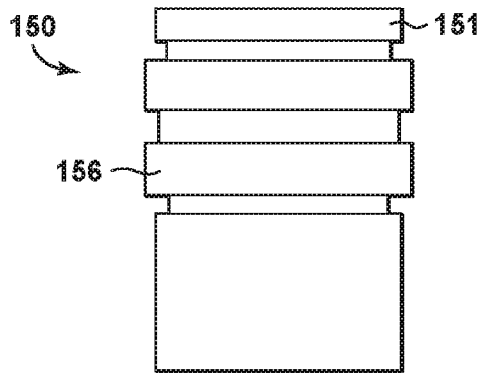


FIG. 8A

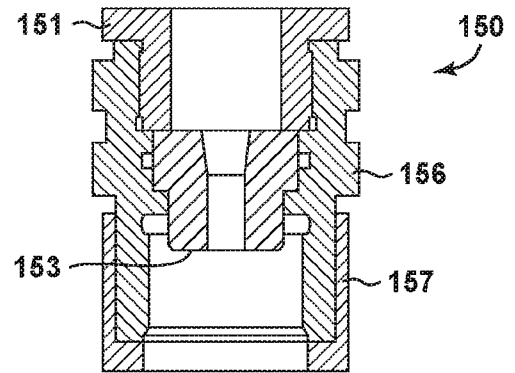


FIG. 8B

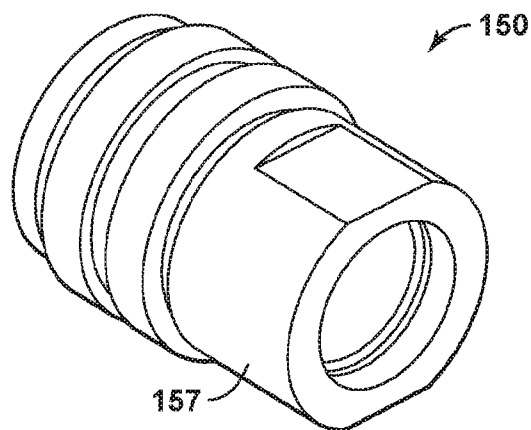


FIG. 8C

14/19

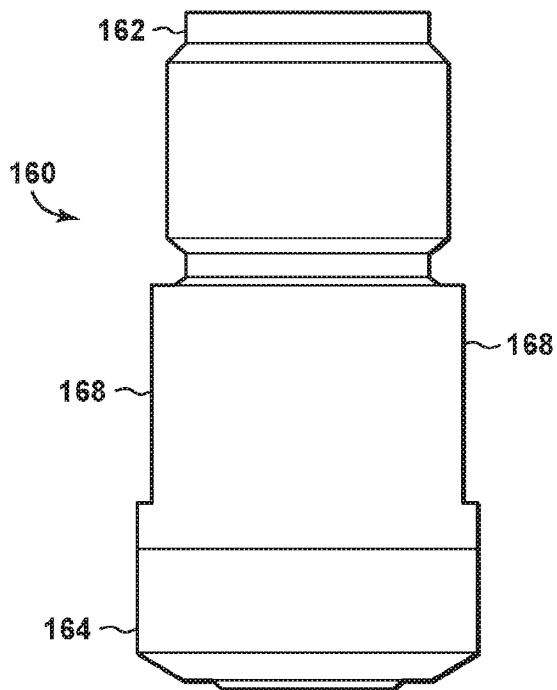


FIG. 9A

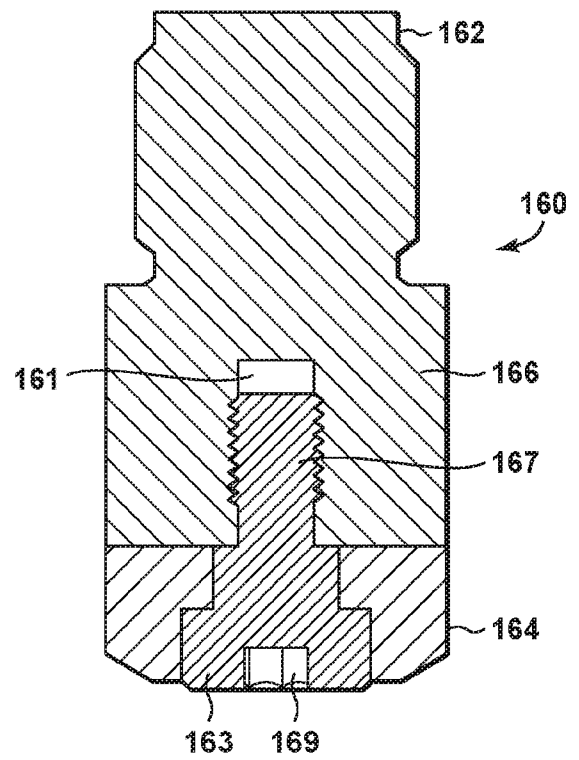


FIG. 9B



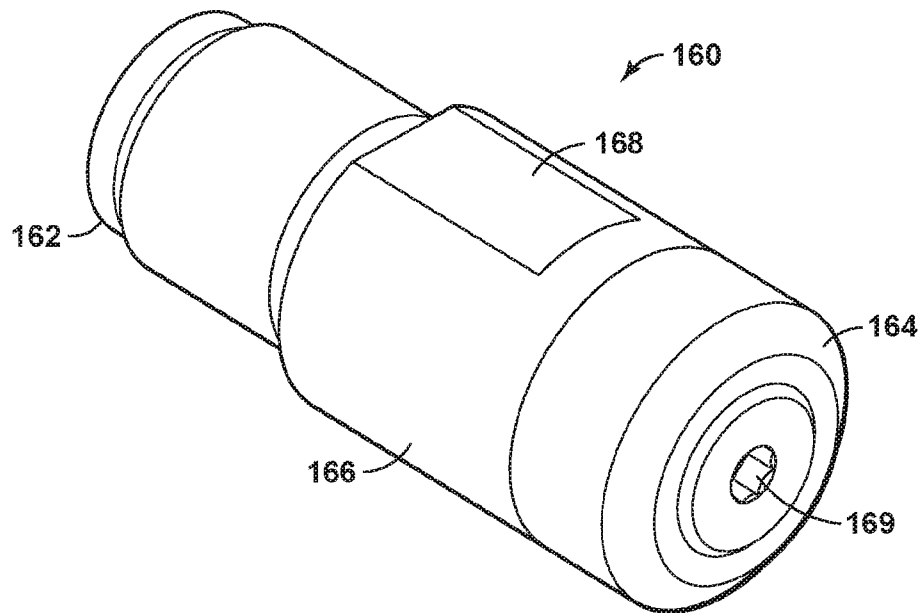



FIG. 9C


15/19


FIG. 10

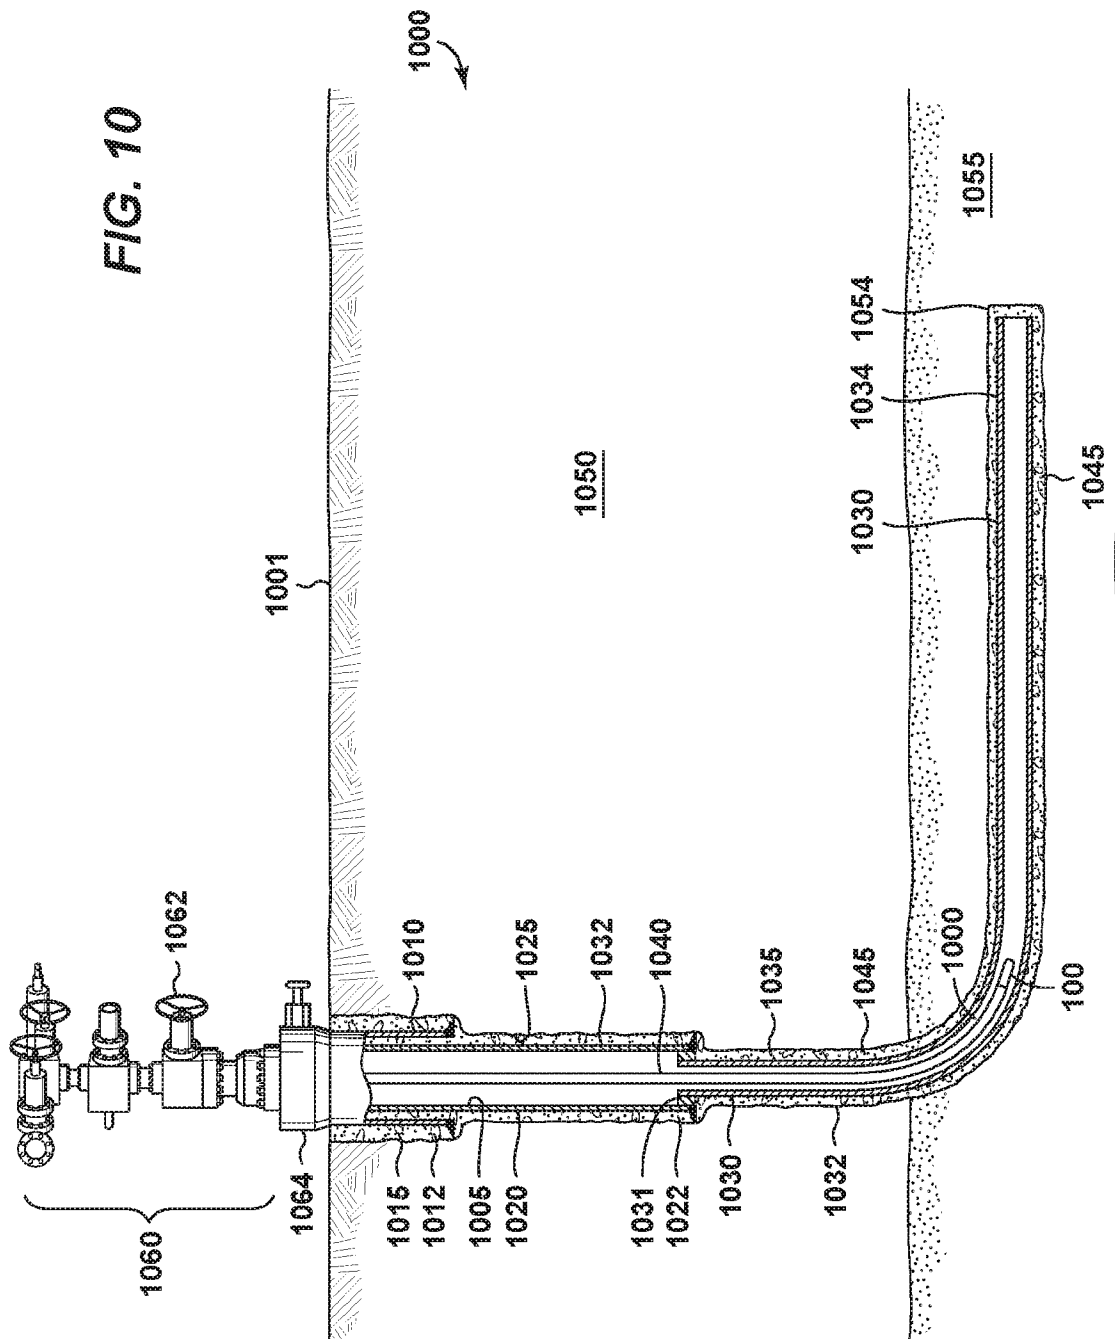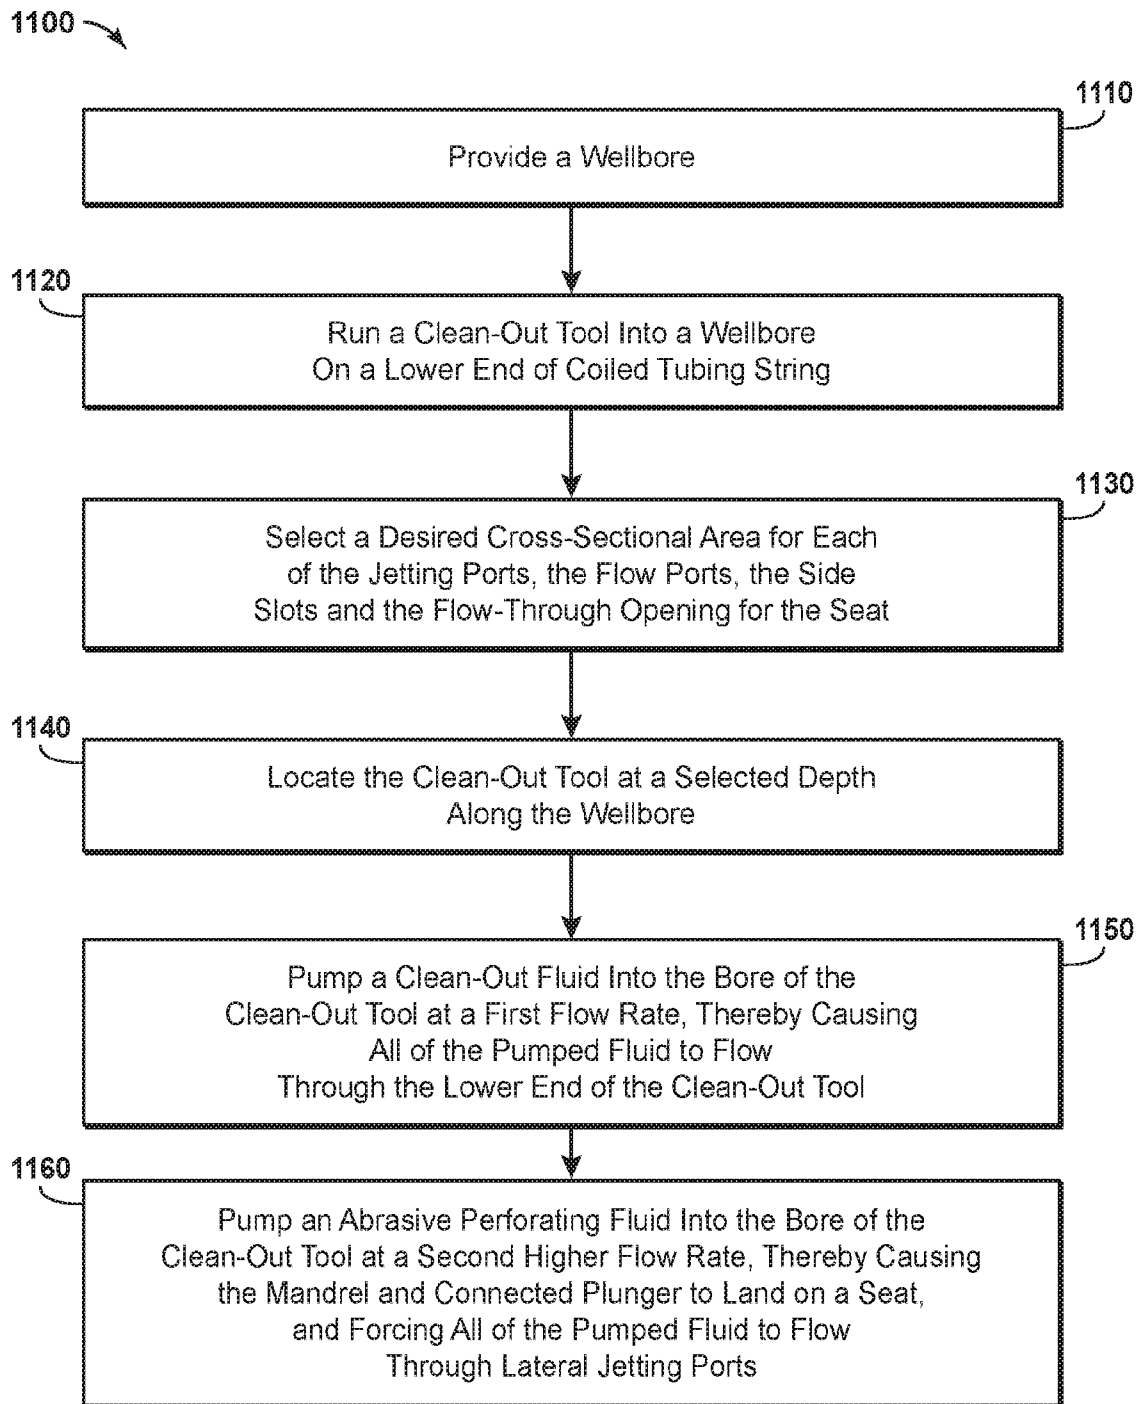

16/19**FIG. 11**

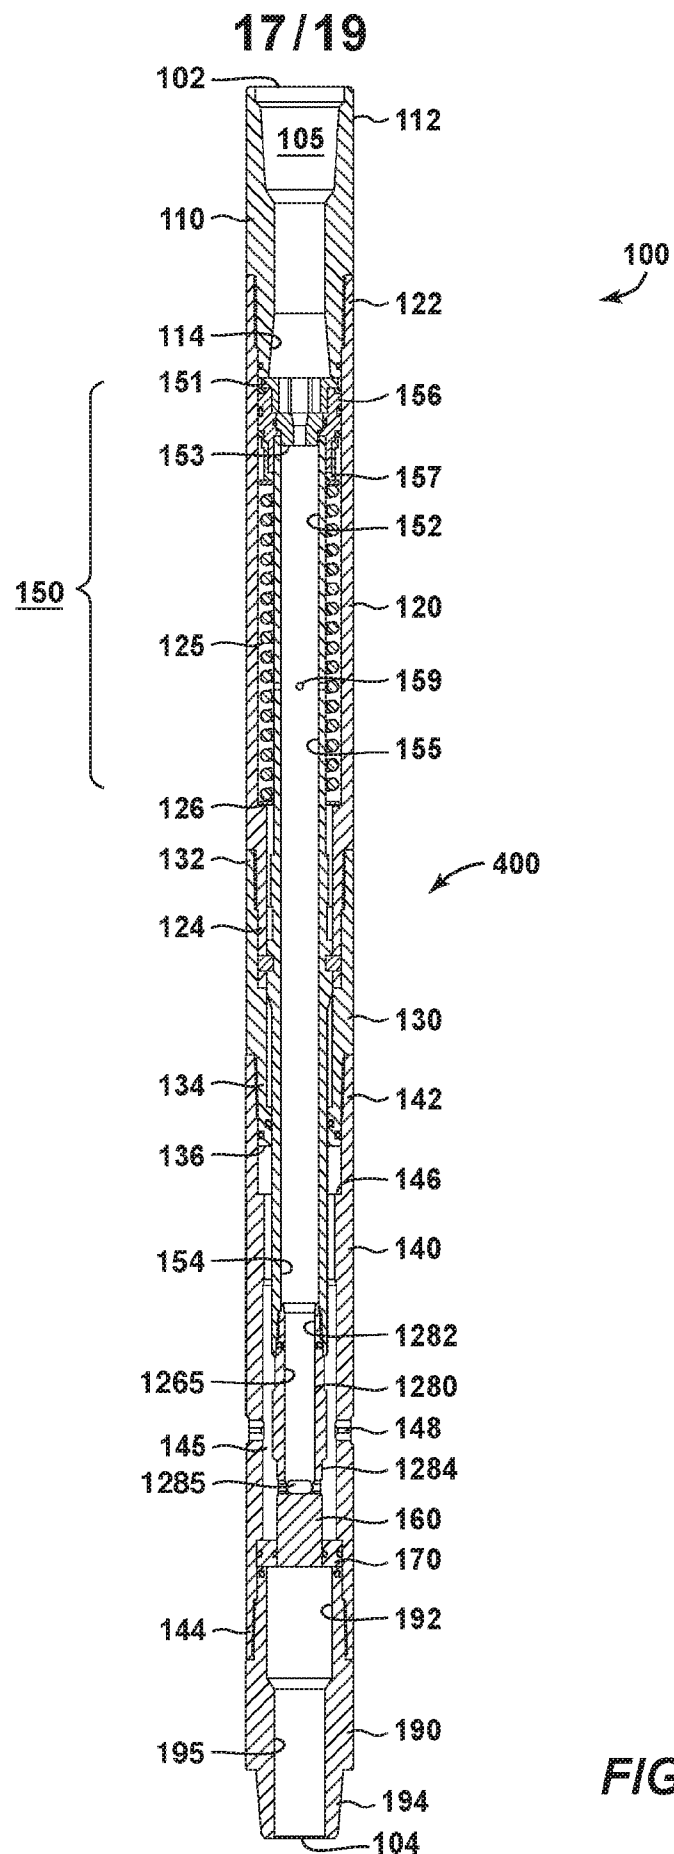

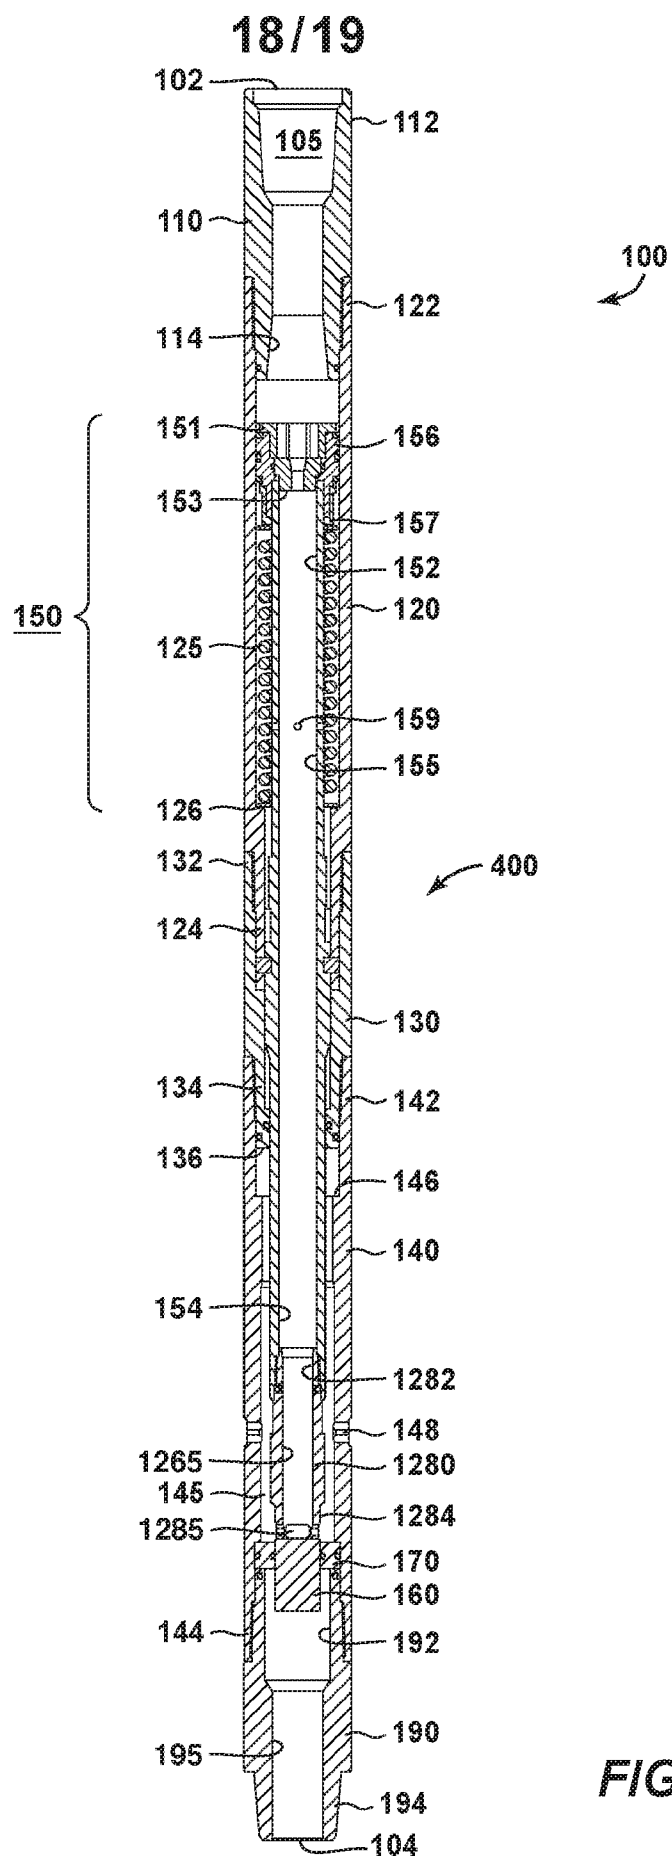

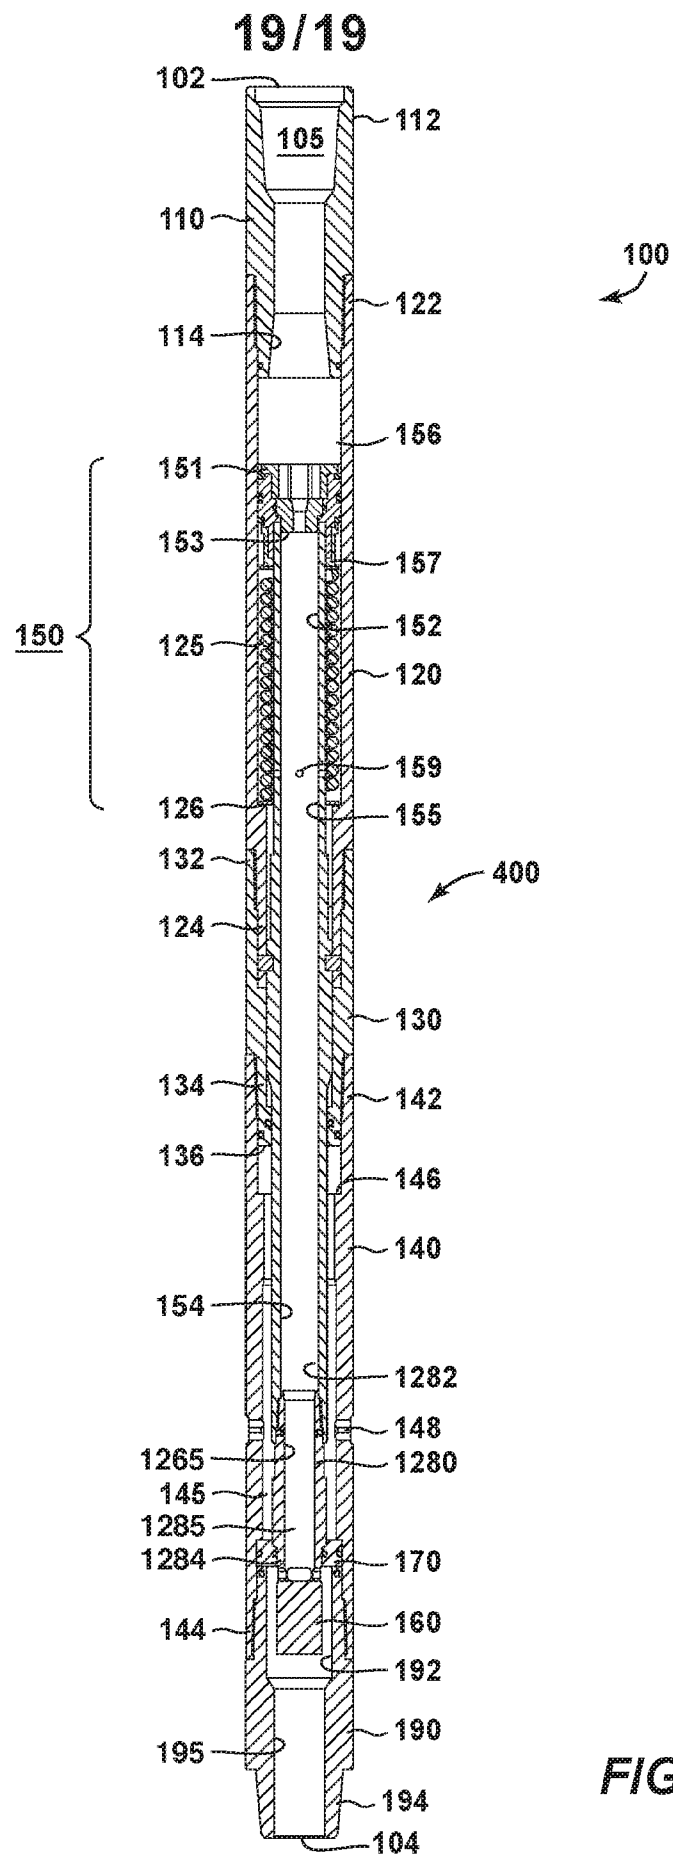**FIG. 12C**