




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G06K 11/18, G06F 3/033		A1	(11) International Publication Number: WO 00/70551
			(43) International Publication Date: 23 November 2000 (23.11.00)
(21) International Application Number: PCT/US00/12995 (22) International Filing Date: 11 May 2000 (11.05.00) (30) Priority Data: 09/311,869 14 May 1999 (14.05.99) US (71) Applicant: CBD TECHNOLOGIES, INC. [US/US]; 1485 Bent Trail Circle, South Lake, TX 76092 (US). (72) Inventors: VANNESS, Keith, A.; 3605 Greenbrier Boulevard, Apt. 86B, Ann Arbor, MI 48105 (US). VANNESS, George, K.; 1485 Bent Trail Circle, South Lake, TX 76092 (US). MARSHALL, William; 216 Lakeland Drive, Highland Village, TX 75060 (US). (74) Agents: GREENFIELD, Steven, R. et al.; Jenkins & Gilchrist, P.C., 3200 Fountain Place, 1445 Ross Avenue, Dallas, TX 75202-2799 (US).		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: STYLUS PEN FOR WRITING ON THE MONITOR

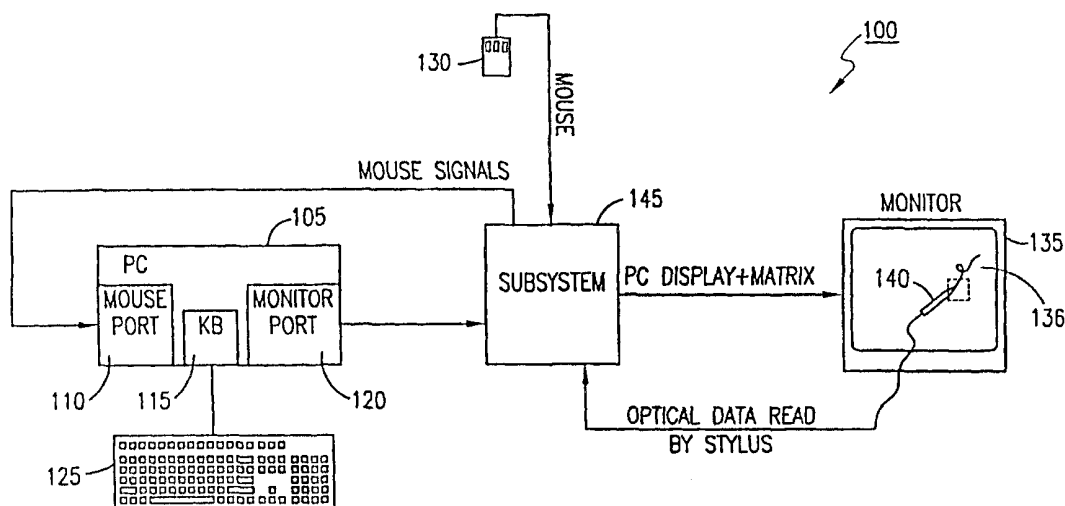

(57) Abstract

A system, method, and apparatus for enabling a user to draw high resolution graphical images onto a monitor or display screen are presented. Graphical location indicia corresponding to display screen locations are displayed on the monitor or display device. When the tip of a stylus pen is placed onto the monitor or display device, a location indicator displayed at display location thereunder is optically detected by the stylus pen. The stylus pen then transmits corresponding electronic signals to a subsystem which determines a pixel location corresponding to detected location indicator. A tracking algorithm is also presented wherein vector indicia are projected in a localized region surrounding the location of the stylus pen. The tracking algorithm permits fast tracking of the stylus pen at rates exceeding the refresh speed, as well as minimizing the obstruction to the graphical images displayed on the monitor or display device.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

STYLUS PEN FOR WRITING ON THE MONITOR

BACKGROUND OF THE PRESENT INVENTION

Field of the Invention

The present invention relates generally to computer graphics, and more particularly to inputting high resolution images into a computer system by moving a stylus pen over a display screen.

Description of Related Art

There has been a need for accurate computer pens, known as light pens or stylus pens, which would allow users to input high resolution images, such as handwriting, into computer systems. At present, slow, low resolution computer pens are available. Ideally, a stylus pen used in connection with a graphical user interface should make operating a computer system more intuitive and user-friendly. The goal of prior art stylus pens was to allow a user to input a graphical image into a graphical user interface by placing the stylus pen over the display device and drawing the graphical image, similar to using a writing pen, but the prior art stylus pens could not keep pace with a user's movements were inaccurate, and provided poor graphic resolution.

Stylus pens in general have a configuration similar to that of writing pens. They are used to effectively write on the computer monitor screen. For decades, engineers have tried to develop a display level input device, i.e., a location/touch sensitive display screen. The key factor concentrated on in prior art has been how to get the display screen to register the stylus location rather than have the stylus determine its location on the screen. A brief analysis of existing technology demonstrates that some success has been found by switching the direction of the stylus location determination. Specifically, the stylus pen can be used to determine its location on the

display surface, rather than trying to get the display surface to register the location of the stylus pen. To this extent, prior stylus pens rely on detecting the passage of the display monitor's electron beam as the display is refreshed. The timing of the electron beam detection is used to determine the stylus pen's display location.

Prior stylus pens operate using a variety of techniques to produce a graphical effect on the display screen. Such techniques include or require (1) a specially designed display screen, and/or (2) the tracking of the vertical synchronization pulse, to name a few.

U.S. Patent 3,543,240 issued to Miller, et. al, discloses a stylus pen operating with a remote display which includes a set of counters. The counters are reset by computer instruction and count certain events. When the stylus pen detects a passing electron beam, an electronic pulse is produced by the stylus pen's circuitry causing the counters to stop. The values of the counters can then be used to determine the pixel location of the stylus pen. This technique has proven over time to be slow and inaccurate.

U.S. Patent 3,949,391 issued to Benjamin, discloses a plasma panel stylus pen system, wherein the synchronization electron beam is first coarsely detected when the stylus pen touches the screen and thereafter more finely detected. The foregoing, however, requires a specialized display device having circuitry which only scans the area about the coarsely detected region to determine the location of the stylus pen.

U.S. Patent 5,187,467 issued to Myers, discloses a stylus pen system capable of detecting horizontal and vertical synchronization signals. Here counters are utilized to determine where the stylus pen's location is based on the detection of a synchronization pulse.

U.S. Patent 3,337,860 issued to O'Hara, U.S. Patent 3,413,540 issued to Haring, U.S. Patent 5,227,622 issued to Suzuki, U.S. Patent 4,620,107 issued to Frame, and U.S. Patent 4,675,665 issued to Halliwell each tend to disclose systems in which the location of the stylus pen is determined by detection of the passing of and synchronization with the scanning electron beam as it moves across the monitor's screen.

Each of the above stylus pen systems are disadvantageous because of reliance on detection of the passing of and synchronization with the monitor's scanning electron beam. This makes the system inherently slow and inaccurate due to the difficulty in catching and synchronization with a single pulse of the passing electron beam. Furthermore, the prior art stylus pen systems have a wide field of view that encompasses several horizontal lines of the electron beam raster. Therefore, the detected pulse may actually be a series of discontinuous pulses or may have an inaccuracy of two to three raster lines. Additionally, the size of the field of view varies depending on the type of phosphor used within the display screen, the distance between the pen and the phosphor, and the intensity of the electron beam's light. Furthermore, these prior art systems generally do not work with liquid crystal displays (LCDs) or plasma displays common to laptop computer systems. Reliance on the passing electron beam limits the pixel location sampling rate of the stylus pen to the screen refresh rate. Additionally, detection of the passing electron beam is more suited for monochrome CRT displays as opposed to the present day more common, color displays.

Therefore, there is a need for a method and system which determines the location of a stylus pen independently from the electron beam and which does not require special circuitry built into the display screen's surface. There

is also a need to provide a system wherein a conventional display device and a general purpose computer system can be easily adapted for use with the stylus pen. There is also a need to efficiently track the movement of the stylus pen to produce a high resolution mechanism for producing graphics on a display screen via a stylus pen.

SUMMARY OF THE INVENTION

An embodiment of the present invention provides a stylus pen that can be used to effectively produce graphics on a computer's display when the stylus pen is touched to the display screen. Such graphics are produced via the stylus pen reading a "hidden" or inlayed pixel pattern embedded in the display screen's picture or graphics.

An embodiment of the present invention determines the location of a stylus pen independently of a monitor's scanning electron beam.

An embodiment of the present invention provides a system wherein a conventional display device and a general purpose computer system can be easily adapted for use with the stylus pen.

An embodiment of the present invention efficiently tracks movement of the stylus pen at a rate that can keep pace with a user's normal hand movements.

An embodiment of the present invention displays location indicia or an inlayed pixel pattern on the display device's screen. The location indicia are readable by the stylus pen. In one embodiment, the location indicia is provided by a subsystem, or circuitry which can be connected between the display device and a general purpose computer system or built into the general purpose computer. The subsystem receives graphic images for the display device and may interleave the graphic images with the location indicia. The graphic images, interleaved with the location indicia are then displayed on the display device.

When the stylus pen is directly over an area on the display device, the stylus pen reads the interleaved pixel location indicia, and provides the location indicia to the subsystem. The subsystem then determines the location and/or movement of the stylus pen. The determined location of the stylus pen is then provided to the general purpose computer system, via a mouse port or other suitable mechanism or data port.

In an alternate embodiment, a computer system with the stylus pen is disclosed without a subsystem externally connected between the stylus pen and the general purpose computer. The computer system transmits graphic images interleaved with the location indicia to the display device. The stylus pen can read the location indicia from the screen and transmit the read location indicia from the screen to the computer system. The computer system then calculates the location and/or movement of the stylus pen.

Additionally, a method for locating and tracking the movement of the stylus pen is presented. The status of the stylus pen is continuously polled. When the status of the stylus pen changes from disengaged to engaged (i.e., the stylus pen is placed in contact with the display device's screen), the location indicia is displayed in an array format of the display device. The stylus pen can optically read the location indicia. The read pixel location indicia is used to determine the location of the stylus pen. After determining the location of the stylus pen, a direction box including localized vector indicia about a smaller localized area surrounding the determined stylus pen contact location is displayed on the display device. As the stylus pen is moved across the screen, the localized vector indicia is read, movement vectors describing the movement of the stylus pen are determined, and the direction box is repositioned to follow the movement of the stylus pen. Pen-like graphics can be placed on the screen

to provide high resolution "writing" on the screen as the stylus moves across the screen.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Various objects and advantages of this invention will become apparent and more readily appreciated from the following description of the presently preferred exemplary embodiments, taken in conjunction with the accompanying drawings, of which:

10 FIGURE 1 is a block diagram of a system configured in accordance with an exemplary embodiment of the present invention;

FIGURE 2 is a block diagram of an exemplary stylus pen in accordance with the present invention;

15 FIGURE 3 is a diagram of a monitor displaying pixel location indicia in accordance with the present invention;

FIGURE 4 is a diagram of a monitor displaying localized vector indicia about a location of a stylus pen in accordance with the present invention;

20 FIGURE 5 is a block diagram of an exemplary subsystem in accordance the principals of the present invention;

25 FIGURE 6 is a flow diagram describing the operation of the subsystem in accordance with the present invention; and

FIGURE 7 is a block diagram of a computer system in accordance with another exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS
OF THE PRESENT INVENTION

An exemplary stylus pen in accordance with the present invention implements a digital solution for whiteboard or freehand drawing technology which allows the stylus pen to be used for a wide variety of uses. The stylus pen can be used to allow freehand input directly into graphical operating environments and applications during business conferences. Graphic artists can use an exemplary stylus pen apparatus in a freehand manner directly with drawing applications. Persons with carpal tunnel syndrome, or who are otherwise unable to type, may use the exemplary stylus pen instead of a keyboard.

By designing the exemplary stylus pen to operate as a peripheral, the stylus pen can be flexibly used with general purpose computer systems. The exemplary peripheral design permits the stylus pen to be used with a wide variety of commercially available monitors. The stylus pen can also be used with television sets configured to operate as a computer display, as well as backlit monitors and plasma panels. The exemplary peripheral design also permits the stylus pen to be used either in conjunction with a mouse or as a substitute therefore. The foregoing may be achieved by integrating the exemplary stylus pen with a device enabling the monitor to act as a transmitter. An optical sensor in the stylus pen acts as a receiver.

Referring now to FIGURE 1, there is illustrated a block diagram of an exemplary computer system, referred to generally by the numeral 100, configured in accordance with a first embodiment of the present invention. The system 100 includes a general purpose computer system 105 with a mouse port 110, a keyboard port 115, and a monitor port 120. The computer system 105 performs general computer processing tasks and can be operated in a stand-alone mode or be connected to additional computers to form a computer

network. The general purpose computer 105 receives user inputs through the mouse port 110 and the keyboard port 115 and transmits outputs from the monitor port 120.

5 The computer system 105 is configured to receive inputs, and to transmit outputs using electronic data signals. Peripheral devices are connectable to the computer system 105 to serve as an interface for inputs to be received from, and outputs to be communicated to users. Peripheral devices include, for example, a keyboard 125, a
10 mouse 130, and a monitor 135. The keyboard port 115 is connectable to keyboard 125, permitting the user to provide text-based inputs. The mouse port 110 is connectable to a motion based user input device, commonly known as a mouse 130 (although not shown connected).

15 The monitor port 120 is connectable to a monitor 135, wherein outputs are graphically displayed to the user via a display screen 136. The monitor 135 is also used to assist the user in providing inputs, by displaying graphical user interfaces (GUI). A graphical user
20 interface prompts the user to provide inputs to the computer system 100 in a user-friendly, intuitive manner. For example, a GUI is often used to display a number of items associated with various user inputs. The user provides an input by pointing to the item associated with
25 the input and pressing a button on the mouse 130. The foregoing process is known as pointing and clicking.

Another example of a peripheral device is a stylus pen 140. The stylus pen 140 allows the user to input high resolution graphical images into a GUI by placing the
30 stylus pen 140 over the monitor 135 and over a particular monitor displayed pixel(s), and drawing a graphical image directly (seemingly) on the screen. The stylus pen 140 itself, however, does not directly write to the monitor 135. When the stylus pen is placed against the monitor's
35 display screen 136, the stylus pen 140 detects a location

indicator in the form of an illuminated pixel. The location indicator is found within an array of location indicia that are optically displayed at the particular pixel location(s) on the display screen 136. The
5 recognized location indicator can be referred to as the pixel location of the stylus pen. Thus, the pixel location of the stylus pen 140 is ascertained and provided to the computer system 105 from the detected location indicator. The computer system 105 can then provide the pixel location
10 of the stylus pen 140 to various software programs.

Virtually everything displayed on the screen 136 of conventional monitors, such as monitor 135, must be provided by an external monitor driver source due to conventional monitors being passive devices. The computer
15 system 105 provides a stream of graphical image data for display on the monitor 135. The aforementioned location indicia must also be provided to the monitor 135. In the exemplary embodiment shown in FIGURE 1, the aforementioned location indicia is provided by a subsystem 145. The
20 subsystem 145 is connected to the monitor 135 and outputs the location indicia thereto.

Referring now to FIGURE 2, there is illustrated a block diagram of an exemplary stylus pen 140 in accordance with the present invention. The stylus pen is placed in
25 contact with the monitor 135 so that it can optically view the pixels on the screen 136. When the location indicia is displayed on the monitor 135, the location indicia associated with the particular pixel over which the stylus pen 140 is located is detected by an optical sensor in the
30 stylus pen 140. The optical sensor converts the location indicia to a data signal and transmits (via a direct connection or a cordless interface) the data signal to the subsystem 145. The subsystem 145 can then determine the pixel location of the stylus pen 140.

The stylus pen 140 includes a fiber optic bundle 205 mounted into a swivel tip 210. The fiber optic bundle 205 provides an optical route for received light to an optical sensor 215. The tip of the fiber optic bundle 205 is
5 mounted such that it has a flat surface 225 that stays flush with the display screen via the swivel tip 210. The combination of fiber optic bundles 205, the flat face 225 and the swivel tip 210 allows the optical sensor 215 to optically read the location indicator displayed at a
10 particular pixel under the tip of the fiber optic bundle 205 with maximum clarity from most writing angles.

The stylus pen 140 also includes a micro-switch 230 disposed in a manner such that when the tip of the fiber optic bundle 205 is placed in contact with the monitor 135,
15 the mechanical pressure from the contact causes the micro-switch 230 to be depressed. Depressing the micro-switch 230 causes the stylus pen 140 to signal the subsystem 140 that the stylus pen 140 is in an engaged mode. Additionally, where the fiber optic bundle 105 is moved
20 away from the monitor 135, the stylus pen 140 signals the subsystem 145 that stylus pen is in a disengaged mode.

In another embodiment of the present invention, a light intensity is calculated using the optical sensor 215 instead of using the micro-switch 230. By utilizing a
25 light intensity reading to place stylus pen in engage or disengage mode, a user need only place the tip of the stylus pen on the screen to engage it. Furthermore, by eliminating the micro-switch 230, the number of circuits in the stylus pen 140 is decreased and the micro-switch will
30 not become a critical failure point in the system due to wear. Furthermore, by utilizing light intensity, the user can accomplish a substantially similar result by touching the monitor screen or having the tip of the stylus pen close to the monitor screen.

When the fiber optic bundle 205 is placed in contact with the screen 136 of the monitor 135 directly over a location pixel, the optical sensor 210 detects the light wavelength (or color) of the light radiated from the pixel, and transmits a corresponding electronic signal to the subsystem 145. The pixel location of the stylus pen 140 is then determined by the subsystem 145 by ascertaining the pixel location associated with the color corresponding to the electronic signal. The stylus pen 140 also includes two buttons 240a, 240b, which correspond to the right and left buttons, respectively as found on a standard two-button mouse.

The full matrix mode will now be described. When the stylus pen 140 first makes contact with the screen 136 of the monitor 135, the graphical image displayed on the screen 136 is replaced by full matrix mode location indicia detectable by the stylus pen 140 and identifiable by a location determination algorithm which will be described below.

Referring now to FIGURE 3, there is illustrated a diagram of the monitor screen 136 displaying the location indicia during the full matrix mode. The image displayed on the monitor screen 136 is composed of a two-dimensional array of pixels 305. Each pixel 305 displays a predetermined color for a predetermined time period. The time period can be equal to or related to the refresh period of the monitor 135.

Each area 305 of the display screen 136 is defined by its own color pattern. An area may be a group of pixels or a single screen pixel. In full matrix mode the display screen 136 is defined by a fixed number of rows 315 and columns 310. Each row 315 and column 310 is then "labeled" with its own unique color. An equation is created to define a color to fill each area or pixel 305. The color is from either the row 315 or column in which the area 305

resides. An exemplary equation for an 800 x 600 resolution display screen using 100 colors for columns is now described:

5 Define the colors for the columns 310 (Xcolor) and colors for the rows 315 (Ycolor) in a sequential fashion. Note that in this example the height of the display screen is 0.75 times the width of the display screen, thus there will be three quarters the number of colors used for rows as for columns. The number of colors for columns (Ncolors) is used to calculate a color pattern.

Thus, Xcolor = (0 to 99)
Ycolor = (100 to 174)

The total number of pixels = pixel resolution for the rows on the display.

15 Example: For 800 x 600 resolution display
Total pixels = 800

Next, a color for each pixel column 310 is calculated. The result will be an integer value that can be used to cross reference a color table:

20
$$Xcolor = [(Pixel(X)/Total\ Pixels) \times Ncolors] \text{ Truncated}$$

Example: $Xcolor(X=300) = [(300/800) \times 100] \text{ Truncated}$

Next, a color for each pixel row is calculated. The result will be an integer value that can be used to cross reference a color table:

25
$$YColor = [(Pixel(Y)/Total\ Pixels) \times Ncolors] \text{ Truncated} \\ + Ncolors$$

Example: $Ycolor(Y=233) = [(233/800) \times 100] \text{ Truncated} \\ + 100 = 129$

Next, it is decided which color is used for each pixel 305:

30 If $Pixel(X) + Pixel(Y)$ is odd, then fill the pixel with Xcolor for that pixel location.

If Pixel (X) + Pixel(Y) is even, then fill the pixel with Ycolor for that pixel location.

Example: For Pixel (X=300, Y=233) fill with Xcolor, which is color #37

5

To determine the screen location of the stylus when it is first touched to the screen, the location indicia is flashed on the display screen so that the optics of the stylus can read the color (Xcolor or Ycolor) of the location. The stylus, via the optical sensor, is polled so that the detected color can be determined. The color is represented as the Xcolor number so that, via the above equations, the location of the stylus can be determined. The equations that follow disclose an exemplary technique for determining the location of the stylus based on the color read by the stylus optics.

10

15

20

First, cross reference the selected color table to determine Xcolor and Ycolor. (Note: If a color is detected that is not in the selected color table, the system will log an error):

If the color returned is between 0 and Ncolors, then it is Xcolor.

If the color returned is between (Ncolors+1) and (1.74*Ncolors), then it is Ycolor

25

Example: Colors returned from sensor: Color #129 and Color #37

Therefore Xcolor=37 and Ycolor=129

30

Reverse calculate the pixel reference position for the pixel column from Xcolor:

$\text{ReferencePixel1}(X) = [Xcolor * (\text{TotalPixels}) / (Ncolors)]$

Example: Xcolor = 37

ReferencePixel = $[37 * 800 / 100] = 296$

Reverse calculate the pixel reference position for the pixel row from Ycolor:

5 ReferencePixel(Y) = $[Ycolor - Ncolors) * (Total Pixels) / (Ncolors)]$

Example: Ycolor = 129

Reference Pixel = $[(129 - 100) * 800 / 100] = 232$

10 In the example shown, the pixel position read was (300 x 233), and the reference position returned was (296 x 232). This is extremely close to the actual stylus position. The series of equations and calculations shown are capable of reaching double pixel resolution through the simple use of more colors.

15 Once the stylus location on the display screen is determined, then a moving overlay pattern is positioned on the screen about the stylus pen's location. The moving overlay can be substantially any shape, but preferably is square. Once the moving overlay pattern is displayed on the display screen tracking mode is initiated.

20 Referring to FIGURE 4, the tracking mode will now be described. In order to track movement of the stylus across the screen, tracking mode is used. The computer system utilizes the tracking mode at a speed which allows enough stylus pen positions to be gathered for effective use in a writing or drawing application.

25 Tracking mode is used to track the stylus pen 140 as it is being moved across the screen 136 from the initial point of contact with the screen 136 to other positions on the screen. An overlay pattern 405 (exploded view) is displayed on top of the graphic images 415 displayed on the screen 136. The overlay pattern 405 must be both visible to the user and

allow the user to see the graphic images 415 that are being 'drawn on' by the stylus 140.

5 An exemplary overlay pattern 405 is 20x20 pixels but could be larger than 100 x 100 pixels in size. The overlay pattern 405 comprises vector indicators 404 in every other pixel location within the overlay pattern 405. The vector indicators 404 are each assigned a different color and may create a checkerboard pattern over graphic image 415. The graphic image portion that is underneath the overlay pattern 10 405 is converted to a black and white (gray scale) so that the graphic image portions pixels are not confused with the vector indicators 404. Note that the pattern does not have to be checkerboard but could be octagons, pentagons, triangles or substantially any repeating or interlocking pattern. It is further noted that the patterns could 15 incorporate as few as one-third to one-eighth of all the pixels in the overlay pattern, but preferably one-half the pixels provides the greatest stylus tracking accuracy and resolution at normal stylus movement speeds.

20 In other words, the portion of the original image that is underneath the overlay pattern 405 is converted to gray scale, while a checkerboard pattern of half the pixels in the overlay pattern are each displayed as a different color.

25 In FIGURE 4, each numbered (or Xed) location in the overlay pattern 405 represents a uniquely colored vector indicator 404. The center location represents the known stylus pen position 410. The stylus pen position 410 is centered in the overlay pattern 405 on refresh of the screen 136.

30 As the stylus pen 140 is moved across and in contact with the screen, the stylus pen 140, via the optical sensor, reads a localized indicator 404 that is displayed under the stylus pen's location. The color of the localized indicator 404 is determined thereby providing information to the

computer system which can be used to determine new stylus pen position information and pen movement vector information.

5 Upon a screen refresh, the moving overlay pattern is recentered about the last determined position of the stylus pen. Furthermore, a graphic trail following the stylus can be created as the pen moves across the screen. The graphic trail simulates writing on the display screen 136. In a preferred embodiment, the stylus pen's optics can read and interpret the vector indicators 404 at a rate that exceeds
10 the refresh rate of the screen. Thus, the graphic trail behind the pen can be updated with a plurality of stylus pen locations on a screen refresh. Furthermore, the trail behind the stylus pen (see FIGURES 1 and 7) can be a high resolution trail of one or more pixels in width.

15 The overlay pattern 405 is preferably large enough so that the stylus pen 140 is not likely to be moved outside of the overlay pattern 405 by a user for the duration of a refresh period. The preferred embodiment can sense three to five or more vector indicators per refresh cycle, which
20 allows the exemplary embodiment to take 300 to 500 or more stylus location reads per second. Since one exemplary application of the present exemplary invention is for "brainstorming tools" like white boards, or for artistic tools like freehand drawing, it is important to allow a user
25 to move the stylus pen on the screen at speeds that are comfortable to the user and at speeds which will allow the user to view an accurate depiction of what they are drawing on the screen instantly.

30 The stylus pen can be tracked anywhere on the screen with minimal obstruction to graphical images being displayed on the screen. The location of the pen is determined at a rate that far exceeds the refresh rate of the screen. That is, the pen location is determined at a rate that is three to five times more often than the refresh rate. The speed
35 of stylus pen location calculations is limited by the speed

of the host computer system 105 and/or the integrated circuit speeds found in the computer's graphic circuitry, not the speed of the screen refresh rate.

5 Referring back to FIGURE 2, the optical sensor 215 in the stylus pen must be able to discriminate discrete colors in a large color spectrum produced by a color display monitor. An exemplary computer system utilizing 8 bit (256 color) technology is sufficient to meet the design requirements for matrix mode and tracking mode. CCD or CMOS
10 optical sensors have been determined to be able to provide the required optical sensing capability in an exemplary stylus pen. It is understood that other types of optical sensors could be used without departing from the spirit of the invention. Furthermore, it is understood that CCD and
15 CMOS sensors could also be utilized with color technology at 10 bit (1024 colors) or 24 + bit (true color). As the color technology advances and pixel size decreases, the vector indicators may each comprise a plurality of pixels instead of a single pixel each.

20 Referring now to FIGURE 5, there is illustrated a block diagram of the subsystem 145 in accordance with an embodiment of the present invention. The subsystem 145 includes a central processor 505 which executes instructions stored in non-volatile memory 510, such as Programmable Read-Only
25 Memory (PROM). The central processor 505 receives inputs from the stylus pen 140, the mouse 130, and graphical images from the monitor port 110 of the computer system 105, and provides outputs to the monitor 135 and the mouse port 110 of the computer system 105.

30 The central processor 505 receives the input from the stylus pen 140 via the stylus port 525. The inputs received from the stylus pen 140 include a status signal describing the mode of the stylus pen, the electronic signal provided by the optical sensor 215, and signals corresponding to the
35 buttons 240a, 240b. When the stylus input port 525 receives

the engaged signal from the stylus pen 140, the central processor 505 retrieves the electronic signal provided by the optical sensor 215 through the stylus port 525. The central processor 505 then determines the pixel location and/or
5 offset vector based on the signal provided from the stylus pen's 140 optical interpretation of the location indicator's color or the localized vector indicia's color.

The pixel location and/or vector indicator location of the stylus pen 140 can be determined in a number of ways that
10 would be understood by one skilled in the art. In one scheme, the electronic signal is compared to determine the associated vector indicator location within the overlay pattern. The indicator location is then offset by the center of overlay patterns location. The non-volatile memory 510
15 can be rewritten or reinitialized so that on initialization a sampling of the screen's color variation capabilities can be loaded or reloaded into the look-up table.

The location of the stylus pen 140 may be determined by transmitting the location or vector indicator information
20 from the subsystem to the mouse port 110 of the general purpose computer system 105. In order to provide inputs to the computer 105 from the subsystem 145, a mouse/stylus driver 530 is placed between the central processor 505 and the mouse port 110. The mouse/stylus driver 530 enables the
25 system to convert an absolute location to a mouse motion signal that is transmitted to the mouse port 110 of the computer system 105. A user may use the computer system 105 to perform functions with or without using the stylus pen 140. If the stylus pen 140 is not being used, the user may
30 use the mouse 130 instead. In order to use the mouse 130 with the exemplary computer system 105, the subsystem 145 is connected to and receives signals from the mouse 130 via the auxiliary mouse port 535. The mouse driver 530 includes decision logic that can selectively pass the signals received
35 from the mouse 130 or the stylus pen 140 to the mouse port

120. When the stylus pen 140 is disengaged, the inputs of the auxiliary

mouse port 535 are provided to the computer system 105. When the stylus pen 140 is engaged, the mouse 130 is disengaged and

information data which will move the cursor to the detected location of the stylus pen is provided to the computer system 105. The mouse driver 530 will determine that the stylus pen is engaged when the micro-switch 230 is depressed.

The central processor's 505 control of the monitor 135 is effectuated by a screen driver 540. The screen driver 540 is based upon a standard screen driver as can be found in general purpose computer systems 105. The screen driver 540 allows the subsystem 145 to interrupt the graphical images for display on the monitor 135 and overlay it with the location indicia or the overlay pattern comprising vector indicators that are detectable by the stylus pen 140. The central processor 505 outputs the images to be displayed to the screen driver 540. The screen driver 540 then causes the monitor 135 to display the prescribed images.

The screen driver 540 can be provided with preferably one of three patterns by the central processor 505 - (1) unmodified graphical images from the computer system 105; (2) the location indicia (full matrix mode); or (3) the moving overlay pattern interposed with or overlaying the graphical images received from the computer system 105. The graphical images are received from the computer system 105 via a screen input port 545. The screen input port 545 is connectable to the display port 120 of the computer system 105. When the central processor 505 displays the graphical images from the computer system 105 for display, the central processor 505 outputs the contents of the screen input port 545 to the screen driver 540.

The location indicia are stored in the non-volatile memory 510. When the central processor 505 selects the

location indicia for display (due to the stylus pen 140 being engaged) on the monitor 135, the central processor 505 accesses the location indicia from the non-volatile memory 510 and outputs the pixel location indicia to the screen driver 540 such that it is interposed with or overlays the image already displayed on the screen. The localized vector indicators are also stored in the non-volatile memory 510. When the central processor 505 selects the moving overlay pattern for display (tracking mode), the localized vector indicators are interposed with the graphical images provided by the computer system 105 in an area about the stylus pen's position. The central processor provides the graphical images from the screen input port 545 and accesses the vector indicia from the non-volatile memory 510. The localized vector indicators are interposed with an overlay of the graphical images about the pixel location of the stylus pen 140 at the most recent refresh by the central processor 505 and output to the screen driver 540. Note, that the stylus pen 140 can read the location indicia or localized vector indicators at a rate that exceeds the screen's refresh rate.

Referring now to FIGURE 6, there is illustrated a flow diagram describing exemplary operation of the subsystem in accordance with the present invention. The subsystem constantly polls (step 605) the status of the stylus pen to determine whether the stylus pen is engaged (step 610). When the stylus pen is not engaged, i.e. disengaged during step 610, the subsystem forwards the graphical images received from the computer system to the monitor (step 615). While the stylus pen is in a disengaged mode, steps 605 through 615 are repeated and the stream of graphical images received from the computer system are displayed on the monitor. Furthermore, the mouse 130 is fully operational when the stylus pen 140 is disengaged.

However, when the stylus pen becomes engaged during step 610, the subsystem temporarily halts displaying the graphical

images received from the computer system and instead displays the pixel location indicia of the matrix mode (step 620). The location indicia are displayed until the subsystem receives a signal from the stylus pen detecting the location indicia at the pixel location of the stylus pen (step 625).
5 In one exemplary embodiment, the location indicia may be interposed with the graphical images received from the computer system. When the subsystem receives a detection signal from the stylus pen identifying one of the location
10 indicia for the pixel location of the stylus pen, the subsystem determines the pixel location of the stylus pen (step 630) and forwards it to the computer system (step 635). The pixel location of the stylus pen 140 is communicated to the computer system 105 by calculating a vector from the last
15 known mouse location to the pixel location of the stylus pen 140.

After determining the initial pixel location of the stylus pen during step 630, the pen can be moved across the display screen. The location of the stylus pen can be
20 tracked by displaying a localized overlay pattern about the initial location of the stylus pen. At step 640, the graphical image received from the computer system is interposed or overlaid with the overlay pattern which comprises vector indicators. The overlay pattern is
25 preferably centered about the pixel location of the stylus pen and displayed on the monitor. The subsystem then waits until a 'next' detection signal is received from the stylus pen (step 650). When the next detection signal is received from the stylus pen, the subsystem determines a two
30 dimensional offset vector from the detection signal (step 655) and forwards the two dimensional offset vector to the computer system (step 660) via the mouse port. The subsystem then updates the pixel location of the stylus pen (step 665) by adding the offset vector determined during step 655 to the
35 last pixel location of the stylus pen. It is noted that a

plurality of detection signals may have been received and recorded between each screen refresh. At step 670, the subsystem polls the status of the stylus pen to determine if the stylus pen is still engaged (step 675). If the stylus pen is engaged, a determination is made as to whether the refresh period has expired (step 680). If the refresh period has expired, the moving overlay pattern is interposed or overlaid with the graphical image received from the computer system 105 and positioned about the pixel location of the stylus pen 140 determined during step 665. Steps 650 to 680 are repeated until the stylus pen becomes disengaged during step 675. When the stylus pen becomes disengaged during step 675, the subsystem returns to the disengaged mode at step 605.

The foregoing exemplary system and associated exemplary methods advantageously permits a user to easily adapt a general purpose computer system 105 and conventional monitor 135 to practice the present invention by simply connecting the subsystem 145 as shown in FIGURE 1. However, recent advances in microelectronics technology have provided for portable computers known in the art as laptop computers. A laptop computer usually includes a computer system integrated with a display screen. However, because the display screen is integrated with the computer system, a laptop computer is not as easily adaptable for use with the exemplary subsystem 145. Furthermore, the configuration and communication protocols of the display screen on many laptop computers are proprietary, as opposed to standardized, adding further complexity.

Referring now to FIGURE 7, there is illustrated a computer system 705 configured in accordance with another embodiment of the present invention. The computer system 705 includes a stylus pen port 710 for receiving signals from a connectable stylus pen 140, an integrated display device 715, and a central processing unit 720 for performing processing

functions. The stylus pen port 710 can be a dedicated port created by the computer manufacturer or a standard serial port. It is understood that the integrated display device can be substantially any type of color display device. The signals received by the stylus pen port 710 are forwarded to the central processing unit 720. The central processing unit 720 responds to the inputs received from the stylus pen port 710 by causing location indicia 305 and/or movable overlay patterns 405 to be displayed onto the integrated display device 715 in accordance with the flow chart of FIGURE 6 by executing sets of computer readable instructions. The sets of instructions can be stored in, for example, RAM 725, ROM, or any data storage or memory device. Until required by the central processing unit 720, the set of instructions may be stored in a variety of computer readable memory devices, for example in a hard disc drive 730, or in removable memory such as an optical disc 735 for eventual use in an optical disc drive 740, or a floppy disc 745 for eventual use in a floppy disc drive 750.

Although the invention has been described with a certain degree of particularity, it should be recognized that elements thereof may be altered by persons skilled in the art without departing from the spirit and scope of the invention. Therefore, the invention is limited only by the following claims and their equivalents.

WHAT IS CLAIMED IS:

1. A computer system that allows a user to effectively write on a display screen with a stylus, said computer system comprising:

- a general purpose computer;
- 5 a subsystem connected to said general purpose computer;
- a display screen for receiving graphics data from said general purpose computer and for displaying said graphics on said display screen, said display screen further receiving location indicators from said subsystem for display on said
- 10 display screen; and
- a stylus adapted to optically read at least one said location indicator displayed on said display screen, said optically read location indicator being provided to said general purpose computer in the form of data so that a
- 15 location of said stylus pen on said display screen can be calculated.

2. The computer system of claim 1, wherein said location indicators are predetermined colored locations displayed on said display screen.

- 20 3. The computer system of claim 1, wherein said location indicators are displayed at predetermined colored pixel locations on said display screen.

- 4. The computer system of claim 1, wherein said stylus optically reads a plurality of location indicators during
- 25 single refresh period of said display screen.

5. The computer system of claim 1, further comprising a peripheral point and click device that provides point and click information to said personal computer.

6. The computer system of claim 5, wherein said point and click device is inoperative when said stylus is reading said location indicators on said display screen.

5 7. A method of determining a position of a stylus on a display screen comprising the steps of:

touching a stylus to said display screen;

displaying an array of color coded locations on said display screen;

10 optically reading a color coded location, of said array of color coded locations, that is located under said stylus; and

determining a first location of the stylus on said display screen based on the optically read color coded location.

15 8. The method of claim 7, wherein each said color coded location is a pixel location on said display screen.

9. The method of claim 7, wherein after the step of determining, the method further comprises the steps of:

20 positioning an overlay pattern on said display screen at said first location such that said overlay pattern is substantially centered about said first location;

moving said stylus across said display screen;

optically reading a plurality of color coded vector locations within said overlay pattern;

25 determining the locations of said moving stylus pen based on said optically read color coded vector locations; and

30 repositioning said overlay pattern at one of said plurality of said optically read color coded vector locations.

10. The method of claim 9, wherein is said step of repositioning is performed once every screen refresh cycle.

11. The method of claim 9, further comprising a step of displaying a trail effectively behind said stylus, said trail comprising at least said optically read color coded vector locations.

12. The method of claim 9, wherein said step of determining said locations further comprises the step of substantially calculating a movement speed of said stylus.

13. The method of claim 9, wherein said step of determining said locations further comprises the step of substantially calculating a movement vector of said stylus.

14. An apparatus for determining positions of a stylus on a display screen, said apparatus comprising:

a stylus having an optical sensor for reading and discriminating between colors displayed on a display screen;
an article of manufacture for implementing a stylus tracking procedure, said article of manufacture comprising:

at least one computer readable medium;
processor instructions contained on said at least one computer readable medium, said processor instructions configured to be readable by said at least one processor and thereby cause said at least one processor to operate to:
poll a status of said stylus to determine whether said stylus is touching said display screen;

display an array of colors on said display screen;
receive an optically interpreted first detection signal from said stylus; and

determine the position of said stylus on said display screen based on said first detection signal.

15. The apparatus for determining positions of a stylus on a display screen of claim 14, wherein said processor instructions further cause said at least one processor to operate to:

- 5 overlay an overlay pattern substantially about said determined positions of said stylus, said overlay pattern comprising a plurality of vector indicators;
 receive optically interpreted vector indicator signals from said stylus as said stylus is moved across said
10 display screen;
 tracking a plurality of stylus positions based on said received optically interpreted vector indicators; and
 positioning a new overlay pattern on said display screen about determined stylus positions.

15 16. The apparatus for determining positions of a stylus on a display screen of claim 14, wherein said array of colors is display such that a plurality of the pixels of said display screen are different colors arranged in said array of colors.

20 17. The apparatus for determining positions of a stylus on a display screen of claim 15, wherein said overlay pattern is smaller than 100 pixels by 100 pixels.

25 18. The apparatus for determining positions of a stylus on a display screen of claim 15, wherein said overlay pattern comprises a plurality of colors positioned in predetermined locations about said overlay pattern.

 19. The apparatus for determining positions of a stylus on a display screen of claim 18, wherein said plurality of colors are positioned in a checkerboard pattern.

20. The apparatus for determining positions of a stylus on a display screen of claim 15, wherein said new overlay patterned is positioned on said display screen at a stylus position determined once every screen refresh cycle.

5 21. A method for inputting a high resolution image into a personal computer for display onto a display device, the method comprising the steps of:

 polling a status associated with a stylus pen;

 displaying a matrix, when said status is engaged,
10 comprising a first plurality of colors, wherein each of said plurality of colors corresponds to a location on the display device;

 optically reading a particular one of the first plurality of colors with said stylus pen and calculating a
15 location corresponding to the particular one of the plurality of colors; and

 displaying a direction box comprising a second plurality of colors, wherein each of said second plurality of colors corresponds to at least one of a direction associated with
20 a vector and a position optically reading with said stylus pen a particular one of the second plurality of colors and calculating at least one of a vector associated with the particular one of the second plurality of colors and a position of the particular one of the second plurality of
25 colors.

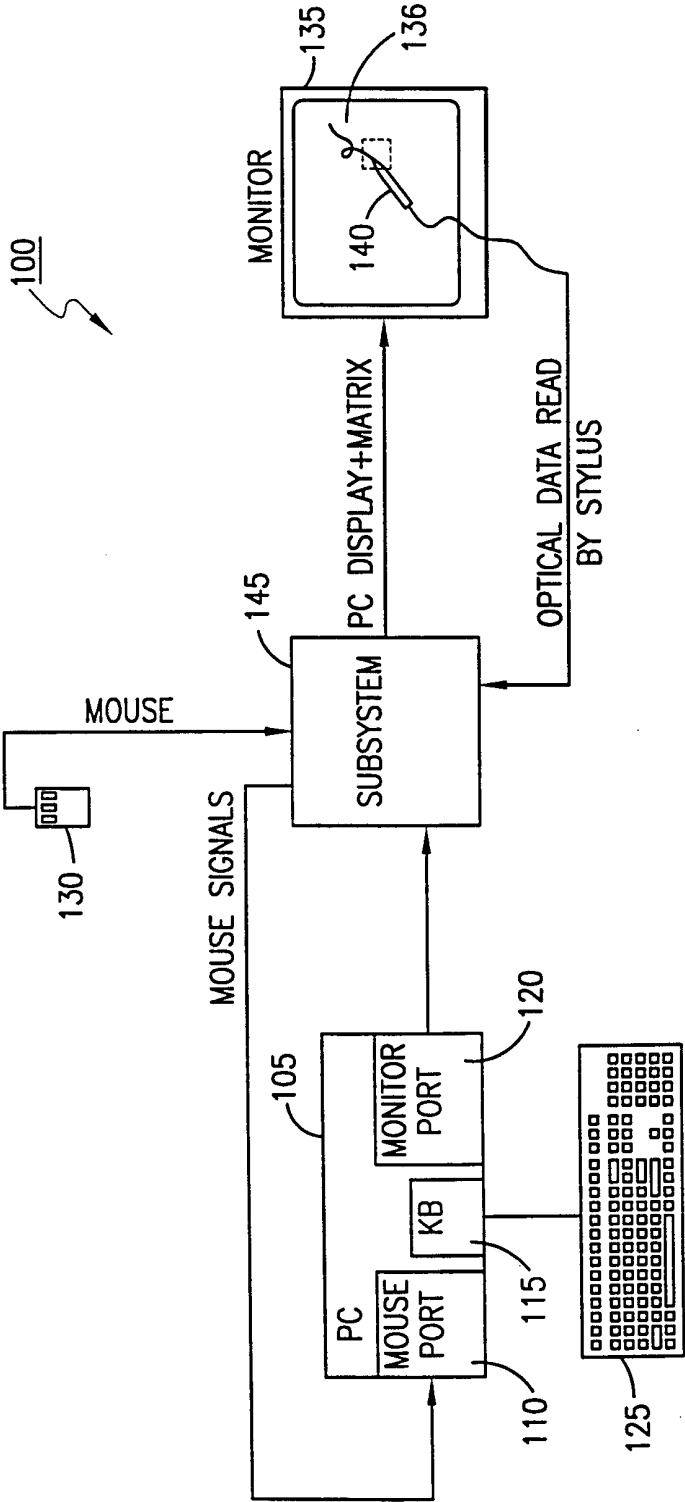


FIG. 1

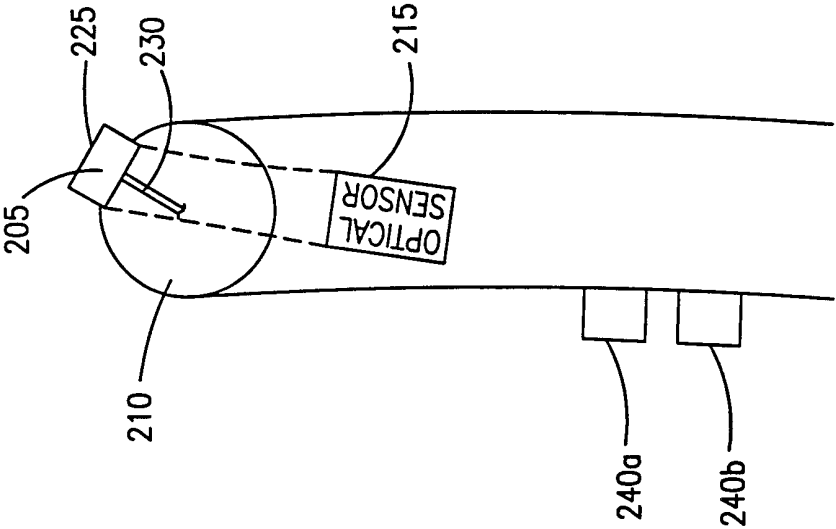


FIG. 2

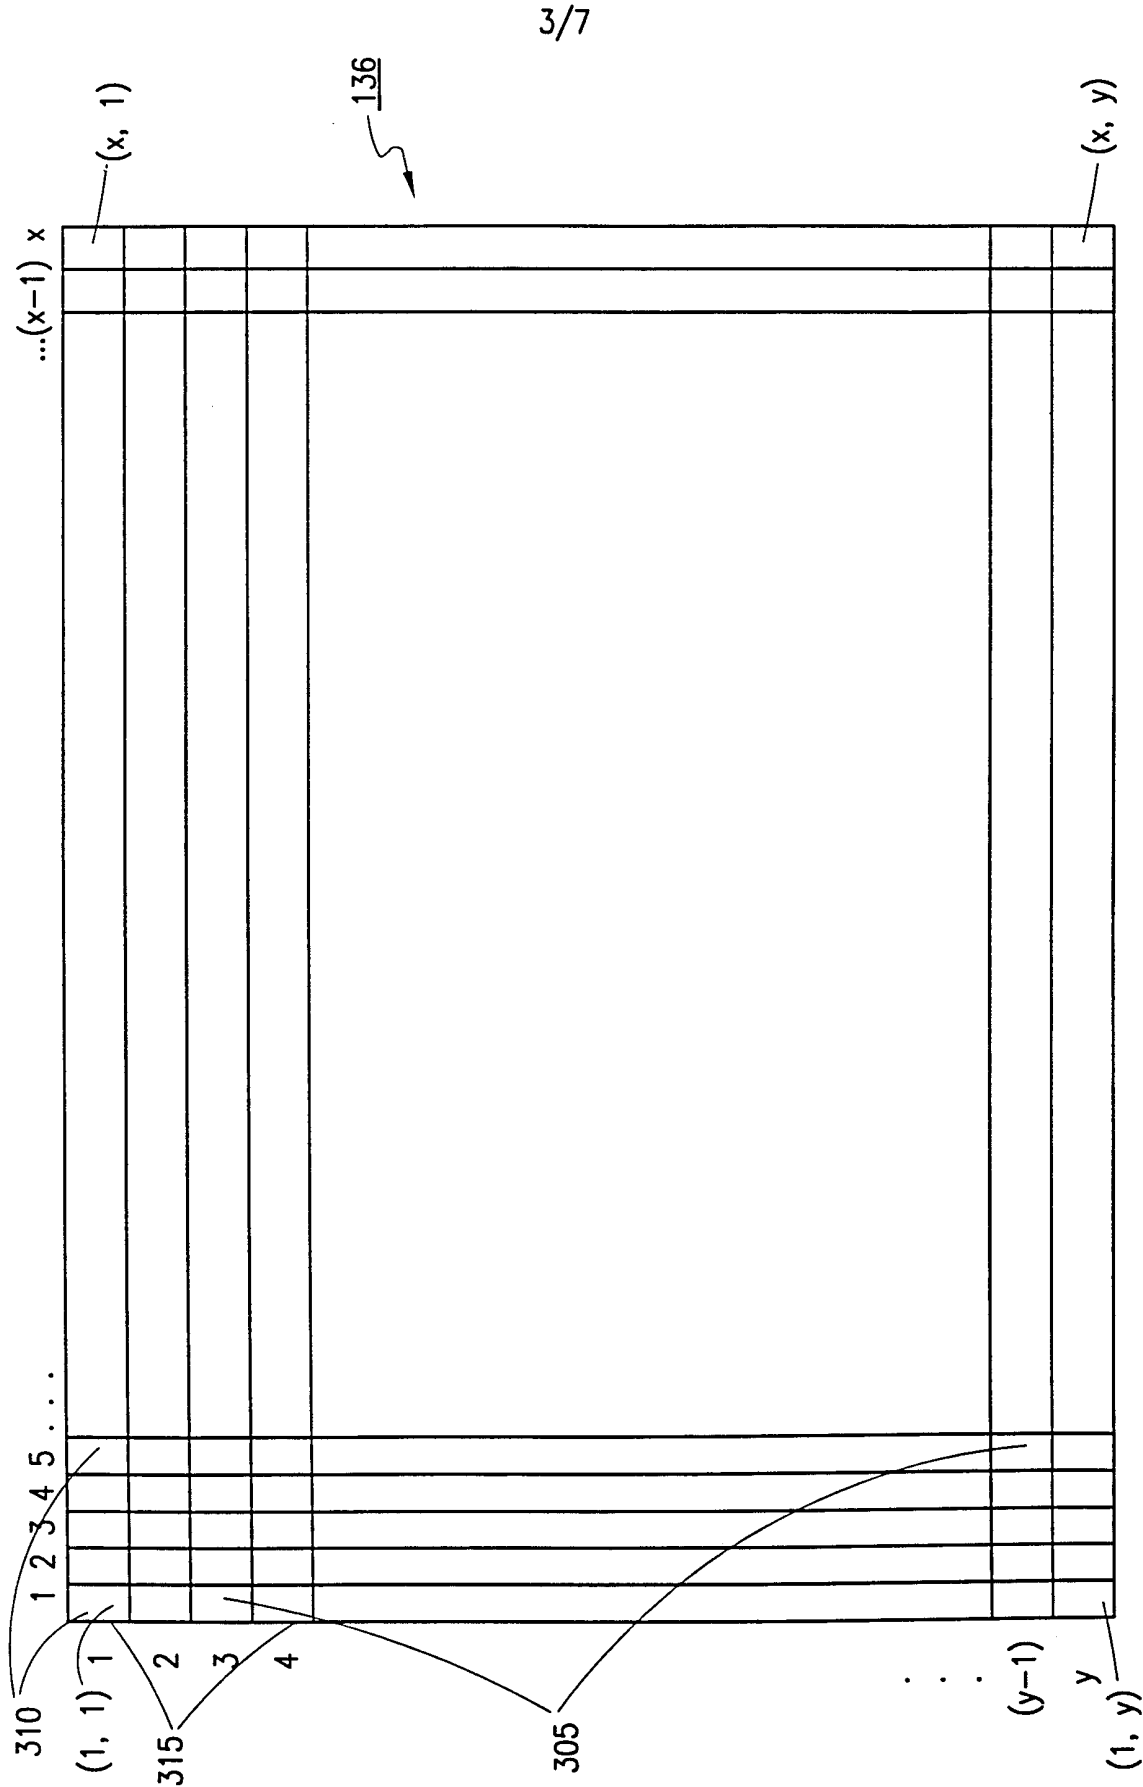


FIG. 3

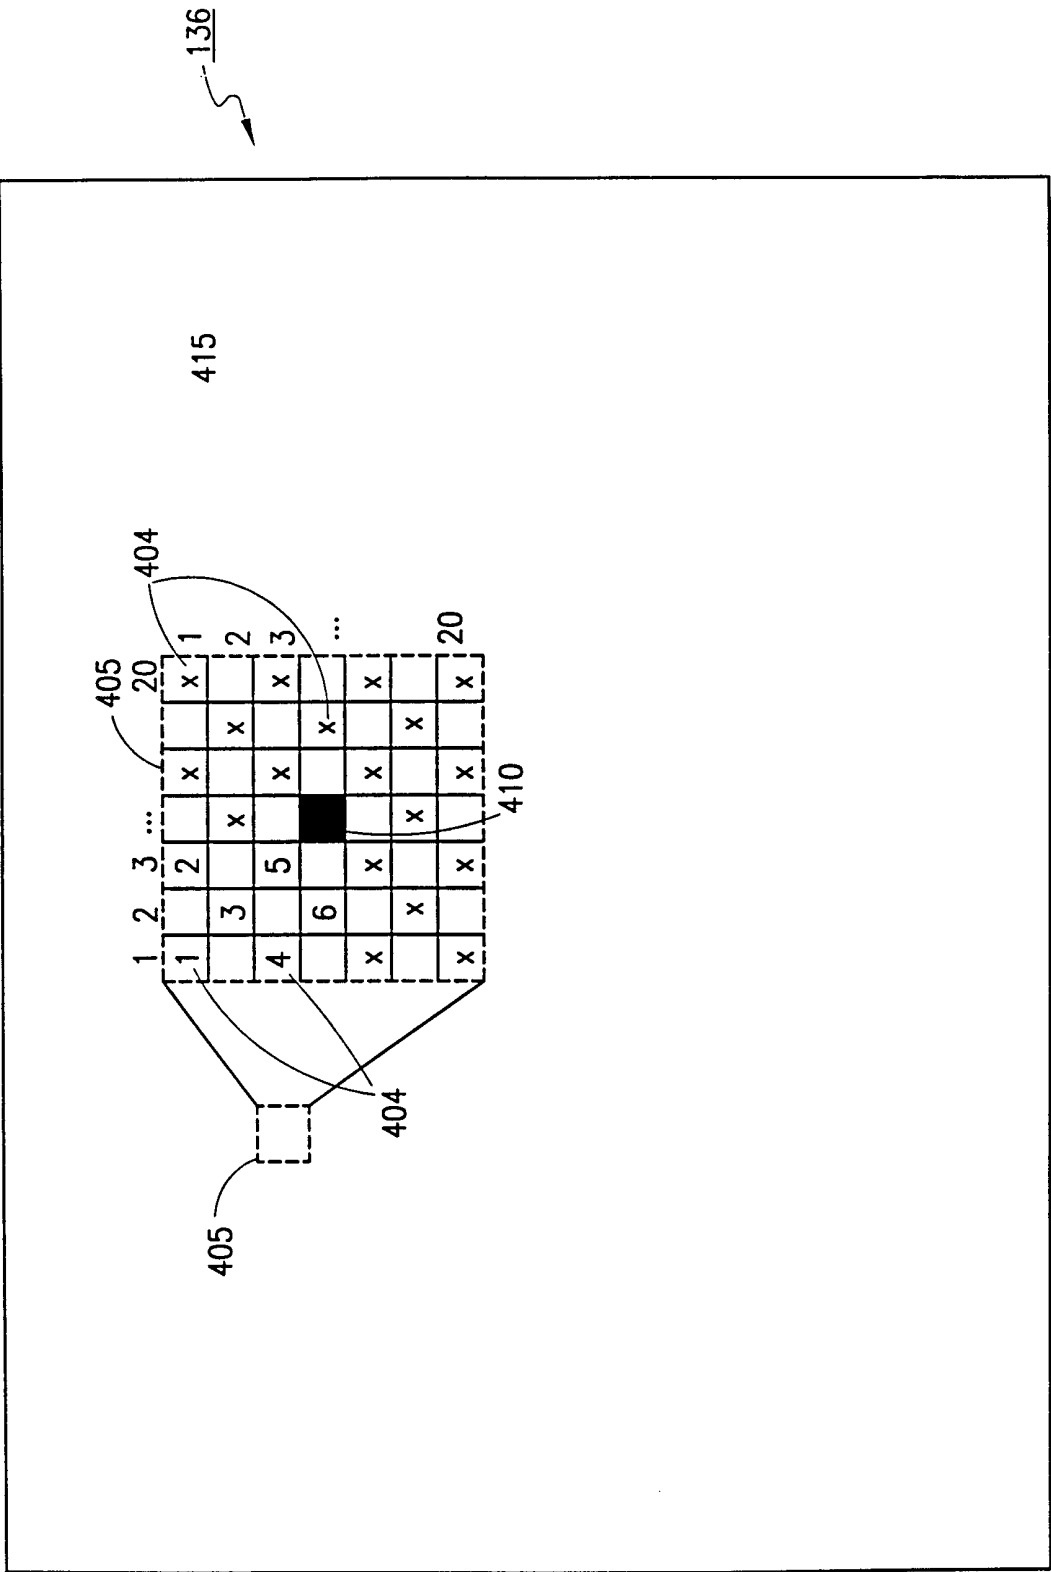


FIG. 4

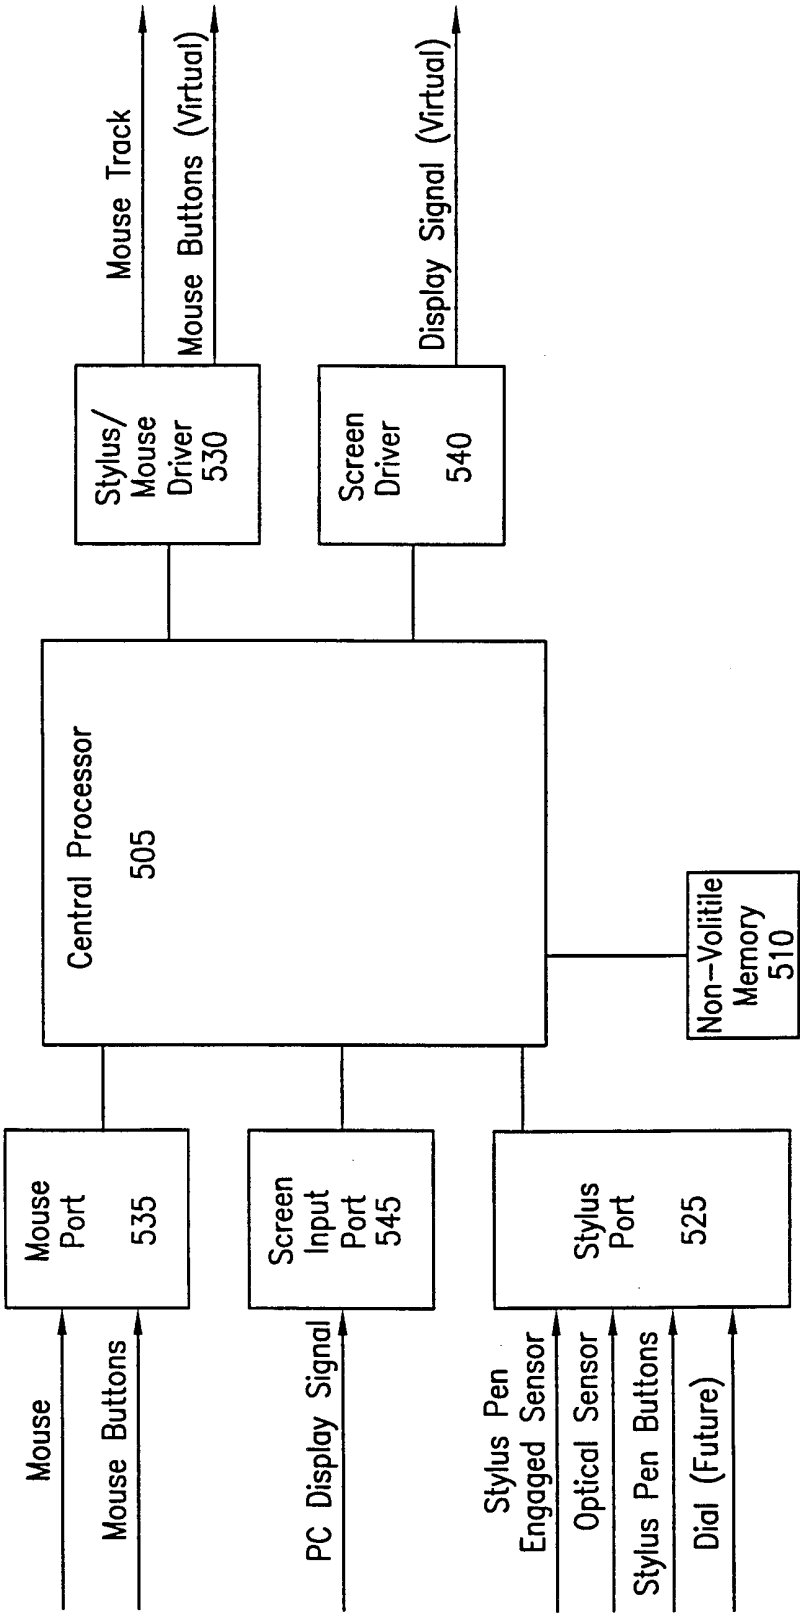


FIG. 5

6/7


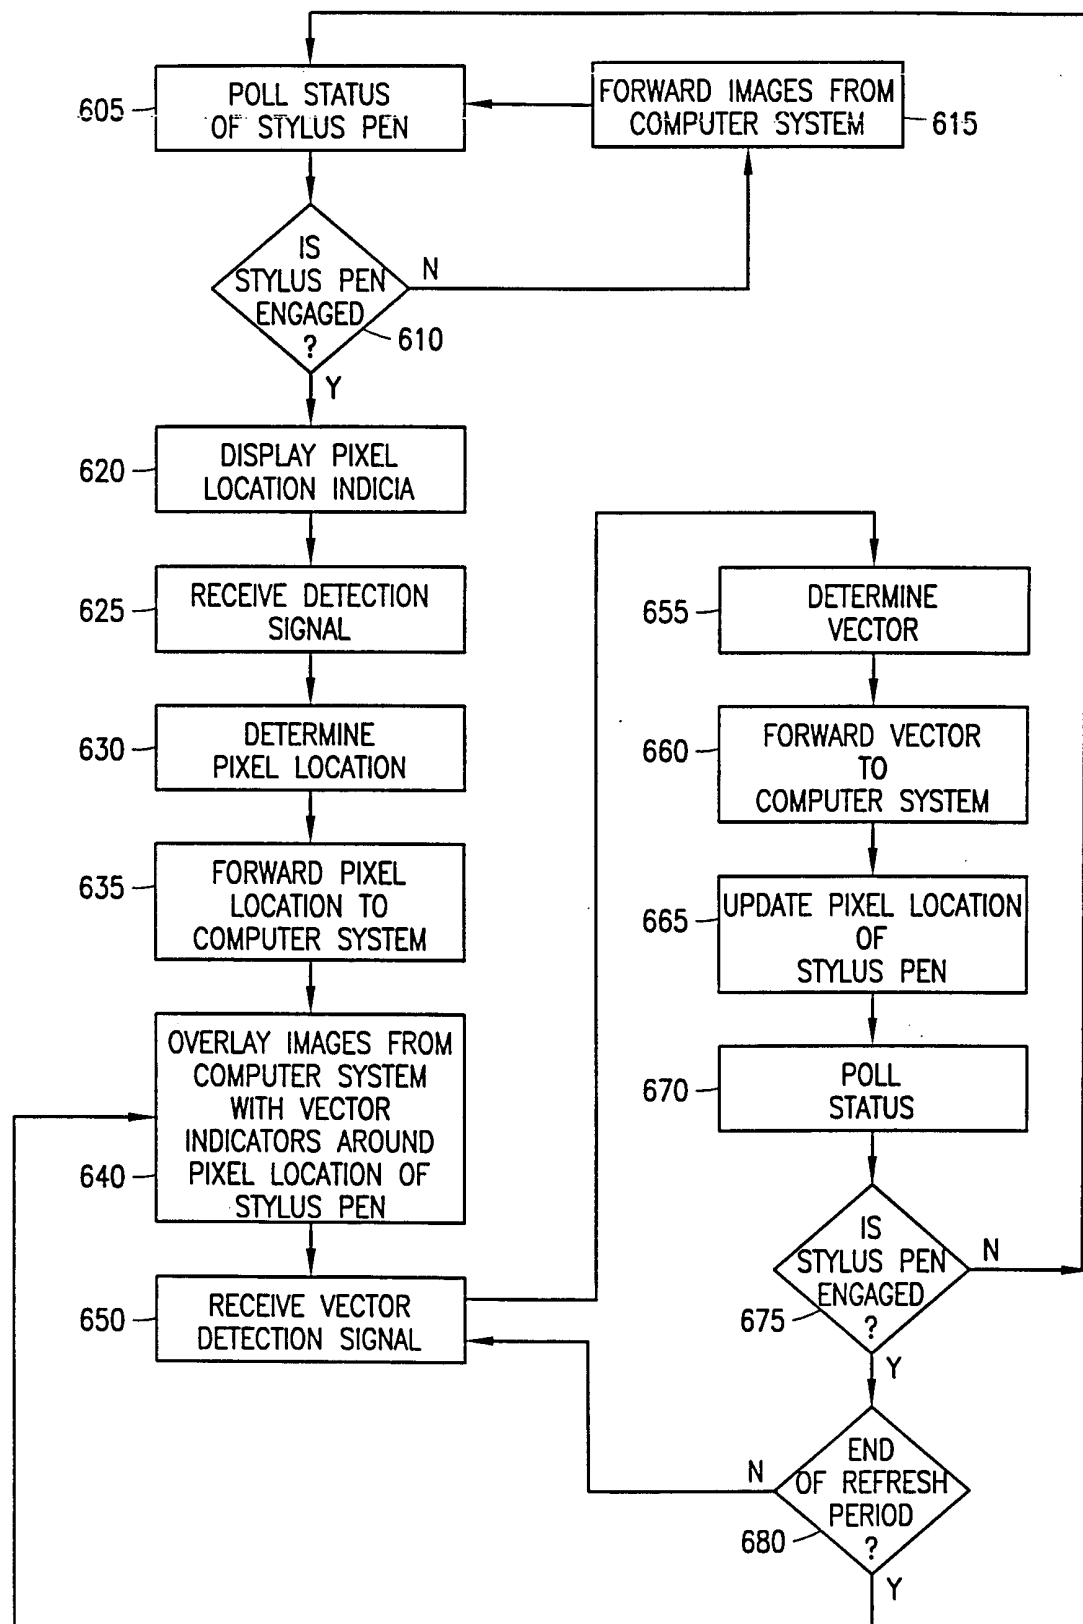


FIG. 6

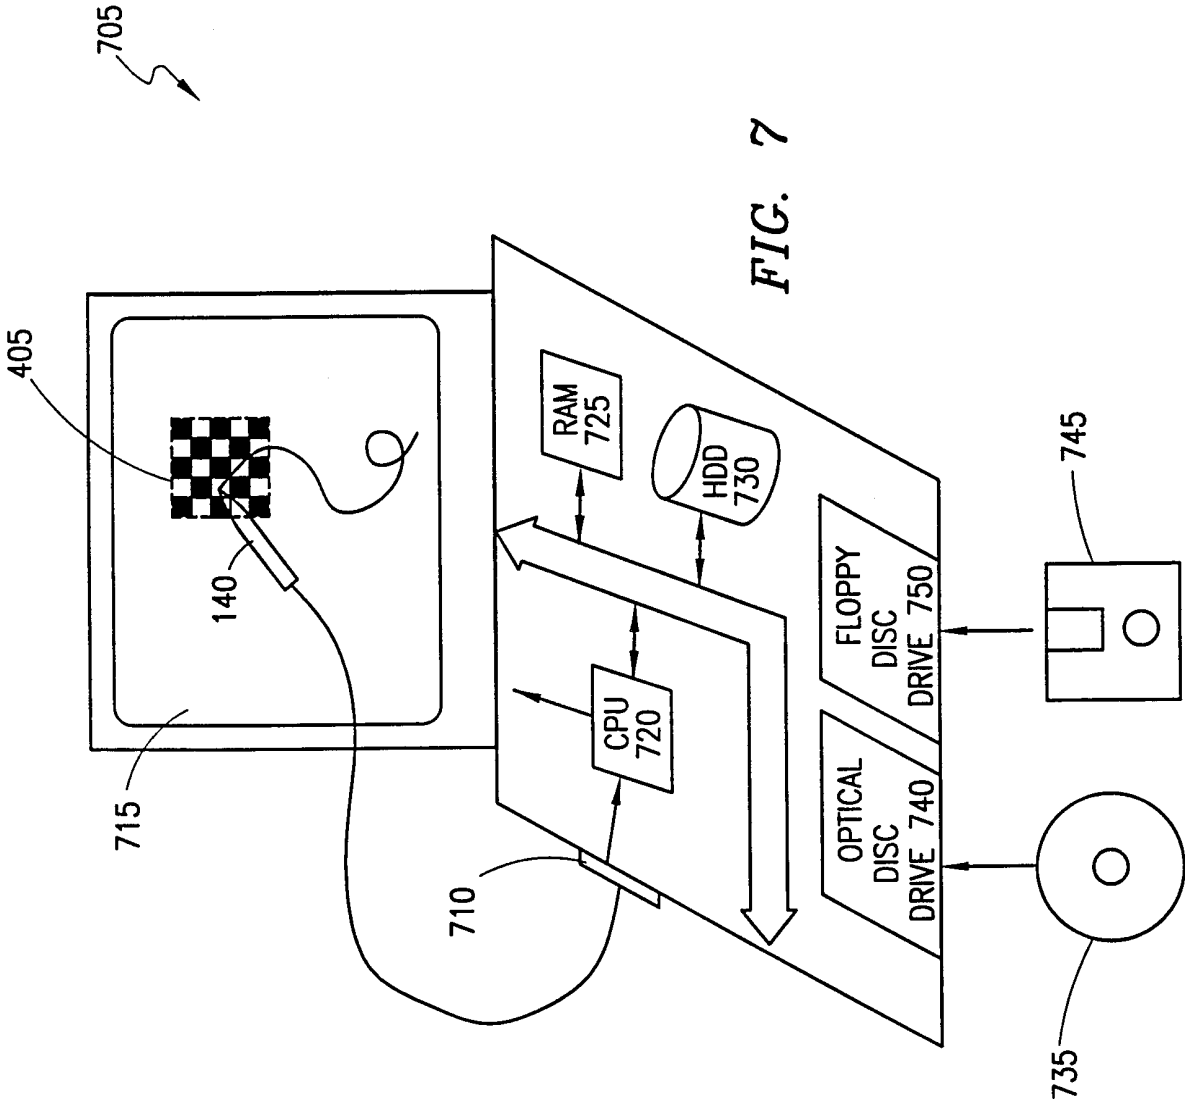

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/US 00/12995

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 G06K11/18 G06F3/033

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, IBM-TDB, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 35336 A (RAVIV RONI ;ROTHSCHILD OMRI (IL)) 13 August 1998 (1998-08-13) the whole document	1,2,5,7, 9,11, 13-19,21
A	"PEN INPUT DEVICE" IBM TECHNICAL DISCLOSURE BULLETIN,US,IBM CORP. NEW YORK, vol. 33, no. 10A, 1 March 1991 (1991-03-01), pages 248-251, XP000110032 ISSN: 0018-8689 the whole document	1-3,5-7, 14,19



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

11 October 2000

Date of mailing of the international search report

18/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Davenport, K

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/12995

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>"PROGRAMMABLE LIQUID CRYSTAL DISPLAY MOUSE PADS" IBM TECHNICAL DISCLOSURE BULLETIN, US, IBM CORP. NEW YORK, vol. 32, no. 3B, 1 August 1989 (1989-08-01), pages 211-213, XP000029875 ISSN: 0018-8689 the whole document</p> <p>-----</p>	<p>1,5,7, 14,21</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/12995

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9835336 A	13-08-1998	AU 5234498 A	26-08-1998
		EP 1016063 A	05-07-2000
		US 6061052 A	09-05-2000
<hr/>			