



US 20130038537A1

(19) **United States**(12) **Patent Application Publication**  
Nishii et al.(10) **Pub. No.: US 2013/0038537 A1**(43) **Pub. Date: Feb. 14, 2013**(54) **CHARACTER INPUT PREDICTION  
APPARATUS, CHARACTER INPUT  
PREDICTION METHOD, AND CHARACTER  
INPUT SYSTEM****Publication Classification**(51) **Int. Cl.**  
**G06F 3/02**

(2006.01)

(52) **U.S. Cl.** ..... **345/168**(76) Inventors: **Yoshimi Nishii**, Kyoto (JP); **Susumu Kobayashi**, Kyoto (JP); **Yoshihiro Ujiie**, Osaka (JP); **Masaki Yamauchi**, Osaka (JP)(21) Appl. No.: **13/643,161**(22) PCT Filed: **Mar. 15, 2012**(86) PCT No.: **PCT/JP2012/001826**

§ 371 (c)(1),

(2), (4) Date: **Oct. 24, 2012**(30) **Foreign Application Priority Data**

Mar. 29, 2011 (JP) ..... 2011-072586

(57) **ABSTRACT**

A character input prediction apparatus includes: an operation input unit that obtains information of a character input operation by a user using a character key layout display which includes character keys; a dictionary storage unit that stores a dictionary including candidate character strings; an indication movement detection unit that detects an indication position and an indication direction respectively showing a position and a movement direction of the character input operation in the character key layout display, from the information of the character input operation; a filter generation unit that determines a character range located in the indication direction with the indication position as a base point, in the character key layout display; and a dictionary search unit that searches the dictionary for a predictive character string including any character included in the character range.

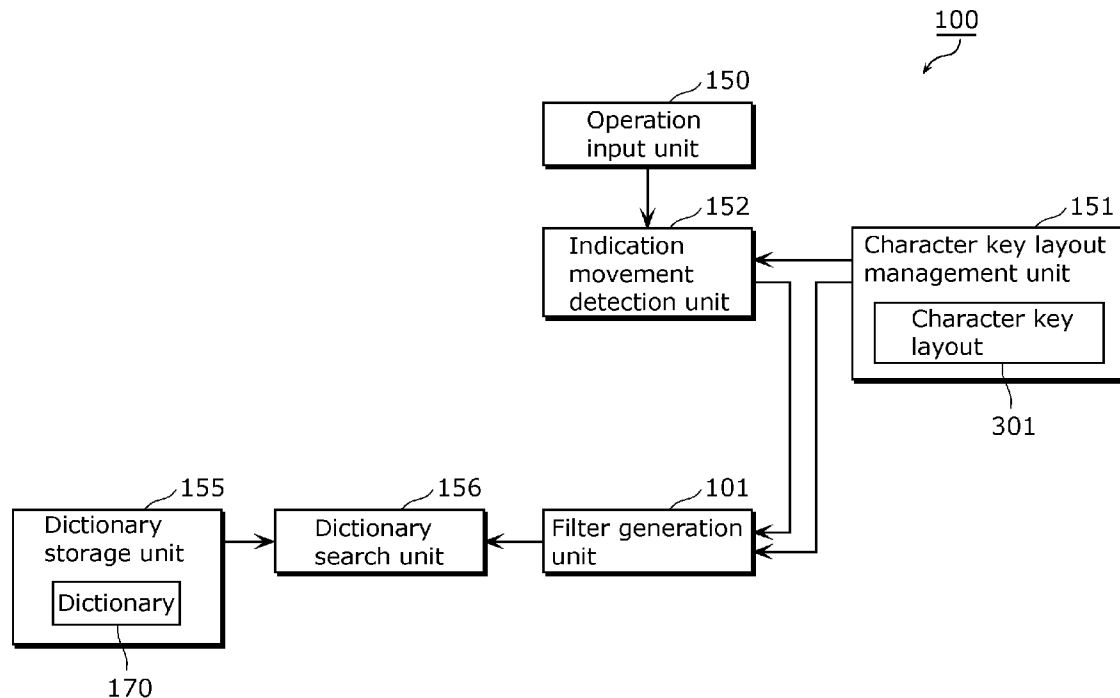


FIG. 1

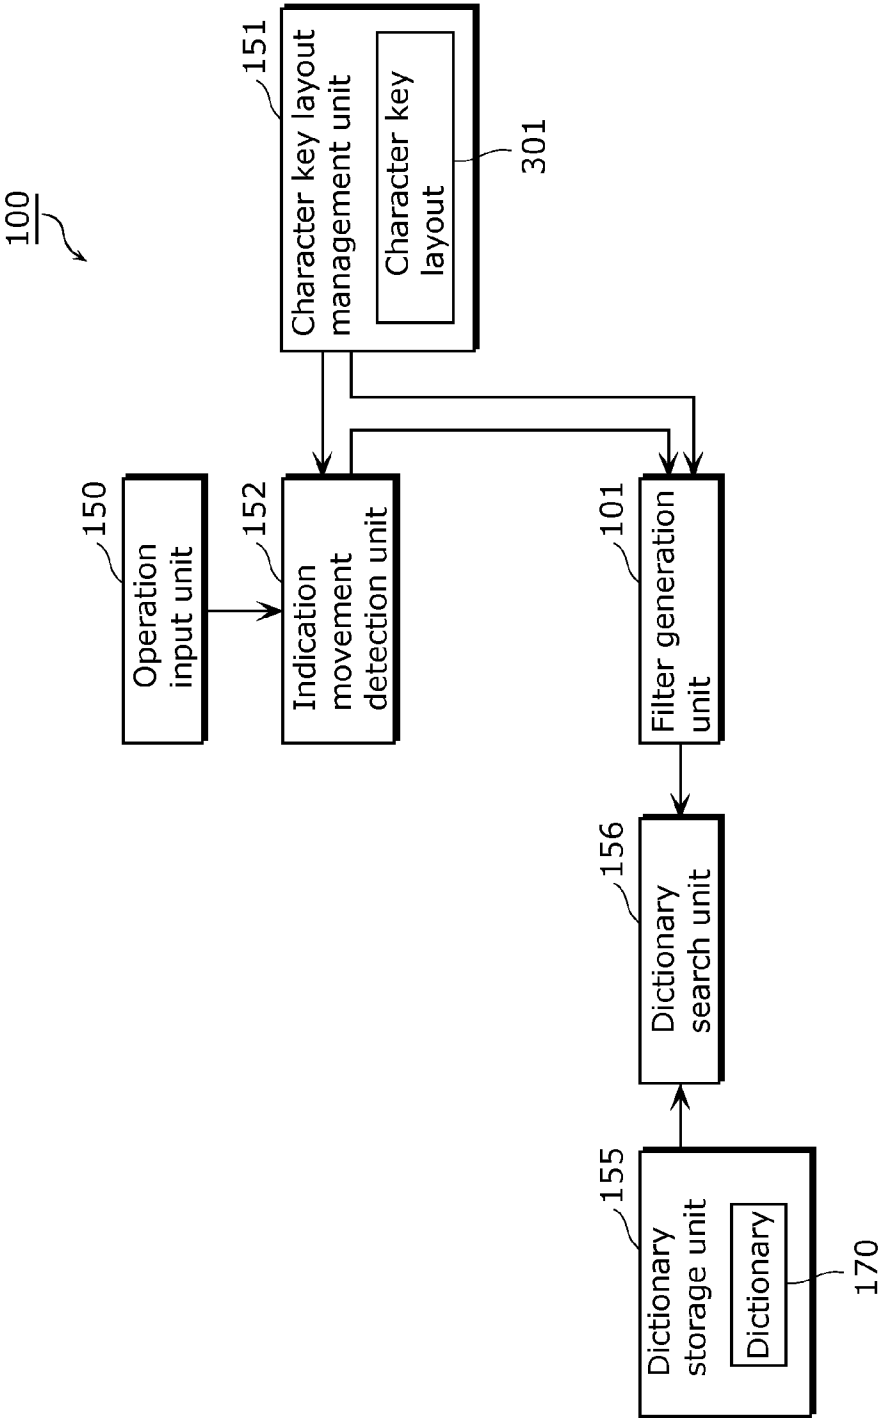


FIG. 2

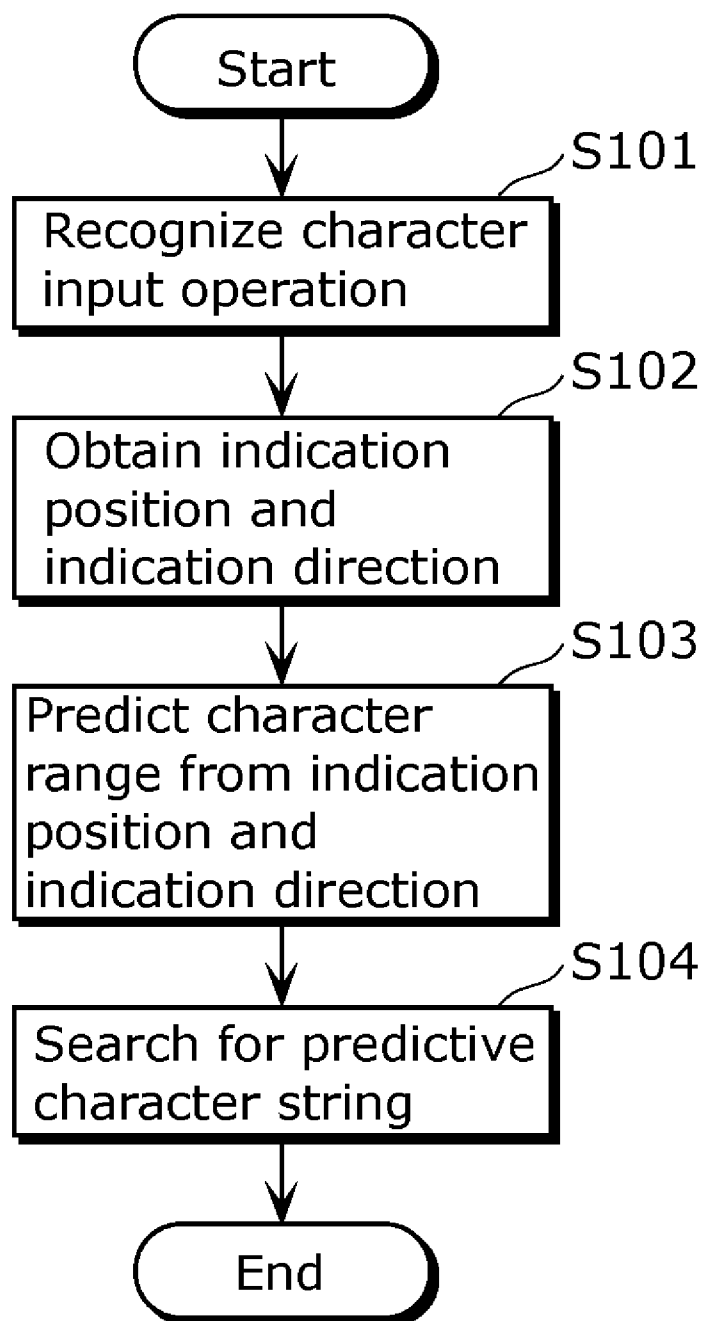


FIG. 3

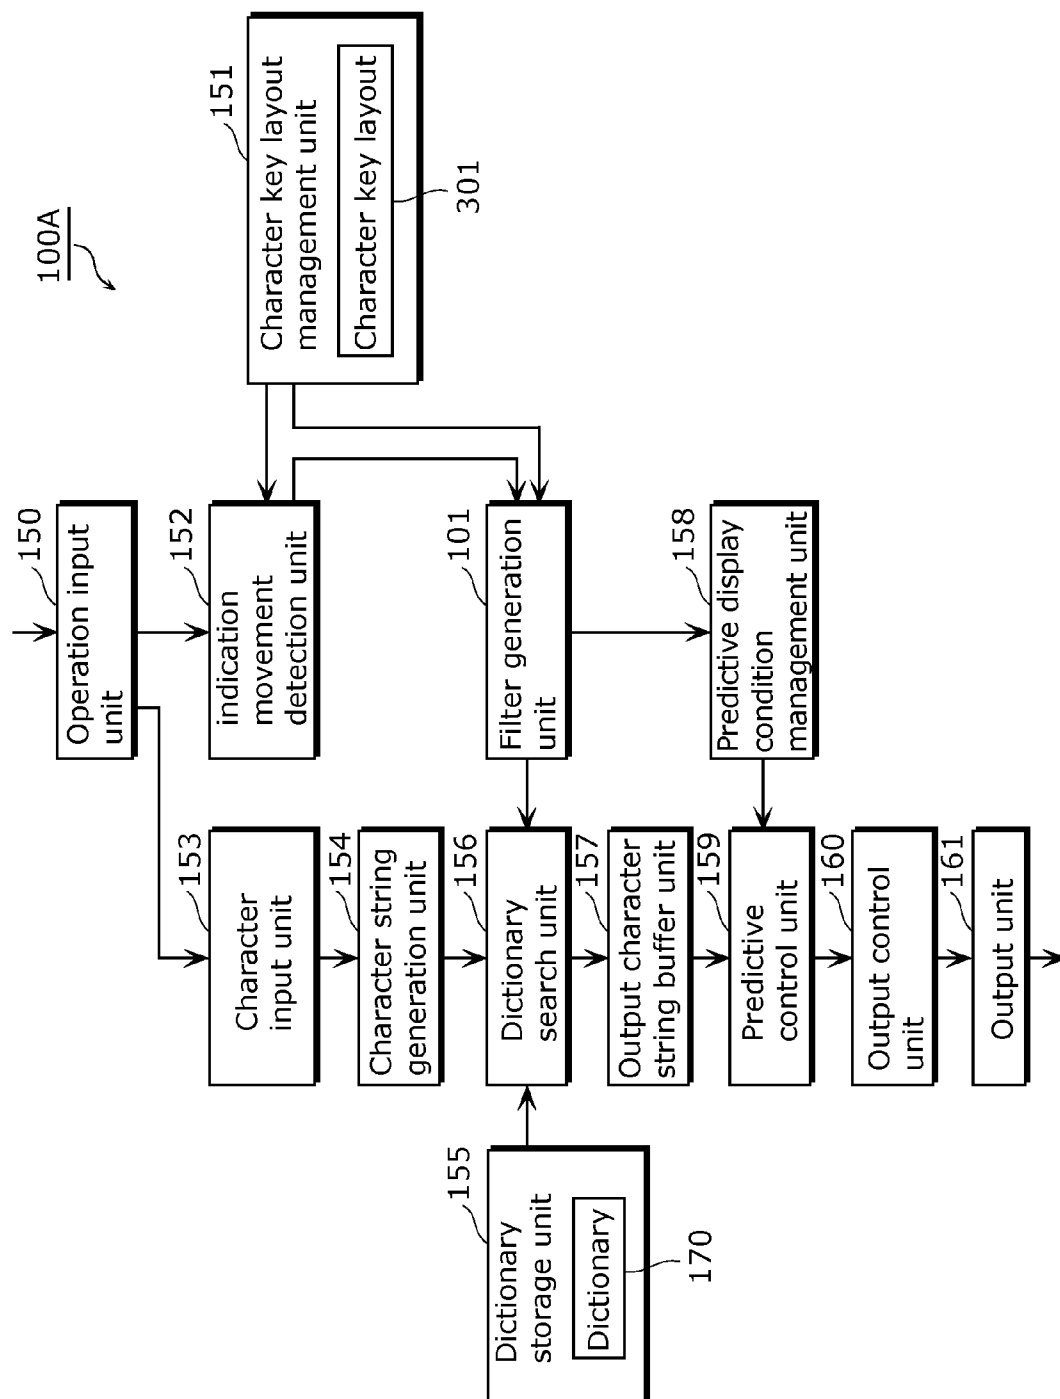


FIG. 4

Character key layout 301				
302 Character 341	Layout position 303			
	304 Start position 342		351 End position 305	
	X-axis coordinate	Y-axis coordinate	X-axis coordinate	Y-axis coordinate 352
a	1000	0	900	100
i	1000	100	900	200
u	1000	200	900	300
e	1000	300	900	400
o	1000	400	900	500
ka	900	0	800	100
ki	900	100	800	200
ku	900	200	800	300
ke	900	300	800	400
ko	900	400	800	500
sa	800	0	700	100
⋮				
so	800	400	700	500
ta	700	0	600	100
chi	700	100	600	200
tsu	700	200	600	300
te	700	300	600	400
to	700	400	600	500
na	600	0	500	100
ni	600	100	500	200
nu	600	200	500	300
ne	600	300	500	400
no	600	400	500	500
ha	500	0	400	100
⋮				
ma	400	0	300	100
⋮				
wa	100	0	0	100
wo	100	100	0	200
n	100	200	0	300
—	100	400	0	500

FIG. 5A

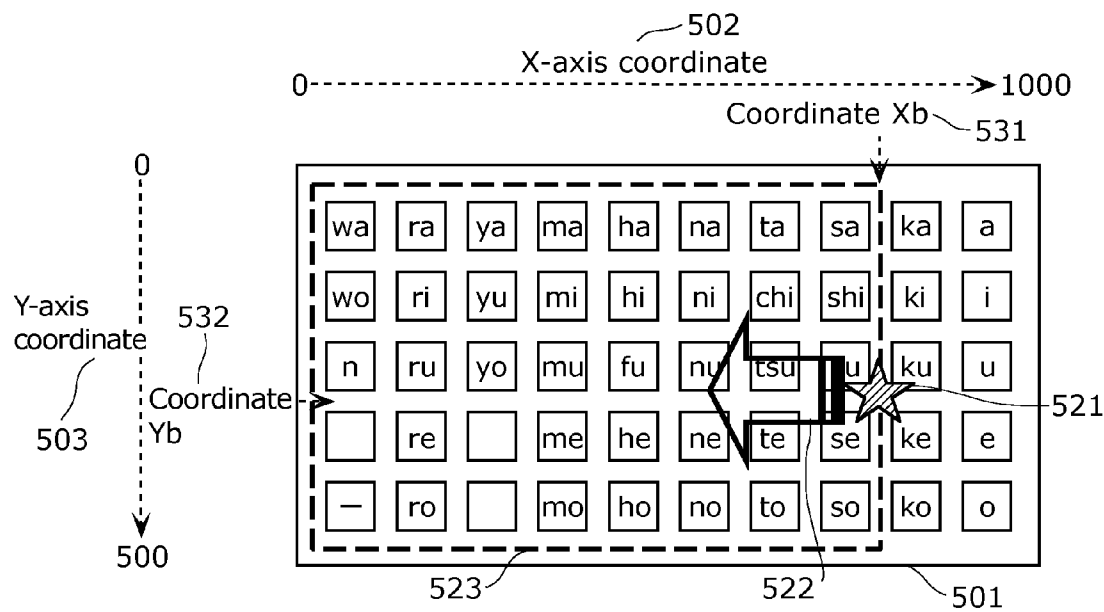


FIG. 5B

Indication position	
Coordinate Xb	Coordinate Yb
800	300

FIG. 6

Indication direction	Character range condition
	(Start position) : (End position)
Vertically up	(0, 0) : (1000, Coordinate Yb)
Vertically down	(0, Coordinate Yb) : (1000, 500)
Horizontally left	(0, 0) : (Coordinate Xb, 500)
Horizontally right	(Coordinate Xb, 0) : (1000, 500)
Diagonally up left	(0, 0) : (Coordinate Xb, Coordinate Yb)
Diagonally down left	(0, Coordinate Yb) : (Coordinate Xb, 500)
Diagonally up right	(Coordinate Xb, 0) : (1000, Coordinate Yb)
Diagonally down right	(Coordinate Xb, Coordinate Yb) : (1000, 500)

FIG. 7

Character key layout				
302 Character 341	Layout position			
	304 — Start position — 342		351 — End position — 305	
	X-axis coordinate	Y-axis coordinate	X-axis coordinate	Y-axis coordinate
1	0	0	100	100
2	100	0	200	100
3	200	0	300	100
4	300	0	400	100
5	400	0	500	100
6	500	0	600	100
7	600	0	700	100
8	700	0	800	100
⋮				
Q	0	100	100	200
W	100	100	200	200
E	200	100	300	200
R	300	100	400	200
T	400	100	500	200
Y	500	100	600	200
U	600	100	700	200
I	700	100	800	200
O	800	100	900	200
P	900	100	1000	200
A	0	200	100	300
S	100	200	200	300
⋮				
M	600	300	700	400
,	700	300	800	400
.	800	300	900	400
Space	300	400	700	500



FIG. 8A

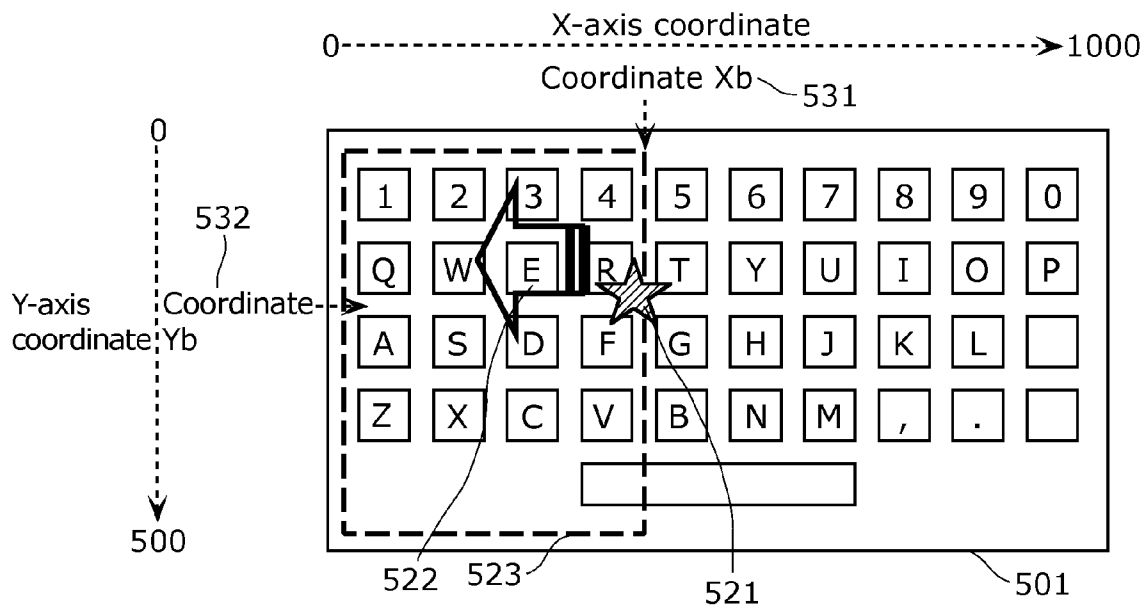


FIG. 8B

Indication position	
Coordinate Xb	Coordinate Yb
400	200

FIG. 9

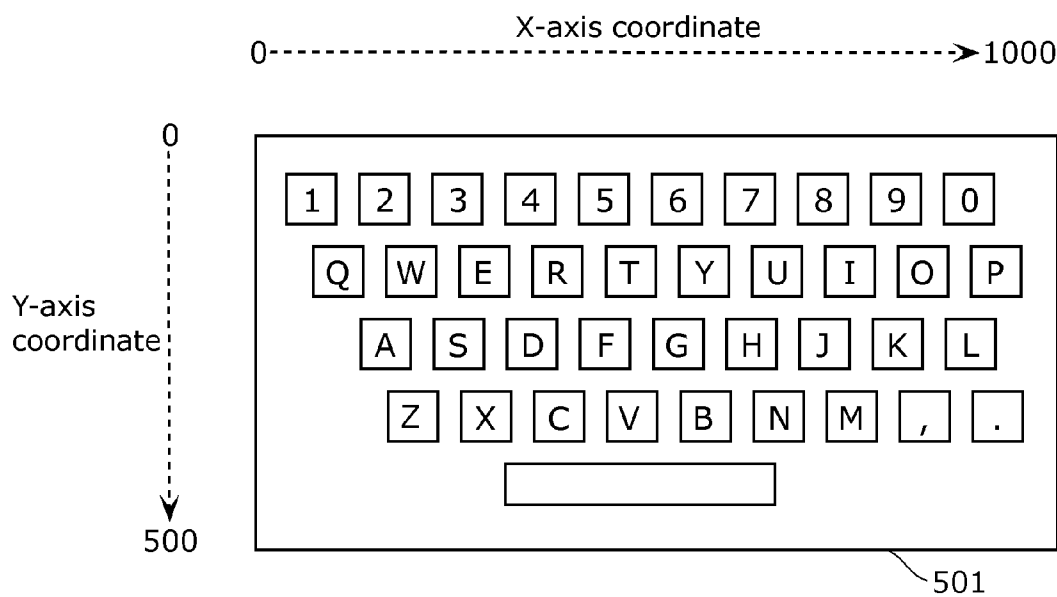


FIG. 10

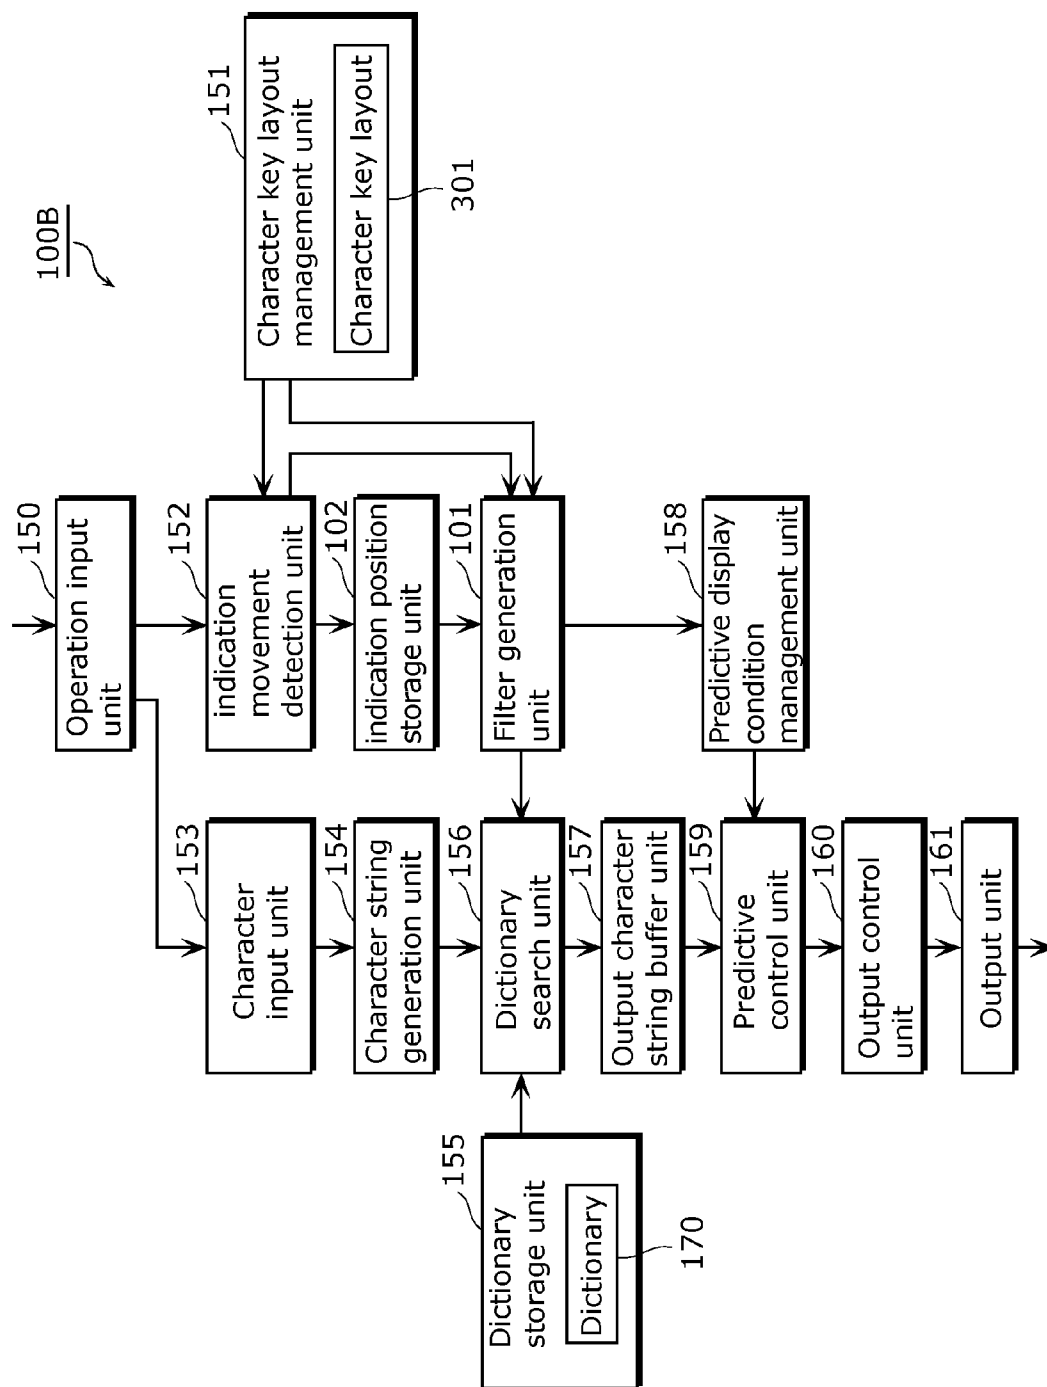


FIG. 11A

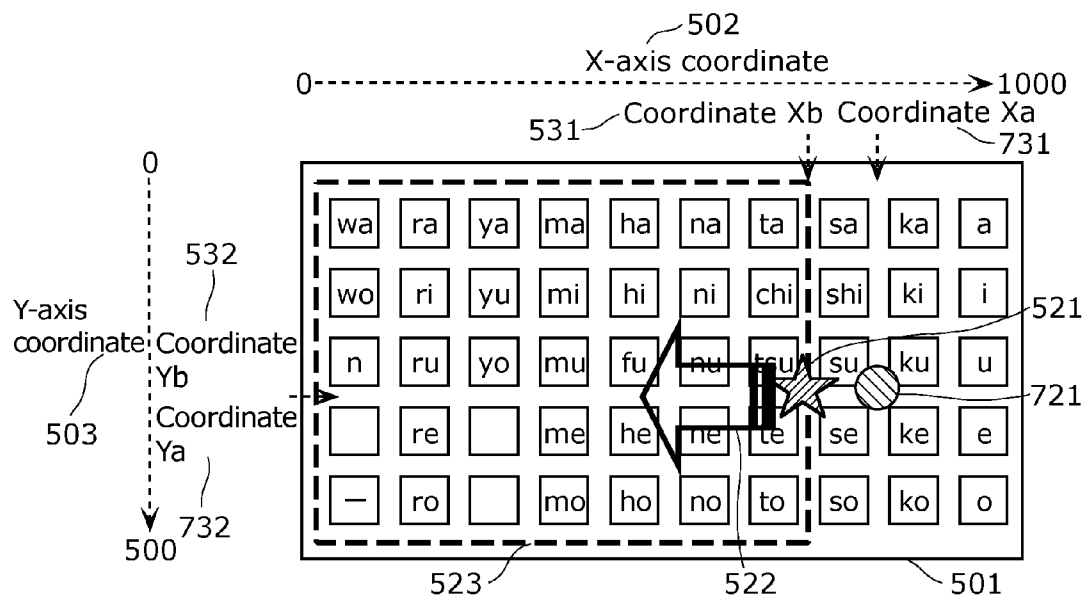


FIG. 11B

541	Indication position	
	Coordinate Xb	Coordinate Yb
1	800	300
2	700	300

FIG. 11C

Indication starting point	
Coordinate Xa	Coordinate Ya
800	300

FIG. 12

Indication direction 402A	Character range condition 404 403 405
	(Start position) : (End position)
Coordinate Xa = Coordinate Xb Coordinate Ya > Coordinate Yb	(0, 0) : (1000, Coordinate Yb)
Coordinate Xa = Coordinate Xb Coordinate Ya < Coordinate Yb	(0, Coordinate Yb) : (1000, 500)
Coordinate Xa > Coordinate Xb Coordinate Ya = Coordinate Yb	(0, 0) : (Coordinate Xb, 500)
Coordinate Xa < Coordinate Xb Coordinate Ya = Coordinate Yb	(Coordinate Xb, 0) : (1000, 500)
Coordinate Xa > Coordinate Xb Coordinate Ya > Coordinate Yb	(0, 0) : (Coordinate Xb, Coordinate Yb)
Coordinate Xa > Coordinate Xb Coordinate Ya < Coordinate Yb	(0, Coordinate Yb) : (Coordinate Xb, 500)
Coordinate Xa < Coordinate Xb Coordinate Ya > Coordinate Yb	(Coordinate Xb, 0) : (1000, Coordinate Yb)
731- Coordinate Xa < Coordinate Xb Coordinate Ya < Coordinate Yb	(Coordinate Xb, Coordinate Yb) : (1000, 500)

FIG. 13

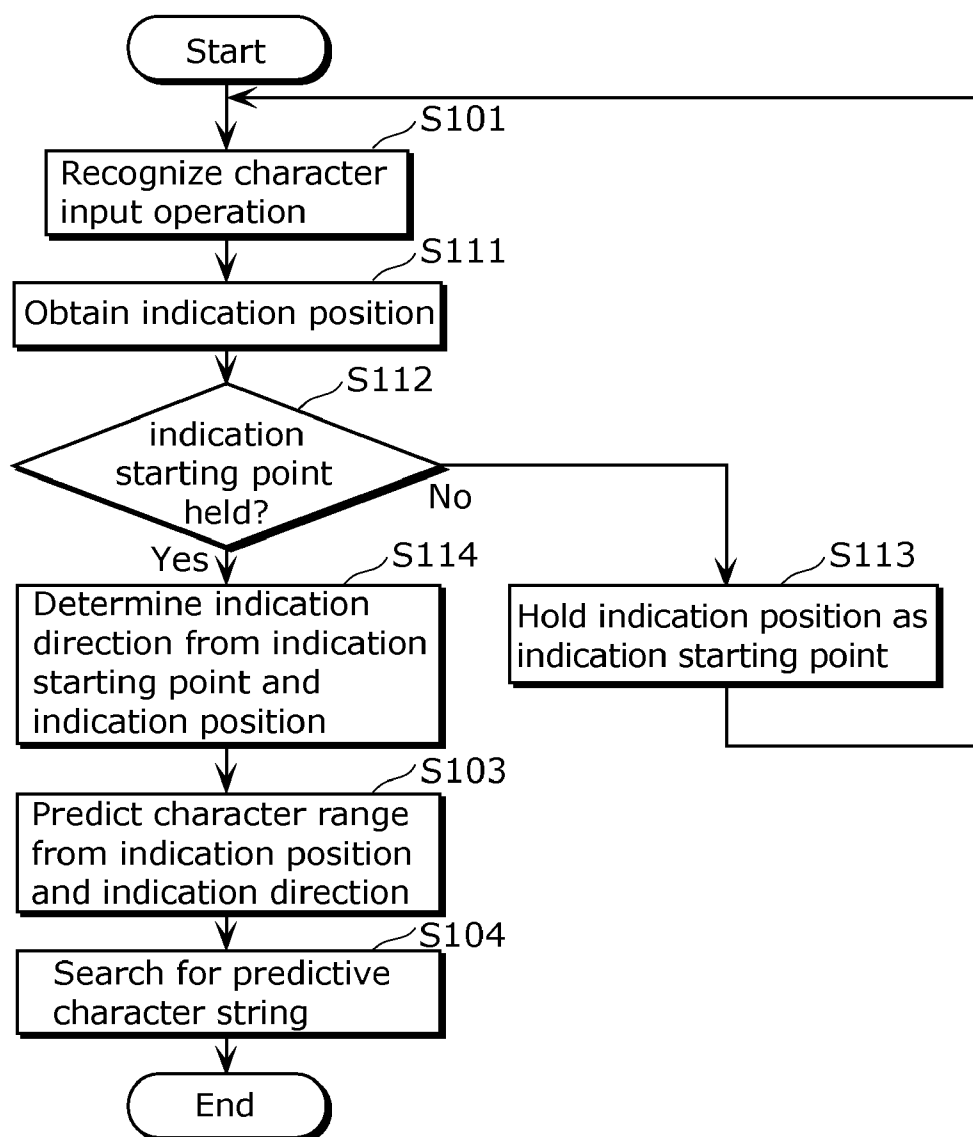


FIG. 14A

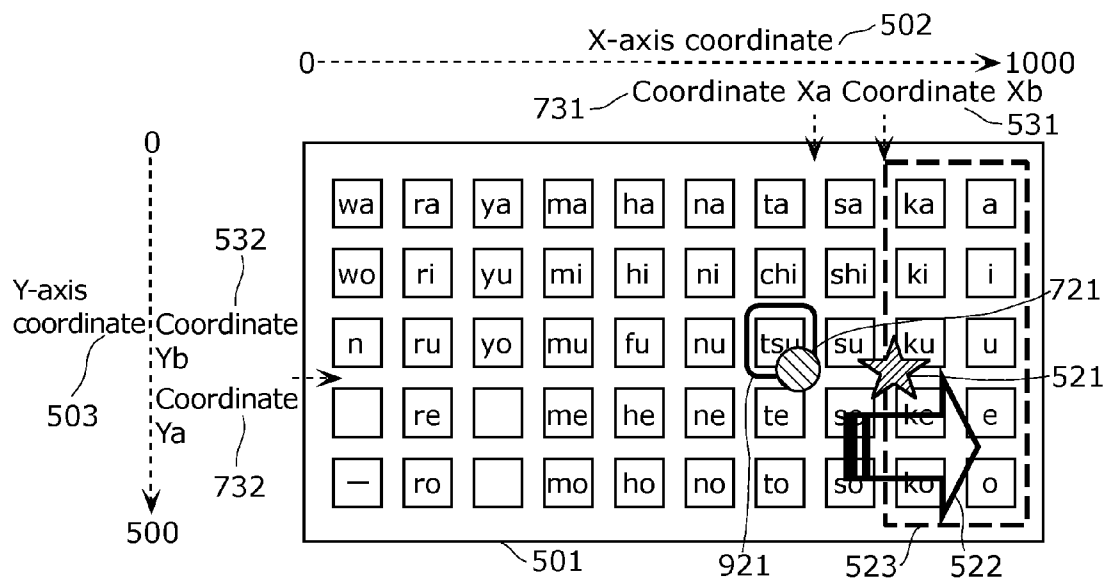


FIG. 14B

Indication position		
Time lapse	Coordinate Xb	Coordinate Yb
1	800	300
2	700	300
3	800	300

FIG. 14C

Indication starting point		
Time lapse	Coordinate Xa	Coordinate Ya
1	800	300
2	700	300

FIG. 15

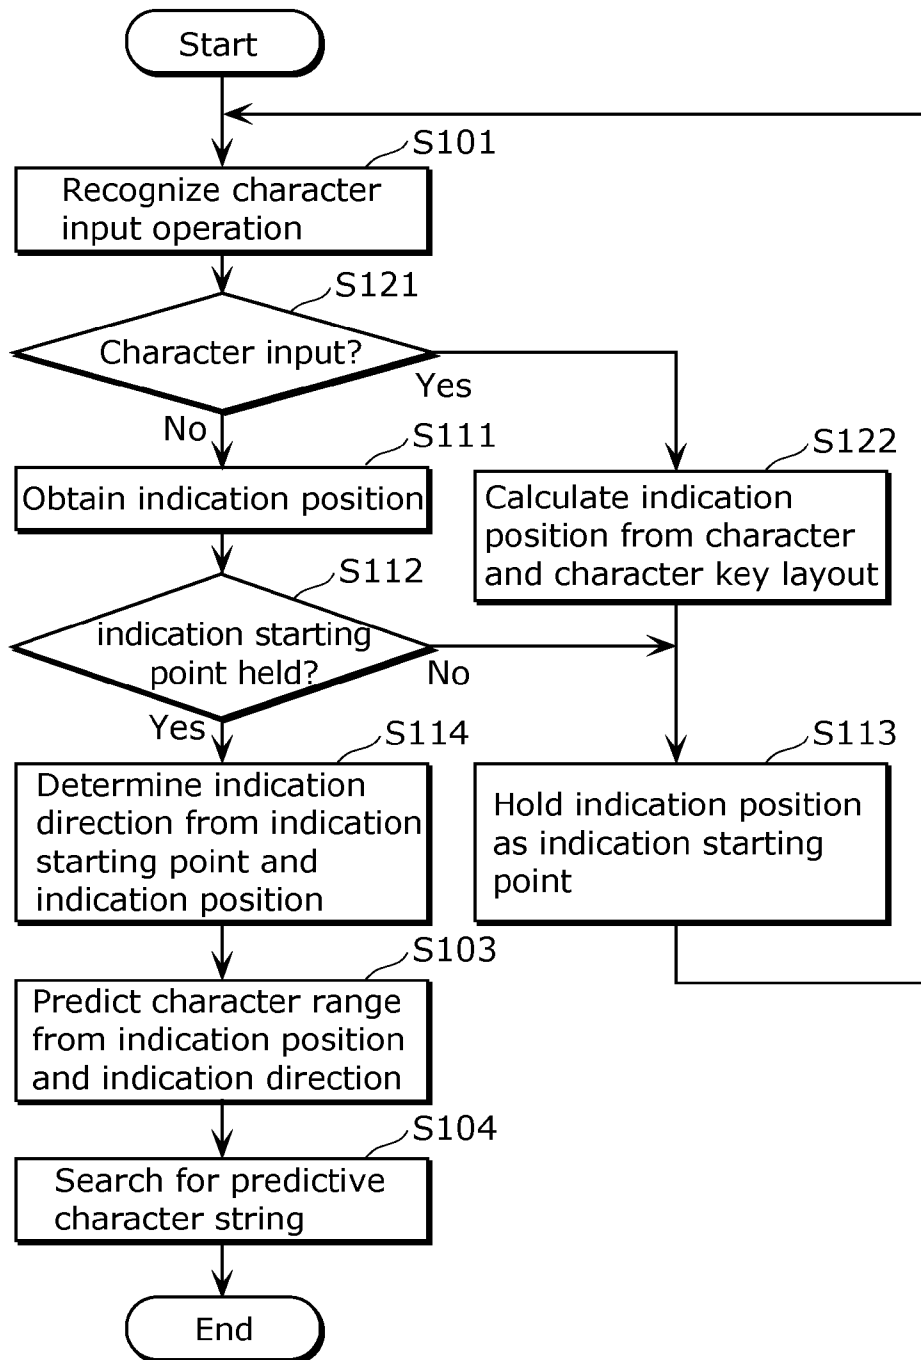




FIG. 16A

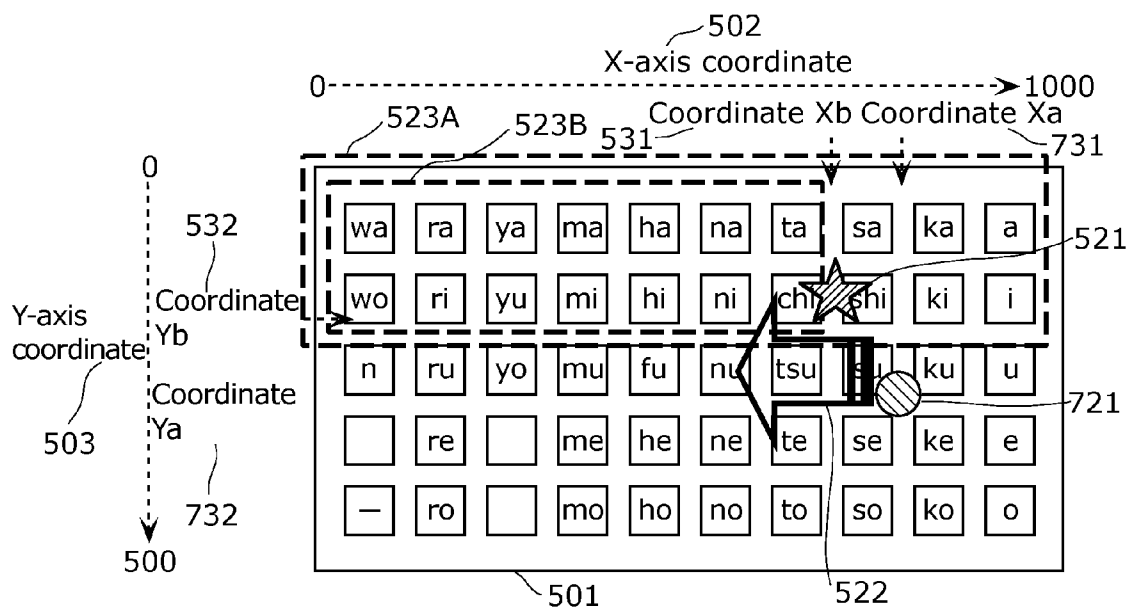


FIG. 16B

Time lapse	Indication position	
	Coordinate Xb	Coordinate Yb
1	800	300
2	800	200
3	700	200

FIG. 16C

Indication starting point	
Coordinate Xa	Coordinate Ya
800	300

FIG. 17A

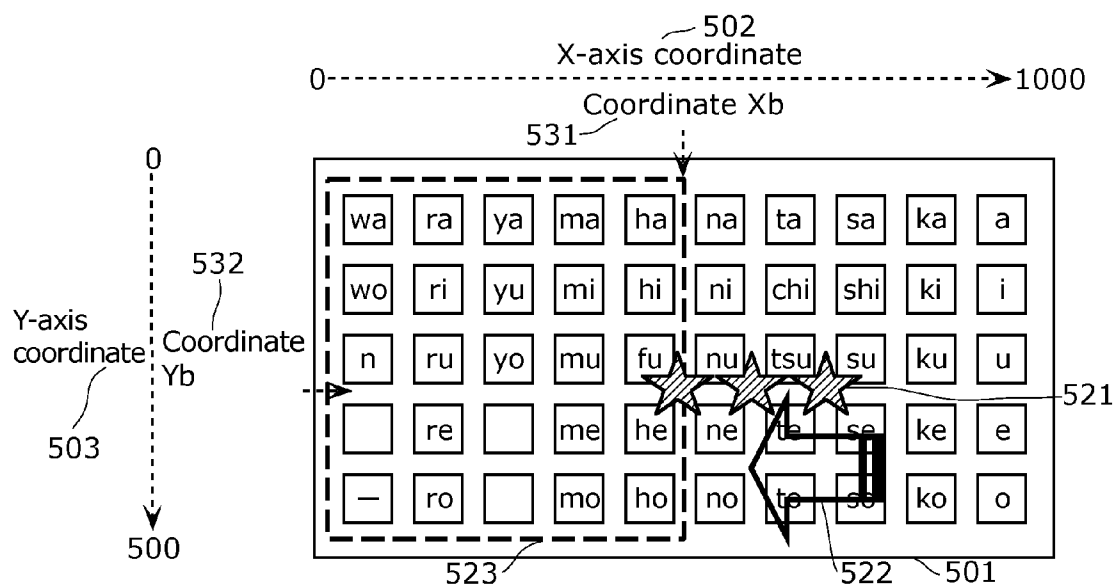


FIG. 17B

541	Indication position	
	Coordinate Xb	Coordinate Yb
1	700	300
2	600	300
3	500	300

FIG. 18A

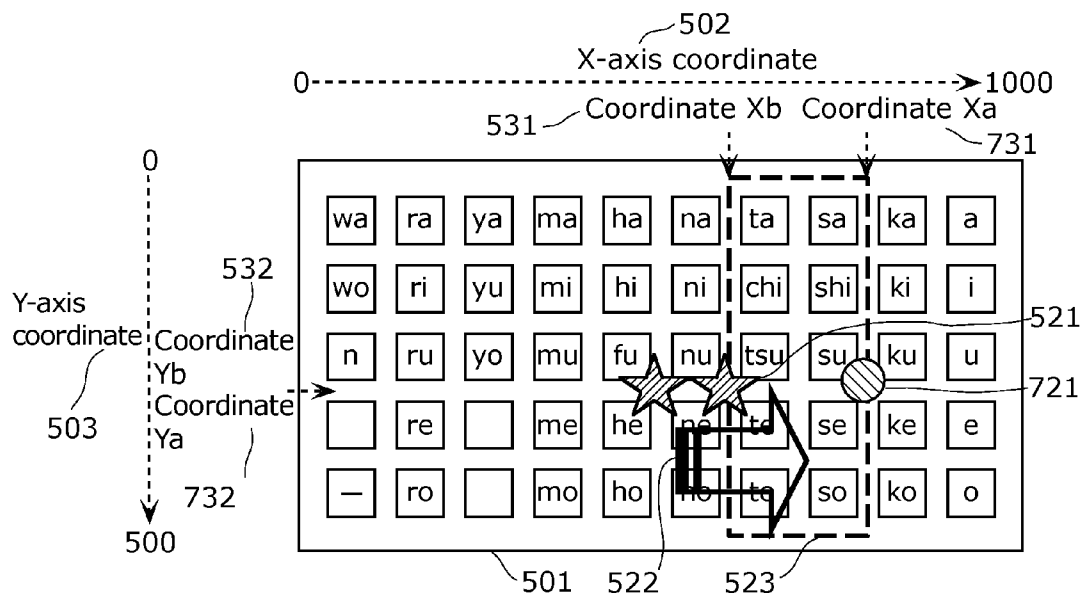


FIG. 18B

Time lapse	Indication position	
	Coordinate Xb	Coordinate Yb
1	800	300
2	500	300
3	600	300

FIG. 18C

Indication starting point	
Coordinate Xa	Coordinate Ya
800	300

FIG. 19

Indication direction	Character range condition
	(Start position) : (End position)
Coordinate Xa = Coordinate Xb Coordinate Ya > Coordinate Yb	(0, Coordinate Yb) : (1000, Coordinate Ya)
Coordinate Xa = Coordinate Xb Coordinate Ya < Coordinate Yb	(0, Coordinate Ya) : (1000, Coordinate Yb)
Coordinate Xa > Coordinate Xb Coordinate Ya = Coordinate Yb	(Coordinate Xb, 0) : (Coordinate Xa, 500)
Coordinate Xa < Coordinate Xb Coordinate Ya = Coordinate Yb	(Coordinate Xa, 0) : (Coordinate Xb, 500)
Coordinate Xa > Coordinate Xb Coordinate Ya > Coordinate Yb	(Coordinate Xb, Coordinate Yb) : (Coordinate Xa, Coordinate Ya)
Coordinate Xa > Coordinate Xb Coordinate Ya < Coordinate Yb	(Coordinate Xb, Coordinate Ya) : (Coordinate Xa, Coordinate Yb)
Coordinate Xa < Coordinate Xb Coordinate Ya > Coordinate Yb	(Coordinate Xa, Coordinate Yb) : (Coordinate Xb, Coordinate Ya)
Coordinate Xa < Coordinate Xb Coordinate Ya < Coordinate Yb	(Coordinate Xa, Coordinate Ya) : (Coordinate Xb, Coordinate Yb)

731

732

532

531

731

411

732

412

FIG. 20A

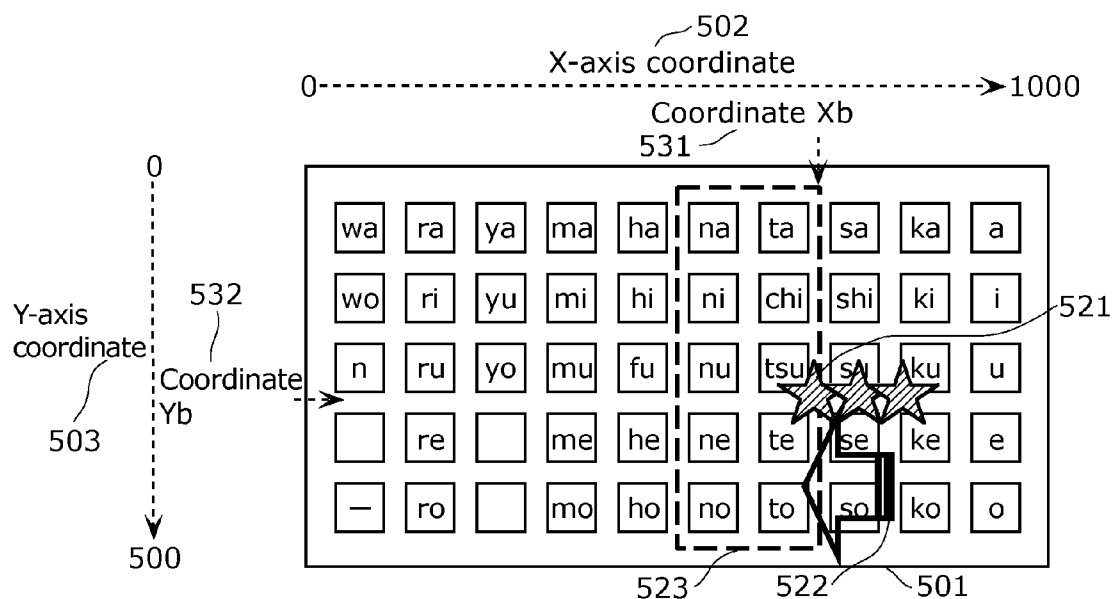


FIG. 20B

541	Indication position	
	Coordinate Xb	Coordinate Yb
1	800	300
2	750	300
3	700	300

FIG. 21

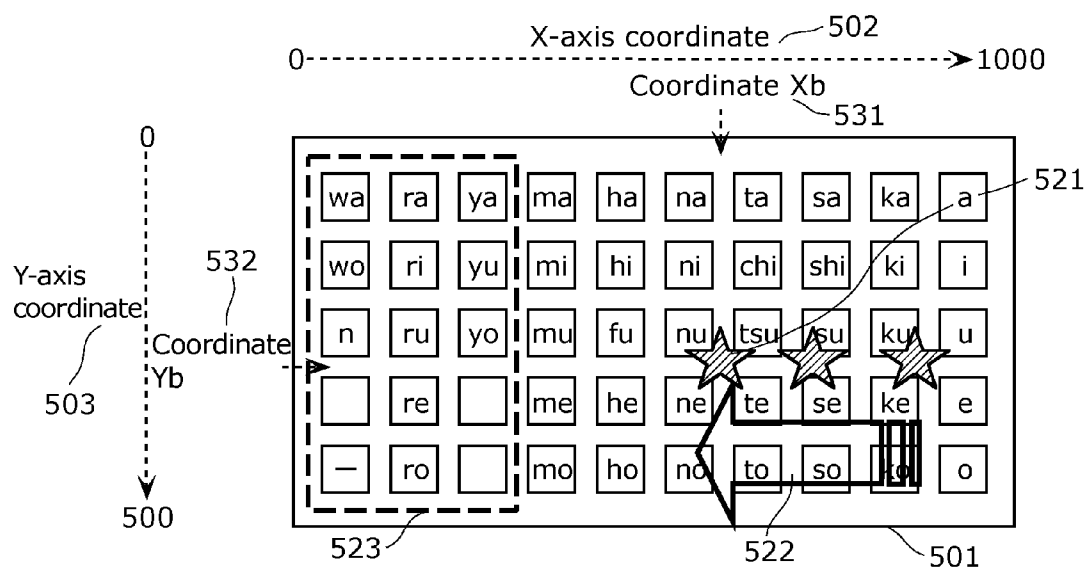


FIG. 22

402 Indication direction	401C Character range condition	
	(Start position) : (End position)	
⋮		
⋮		
421 Horizontally left	(Coordinate Xb - 200, 0)	411 : (Coordinate Xb, 500)
⋮		
⋮		
⋮		
⋮		
⋮		

The diagram shows a 10x5 grid of Japanese characters. The horizontal axis is labeled 'X-axis coordinate' with values 0 and 1000. The vertical axis is labeled 'Y-axis coordinate' with values 0 and 500. A path is highlighted with a dashed line, starting from the character 'wa' (row 1, column 1) and ending at the character 'o' (row 5, column 10). The path is labeled with the number 502. The grid is labeled with the number 501. The characters in the grid are: Row 1: wa, ra, ya, ma, ha, na, ta, sa, ka, a; Row 2: wo, ri, yu, mi, hi, ni, shi, shi, ki, i; Row 3: n, ru, yo, mu, fu, nu, tsu, su, ku, u; Row 4: re, me, he, ne, te, se, ke, e; Row 5: ro, mo, ho, no, to, so, ko, o. The path 502 is defined by the following sequence of characters: wa, ra, ya, ma, ha, na, ta, sa, ka, a, shi, shi, ki, i, su, ku, u, se, ke, e, to, so, ko, o.

541	Indication position			
	Time lapse	Coordinate Xb	Coordinate Yb	Indication angle
	1	800	0	0
	2	750	100	63
	3	700	200	63



FIG. 24

Indication direction 402	Angle range 406		Character range condition 403	
			404	405
			(Start position) : (End position)	
⋮	407			
Diagonally down left 424	Reference range 407		(Coordinate Xb - 500, Coordinate Yb) : (Coordinate Xb, 500)	
	Deletion range	0 <, < 30	(Coordinate Xb - 100, Coordinate Yb + 100) : (Coordinate Xb, 500)	
		30 ≤, ≤ 60	(Coordinate Xb - 100, 400) : (Coordinate Xb, 500)	
		60 <, < 90	(Coordinate Xb - 500, Coordinate Yb) : (Coordinate Xb - 300, Coordinate Yb + 100)	
			(Coordinate Xb - 500, Coordinate Yb) : (Coordinate Xb - 300, Coordinate Yb + 200)	
⋮	408		411	412

401D

FIG. 25A

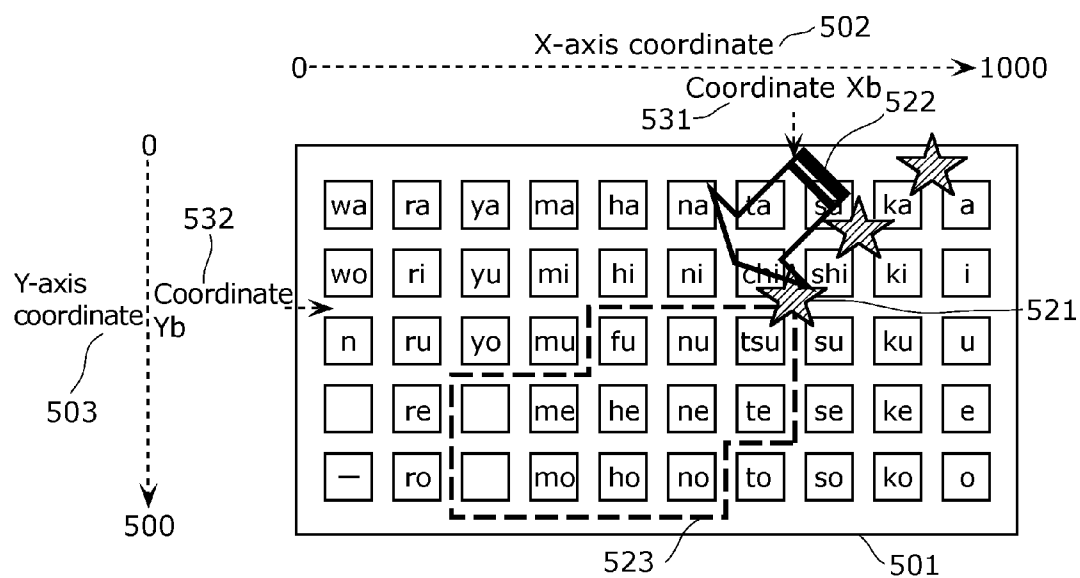


FIG. 25B

541	Indication position		
	Time lapse	Coordinate Xb	Coordinate Yb
1	900	0	0
2	800	100	45
3	700	200	45

FIG. 26A

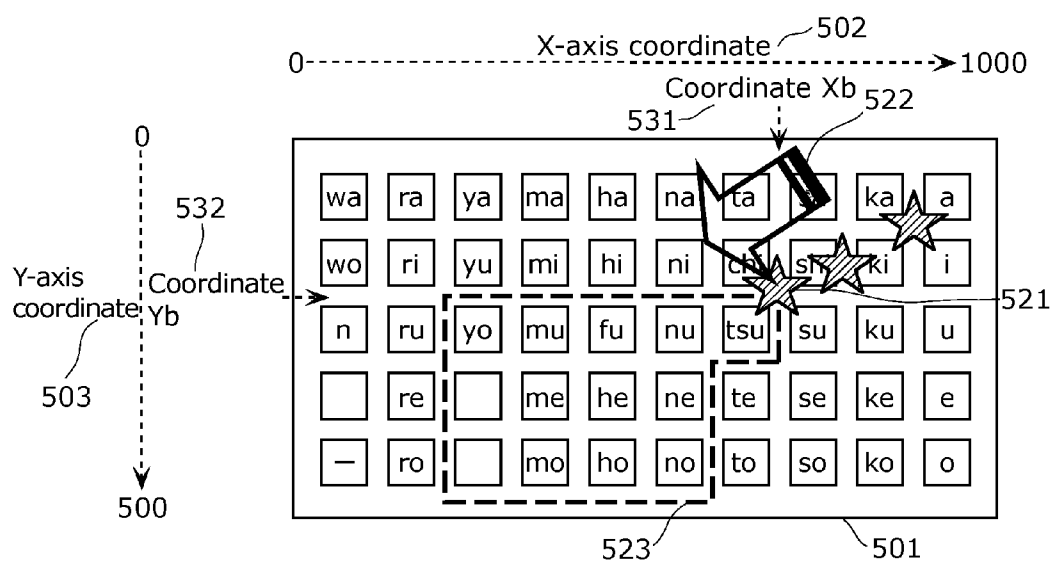


FIG. 26B

541	Indication position			
	Time lapse	Coordinate Xb	Coordinate Yb	Indication angle
1	900	100	0	
2	800	150	26	
3	700	200	26	

FIG. 27A

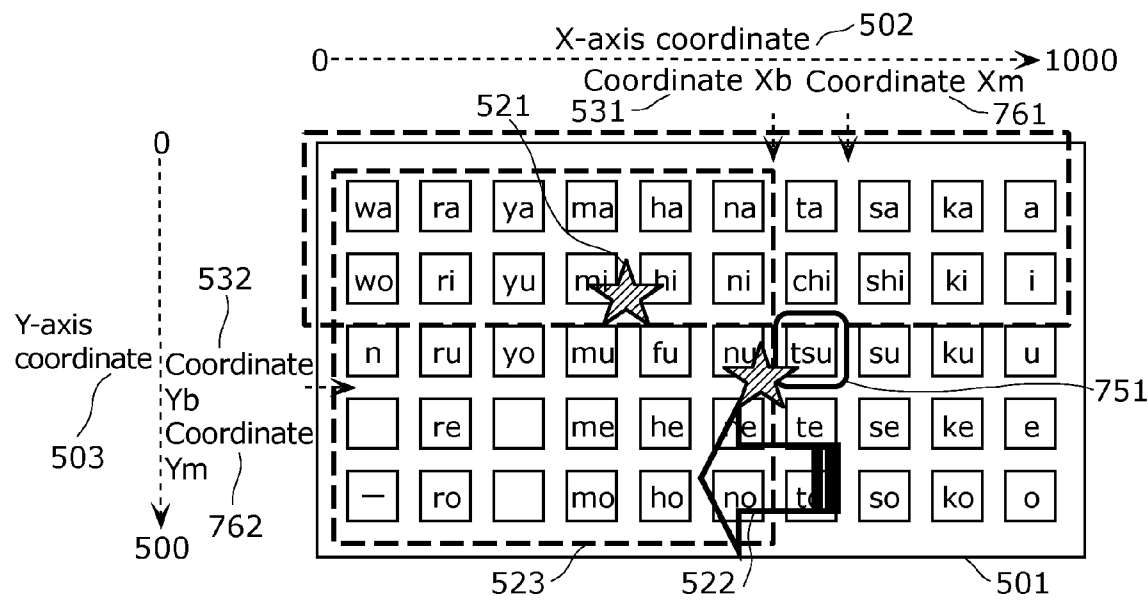


FIG. 27B

Indication position		
Time lapse	Coordinate Xb	Coordinate Yb
1	700	300
2	600	300
3	500	300
4	400	200

FIG. 27C

Input character position	
Coordinate Xm	Coordinate Ym
700	300

FIG. 28

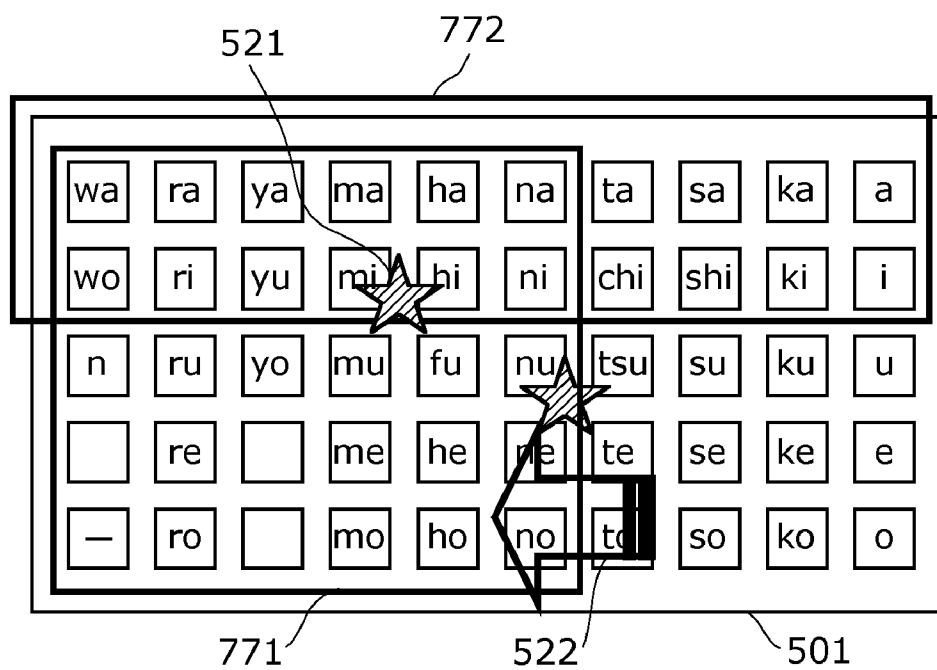



FIG. 29

170



Character string
tsukue
tsuna
tsune
tsuma
tsume
tsuru
tsukushi
tsute
tsushi
tsuyu
tsurara
tsuwamono
tsukuba
tsunokakushi
tsumiki
tsurezuregusa
tsuchifumazu

781

FIG. 30

782

Display area
tsukue
tsuna
tsune
tsuma
tsume
tsuru
tsukushi
tsute
tsushi
tsuyu
tsurara
tsuwamono
tsukuba
tsunokakushi
tsumiki
tsurezuregusa
tsuchifumazu

FIG. 31

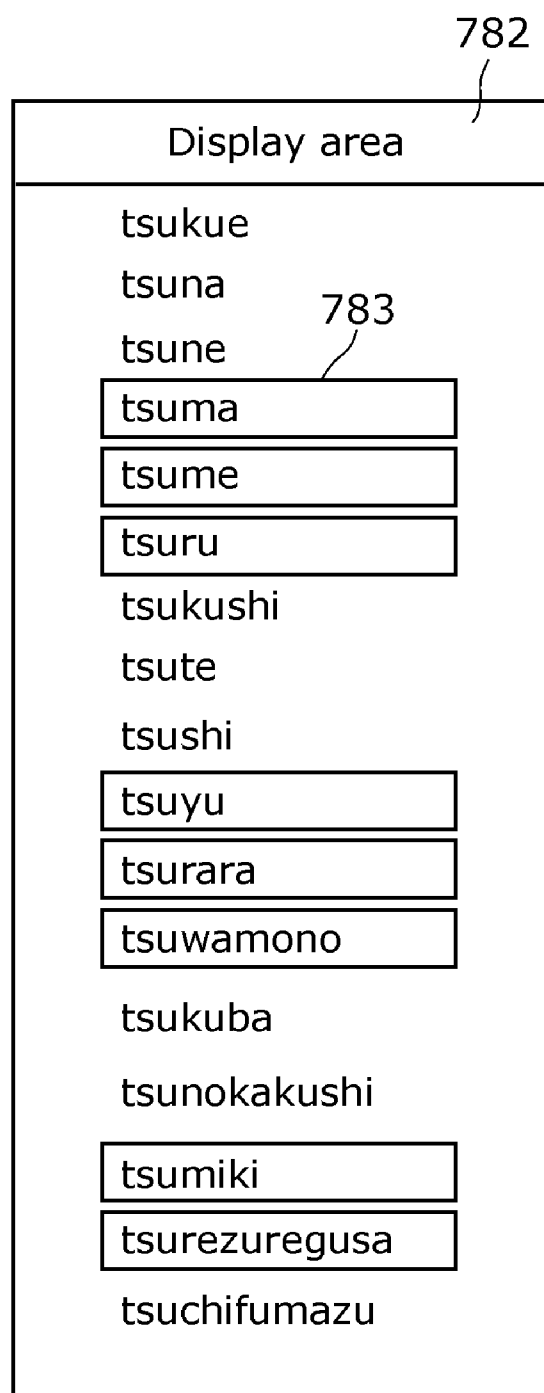




FIG. 32

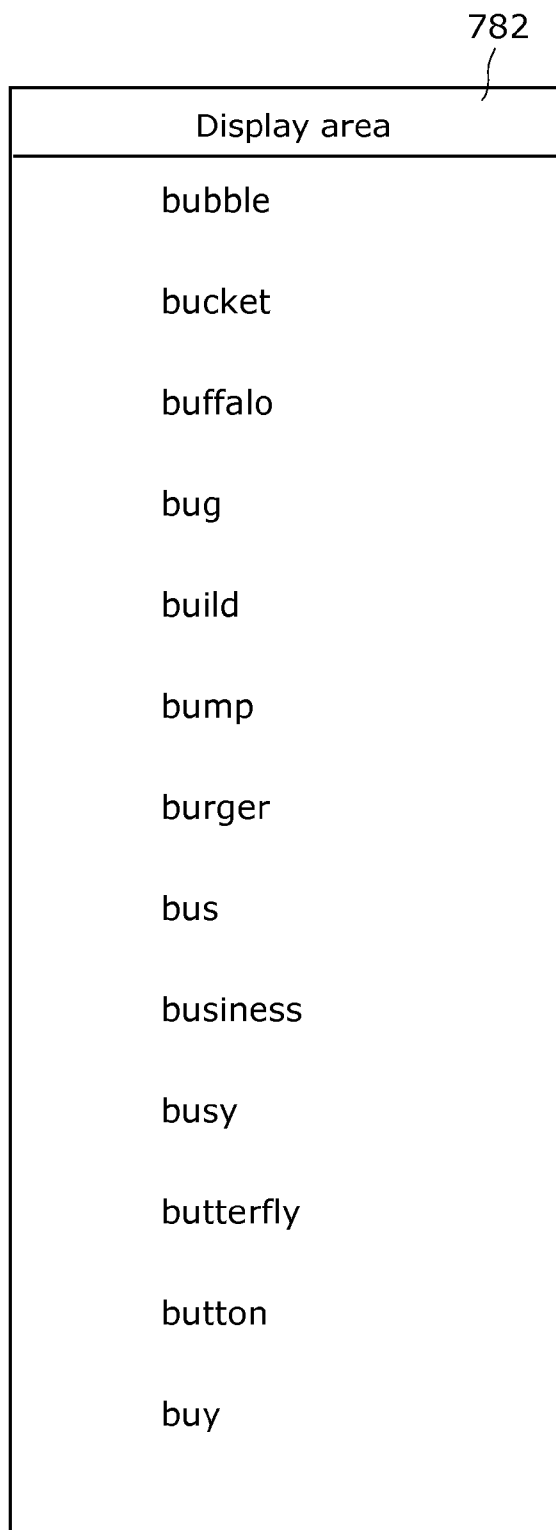


FIG. 33

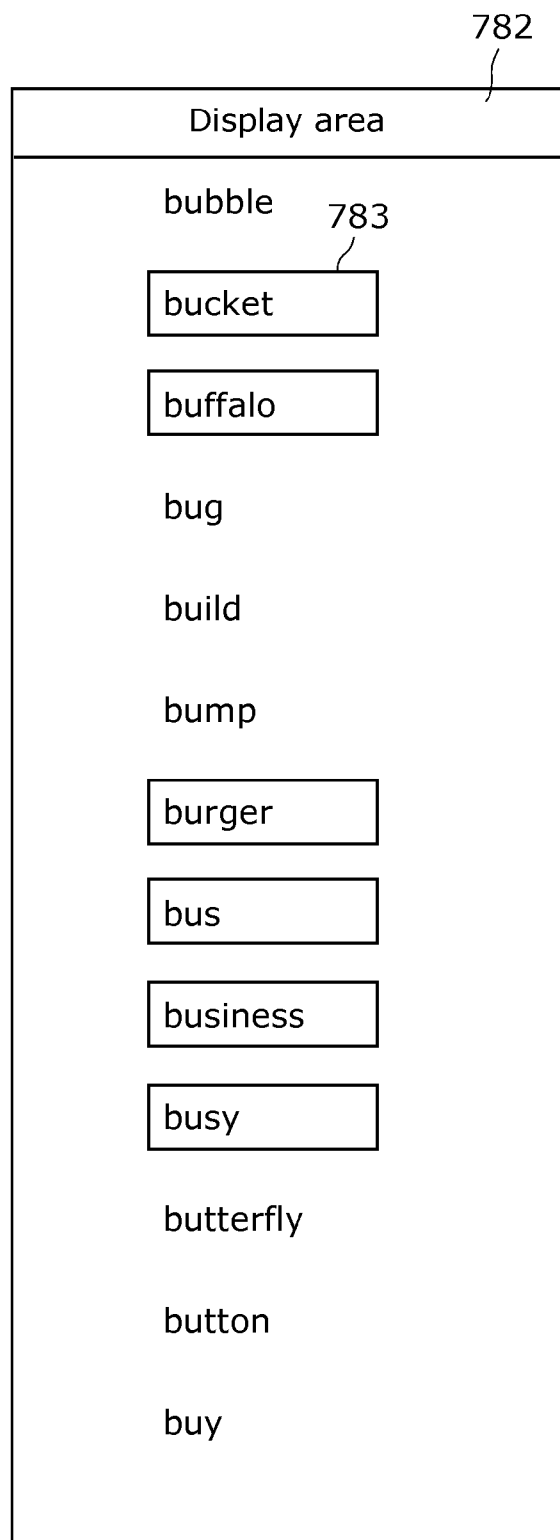


FIG. 34


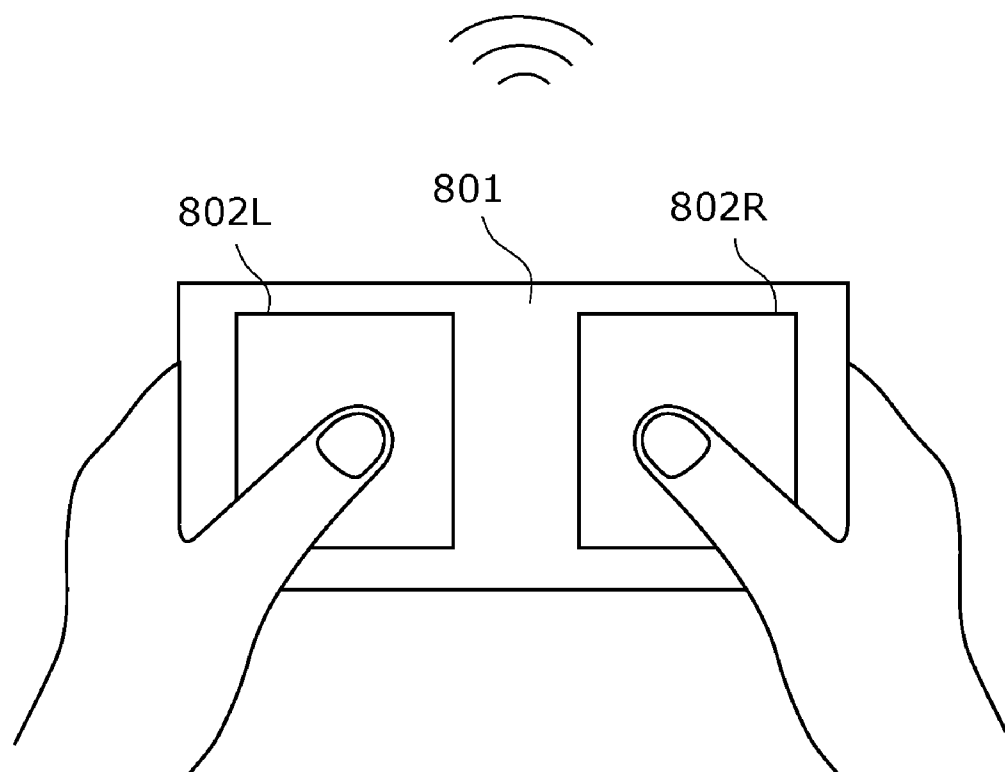


FIG. 35

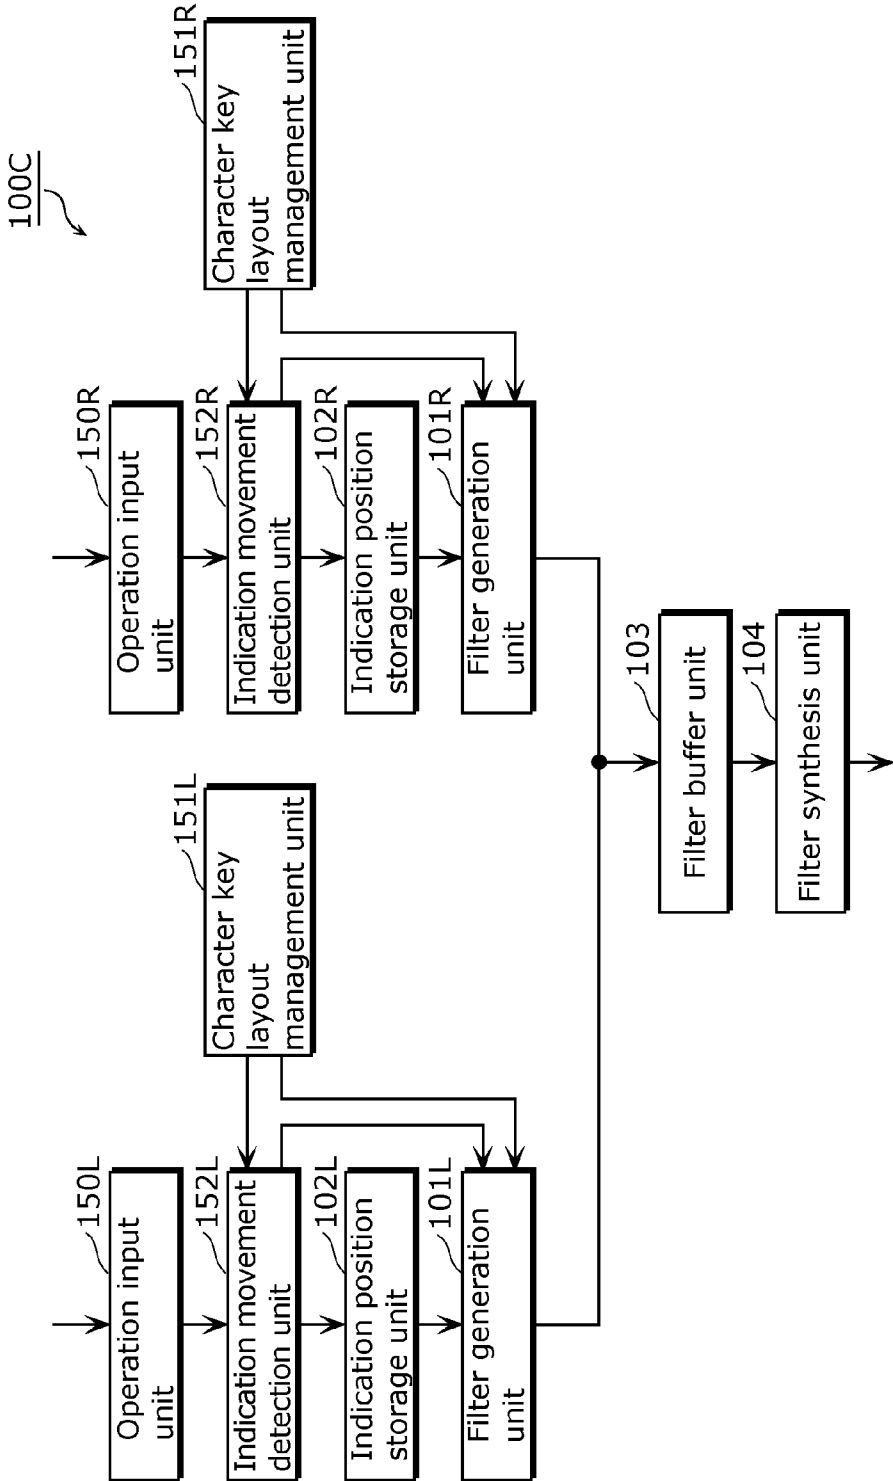

The diagram shows a 5x10 grid of Japanese syllables. The X-axis coordinate (502) ranges from 0 to 1000. The Y-axis coordinate (503) ranges from 0 to 500. The grid is divided into five vertical sections by dashed lines at X=553, X=583, and X=531. The syllables are arranged as follows:

wa	ra	ya	ma	ha	na	ta	sa	ka	a
wo	ri	yu	mi	hi	ni	chi	shi	ki	i
n	ru	yo	mu	fu	nu	tsu	su	ku	u
	re		me	he	ne	te	se	ke	e
-	ro		mo	ho	no	to	so	ko	o

Two paths are highlighted with stars and arrows:

- Path 1 (551): Starts at (0, 0) and moves right to (553, 0).
- Path 2 (552): Starts at (553, 0) and moves down to (553, 500).
- Path 3 (553): Starts at (553, 500) and moves right to (583, 500).
- Path 4 (554): Starts at (583, 500) and moves down to (583, 531).
- Path 5 (555): Starts at (583, 531) and moves right to (531, 531).
- Path 6 (556): Starts at (531, 531) and moves down to (531, 500).

The paths are labeled with numbers 551 through 556. The grid is labeled with coordinates 501, 502, 503, 551, 552, 553, 554, 555, 556, 583, 531, 523, 522, 521, 520, 519, 518, 517, 516, 515, 514, 513, 512, 511, 510, 509, 508, 507, 506, 505, 504, 503, 502, 501, 500.

Indication position	
Coordinate Xb	Coordinate Yb
800	300

Indication position	
Coordinate Xc	Coordinate Yc
400	300

FIG. 37A

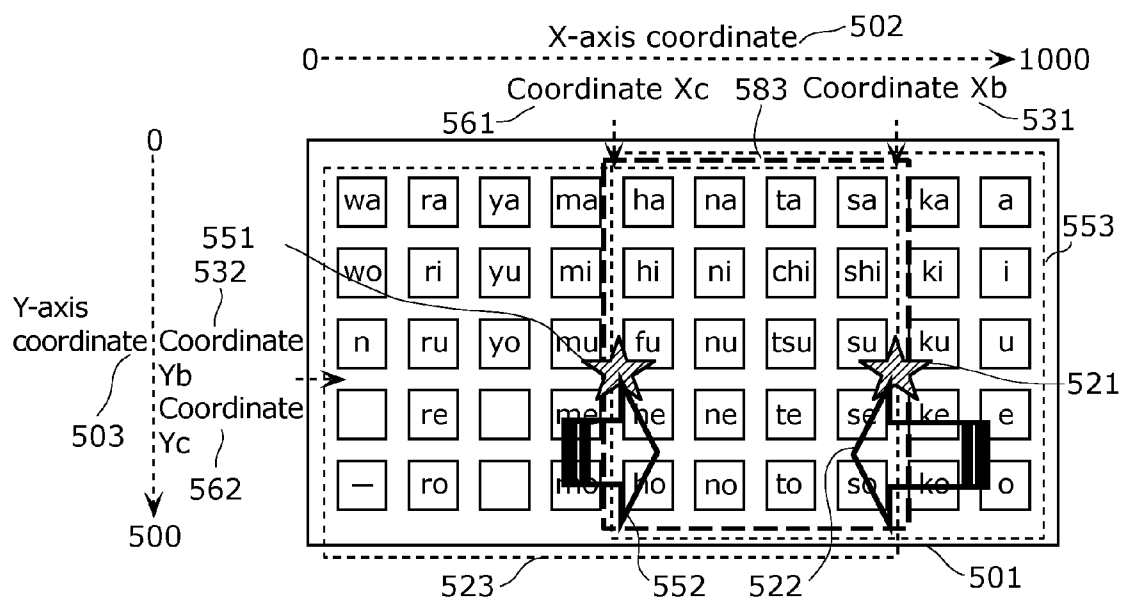


FIG. 37B

Time lapse	Indication position	
	Coordinate Xb	Coordinate Yb
1	900	300
2	850	300
3	800	300

FIG. 37C

Time lapse	Indication position	
	Coordinate Xc	Coordinate Yc
1	400	300

FIG. 38A

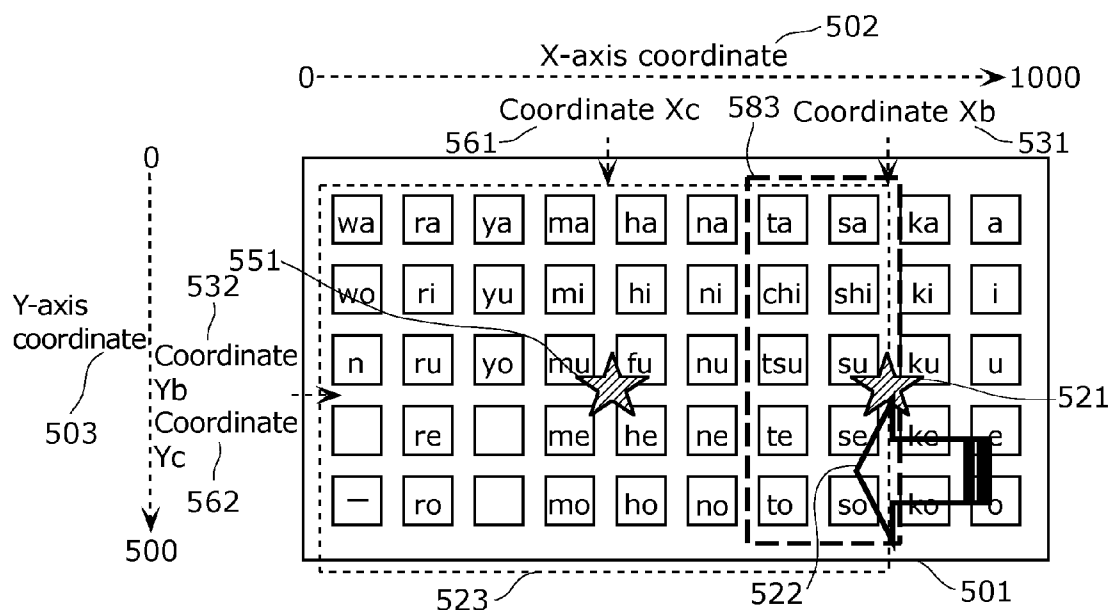


FIG. 38B

541 Time lapse	521 Indication position	
	531 Coordinate Xb	532 Coordinate Yb
1	900	300
2	850	300
3	800	300

FIG. 38C

571 Time lapse	551 Indication position	
	561 Coordinate Xc	562 Coordinate Yc
1	400	300

FIG. 39A

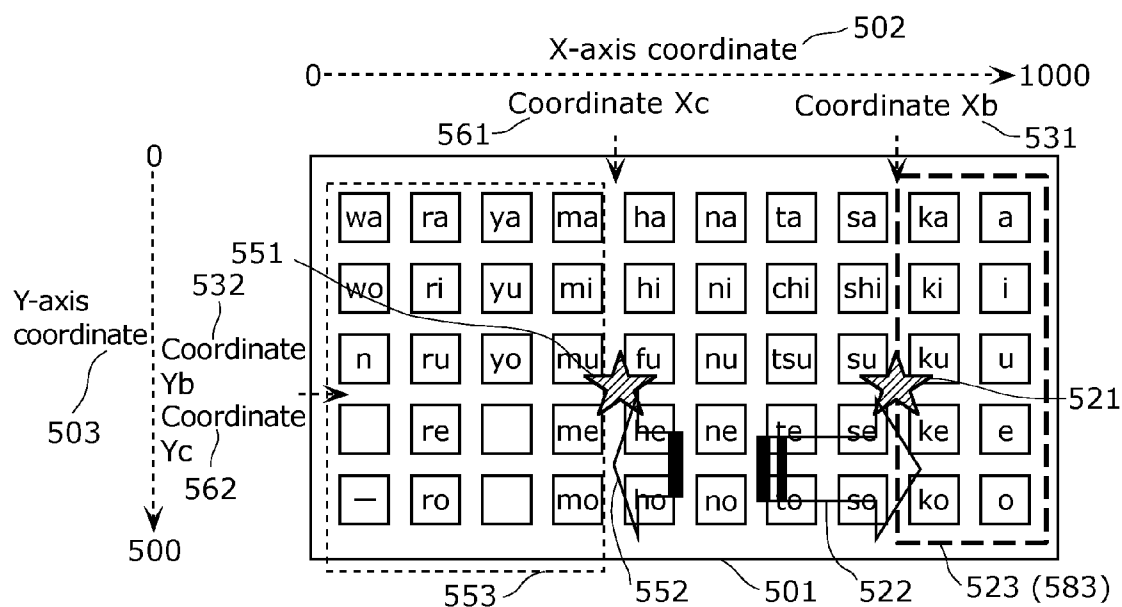


FIG. 39B


541	Indication position	
	Time lapse	Coordinate Yb
	1	600
	2	700
	3	800

FIG. 39C

571	Indication position	
	Time lapse	Coordinate Xc
	1	500
	2	450
	3	400



FIG. 40

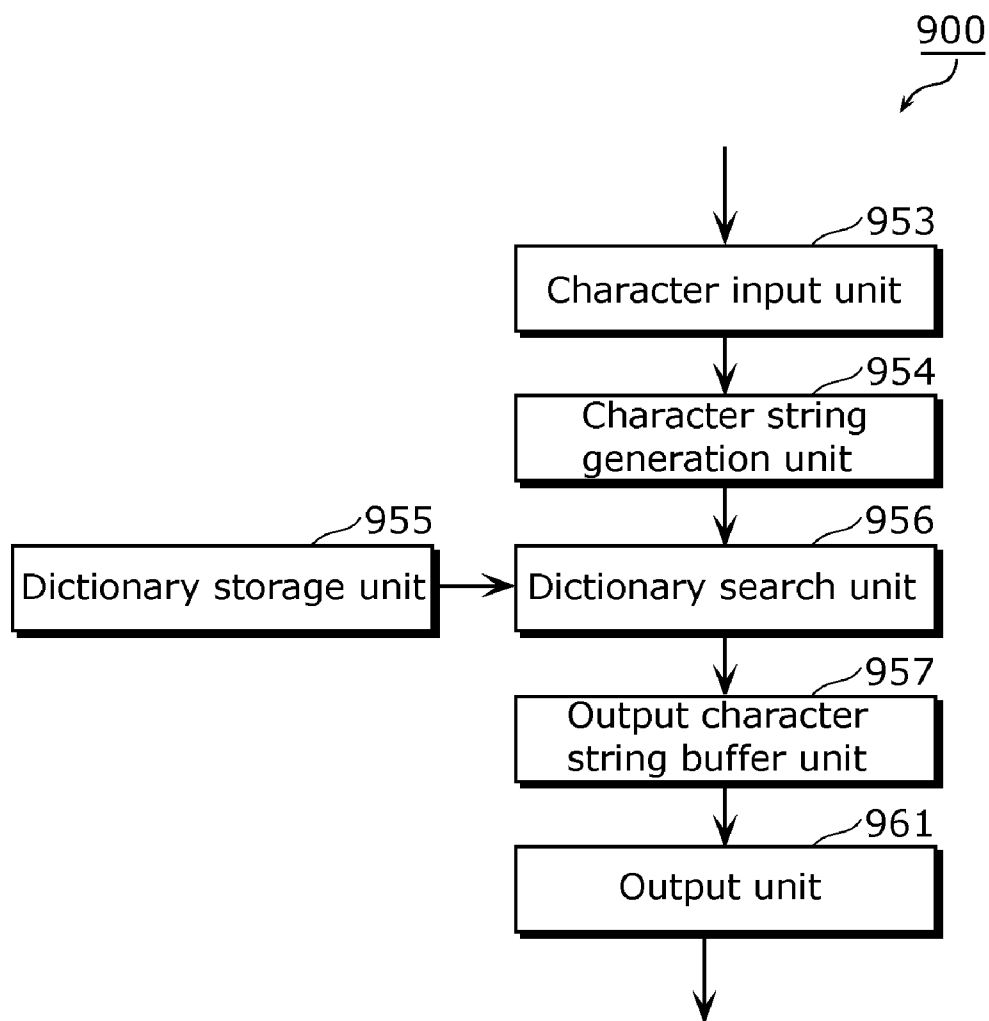

# CHARACTER INPUT PREDICTION APPARATUS, CHARACTER INPUT PREDICTION METHOD, AND CHARACTER INPUT SYSTEM

## TECHNICAL FIELD

[0001] The present invention relates to a character input prediction apparatus, a character input prediction method, and a character input system, and particularly relates to a character input prediction apparatus that predicts a character string inputted by a user.

## BACKGROUND ART

[0002] As a predictive candidate control method for improving conventional character string input efficiency, for example, there is a character string prediction method described in Patent Literature (PTL) 1. In the method, a plurality of characters are assigned to a character key according to a preset condition. A character string already inputted is combined with each character assigned to the character key, to generate a character string. For each generated character string, a word dictionary is searched for a character string whose pronunciation starts with the generated character string, as a result of which predictive character strings are generated from the corresponding character strings. Display order of the predictive character strings is determined by a predetermined procedure.

## CITATION LIST

### Patent Literature

[0003] [PTL 1]

[0004] Japanese Unexamined Patent Application Publication No. 2002-14956

## SUMMARY OF INVENTION

### Technical Problem

[0005] However, such a character input prediction apparatus is required to narrow down predictive character strings more speedily.

[0006] The present invention is intended to solve the conventional problem stated above, and has an object of providing a character input prediction apparatus and a character input prediction method that can narrow down predictive character strings at high speed.

### Solution to Problem

[0007] To solve the conventional problem stated above, a character input prediction apparatus according to one aspect of the present invention includes: a first operation input unit that obtains information of a first character input operation that is performed by a user using a character key layout display in which a plurality of character keys are arranged; a dictionary storage unit that stores a dictionary including a plurality of candidate character strings; a character key layout management unit that stores a character key layout showing the arrangement of the plurality of character keys in the character key layout display; a first indication movement detection unit that detects a first indication position and a first indication direction in the character key layout display from the information of the first character input operation, the first

indication position showing a position of the first character input operation, and the first indication direction showing a movement direction of the first character input operation; a filter generation unit that determines a first character range in the character key layout display using the first indication position, the first indication direction, and the character key layout, the first character range being located in the first indication direction with the first indication position as a base point; and a dictionary search unit that searches the plurality of candidate character strings included in the dictionary, for a predictive character string that includes any character included in the first character range.

[0008] Note that such an overall or specific embodiment may be implemented by a system, a method, an integrated circuit, a computer program, or a recording medium, or any combination of a system, a method, an integrated circuit, a computer program, and a recording medium.

### Advantageous Effects of Invention

[0009] According to the present invention, it is possible to provide a character input prediction apparatus and a character input prediction method that can narrow down predictive character strings at high speed.

## BRIEF DESCRIPTION OF DRAWINGS

[0010] FIG. 1 is a block diagram of a character input prediction apparatus according to Embodiment 1 of the present invention.

[0011] FIG. 2 is a flowchart of a character input prediction process according to Embodiment 1 of the present invention.

[0012] FIG. 3 is a block diagram of a character input prediction apparatus according to Embodiment 1 of the present invention.

[0013] FIG. 4 is a diagram showing a structure of a character key layout according to Embodiment 1 of the present invention.

[0014] FIG. 5A is a diagram showing an operation example of the character input prediction apparatus according to Embodiment 1 of the present invention.

[0015] FIG. 5B is a diagram showing an example of an indication position according to Embodiment 1 of the present invention.

[0016] FIG. 6 is a diagram showing a structure of a character range definition according to Embodiment 1 of the present invention.

[0017] FIG. 7 is a diagram showing a structure of a character key layout according to Embodiment 1 of the present invention.

[0018] FIG. 8A is a diagram showing an operation example of the character input prediction apparatus according to Embodiment 1 of the present invention.

[0019] FIG. 8B is a diagram showing an example of an indication position according to Embodiment 1 of the present invention.

[0020] FIG. 9 is a diagram showing an example of a character key layout according to Embodiment 1 of the present invention.

[0021] FIG. 10 is a block diagram of a character input prediction apparatus according to Embodiment 2 of the present invention.

[0022] FIG. 11A is a diagram showing an operation example of the character input prediction apparatus according to Embodiment 2 of the present invention.

[0023] FIG. 11B is a diagram showing an example of an indication position according to Embodiment 2 of the present invention.

[0024] FIG. 11C is a diagram showing an example of an indication starting point according to Embodiment 2 of the present invention.

[0025] FIG. 12 is a diagram showing a structure of a character range definition according to Embodiment 2 of the present invention.

[0026] FIG. 13 is a flowchart of a character input prediction process according to Embodiment 2 of the present invention.

[0027] FIG. 14A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 3 of the present invention.

[0028] FIG. 14B is a diagram showing an example of an indication position according to Embodiment 3 of the present invention.

[0029] FIG. 14C is a diagram showing an example of an indication starting point according to Embodiment 3 of the present invention.

[0030] FIG. 15 is a flowchart of a character input prediction process according to Embodiment 3 of the present invention.

[0031] FIG. 16A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 4 of the present invention.

[0032] FIG. 16B is a diagram showing an example of an indication position according to Embodiment 4 of the present invention.

[0033] FIG. 16C is a diagram showing an example of an indication starting point according to Embodiment 4 of the present invention.

[0034] FIG. 17A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 5 of the present invention.

[0035] FIG. 17B is a diagram showing an example of an indication position according to Embodiment 5 of the present invention.

[0036] FIG. 18A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 6 of the present invention.

[0037] FIG. 18B is a diagram showing an example of an indication position according to Embodiment 6 of the present invention.

[0038] FIG. 18C is a diagram showing an example of an indication starting point according to Embodiment 6 of the present invention.

[0039] FIG. 19 is a diagram showing a structure of a character range definition according to Embodiment 6 of the present invention.

[0040] FIG. 20A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 7 of the present invention.

[0041] FIG. 20B is a diagram showing an example of an indication position according to Embodiment 7 of the present invention.

[0042] FIG. 21 is a diagram showing an operation example of the character input prediction apparatus according to Embodiment 7 of the present invention.

[0043] FIG. 22 is a diagram showing a structure of a character range definition according to Embodiment 7 of the present invention.

[0044] FIG. 23A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 8 of the present invention.

[0045] FIG. 23B is a diagram showing an example of an indication position according to Embodiment 8 of the present invention.

[0046] FIG. 24 is a diagram showing a structure of a character range definition according to Embodiment 8 of the present invention.

[0047] FIG. 25A is a diagram showing an operation example of the character input prediction apparatus according to Embodiment 8 of the present invention.

[0048] FIG. 25B is a diagram showing an example of an indication position according to Embodiment 8 of the present invention.

[0049] FIG. 26A is a diagram showing an operation example of the character input prediction apparatus according to Embodiment 8 of the present invention.

[0050] FIG. 26B is a diagram showing an example of an indication position according to Embodiment 8 of the present invention.

[0051] FIG. 27A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 9 of the present invention.

[0052] FIG. 27B is a diagram showing an example of an indication position according to Embodiment 9 of the present invention.

[0053] FIG. 27C is a diagram showing an example of an input character position according to Embodiment 9 of the present invention.

[0054] FIG. 28 is a diagram showing a display example of the character input prediction apparatus according to Embodiment 9 of the present invention.

[0055] FIG. 29 is a diagram showing an example of character strings included in a dictionary according to Embodiment 9 of the present invention.

[0056] FIG. 30 is a diagram showing an example of a display area according to Embodiment 9 of the present invention.

[0057] FIG. 31 is a diagram showing an example of the display area according to Embodiment 9 of the present invention.

[0058] FIG. 32 is a diagram showing an example of the display area according to Embodiment 9 of the present invention.

[0059] FIG. 33 is a diagram showing an example of the display area according to Embodiment 9 of the present invention.

[0060] FIG. 34 is a diagram showing an input apparatus according to Embodiment 10 of the present invention.

[0061] FIG. 35 is a block diagram of a character input prediction apparatus according to Embodiment 10 of the present invention.

[0062] FIG. 36A is a diagram showing an operation example of the character input prediction apparatus according to Embodiment 10 of the present invention.

[0063] FIG. 36B is a diagram showing an example of an indication position according to Embodiment 10 of the present invention.

[0064] FIG. 36C is a diagram showing an example of an indication position according to Embodiment 10 of the present invention.

[0065] FIG. 37A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 11 of the present invention.

[0066] FIG. 37B is a diagram showing an example of an indication position according to Embodiment 11 of the present invention.

[0067] FIG. 37C is a diagram showing an example of an indication position according to Embodiment 11 of the present invention.

[0068] FIG. 38A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 12 of the present invention.

[0069] FIG. 38B is a diagram showing an example of an indication position according to Embodiment 12 of the present invention.

[0070] FIG. 38C is a diagram showing an example of an indication position according to Embodiment 12 of the present invention.

[0071] FIG. 39A is a diagram showing an operation example of a character input prediction apparatus according to Embodiment 13 of the present invention.

[0072] FIG. 39B is a diagram showing an example of an indication position according to Embodiment 13 of the present invention.

[0073] FIG. 39C is a diagram showing an example of an indication position according to Embodiment 13 of the present invention.

[0074] FIG. 40 is a block diagram of a character input prediction apparatus.

#### DESCRIPTION OF EMBODIMENTS

##### Findings on which the Present Invention is Based

[0075] The inventors of the present invention have found the following problem.

[0076] FIG. 40 is a block diagram of a character string prediction apparatus to which the present invention is not applied.

[0077] A character input prediction apparatus 900 shown in FIG. 40 includes: a character input unit 953 that receives an input character; a character string generation unit 954 that generates a character string from the input character; a dictionary storage unit 955 that stores a dictionary including a plurality of candidate character strings; a dictionary search unit 956 that searches the dictionary for each predictive character string based on the character string generated by the character string generation unit 954; an output character string buffer unit 957 that manages a display method of an output destination and output order of the predictive character strings; and an output unit 961 that outputs the predictive character strings to a display apparatus.

[0078] In this structure, upon input of one or more characters, a word dictionary or the like is searched to extract each character string (word) that starts with the characters in input order. In the case where there are many predictive character strings, however, it tends to take long for the user to find a desired input character string. Such a character input prediction apparatus is therefore required to narrow down predictive character strings more speedily.

[0079] The present invention is intended to solve the problem stated above, and has an object of providing a character input prediction apparatus and a character input prediction method that can narrow down predictive character strings at high speed.

[0080] To solve the problem stated above, a character input prediction apparatus according to one aspect of the present invention includes: a first operation input unit that obtains

information of a first character input operation that is performed by a user using a character key layout display in which a plurality of character keys are arranged; a dictionary storage unit that stores a dictionary including a plurality of candidate character strings; a character key layout management unit that stores a character key layout showing the arrangement of the plurality of character keys in the character key layout display; a first indication movement detection unit that detects a first indication position and a first indication direction in the character key layout display from the information of the first character input operation, the first indication position showing a position of the first character input operation, and the first indication direction showing a movement direction of the first character input operation; a filter generation unit that determines a first character range in the character key layout display using the first indication position, the first indication direction, and the character key layout, the first character range being located in the first indication direction with the first indication position as a base point; and a dictionary search unit that searches the plurality of candidate character strings included in the dictionary, for a predictive character string that includes any character included in the first character range.

[0081] With this structure, the character input prediction apparatus according to one aspect of the present invention narrows down the input character range according to the movement direction of the character input operation by the user, and searches for the predictive character string that includes any character included in the character range. Thus, the character input prediction apparatus can narrow down predictive character strings before the user finishes inputting characters, and so can narrow down predictive character strings at high speed.

[0082] Moreover, the character input prediction apparatus may further include: a character input unit that obtains information of an input character inputted by the first character input operation; and a character string generation unit that generates an input character string by arranging the input character in input order, wherein the dictionary search unit searches the plurality of candidate character strings included in the dictionary, for the predictive character string that starts with a character string generated by adding, immediately following the input character string, any character included in the first character range.

[0083] Moreover, the character input prediction apparatus may further include an indication position storage unit that holds an indication starting point, wherein the first indication movement detection unit: detects the first indication position at predetermined time intervals; in the case where the indication starting point is not held in the first indication position storage unit, causes the indication position storage unit to hold the detected first indication position as the indication starting point; and detects, as the movement direction, a direction of a newly detected indication position with the indication starting point as a starting point.

[0084] With this structure, the character input prediction apparatus according to one aspect of the present invention can detect the indication direction using the indication starting point.

[0085] Moreover, the first indication movement detection unit may, in the case where the input character is inputted by the first character input operation, cause the indication posi-

tion storage unit to hold a position of a character key corresponding to the input character, as the indication starting point.

**[0086]** With this structure, the character input prediction apparatus according to one aspect of the present invention can determine the indication direction with respect to the position of the inputted character key, with it being possible to detect the more appropriate indication direction.

**[0087]** Moreover, the first operation input unit may obtain the information of the character input operation performed via an input apparatus that limits the movement direction of the character input operation to a vertical direction and a horizontal direction.

**[0088]** With this structure, the character input prediction apparatus according to one aspect of the present invention can also be applied to the case of using an input apparatus such as arrow keys.

**[0089]** Moreover, the first indication movement detection unit may detect the first indication position at predetermined time intervals, wherein the character input prediction apparatus further includes an indication position storage unit that holds a plurality of indication positions detected by the first indication movement detection unit, and the first indication movement detection unit calculates the first indication direction using the plurality of indication positions held in the indication position storage unit.

**[0090]** With this structure, the character input prediction apparatus according to one aspect of the present invention can detect the indication direction using the plurality of indication positions.

**[0091]** Moreover, the filter generation unit may, in the case where the position of the character input operation moves from the indication starting point to the first indication position that is located in a first direction relative to the indication starting point and then moves from the first indication position to a second indication position that is located in a second direction relative to the first indication position, determine a range between the indication starting point and the second indication position as the first character range, the second direction being opposite to the first direction.

**[0092]** With this structure, the character input prediction apparatus according to one aspect of the present invention can determine the appropriate character range even in the case where such an operation that causes the indication position to move in one direction and then return in the opposite direction is performed.

**[0093]** Moreover, the first indication movement detection unit may detect the first indication position at predetermined time intervals, wherein the character input prediction apparatus further includes an indication position storage unit that holds a plurality of indication positions detected by the first indication movement detection unit, the first indication movement detection unit further calculates a movement speed of the first character input operation, from the plurality of indication positions, and the filter generation unit: in the case where the movement speed is equal to or more than a first speed, determines a first range in the character key layout display as the first character range; and in the case where the movement speed is less than the first speed, determines a second range in the character key layout display as the first character range, the first range being located in the first indication direction with the first indication position as the base point, and the second range being located in the first indication

direction with the first indication position as the base point and being smaller than the first range.

**[0094]** With this structure, the character input prediction apparatus according to one aspect of the present invention can determine the more appropriate character range using the movement speed of the character input operation.

**[0095]** Moreover, the first indication movement detection unit may detect the first indication position at predetermined time intervals, wherein the character input prediction apparatus further includes an indication position storage unit that holds a plurality of indication positions detected by the first indication movement detection unit, the first indication movement detection unit further calculates a movement speed of the first character input operation, from the plurality of indication positions, and the filter generation unit: in the case where the movement speed is less than a second speed, determines a first range in the character key layout display as the first character range; and in the case where the movement speed is equal to or more than the second speed, determines a second range as the first character range, the first range being located in the first indication direction with the first indication position as the base point, and the second range being obtained by excluding, from the first range, a range that is included in the first range and is nearer the first indication position.

**[0096]** With this structure, the character input prediction apparatus according to one aspect of the present invention can determine the more appropriate character range using the movement speed of the character input operation.

**[0097]** Moreover, the first indication movement detection unit may calculate an indication angle which is a movement angle of the first character input operation, the indication angle being obtained by classifying an angle of the first indication direction, wherein the filter generation unit determines the first character range by excluding, from a reference range set for the first indication direction, a deletion range set for the indication angle.

**[0098]** With this structure, the character input prediction apparatus according to one aspect of the present invention can determine the more appropriate character range using the movement angle of the character input operation.

**[0099]** Moreover, the character input prediction apparatus may further include: a second operation input unit that obtains information of a second character input operation that is performed by the user using the character key layout display; a second indication movement detection unit that detects a second indication position and a second indication direction in the character key layout display from the information of the second character input operation, the second indication position showing a position of the second character input operation, and the second indication direction showing a movement direction of the second character input operation; a filter generation unit that determines a second character range in the character key layout display using the second indication position, the second indication direction, and the character key layout, the second character range being located in the second indication direction with the second indication position as the base point; and a filter synthesis unit that extracts a third character range that is included in both the first character range and the second character range, wherein the dictionary search unit searches the plurality of candidate character strings included in the dictionary, for the predictive character string that includes any character included in the third character range.

**[0100]** With this structure, the character input prediction apparatus according to one aspect of the present invention can narrow down predictive character strings at high speed, in the case of using two character input operations.

**[0101]** Moreover, the filter generation unit may further determine, as the third character range, a range that is included in the first character range and is located in a direction toward the first indication position with the second indication position as the base point, in the case where the position of the first character input operation moves and a movement amount of the position of the second character input operation is equal to or less than a predetermined threshold.

**[0102]** With this structure, the character input prediction apparatus according to one aspect of the present invention can determine the more appropriate character range in the case where the position of only one of the two character input operations moves.

**[0103]** Moreover, the filter generation unit may further determine, as the third character range, a range that is included in the first character range and is located in a direction toward the first indication position with a reference point as the base point, in the case where the position of the first character input operation moves and a movement amount of the position of the second character input operation is equal to or less than a predetermined threshold, wherein the reference point is a point between the first indication position and the second indication position.

**[0104]** With this structure, the character input prediction apparatus according to one aspect of the present invention can determine the more appropriate character range in the case where the position of only one of the two character input operations moves.

**[0105]** Moreover, the filter generation unit may further: determine the first character range as the third character range in the case where the position of the first character input operation has a larger movement amount than the position of the second character input operation; and determine the second character range as the third character range in the case where the position of the second character input operation has a larger movement amount than the position of the first character input operation.

**[0106]** With this structure, the character input prediction apparatus according to one aspect of the present invention can determine the more appropriate character range in the case where the positions of the two character input operations move away from each other.

**[0107]** Moreover, the first filter generation unit may: determine the first character range at predetermined time intervals, and determine a change between the first character range previously determined and the first character range newly determined; and update the first character range to the newly determined first character range in the case where the change is equal to or more than a predetermined threshold, wherein the dictionary search unit searches the plurality of candidate character strings included in the dictionary, for the predictive character string that includes any character included in the updated first character range.

**[0108]** With this structure, the character input prediction apparatus according to one aspect of the present invention updates prediction result display or the like only in the case where the prediction result changes significantly, with it being possible to prevent the prediction result display or the like from being frequently updated.

**[0109]** Moreover, the character input prediction apparatus may display the first character range on the character key layout display.

**[0110]** With this structure, the character input prediction apparatus according to one aspect of the present invention can present the predicted character range to the user.

**[0111]** Moreover, the character input prediction apparatus may display the predictive character string that includes any character included in the first character range and is searched for by the dictionary search unit.

**[0112]** With this structure, the character input prediction apparatus according to one aspect of the present invention can display each predictive character string including a predicted character to the user in highlight mode.

**[0113]** Note that the present invention may be realized not only as such a character input prediction apparatus, but also as a character input prediction method including steps corresponding to the characteristic units included in the character input prediction apparatus, or a program causing a computer to execute such characteristic steps. The program may be distributed via a non-transitory computer-readable recording medium such as a CD-ROM or a transmission medium such as the Internet.

**[0114]** The present invention may also be realized as a semiconductor integrated circuit (LSI) that implements part or all of the functions of the character input prediction apparatus, or a character input system including the character input prediction apparatus.

**[0115]** The following describes embodiments of the present invention with reference to drawings. The embodiments described below each represent a preferred embodiment of the present invention. The numerals, forms, materials, components, component layout positions, connections, steps, step sequences, and the like described in the embodiments are merely examples, and should not limit the scope of the present invention. The present invention is specified by the claims. Accordingly, the components that are included in the embodiments but are not defined in the independent claims representing the broadest concepts of the present invention are described as not being necessarily required for achieving the object of the present invention but constituting more preferred embodiments.

#### Embodiment 1

**[0116]** A character input prediction apparatus according to Embodiment 1 of the present invention narrows down an input character range according to a movement direction of a character input operation by the user, and searches for a predictive character string that includes any character included in the character range. Thus, the character input prediction apparatus can narrow down predictive character strings before the user finishes inputting a next character, and so can narrow down predictive character strings at high speed.

**[0117]** In detail, the character input prediction apparatus generates each predictive character string using any character assigned to a character key layout included in a movement direction of a character input operation.

**[0118]** Embodiment 1 of the present invention describes an example of the case where one character range inputted by the user is predicted from one indication position showing a position of a character input operation and one indication direction showing a movement direction of the character input operation.

[0119] A basic structure of the character input prediction apparatus according to Embodiment 1 of the present invention is described first.

[0120] FIG. 1 is a block diagram showing a basic structure of a character input prediction apparatus 100 according to Embodiment 1 of the present invention.

[0121] The character input prediction apparatus 100 shown in FIG. 1 predicts a character range inputted by the user before the user inputs characters, and outputs each predictive character string according to the prediction result.

[0122] The character input prediction apparatus 100 includes a filter generation unit 101, an operation input unit 150, a character key layout management unit 151, an indication movement detection unit 152, a dictionary storage unit 155, and a dictionary search unit 156.

[0123] The operation input unit 150 obtains character input operation information which is information of a character input operation that is performed by the user using a character key layout display in which a plurality of character keys are arranged.

[0124] The dictionary storage unit 155 stores a dictionary 170 including a plurality of candidate character strings.

[0125] The character key layout management unit 151 stores a character key layout 301 showing the arrangement of the plurality of character keys in the character key layout display.

[0126] The indication movement detection unit 152 detects an indication position 521 and an indication direction 522 in the character key layout display from the character input operation information obtained by the operation input unit 150, the indication position 521 showing a position of the character input operation, and the indication direction 522 showing a movement direction of the character input operation.

[0127] The filter generation unit 101 determines a character range 523 in the character key layout display using the indication position 521, the indication direction 522, and the character key layout 301, the character range 523 being located in the indication direction 522 with the indication position 521 as a base point.

[0128] The dictionary search unit 156 searches the plurality of candidate character strings included in the dictionary 170, for a character string (hereafter “predictive character string”) that includes any character included in the character range 523.

[0129] An operation flow of the character input prediction apparatus 100 is described next.

[0130] FIG. 2 is a flowchart of a character input prediction process by the character input prediction apparatus 100 according to Embodiment 1 of the present invention.

[0131] First, the indication movement detection unit 152 recognizes that the character input operation by the user occurs, via the operation input unit 150 (Step S101).

[0132] The indication movement detection unit 152 then detects the indication position 521 and the indication direction 522 based on the character input operation (Step S102).

[0133] Next, the filter generation unit 101 determines the character range 523 located in the indication direction 522 with the indication position 521 as the base point, in the character key layout display (Step S103).

[0134] After this, the dictionary search unit 156 searches the plurality of candidate character strings included in the

dictionary 170, for a predictive character string that includes any predictive character included in the character range 523 (Step S104).

[0135] The following describes a detailed structure and operation of the character input prediction apparatus 100 according to Embodiment 1 of the present invention.

[0136] In the following description, the same components in the drawings are given the same reference signs, and repeated description is omitted.

[0137] FIG. 3 is a block diagram showing a detailed structure of a character input prediction apparatus 100A according to Embodiment 1 of the present invention.

[0138] The character input prediction apparatus 100A shown in FIG. 3 predicts a character range inputted by the user before the user inputs characters, and outputs each predictive character string according to the prediction result.

[0139] The character input prediction apparatus 100A further includes a character input unit 153, a character string generation unit 154, an output character string buffer unit 157, a predictive display condition management unit 158, a predictive control unit 159, an output control unit 160, and an output unit 161, in addition to the structure shown in FIG. 1.

[0140] The character input unit 153 obtains an input character inputted by the user operating the plurality of character keys.

[0141] The character string generation unit 154 generates a character string from the input character obtained by the character input unit 153. In detail, in a state where no character has been inputted, the character string generation unit 154 generates a newly inputted character as a character string. In the case where a next character is inputted, the character string generation unit 154 generates a character string as a new character string by adding, immediately following the current character string, the newly inputted character.

[0142] The character key layout management unit 151 stores the character key layout 301 showing the arrangement of the plurality of character keys to which characters are assigned.

[0143] FIG. 4 is a diagram showing an example of the character key layout 301.

[0144] As shown in FIG. 4, the character key layout 301 includes a plurality of characters 302 and a layout position 303 corresponding to each of the plurality of characters 302. The character 302 shows a display character arranged in a character key. The layout position 303 shows a display position (coordinate) of the corresponding character 302 in the character key.

[0145] The layout position 303 includes a start position 304 of the character position and an end position 305 of the character position. In an example where the character 302 is displayed in a rectangle, the start position 304 and the end position 305 are respectively coordinates of two diagonally opposite corners of the rectangle. The start position 304 includes an X-axis coordinate 341 and a Y-axis coordinate 342. The end position 305 includes an X-axis coordinate 351 and a Y-axis coordinate 352.

[0146] The indication movement detection unit 152 detects the indication position 521 showing the position of the character input operation by the user and the indication direction 522 showing the movement direction of the character input operation. In detail, the indication movement detection unit 152 represents the operation position where the user performs the input operation using an X-axis coordinate and a Y-axis coordinate, and detects the represented operation position as

the indication position **521**. The indication movement detection unit **152** also detects the movement direction of the character input operation as the indication direction **522**.

[0147] As a method of character input by the user, the following methods are available. A first method is a method of moving a pointer by a mouse, a touchpad, arrow keys, or the like, and selecting a character at a position of the pointer by a mouse click, a button press, or the like. In this case, the indication position **521** is the position of the pointer, and the indication direction **522** is the direction in which the pointer moves.

[0148] Second and third methods are methods using a touch panel. The second method is a method in which the user slides his/her finger on the touch panel. A character is selected by the user pressing the panel firmly or stopping the finger for a predetermined time or more. In this case, the indication position **521** is the position of the user's finger in contact with the touch panel, and the indication direction **522** is the direction in which the user's finger moves.

[0149] The third method is a method in which the user inputs a character by touching a character position on the touch panel. In this case, the indication position **521** is the position touched by the user, and the indication direction **522** is the direction in which the user lifts his/her finger off the touch panel. This information can be detected by sensing from which part of a contact surface between the touch panel and the finger the finger starts moving away from the touch panel.

[0150] FIG. 5A is a diagram showing an example of a character key layout display **501**.

[0151] The indication position **521** shows the position of the character input operation by the user, and moves according to the input operation by the user.

[0152] The indication direction **522** represents a state of operation toward a character position inputted by the user, and shows the movement direction of the character input operation.

[0153] The character range **523** shows a range of characters which the character input prediction apparatus **100A** predicts to be inputted by the user.

[0154] A coordinate Xb **531** shows an X-axis coordinate **502** of the indication position **521**.

[0155] A coordinate Yb **532** shows a Y-axis coordinate **503** of the indication position **521**.

[0156] FIG. 5B is a diagram showing a specific example of the indication position **521**. As shown in FIG. 5B, the indication position **521** includes the coordinate Xb **531** and the coordinate Yb **532**.

[0157] The filter generation unit **101** determines, from the indication position **521** and the indication direction **522** detected by the indication movement detection unit **152**, that the input operation is performed, and predicts the character range **523** inputted by the user. That is, the filter generation unit **101** extracts the character range **523** located in the indication direction **522** with the indication position **521** as the base point, in the character key layout **301**.

[0158] For example, the filter generation unit **101** determines a character range condition **403** using a character range definition **401** held in the filter generation unit **101**, the coordinate Xb **531** and the coordinate Yb **532** included in the indication position **521**, and the indication direction **522**. The filter generation unit **101** also determines, for each character **302**, whether or not the character **302** is within a range of the character range condition **403** using the character range con-

dition **403** and the layout position **303** in the character key layout **301** stored in the character key layout management unit **151**, and predicts the character range **523** of character input by the user. The filter generation unit **101** prepares the character range **523** for the character input unit **153**, as input characters for the user.

[0159] FIG. 6 is a diagram showing an example of the character range definition **401** held in the filter generation unit **101**.

[0160] The character range definition **401** includes a plurality of indication directions **402** and a character range condition **403** corresponding to each of the plurality of indication directions **402**.

[0161] The indication direction **402** shows the direction of the character input operation by the user, and corresponds to the above-mentioned indication direction **522**.

[0162] The character range condition **403** shows a function used for calculating the character range **523** for the corresponding indication direction **402**. The character range condition **403** includes a start position **404** and an end position **405**. A coordinate Xb **411** corresponds to the coordinate Xb **531** included in the indication position **521**, and a coordinate Yb **412** corresponds to the coordinate Yb **532** included in the indication position **521**.

[0163] The dictionary search unit **156** searches the dictionary **170** for each predictive character string, based on the input character obtained by the character input unit **153**. In detail, the dictionary search unit **156** searches for each character string (hereafter "retrieved character string") that starts with the character string generated by the character string generation unit **154**.

[0164] The output character string buffer unit **157** temporarily holds the retrieved character strings searched for by the dictionary search unit **156**, and manages a display method of an output destination and output order of the retrieved character strings.

[0165] The predictive display condition management unit **158** holds a display condition using the character range **523**, including whether or not to display. For example, from among the retrieved character strings, the predictive display condition management unit **158** displays the predictive character strings that each include any character included in the character range **523**, and does not display the other character strings. Alternatively, the predictive display condition management unit **158** may display all retrieved character strings, with the predictive character strings being highlighted.

[0166] The predictive control unit **159** performs sorting for display on a character string group outputted from the output character string buffer unit **157**, according to the display condition notified from the predictive display condition management unit **158**.

[0167] The output control unit **160** forms character strings sorted for display by the predictive control unit **159** according to the condition, in conformance with a display apparatus.

[0168] The output unit **161** outputs the character strings formed by the output control unit **160**, to the display apparatus.

[0169] The following describes a specific example of the operation of the character input prediction apparatus **100A** according to Embodiment 1 of the present invention.

[0170] Suppose the coordinate Xb **531** included in the indication position **521** is "800" and the coordinate Yb **532** included in the indication position **521** is "300", and the



indication direction **522** is “horizontally left”, as in the example shown in FIGS. **5A** and **5B**.

[0171] In this case, since the indication direction **402** is horizontally left **421** in FIG. **6**, the filter generation unit **101** selects “(0, 0):(coordinate Xb **411**, **500**)” as the character range condition **403**. The filter generation unit **101** substitutes the coordinate Xb **531** (=800) for the coordinate Xb **411**, thereby obtaining the character range condition **403** “(0, 0):(800, 500)”.

[0172] The filter generation unit **101** then calculates the character range **523**. In detail, the filter generation unit **101** determines, for each character **302**, whether or not the character **302** is within a range of the character range condition **403** “(0, 0):(800, 500)”, using the character range condition **403** “(0, 0):(800, 500)” and the layout position **303** in the character key layout **301**.

[0173] The resulting character range **523** is “sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho, ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -”.

[0174] As described above, the character input prediction apparatus **100A** according to Embodiment 1 of the present invention narrows down the input character range **523** according to the indication direction **522**, and searches for a predictive character string that includes any character included in the character range **523**. Thus, the character input prediction apparatus **100A** can narrow down predictive character strings before the user finishes inputting characters, and so can narrow down predictive character strings at high speed.

[0175] The above describes the case where the dictionary search unit **156** searches the plurality of candidate character strings for each retrieved character string that includes the character string generated by the character string generation unit **154**, and the predictive control unit **159** searches the retrieved character strings for each predictive character string that includes the predictive character. However, in the case of not displaying the character strings other than the predictive character strings, the dictionary search unit **156** may search the plurality of candidate character strings for each predictive character string.

[0176] The present invention is applicable not only to the case where the user inputs the second or subsequent character of the character string, but also to the case where the user inputs the first character of the character string. In such a case, the character input unit **153** and the character string generation unit **154** described above may be omitted.

[0177] Though the above describes the case of performing character input in Japanese, this embodiment is equally applicable to other languages. Likewise, the following embodiments which mainly describe the case of applying the present invention to Japanese input are also applicable to other languages.

[0178] Character input in English is described below, as an example.

[0179] FIG. **7** is a diagram showing an example of the character key layout **301** for English input. FIG. **8A** is a diagram showing an example of the character key layout display **501** for English input. FIG. **8B** is a diagram showing a specific example of the indication position **521** in this case.

[0180] The following describes a specific example of the operation of the character input prediction apparatus **100A** in the case of using English input.

[0181] Suppose the coordinate Xb **531** included in the indication position **521** is “400” and the coordinate Yb **532** included in the indication position **521** is “200”, and the

indication direction **522** is “horizontally left”, as in the example shown in FIGS. **8A** and **8B**.

[0182] In this case, since the indication direction **402** is horizontally left **421** in FIG. **6**, the filter generation unit **101** selects “(0, 0):(coordinate Xb **411**, **500**)” as the character range condition **403**. The filter generation unit **101** substitutes the coordinate Xb **531** (=400) for the coordinate Xb **411**, thereby obtaining the character range condition **403** “(0, 0):(400, 500)”.

[0183] The filter generation unit **101** then calculates the character range **523**. In detail, the filter generation unit **101** determines, for each character **302**, whether or not the character **302** is within a range of the character range condition **403** “(0, 0):(400, 500)”, using the character range condition **403** “(0, 0):(400, 500)” and the layout position **303** in the character key layout **301**.

[0184] The resulting character range **523** is “1, 2, 3, 4, Q, W, E, R, A, S, D, F, Z, X, C, V”.

[0185] Though the numbers are included in the character key layout display **501** in the example shown in FIG. **8A**, the numbers may not be included in the character key layout display **501**. Likewise, the marks “,” and “.” and “space” may not be included in the character key layout display **501**. The character key layout display **501** may include a mark and the like other than those mentioned above. Moreover, the character keys may be arranged so as to be vertically staggered as shown in FIG. **9**.

#### Embodiment 2

[0186] Embodiment 2 of the present invention describes a specific method of calculating the indication direction **522**.

[0187] FIG. **10** is a block diagram showing a structure of a character input prediction apparatus **100B** according to Embodiment 2 of the present invention.

[0188] The character input prediction apparatus **100B** shown in FIG. **10** further includes an indication position storage unit **102**, in addition to the structure shown in FIG. **3**. In FIG. **10**, the same components as those in FIG. **3** are given the same reference signs.

[0189] FIG. **11A** is a diagram showing an example of a character input operation situation using the character key layout display **501** in Embodiment 2 of the present invention.

[0190] The indication movement detection unit **152** detects the indication position **521** at predetermined time intervals.

[0191] The indication position storage unit **102** obtains the indication position **521** from the indication movement detection unit **152** and stores the obtained indication position **521** in sequence. When an indication starting point **721** is not held in the indication position storage unit **102**, the indication position storage unit **102** holds the indication position **521** notified from the indication movement detection unit **152**, as the indication starting point **721**. The indication starting point **721** shows a start position of the character input operation by the user.

[0192] A coordinate Xa **731** shows the X-axis coordinate **502** of the indication starting point **721**.

[0193] A coordinate Ya **732** shows the Y-axis coordinate **503** of the indication starting point **721**.

[0194] FIG. **11B** is a diagram showing a specific example of the indication position **521** in Embodiment 2 of the present invention. As shown in FIG. **11B**, the indication position **521** further includes a time lapse **541**. The coordinate Xb **531** and

the coordinate Yb 532 are set for each time lapse 541. The time lapse 541 shows time progress of the character input operation.

[0195] FIG. 11C is a diagram showing a specific example of the indication starting point 721 in Embodiment 2 of the present invention. The indication starting point 721 includes the coordinate Xa 731 and the coordinate Ya 732.

[0196] When the indication starting point 721 is held in the indication position storage unit 102, the indication movement detection unit 152 determines the indication direction 522 from the indication starting point 721 held in the indication position storage unit 102 and the new indication position 521 detected by the indication movement detection unit 152. In detail, the indication movement detection unit 152 determines the indication direction 522 according to which direction the new indication position 521 is located in, relative to the indication starting point 721.

[0197] Here, instead of the indication movement detection unit 152 determining the indication direction 522, the filter generation unit 101 may directly predict the character range 523 from the indication starting point 721 and the new indication position 521.

[0198] For example, the filter generation unit 101 determines the character range condition 403 using a character range definition 401A held in the filter generation unit 101, the indication position 521, and the indication starting point 721.

[0199] FIG. 12 is a diagram showing an example of the character range definition 401A held in the filter generation unit 101. The character range definition 401A shown in FIG. 12 differs from the character range definition 401A shown in FIG. 6 in the definition of an indication direction 402A.

[0200] The character range definition 401A includes a plurality of indication directions 402A and the character range condition 403 corresponding to each of the plurality of indication directions 402A.

[0201] The indication direction 402A shows the direction of the character input operation by the user, and is determined by the indication starting point 721 and the indication position 521.

[0202] An operation flow of the character input prediction apparatus 100B in this case is described below.

[0203] FIG. 13 is a flowchart of a character input prediction process by the character input prediction apparatus 100B. Steps S101, S103, and S104 shown in FIG. 13 are respectively the same as Steps S101, S103, and S104 shown in FIG. 2. Steps S111 to S114 shown in FIG. 13 are a specific example of Step S102 shown in FIG. 2.

[0204] After Step S101, the indication movement detection unit 152 obtains the indication position 521 based on the character input operation by the user (Step S111).

[0205] The indication movement detection unit 152 then determines whether or not the indication starting point 721 is held in the indication position storage unit 102 (Step S112).

[0206] In the case where the indication starting point 721 is not held (Step S112: No), the indication movement detection unit 152 causes the indication position storage unit 102 to hold the indication position 521 as the indication starting point 721 (Step S113), and goes to Step S101.

[0207] In the case where the indication starting point 721 is held (Step S112: Yes), on the other hand, the indication movement detection unit 152 determines the indication direction 522 from the indication position 521 and the indication starting point 721 (Step S114). After this, the filter generation unit

101 predicts the character range 523 using the indication position 521 and the indication direction 522 (Step S103).

[0208] The following describes the example shown in FIGS. 11A to 11C, as a specific example of the operation of the character input prediction apparatus 100B in the case of using the character range definition 401A shown in FIG. 12. In the example shown in FIGS. 11A to 11C, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "1" are respectively "800" and "300". This being the case, "800" and "300" are respectively set to the coordinate Xa 731 and the coordinate Ya 732 of the indication starting point 721.

[0209] After this, the position of the character input operation by the user moves. As a result, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "2" are respectively "700" and "300". The indication starting point 721 is already held at this time. Accordingly, the filter generation unit 101 determines the character range 523.

[0210] In detail, since the indication direction 402A is "coordinate Xa 731 > coordinate Xb 531, coordinate Ya 732 = coordinate Yb 532" in FIG. 12, the character range condition 403 is "(0, 0):(coordinate Xb 411, 500)". The filter generation unit 101 substitutes the coordinate Xb 531 (=700) for the coordinate Xb 411, thereby obtaining the character range condition 403 "(0, 0):(700, 500)". The filter generation unit 101 then determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 "(0, 0):(700, 500)", using the character range condition 403 "(0, 0):(700, 500)" and the layout position 303 in the character key layout 301.

[0211] The resulting character range 523 is "ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho, ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -".

[0212] As described above, the character input prediction apparatus 100B according to Embodiment 2 of the present invention can detect the appropriate indication direction 522 using the indication starting point 721.

### Embodiment 3

[0213] Embodiment 3 of the present invention describes a method of determining the indication starting point 721 in detail.

[0214] The character input prediction apparatus 100 according to Embodiment 3 of the present invention has, for example, the same structure as shown in FIG. 10.

[0215] FIG. 14A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 3 of the present invention.

[0216] A character 921 shown in FIG. 14A is a character inputted by the user. In the example shown in FIG. 14A, the character 921 is "tsu".

[0217] FIG. 14B is a diagram showing a specific numerical example of the indication position 521 in this case.

[0218] FIG. 14C is a diagram showing a specific numerical example of the indication starting point 721 in this case. The indication starting point 721 shown in FIG. 14C further includes a time lapse 741. The coordinate Xa 731 and the coordinate Ya 732 are set for each time lapse 741. The time lapse 741 shows time progress of the update of the indication starting point 721 by character input.

[0219] When the indication starting point 721 is not held, the indication position storage unit 102 holds the indication position 521 notified from the indication movement detection

unit 152, as the indication starting point 721. When the indication starting point 721 is held, upon input of a character by the user, the indication position storage unit 102 holds a position of a character key corresponding to the input character as the indication starting point 721. In detail, the indication movement detection unit 152 receives the character 302 from the character input unit 153. The indication movement detection unit 152 calculates, as the indication position 521, the position of the character key corresponding to the character 302, using the character key layout 301 and the character 302 received from the character input unit 153. The indication movement detection unit 152 causes the indication position storage unit 102 to hold the calculated indication position 521 as the indication starting point 721.

[0220] An operation flow of the character input prediction apparatus according to Embodiment 3 of the present invention is described below.

[0221] FIG. 15 is a flowchart of a character input prediction process by the character input prediction apparatus according to Embodiment 3 of the present invention. In the process shown in FIG. 15, Steps S121 and S122 are added to the process shown in FIG. 13.

[0222] After Step S101, the indication movement detection unit 152 determines whether or not the character 302 is inputted by the character input operation by the user (Step S121).

[0223] In the case where the character input operation information shows that the character is inputted (Step S121: Yes), the indication movement detection unit 152 calculates the indication position 521 using the information of the character received from the character input unit 153 and the character key layout 301 (Step S122). The indication movement detection unit 152 causes the indication position storage unit 102 to hold the indication position 521 calculated in Step S122 as the indication starting point 721 (Step S113), and goes to Step S101.

[0224] In the case where the character is not inputted (Step S121: No), on the other hand, the same process as in FIG. 13 is performed.

[0225] The following describes the example shown in FIGS. 14A to 14C, as a specific example of the operation of the character input prediction apparatus according to Embodiment 3 of the present invention. In the example shown in FIGS. 14A to 14C, the coordinate Xb 531 and the coordinate Yb 532 of the first indication position 521 when the time lapse 541 is "1" are respectively "800" and "300". This being the case, "800" and "300" are respectively set to the coordinate Xa 731 and the coordinate Ya 732 of the indication starting point 721 when the time lapse 741 is "1".

[0226] After this, the position of the character input operation by the user moves. As a result, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "2" are respectively "700" and "300".

[0227] The character "tsu" at the position of the movement destination is then selected by the character input operation by the user. When the character is inputted, the coordinate Xb 531 (=700) and the coordinate Yb 532 (=300) of the indication position 521 when the time lapse 541 is "2" are respectively set to the coordinate Xa 731 and the coordinate Ya 732 of the indication starting point 721 when the time lapse 741 is "2".

[0228] As a result of the next character input operation, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "3" are respectively "800" and "300".

[0229] The filter generation unit 101 determines the character range 523. In detail, since the indication direction 402A is "coordinate Xa 731 < coordinate Xb 531, coordinate Ya 732 = coordinate Yb 532" in FIG. 12, the character range condition 403 is "(coordinate Xb 411, 0):(1000, 500)". The filter generation unit 101 substitutes the coordinate Xb 531 (=800) for the coordinate Xb 411, thereby obtaining the character range condition 403 "(800, 0):(1000, 500)". The filter generation unit 101 then determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 "(800, 0):(1000, 500)", using the character range condition 403 "(800, 0):(1000, 500)" and the layout position 303 in the character key layout 301.

[0230] The resulting character range 523 is "a, i, u, e, o, ka, ki, ku, ke, ko".

[0231] As described above, the character input prediction apparatus according to Embodiment 3 of the present invention can determine the indication direction 522 with respect to the position of the inputted character key, with it being possible to detect the more appropriate indication direction 522.

#### Embodiment 4

[0232] Embodiment 4 of the present invention describes the case where the character input operation by the user is performed via arrow keys or the like. In such a character input operation, the indication direction 522 is limited to the vertical direction and the horizontal direction.

[0233] The character input prediction apparatus according to Embodiment 4 of the present invention has, for example, the same structure as shown in FIG. 10.

[0234] FIG. 16A is a diagram showing an example of a character input operation situation using the character key layout display 501 in this case. A character range 523A and a character range 523B each show a range of character positions predicted to be inputted by the user, and correspond to the above-mentioned character range 523.

[0235] FIG. 16B is a diagram showing a specific numerical example of the indication position 521 in this case. FIG. 16C is a diagram showing a specific numerical example of the indication starting point 721 in this case.

[0236] The following describes a specific example of the operation of the character input prediction apparatus 100, in the example shown in FIGS. 16A to 16C.

[0237] In the example shown in FIGS. 16A to 16C, the coordinate Xb 531 and the coordinate Yb 532 of the first indication position 521 when the time lapse 541 is "1" are respectively "800" and "300". The coordinate Xa 731 and the coordinate Ya 732 of the indication starting point 721 are respectively "800" and "300".

[0238] After this, the position of the character input operation moves vertically up, by the user operating the arrow keys. As a result, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "2" are respectively "800" and "200".

[0239] Since the indication direction 402A is "coordinate Xa 731 = coordinate Xb 531, coordinate Ya 732 > coordinate Yb 532", the character range condition 403 is "(0, 0):(1000, coordinate Yb 412)". The filter generation unit 101 substitutes the coordinate Yb 532 (=200) for the coordinate Yb 412, thereby obtaining the character range condition 403 "(0, 0):(1000, 200)". The filter generation unit 101 then determines the character range 523A.

[0240] In detail, the filter generation unit 101 determines, for each character 302, whether or not the character 302 is

within a range of the character range condition 403 “(0, 0):(1000, 200)”, using the character range condition 403 “(0, 0):(1000, 200)” and the layout position 303 in the character key layout 301.

[0241] The resulting character range 523A is “a, i, ka, ki, sa, shi, ta, chi, na, ni, ha, hi, ma, mi, ya, yu, ra, ri, wa, wo”.

[0242] After this, the position of the character input operation moves horizontally left, by the user operating the arrow keys. As a result, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “3” are respectively “700” and “200”.

[0243] Since the indication direction 402A is “coordinate Xa 731>coordinate Xb 531, coordinate Ya 732>coordinate Yb 532”, the character range condition 403 is “(0, 0):(coordinate Xb 411, coordinate Yb 412)”. The filter generation unit 101 substitutes the coordinate Xb 531 (=700) for the coordinate Xb 411 and the coordinate Yb 532 (=200) for the coordinate Yb 412, thereby obtaining the character range condition 403 “(0, 0):(700, 200)”. The filter generation unit 101 then determines the character range 523B.

[0244] In detail, the filter generation unit 101 determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(0, 0):(700, 200)”, using the character range condition 403 “(0, 0):(700, 200)” and the layout position 303 in the character key layout 301.

[0245] The resulting character range 523A is “ta, chi, na, ni, ha, hi, ma, mi, ya, yu, ra, ri, wa, wo”.

[0246] As described above, the character input prediction apparatus according to Embodiment 4 of the present invention can also be applied to the case of using an input apparatus such as arrow keys.

#### Embodiment 5

[0247] Embodiment 2 of the present invention describes an example of calculating the indication direction 522 using the indication starting point 721. Embodiment 5 of the present invention describes another method of calculating the indication direction 522.

[0248] The character input prediction apparatus according to Embodiment 5 of the present invention calculates the indication direction 522 using a plurality of indication positions 521.

[0249] The character input prediction apparatus according to Embodiment 5 of the present invention has, for example, the same structure as shown in FIG. 10.

[0250] FIG. 17A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 5 of the present invention. FIG. 17B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 5 of the present invention.

[0251] It is assumed here that the filter generation unit 101 uses the character range definition 401 shown in FIG. 6.

[0252] The indication movement detection unit 152 detects the indication position 521 at predetermined time intervals.

[0253] The indication position storage unit 102 holds a plurality of indication positions 521 detected by the indication movement detection unit 152.

[0254] The indication movement detection unit 152 calculates the indication direction 522 using the plurality of indication positions 521 held in the indication position storage

unit 102. The filter generation unit 101 determines the character range condition 403 using the calculated indication direction 522.

[0255] The following describes a specific example of the operation of the character input prediction apparatus according to Embodiment 5 of the present invention, with reference to FIGS. 17A and 17B.

[0256] In the example shown in FIGS. 17A and 17B, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “1” are respectively “700” and “300”. The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “2” are respectively “600” and “300”. The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “3” are respectively “500” and “300”.

[0257] The coordinate Xb 531 changes from “700” to “500” while the coordinate Yb 532 remains unchanged at “300”, during the period of the time lapse 541 from “1” to “3”. Accordingly, the indication movement detection unit 152 determines that the indication direction 522 is “horizontally left”. That is, in the case where the three temporally-continuous indication positions 521 change in the same direction, the indication movement detection unit 152 determines the direction as the indication direction 522.

[0258] Since the indication direction 402 is the horizontally left 421, the character range condition 403 is “(0, 0):(coordinate Xb 411, 500)”. The filter generation unit 101 substitutes the coordinate Xb 531 (=500) of the indication position 521 when the time lapse 541 is “3” for the coordinate Xb 411, thereby obtaining the character range condition 403 “(0, 0):(500, 500)”.

[0259] The filter generation unit 101 then determines the character range 523. In detail, the filter generation unit 101 determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(0, 0):(500, 500)”, using the character range condition 403 “(0, 0):(500, 500)” and the layout position 303 in the character key layout 301.

[0260] The resulting character range 523 is “ha, hi, fu, he, ho, ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -”.

[0261] As described above, the character input prediction apparatus according to Embodiment 5 of the present invention can detect the appropriate indication direction 522 using the plurality of indication positions 521.

[0262] Though the above describes the case where the indication movement detection unit 152 determines the indication direction 522 using three indication positions 521, the indication direction 522 may be determined using two indication positions 521 or four or more indication positions 521.

#### Embodiment 6

[0263] Embodiment 6 of the present invention describes an example of determining the character range 523 using a plurality of indication positions 521 and the indication starting point 721. In detail, Embodiment 6 of the present invention describes the case where such an operation that causes the indication position 521 to move in one direction and then return in the opposite direction is performed.

[0264] The character input prediction apparatus according to Embodiment 6 of the present invention has, for example, the same structure as shown in FIG. 10.

[0265] FIG. 18A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 6 of the present invention. FIG. 18B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 6 of the present invention. FIG. 18C is a diagram showing a specific numerical example of the indication starting point 721 in Embodiment 6 of the present invention.

[0266] FIG. 19 is a diagram showing an example of a character range definition 401B held in the filter generation unit 101 in Embodiment 6 of the present invention.

[0267] As shown in FIGS. 18B and 18C, the indication position storage unit 102 holds a plurality of indication positions 521 detected by the indication movement detection unit 152. The indication position storage unit 102 also holds the indication starting point 721. The method of determining the indication starting point 721 is the same as that in Embodiment 2 or 3 described above.

[0268] The indication movement detection unit 152 determines the indication direction 522 using the plurality of indication positions 521 and the indication starting point 721 held in the indication position storage unit 102.

[0269] The filter generation unit 101 predicts the character range 523 using the indication direction 522, the most recent indication position 521, and the indication starting point 721 held in the indication position storage unit 102.

[0270] In detail, the filter generation unit 101 determines the character range condition 403 using the character range definition 401B held in the filter generation unit 101, the most recent indication position 521, and the indication starting point 721. In more detail, in the case where the position of the character input operation moves from the indication starting point 721 to a first indication position located in a first direction relative to the indication starting point 721 and then moves from the first indication position to a second indication position located in a second direction relative to the first indication position where the second direction is opposite to the first direction, the filter generation unit 101 determines a range between the indication starting point 721 and the second indication position, as the character range 523.

[0271] The filter generation unit 101 predicts the character range 523 by determining, for each character 302, whether or not the character 302 is within a range of the character range condition 403, using the character range condition 403 and the layout position 303 in the character key layout 301 held in the character key layout management unit 151.

[0272] The following describes a specific example of the operation of the character input prediction apparatus according to Embodiment 6 of the present invention.

[0273] In the example shown in FIGS. 18A to 18C, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "1" are respectively "800" and "300". The coordinate Xa 731 and the coordinate Ya 732 of the indication starting point 721 are respectively "800" and "300".

[0274] After this, the position of the character input operation moves horizontally left. As a result, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "2" are respectively "500" and "300".

[0275] After this, the position of the character input operation moves horizontally right. As a result, the coordinate Xb

531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "3" are respectively "600" and "300".

[0276] Thus, the coordinate Xb 531 changes from "800" to "500" and then to "600" while the coordinate Yb 532 remains unchanged at "300", during the period of the time lapse 541 from "1" to "3". Based on such a change of the indication position 521, the filter generation unit 101 determines that the position of the character input operation moves horizontally left and then returns toward the indication starting point 721. The filter generation unit 101 determines the character range condition 403 using the character range definition 401B shown in FIG. 19.

[0277] In detail, since the indication direction 402A is "coordinate Xa 731 > coordinate Xb 531, coordinate Ya 732 = coordinate Yb 532" in FIG. 19, the character range condition 403 is "(coordinate Xb 411, 0):(coordinate Xa 731, 500)". The filter generation unit 101 substitutes the coordinate Xb 531 (=600) for the coordinate Xb 411, thereby obtaining the character range condition 403 "(600, 0):(800, 500)".

[0278] The filter generation unit 101 then determines the character range 523. In detail, the filter generation unit 101 determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 "(600, 0):(800, 500)", using the character range condition 403 "(600, 0):(800, 500)" and the layout position 303 in the character key layout 301.

[0279] The resulting character range 523 is "sa, shi, su, se, so, ta, chi, tsu, te, to".

[0280] As described above, the character input prediction apparatus according to Embodiment 6 of the present invention can determine the appropriate character range 523 even in the case where such an operation that causes the indication position 521 to move in one direction and then return in the opposite direction is performed.

#### Embodiment 7

[0281] Embodiment 7 of the present invention describes an example of determining the character range 523 according to an indication speed which is a movement speed of the character input operation.

[0282] The character input prediction apparatus according to Embodiment 7 of the present invention has, for example, the same structure as shown in FIG. 10.

[0283] The indication position storage unit 102 holds a plurality of indication positions 521 detected by the indication movement detection unit 152.

[0284] The indication movement detection unit 152 calculates the indication speed which is the movement speed of the character input operation, from the plurality of indication positions 521.

[0285] The filter generation unit 101 predicts the character range 523 further using the indication speed.

[0286] FIG. 20A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 7 of the present invention. FIG. 20B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 7 of the present invention. Note that the time lapse 541 shows a time at which the corresponding indication position 521 is held. In other words, each indication position 521 is associated with the time at which the indication position 521 is held (detected).

[0287] FIG. 22 is a diagram showing an example of a character range definition 401C held in the filter generation unit 101 in Embodiment 7 of the present invention. The character range definition 401C relates to an example of limiting the character range 523 when the indication speed is less than a predetermined speed.

[0288] That is, in the case where the indication speed is less than the predetermined speed, the filter generation unit 101 uses the character range definition 401C shown in FIG. 22. In the case where the indication speed is more than the predetermined speed, the filter generation unit 101 uses, for example, the character range definition 401 shown in FIG. 6. In other words, in the case where the indication speed is less than the predetermined speed, the filter generation unit 101 determines a first range located in the indication direction with the most recent indication position 521 as the base point, as the character range 523. In the case where the indication speed is more than the predetermined speed, the filter generation unit 101 determines a second range located in the indication direction with the most recent indication position 521 as the base point, as the character range 523, where the second range is larger than the first range.

[0289] Though the use of one threshold is described here as an example, the filter generation unit 101 may use a plurality of thresholds. In such a case, the filter generation unit 101 may reduce the character range 523 when the indication speed is slower.

[0290] In detail, the filter generation unit 101 determines the character range condition 403, using the character range definition 401C held in the filter generation unit 101 and the indication direction 522. The filter generation unit 101 further predicts the character range 523 of character input by the user by determining, for each character 302, whether or not the character 302 is within a range of the character range condition 403, using the character range condition 403 and the layout position 303 in the character key layout 301 held in the character key layout management unit 151.

[0291] The following describes a specific example of the operation of the character input prediction apparatus according to Embodiment 7 of the present invention.

[0292] In the example shown in FIGS. 20A and 20B, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "1" are respectively "800" and "300". The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "2" are respectively "750" and "300". The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "3" are respectively "700" and "300".

[0293] In this case, the change of the coordinate Xb 531 during the period of the time lapse 541 from "1" to "3" is "100". Suppose, for example, the threshold for the change of the coordinate Xb 531 during the period of the time lapse 541 from "1" to "3" is "300". The filter generation unit 101 determines that the indication speed is less than the threshold. The filter generation unit 101 accordingly determines the character range condition 403 using the character range definition 401C.

[0294] Since the indication direction 402 is the horizontally left 421, the character range condition 403 is "((coordinate Xb 411)-200, 0):(coordinate Xb 411, 500)". The filter generation unit 101 substitutes the coordinate Xb 531 (=700) of the indication position 521 (when the time lapse 541 is "3")

for the coordinate Xb 411, thereby obtaining the character range condition 403 "(500, 0):(700, 500)".

[0295] The filter generation unit 101 then determines the character range 523. In detail, the filter generation unit 101 determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 "(500, 0):(700, 500)", using the character range condition 403 "(500, 0):(700, 500)" and the layout position 303 in the character key layout 301.

[0296] The resulting character range 523 is "ta, chi, tsu, te, to, na, ni, nu, ne, no".

[0297] As described above, the character input prediction apparatus according to Embodiment 7 of the present invention can determine the more appropriate character range 523 using the movement speed of the character input operation. In the case where the indication speed is slow, there is a high possibility that the user intends to input a character located near the indication position 521. Therefore, in the case where the indication speed is slow, the character input prediction apparatus limits the character range 523 to a range near the indication position 521, with it being possible to reduce the number of predictive characters as candidates. This enables the user to easily select his/her intended character string.

[0298] Though the above describes the case where the indication speed is slow, the character range 523 may be limited in the case where the indication speed is fast. In detail, in the case where the indication speed is less than a second speed, the filter generation unit 101 determines a first range located in the indication direction with the most recent indication position 521 as the base point, as the character range 523. In the case where the indication speed is equal to or more than the second speed, the filter generation unit 101 determines a second range obtained by excluding, from the first range, a range that is included in the first range and is nearer the indication position 521, as the character range 523. In other words, the second range is a range apart from the indication position 521 in the indication direction.

[0299] For example, in the case where the indication speed is fast, a range apart from the indication position 521 in the indication direction is determined as the character range 523, as shown in FIG. 21.

[0300] In the case where the indication speed is fast, there is a high possibility that the user intends to input a character located far from the indication position 521. Therefore, in the case where the indication speed is fast, the character input prediction apparatus limits the character range 523 to a range far from the indication position 521, with it being possible to reduce the number of predictive characters as candidates. This enables the user to easily select his/her intended character string.

#### Embodiment 8

[0301] Embodiment 8 of the present invention describes an example of determining the character range 523 using a movement angle of the character input operation.

[0302] The character input prediction apparatus according to Embodiment 8 of the present invention has, for example, the same structure as shown in FIG. 10.

[0303] The indication position storage unit 102 holds a plurality of indication positions 521 detected by the indication movement detection unit 152.

[0304] The indication movement detection unit 152 calculates not only the indication direction 522 but also an indica-

tion angle 533 which is an angle of the indication direction, from the plurality of indication positions 521.

[0305] The filter generation unit 101 predicts the character range 523 further using the indication angle 533.

[0306] FIG. 23A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 8 of the present invention. FIG. 23B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 8 of the present invention. As shown in FIG. 23B, the indication position 521 includes the indication angle 533 associated for each time lapse 541.

[0307] The filter generation unit 101 determines the character range 523 based on the indication direction 522 and the indication angle 533, with reference to a character range definition 401D.

[0308] FIG. 24 is a diagram showing an example of the character range definition 401D held in the filter generation unit 101 in Embodiment 8 of the present invention.

[0309] The character range definition 401D shown in FIG. 24 further includes an angle range 406. A reference range 407 and a deletion range 408 are associated for each indication direction 402 (for each diagonal direction of the indication direction 402 in this example). The deletion range 408 is set for each angle range 406. Each angle range 406 is a partial range obtained by dividing (classifying) an angle included in the corresponding indication direction 402 into a plurality of angle ranges. In the example shown in FIG. 24, a range more than 0 degree and less than 90 degrees of diagonally down left 424 is divided into three angle ranges that are a range more than 0 degree and less than 30 degrees, a range equal to or more than 30 degrees and equal to or less than 60 degrees, and a range more than 60 degrees and less than 90 degrees. The method of dividing the angle included in the corresponding indication direction 402 is not limited to this. For example, the angle may be divided into two or more angle ranges.

[0310] The filter generation unit 101 determines a range obtained by excluding the deletion range 408 of the angle range 406 including the indication angle from the reference range 407 corresponding to the indication direction 402, as the character range 523.

[0311] The following describes a specific example of the operation of the character input prediction apparatus according to Embodiment 8 of the present invention.

[0312] In the example shown in FIGS. 23A and 23B, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "1" are respectively "800" and "0". The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "2" are respectively "750" and "100". The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "3" are respectively "700" and "200".

[0313] In this case, the indication angle when the time lapse 541 is "2" and "3" is "63 degrees". The filter generation unit 101 determines the character range condition 403 using the character range definition 401D.

[0314] Since the indication direction 402 is the diagonally down left 424 and the indication angle is "63 degrees", the character range condition 403 of the reference range 407 is "((coordinate Xb 411)-500, coordinate Yb 412):(coordinate Xb 411, 500)". The filter generation unit 101 substitutes the coordinate Xb 531 (=700) and the coordinate Yb 532 (=200) of the indication position 521 (when the time lapse 541 is "3")

respectively for the coordinate Xb 411 and the coordinate Yb 412, thereby obtaining the character range condition 403 "(200, 200):(700, 500)" of the reference range 407.

[0315] Moreover, the character range condition 403 of the deletion range 408 is "((coordinate Xb 411)-500, coordinate Yb 412):(coordinate Xb 411)-300, (coordinate Yb)+200)". The filter generation unit 101 substitutes the coordinate Xb 531 (=700) and the coordinate Yb 532 (=200) of the indication position 521 (when the time lapse 541 is "3") respectively for the coordinate Xb 411 and the coordinate Yb 412, thereby obtaining the character range condition 403 "(200, 200):(400, 400)" of the deletion range 408.

[0316] The filter generation unit 101 then determines the character range 523.

[0317] In detail, the filter generation unit 101 determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 "(200, 200):(700, 500)" of the reference range 407, using the character range condition 403 "(200, 200):(700, 500)" of the reference range 407 and the layout position 303 in the character key layout 301.

[0318] The resulting reference range 407 is "tsu, te, to, nu, ne, no, fu, he, ho, mu, me, mo, yo".

[0319] The filter generation unit 101 further determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 "(200, 200):(400, 400)" of the deletion range 408, using the character range condition 403 "(200, 200):(400, 400)" of the deletion range 408 and the layout position 303 in the character key layout 301.

[0320] The resulting deletion range 408 is "mu, me, yo".

[0321] The filter generation unit 101 determines the character range 523, by excluding the characters included in the deletion range 408 from the characters included in the reference range 407. The resulting character range 523 is "tsu, te, to, nu, ne, no, fu, he, ho, mo".

[0322] The following describes other operation examples with reference to FIGS. 25A, 25B, 26A, and 26B.

[0323] FIG. 25A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 8 of the present invention. FIG. 25B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 8 of the present invention.

[0324] Since the indication direction 402 is the diagonally down left 424 and the indication angle is "45 degrees", the character range condition 403 of the reference range 407 is "(200, 200):(700, 500)", as in the case of FIGS. 23A and 23B.

[0325] Moreover, the character range condition 403 of the deletion range 408 is "((coordinate Xb 411)-100, 400):(coordinate Xb 411, 500)" and "((coordinate Xb 411)-500, coordinate Yb 412):(coordinate Xb 411)-300, (coordinate Yb)+100)". The filter generation unit 101 substitutes the coordinate Xb 531 (=700) and the coordinate Yb 532 (=200) of the indication position 521 (when the time lapse 541 is "3") respectively for the coordinate Xb 411 and the coordinate Yb 412, thereby obtaining the character range condition 403 "(600, 400):(700, 500)" and "(200, 200):(400, 300)" of the deletion range 408.

[0326] The filter generation unit 101 then determines the character range 523.

[0327] In detail, the reference range 407 is "tsu, te, to, nu, ne, no, fu, he, ho, mu, me, mo, yo", as in the case of FIGS. 23A and 23B.

[0328] The filter generation unit 101 further determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(600, 400):(700, 500)” and “(200, 200):(400, 300)” of the deletion range 408, using the character range condition 403 “(600, 400):(700, 500)” and “(200, 200):(400, 300)” of the deletion range 408 and the layout position 303 in the character key layout 301.

[0329] The resulting deletion range 408 is “to, yo, mu”.

[0330] The filter generation unit 101 determines the character range 523, by excluding the characters included in the deletion range 408 from the characters included in the reference range 407. The resulting character range 523 is “tsu, te, nu, ne, no, fu, he, ho, me, mo”.

[0331] FIG. 26A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 8 of the present invention. FIG. 26B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 8 of the present invention.

[0332] Since the indication direction 402 is the diagonally down left 424 and the indication angle is “26 degrees”, the character range condition 403 of the reference range 407 is “(200, 200):(700, 500)”, as in the case of FIGS. 23A and 23B.

[0333] Moreover, the character range condition 403 of the deletion range 408 is “((coordinate Xb 411)–100, (coordinate Yb 412)+100):(coordinate Xb 411, 500)”. The filter generation unit 101 substitutes the coordinate Xb 531 (=700) and the coordinate Yb 532 (=200) of the indication position 521 (when the time lapse 541 is “3”) respectively for the coordinate Xb 411 and the coordinate Yb 412, thereby obtaining the character range condition 403 “(600, 300):(700, 500)” of the deletion range 408.

[0334] The filter generation unit 101 then determines the character range 523.

[0335] In detail, the reference range 407 is “tsu, te, to, nu, ne, no, fu, he, ho, mu, me, mo, yo”, as in the case of FIGS. 23A and 23B.

[0336] The filter generation unit 101 further determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(600, 300):(700, 500)” of the deletion range 408, using the character range condition 403 “(600, 300):(700, 500)” of the deletion range 408 and the layout position 303 in the character key layout 301.

[0337] The resulting deletion range 408 is “te, to”.

[0338] The filter generation unit 101 determines the character range 523, by excluding the characters included in the deletion range 408 from the characters included in the reference range 407. The resulting character range 523 is “tsu, nu, ne, no, fu, he, ho, mu, me, mo, yo”.

[0339] As described above, the character input prediction apparatus according to Embodiment 8 of the present invention can determine the more appropriate character range 523 using the movement angle of the character input operation.

#### Embodiment 9

[0340] Embodiment 9 of the present invention describes displayed prediction result update timings.

[0341] FIG. 27A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 9 of the present invention.

[0342] An input character position 751 shows a character inputted by the user. In the example shown in FIG. 27A, the input character is “tsu”.

[0343] FIG. 27B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 9 of the present invention.

[0344] FIG. 27C is a diagram showing a specific numerical example of the input character position 751 in Embodiment 9 of the present invention. A coordinate Xm 761 shows an X-axis coordinate of the input character position 751. A coordinate Ym 762 shows a Y-axis coordinate of the input character position 751.

[0345] In the example shown in FIGS. 27A to 27C, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “1” are respectively “700” and “300”. Moreover, the character “tsu” at this indication position 521 is inputted.

[0346] At this time, for example, the input character prediction apparatus according to Embodiment 9 of the present invention displays each character string whose starting character in pronunciation is “tsu”, from among the plurality of candidate character strings stored in the dictionary storage unit 155.

[0347] As a result of the next character input operation, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “2” are respectively “600” and “300”.

[0348] Since the indication direction 402 is the horizontally left 421, the character range condition 403 is “(0, 0):(coordinate Xb 411, 500)”. The filter generation unit 101 substitutes the coordinate Xb 531 (=600) for the coordinate Xb 411, thereby obtaining the character range condition 403 “(0, 0):(600, 500)”.

[0349] The filter generation unit 101 then determines the character range 523. In detail, the filter generation unit 101 determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(0, 0):(600, 500)”, using the character range condition 403 “(0, 0):(600, 500)” and the layout position 303 in the character key layout 301.

[0350] The resulting character range 523 is “na, ni, nu, ne, no, ha, hi, fu, he, ho, ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -”. The number of characters included in the character range 523 is “27”.

[0351] As a result of the next character input operation, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “3” are respectively “500” and “300”.

[0352] Since the indication direction 402 is the horizontally left 421, the character range condition 403 is “(0, 0):(coordinate Xb 411, 500)”. The filter generation unit 101 substitutes the coordinate Xb 531 (=500) for the coordinate Xb 411, thereby obtaining the character range condition 403 “(0, 0):(500, 500)”.

[0353] The filter generation unit 101 then determines the character range 523. In detail, the filter generation unit 101 determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(0, 0):(500, 500)”, using the character range condition 403 “(0, 0):(500, 500)” and the layout position 303 in the character key layout 301.

[0354] The resulting character range 523 is “ha, hi, fu, he, ho, ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -”. The number of characters included in the character range 523 is “22”.

[0355] The filter generation unit 101 compares the number of characters included in the character range 523, between



when the time lapse 541 is “2” and when the time lapse 541 is “3”. In the case where there is little influence on the displayed character strings, the filter generation unit 101 does not use the character range 523 when the time lapse 541 is “3”, for the display condition used by the predictive display condition management unit 158. That is, the filter generation unit 101 does not update the character range 523.

[0356] In detail, for example the filter generation unit 101 does not update the character range 523 in the case where the change in the number of characters included in the character range 523 is less than a predetermined threshold, and updates the character range 523 in the case where the change in the number of characters is more than the threshold. Alternatively, the filter generation unit 101 may not update the character range 523 in the case where the change in the characters included in the character range 523 is less than a predetermined threshold, and update the character range 523 in the case where the change in the characters is more than the threshold. The change in the characters mentioned here denotes the number of characters included in only one of the new character range 523 and the immediately previous character range 523. Alternatively, the filter generation unit 101 may not update the character range 523 in the case where the change in the predictive character strings eventually displayed is less than a predetermined threshold, and update the character range 523 in the case where the change in the predictive character strings is more than the threshold. The change in the predictive character strings mentioned here denotes the number of predictive character strings included in only one of the new predictive character string group and the immediately previous predictive character string group. The filter generation unit 101 may use any combination of the plurality of criteria mentioned above.

[0357] After this, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “4” are respectively “400” and “200”. Here, the indication direction 522 is “vertically up”. Since the indication direction 402 is vertically up 422, the character range condition 403 is “(0, 0):(1000, coordinate Yb 412)”. The filter generation unit 101 substitutes the coordinate Yb 532 (=200) for the coordinate Yb 412, thereby obtaining the character range condition 403 “(0, 0):(1000, 200)”.

[0358] The filter generation unit 101 then determines the character range 523. In detail, the filter generation unit 101 determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(0, 0):(1000, 200)”, using the character range condition 403 “(0, 0):(1000, 200)” and the layout position 303 in the character key layout 301.

[0359] The resulting character range 523 is “a, i, ka, ki, sa, shi, ta, chi, na, ni, ha, hi, ma, mi, ya, yu, ra, ri, wa, wo”. The number of characters included in the character range 523 is “20”.

[0360] The filter generation unit 101 compares the number of characters included in the character range 523, between when the time lapse 541 is “2” and when the time lapse 541 is “4”. Here, the filter generation unit 101 determines that there is influence on the displayed character strings, and uses the character range 523 when the time lapse 541 is “4”, for the display condition used by the predictive display condition management unit 158.

[0361] The following describes a specific display example of the character input prediction apparatus according to Embodiment 9 of the present invention.

[0362] FIG. 28 is a diagram showing a display example of the character key layout display 501 in Embodiment 9 of the present invention.

[0363] Character range displays 771 and 772 shown in FIG. 28 are each a frame for the character range 523 predicted from the character input operation by the user, which is displayed on the character key layout display 501.

[0364] In the example shown in FIGS. 27A to 27C, when the time lapse 541 is “2”, the character range display 771 is displayed. When the time lapse 541 is “3”, the character range display 771 is not updated. When the time lapse 541 is “4”, the character range display 772 is displayed.

[0365] By displaying the character range 523 on the character key layout display 501 in such a manner, the current character range 523 can be presented to the user. This contributes to improved user operability.

[0366] The following describes a predictive character string display method.

[0367] FIG. 29 is a diagram showing an example of the dictionary 170 stored in the dictionary storage unit 155 in Embodiment 9 of the present invention. The dictionary 170 includes a plurality of candidate character strings 781. Retrieved character strings whose starting character in pronunciation is “tsu” are shown in FIG. 29 as an example.

[0368] FIG. 30 is a diagram showing an example of a state where the retrieved character strings are displayed by the output unit 161 in Embodiment 9 of the present invention. A display example when the character “tsu” is inputted is shown in FIG. 30, with the retrieved character strings whose starting character in pronunciation is “tsu” being displayed in a display area 782.

[0369] FIG. 31 is a diagram showing an example of a state where the retrieved character strings are displayed by the output unit 161 in Embodiment 9 of the present invention. A display example after the character range 523 is determined is shown in FIG. 31. An acknowledge display 783 shown in FIG. 31 is used to highlight each predictive character string that includes a predictive character included in the character range 523. Here, each predictive character string that includes a predictive character following the starting character “tsu” is highlighted. This enables the user to recognize the prediction status appropriately.

[0370] The following describes an example in the case of English input.

[0371] FIG. 32 is a diagram showing an example of a state where retrieved character strings are displayed by the output unit 161 in Embodiment 9 of the present invention. A display example when the character string “bu” is inputted is shown in FIG. 32, with retrieved character strings whose starting character string is “bu” being displayed in the display area 782.

[0372] FIG. 33 is a diagram showing an example of a state where the retrieved character strings are displayed by the output unit 161 in Embodiment 9 of the present invention. A display example after the character range 523 is determined is shown in FIG. 33. The acknowledge display 783 shown in FIG. 33 is used to highlight each predictive character string that includes a predictive character included in the character range 523. Here, each predictive character string that includes any predictive character shown in FIG. 8A following the starting character string “bu” is highlighted. This enables the user to recognize the prediction status appropriately.

[0373] As described above, the character input prediction apparatus according to Embodiment 9 of the present inven-

tion updates prediction result display or the like only in the case where the prediction result changes significantly, with it being possible to prevent the prediction result display or the like from being frequently updated.

[0374] Moreover, the character input prediction apparatus according to Embodiment 9 of the present invention can present the predicted character range 523 to the user through the use of the character range displays 771 and 772.

[0375] Furthermore, the character input prediction apparatus according to Embodiment 9 of the present invention can display each predictive character string including a predicted character to the user in highlight mode.

[0376] As the character range displays 771 and 772 and the acknowledge display 783, frames, colors, or the like may be used to highlight the corresponding predictive characters or predictive character strings. The display method is not limited to the use of frames or colors, and other methods may be employed.

[0377] The character input prediction apparatus may change the display order of the predictive character strings and the other retrieved character strings. For instance, the character input prediction apparatus may display the predictive character strings above the other retrieved character strings.

[0378] Moreover, an area for displaying the predictive character strings and an area for displaying the other retrieved character strings may be separately provided.

[0379] The character input prediction apparatus may not perform the above-mentioned display control in the case where the number of predictive character strings is less than a predetermined number, and perform the display control in the case where the number of predictive character strings is more than the predetermined number.

[0380] The display order of the predictive character strings including the predictive characters may also be adjusted so that character strings nearer the pointer are displayed first.

[0381] To effectively display the predictive characters or the predictive character strings, the character input prediction apparatus may display the predictive characters or the predictive character strings only during a period from when the character string input operation starts up to when the character string input operation ends. Moreover, the character input prediction apparatus may update the display of the predictive characters or the predictive character strings, when the predictive characters or the predictive character strings change significantly such as when the movement direction of the pointer changes. This enables the user to easily recognize the predictive characters or the predictive character strings.

[0382] In particular, when inputting the first character, the entire character input operation is reflected on the display control of the predictive characters or the predictive character strings. In view of this, the character input prediction apparatus applies such a technique that displays the predictive characters or the predictive character strings upon a state change intended by the user, so as not to make it difficult for the user to recognize the predictive characters or the predictive character strings. In detail, the state change is immediately after the pointer moves away from the starting point, when the pointer position changes significantly, or when the pointer trajectory changes significantly. Depending on the input apparatus, the state change may also be when lifting such as in flicking, when landing, when the sliding changes,

upon initial movement, when the speed decreases, when the movement angle of the pointer from the starting point changes, or the like.

#### Embodiment 10

[0383] Embodiments 10 to 12 of the present invention describe the case where there are two indication positions each showing the position of the character input operation.

[0384] FIG. 34 is a diagram showing an example of an input apparatus using such two indication positions.

[0385] An input apparatus 801 includes two touch sensors (a left touch sensor 802L and a right touch sensor 802R). The two touch sensors are respectively operated with the user's left and right hands. By operating the two touch sensors, the user operates two pointers displayed on the screen. In addition, by pressing the touch sensors, the user selects character keys at the corresponding pointer positions.

[0386] FIG. 35 is a block diagram of a character input prediction apparatus 100C according to Embodiment 10 of the present invention.

[0387] The character input prediction apparatus 100C includes filter generation units 101L and 101R, indication position storage units 102L and 101R, character key layout management units 151L and 151R, indication movement detection units 152L and 152R, operation input units 150L and 150R, a filter buffer unit 103, and a filter synthesis unit 104. Though not shown, the character input prediction apparatus 100C also includes the character input unit 153, the character string generation unit 154, the dictionary storage unit 155, the dictionary search unit 156, the output character string buffer unit 157, the predictive display condition management unit 158, the predictive control unit 159, the output control unit 160, and the output unit 161, as with the character input prediction apparatus 100A described above.

[0388] The filter generation unit 101L, the indication position storage unit 102L, the character key layout management unit 151L, the indication movement detection unit 152L, and the operation input unit 150L are provided for the character input operation on the left side. The filter generation unit 101R, the indication position storage unit 102R, the character key layout management unit 151R, the indication movement detection unit 152R, and the operation input unit 150R are provided for the character input operation on the right side.

[0389] The filter generation units 101L and 101R, the indication position storage units 102L and 101R, the character key layout management units 151L and 151R, the indication movement detection units 152L and 152R, and the operation input units 150L and 150R respectively have the same functions as the filter generation unit 101, the indication position storage unit 102, the character key layout management unit 151, the indication movement detection unit 152, and the operation input unit 150 described above.

[0390] The filter buffer unit 103 holds the character range 523 predicted by the filter generation unit 101R, in association with the filter generation unit 101R. The filter buffer unit 103 also holds a character range 553 predicted by the filter generation unit 101L, in association with the filter generation unit 101L.

[0391] The filter synthesis unit 104 generates one character range 583 predicted to be operated by the user, using the character ranges 523 and 553 held in the filter buffer unit 103. In detail, the filter synthesis unit 104 generates a range that is included in both of the character ranges 523 and 553, as the character range 583. The character range 583 is provided to

the predictive display condition management unit 158, to perform the same process as in the other embodiments described above.

[0392] FIG. 36A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 10 of the present invention.

[0393] An indication position 551 shows the position of the other character input operation by the user, and moves according to the input operation by the user.

[0394] An indication direction 552 shows the movement direction of the indication position 551.

[0395] The character range 553 shows a range of characters predicted in relation to the indication position 551.

[0396] A coordinate Xc 561 shows an X-axis coordinate of the indication position 551. A coordinate Yc 562 shows a Y-axis coordinate of the indication position 551.

[0397] FIG. 36B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 10 of the present invention. FIG. 36C is a diagram showing a specific numerical example of the indication position 551 in Embodiment 2 of the present invention.

[0398] The following describes a specific example of the operation of the character input prediction apparatus 100C according to Embodiment 10 of the present invention.

[0399] In the example shown in FIGS. 36A to 36C, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 are respectively “800” and “300”, and the indication direction 522 is “horizontally left”.

[0400] Since the indication direction 402 is the horizontally left 421, the character range condition 403 is “(0, 0):(coordinate Xb 411, 500)”. The filter generation unit 101R substitutes the coordinate Xb 531 (=800) for the coordinate Xb 411, thereby obtaining the character range condition 403 “(0, 0):(800, 500)”.

[0401] The filter generation unit 101R then determines the character range 523. In detail, the filter generation unit 101R determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(0, 0):(800, 500)”, using the character range condition 403 “(0, 0):(800, 500)” and the layout position 303 in the character key layout 301.

[0402] The resulting character range 523 is “sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho, ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -”. The character range 523 is held in the filter buffer unit 103.

[0403] Meanwhile, the coordinate Xc 561 and the coordinate Yc 562 of the indication position 551 are respectively “400” and “300”, and the indication direction 552 is “horizontally right”.

[0404] Since the indication direction 402 is horizontally right 423, the character range condition 403 is “(coordinate Xb 411, 0):(1000, 500)”. The filter generation unit 101L substitutes the coordinate Xc 561 (=400) for the coordinate Xb 411, thereby obtaining the character range condition 403 “(400, 0):(1000, 500)”.

[0405] The filter generation unit 101L then determines the character range 553. In detail, the filter generation unit 101L determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(400, 0):(1000, 500)”, using the character range condition 403 “(400, 0):(1000, 500)” and the layout position 303 in the character key layout 301.

[0406] The resulting character range 553 is “a, i, u, e, o, ka, ki, ku, ke, ko, sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho”. The character range 553 is held in the filter buffer unit 103.

[0407] Next, the filter synthesis unit 104 generates the character range 583 of the characters “sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho” commonly included in the character range 523 “sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho, ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -” and the character range 553 “a, i, u, e, o, ka, ki, ku, ke, ko, sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho”.

[0408] As described above, the character input prediction apparatus according to Embodiment 10 of the present invention can narrow down predictive character strings at high speed in the case of using two character input operations.

[0409] Though the above describes the case where the character key layout management units 151L and 151R are separately provided for the two character input operations, one character key layout management unit may be commonly used for the two character input operations.

#### Embodiment 11

[0410] Embodiment 11 of the present invention describes a method of determining the character range 583 in the case where only one of the two indication positions 521 and 551 moves.

[0411] The character input prediction apparatus according to Embodiment 11 of the present invention has, for example, the same structure as shown in FIG. 35.

[0412] FIG. 37A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 11 of the present invention. FIG. 37B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 11 of the present invention. FIG. 37C is a diagram showing a specific numerical example of the indication position 551 in Embodiment 11 of the present invention.

[0413] A time lapse 571 shows time progress of the character input operation.

[0414] The filter synthesis unit 104 determines, in the case where only one of the indication positions 521 and 551 changes, the character range 583 using: the character range calculated from the changing indication position and the indication direction; and the other indication position.

[0415] Consider the case where the indication position 521 changes while the indication position 551 is unchanged. The filter synthesis unit 104 determines the character range 583 using the character range 523 and the indication position 551. In detail, in the case where the indication position 521 moves toward the indication position 551, the filter synthesis unit 104 determines a range that is included in the character range 523 and is located in a direction toward the indication position 521 with the indication position 551 as the base point, as the character range 583.

[0416] In more detail, the filter generation unit 101R predicts the character range 523 using the character key layout 301 held in the character key layout management unit 151R and a plurality of indication positions 521 held in the indication position storage unit 102R, and holds the character range 523 in association with the plurality of indication positions 521.

[0417] The indication position storage unit 102L holds a plurality of indication positions 551 notified from the indication movement detection unit 152L.

[0418] The filter generation unit 101L predicts the character range 553 using the character key layout 301 held in the character key layout management unit 151L and the plurality of indication positions 551 held in the indication position storage unit 102L, and holds the character range 553 in association with the plurality of indication positions 551.

[0419] The filter buffer unit 103 holds the most recent indication position 521 from among the plurality of indication positions 521 associated with the character range 523 predicted by the filter generation unit 101R, as a guidance position.

[0420] Alternatively, the filter buffer unit 103 holds the most recent indication position 551 from among the plurality of indication positions 551 associated with the character range 553 predicted by the filter generation unit 101L, as the guidance position.

[0421] The indication movement detection unit 152R or 152L generates, in the case where the guidance position is position information from the other side, the indication direction using the guidance position and any of the plurality of indication positions.

[0422] Alternatively, the indication movement detection unit 152R or 152L generates, in the case where the guidance position is position information from the other side, the new indication position and indication direction using the guidance position and a positional relation that uses any of the plurality of indication positions.

[0423] The filter generation unit 101R or 101L predicts the character range, using the new indication position and indication direction received from the indication movement detection unit.

[0424] The following describes a specific example of the operation of the character input prediction apparatus according to Embodiment 11 of the present invention.

[0425] In the example shown in FIGS. 37A to 37C, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "1" are respectively "900" and "300". The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "2" are respectively "850" and "300". The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is "3" are respectively "800" and "300".

[0426] That is, the coordinate Xb 531 changes from "900" to "800" while the coordinate Yb 532 remains unchanged at "300", during the period of the time lapse 541 from "1" to "3". Accordingly, the indication direction 522 is "horizontally left".

[0427] Since the indication direction 402 is the horizontally left 421, the character range condition 403 is "(0, 0):(coordinate Xb 411, 500)". The filter generation unit 101R substitutes the coordinate Xb 531 (=800) for the coordinate Xb 411, thereby obtaining the character range condition 403 "(0, 0):(800, 500)".

[0428] The filter generation unit 101R then determines the character range 523. In detail, the filter generation unit 101R determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 "(0, 0):(800, 500)", using the character range condition 403 "(0, 0):(800, 500)" and the layout position 303 in the character key layout 301.

[0429] The resulting character range 523 is "sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho, ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -". The character range 523 is held in the filter buffer unit 103.

[0430] Meanwhile, only the indication position 551 when the time lapse 571 is "1" is held in the indication position storage unit 102L, and so it is impossible to determine the movement direction of the indication position 551. This means the indication position 551 is stopped. Therefore, the guidance position is the coordinate Xb 531 "800" and the coordinate Yb 532 "300" of the most recent indication position 521 (when the time lapse 541 is "3").

[0431] The indication movement detection unit 152L determines that the indication direction 552 is "horizontally right", using the coordinate Xc 561 "400" and the coordinate Yc 562 "300" of the indication position 551 (when the time lapse 571 is "1") and the coordinate X "800" and the coordinate Y "300" of the guidance position.

[0432] Since the indication direction 402 is the horizontally right 423, the character range condition 403 is "(coordinate Xb 411, 0):(1000, 500)". The filter generation unit 101L substitutes the coordinate Xc 561 (=400) for the coordinate Xb 411, thereby obtaining the character range condition 403 "(400, 0):(1000, 500)".

[0433] The filter generation unit 101L then determines the character range 553. In detail, the filter generation unit 101L determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 "(400, 0):(1000, 500)", using the character range condition 403 "(400, 0):(1000, 500)" and the layout position 303 in the character key layout 301.

[0434] The resulting character range 553 is "a, i, u, e, o, ka, ki, ku, ke, ko, sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho". The character range 553 is held in the filter buffer unit 103.

[0435] Next, the filter synthesis unit 104 generates the character range 583 of the characters "sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho" commonly included in the character range 523 "sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho, ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -" and the character range 553 "a, i, u, e, o, ka, ki, ku, ke, ko, sa, shi, su, se, so, ta, chi, tsu, te, to, na, ni, nu, ne, no, ha, hi, fu, he, ho".

[0436] Though the above describes the case where one of the indication positions 521 and 551 is stopped, the same process may be performed in the case where the movement amount or the movement speed of one of the indication positions 521 and 551 is equal to or less than a predetermined value.

[0437] As described above, the character input prediction apparatus according to Embodiment 11 of the present invention can determine the more appropriate character range in the case where the position of only one of the two character input operations moves.

#### Embodiment 12

[0438] Embodiment 12 of the present invention describes a different method of determining the character range 583 in the case where only one of the two indication positions 521 and 551 moves, from Embodiment 11 of the present invention.

[0439] FIG. 38A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 12 of the present invention.

tion. FIG. 38B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 12 of the present invention. FIG. 38C is a diagram showing a specific numerical example of the indication position 551 in Embodiment 12 of the present invention.

[0440] The filter synthesis unit 104 determines, in the case where only one of the indication positions 521 and 551 changes, the character range 583 using: the character range calculated from the changing indication position and the indication direction; and the other indication position.

[0441] Consider the case where the indication position 521 changes while the indication position 551 is unchanged. The filter synthesis unit 104 determines the character range 583 using the character range 523 and the indication position 551. In detail, in the case where the indication position 521 moves toward the indication position 551, the filter synthesis unit 104 determines a range that is included in the character range 523 and is located in a direction toward the indication position 521 from a reference point, as the character range 583. The reference point mentioned here is a point between the indication positions 551 and 521. For instance, the reference point is a midpoint between the indication positions 551 and 521. As an alternative, the reference point may be a point at a first distance from one of the indication positions 551 and 521 toward the other one of the indication positions 551 and 521. The first distance may be a predetermined value, or a value that varies depending on a distance between the indication positions 551 and 521.

[0442] As described above, the character input prediction apparatus according to Embodiment 12 of the present invention can determine the more appropriate character range in the case where the position of only one of the two character input operations moves.

#### Embodiment 13

[0443] Embodiment 13 of the present invention describes the case where the two indication positions move away from each other. In detail, the filter synthesis unit 104 determines, as the character range 583, one of the character ranges 523 and 553 that corresponds to a faster indication speed, in the case where there is no common character to the character ranges 523 and 553.

[0444] FIG. 39A is a diagram showing an example of a character input operation situation using the character key layout display 501 in Embodiment 13 of the present invention. FIG. 39B is a diagram showing a specific numerical example of the indication position 521 in Embodiment 13 of the present invention. FIG. 39C is a diagram showing a specific numerical example of the indication position 551 in Embodiment 13 of the present invention.

[0445] The following describes a specific example of the operation of the character input prediction apparatus according to Embodiment 13 of the present invention.

[0446] In the example shown in FIGS. 39A to 39C, the coordinate Xb 531 and the coordinate Yb 532 of the most recent indication position 521 are respectively “800” and “300”, and the indication direction 522 is “horizontally right”.

[0447] Since the indication direction 402 is the horizontally right 423, the character range condition 403 is “(coordinate Xb 411, 0):(1000, 500)”. The filter generation unit 101R substitutes the coordinate Xb 531 (=800) for the coordinate Xb 411, thereby obtaining the character range condition 403 “(800, 0):(1000, 500)”.

[0448] The filter generation unit 101R then determines the character range 523. In detail, the filter generation unit 101R determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(800, 0):(1000, 500)”, using the character range condition 403 “(800, 0):(1000, 500)” and the layout position 303 in the character key layout 301.

[0449] The resulting character range 523 is “a, i, u, e, o, ka, ki, ku, ke, ko”. The character range 523 is held in the filter buffer unit 103.

[0450] Meanwhile, the coordinate Xc 561 and the coordinate Yc 562 of the most recent indication position 551 are respectively “400” and “300”, and the indication direction 552 is the horizontally left 421.

[0451] Since the indication direction 402 is the horizontally left 421, the character range condition 403 is “(0, 0):(coordinate Xb 411, 500)”. The filter generation unit 101L substitutes the coordinate Xc 561 (=400) for the coordinate Xb 411, thereby obtaining the character range condition 403 “(0, 0):(400, 500)”.

[0452] The filter generation unit 101L then determines the character range 553. In detail, the filter generation unit 101L determines, for each character 302, whether or not the character 302 is within a range of the character range condition 403 “(0, 0):(400, 500)”, using the character range condition 403 “(0, 0):(400, 500)” and the layout position 303 in the character key layout 301.

[0453] The resulting character range 553 is “ma, mi, mu, me, mo, ya, yu, yo, ra, ri, ru, re, ro, wa, wo, n, -”. The character range 553 is held in the filter buffer unit 103.

[0454] Next, the filter synthesis unit 104 determines whether or not there is a common character included in the character ranges 523 and 553 held in the filter buffer unit 103. Since no common character can be found, the filter synthesis unit 104 selects one of the character ranges 523 and 553, according to the movement amounts of the indication positions 521 and 551 respectively associated with the character ranges 523 and 553.

[0455] In detail, the coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “1” are respectively “600” and “300”. The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “2” are respectively “700” and “300”. The coordinate Xb 531 and the coordinate Yb 532 of the indication position 521 when the time lapse 541 is “3” are respectively “800” and “300”. Accordingly, the change of the coordinate Xb 531 during the period of the time lapse 541 from “1” to “3” is “200”.

[0456] On the other hand, the coordinate Xc 561 and the coordinate Yc 562 of the indication position 551 when the time lapse 571 is “1” are respectively “500” and “300”. The coordinate Xc 561 and the coordinate Yc 562 of the indication position 551 when the time lapse 571 is “2” are respectively “450” and “300”. The coordinate Xc 561 and the coordinate Yc 562 of the indication position 551 when the time lapse 571 is “3” are respectively “400” and “300”. Accordingly, the change of the coordinate Xc 561 during the period of the time lapse 571 from “1” to “3” is “100”.

[0457] The filter synthesis unit 104 compares the calculated changes of the indication positions 521 and 551 with each other, and determines the indication position with the larger change to be in the operation direction of the user.

[0458] As a result, the filter synthesis unit 104 selects the character range 523 “a, i, u, e, o, ka, ki, ku, ke, ko” corresponding to the larger change, as the character range 583.

[0459] As described above, the character input prediction apparatus according to Embodiment 13 of the present invention can determine the more appropriate character range in the case where the positions of the two character input operations move away from each other.

[0460] Though the above describes the case where the filter synthesis unit 104 is provided to adapt to a plurality of characters or a plurality of input apparatuses, the filter generation unit 101 may directly provide the filter information to the predictive display condition management unit 158.

[0461] Though the character input prediction apparatus according to each of the embodiments of the present invention has been described above, the present invention is not limited to these embodiments.

[0462] The processing units included in the character input prediction apparatus described in each of the above embodiments may be typically realized as LSI which is an integrated circuit. These processing units may each be individually implemented as one chip, or may be partly or wholly implemented on one chip.

[0463] The integrated circuit method is not limited to LSI, and may be realized by a dedicated circuit or a general-purpose processor. An FPGA (Field Programmable Gate Array) that can be programmed after LSI manufacturing or a reconfigurable processor capable of reconfiguring connections and settings of circuit cells in LSI may also be used.

[0464] The functions of the character input prediction apparatus according to each of the embodiments of the present invention may be partly or wholly realized by a processor such as a CPU executing a program.

[0465] The present invention may be the program, or a non-transitory computer-readable recording medium on which the program is recorded. The program may be distributed via a transmission medium such as the Internet.

[0466] In each of the above embodiments, each component may be realized by dedicated hardware or execution of a suitable software program. Each component may also be realized by a program execution unit such as a CPU or a processor reading and executing a software program recorded on a recording medium such as a hard disk or a semiconductor memory. Software for implementing the image decoding apparatus and the like in each of the above embodiments is the following program.

[0467] The program causes a computer to execute: obtaining information of a first character input operation that is performed by a user using a character key layout display in which a plurality of character keys are arranged; detecting an indication position and an indication direction in the character key layout display from the information of the first character input operation, the indication position showing a position of the first character input operation, and the indication direction showing a movement direction of the first character input operation; determining a character range in the character key layout display using the indication position, the indication direction, and a character key layout showing an arrangement of a plurality of character keys in the character key layout display, the character range being located in the indication direction with the indication position as a base point; and searching a plurality of candidate character strings included in a dictionary, for a predictive character string that includes any character included in the first character range.

[0468] At least a part of the functions of the character input prediction apparatus according to Embodiments 1 to 13 and their variations described above may be combined.

[0469] All numbers used above are illustrative for detailed description of the present invention, and the present invention is not limited to these numbers.

[0470] The division of the functional blocks in each block diagram is an example, and a plurality of functional blocks may be realized as one functional block, one functional block may be divided into a plurality of functional blocks, or a part of functions may be transferred to another functional block. Moreover, functions of a plurality of functional blocks having similar functions may be realized by single hardware or software in parallel or in a time-sharing manner.

[0471] The procedure in each flowchart is an example, and another procedure for achieving the same result may instead be used. For instance, the steps may be executed in order other than the above-mentioned order. Besides, a part of the steps may be executed simultaneously (in parallel) with other steps.

[0472] Variations obtained by applying changes conceivable by those skilled in the art to the embodiments are also included in the present invention without departing from the scope of the present invention.

#### INDUSTRIAL APPLICABILITY

[0473] The present invention is applicable to a character input prediction apparatus. An input apparatus using a character input prediction apparatus according to the present invention exhibits improved character input efficiency and is easily usable by anyone regardless of IT literacy, and therefore is useful for a smartphone, an e-book reader, or the like. The present invention is also applicable to an existing input apparatus such as arrow keys.

#### REFERENCE SIGNS LIST

- [0474] 100, 100A, 100B, 100C, 900 Character input prediction apparatus
- [0475] 101, 101L, 101R Filter generation unit
- [0476] 102, 102L, 102R Indication position storage unit
- [0477] 103 Filter buffer unit
- [0478] 104 Filter synthesis unit
- [0479] 150, 150L, 150R Operation input unit
- [0480] 151, 151L, 151R Character key layout management unit
- [0481] 152, 152L, 152R Indication movement detection unit
- [0482] 153, 953 Character input unit
- [0483] 154, 954 Character string generation unit
- [0484] 155, 955 Dictionary storage unit
- [0485] 156, 956 Dictionary search unit
- [0486] 157, 957 Output character string buffer unit
- [0487] 158 Predictive display condition management unit
- [0488] 159 Predictive control unit
- [0489] 160 Output control unit
- [0490] 161, 961 Output unit
- [0491] 170 Dictionary
- [0492] 301 Character key layout
- [0493] 302, 921 Character
- [0494] 303 Layout position
- [0495] 304 Start position
- [0496] 305 End position
- [0497] 341, 351 X-axis coordinate

[0498] 342, 352 Y-axis coordinate  
 [0499] 401, 401A, 401B, 401C, 401D Character range definition  
 [0500] 402, 402A Indication direction  
 [0501] 403 Character range condition  
 [0502] 404 Start position  
 [0503] 405 End position  
 [0504] 406 Angle range  
 [0505] 407 Reference range  
 [0506] 408 Deletion range  
 [0507] 411 Coordinate Xb  
 [0508] 412 Coordinate Yb  
 [0509] 421 Horizontally left  
 [0510] 422 Vertically up  
 [0511] 423 Horizontally right  
 [0512] 424 Diagonally down left  
 [0513] 501 Character key layout display  
 [0514] 502 X-axis coordinate  
 [0515] 503 Y-axis coordinate  
 [0516] 521, 551 Indication position  
 [0517] 522, 552 Indication direction  
 [0518] 523, 523A, 523B, 553, 583 Character range  
 [0519] 531 Coordinate Xb  
 [0520] 532 Coordinate Yb  
 [0521] 533 Indication angle  
 [0522] 541, 571, 741 Time lapse  
 [0523] 561 Coordinate Xc  
 [0524] 562 Coordinate Yc  
 [0525] 721 Indication starting point  
 [0526] 731 Coordinate Xa  
 [0527] 732 Coordinate Ya  
 [0528] 751 Input character position  
 [0529] 761 Coordinate Xm  
 [0530] 762 Coordinate Ym  
 [0531] 771, 772 Character range display  
 [0532] 781 Character string  
 [0533] 782 Display area  
 [0534] 783 Acknowledge display  
 [0535] 801 Input apparatus  
 [0536] 802L Left touch sensor  
 [0537] 802R Right touch sensor

1. A character input prediction apparatus comprising:  
 a first operation input unit configured to obtain information of a first character input operation that is performed by a user using a character key layout display in which a plurality of character keys are arranged;  
 a dictionary storage unit configured to store a dictionary including a plurality of candidate character strings;  
 a character key layout management unit configured to store a character key layout showing the arrangement of the plurality of character keys in the character key layout display;  
 a first indication movement detection unit configured to detect a first indication position and a first indication direction in the character key layout display from the information of the first character input operation, the first indication position showing a position of the first character input operation, and the first indication direction showing a movement direction of the first character input operation;  
 a first filter generation unit configured to determine a first character range in the character key layout display using the first indication position, the first indication direction, and the character key layout, the first character range

being located in the first indication direction with the first indication position as a base point; and  
 a dictionary search unit configured to search the plurality of candidate character strings included in the dictionary, for a predictive character string that includes any character included in the first character range.  
 2. The character input prediction apparatus according to claim 1, further comprising:  
 a character input unit configured to obtain information of an input character inputted by the first character input operation; and  
 a character string generation unit configured to generate an input character string by arranging the input character in input order,  
 wherein the dictionary search unit is configured to search the plurality of candidate character strings included in the dictionary, for the predictive character string that starts with a character string generated by adding, immediately following the input character string, any character included in the first character range.  
 3. The character input prediction apparatus according to claim 2, further comprising  
 an indication position storage unit configured to hold an indication starting point,  
 wherein the first indication movement detection unit is configured to: detect the first indication position at predetermined time intervals; in the case where the indication starting point is not held in the indication position storage unit, cause the indication position storage unit to hold the detected first indication position as the indication starting point; and detect, as the movement direction, a direction of a newly detected first indication position with the indication starting point as a starting point.  
 4. The character input prediction apparatus according to claim 3,  
 wherein the first indication movement detection unit is configured to, in the case where the input character is inputted by the first character input operation, cause the indication position storage unit to hold a position of a character key corresponding to the input character, as the indication starting point.  
 5. The character input prediction apparatus according to claim 1,  
 wherein the first operation input unit is configured to obtain the information of the character input operation performed via an input apparatus that limits the movement direction of the character input operation to a vertical direction and a horizontal direction.  
 6. The character input prediction apparatus according to claim 1,  
 wherein the first indication movement detection unit is configured to detect the first indication position at predetermined time intervals,  
 the character input prediction apparatus further comprises an indication position storage unit configured to hold a plurality of indication positions detected by the first indication movement detection unit, and  
 the first indication movement detection unit is configured to calculate the first indication direction using the plurality of indication positions held in the indication position storage unit.  
 7. The character input prediction apparatus according to claim 3,

wherein the first filter generation unit is configured to, in the case where the position of the first character input operation moves from the indication starting point to the first indication position that is located in a first direction relative to the indication starting point and then moves from the first indication position to a second indication position that is located in a second direction relative to the first indication position, determine a range between the indication starting point and the second indication position as the first character range, the second direction being opposite to the first direction.

8. The character input prediction apparatus according to claim 1,

wherein the first indication movement detection unit is configured to detect the first indication position at predetermined time intervals,

the character input prediction apparatus further comprises an indication position storage unit configured to hold a plurality of indication positions detected by the first indication movement detection unit,

the first indication movement detection unit is further configured to calculate a movement speed of the first character input operation, from the plurality of indication positions, and

the first filter generation unit is configured to: in the case where the movement speed is equal to or more than a first speed, determine a first range in the character key layout display as the first character range; and in the case where the movement speed is less than the first speed, determine a second range in the character key layout display as the first character range, the first range being located in the first indication direction with the first indication position as the base point, and the second range being located in the first indication direction with the first indication position as the base point and being smaller than the first range.

9. The character input prediction apparatus according to claim 1,

wherein the first indication movement detection unit is configured to detect the first indication position at predetermined time intervals,

the character input prediction apparatus further comprises an indication position storage unit configured to hold a plurality of indication positions detected by the first indication movement detection unit,

the first indication movement detection unit is further configured to calculate a movement speed of the first character input operation, from the plurality of indication positions, and

the first filter generation unit is configured to: in the case where the movement speed is less than a second speed, determine a first range in the character key layout display as the first character range; and in the case where the movement speed is equal to or more than the second speed, determine a second range as the first character range, the first range being located in the first indication direction with the first indication position as the base point, and the second range being obtained by excluding, from the first range, a range that is included in the first range and is nearer the first indication position.

10. The character input prediction apparatus according to claim 1,

wherein the first indication movement detection unit is configured to calculate an indication angle which is a

movement angle of the first character input operation, the indication angle being obtained by classifying an angle of the first indication direction, and

the first filter generation unit is configured to determine the first character range by excluding, from a reference range set for the first indication direction, a deletion range set for the indication angle.

11. The character input prediction apparatus according to claim 1, further comprising:

a second operation input unit configured to obtain information of a second character input operation that is performed by the user using the character key layout display;

a second indication movement detection unit configured to detect a second indication position and a second indication direction in the character key layout display from the information of the second character input operation, the second indication position showing a position of the second character input operation, and the second indication direction showing a movement direction of the second character input operation;

a second filter generation unit configured to determine a second character range in the character key layout display using the second indication position, the second indication direction, and the character key layout, the second character range being located in the second indication direction with the second indication position as the base point; and

a filter synthesis unit configured to extract a third character range that is included in both the first character range and the second character range,

wherein the dictionary search unit is configured to search the plurality of candidate character strings included in the dictionary, for the predictive character string that includes any character included in the third character range.

12. The character input prediction apparatus according to claim 11,

wherein the filter synthesis unit is further configured to determine, as the third character range, a range that is included in the first character range and is located in a direction toward the first indication position with the second indication position as the base point, in the case where the position of the first character input operation moves and a movement amount of the position of the second character input operation is equal to or less than a predetermined threshold.

13. The character input prediction apparatus according to claim 11,

wherein the filter synthesis unit is further configured to determine, as the third character range, a range that is included in the first character range and is located in a direction toward the first indication position with a reference point as the base point, in the case where the position of the first character input operation moves and a movement amount of the position of the second character input operation is equal to or less than a predetermined threshold, and

the reference point is a point between the first indication position and the second indication position.

14. The character input prediction apparatus according to claim 11,

wherein the filter synthesis unit is further configured to: determine the first character range as the third character



range in the case where the position of the first character input operation has a larger movement amount than the position of the second character input operation; and determine the second character range as the third character range in the case where the position of the second character input operation has a larger movement amount than the position of the first character input operation.

**15.** The character input prediction apparatus according to claim 1,

wherein the first filter generation unit is configured to: determine the first character range at predetermined time intervals, and determine a change between the first character range previously determined and the first character range newly determined; and update the first character range to the newly determined first character range in the case where the change is equal to or more than a predetermined threshold, and

the dictionary search unit is configured to search the plurality of candidate character strings included in the dictionary, for the predictive character string that includes any character included in the updated first character range.

**16.** The character input prediction apparatus according to claim 15, displaying the first character range on the character key layout display.

**17.** The character input prediction apparatus according to claim 15, displaying the predictive character string that includes any character included in the first character range and is searched for by the dictionary search unit.

**18.** A character input prediction method comprising:

obtaining information of a first character input operation that is performed by a user using a character key layout display in which a plurality of character keys are arranged;

detecting an indication position and an indication direction in the character key layout display from the information of the first character input operation, the indication position showing a position of the first character input operation, and the indication direction showing a movement direction of the first character input operation;

determining a character range in the character key layout display using the indication position, the indication direction, and a character key layout showing an arrangement of a plurality of character keys in the character key layout display, the character range being

located in the indication direction with the indication position as a base point; and

searching a plurality of candidate character strings included in a dictionary, for a predictive character string that includes any character included in the character range.

**19.** (canceled)

**20.** A non-transitory computer-readable recording medium for use in a computer, the recording medium having a program of the character input prediction method according to claim 18 recorded thereon.

**21.** An integrated circuit comprising:

a first operation input unit configured to obtain information of a first character input operation that is performed by a user using a character key layout display in which a plurality of character keys are arranged;

a dictionary storage unit configured to store a dictionary including a plurality of candidate character strings;

a character key layout management unit configured to store a character key layout showing the arrangement of the plurality of character keys in the character key layout display;

a first indication movement detection unit configured to detect a first indication position and a first indication direction in the character key layout display from the information of the first character input operation, the first indication position showing a position of the first character input operation, and the first indication direction showing a movement direction of the first character input operation;

a filter generation unit configured to determine a first character range in the character key layout display using the first indication position, the first indication direction, and the character key layout, the first character range being located in the first indication direction with the first indication position as a base point; and

a dictionary search unit configured to search the plurality of candidate character strings included in the dictionary, for a predictive character string that includes any character included in the first character range.

**22.** A character input system comprising:

the character input prediction apparatus according to claim 1; and

an input apparatus that receives the first character input operation.

\* \* \* \* \*