

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 December 2002 (27.12.2002)

PCT

(10) International Publication Number
WO 02/103624 A1

(51) International Patent Classification⁷: **G06K 19/06**

(21) International Application Number: PCT/US02/18579

(22) International Filing Date: 12 June 2002 (12.06.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/882,748 15 June 2001 (15.06.2001) US

(71) Applicants: **CRANE & CO., INC.** [US/US]; 30 South Street, Dalton, MA 01226 (US). **TECHNICAL GRAPHICS SECURITY PRODUCTS, LLC** [US/US]; 50 Meadbrook Drive, Milford, NH 03055 (US).

(71) Applicant and

(72) Inventor: **GARTNER, Gerald, J.** [US/US]; 134 Dow Road, Hollis, NH 03049 (US).

(72) Inventors: **COTE, Paul, F.**; 69 Pepperell Road, Hollis, NH 03049 (US). **CURDO, Stephen, B.**; 9 Hickory Lane, Hollis, NH 03049 (US). **CRANE, Timothy, T.**; 360 Crane Road, Windsor, MA 01270 (US). **WOLPERT, Gary, R.**; 946 Valley Road, Mason, NH 03048 (US).

(74) Agents: **BONZAGNI, Mary, R.** et al.; Holland & Bonzagni, P.C., Suite 302, 171 Dwight Road, Longmeadow, MA 01106-1700 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SECURITY DEVICE HAVING MULTIPLE SECURITY DETECTION FEATURES

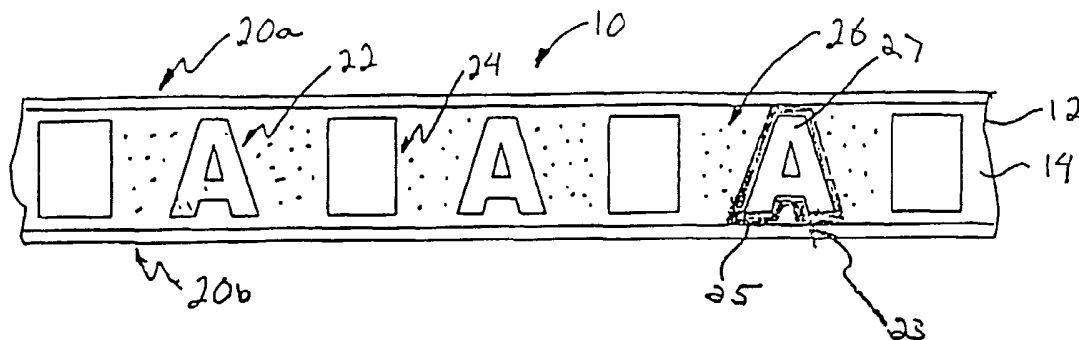

(57) Abstract: A security device, such as a security thread, uses multiple security detection features provided by combining metal and metal/magnetic security features on a carrier substrate. The security detection features basically comprise an optically repeating pattern of discrete metal/magnetic indicia and discrete metal or metal-dot formed indicia. The security detection features may also include at least one metal strip extending along the length of the carrier substrate and/or a plurality of metal dots located on metal-free portions of at least one surface of the substrate.



WO 02/103624 A1

SECURITY DEVICE HAVING MULTIPLE
SECURITY DETECTION FEATURES

RELATED APPLICATIONS

5 **[0001]** This application is a continuation-in-part of U.S. Patent Application Serial No. 09/203,449 filed December 1, 1998, which claims the benefit of U.S. Provisional Patent Application Serial No. 60/067,228 filed December 2, 1997, both of which are fully incorporated herein by reference. This application is also a continuation-in-part of U.S. Patent Application Serial No. 09/684,851 filed October 6, 2000, which claims the benefit of
10 U.S. Provisional Patent Application Serial No. 60/158,282 filed October 7, 1999, both of which are also fully incorporated herein by reference.

TECHNICAL FIELD

15 **[0002]** The present invention relates to security devices used in or with valuable items and in particular, to security threads having multiple security detection features including metal and metal/magnetic regions.

BACKGROUND INFORMATION

20 **[0003]** It is known that secure documents or instruments may be rendered less susceptible to forgery or counterfeiting by including security features in various forms within the body of the document. In fact, the security or integrity of a document or instrument will increase with the number of separate and distinct security features that it employs.

25 **[0004]** Many security papers and other items of value include a security device or element, such as a security thread, disposed on or within the document. The security device typically includes one or more security features, such as metallic, magnetic, x-ray absorbent, and/or luminescent security features, that serve to authenticate the security paper and prevent or deter counterfeiting.

30 **[0005]** A common type of security thread includes metal-formed characters or indicia disposed on a plastic carrier substrate. Such threads are coated with a layer of metal, such as aluminum, and display either: discrete metal characters as currently used in United States Currency; or negative or reverse-image characters as currently used in currencies such as the German Deutsche Mark. These threads are visually detectable in transmitted light by

members of the public and are machine detectable by conventional thread detectors that detect the presence or absence of conductive features on the threads.

[0006] It has long been recognized that while visually detectable or public security features are both necessary and desirable, the use of non-apparent and/or concealed, machine testable security features offer a heightened level of security. If a counterfeiter does not recognize that a particular security feature is present within a document, attempts would not be made to reproduce that feature.

[0007] Several attempts have been made to combine multiple security detection features, such as metallic and magnetic features, to make counterfeiting more difficult. In one example, magnetic ink is used to print graphic indicia that can be read by MICR detectors. However, if magnetic ink is used to print graphic indicia on or with metallic security detection features, the magnetic features and metallic features are easily distinguishable and identified. A counterfeiter could recognize that both magnetic and metallic security detection features have been used and need to be reproduced.

[0008] Accordingly, a need exists for a security device that offers a heightened level of security.

[0009] It is, therefore, an object of the present invention to provide such a security device.

[0010] It is a more particular object to provide a security device having multiple security detection features, such as metal and metal/magnetic security detection features, some of which are not easily distinguishable and recognizable upon observing the security device.

SUMMARY OF THE INVENTION

[0011] The present invention therefore provides a metal/magnetic security device comprising a carrier substrate, such as a transparent carrier film, and multiple security detection features disposed on the carrier substrate.

[0012] More specifically, the metal/magnetic security device of the present invention comprises:

- (a) a carrier substrate having a length; and
- (b) security detection features disposed on at least one surface of the carrier substrate, wherein the security detection features comprise:
 - (i) an optionally repeating pattern of:

discrete metal/magnetic indicia, and

discrete metal or metal-dot formed indicia,

(ii) optionally, at least one metal strip extending along the length of at least one surface of the carrier substrate, and

5 (iii) optionally, a plurality of metal dots formed directly on at least one surface of the carrier substrate.

The term "discrete," as used herein, is intended to mean not directly connected to adjacent metal/magnetic indicia and/or metal or metal-dot formed indicia disposed on a surface of the carrier substrate. It is noted that the discrete indicia of the optionally repeating
10 pattern may be indirectly connected to adjacent indicia by *e.g.* one or more metal strips extending along the length of the surface of the substrate.

[0013] In accordance with one aspect of the present invention, the metal/magnetic indicia, in the form of multi-layer, metal/magnetic blocks or squares, and the metal or metal-dot formed indicia, in the form of metal letters, numbers, and/or symbols, are disposed on at
15 least one surface of the carrier substrate, while first and second metal strips extend along top and bottom regions or edges thereof.

[0014] In a preferred embodiment, the multi-layer, metal/magnetic blocks or squares, and the metal letters, numbers, and/or symbols form a pattern that repeats along the length of the carrier substrate.

20 [0015] In another preferred embodiment, a plurality of closely spaced metal dots are formed directly on remaining metal-free portions of at least one surface of the substrate.

[0016] In accordance with another aspect of the present invention, the metal/magnetic indicia, in the form of multi-layer, metal/magnetic letters, numbers, and/or symbols, and the metal or metal-dot formed indicia, in the form of blocks or squares containing negative or
25 reverse-image indicia, are disposed on at least one surface of the carrier substrate.

[0017] In a preferred embodiment, the multi-layer, metal/magnetic letters, numbers, and/or symbols, and the blocks or squares containing negative or reverse-image indicia, form a pattern that repeats along the length of the carrier substrate.

[0018] One embodiment of the metal/magnetic indicia of the present inventive
30 security device may include a metal layer and a magnetic layer. Another embodiment of the metal/magnetic indicia include a first metal layer, a magnetic layer disposed on the first metal layer, and a second metal layer disposed on the magnetic layer.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0019] These and other features and advantages of the present invention will be better understood by reading the following detailed description, taken together with the drawings
5 wherein:
- [0020] FIG. 1 is a plan view of a metal/magnetic security device according to one embodiment of the present invention;
- [0021] FIG. 2 is a plan view of a metal/magnetic security device according to another embodiment of the present invention;
- 10 [0022] FIG. 3 is a plan view of a metal/magnetic security device according to a further embodiment of the present invention;
- [0023] FIG. 4 is a cross-sectional view of the metal/magnetic indicia of the present inventive security device, according to one embodiment; and
- [0024] FIG. 5 is a cross-sectional view of the metal/magnetic indicia of the inventive
15 security device according to another embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

- [0025] A metal/magnetic security device 10, FIG. 1, according to the present invention, is used on or in conjunction with an item of value to provide authentication of that
20 item or to encode data pertaining to that item, thereby preventing counterfeiting or unauthorized reproduction of the item. In the exemplary embodiment, the security device 10 is in the form of a thread, which can be used in secure documents including, but not limited to, bank notes, currencies, passports, visas, titles, licenses, registrations, checks, money orders, original documents, certificates of authority, and gift certificates.
- 25 [0026] The security device 10 can also be used in labels, tags, product wrappers or packaging material including, but not limited to, pressure sensitive labels, glue on labels, in mold labels, heat shrink labels, woven labels, tear tapes, shrink caps and collars, and stickers.
- [0027] The security device 10 can further be used with laminated articles including, but not limited to, passports, ID cards, access cards, licenses and credit/debit cards. The
30 security device 10 can further be used in tickets or passes including, but not limited to, event tickets, transit tickets, lottery tickets, and admittance passes.
- [0028] The metal/magnetic security device 10 includes a carrier substrate 12, such as a transparent carrier film, having a surface 14. Examples of the materials that can be used for

the carrier substrate are disclosed in U.S. Patent Number 5,486,022, incorporated herein by reference. Multiple security detection features are provided on at least one surface 14 of the carrier substrate 12. The security detection features are detectable by machine and/or visually to provide authentication of the item with which the security device 10 is associated. At least
5 some of the security detection features can also be used to encode data pertaining to the item with which the security device 10 is associated.

[0029] The security detection features of security device 10 basically comprise an optionally repeating pattern of discrete metal/magnetic indicia 24 and metal or metal-dot formed indicia 22. The security detection features may also include at least one metal strip
10 20 extending along the length of the carrier substrate 12, and/or a plurality of metal-dots 26, located on metal-free portions of at least one surface of carrier substrate 12.

[0030] The discrete metal/magnetic indicia 24 may include any type of visual indicia such as geometric shapes (*e.g.*, squares, rectangles), letters, numbers, alphanumeric characters, drawings, objects, pictures, non-geometric shapes, symbols and the like.

15 [0031] The metal or metal-dot formed indicia 22 can be formed as either solid metal indicia 22, as negative or reverse-image indicia 23 formed by a metal region 25 which surrounds and defines negative or reverse-image indicia 27, or as metal-dot clusters 22, as shown in FIG. 2. The metal or metal-dot formed indicia 22 may include any type of visual indicia such as letters, numbers, alphanumeric characters, drawings, objects, pictures, shapes,
20 symbols and the like.

[0032] In accordance with one aspect of the present invention, and as best shown in Fig. 1, discrete metal/magnetic indicia 24, in the form of multi-layer, metal/magnetic blocks or squares, alternate with metal formed indicia 22, in the form of metal letters, on carrier substrate 12 and form a repeating pattern along the length of substrate 12, while first and
25 second metal strips 20a,b extend along top and bottom regions or edges of surface 14 of substrate 12. In this one aspect of the present invention, a plurality of metal-dots 26 are present on metal-free portions of surface 14 of substrate 12.

[0033] In one embodiment, the metal/magnetic indicia 24 do not overlap the metal strips 20a,b, as shown in FIG. 1. In an alternative embodiment, the metal/magnetic indicia 24
30 partially overlap and/or contact the metal strips 20a,b, as shown in FIG. 2.

[0034] According to another embodiment of the inventive metal/magnetic security thread 10, and as best shown in FIG. 2, the metal letters 22 are formed by metal-dot clusters.

[0035] In accordance with another aspect of the present invention, and as best shown in Fig. 3, security device 30 includes discrete metal/magnetic indicia 34, in the form of multi-layer, metal/magnetic letters 38, which alternate with metal formed indicia 32, in the form of blocks or squares containing negative or reverse-image indicia 36, on carrier substrate 12, to form a repeating pattern along the length of substrate 12.

[0036] In one embodiment, and as best shown in Fig. 4, the multi-layer, metal/magnetic indicia 24,34 are formed as two layers including a metal layer 40, disposed on at least one surface 14 of the carrier substrate 12, and a magnetic layer 42 disposed on the metal layer 40 in substantially identical registration therewith. One method for preparing such multi-layer, metal/magnetic indicia 24,34 is disclosed in greater detail in U.S. Patent Application Serial No. 09/203,449, entitled "Security Device Having Multiple Security Features and Method of Making Same," which has been fully incorporated herein by reference.

[0037] In accordance with another embodiment, and as best shown in Fig. 5, the multi-layer, metal/magnetic indicia 24,34 include three layers, with an additional metal layer 44 being disposed on magnetic layer 42. One method for preparing such multi-layer, metal/magnetic indicia 24,34 is disclosed in greater detail in U.S. Patent Application Serial No. 09/684,851, entitled "Security Device With Foil Camouflaged Magnetic Regions and Methods of Making Same," which has been fully incorporated herein by reference.

[0038] The security device 10 of the present invention can use the security features to encode data, for example, using different conductive characteristics of the metal and/or different magnetic characteristics of the magnetic material, as disclosed in greater detail in U.S. Patent Application Serial No. 09/203,449, which has been fully incorporated herein by reference.

[0039] Accordingly, the security device 10,30 of the present invention offers a heightened level of security by providing multiple security detection features using combinations of metal and magnetic materials. For example, the visible indicia offer a public security feature. The metal strip(s) 20 provides a machine detectable security feature, while the discrete metal/magnetic indicia 24,34, the pattern of metal/magnetic indicia 24,34 and metal or metal-dot formed indicia 22,32, in addition to, the plurality of metal dots 26, provide the ability to detect, encode and read data, by machine. The metal/magnetic indicia 24,34

may also serve to hide magnetic security features from public view, to help avoid detection and counterfeiting.

[0040] Modifications and substitutions by one of ordinary skill in the art are considered to be within the scope of the present invention, which is not to be limited except
5 by the claims which follow.

CLAIMS

The invention claimed is:

1. A metal/magnetic security device comprising:
 - (a) a carrier substrate having a length; and
 - 5 (b) security detection features disposed on at least one surface of the carrier substrate, wherein the security detection features comprise:
 - (i) an optionally repeating pattern of:
discrete metal/magnetic indicia; and
discrete metal or metal-dot formed indicia,
 - 10 (ii) optionally, at least one metal strip extending along the length of the carrier substrate, and
 - (iii) optionally, a plurality of metal dots formed on at least one surface of the carrier substrate.
2. The metal/magnetic security device of claim 1, wherein the carrier
15 substrate is a transparent carrier film.
3. The metal/magnetic security device of claim 1, wherein the discrete metal/magnetic indicia comprise at least one of geometric shapes, letters, numbers, alphanumeric characters and symbols.
4. The metal/magnetic security device of claim 1, wherein the discrete
20 metal or metal-dot formed indicia comprise at least one of letters, numbers, alphanumeric characters, symbols and metal or metal-dot regions which surround and define clear indicia.
5. The metal/magnetic security device of claim 1, wherein the discrete metal/magnetic indicia and the discrete metal or metal-dot formed indicia form a repeating pattern extending along the length of at least one surface of the carrier substrate.
- 25 6. The metal/magnetic security device of claim 1, wherein the security detection features further comprise at least one metal strip extending along the length of at least one surface of the carrier substrate.
7. The metal/magnetic security device of claim 6, wherein at least a
30 portion of at least one metal/magnetic indicia overlaps at least a portion of at least one metal strip.

8. The metal/magnetic security device of claim 6, wherein the security detection features further comprise a first and a second metal strip extending longitudinally along a top and a bottom region of at least one surface of the carrier substrate.

5 9. The metal/magnetic security device of claim 1, wherein the security detection features further comprise a plurality of metal dots located on remaining metal-free regions of at least one surface of the carrier substrate.

10. The metal/magnetic security device of claim 1, wherein the metal/magnetic indicia are multi-layer, metal/magnetic indicia which include a metal layer disposed on the carrier substrate, and a magnetic layer disposed on the metal layer.

10 11. The metal/magnetic security device of claim 10, wherein the multi-layer, metal/magnetic indicia include a second metal layer disposed on the magnetic layer.

12. The metal/magnetic security device of claim 1, wherein the discrete metal or metal-dot formed indicia are formed by solid metal.

15 13. The metal/magnetic security device of claim 1, wherein the discrete metal or metal-dot formed indicia are formed by a plurality of closely spaced metal dots.

14. A metal/magnetic security device comprising:

(a) a carrier substrate having a length; and

(b) security detection features disposed on at least one surface of the carrier substrate, wherein the security detection features comprise:

20 (i) an optionally repeating pattern of:
discrete metal/magnetic indicia in the form of geometric shapes; and

25 discrete metal or metal-dot formed indicia, wherein the indicia comprise at least one of letters, numbers, alphanumeric characters and symbols,

(ii) at least one metal strip extending along the length of the carrier substrate, and

(iii) optionally, a plurality of metal dots formed on at least one surface of the carrier substrate.

30 15. The metal/magnetic security device of claim 14, wherein the carrier substrate is a transparent carrier film.

16. The metal/magnetic security device of claim 14, wherein the discrete metal/magnetic indicia and the discrete metal or metal-dot formed indicia form a repeating pattern extending along the length of the carrier substrate.

17. The metal/magnetic security device of claim 14, wherein at least a portion of at least one metal/magnetic indicia overlaps at least a portion of at least one metal strip.

18. The metal/magnetic security device of claim 14, wherein the security detection features comprise a first and a second metal strip extending longitudinally along a top and a bottom region of at least one surface of the carrier substrate.

19. The metal/magnetic security device of claim 14, wherein the security detection features further comprise a plurality of metal dots located on remaining metal-free regions of at least one surface of the carrier substrate.

20. The metal/magnetic security device of claim 14, wherein the metal/magnetic indicia are multi-layer, metal/magnetic indicia which include a metal layer disposed on the carrier substrate, and a magnetic layer disposed on the metal layer.

21. The metal/magnetic security device of claim 20, wherein the multi-layer, metal/magnetic indicia include a second metal layer disposed on the magnetic layer.

22. The metal/magnetic security device of claim 14, wherein the discrete metal or metal-dot formed indicia are formed by solid metal.

23. The metal/magnetic security device of claim 14, wherein the discrete metal or metal-dot formed indicia are formed by a plurality of closely spaced metal dots.

24. A metal/magnetic security device comprising:
(a) a carrier substrate having a length; and
(b) security detection features disposed on at least one surface of the carrier substrate, wherein the security detection features comprise an optionally repeating pattern of:

(i) discrete metal/magnetic indicia, wherein the indicia comprise at least one of letters, numbers, alphanumeric characters and symbols; and

(ii) discrete metal or metal-dot formed indicia in the form of metal or metal-dot regions which surround and define clear indicia.

25. The metal/magnetic security device of claim 24, wherein the carrier

substrate is a transparent carrier film.

26. The metal/magnetic security device of claim 24, wherein the discrete metal/magnetic indicia and the discrete metal or metal-dot formed indicia form a repeating pattern extending along the length of the carrier substrate.






5 27. The metal/magnetic security device of claim 24, wherein the metal/magnetic indicia are multi-layer, metal/magnetic indicia which include a first metal layer disposed on the carrier substrate and a magnetic layer disposed on the first metal layer.

28. The metal/magnetic security device of claim 27, wherein the multi-layer, metal/magnetic indicia further include a second metal layer disposed on the magnetic
10 layer.

29. The metal/magnetic security device of claim 24, wherein the discrete metal or metal-dot formed indicia are formed by solid metal.

30. The metal/magnetic security device of claim 24, wherein the discrete metal or metal-dot formed indicia are formed by a plurality of closely spaced metal dots.

15

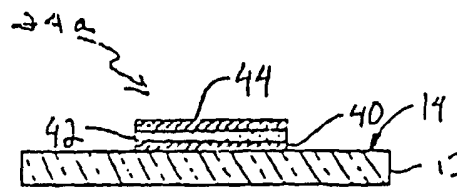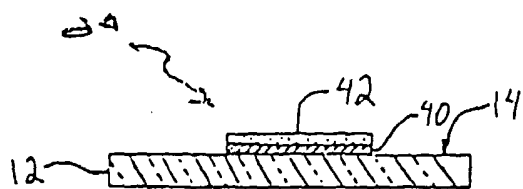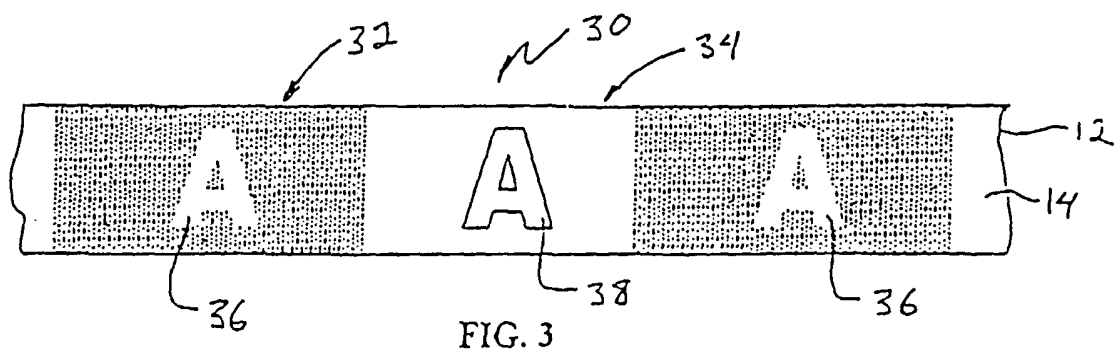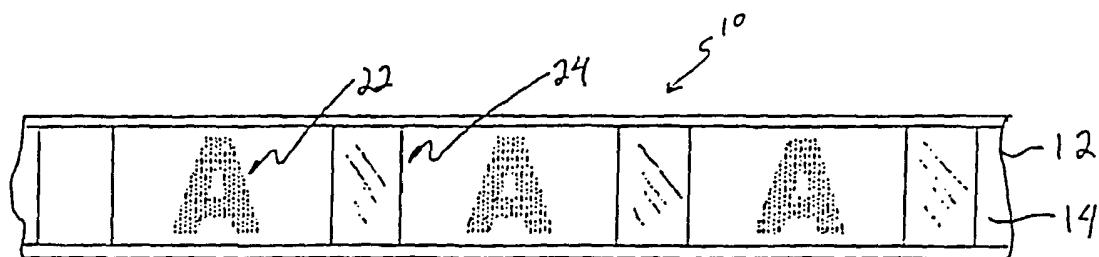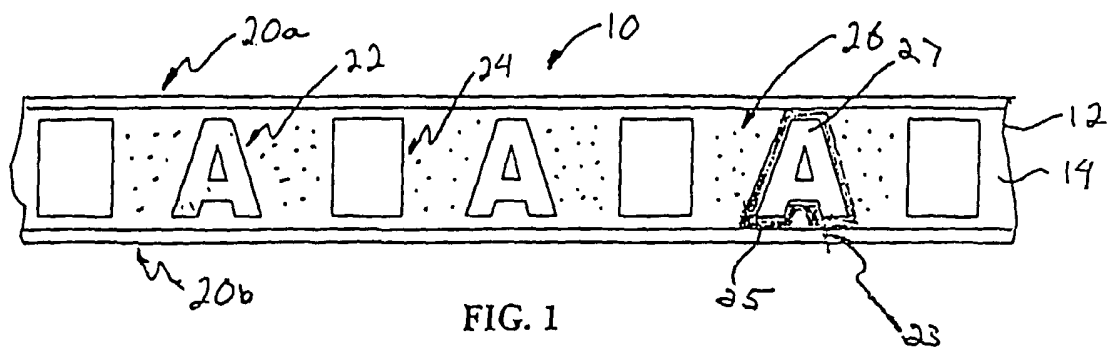

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/18579

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06K19/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K B42D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 28852 A (TECHNICAL GRAPHICS SECURITY PR) 10 June 1999 (1999-06-10) page 9, line 14 -page 17, line 7 ---	1-30
X	US 5 486 022 A (CRANE TIMOTHY T) 23 January 1996 (1996-01-23) the whole document ---	1-30
A	US 5 697 649 A (DAMES ANDREW ET AL) 16 December 1997 (1997-12-16) the whole document ---	1-30
A	US 5 803 503 A (BOEHM MICHAEL ET AL) 8 September 1998 (1998-09-08) the whole document -----	1-30



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

31 October 2002

Date of mailing of the international search report

07/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Degraeve, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/18579

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9928852	A	10-06-1999	AU 750838 B2	01-08-2002
			AU 1800899 A	16-06-1999
			BR 9815359 A	21-11-2000
			CA 2312391 A1	10-06-1999
			CN 1280690 T	17-01-2001
			EP 1034504 A1	13-09-2000
			HU 0100228 A2	28-06-2001
			JP 2001525578 T	11-12-2001
			NO 20002850 A	24-07-2000
			PL 340832 A1	26-02-2001
			TR 200001617 T2	21-09-2000
			WO 9928852 A1	10-06-1999
			US 6255948 B1	03-07-2001
			US 2002014967 A1	07-02-2002
US 5486022	A	23-01-1996	AT 187935 T	15-01-2000
			AU 1920195 A	23-10-1995
			BR 9507290 A	23-09-1997
			CA 2187080 A1	12-10-1995
			CN 1145604 A ,B	19-03-1997
			DE 69514097 D1	27-01-2000
			DE 69514097 T2	02-11-2000
			DK 754126 T3	13-06-2000
			EP 0754126 A1	22-01-1997
			ES 2141341 T3	16-03-2000
			FI 963959 A	03-12-1996
			GR 3032931 T3	31-07-2000
			JP 2906352 B2	21-06-1999
			JP 9506566 T	30-06-1997
			KR 191417 B1	15-06-1999
			NO 964214 A	26-11-1996
			PL 316874 A1	17-02-1997
			PT 754126 T	30-06-2000
			RU 2114743 C1	10-07-1998
			SI 9520037 A	30-04-1997
			WO 9526884 A1	12-10-1995
US 5697649	A	16-12-1997	AT 187687 T	15-01-2000
			AU 5741096 A	29-11-1996
			DE 69605662 D1	20-01-2000
			DE 69605662 T2	13-07-2000
			DK 824405 T3	13-06-2000
			EP 0824405 A1	25-02-1998
			ES 2141500 T3	16-03-2000
			GR 3032932 T3	31-07-2000
			JP 10509394 T	14-09-1998
			PT 824405 T	31-05-2000
			SI 9620061 A	30-04-1998
			WO 9635586 A1	14-11-1996
US 5803503	A	08-09-1998	DE 4041025 A1	25-06-1992
			US 5599047 A	04-02-1997
			AT 143871 T	15-10-1996
			BR 9106119 A	02-03-1993
			CA 2076532 A1	21-06-1992
			DE 59108270 D1	14-11-1996
			DK 516790 T3	17-03-1997
			WO 9211142 A1	09-07-1992

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/18579

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5803503	A	EP 0516790 A1	09-12-1992
		ES 2092090 T3	16-11-1996
		FI 923700 A	18-08-1992
		GR 3021431 T3	31-01-1997
		KR 189654 B1	01-06-1999
		NO 923258 A	19-10-1992
		PL 168961 B1	31-05-1996
		PL 169626 B1	30-08-1996
		SI 9210004 A ,B	28-02-1995
		US 5354099 A	11-10-1994
