



(22) Date de dépôt/Filing Date: 2008/03/10

(41) Mise à la disp. pub./Open to Public Insp.: 2008/09/30

(45) Date de délivrance/Issue Date: 2010/12/07

(30) Priorité/Priority: 2007/03/30 (JP2007-095621)

(51) Cl.Int./Int.Cl. *F01N 13/08* (2010.01),
B62K 11/00 (2006.01), *B62M 7/02* (2006.01)


(72) Inventeurs/Inventors:
IMADA, MITSUNOBU, JP;
ISHIKAWA, YUZURU, JP

(73) Propriétaire/Owner:
HONDA MOTOR CO.,LTD., JP

(74) Agent: DENNISON ASSOCIATES

(54) Titre : SYSTÈME D'ÉCHAPPEMENT POUR VÉHICULE À SIEGE

(54) Title: EXHAUST SYSTEM FOR SADDLE-RIDE TYPE VEHICLE

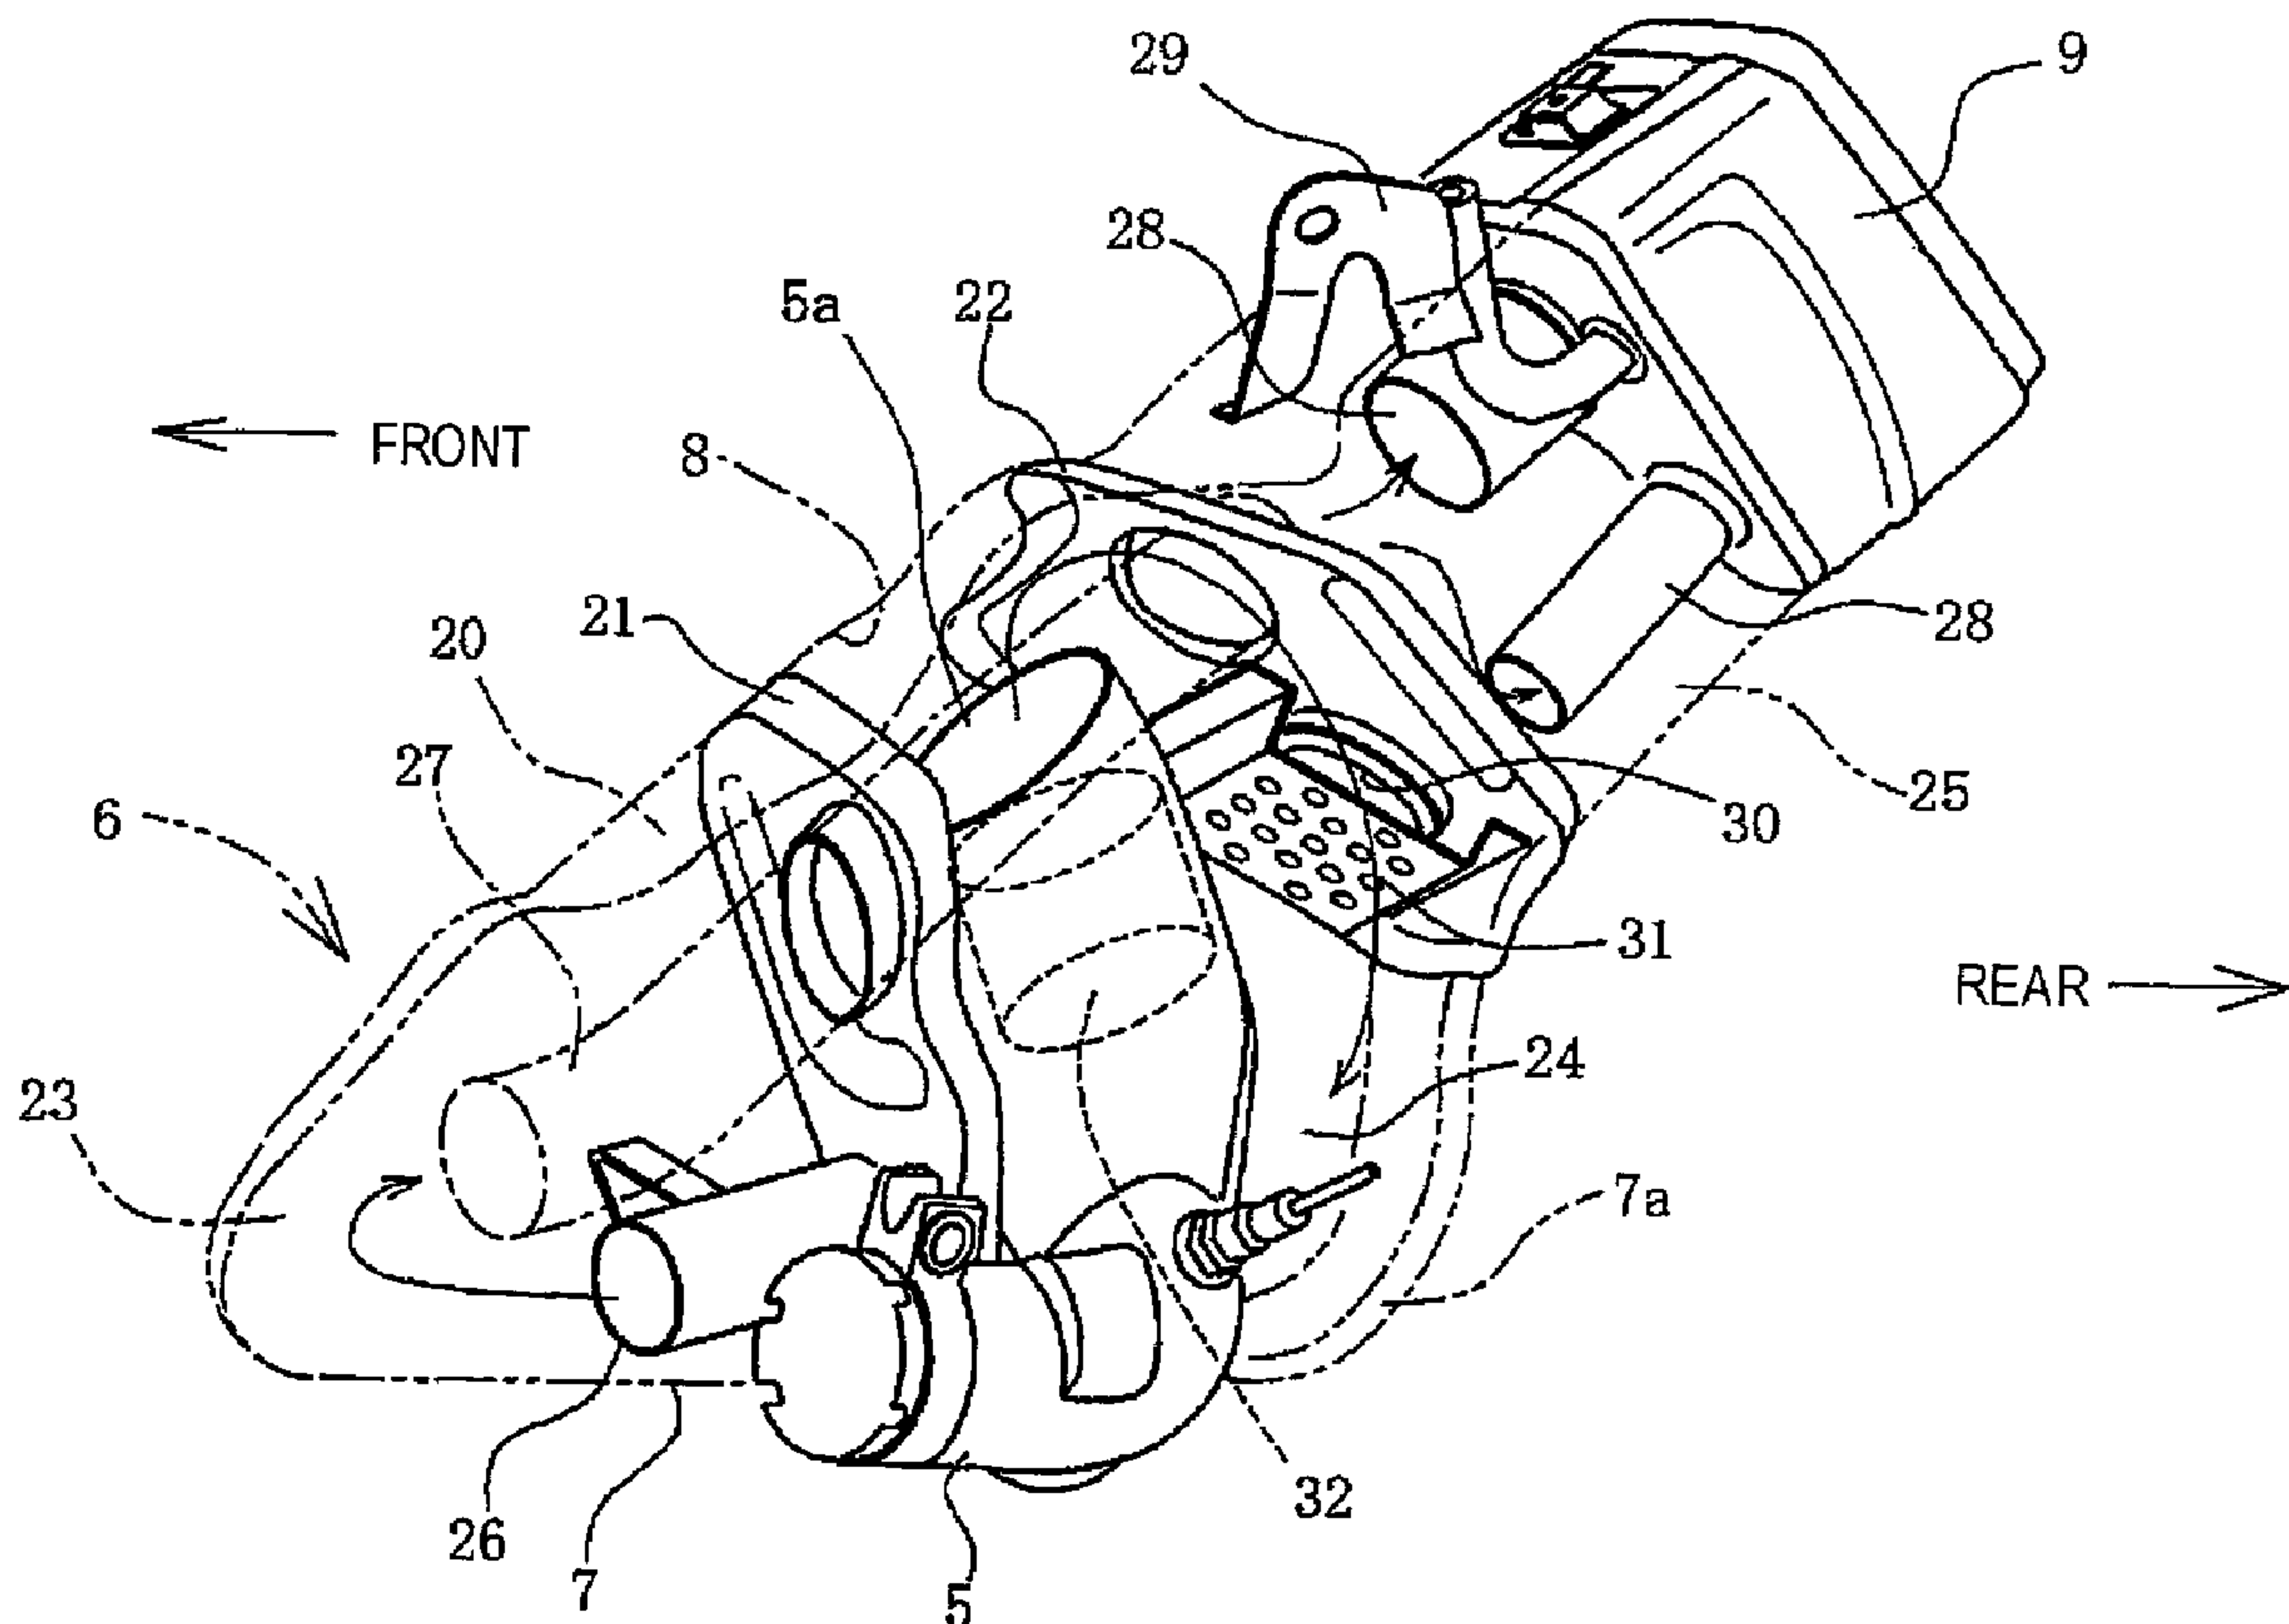

(57) Abrégé/Abstract:

To easily disposed an exhaust valve and a catalyst in a simple manner without the need of any special place. A muffler of a generally triangular shape in side view is provided and the interior thereof is partitioned into first to third expansion chambers. A

(57) Abrégé(suite)/Abstract(continued):

manifold pipe is connected to the second expansion chamber as a middle chamber sideways from a lower portion of the same chamber and is accommodated therein so as to face upward. A catalyst is accommodated in the interior of the manifold pipe and exhaust gas flowing out from an open end of the manifold pipe is expanded into the second expansion chamber. A short-circuiting aperture is formed in a second separator and is opened and closed with an exhaust valve installed within the adjacent third expansion chamber. The exhaust valve is normally closed type and is urged in its closing direction by spring means. When the exhaust pressure becomes a predetermined magnitude, the exhaust valve opens automatically, allowing the exhaust gas to flow out into the third expansion chamber through the short-circuiting aperture, thereby controlling the exhaust pressure.

ABSTRACT OF THE DISCLOSURE

To easily disposed an exhaust valve and a catalyst in a simple manner without the need of any special place. A muffler of a generally triangular shape in side view is provided and the interior thereof is partitioned into first to third expansion chambers. A manifold pipe is connected to the second expansion chamber as a middle chamber sideways from a lower portion of the same chamber and is accommodated therein so as to face upward. A catalyst is accommodated in the interior of the manifold pipe and exhaust gas flowing out from an open end of the manifold pipe is expanded into the second expansion chamber. A short-circuiting aperture is formed in a second separator and is opened and closed with an exhaust valve installed within the adjacent third expansion chamber. The exhaust valve is normally closed type and is urged in its closing direction by spring means. When the exhaust pressure becomes a predetermined magnitude, the exhaust valve opens automatically, allowing the exhaust gas to flow out into the third expansion chamber through the short-circuiting aperture, thereby controlling the exhaust pressure.

EXHAUST SYSTEM FOR SADDLE-RIDE TYPE VEHICLE

FIELD OF THE INVENTION

- 5 The present invention relates to an exhaust system for a saddle-ride type vehicle such as, for example, a motorcycle or a buggy. Particularly, the present invention is concerned with the structure of a muffler which makes it possible to ensure a sufficient exhaust pipe length and a sufficient minimum road clearance.

10 BACKGROUND OF THE INVENTION

It is known to gather exhaust pipes extending from plural cylinders to a manifold pipe, connect the manifold pipe to a muffler to reduce the exhaust noise, and control the exhaust pressure with use of an exhaust valve (see JP-A No. 2005-105933 as an example).

15

Since a catalyst is disposed in the manifold pipe, parts of the exhaust system are dispersed to the exterior of the muffler, so that it is desired to concentrate such parts into the muffler.

- 20 On the other hand, it is necessary to make the muffler as compact as possible while ensuring a sufficient length of the exhaust pipe, thereby ensuring a sufficient minimum road clearance. However, it is not easy to satisfy such conditions contrary to each other.

- 25 Accordingly, it is an object of the present invention to satisfy such a demand.

SUMMARY OF THE INVENTION

According to the present invention there is provided an exhaust system for a saddle-ride type vehicle wherein exhaust gas from an engine is discharged from a muffler through an exhaust pipe, the exhaust system comprising an exhaust
5 valve disposed in an exhaust passage within the muffler to control the flow rate of the exhaust gas and a catalyst disposed within the exhaust pipe at a position near an open end as one end of the exhaust pipe, the one end of the exhaust pipe being open into the muffler.

10 According to the present invention, both exhaust valve and catalyst are disposed within the muffler, so in comparison with the case where both exhaust valve and catalyst are disposed separated within an exhaust system outside the muffler, it is not necessary to ensure any special place for mounting them and they can be mounted easily. Appearance is also improved. Moreover, since the whole can be
15 made compact, it is possible to ensure a sufficient minimum road clearance. Further, since the catalyst is accommodated within the exhaust pipe at a position near the open end of the exhaust pipe, the exhaust pipe being accommodated within the muffler, the catalyst can be disposed by utilizing the exhaust pipe effectively and it is possible to ensure a sufficient length of the exhaust pipe.

20 According to an aspect of the invention there is provided, in combination with the above, an exhaust system for a saddle-ride type vehicle wherein the exhaust valve can open and close the exhaust passage and it is urged in a normally closing direction and opens under the action of exhaust pressure.

25 According to this aspect of the invention, since the exhaust valve is urged in a normally closing direction by a return spring and opens under the action of a predetermined exhaust pressure, the structure is simple and less expensive in comparison with the electronically controlled type for example; besides, it is
30 possible to make the system nearly maintenance-free.

According to another aspect of the invention there is provided, in combination with the above, an exhaust system for a saddle-ride type vehicle wherein a separator is provided within the muffler to partition the interior of the muffler

- 3 -

into an expansion chamber in which the open end of the exhaust pipe is disposed and an expansion chamber in which the exhaust valve is disposed, and an aperture is formed in the separator to provide communication between the adjacent expansion chambers, the aperture being opened and closed by the
5 exhaust valve.

According to this aspect of the invention, since the interior of the muffler is partitioned by a separator into an expansion chamber in which the open end of the exhaust pipe is located and an expansion chamber in which the exhaust valve
10 is disposed, high-temperature exhaust gas just leaving the exhaust pipe can be prevented from direct contact with the exhaust valve and hence it is possible to improve both durability and reliability. Particularly, it is possible to increase the durability of the return spring.

15 According to a further aspect of the invention there is provided, in combination with the above, an exhaust system for a saddle-ride type vehicle wherein the separator functions as an exhaust gas flow uniforming plate when the aperture is closed by the exhaust valve.

20 According to this aspect of the invention, when an aperture pre-formed in the separator is closed with the exhaust valve, the separator can be allowed to function as an exhaust gas flow uniforming plate and hence the exhaust gas leaving the open end of the exhaust pipe can be conducted smoothly toward an open end of a communication pipe for communication with the other expansion
25 chamber.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention are shown in the drawings, wherein:

30 Fig. 1 is a schematic diagram of a motorcycle to which the present invention is applied.

Fig. 2 is a perspective view seeing through the interior of a muffler 6.

Fig. 3 is a side view thereof.

5 Fig. 4 is a view showing an exhaust valve from behind.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

10 An embodiment of the present invention will now be described with reference to the drawings. Fig. 1 schematically illustrates a motorcycle to which the present invention is applied. In this motorcycle, a multi-cylinder engine 3 is disposed between a front wheel 1 and a rear wheel 2 and exhaust pipes 4 (only one is shown in the figure) extending from exhaust ports of the cylinders are gathered as a manifold pipe 5 at a suitable position, for example, at a position under the engine 3, the manifold pipe 5 being connected to a muffler 6 which is generally
15 triangular in side view. A bottom 7 of the muffler 6 is nearly parallel to the ground and ensures a predetermined minimum road clearance. An upper surface 8 of the muffler 6 extends backward and obliquely upward, with a tail pipe unit 9 being attached to a rear end of the muffler.

20 Numeral 10 denotes a front fork, 11 a head pipe, 12 a main frame, 13 a pivot frame, 14 a pivot, 15 a rear frame, 16 a seat rail, and 17 a seat.

Fig. 2 is a perspective view seeing through the interior of the muffler 6. In the muffler 6, the interior of a case 20 is partitioned into three chambers by a first
25 separator 21 and a second separator 22, which chambers are assumed to be a first expansion chamber 23, a second expansion chamber 24 and a third expansion chamber 25 in order from the front side.

The manifold pipe 5 gets into the second expansion chamber 24 sideways of a
30 lower portion of the same chamber and extends upward substantially in parallel with the first separator 21 which is bent in the interior, with an open end 5a of the manifold pipe 5 being open upward. The second expansion chamber 24 communicates with the first expansion chamber 23 through a first connecting pipe 26 which is disposed in a lower portion of the first separator 21. Exhaust

- 5 -

gas expanded in the second expansion chamber 24 is again throttled by the first connecting pipe 26 and enters the first expansion chamber 23, in which it expands again.

5 Thereafter, the exhaust gas gets into a second connecting pipe 27 which extends through upper portions of the first and second separators 21, 22, and while being throttled thereby, it flows into the third expansion chamber 25, in which it undergoes the third expansion. Then, the exhaust gas passes through tail pipes 28 and is discharged into the atmosphere. As the tail pipes, two pipes different
10 in diameter and length are used in combination. Numeral 29 denotes a supporting stay.

In the second expansion chamber 24, a short-circuiting aperture 30 is formed in a lower portion of the second separator 22. Under the action of a predetermined or
15 higher exhaust pressure, an exhaust valve to be described later, which is disposed on the third expansion chamber 25 side, becomes open, allowing the exhaust gas to flow directly from the second expansion chamber 24 into the third expansion chamber 25 to control the exhaust pressure. The short-circuiting aperture 30 is normally closed by a normally closed type exhaust valve 34 (Fig.
20 4).

Numeral 31 denotes a heat conducting plate disposed so as to cover the short-circuiting aperture 30 from above through a slight spacing, with punched holes being formed therein.

25 A catalyst 32 is disposed within the manifold pipe 5 at a position near the open end 5a. The manifold pipe 5 may be a single exhaust pipe. By the generic term "exhaust pipe" as referred to herein it is meant to include a single exhaust pipe and a manifold pipe.

30 Since the second connecting pipe 27 extends backward and obliquely upward, it conducts the exhaust gas flowing out from the open end 5a of the manifold pipe 5 to the upper portion side of the second separator 22. Further, the exhaust gas flows downward along the second separator 22 and reaches the short-circuiting

aperture 30. When the short-circuiting aperture 30 formed in the second separator 22 is closed with the exhaust valve 34 (Fig. 4), the second separator functions as it is as a flow uniforming plate for conducting the exhaust gas to the second expansion chamber 24-side open end of the first connecting pipe 26. If
5 the short-circuiting aperture 30 is open, the exhaust gas flows directly into the third expansion chamber 25 through the short-circuiting aperture 30. A portion 7a of the bottom 7 of the case 20 which portion is contiguous to the lower portion of the second separator 22 is bent toward the open end of the first connecting pipe 26 and thus here again it is possible to obtain a flow uniforming effect.

10

Fig. 3 is a side view seeing through the interior of the muffler 6. As the second connecting pipe 27, two pipes are used as one set. The two pipes are disposed so as to cover in a widened state the open end 5a (see Fig. 2) of the manifold pipe 5. The muffler 6 becomes thick in the expansion chamber 24 and thereby expands
15 its capacity, in the interior of which is accommodated the open end 5a-side portion of the manifold pipe 5. The catalyst 32, which is cylindrical, is accommodated within the manifold pipe 5 at a position near the open end 5a. According to this arrangement, the manifold pipe 5 accommodated in the interior of the second expansion chamber 24 of a relatively large capacity can be
20 made large in diameter and capacity, so that the catalyst 32 of a sufficient capacity can be accommodated within the manifold pipe 5.

The open end 5a of the manifold pipe 5 is oriented in a slightly inclined state toward the first separator 21, so that the high-temperature exhaust gas just after
25 leaving the opening end 5a does not directly advance toward the short-circuiting aperture 30, but strikes against the upper portion of the second separator 22 and an upper wall side of the muffler 6 and slows down, then forms a flow so as to descend along the second separator 22, whereby the exhaust gas can expand to a satisfactory extent throughout the whole of the second expansion chamber 24.

30

The tail pipe unit 9 is constituted as an integral combination of the tail pipes 28, a decorative panel 9a which surrounds the tail pipes, and a partition wall through which the tail pipes 28 extend.

Fig. 4 is a diagram showing the exhaust valve from behind. The exhaust valve 34 is in the shape of a disc which covers the short-circuiting aperture 30 and it is supported pivotably by a pivot shaft 35. Around the pivot shaft 35 is mounted a return spring 36 which is a coil spring. The return spring 36 urges the exhaust
5 valve 34 in the closing direction.

Both ends 37 of the return spring 36 are passed through mounting portions 38 provided on the outer periphery of the exhaust valve 34 and thereby urge the exhaust valve 34 for rotation. The strength of the return spring 36 is set so that
10 the exhaust valve 34 rotates and opens under the action of a predetermined exhaust pressure. Therefore, when the exhaust pressure becomes high enough to overcome the spring load on the return spring 36, the exhaust valve 34 opens automatically, allowing the exhaust gas to flow out into the third expansion chamber 25 through the short-circuiting aperture 30 and thus making adjustment
15 of the exhaust pressure.

Since the exhaust valve 34 thus opens or closes automatically in accordance with the exhaust pressure, it is not necessary to use any special actuator for control and drive and it is possible to attain a simple and substantially maintenance-free
20 structure. Besides, since the bottom 7 of the muffler 6 is inclined outwards and obliquely upward at a slight angle θ , this also makes contribution to a large bank angle.

The operation of this embodiment will now be described. Since the manifold
25 pipe 5 is connected sideways to the second expansion chamber 24, the manifold pipe 5 can be connected to the second expansion chamber 24 which is thick and wide and it is possible to effect the connection of the manifold pipe 5 without exerting any influence on the minimum road clearance (Fig. 1). If the manifold pipe 5 is connected to the first expansion chamber 23, it is required to thicken the
30 first expansion chamber. In this case, if the first expansion chamber 23 is expanded downward, the minimum road clearance H becomes smaller and so does the bank angle.

In this regard, since the muffler 6 is in a generally triangular shape of a large length in side view and its bottom 7 is made substantially horizontal, it is possible to make the minimum road clearance relatively large and thereby set a large bank angle. Also by forming the muffler in a generally triangular shape in side view and making the bottom 7 nearly parallel to the ground, it is possible to secure a minimum road clearance.

Besides, by accommodating the manifold pipe 5 into the second expansion chamber 24 of a large capacity it is possible to accommodate the catalyst 32 in the interior of the manifold pipe 5 and make the catalyst 32 large in capacity. Moreover, it is not necessary to ensure any special place for the catalyst 32 and hence it is possible to simplify the structure and reduce the size of the exhaust system. In addition, it is possible to make the whole compact while ensuring the required length of the exhaust pipe.

Further, the exhaust valve 34 is disposed in the third expansion chamber 25 partitioned by the second separator 22 from the second expansion chamber 24 into which the manifold pipe 5 opens. That is, the exhaust valve 34 is not disposed in the second expansion chamber 24 into which the exhaust gas flows out from the open end 5a while being raised in temperature through the catalyst 32. Consequently, it is possible to prevent the high-temperature exhaust gas from directly contacting the exhaust valve 34 and the return spring 36. In other words, it is possible to improve the durability of the exhaust valve 34 and that of the return spring 36. Moreover, since it is possible to diminish the influence of heat, the operation accuracy of the exhaust valve 34 is also improved.

Additionally, it is not necessary to dispose the exhaust valve 34 and the return spring 36 at any special installation place in the exterior of the muffler 6, whereby the simplification and reduction in size of the entire system can be attained.

The second connecting pipe 27 is disposed near the open end of the manifold pipe 5 to prevent the exhaust gas flowing out of the manifold pipe 5 from flowing directly toward the return spring 36, allowing the exhaust gas to flow toward the upper portion of the second separator 22 and the inner wall of the upper portion of the second expansion chamber 24. Further, a flow advancing

downward along the second separator 22 is created and, when the exhaust valve 34 is closed, the second separator 22 functions as a flow uniforming plate for conducting the exhaust gas to the first connecting pipe 26 smoothly as a uniform flow. The second connecting pipe 27 can also be utilized as a flow uniforming member. Upon opening of the exhaust valve 34, the exhaust gas flows out immediately into the third expansion chamber 25 through the short-circuiting aperture 30, resulting in the exhaust pressure being reduced.

The line connected to the muffler 6 from the engine side to introduce the exhaust gas into the muffler may be a manifold pipe or a single exhaust pipe. The return spring 36 is not limited to the coil spring. There may be used any of various types of springs. Further, the internal structure of the muffler 6 is arbitrary insofar the number of separators and that of expansion chambers are plural.

Although various preferred embodiments of the present invention have been described herein in detail, it will be appreciated by those skilled in the art, that variations may be made thereto without departing from the spirit of the invention or the scope of the appended claims.

WH-13309CA
SN 2,625,130

- 10 -

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. An exhaust system for a saddle-ride type vehicle wherein exhaust gas from an engine is discharged from a muffler through an exhaust pipe, the exhaust system comprising: an exhaust valve disposed in an exhaust passage within the muffler to control the flow rate of the exhaust gas; and a catalyst disposed within the exhaust pipe at a position near an end of the exhaust pipe that opens into the muffler; and wherein a separator is provided within the muffler to partition the interior of the muffler into an expansion chamber in which the open end of the exhaust pipe is disposed and an expansion chamber in which the exhaust valve is disposed, and an aperture is formed in the separator to provide communication between the adjacent expansion chambers, the aperture being opened and closed by the exhaust valve.
2. The exhaust system for a saddle-ride type vehicle according to Claim 1, wherein the exhaust valve is urged in a direction closing the exhaust valve by a return spring and the exhaust valve opens under the action of exhaust pressure.
3. An exhaust system for a saddle-ride type vehicle according to Claim 1 or 2, wherein the separator is adapted to function as an exhaust gas flow uniforming plate when the aperture is closed by the exhaust valve.

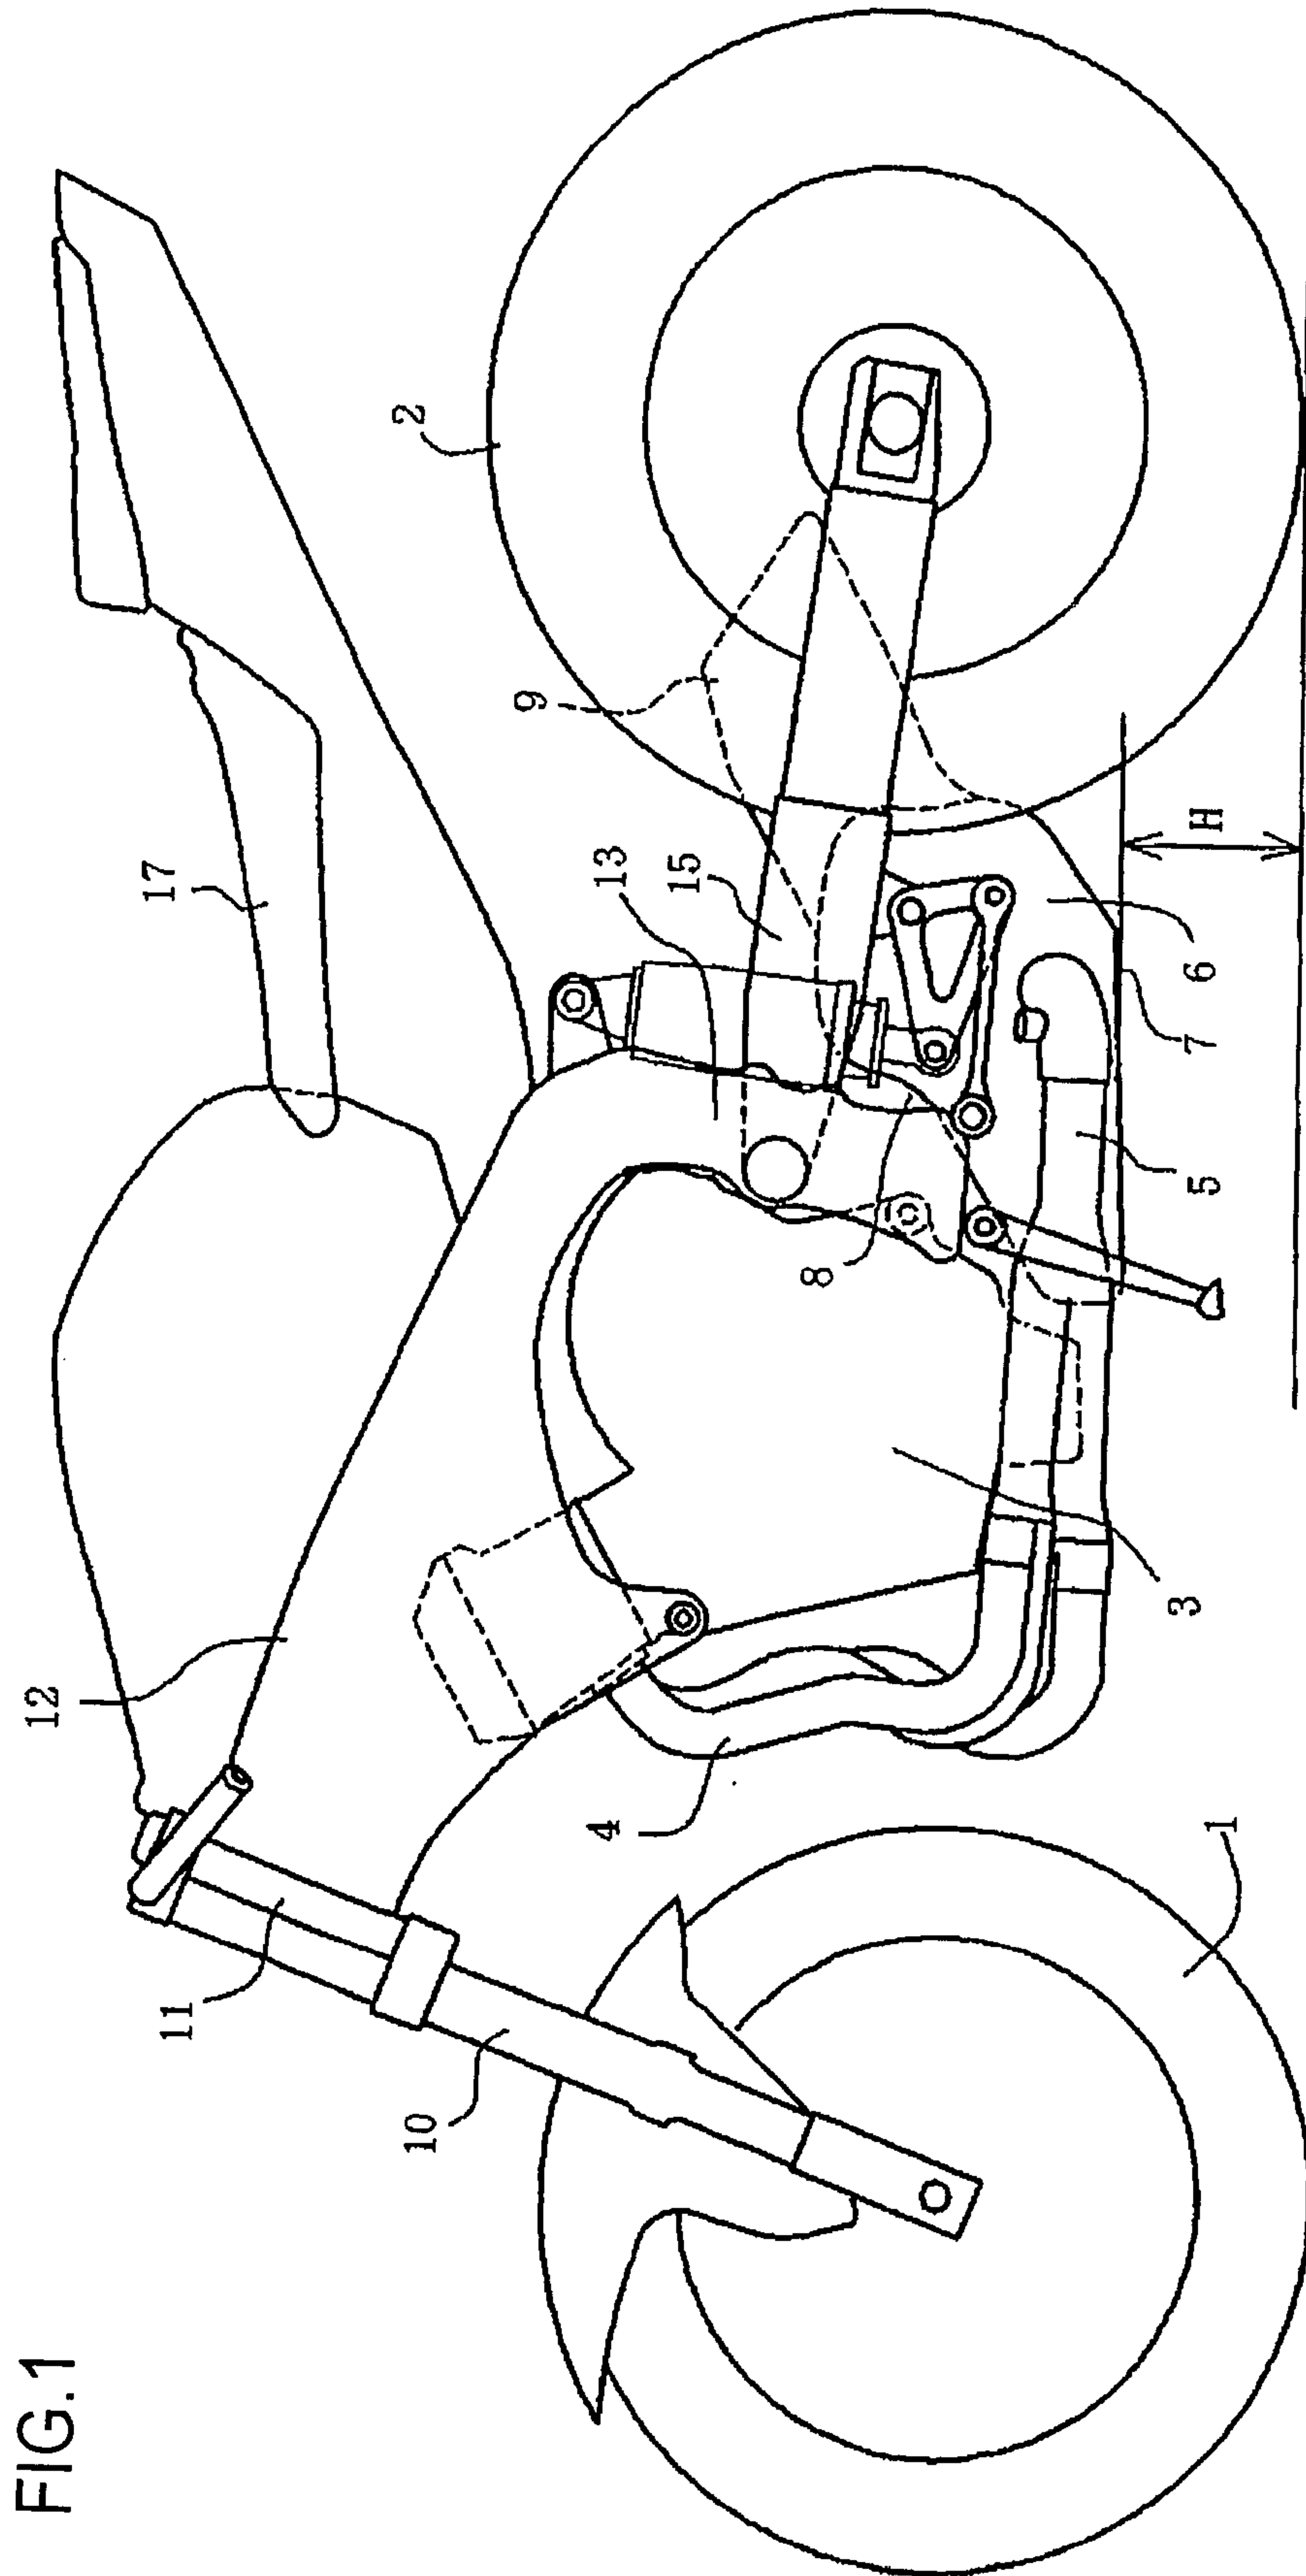
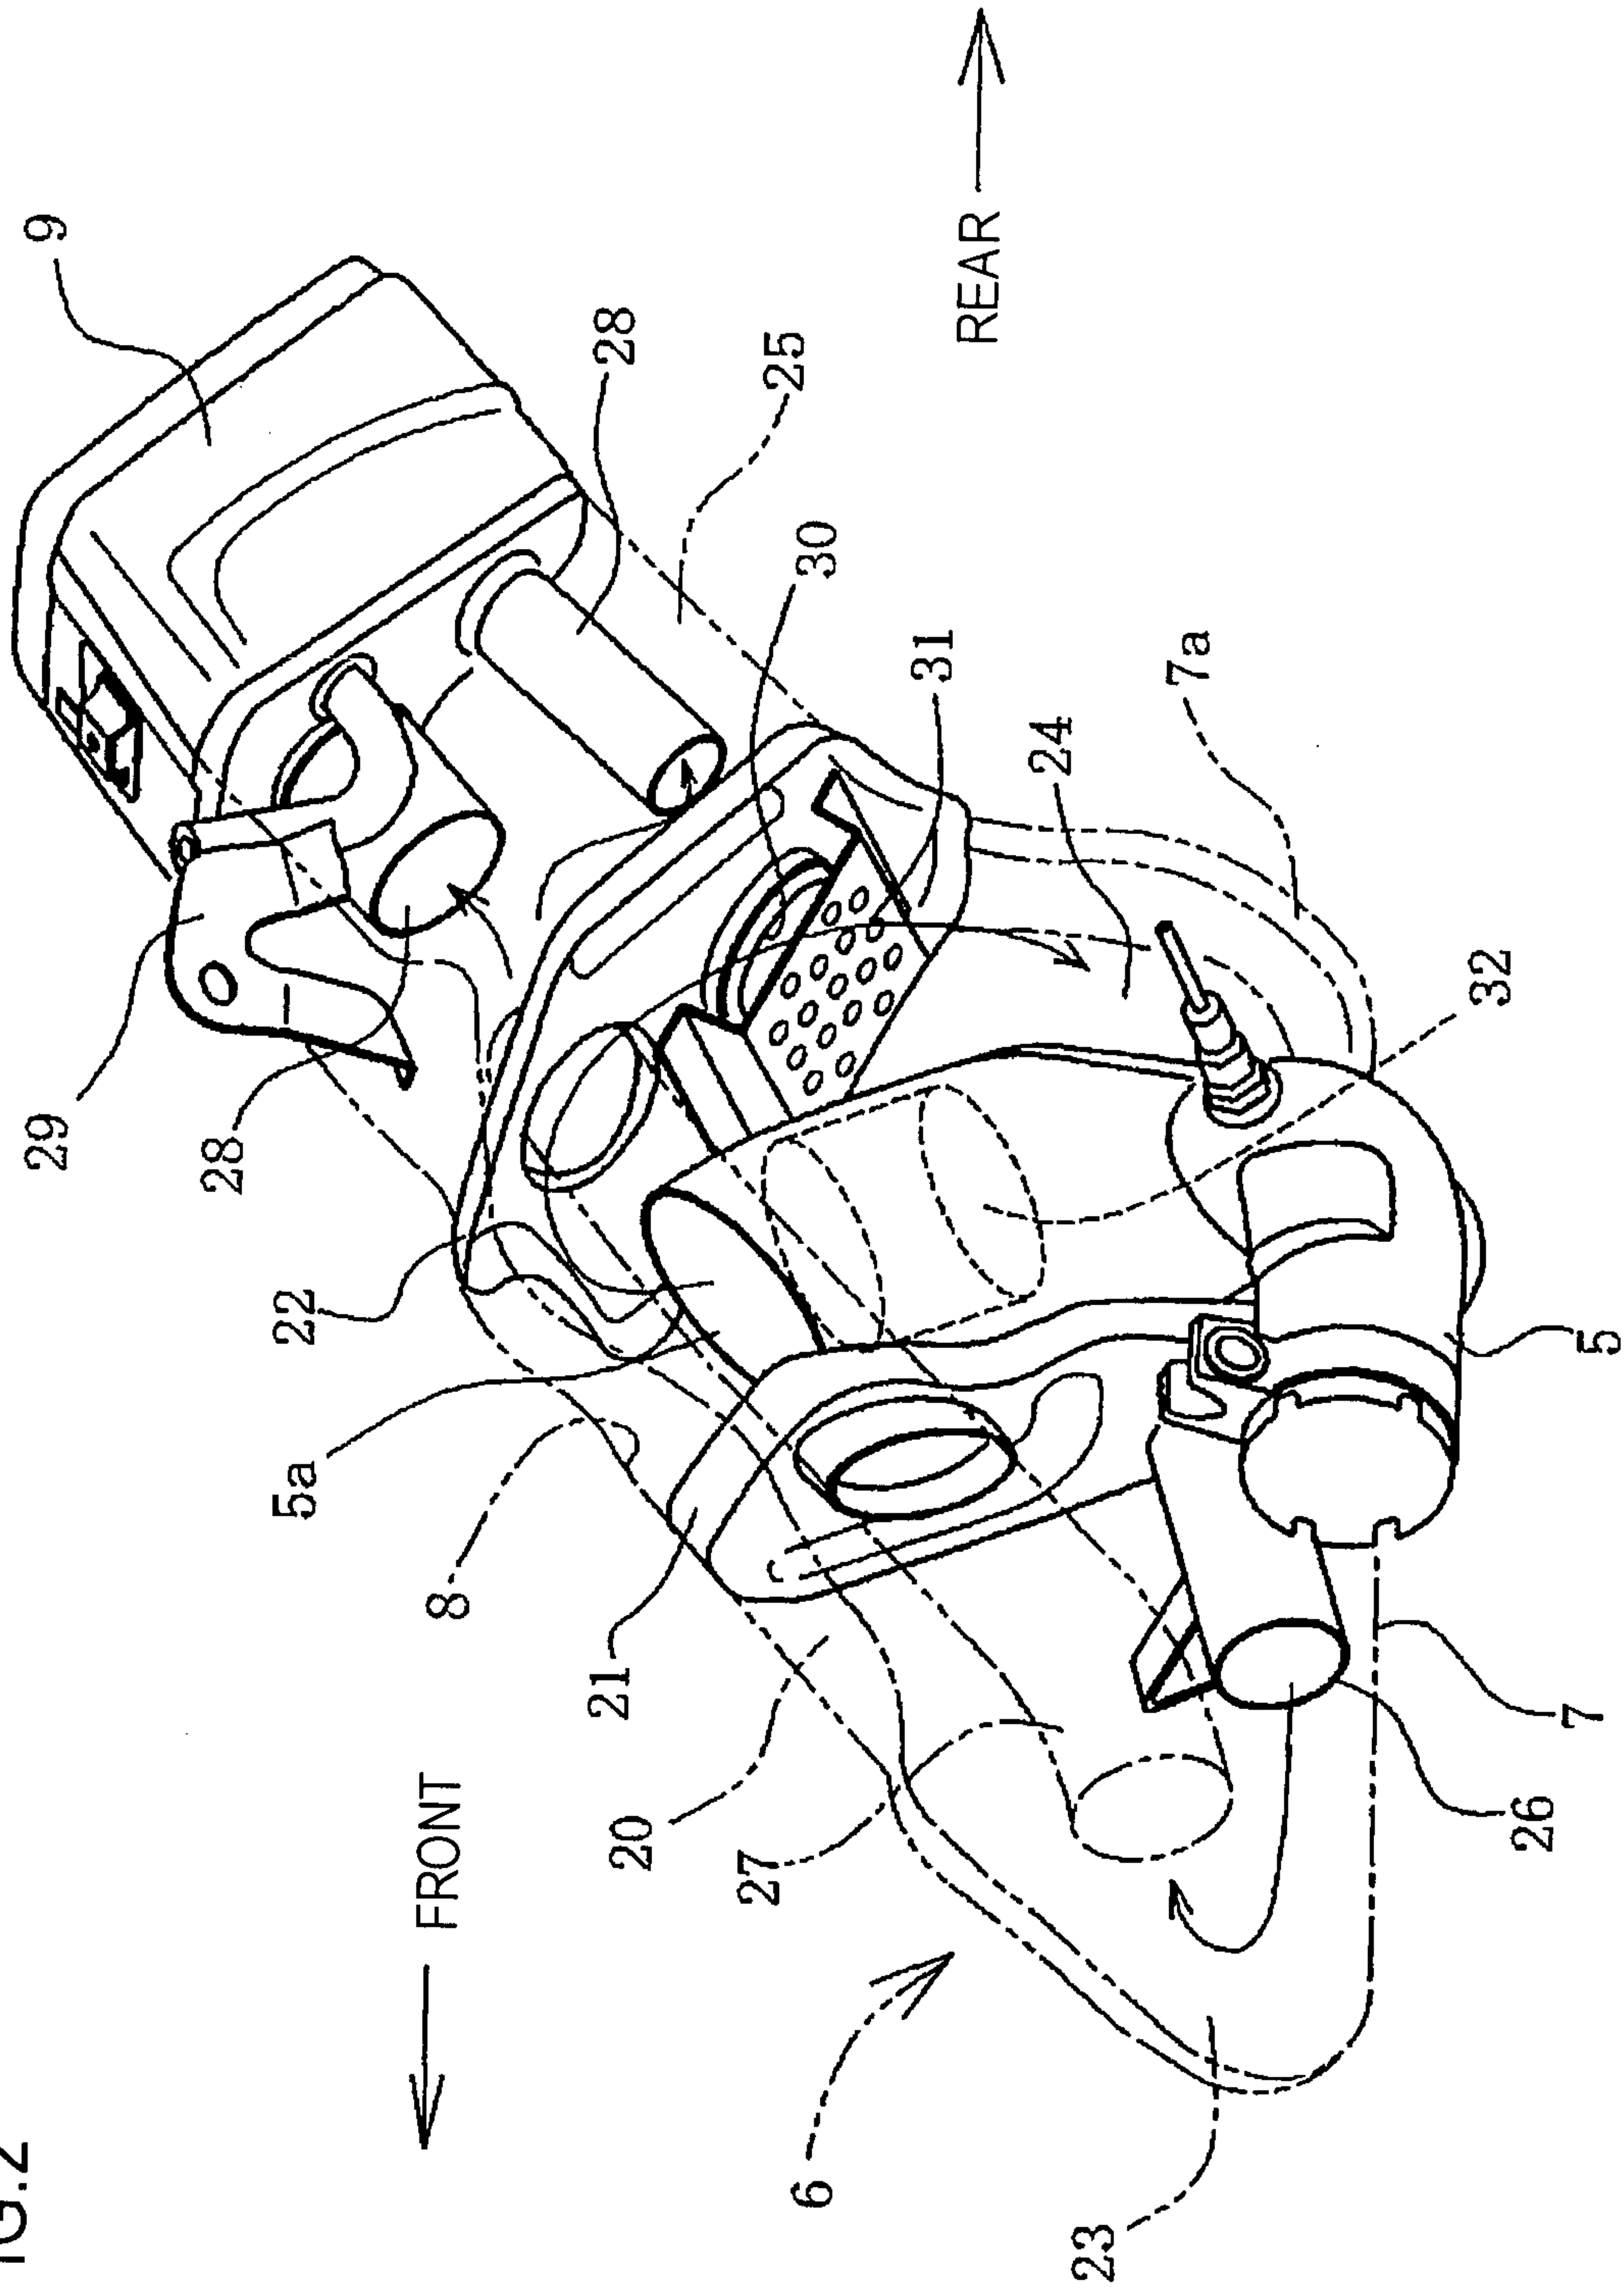


FIG.2



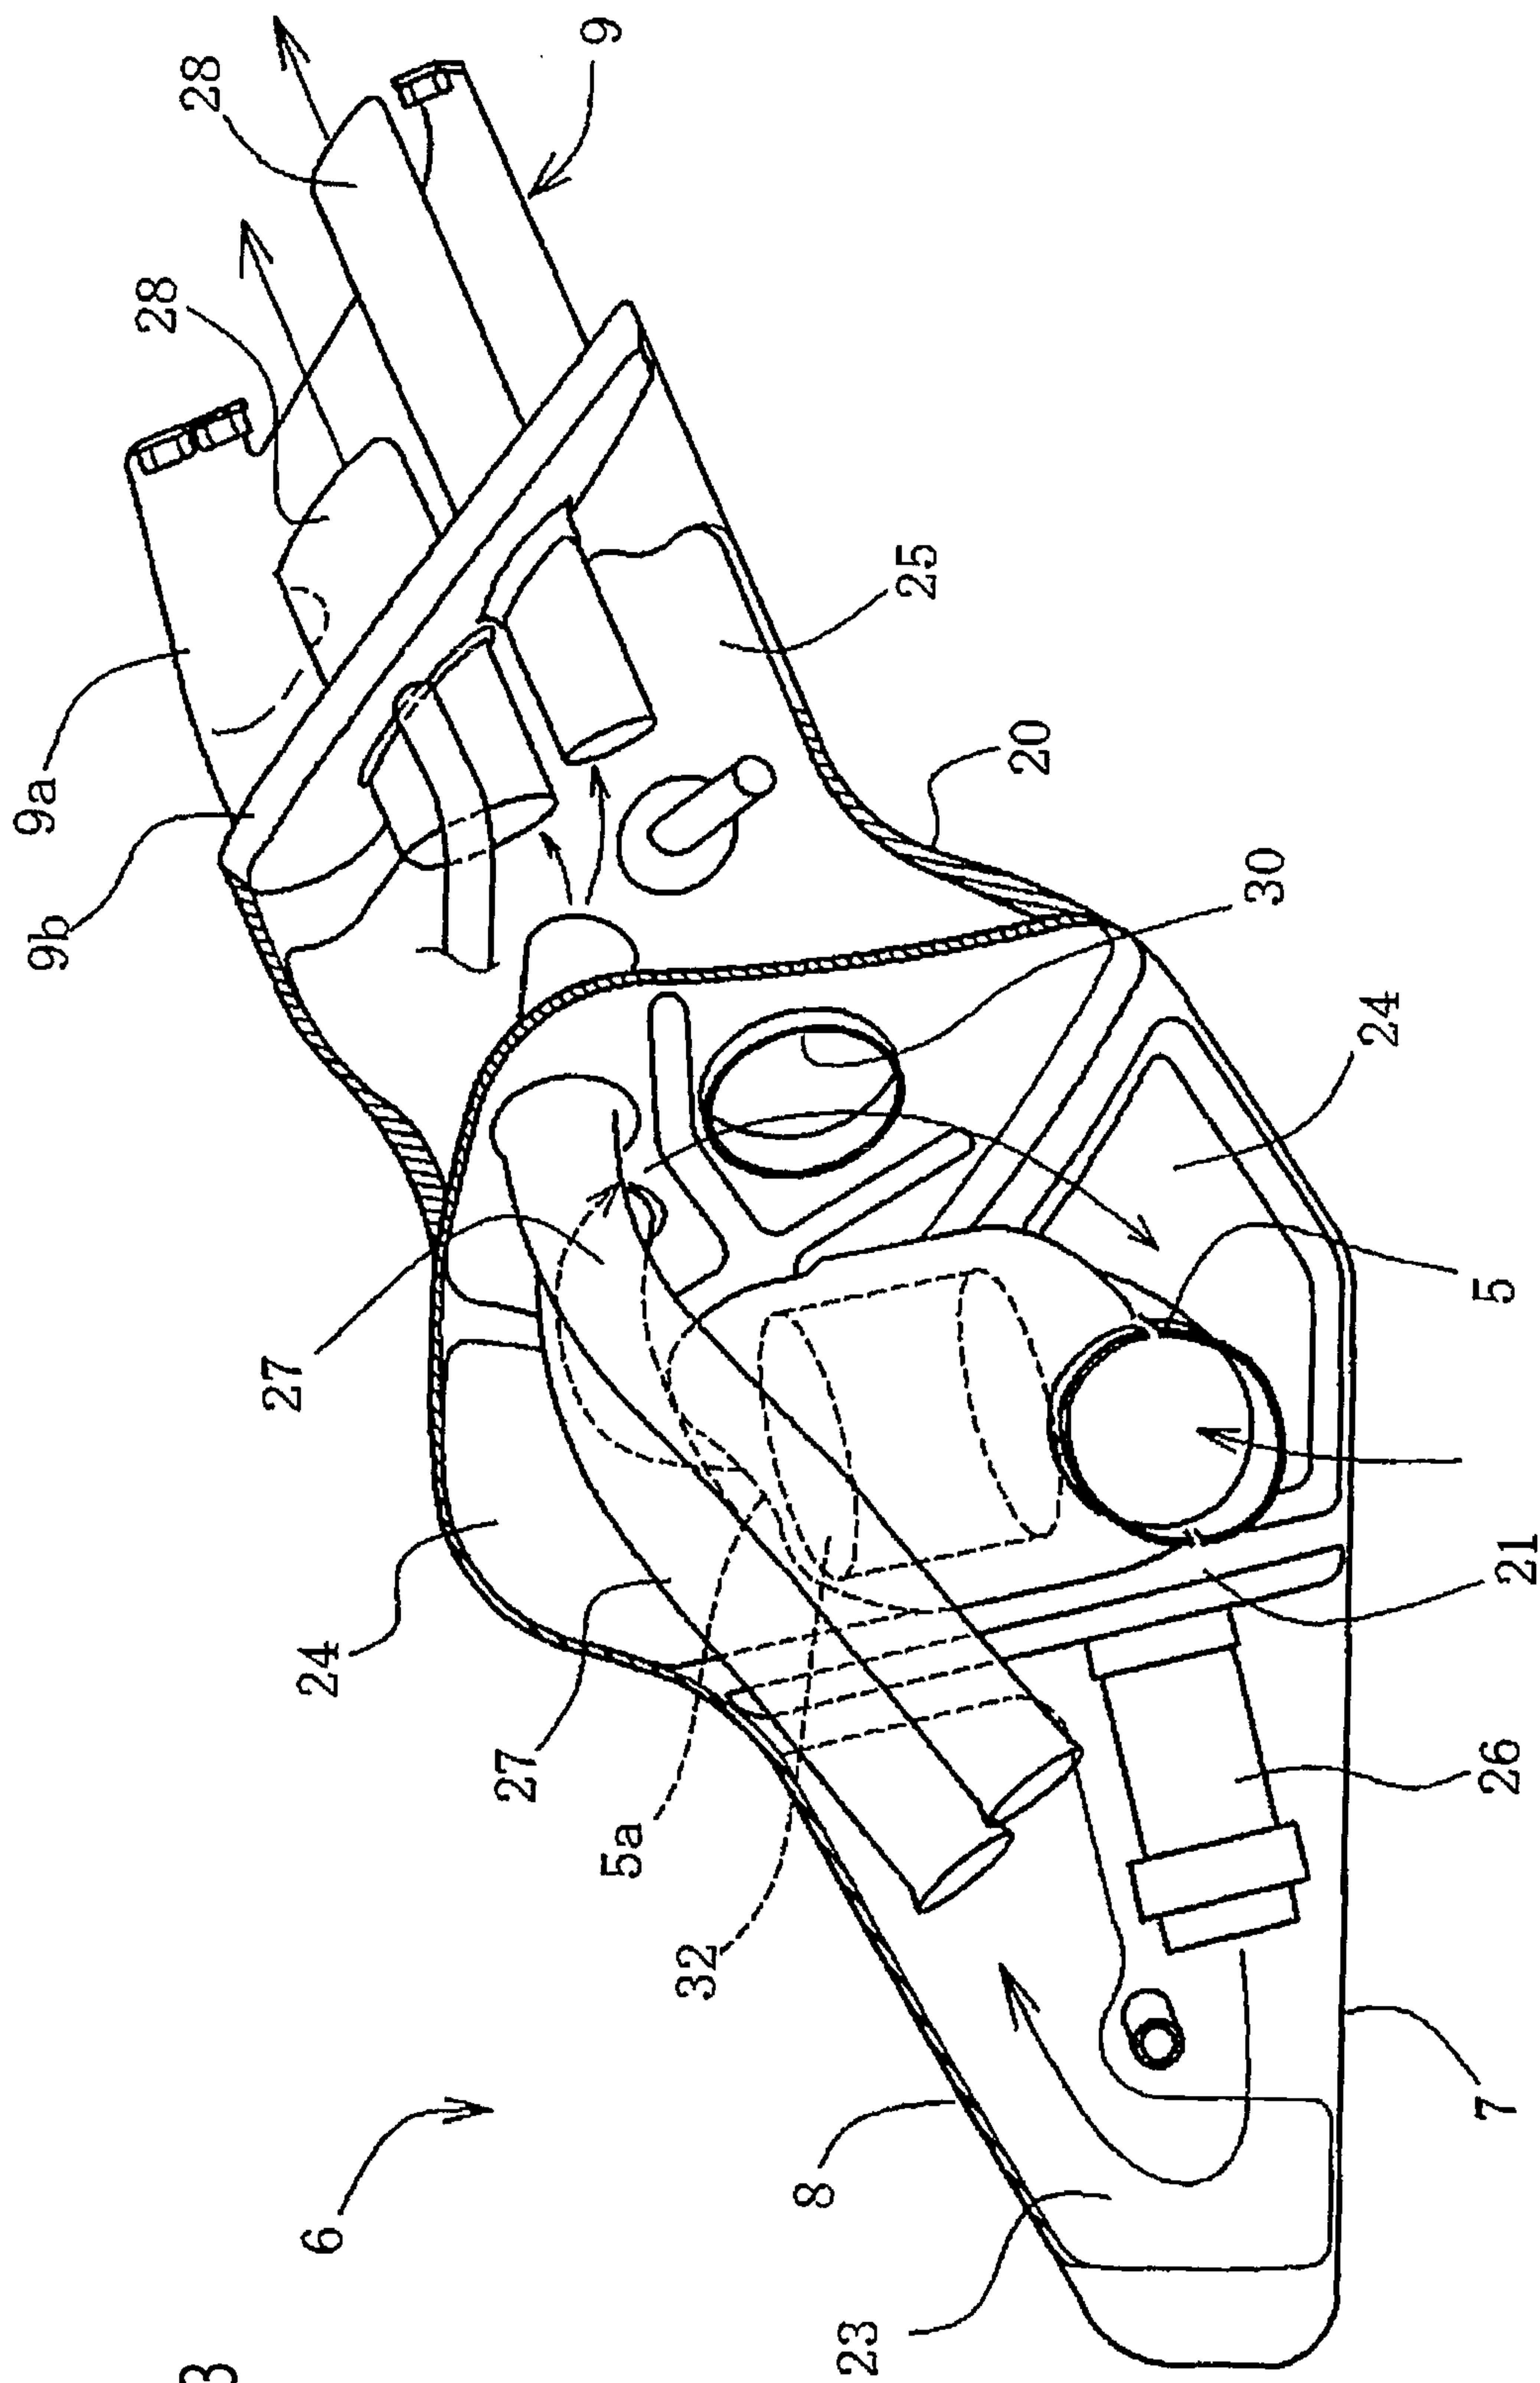


FIG. 3

FIG.4

