


(No Model.)

W. S. HAYS.
ELECTRIC ARC LAMP.

No. 463,720.

Patented Nov. 24, 1891.

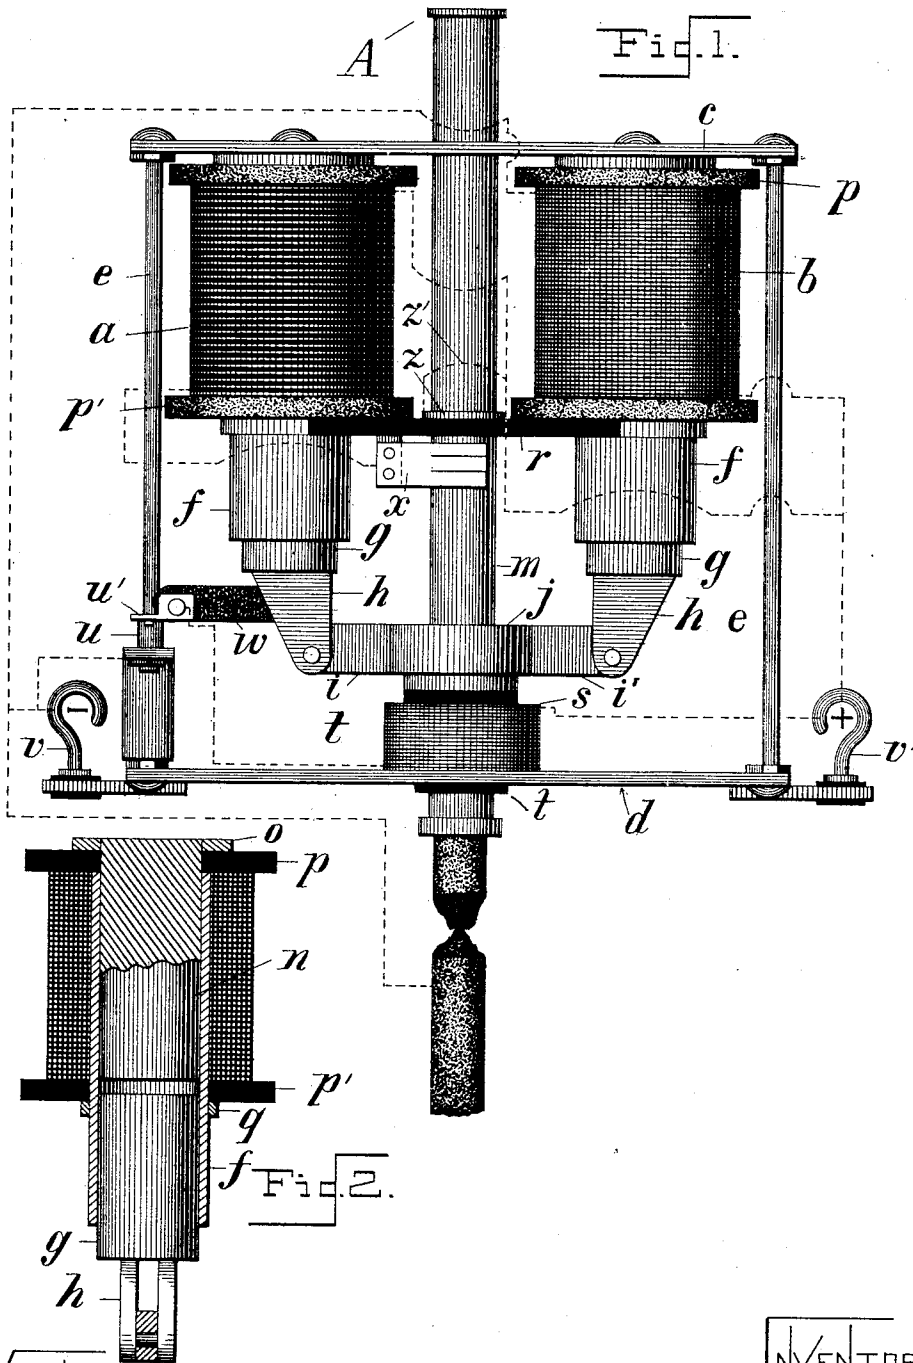

WITNESSES

W. H. Courtland

Nellie L. Pope.

INVENTOR

WILL S. HAYS

BY HIS ATTORNEY

Edward P. Thompson

UNITED STATES PATENT OFFICE.

WILLIAM STAFFORD HAYS, OF TROY, OHIO.

ELECTRIC-ARC LAMP.

SPECIFICATION forming part of Letters Patent No. 463,720, dated November 24, 1891.

Application filed July 27, 1891. Serial No. 400,873. (No model.)

To all whom it may concern:

Be it known that I, WILLIAM STAFFORD HAYS, a citizen of the United States, and a resident of Troy, county of Miami, and State of Ohio, have invented certain new and useful Improvements in Arc Lamps, of which the following is a specification.

My invention relates to the mechanical construction of an electric-arc lamp.

The invention is described accurately by reference to the accompanying drawings, in which—

Figure 1 is an elevation of that part of the lamp to which the invention relates. Fig. 2 is a vertical section of a portion of the lamp.

The device embodying my invention consists of the combination of a main magnet *a* of coarse wire, a shunt-magnet *b* of fine wire, both securely attached to the upper plate *c*, which is connected to the lower plate *d* by posts *e*. Each magnet, as shown in Fig. 2, has a tubular non-magnetic axial projection *f*, in which loosely fits an axial cylindrical armature *g*, provided with a slotted extension *h*, to which is pivoted, respectively, the arms *i* *v'* of the ring-clutch *j*, through which passes the carbon-holder *m*. It will be noticed that the elements *f g h i* are in duplicate, the same being provided, respectively, for the magnets *a b*. The axes of the magnets *a b* are parallel to and equally distant from that of the carbon-rod holder *m*. The axes of the tubes *f* and armatures *g* coincide, respectively, with those of the magnets *a b*. The tubular projection *f* forms an extension to the tube *f'*, surrounding the core *n*. To this core is secured a washer *o*, against which presses the spool end *p*. The tube *f'* presses against the opposite side of the spool end or insulating-disk *p*, whereby the latter is held in a fixed position at one end of said core. The corresponding disk *p'* is held upon the tube *f'* by a ring *q*, soldered upon the same and pressing against the disk *p'*. Between the two disks is located a winding of a magnet. An insulating-plate *r* connects the disks *p'*, which belong, respectively, to the magnets *a b*. The holder *m* passes through said plate and also through the plates *c* and *d* and the high-resistance coil *s*, which is wound upon an insulating-tube *t*, surrounding the holder *m* and fixed to the plate *d*. Supported on said plate *d* is a contact *u*,

which is in circuit with the lamp-terminal *v* and in path of the contact *u'*, which is carried upon an insulating-projection *w*, extending from one of the slotted extensions *h*. When the lamp is ready for use, the contacts *u* and *u'* touch each other, as do also the insulating-tube *t* and the ring *j*, while the cores *n* are at the maximum distance from the armature *g*.

With no current through the lamp or with carbon consumed the circuit is from the terminal *v'*, through the resistance-coil *s*, contacts *u u'*, and terminal *v*. With carbons in the lamp and with no current the circuit is the same, except that there is also a path from the lamp-terminal *v'*, through the magnet *a*, the brush *x*, which rests upon the holder *m*, through the carbons, and to the lamp-terminal *v*. If now the current passes through the lamp, it divides between the path of the carbons and the coil *s*, the two being branch circuits to each other. The magnet *a* being of low resistance and properly wound, the armature *h* is attracted sufficiently to interrupt the circuit at the contacts *u u'*. Then all the current will pass through the magnet *a*, raising its armature *g* to the full height and by means of a clutch *j* separating the carbons and starting the arc. As the arc lengthens more and more, current passes through the shunt-magnet *b*, attracting its armature *g* and raising the other side of the clutch *j* until the carbon-rod is released, which falls until the arc is the normal brilliancy, when the shunt-magnet *b* weakens, allowing its armature to drop, thus locking the rod *m* until the process is repeated through the formation of the lengthened arc.

z is a contact located upon plate *r* and electrically connected to post *v'* by the conductor *z'*. Therefore when the button *A* on top of the holder *m* touches the terminal *z*, (as it does when the carbons have been consumed,) the coil *a* is short-circuited, its core demagnetized, and armature *g* released. Contacts *u u'* close the circuit through the resistance-coil *s*.

I find in practice that the lamp is free from the difficulty known as the "rod sticking."

I claim as my invention—

1. In an electric-arc lamp, the combination of a carbon-holder *m*, a friction-ring clutch *j*, surrounding the same and having oppositely-

located arms *i i'*; main and shunt magnets *a b*, whose axes are parallel to and substantially equally distant from that of the holder *m*, tubular axial extensions *f*, of non-magnetic material, projecting from said magnets and forming extensions to the tubes *f'*, upon which the magnet-coils are wound and within which are located the magnet-cores *n*, cylindrical armatures *g*, loosely and axially located in said tubes *f* and having slotted extensions *h*, which are pivoted to the said arms *i i'*, respectively, and an insulating-tube *t*, surrounding the holder *m* and supporting the ring *j*.

2. In an electric-arc lamp, the combination of a carbon-holder *m*, a friction-clutch *j*, surrounding the same and having oppositely-located arms *i i'*, main and shunt magnets *a b*, whose axes are parallel to and substantially equally distant from that of the holder *m*, tubular axial extensions *f*, of non-magnetic material, projecting from said magnet and forming extensions to the tubes *f'*, upon which the magnet-coils are wound and within which are located the magnet-cores *n*, cylindrical arma-

tures *g*, loosely and axially located in said tubes *f* and having slotted extensions *h*, which are pivoted to the said arms *i i'*, respectively, an insulating-tube *t*, surrounding the holder *m* and supporting the ring *j*, a resistance-coil *s*, mounted upon the insulated tube *t* and in circuit with separable contacts *u u'*, one of which is stationary and the other carried by one of the extensions *h*, and an insulating-plate *r*, connecting the magnet *a b* and carrying an electric terminal *z*, connected with one of the terminals of the lamp and carrying a brush *x*, which is electrically connected with the carbon-holder *m* and with the coil of magnet *a*.

In testimony that I claim the foregoing as my invention I have signed my name, in presence of two witnesses, this 21st day of July, 1891.

WILLIAM STAFFORD HAYS.

Witnesses:

W. W. EDGE,
J. A. DAVY.