

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/033837 A1

(51) International Patent Classification⁷: **E06B 3/98**

CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:
PCT/GR2003/000044

(22) International Filing Date: 9 October 2003 (09.10.2003)

(25) Filing Language: English

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English

(30) Priority Data:
20020100440 9 October 2002 (09.10.2002) GR

(71) Applicant and
(72) Inventor: **LEONTARIDIS, Athanasios** [GR/GR];
Vosporou 61, GR-171 24 Nea Smirni, Attikis (GR).


Published:
— with international search report

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: JOINT FOR THE ANGULAR CONNECTIONS OF DOOR / WINDOW PROFILE FRAMES AND THE LIKE

(57) Abstract: The angular joint of the invention comprises a slide base portion (1) and a sheet metal mobile portion (2) superimposed thereupon, the sheet metal portion (2) including upwardly extending legs (2e) with indenting edges (2g), a bolt (3) being employed in the tightening process of the joint, wherein after the joint has been inserted into the hollow profile members being brought together for connection, the bolt (3) acts so as to exert an upwardly raising force onto the sheet metal mobile portion (2), whilst maintaining base portion (1) at a fixed position, and subsequently leading the sharp indenting edges (2g) of the sheet metal portion (1) to producing an indentation effect into the walls of the corresponding chambers (13a, 13b) of the hollow profiles being angularly connected with the joint, as the joint is being tightened, thereby resulting in a robust, self aligned connection of the hollow profile members.

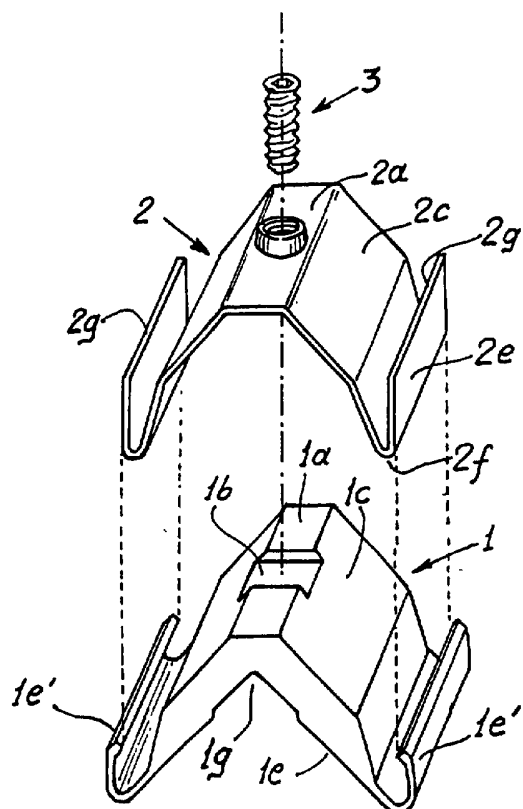

WO 2004/033837 A1

**Joint for the angular connections
of door / window profile frames and the like**

THE FIELD OF THE ART

The invention relates to an angular joint employed in the process of angular connections of hollow profiles, such as in the orthogonal connections of profiles being previously cut at 45° and coming to contact to form parallelepipedal frames for doors or windows.

Joints for door and window profile frames of the prior art of the type of spring activated button means removably engaging into suitable apertures of the profiles to stabilize the angular connection thereof, require, prior to employment thereof, the opening of apertures at precisely selected locations of the profiles wherein are removably engaged the abovementioned spring activated buttons. This process is awkward and time consuming due to the accuracy required in marking and drilling of the apertures and often leads to an imperfect fit of the profiles and to a structure of reduced aesthetics and functionality due to the non-alignment of the profiles.

EP 0 644 312 discloses a set-square connecting structure for right angle connections of profile frames for frames for doors and windows, wherein a pair of apertures is required in the profiles being brought for connection, for engagement of protruding teeth of the connecting structure into these apertures and the safe locking of the profile sections with one another. EP 0235 039 and FR 2 429 350 also disclose connecting devices for the assembly of tubular profiles for the formation of door/window frames, which function through the engagement of protruding buttons into correspondingly sized side apertures in the profiles being brought together for connection.

Similarly WO 02/075093 and US- 6,042,298 also require the accurate opening of side apertures onto the profiles to be connected, and they further

include a plurality of components that make the joint rather complex and of increased manufacturing and assembly cost.

The object of the present invention is to provide for an angular joint of hollow metallic profile members being brought together for the formation of door or window frames and the like, said angular joint being simple in construction, easily assembled or disassembled and providing a self-aligned, rigid connection of the profile members.

A further object of the invention is the elimination of the need for accurately marking and subsequently opening of side apertures onto the profile members being connected, thereby substantially facilitating and speeding up of the assembly process.

Another object of the invention is to provide for alternative embodiments of the joint of the invention, adapting it to various applications extending beyond the field of orthogonal connections of hollow profile members being connected to form door and window frames and making the joint of the invention applicable in connections of profile members of any kind and at any angle whatsoever.

The angular joint of the invention comprises a slide base portion 1 and a sheet metal mobile portion 2 superimposed thereupon, the sheet metal portion 2 including upwardly extending legs 2e with indenting edges 2g, a bolt 3 being employed in the tightening process of the joint, wherein after the joint has been inserted into the hollow profile members being brought together for connection, the bolt 3 acts so as to exert an upwardly raising force onto the sheet metal mobile portion 2, whilst maintaining base portion 1 at a fixed position, and subsequently leading the sharp indenting edges 2g of the sheet metal portion 1 to producing an indentation effect into the walls of the corresponding chambers 13a, 13b of the hollow profiles being

angularly connected with the joint, as the joint is being tightened, thereby resulting in a robust, self aligned connection of the hollow profile members.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a perspective view of the individual items employed in one first embodiment of the joint of the invention.

Fig. 1a shows a sectional view of an illustrative type of a profile for the assembly of door and window frames being angularly connected by means of the joint of the invention.

Figs. 2a-b present the joint of the invention in a position prior to starting and following completion of the angular connection of the two profiles, the ends of which have been previously cut at an angle of 45°.

Fig. 2c shows a magnified detail of the movement of the end leg of the mobile portion of the joint of the invention.

Fig. 3 shows a sectional view of an alternative embodiment of the invention wherein the bolt means used for tightening of the joint passes through the fixed slide base portion of the joint.

Figs. 4a-4c present in a perspective view various alternative embodiments of the joint of the invention and mainly of the slide base portion thereof.

Figs. 5 and 5a-c present in perspective various alternative embodiments of the joint of the invention and mainly of the sharp edges of the end legs of the mobile portion thereof.

Figs. 6a-b present in a perspective view and a sectional view respectively another embodiment of the joint of the invention.

Figs. 7a-c present in perspective views three alternative, illustrative solutions for opening an aperture with internal threading at the mobile portion of the joint of the invention.

Figs 8a and 8b show an alternative embodiment of the invention, wherein the joint is applied with a pair of apertures, one in each one of the profiles to be connected, the joint correspondingly comprising independently driven legs of the mobile portion thereof.

5 Figs. 9a-c present in a perspective view the sequential steps in mounting and tightening of the joint of the invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The joint of the invention is particularly related with the assembly of frames that are being assembled from previously cut lengths of profiles e.g. aluminium or plastic profiles, such profiles having a hollow section to allow
10 introduction and operation of the joint. A broad, but not exclusive, field of application of the invention is the connection of profile members in the corners thereof, when they are brought together to form generally parallelepipedal frames or casings for door and window applications. Such
15 profile members are previously cut at 45° at the matching edges thereof to allow for an optimally aesthetic fit of the orthogonal connection.

Thus, whilst the joint of the invention has a necessarily orthogonal configuration in the particular application, it may equally well have the configuration of an acute or an oblique angle to serve applications wherein
20 the hollow profile members are connected at an acute or an oblique angle respectively.

The dimensions of the joint of the invention may naturally vary to make it compatible with different sizes and sections of profile members.

An illustrative hollow profile member 50 is shown in Fig. 1a, such
25 profile member 50 comprising a pair of parallel walls 50c, 50d extending on the one hand at an open end 50a wherein is fitted the item that is being framed by such perimetrically covering length of the profile member, e.g. a glass or shutter panel for a door or window assembly, and on the other hand

at and end 50b, opposite to the open end 50a, end 50b being fixedly mounted to the casing. A chamber 13a,b is formed in between 50a and 50b, such chamber serving for the introduction of the joint of the invention. Whilst other details of the profile members to be connected may vary, the chambers 5 13a,b are available for the employment of the joint of the invention. The drawings therefore depict the abstract detail of such rectangular chambers 13a and 13b with respective open ends 12a, 12b of the hollow profile members being brought together for connection.

The joint of the invention shown in Fig.1 comprises a fixed slide base 10 portion 1 and an elastically deformable sheet metal portion 2 superimposed onto the fixed slide base portion 1 and having a configuration that generally corresponds to the surface of the base portion 1 whereupon it is being seated. Both portions 1 and 2 are symmetrically arranged on either side of plane x-x' (Fig. 2b), a central bolt 3 with a screwing head end 3a and a sharp edge 3b 15 also passing through the same plane of symmetry x-x' being driven by means of a screw driver 14, wherein this plane of symmetry x-x' coincides with the plane of contact of the two hollow profile members being brought together for connection.

The fixed slide base portion 1 is an angular item with a pair of planar 20 outer sides 1e forming an angle corresponding to the angle at which the profile members are being connected, at this instance an angle of 90°, a slight planar recession 1g being formed near the junction of these outer sides 1e, such planar recession 1g serving as a means of overcoming possible obstacles in the course of sliding of these outer sides 1e onto the walls of 25 corresponding chambers 13a, 13b, that might be due to possible imperfections in the cutting and finishing process of the edges of the metal profile members being brought together for connection. The slide base portion 1 forms a flat basement portion 1a overlying the junction of the

above outer sides 1e with a cavity 1b being centrally located thereupon to serve the purpose of receiving the sharp edge 3b of bolt 3.

On either side of the above flat basement portion 1a, that is perpendicularly oriented with regard to the plane of symmetry x-x' the inner sides of the fixed slide base portion 1 extend to a pair of planar sections 1c
5 which are substantially parallel to the walls of profile chambers 13a,b whereupon the outer planar sides 1e are seated and subsequently extend into convergent portions 1d terminating at symmetrically located edges 1f. The herein above described configuration of the sides of the fixed slide base
10 portion 1 substantially improves the characteristics of the process of sliding of the sheet metal mobile portion 2 onto the fixed slide base portion 1 as will be explained hereinafter.

The sheet metal mobile portion 1 has a configuration generally identical with the configuration of the slide base portion 1, with an upper
15 basement 2a with a centrally located cavity 2b wherein is being driven the sharp edge 3b of the tightening bolt 3, wherein the upper basement 2a lies perpendicularly to the plane of symmetry x-x' and symmetrically above the basement 1a of the base portion 1. In turn, the upper basement 2a symmetrically extends to planar side surfaces 2c and 2d, each with a length
20 generally equivalent to the length of underlying surfaces 1c, 1d of the base portion 1, whereupon they slide.

The sheet metal mobile portion 2 is bent upwardly at the terminals 2f of side surfaces 2c-d at an angle $(180-\theta)^\circ$ as illustrated in Fig. 2c, and extends to upwardly extending sides 2e on either side thereof terminating at
25 sharp edges 2g, such upwardly extending sides 2e thereby being oriented in a direction substantially parallel to the plane of symmetry x-x'.

In accordance to a first preferred embodiment of the invention the abovementioned centrally located cavity 2b in the sheet metal mobile portion

2 is drilled through to form an opening with internal threading for the passage of bolt 3. In Figs. 7a-c are depicted possible alternative solutions for implementing such hole with internal threading. In Fig. 7a hole 2b is being formed by expansion of the sheet metal into a cylindrical collar 19 that is subsequently internally threaded. In Fig. 7b is depicted an alternative solution of employment of an additional plate 18 having a planar surface 18a with dimensions such as to fit onto the basement 2a of the sheet metal portion 2 and a central hole 18b that is internally threaded and coincides with hole 2b on the basement 2a when plate 18 is brought in contact with basement 2a. Finally in Fig. 7c is depicted an additional internally threaded cylindrical collar 48 with a body portion 48a and a central hole 48b coinciding with hole 2b of the sheet metal portion 2.

In the case wherein cavity 2b in the sheet metal portion 2, is drilled through and forms a thorough internally threaded hole, such hole being implemented in either one of the illustrative embodiments of Figs 7a-c, bolt 3 is driven through this hole 2b and terminates by contact of the sharp edge 3b thereof onto the cavity 1b being provided axially underneath hole 2b on the fixed slide base portion 1. Whilst this condition corresponds to the joint having been assembled but not tightened as shown in Fig. 2a, when as shown in Fig. 2b, by means of screw driver 14 the bolt 3 is being screwed, the force being exerted by the firm contact of the sharp edge 3b thereof onto the cavity 1b of the slide base portion 1 maintains the latter firmly in contact with the walls of the profiles being connected, whilst it produces a reactive force that pushes upwardly the sheet metal mobile portion 1 until the sharp edges 2g thereof indent the relatively softer walls of the profile members being connected, thereby achieving a robust, self aligned connection thereof, such self alignment being obtained as a result of the abovementioned indenting of

the walls of the profile members extending along a substantial length of the sharp edges 2g of the sheet metal mobile portion 1.

Fig. 2c characteristically depicts a magnified view of a detail in the process of tightening of the joint of the invention. Herein is shown that following indenting of the sharp edges 2g of the sheet metal portion 1 into the walls of corresponding chambers 13a, 13b of the profiles to be connected, further screwing of bolt 3 results in a perfect convergence of the profiles to be connected along the axis of symmetry x-x', whilst the upwardly extending sides 2e of the sheet metal portion 2 move through an infinitesimal distance a', having a length of the order of a fraction of a mm, thereby being deflected at an angle θ° relatively to the side surfaces 2d of the sheet metal mobile portion 2. Resilient stresses are thereby stored in sheet metal portion 2, uniformly applied on either side of the joint, such stresses thereby maintaining the joint in a tightened condition and the profile members rigidly connected even if an accidental slight release of bolt 3 may occur.

In accordance to an alternative embodiment of the invention, instead of opening a hole through the above cavity 2b in the sheet metal mobile portion 2, a hole is drilled through the corresponding coaxial cavity 1b of the fixed slide base portion 1 as shown in Fig. 3. The bolt 3 is then being driven from the inner junction of the profiles to be connected and sharp edge 3b thereof firmly contracts sheet metal portion 2 at cavity 2b thereof and exerts a raising force thereupon, eventually resulting in the indentation of the walls of the profiles to be connected by the sharp edges 2g of the upwardly extending sides 2e of the sheet metal mobile portion 2.

The form of the sharp edges 2g of the upwardly extending sides 2e of the sheet metal mobile portion 2 is selected so as to render an optimum indentation effect. Thus, they may for example have the toothed form

depicted in Fig. 1 or Fig. 4a and Fig. 4b or they may take the double razor edge like form of edges 20g in the upwardly extending sides 20e of an alternative embodiment of the invention depicted in Figs 5, 5a, wherein the mobile portion 2 of the joint of the invention is made from a profile of hard aluminium alloy with an upper basement 20a provided with a centrally located hole 20b and sides 20c – 20d in sliding contact with corresponding sides of the underlying slide base portion 1. A single razor edge ending of upwardly extending sides 20e of the mobile portion 20 made from hard aluminium alloy may be equally effective in the indentation of the relatively softer walls of the hollow profiles to be connected, however the double razor edge like configuration further serves the purpose of a secure sequential indentation of the walls of the profile members.

Alternatively, as shown in Fig. 5b, the upwardly extending legs 20e of the mobile portion 20 may form a recession, wherein an independent sheet metal plate 15, preferably with toothed edge configuration may be fitted to serve as an indentation means.

A further alternative embodiment is shown in Fig. 5b, wherein legs 20e may extend to a plurality of pointed pins 20g'.

Finally in Figs 6a, 6b the sheet metal portion 2 is alternatively made with side surfaces 2c ending at a bent structure of the sheet metal portion forming a recession 17 for the engagement of a wire 16, made from steel in the form of a Π section in substitution of the otherwise planar sides 2d of the sheet metal portion 2, with the legs thereof bent to upwardly extending members with sharp edges 16g playing the role of profile wall indentation elements. In this embodiment, the fixed base portion 1 may be made in two identical portions, symmetrically on either side of the plane of symmetry $x-x'$, the two identical portions being pivotally connected around a pivotal axis 60 and thereby being appropriate for the connection of hollow profiles

forming varying angles at the junction thereof. The sheet metal mobile portion 2 might under such circumstances also be adjustable to profile connections at varying angles with the pivotally mounted end portion 16 thereof.

5 The fixed slide base portion 1 of the joint of the invention may also receive alternative forms. In Fig. 4a base portion 1 is provided with elevated end walls 6 with opposing central nerves 5 that fit into recessions 4 of the sheet metal mobile portion 2. Alternatively in Fig. 4c, base portion 1 does not terminate in the abovementioned terminals 1f, but is bent upwardly
10 following a configuration similar to that of the sheet metal portion 2, so that the upwardly extending legs 2e of the latter may fit into the recessions being formed by the upwardly extending legs 1e' of the fixed slide base portion 1.

The joint configuration depicted in Fig. 4a and preferably that of Fig. 4c serves as an advantageous embodiment, wherein the sheet metal mobile
15 portion 2 fits tightly into slide base portion 1, so as to facilitate packaging of the joint and enable handling of the same as if it were a single item.

Fig. 4b shows an alternative embodiment of the base portion 1 of the invention, which is more bulky and is applicable in cases of rather wide profile connections, wherein due to the bulk of the base portion 1, it is
20 preferably made with perforations 7, in order to reduce material cost and weight of the item.

Fig. 8a depicts an alternative embodiment of the joint of the invention, wherein the sheet metal portion 2 is made in two discrete, independent parts, whilst the single item of the base portion 1 further comprises flat plate
25 extensions 1h perpendicularly located on either side near the top thereof, wherein these flat plate extensions 1h have an internally threaded hole, whilst the upper basement portion of sheet metal mobile portion 2 is substituted by a perpendicularly bent portion 2h also perforated coaxially

with the internally threaded hole of the flat plate extension 1h of the slide base portion 1, so that a bolt 3c passing through these coaxial holes with its head blocked by flat plate extension 1h and with a nut at the other end thereof at the bottom of the flat plate extension 2h of the mobile portion 1
5 serves as the means of unilaterally tightening the joint.

Whilst in other embodiments a centrally located hole being opened in two halves 11a and 11b at the upper corner (or lower corner in case of the embodiment of Fig. 3) junction of the profiles to be connected is sufficient for tightening the joint of the invention, in the case of the embodiment of Fig.
10 8a two distinct holes 11a, 11b are necessary in the corresponding chambers 13a, 13b of the profile members being connected.

Employment of the joint of the invention advantageously leads to a novel method of angular connection of hollow profile members made from aluminium, plastics or other materials that offers enhanced speed and is user
15 friendly, this method comprising the following steps:

a. Drilling of a single hole made of two halves 11a, 11b, one half in each of the hollow profile members being brought together for an angular connection, the edges of such profile members having previously being appropriately cut at an angle of half the magnitude of the angle intended by
20 their connection, e.g. being cut at an angle of 45° when the angle intended by their connection is 90° .

b. Inserting the previously assembled joint with a central bolt 3 passing through the upper sheet metal mobile portion 2 and stopping at the underlying base portion 1, through the opening 12a of a chamber 13a of a
25 first one of the pair of hollow profile members to be connected, wherein half of the joint is introduced in this first one of the pair of profile members.

c. Bringing the chamber 13b of the second one of the pair of hollow profile members to be connected in a position wherein the protruding

half of the joint is slidably inserted therein, thereby obtaining an accurate coincidence of the previously cut edges of the hollow profile members to be connected and further obtaining the centrally located angular hole 11a, b by coincidence of the two halves 11a, 11b.

- 5 d. Employment of a key 14 passing through the angular hole 11a, b and rotation by means of the same of the bolt 3 lying coaxially along the plane of connection of the two hollow profile members that have been connected, until the sharp edges of the upwardly extending sides of the sheet metal portion 2 indent the walls of chambers 13a, 13b thereby leading to a
10 rigid, aligned and angular connection of the abovementioned hollow profile members.

CLAIMS

1. Joint for the angular connection of hollow profile members intended to form door/window profile frames and the like, wherein the edges of the hollow profile members have been previously cut at an angle such as to obtain a matching contact following the assembly thereof, the joint comprising a slide base portion (1) and a sheet metal mobile portion (2), a bolt (3) being employed in the tightening process of the joint, **characterized by** said slide base portion (1) having an upper flat basement (1a) with a centrally located cavity (1b) with sides symmetrically extending on either side of said flat basement (1a), each one of said sides having outer planar surfaces (1e) in sliding contact with a wall of each one of a pair of chambers (13a,13b) of the hollow profile members being brought together for connection and inner surfaces comprising a first planar section (1c), said planar section (1c) being oriented substantially parallel to said wall of chambers (13a,b) whereupon said outer planar surfaces (1e) are seated and subsequently extending into a second convergent portion (1d) terminating at a terminal edge (1f) and by said sheet metal mobile portion (2) having a similar configuration with an upper flat basement (2a) with a centrally located cavity (2b) with sides symmetrically extending on either side of said flat basement (2a), each one of said sides comprising planar side surfaces (2c) and (2d), each with a length generally equivalent to the length of underlying said surfaces (1c,1d) of said slide base portion (1), wherein at a terminal end (2f) of said side surfaces (2c,2d) said sheet metal mobile portion (2) is bent to upwardly extending sides (2e) on either side thereof terminating at sharp edges (2g), said sharp edges (2g) being adapted to produce an indentation effect into the walls of chambers (13a,13b) when the joint is being tightened, wherein said sheet metal mobile portion (2) is superimposed onto said slide base portion (1) so that said flat basement (2a)

is oriented parallel above said underlying flat basement (1a) in a direction perpendicular to a plane of symmetry $x-x'$ passing through the plane of matching contact of the previously cut edges of said hollow profile members being brought together for connection, said side surfaces (1c,1d) of the base portion (1) and overlying side surfaces (2c,2d) of said sheet metal mobile portion (2) being symmetrically arranged on either side of said plane of symmetry $x-x'$ and said upwardly extending sides (2e) of said sheet metal portion (2) being oriented in a direction substantially parallel to the plane of symmetry $x-x'$, wherein said bolt (3) passing through a hole (11a,b) lying at said plane of symmetry $x-x'$ when being screwed exerts an upwardly pushing force onto said sheet metal mobile portion (1) until said sharp edges (2g) thereof indent the relatively softer walls of the profile members being connected, thereby resulting in a robust, self aligned connection thereof.

2. Joint for the angular connection of hollow profile members as claimed in above claim 1, characterized by that said hole (11a,b) lying at said plane of symmetry $x-x'$ is made up by two identical halves, one half (11a) being drilled at said chamber (13a) of one of said hollow profile members and the other half (11b) being drilled at said chamber (13b) of the other of said hollow profile members being brought together for connection, said one half (11a) matching said other half (11b) along said plane of matching contact of the profiles, said two halves (11a) and (11b) forming an angle equivalent to the angle at which said hollow profile members are being connected.

3. Joint for the angular connection of hollow profile members as claimed in above claim 1, characterized by that said sharp edges (2g) of said sheet metal mobile portion producing the indentation effect may alternatively take the form of an arrangement of tooth or pointed pin protrusions or razor edge like sharp surfaces made from material harder than the material of the walls of said chambers (13a,13b) of the hollow profile members being

connected, said arrangement of tooth or pointed pin protrusions or razor edge like sharp surfaces taking the form of a single acting indentation effective surface or constituted by a pair of adjacent acting indentation effective surfaces, said surfaces coming sequentially in contact with the walls of said chambers (13a,13b) of the hollow profile members being connected.

4. Joint for the angular connection of hollow profile members as claimed in above claim 3, characterized by that said sharp edges (2g) of said sheet metal mobile portion (2) producing the indentation effect alternatively taking the form of an arrangement of single or double tooth or pointed pin protrusions or razor edge like sharp surfaces made from material harder than the material of the walls of said chambers (13a,13b) of the hollow profile members being connected are included in an independent plate item (15), said plate item (15) being introduced into a recession being formed at the terminals of said upwardly extending sides (2e) of said sheet metal portion (2).

5. Joint for the angular connection of hollow profile members as claimed in above claim 1, characterized by that said side surfaces (2c) of said sheet metal mobile portion (2) end at a bent structure of the sheet metal portion (2) thereby forming a recession (17) for the engagement of a pivotally mounted wire (16) made from steel, said pivotally mounted wire (16) having the form of a Π section with the legs thereof bent to upwardly extending members with sharp edges (16g) producing the profile wall indentation effect and by that said slide base portion (1) being made in two identical portions, symmetrically on either side of said plane of symmetry $x-x'$, said two identical portions being pivotally connected around a pivotal axis (60) thereby being appropriate for the connection of hollow profiles forming varying angles at the junction thereof and said sheet metal mobile

portion (2) being also adjustable to profile connections at varying angles by movement of said pivotally mounted end portion (16) thereof.

6. Joint for the angular connection of hollow profile members as claimed in above claim 1, characterized by that said slide base portion (1) further includes upwardly bent legs (1e') extending from said terminals (1f) thereof and following a configuration similar to said upwardly extending legs (2e) of said sheet metal portion (1), so as to form recessions allowing tight fitting therein of said upwardly extending legs (2e) of said sheet metal portion (1) and provide packaging and handling of said joint as if it were a single item.

7. Joint for the angular connection of hollow profile members as claimed in above claim 1, characterized by that said bolt (3) passing through a hole (11a,b) lying at said plane of symmetry $x-x'$ and exerting when being screwed an upwardly pushing force onto said sheet metal mobile portion (1) until said sharp edges (2g) thereof indent the relatively softer walls of the profile members being connected, passes through an internally threaded hole at said centrally located cavity (2b) of said sheet metal mobile portion (2) and subsequently stops by contact of a sharp edge (3b) thereof onto the coaxially underlying said cavity (1b) of said base portion (1), wherein said upwardly pushing force exerted onto said sheet metal mobile portion (1) is a reaction to the force being exerted onto said cavity (1b) of said base portion (1).

8. Joint for the angular connection of hollow profile members as claimed in above claim 7, characterized by that said internally threaded hole at said centrally located cavity (2b) of said sheet metal mobile portion (2) is being formed by either expansion of the sheet metal at said cavity (2b) into a cylindrical collar (19) that is subsequently internally threaded or by the alternative addition, onto said basement (2a), of either an independent plate (18) having a planar surface (18a) with dimensions such as to fit onto said

basement (2a) of the sheet metal portion (2) and a central hole (18b) that is internally threaded and coincides with a hole being opened at said centrally located cavity (2b) on said basement (2a) when plate (18) is brought in contact with basement (2a) or of an internally threaded cylindrical collar (48) with a body portion (48a) and a central hole (48b) coinciding with said hole being opened at said centrally located cavity (2b) on said basement (2a) of the sheet metal portion (2).

9. Joint for the angular connection of hollow profile members as claimed in above claim 1, characterized by that said bolt (3) passing through a hole (11a,b) lying at said plane of symmetry $x-x'$ and exerting when being screwed an upwardly pushing force onto said sheet metal mobile portion (1) until said sharp edges (2g) thereof indent the relatively softer walls of the profile members being connected, passes through an internally threaded hole at said centrally located cavity (1b) of said slide base portion (1) and subsequently stops by contact of a sharp edge (3b) thereof onto the coaxially overlying said cavity (2b) of said sheet metal mobile portion (2), wherein said upwardly pushing force exerted onto said sheet metal mobile portion (1) is the force being exerted onto said cavity (2b) of said sheet metal portion (1).

10. Method of angular connection of hollow profile members intended to form door/window profile frames and the like, wherein the edges of the hollow profile members have been previously cut at an angle such as to obtain a matching contact following the assembly thereof, comprising the following steps:

a. Drilling of a single hole (11a,b) made of two halves (11a), (11b), one half in each of the hollow profile members being brought together for an angular connection, the edges of said profile members having previously

being appropriately cut at an angle of half the magnitude of the angle intended by their connection,

b. inserting a joint previously assembled joint with a central bolt (3) passing through an upper sheet metal mobile portion (2) and stopping at an underlying base portion (1) thereof, through an opening (12a) of a chamber (13a) of a first one of the pair of hollow profile members to be connected, wherein half of the joint is introduced in this first one of the pair of profile members,

c. bringing a chamber (13b) of the second one of the pair of hollow profile members to be connected in a position wherein the protruding half of the joint is slidably inserted therein, thereby obtaining an accurate coincidence of the previously cut edges of the hollow profile members to be connected and further obtaining said centrally located single angular hole (11a,b) by coincidence of the two halves (11a, 11b),

d. employment of a key (14) passing through said single angular hole (11a,b) and rotation by means of the same of said bolt (3) lying coaxially along the plane of connection of the two hollow profile members that have been connected, until the sharp edges of upwardly extending sides of the sheet metal portion (2) indent the walls of said chambers (13a,13b) thereby leading to a rigid, aligned and angular connection of said hollow profile members.

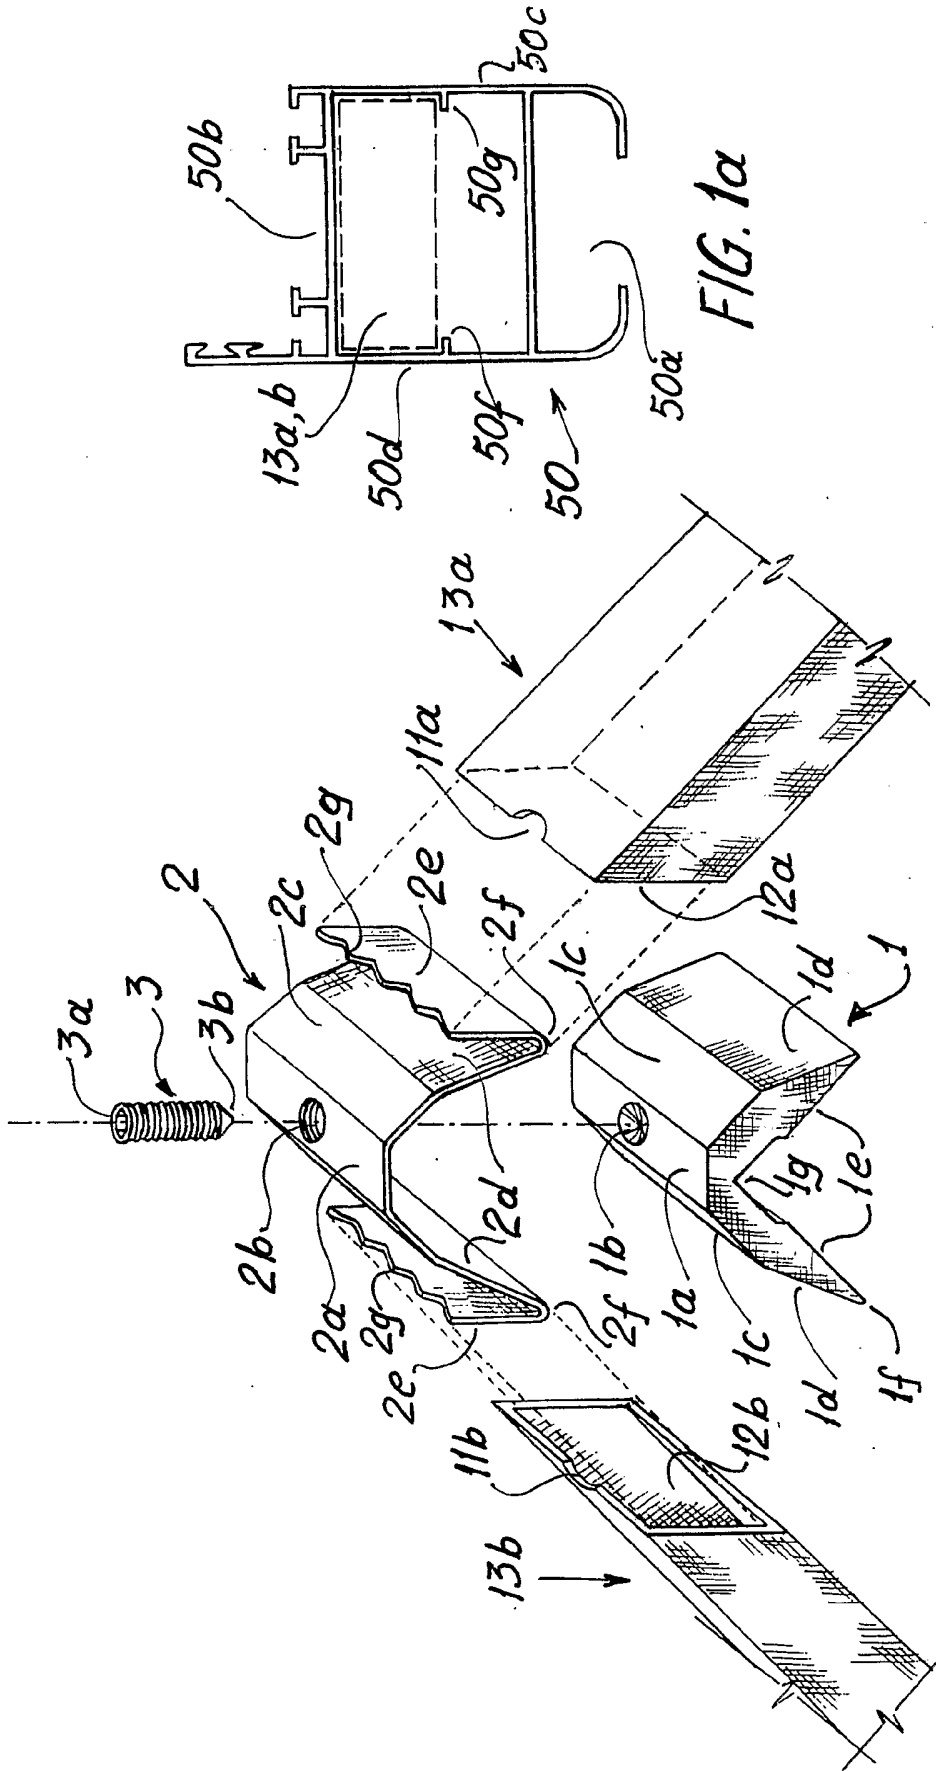


FIG. 1

FIG. 1a

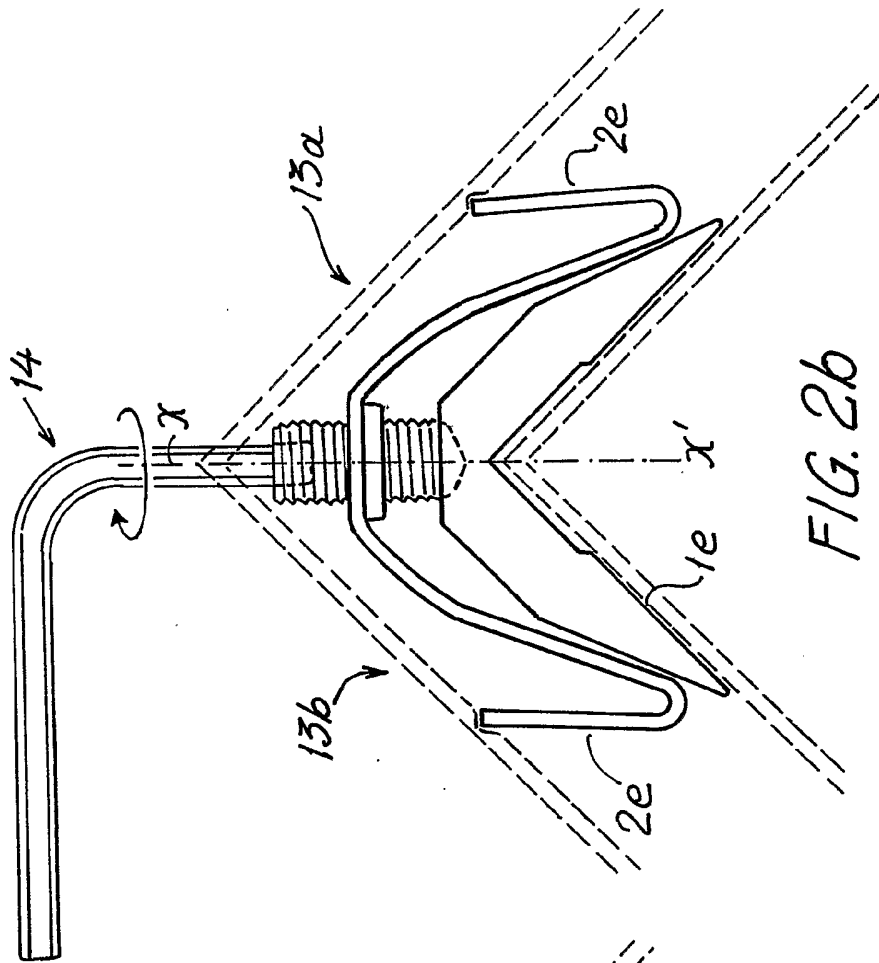


FIG. 2b

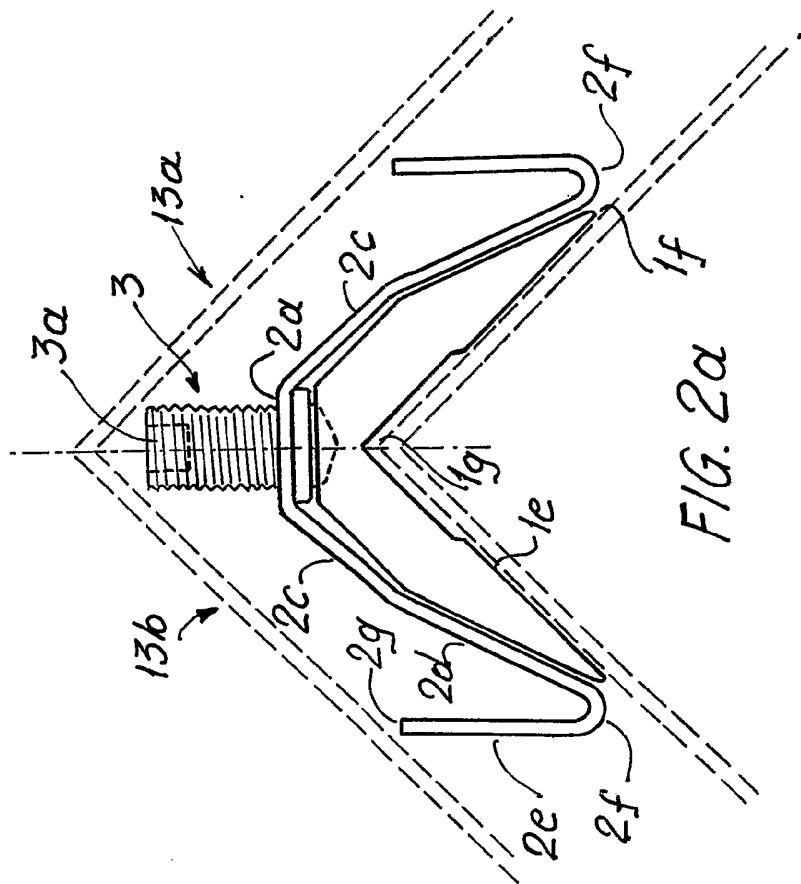


FIG. 2a

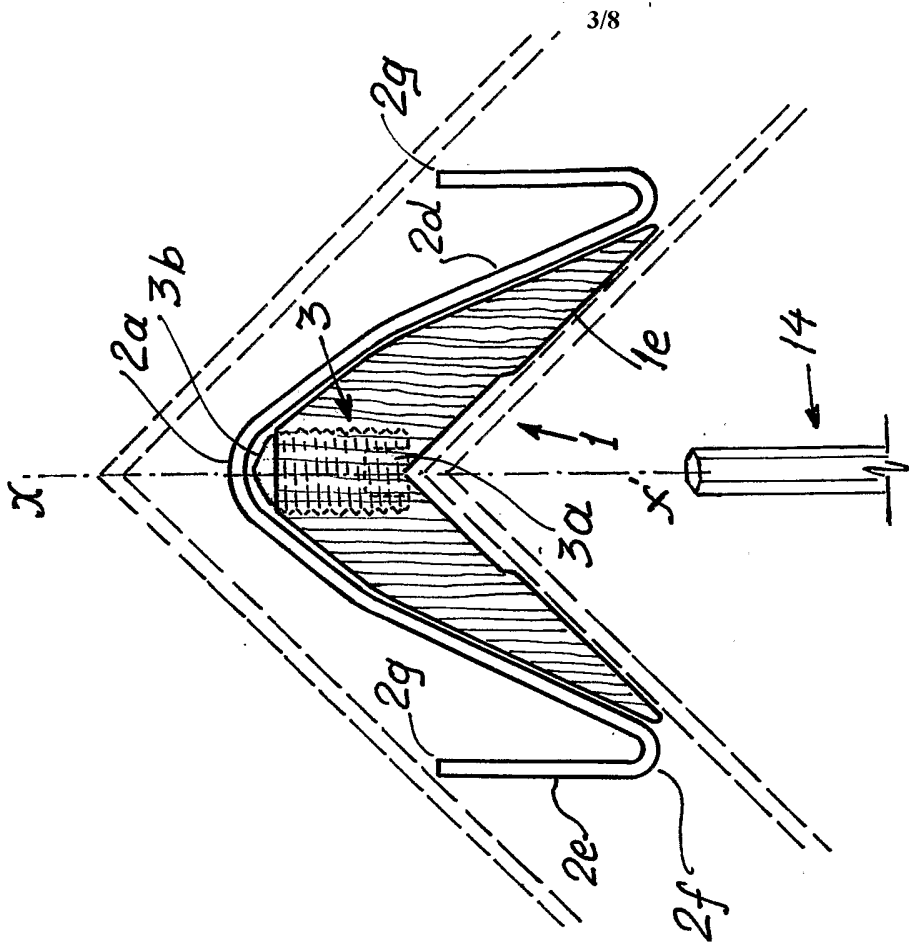


FIG. 3

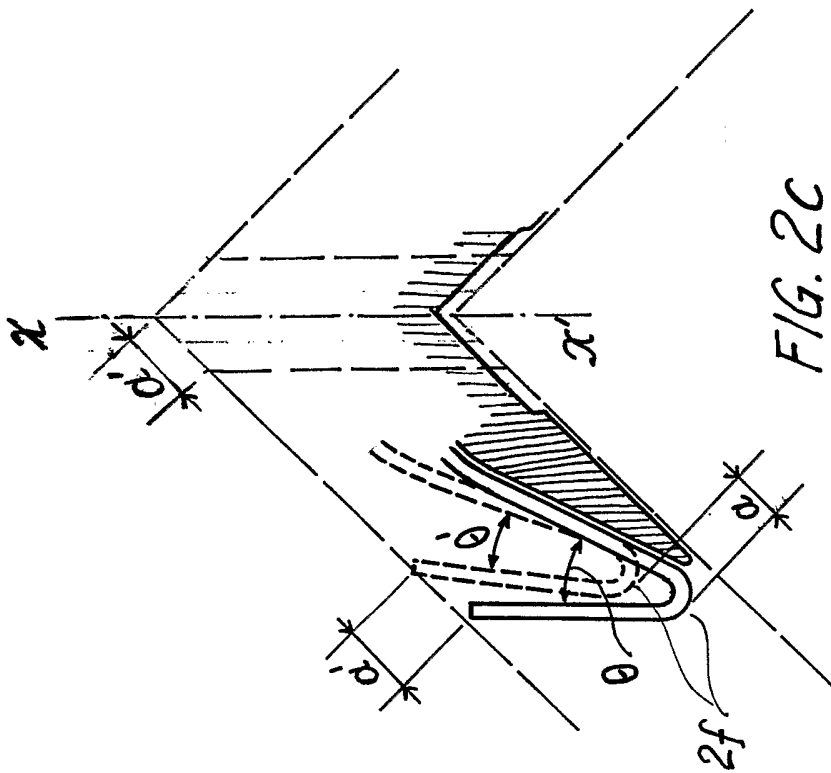
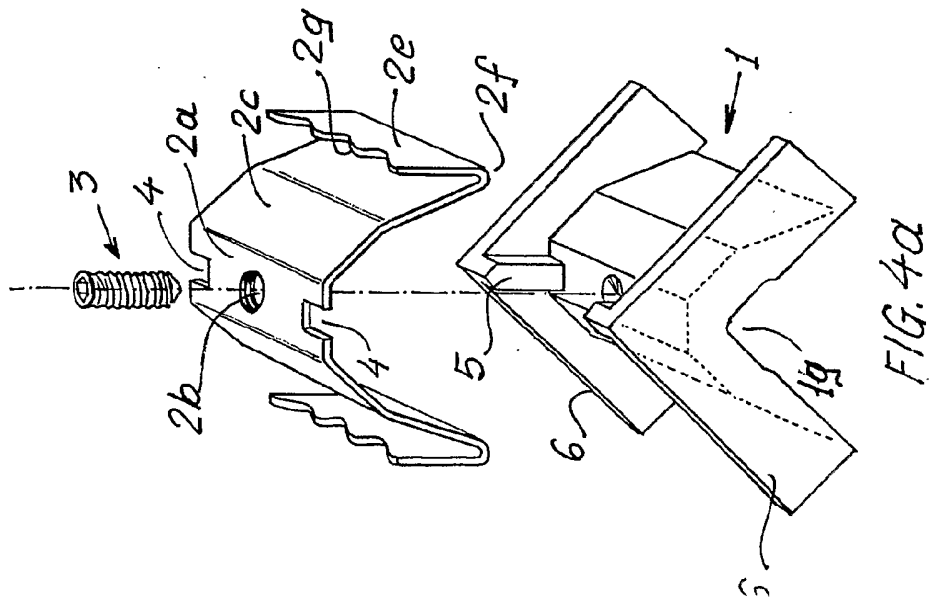
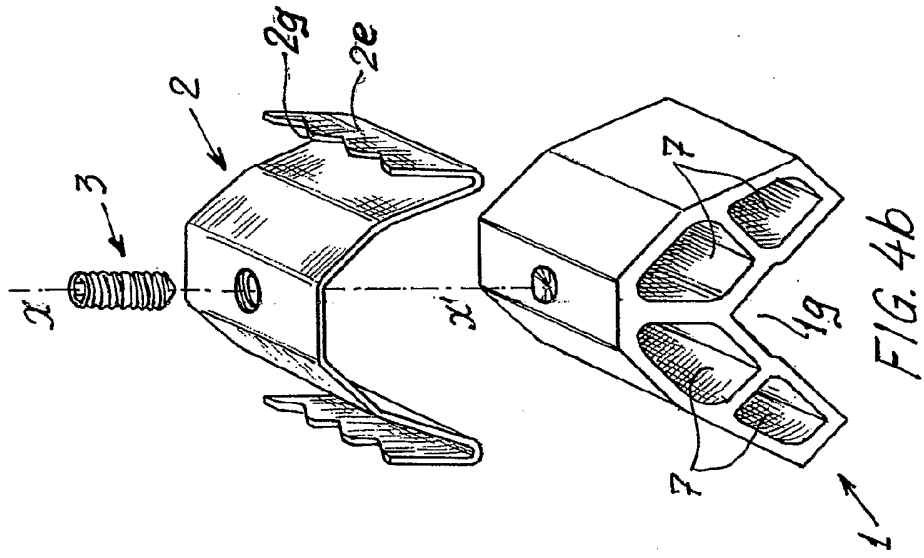
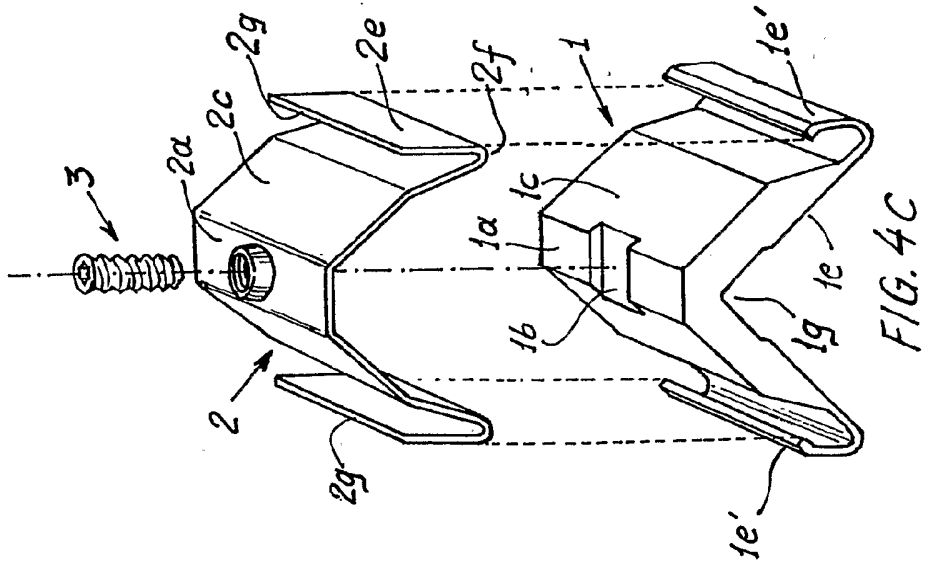
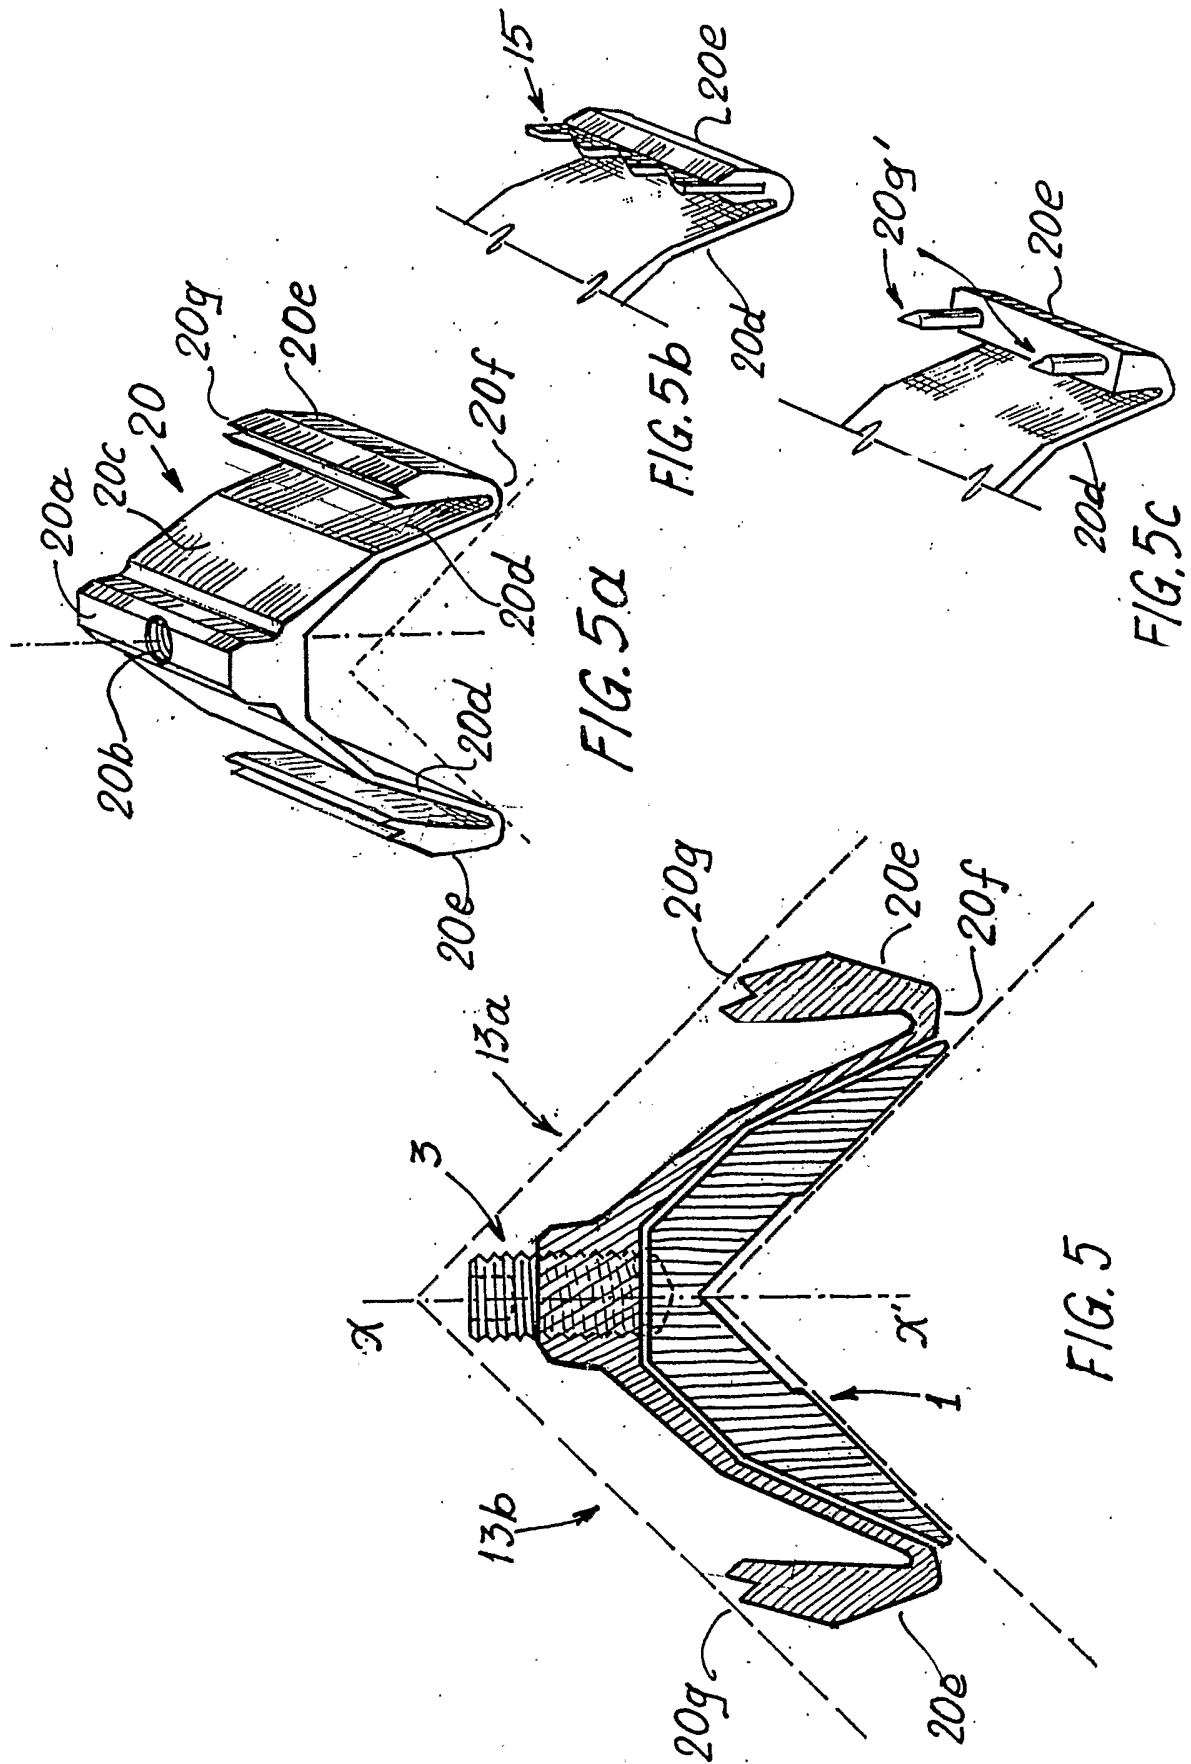


FIG. 2C





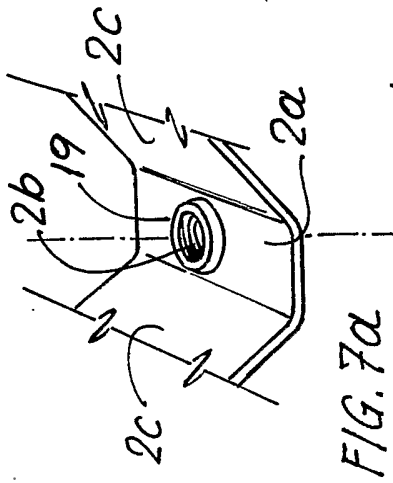


FIG. 7a

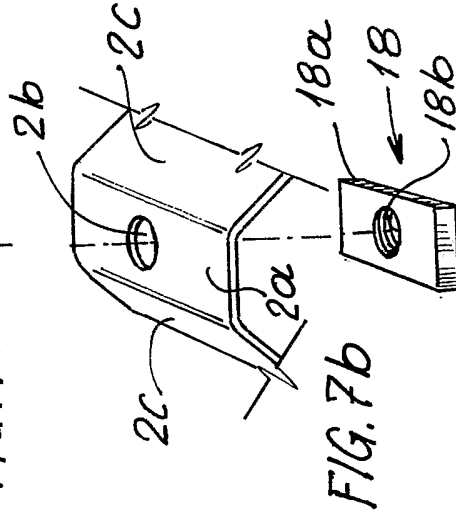


FIG. 7b

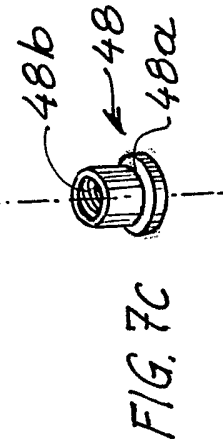


FIG. 7c

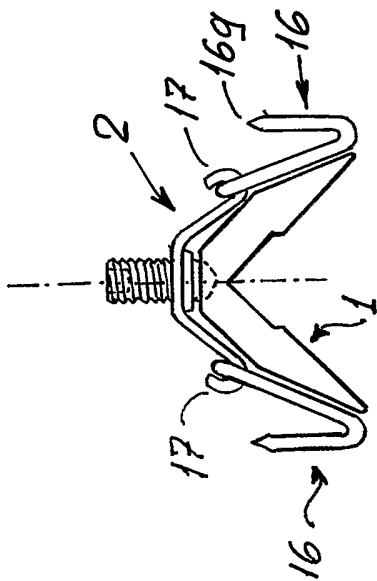


FIG. 6b

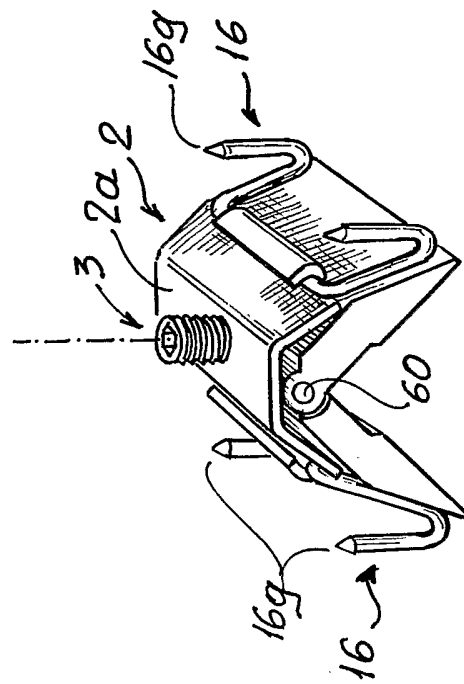


FIG. 6a

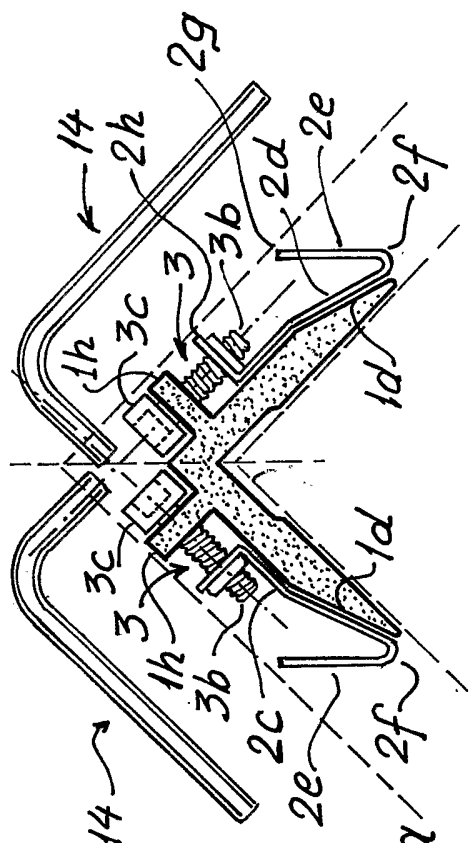


FIG. 8a


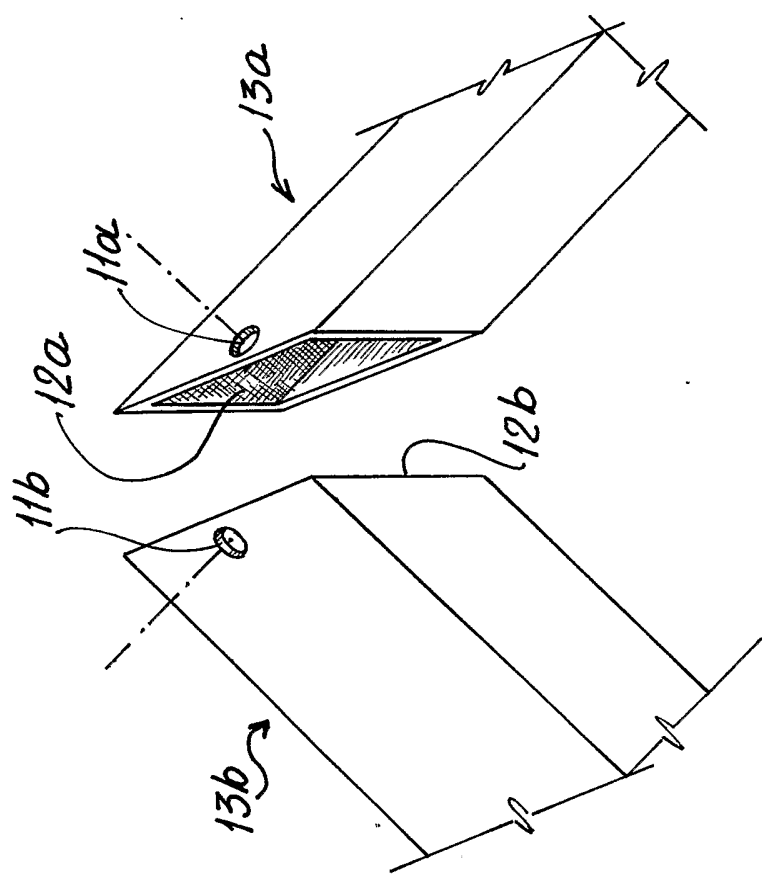


FIG. 8b

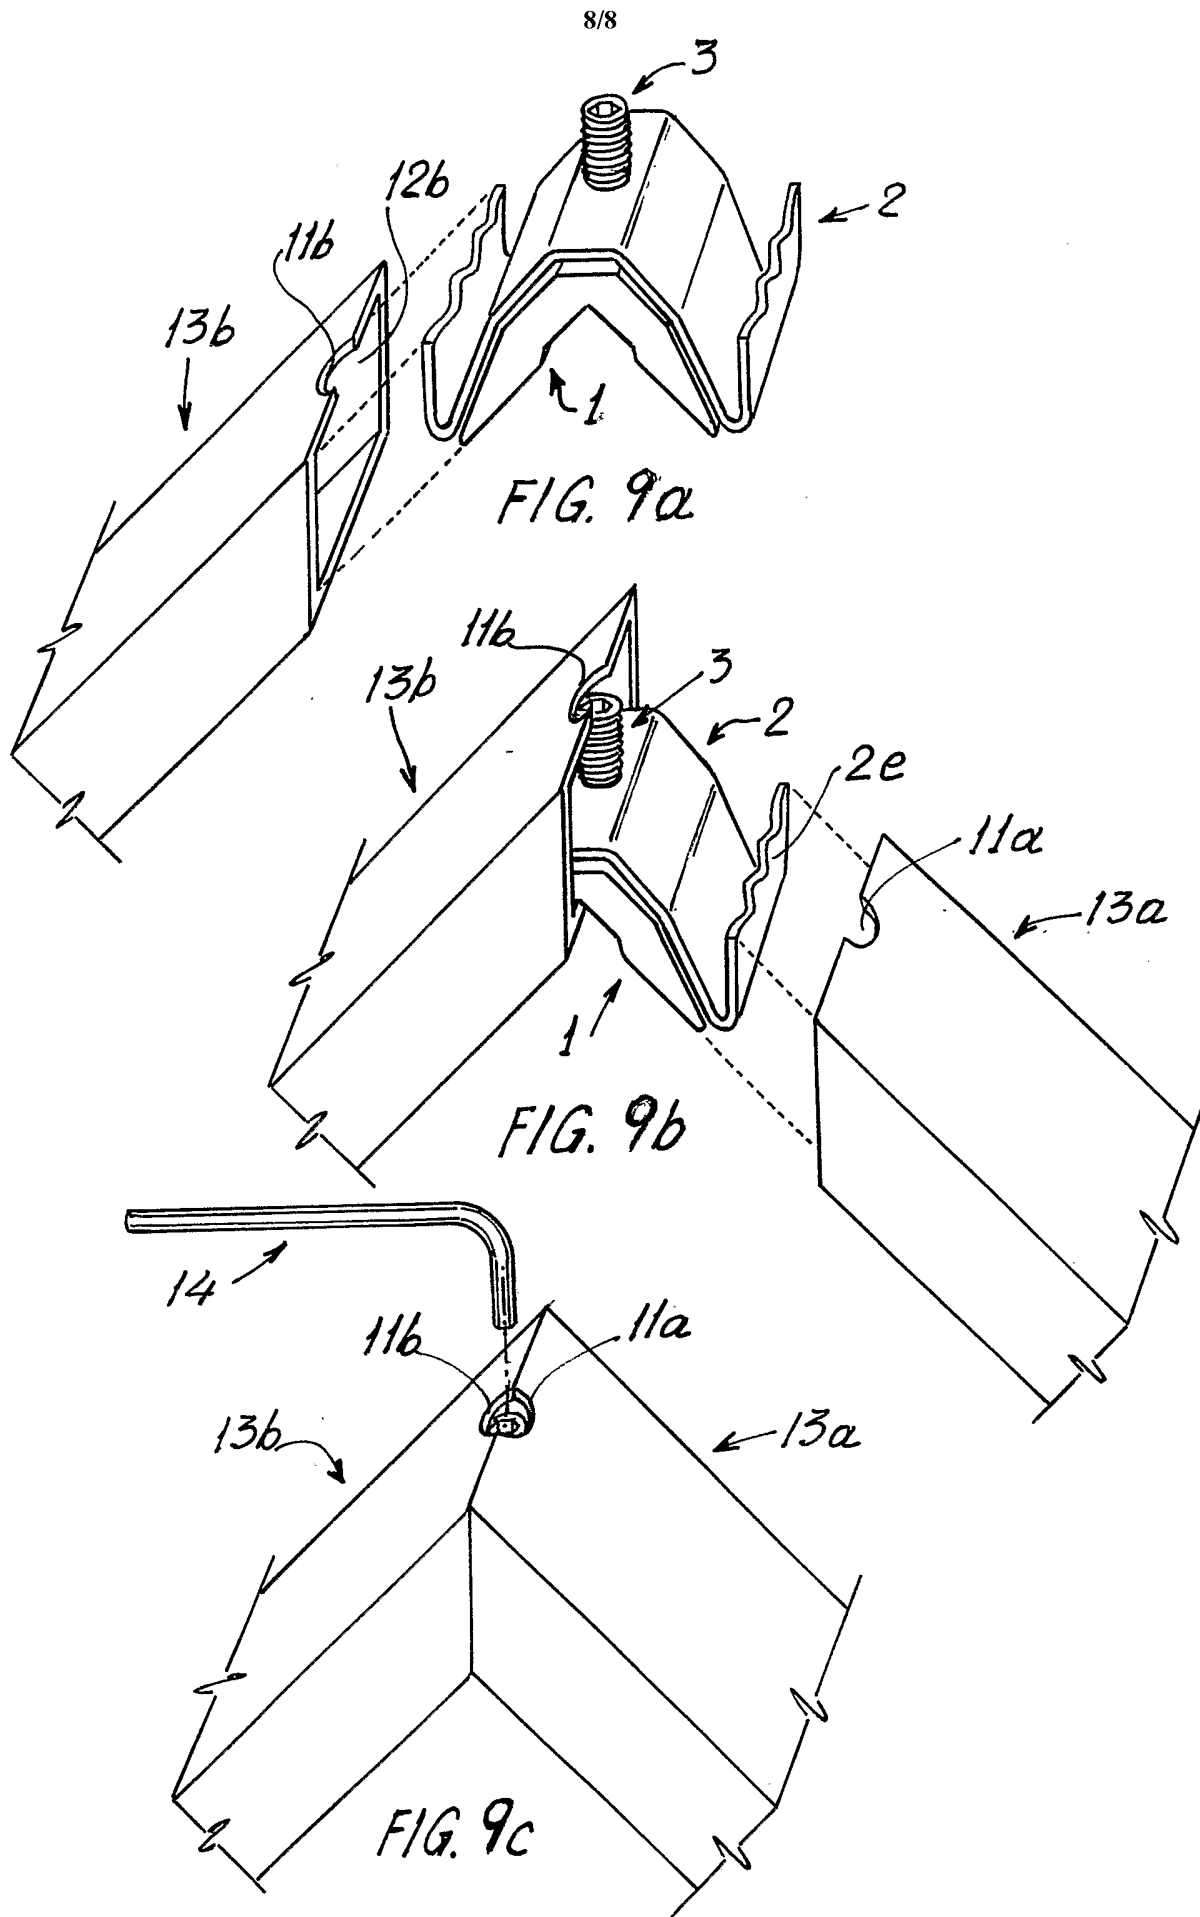

INTERNATIONAL SEARCH REPORT

Internationa Application No
PCT/GR 03/00044

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E06B3/98

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 E06B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 2 072 296 A (ANGLIAN WINDOWS LTD) 30 September 1981 (1981-09-30) page 1, line 33 -page 3, line 21; figures ---	1-3,7,8, 10
Y	US 5 109 645 A (BUCCI CARLO G) 5 May 1992 (1992-05-05) column 2, line 40 - line 54 column 3, line 30 -column 4, line 5 figures 1-10 ---	1-3,7,8, 10
A	DE 37 26 594 A (ERBSLOEH JULIUS & AUGUST) 23 February 1989 (1989-02-23) column 2, line 15 - line 31 column 2, line 47 -column 3, line 23 column 5, line 23 - line 38 figure 4 --- -/--	1,3

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

14 January 2004

20/01/2004

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Depoorter, F

INTERNATIONAL SEARCH REPORT

Internatio	lication No
PCT/GR	03/00044

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 644 312 A (ALUMIX SPA) 22 March 1995 (1995-03-22) cited in the application the whole document ----	1,2,6,8, 10
A	US 3 848 390 A (ANDERSON W ET AL) 19 November 1974 (1974-11-19) the whole document ----	1,9,10
A	EP 0 100 733 A (TECHNAL FRANCE) 15 February 1984 (1984-02-15) page 4, line 14 -page 6, line 36; figures ----	1,2,5, 7-10
A	EP 1 054 133 A (SKS STAKUSIT BAUTECHNIK GMBH) 22 November 2000 (2000-11-22) column 3, line 32 - line 48; figures ----	3,4
A	US 3 163 264 A (LOUIS GONDRY) 29 December 1964 (1964-12-29) column 2, line 4 - line 9 column 2, line 65 -column 3, line 33 figures 3-5 -----	3,5

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat pplication No

PCT/GR 03/00044

Patent document cited in search report	A	Publication date	Patent family member(s)	Publication date
GB 2072296	A	30-09-1981	NONE	
US 5109645	A	05-05-1992	US 4987709 A	29-01-1991
DE 3726594	A	23-02-1989	DE 3726594 A1	23-02-1989
EP 0644312	A	22-03-1995	IT MI930723 U1 IT MI930723 V0 EP 0644312 A2	17-03-1995 17-09-1993 22-03-1995
US 3848390	A	19-11-1974	NONE	
EP 0100733	A	15-02-1984	FR 2531183 A1 DE 3370848 D1 EG 15511 A EP 0100733 A1 ES 282178 U GR 79347 A1 OA 7514 A PT 77140 A , B	03-02-1984 14-05-1987 30-12-1990 15-02-1984 01-04-1985 22-10-1984 31-03-1985 01-09-1983
EP 1054133	A	22-11-2000	DE 29908641 U1 EP 1054133 A1	26-08-1999 22-11-2000
US 3163264	A	29-12-1964	NONE	