



Office de la Propriété

Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2263150 C 2005/06/21

(11)(21) 2 263 150

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(86) Date de dépôt PCT/PCT Filing Date: 1997/07/30
(87) Date publication PCT/PCT Publication Date: 1998/02/19
(45) Date de délivrance/Issue Date: 2005/06/21
(85) Entrée phase nationale/National Entry: 1999/02/11
(86) N° demande PCT/PCT Application No.: US 1997/013451
(87) N° publication PCT/PCT Publication No.: 1998/007173
(30) Priorités/Priorities: 1996/08/12 (60/024,001) US;
1997/01/23 (08/789,319) US

(51) Cl.Int.⁶/Int.Cl.⁶ H01J 1/62


(72) Inventeurs/Inventors:
GU, GONG, US;
BURROWS, PAUL, US;
FORREST, STEPHEN R., US

(73) Propriétaire/Owner:
THE TRUSTEES OF PRINCETON UNIVERSITY, US

(74) Agent: SMART & BIGGAR

(54) Titre : DISPOSITIF ELECTROLUMINESCENT ORGANIQUE SOUPLE NON POLYMERÉ

(54) Title: NON-POLYMERIC FLEXIBLE ORGANIC LIGHT EMITTING DEVICE

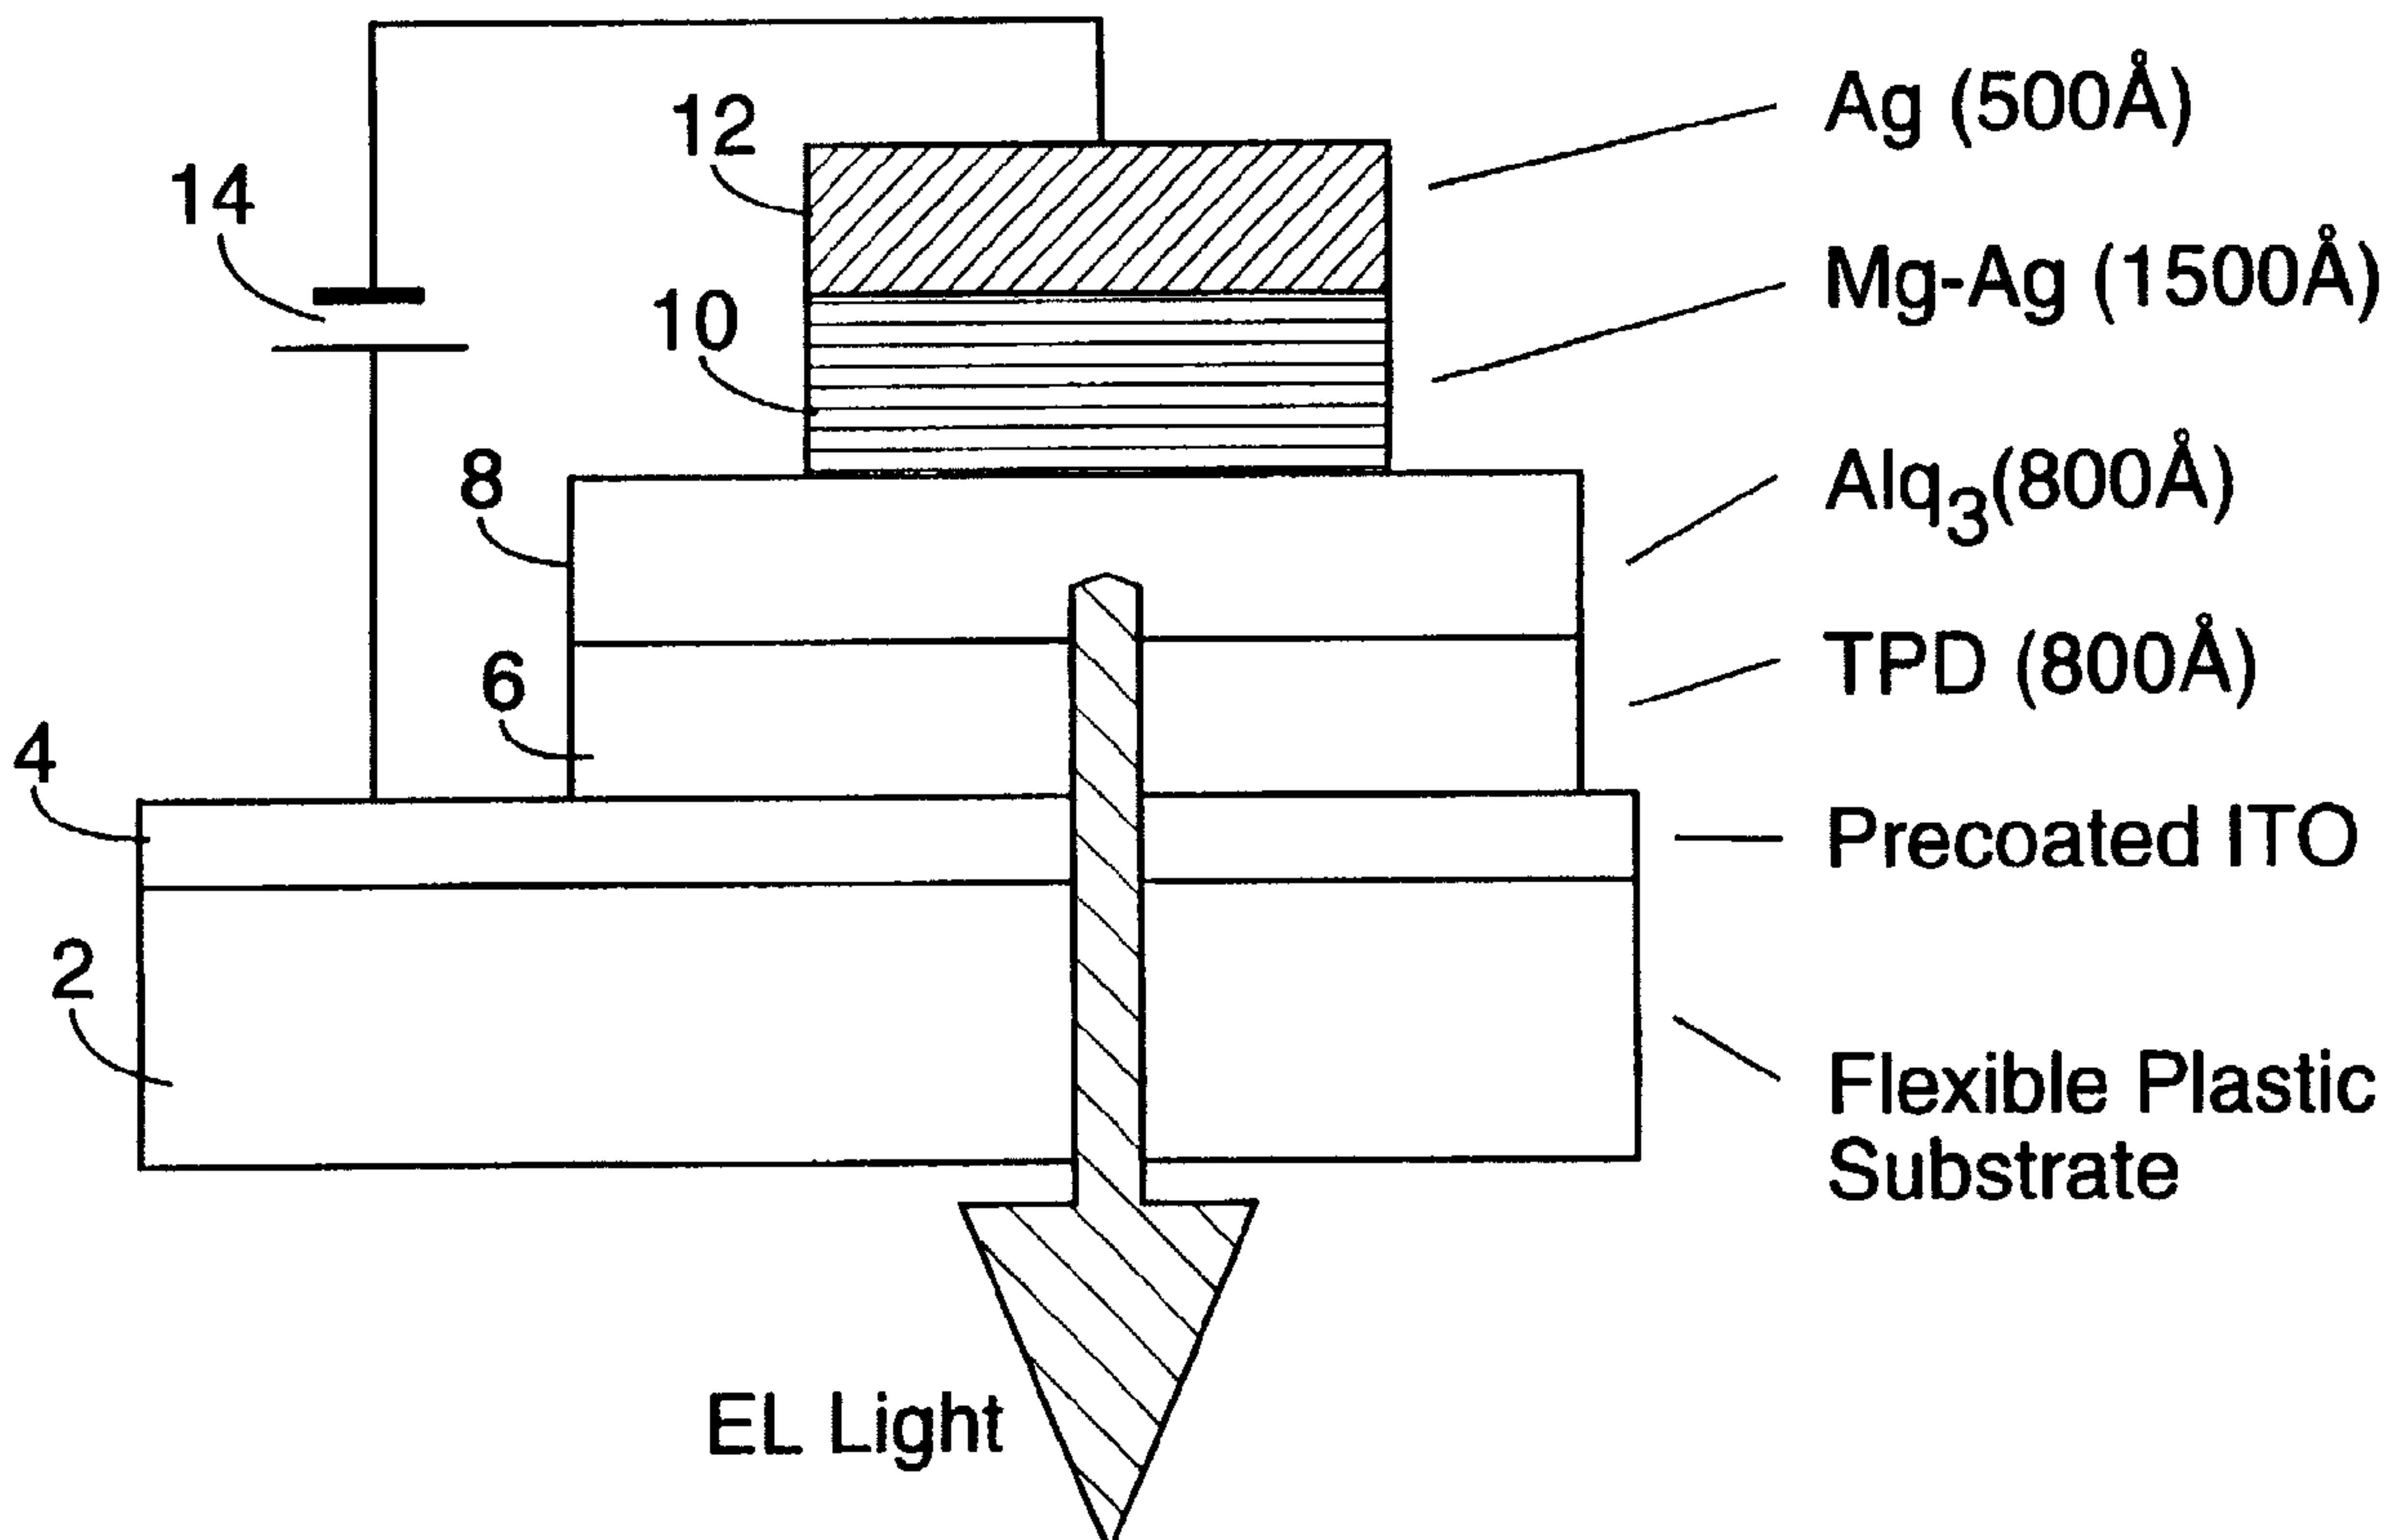

(57) Abrégé/Abstract:

An organic light emitting device (OLED) is disclosed for which the hole transporting layer, the electron transporting layer and/or the emissive layer, if separately present, is comprised of a non-polymeric material. A method for preparing such OLED's using vacuum deposition techniques is further disclosed.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01J 1/62		A1	(11) International Publication Number: WO 98/07173
(21) International Application Number: PCT/US97/13451		(43) International Publication Date: 19 February 1998 (19.02.98)	
(22) International Filing Date: 30 July 1997 (30.07.97)			
(30) Priority Data: 60/024,001 12 August 1996 (12.08.96) US 08/789,319 23 January 1997 (23.01.97) US		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(71) Applicant: THE TRUSTEES OF PRINCETON UNIVERSITY [US/US]; P.O. Box 36, Princeton, NJ 08544 (US).		Published <i>With international search report.</i>	
(72) Inventors: GU, Gong; 24E King Street, Princeton, NJ 08540 (US). BURROWS, Paul; 413 Clarksville Road, Princeton Junction, NJ 08550 (US). FORREST, Stephen, R.; 148 Hunt Drive, Princeton, NJ 08540 (US).			
(74) Agents: MEAGHER, Thomas, F. et al.; Kenyon & Kenyon, 1 Broadway, New York, NY 10004 (US).			

(54) Title: NON-POLYMERIC FLEXIBLE ORGANIC LIGHT EMITTING DEVICE

(57) Abstract

An organic light emitting device (OLED) is disclosed for which the hole transporting layer, the electron transporting layer and/or the emissive layer, if separately present, is comprised of a non-polymeric material. A method for preparing such OLED's using vacuum deposition techniques is further disclosed.

61293-423

5

NON-POLYMERIC FLEXIBLE ORGANIC LIGHT EMITTING DEVICE**FIELD OF THE INVENTION**

15 The subject invention is directed to flexible organic light emitting devices (OLED's) including a hole transporting layer and/or an electron transporting layer comprised of a vacuum-deposited, non-polymeric material.

BACKGROUND OF THE INVENTION

20 In one type of electrically controlled light emitting device, organic material is placed between a layer of conductive material that can inject electrons and a layer of conductive material that can inject holes. When a voltage of proper polarity is applied between the outer layers of conductive material, electrons from one layer combine with holes from the other so as to release energy as light that is, to produce 25 electroluminescence (EL). These devices are referred to as organic light emitting devices, OLED's.

30 OLED's have been constructed from polymers so as to have a highly advantageous flexibility that enables them to be used for light weight, portable, roll-up displays or to be used for conformable displays which can be readily attached to windows, windshields or instrument panels that may have curved 35 surfaces; "The Plastic LED: A Flexible Light-Emitting Device Using a Polyaniline Transparent Electrode" by G. Gustafsson et al in "Synthetic Metals", 55-57 4123-4227 (1993). Even though there is a widespread application of vacuum-deposited, small-

molecule-based heterostructural OLED's, which have been constructed on inflexible glass substrates and use ITO as the hole emitting layer, the devices of Gustafsson were fabricated using a polymer, that is, soluble semiconducting polymer poly(2-methoxy,5-(2'-ethyl-hexoxy)-1,4-phenylene-vinylene) (MEH-PPV) as the emissive layer, since the mechanical properties of polymers were deemed to be unique with respect to making such devices.

10 It would be desirable if flexible OLED's could be fabricated having improved electroluminescent properties as well as the advantage of being readily fabricated using the vacuum deposition techniques typically used for preparing OLED's.

15 SUMMARY OF THE INVENTION

In accordance with this invention, a flexible OLED using small molecule based heterostructure of organic material is provided in which the hole transporting layer, the electron transporting layer, and/or the emissive layer, if separately present, includes a non-polymeric material, that is, a layer comprised of small molecules.

25 The term "small molecules" is used herein to refer to molecules which are small in the sense that such molecules are not made up of a plurality of repeating molecular units such as are present in a polymeric material. Thus, for purposes of this invention, the term "small molecule" is intended to be used interchangeably with the term "non-polymeric." In fact, the term "small molecules" may embrace relatively large molecules such as are typically used in the hole transporting layer, the electron transporting layer and/or the emissive layer that is present in an OLED.

30 The subject invention is further directed to a method of fabricating flexible OLED's wherein the hole transporting layer, the electron transporting layer and/or the emissive

61293-423

layer, if present, may be prepared using vacuum deposition techniques, rather than using the less convenient fabrication technique such as employed by Gustafsson et al, that is, rather than spin coating a layer of polymer, such 5 as polyaniline onto the flexible substrate. Such vacuum deposition methods are particularly suitable for use in fabricating the OLED's of the subject invention since the other layers of the OLED are also typically prepared using vacuum deposition techniques. Integration of all the vacuum 10 deposition steps into a single overall sequence of steps for fabricating the OLED, without requiring the use of solvents or removing the air sensitive layers from a vacuum chamber and exposing them to ambient conditions provides an additional especially beneficial advantage. Thus, the 15 subject invention is directed to a method, wherein the hole transporting, electron transporting, and/or separate emissive layer, if present, may be prepared using vacuum deposition steps.

In accordance with the present invention, there is 20 provided a method of preparing a flexible organic light emitting device comprising: providing a flexible substrate having thereon a first electrode, the first electrode comprising indium tin oxide having a surface roughness that does not exceed about 3.6 nm; depositing a layer of organic 25 non-polymeric material over the first electrode; depositing a second electrode over the layer of organic non-polymeric material.

In accordance with the present invention, there is also provided a method of preparing a flexible organic light 30 emitting device comprising: providing a flexible substrate coated with an indium tin oxide layer, wherein the indium tin oxide layer has a surface roughness that does not exceed

61293-423

about 3.6 nm; fabricating the organic light emitting device on the flexible substrate, wherein fabrication of the organic light emitting device includes the step of vacuum depositing a layer of non-polymeric organic material over 5 the indium tin oxide layer.

In accordance with the present invention, there is also provided a method of fabricating a flexible organic light emitting device comprising: providing a flexible substrate coated with an indium tin oxide layer, wherein the 10 indium tin oxide layer has a surface roughness that does not exceed about 3.6 nm; depositing a layer consisting essentially of non-polymeric organic material over the indium tin oxide layer; and depositing an electrode layer over the layer consisting essentially of non-polymeric 15 organic material over the indium tin oxide layer.

In accordance with the present invention, there is also provided a method of fabricating a flexible organic light emitting device comprising: providing a flexible polyester substrate coated with an indium tin oxide layer, 20 wherein the indium tin oxide layer has a surface roughness that does not exceed about 3.6 nm; depositing a layer of N,N'-diphenyl-N,N'-bis(3-methylphenyl)1-1'biphenyl-4,4'diamine over the indium tin oxide anode layer; depositing a layer of tris-(8-hydroxyquinoline) aluminum 25 over the N,N'-diphenyl-N,N'-bis(3-methylphenyl)1-1'biphenyl-4,4'diamine layer; and depositing a metal layer over the tris-(8-hydroxyquinoline) aluminum layer.

In accordance with the present invention, there is also provided a method of preparing a flexible organic light 30 emitting device comprising: providing a flexible substrate coated with an indium tin oxide layer; fabricating the

61293-423

organic light emitting device on the flexible substrate, wherein fabrication of the organic light emitting device includes the step of vacuum depositing a hole transporting layer comprised of non-polymeric organic material over the 5 indium tin oxide layer; wherein the indium tin oxide layer is sufficiently uniform such that bending of the device does not appreciably change either the current-voltage or the light-current characteristics of the device relative to the current-voltage or light-current characteristics of the 10 device prior to bending.

In accordance with the present invention, there is also provided a method of fabricating a flexible organic light emitting device comprising: providing a flexible substrate coated with an indium tin oxide layer; depositing 15 a hole transporting layer consisting essentially of non-polymeric organic material over the indium tin oxide layer; depositing an electron transporting layer consisting essentially of non-polymeric organic material over the hole transporting layer; and depositing a cathode layer over the 20 electron transporting layer; the indium tin oxide layer being sufficiently uniform such that bending of the device does not appreciably change either the current-voltage or the light-current characteristics of the device relative to the current-voltage or light-current characteristics of the 25 device prior to bending.

In accordance with the present invention, there is also provided a flexible organic light emitting device, comprising: a flexible substrate; a first electrode comprising an ITO film disposed over the flexible substrate, 30 the ITO having a surface roughness that does not exceed about 3.6 nm; a first organic layer comprising a non-polymeric organic layer disposed over the first electrode; a

61293-423

second electrode disposed over the first non-polymeric organic material.

In accordance with the present invention, there is also provided a flexible organic light emitting device, 5 comprising: a flexible substrate; a first electrode comprising an ITO film disposed over the flexible substrate, the ITO having a surface roughness that does not exceed about 3.6 nm; a first organic layer consisting essentially of a non-polymeric organic material disposed over the first 10 electrode; a second electrode disposed over the first non-polymeric organic material.

In accordance with the present invention, there is also provided a flexible organic light emitting device, comprising: a flexible substrate; a first electrode 15 comprising an ITO film disposed over the flexible substrate; a first organic layer comprising a non-polymeric organic layer disposed over the first electrode; a second electrode disposed over the first non-polymeric organic material; wherein the indium tin oxide layer is sufficiently uniform 20 such that bending of the device does not appreciably change either the current-voltage or the light-current characteristics of the device relative to the current-voltage or light-current characteristics of the device prior to bending.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross section of one embodiment of a flexible OLED constructed in accordance with this invention;

Fig. 2 contains graphs illustrating the current vs. voltage characteristic of an OLED such as shown in Fig. 30 1 before and after repeated bending and the current vs.

61293-423

voltage characteristic of a prior art OLED having a glass substrate in place of the flexible polyester substrate; and

Fig. 3 contains graphs illustrating the optical power vs. current characteristics of an OLED such as shown 5 in Fig. 1 before and after repeated bending and the current vs. voltage characteristic of a prior art OLED used in a glass substrate in place of the flexible polyester substrate.

Fig. 4 shows atomic force microscope (AFM) images 10 of a typical ITO-coated polyester substrate film wherein (a) shows the ITO

61293-423

(top) substrate and (b) shows the polyester (bottom) substrate surface. The height range of the images was ~50 nm (nanometers).

5 Fig. 5 shows a photograph of an array of nine unpackaged 1 cm² vacuum-deposited, non-polymeric flexible OLED's. One device in contact with the probe arm is shown operating in air in a well-illuminated room at normal video display brightness (~100 cd/m²).

10

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

The subject invention will now be described in detail for specific preferred embodiments of the invention, it being understood that these embodiments are intended only as 15 illustrative examples and the invention is not to be limited thereto.

20 As illustrative embodiments of the subject invention, the subject OLED's may be incorporated into a single heterostructure or in a double heterostructure. The materials, methods and apparatus for preparing the single and double heterostructures are disclosed, for example, in U.S. Patent No. 5,554,220. The subject invention as disclosed herein may be used in conjunction with United States Patent 25 No. 5,707,745; No. 5,703,436; No. 5,721,160; No. 5,757,026; and 6,358,631.

61293-423

The single or double heterostructures, as referred to herein,
5 are intended solely as examples showing how an OLED embodying
the subject invention may be fabricated without in any way
intending the invention to be limited to the particular
sequence or order of making the layers shown. For example, a
10 single heterostructural OLED of the subject invention includes
a flexible substrate, which is preferably transparent; a first
electrode, which may typically be an indium tin oxide (ITO)
anode layer; a hole transporting layer; an electron
transporting layer; a second electrode layer, for example, a
15 metal cathode layer of Mg:Ag; and a metal protective layer,
for example, made of a layer of Ag, for protecting the Mg:Ag
cathode layer from atmospheric oxidation. A double
heterostructure would also include an additional layer
20 containing an emissive material. This additional layer is
herein referred to as a "separate emissive layer" so as to
distinguish it from the other layers, since the hole
transporting layer and the electron transporting layer can be
made to produce electroluminescent emission without the need
25 for this separate emissive layer.

25 Although not limited to the thickness ranges recited herein,
the ITO anode layer may be about 1000 Å (1 Å = 10⁻⁸ cm) to
greater than about 4000 Å thick; the hole transporting layer
about 50 Å to greater than about 1000 Å thick; the layer
30 containing emissive material about 50 Å to about 200 Å thick;
the electron transporting layer about 50 Å to about 1000 Å
thick; and each metal layer, about 50 Å to greater than about
100 Å thick, or substantially thicker if the cathode layer is
not intended to be transparent.

35 The ability to achieve highly flexible displays vacuum-
deposited molecular organic materials, which have stable
electroluminescent properties, depends on, *inter alia*, the

following two factors. First, the molecular bonds responsible for the mechanical properties of the thin films comprising the OLED needs to be reasonably tolerant of the stress applied to the structure on bending, and, second, the substrates needs to be sufficiently flat and uniform such that mechanical defects are not formed during growth or flexing.

Concerning the first factor, virtually all organic materials used in vacuum-deposited OLED's are held together by highly flexible van der Waals bonds. Previously, it has been shown, Y. Zhang and S. R. Forrest, Phys. Rev. Lett. 71, 2765 (1993), that the bonding of aromatic molecules similar to those used in OLED's is highly compressible. For example, it was shown that the compressibility of the van der Waals-bonded naphthalene-based molecular crystal NTCDA has a roughly 20-times-higher compressibility than most ductile metals such as In or Al. C. Kittel, Solid State Physics, 4th ed. (Wiley, New York, 1971) p. 143. While not intending to be limited to the theory of why the subject invention is capable of producing stable electroluminescence, such considerations help to explain why the molecular materials disclosed herein are sufficiently ductile to undergo significant stress without cracking.

The second factor, that the substrates used be sufficiently flat, was established through the use of images produced by an atomic force microscope. These images, such as shown in Fig. 4, shows that the ITO surface had a rms roughness of only 1.8 nm, whereas the polyester surface of the flexible was somewhat rougher, with a rms value of 2.8 nm. Although there was some variation from substrate to substrate, ITO surface roughness did not exceed 3.6 nm. In either case, the substrates were sufficiently smooth (i.e., the height of the surface features was a small fraction of the total device thickness) such that no significant damage was observed for the subject OLED heterostructure on growth or bending.

Based on such considerations, the subject devices grown on flexible substrates were found to have efficiencies comparable with conventional vacuum-deposited OLED's grown on glass and, furthermore, such devices were found to be mechanically robust.

This invention will now be described in detail with respect to showing how certain specific representative embodiments thereof will be made, the materials, apparatus and process steps being understood as examples that are intended to be illustrative only. In particular, the invention is not intended to be limited to the methods, materials, conditions, process parameters, apparatus and the like specifically recited herein.

15

EXAMPLES

In the cross section of the particular embodiment of the invention illustrated in Fig. 1, a flexible substrate 2 for the device is comprised of any suitable flexible polymer sheet such as a polyester. Preferably, the flexible substrate is capable of being bent to a radius of curvature down to 0.5 cm or less. The flexible substrate 2 is precoated with a thin film 4 of indium tin oxide, ITO, such as is available from Southwall Technologies, Inc., 1029 Corporation Way, Palo Alto, Calif., 94303, Part No. 903-6011. In this particular embodiment, the hole transport layer 6 was comprised of N,N'-diphenyl-N,N'-bis(3-methylphenyl)-1,1'-biphenyl-4,4'-diamine (TPD), and the electron transporting layer 8 was comprised of tris-(8-hydroxyquinoline) aluminum(Alq₃). Other non-polymeric materials, such as known in the art for preparing hole transporting layers, electron transporting layers and emissive layers may also be used. The hole conducting layer 6 of TPD is formed on top of the hole injecting ITO layer 4, and a light emitting layer 8 of Alq₃ is formed on the layer 6. Alternatively, a single layer can be used in place of the layers 6 and 8 in which TPD and Alq₃ are combined. A layer 10 of Mg-Ag is formed on the Alq₃ layer 8, and a layer 12 of Ag is

formed on the Mg-Ag layer 10. A power supply 14 is connected between the Ag layer 12 and the precoated ITO layer 4.

5 Although the layers could have different thicknesses than those shown in the table below, the thicknesses shown produced the characteristics illustrated by the graphs of Figs. 2 and 3.

	<u>Layer No.</u>	<u>Layer Thickness</u>
10	layer 2	175 μM
	layer 6	800 \AA
	layer 8	800 \AA
	layer 10	1500 \AA
	layer 12	500 \AA

15

In accordance with another aspect of the invention, the light emitting device of Fig. 1 may be fabricated as follows. In this example, the substrate 2 is a 175 μM thick ($1 \mu\text{M} = 10^{-6}$ meters) transparent polyester sheet precoated with a 20 transparent, conducting ITO thin film 4. The thickness of the flexible substrate may be either substantially thicker or thinner depending on the needs of the particular application which the OLED is used. The sheet resistance of the ITO thin film 4 was $60 \Omega/\square$, and the transparency of the coated substrate was ~80% throughout the visible spectrum. Prior to the deposition of the organic film, the substrate 2 was ultrasonically cleaned in detergent for two minutes, then rinsed with deionized water. Next, it was rinsed in 25 2-propanol, held at room temperature for two to three minutes, and then boiled in 2-propanol again for two to three minutes, followed by drying with a blow gun using a stream of filtered dry nitrogen. An 800 \AA thick layer 6 of the hole conducting material, TPD, was deposited by thermal evaporation in a 30 vacuum of $<4 \times 10^{-7}$ Torr, followed by the deposition of a 800 \AA thick Alq₃ layer. The top electrode consisted of a 1500 \AA 35 thick layer of Mg-Ag and a 500 \AA thick Ag cap deposited

through a shadow mask. A conventional device on an ITO-precoated glass substrate was simultaneously fabricated for comparison using identical cleaning and deposition procedures. The sheet resistance and transparency of the ITO-precoated glass substrate was $20 \Omega/\square$ and ~90%, respectively.

Fig. 2 shows the current-voltage characteristics of a 1 mm diameter flexible device prior to bending, curve 16, after repeated bending (4 to 5 times) over a small radius of curvature (~0.5 cm), curve 18, and the conventional device on a glass substrate, curve 20. All the current/voltage curves are shown to follow the power law dependence of current-on-voltage. At lower voltages, the current/voltage curves indicate ohmic behavior; while at higher voltages, the curves follow $I \approx V^{m+1}$ with $m=7$, suggestive of trap-limited conduction typical of OLED's. The power law dependence was observed for at least four orders of magnitude change in current in the high current region. There was no obvious change in the current/voltage characteristics after the device was repeatedly flexed. The turn-on voltages (defined as the voltages at which the current due to ohmic and trap limited conduction are equal) of the three curves was almost identical (~6.5V), while the leakage current at low voltages of the flexible device was even less than that of the conventional device, and was not increased after bending. This indicated that the ITO film precoated on the flexible substrate is sufficiently uniform such that current shunt paths between the top and bottom contacts 12 and 4 are not induced after bending, even for very thin film (~1600 Å molecular organic structures).

The light output power versus current (L-I) characteristics of the flexible device before and after bending, and of the conventional device are shown in Fig. 3 by graph 22. Curve 24 illustrates the L-I output of a standard device having a glass substrate. The external quantum efficiency of the flexible device was 0.20%, and that of the conventional device was

0.14%. In both cases, the efficiency was calculated from light emitted only in the forward scattering direction. This considerably underestimates the true quantum efficiency but is useful for comparing between devices. Once again, the quantum efficiency of the flexible device was demonstrated not to be affected by repeated bending. The fact that there was no appreciable change in either the I-V or L-I characteristics after the device was flexed indicated that the ITO contact, the organic layers, and the alloy top contact were not significantly affected by bending even over a small radius of curvature.

Large-area (~1 cm²) devices were also fabricated by similar methods. As in the case of the smaller devices, the large devices were also be bent over radii of ~0.5 cm without apparent degradation. That these larger areas can be achieved indicates that flexible OLED's can be used in large, roll-up, or conformable flat panel displays. This, in conjunction with the fact that the ITO-precoated substrate is available in large spools, indicates that flexible, OLED-based displays can be mass manufactured on a roll-to-roll basis by use of suitable volume growth technologies such as organic vapor phase deposition.

Failure modes of the large-area device were also studied. If on the convex side of a curved substrate the device can be bent without failure even after a permanent fold occurs in the polyester film. If on the concave side the device remains operational when bent over a radius of curvature down to 0.5 cm. At smaller radii, cracks propagate through the device, and current-shunt paths are created between bottom and top contacts after further bending. When ITO-precoated substrates are similarly bent, the same cracking phenomenon is observed, from which it can be inferred that the cracks occur in the ITO rather than in the OLED itself.

In conclusion, vacuum-deposited, van der Waals-bonded, non-polymeric flexible OLED's, such as illustrated in Fig. 5, have been fabricated using an ITO-precoated transparent polyester film as the substrate. It has been shown that an ITO thin film, when precoated on a flexible substrate, provides a flat, highly transparent, conductive, flexible contact suitable for OLED applications. This hole-injecting ITO-coated substrate may also be used with OLED's comprising polymeric hole transporting, electron transporting, and/or emissive layers comprised of polymers. In addition, performance similar to that disclosed herein is expected if non-polymeric devices are vacuum deposited on polymeric, transparent hole-injecting contacts such as polyaniline, which may be useful if even greater flexibility is required in certain applications.

15 Although a particular OLED structure of Fig. 1 has been described, it is to be understood that any OLED structure having layers that are vacuum formed could be formed on a flexible polymeric substrate in accordance with this 20 invention. Those of skill in the art may recognize certain modifications to the various embodiments of the invention, which modifications are meant to be covered by the spirit and scope of the appended claims.

61293-423

CLAIMS:

1. A method of preparing a flexible organic light emitting device comprising:

providing a flexible substrate having thereon a
5 first electrode, the first electrode comprising indium tin oxide having a surface roughness that does not exceed about 3.6 nm;

depositing a layer of organic non-polymeric material over the first electrode;

10 depositing a second electrode over the layer of organic non-polymeric material.

2. A method of preparing a flexible organic light emitting device comprising:

providing a flexible substrate coated with an
15 indium tin oxide layer, wherein the indium tin oxide layer has a surface roughness that does not exceed about 3.6 nm;

fabricating the organic light emitting device on the flexible substrate, wherein fabrication of the organic light emitting device includes the step of vacuum depositing
20 a layer of non-polymeric organic material over the indium tin oxide layer.

3. A method of fabricating a flexible organic light emitting device comprising:

providing a flexible substrate coated with an
25 indium tin oxide layer, wherein the indium tin oxide layer has a surface roughness that does not exceed about 3.6 nm;

61293-423

depositing a layer consisting essentially of non-polymeric organic material over the indium tin oxide layer; and

5 depositing an electrode layer over the layer consisting essentially of non-polymeric organic material over the indium tin oxide layer.

4. The method of any of claims 1 to 3, wherein the organic non-polymeric material is a hole transporting material, and further comprising the step of depositing a 10 layer of organic non-polymeric electron transporting material over the organic non-polymeric hole transporting material.

5. The method of claim 4, further comprising depositing an organic non-polymeric emissive material 15 between the hole transporting material and the electron transporting material.

6. The method of any of claims 1 to 5, wherein the flexible substrate comprises a polyester substrate.

7. A method of fabricating a flexible organic light 20 emitting device comprising:

providing a flexible polyester substrate coated with an indium tin oxide layer, wherein the indium tin oxide layer has a surface roughness that does not exceed about 3.6 nm;

25 depositing a layer of N,N'-diphenyl-N,N'-bis(3-methylphenyl)1,1'biphenyl-4,4'diamine over the indium tin oxide anode layer;

61293-423

depositing a layer of tris-(8-hydroxyquinoline) aluminum over the N,N'-diphenyl-N,N'-bis(3-methylphenyl)1-1'biphenyl-4,4'diamine layer; and

depositing a metal layer over the tris-(8-
5 hydroxyquinoline) aluminum layer.

8. A method of preparing a flexible organic light emitting device comprising:

providing a flexible substrate coated with an indium tin oxide layer;

10 fabricating the organic light emitting device on the flexible substrate, wherein fabrication of the organic light emitting device includes the step of vacuum depositing a hole transporting layer comprised of non-polymeric organic material over the indium tin oxide layer;

15 wherein the indium tin oxide layer is sufficiently uniform such that bending of the device does not appreciably change either the current-voltage or the light-current characteristics of the device relative to the current-voltage or light-current characteristics of the device prior
20 to bending.

9. The method of claim 8 wherein fabrication of the organic light emitting device includes the step of vacuum depositing an electron transporting layer comprised of non-polymeric organic material over the hole transporting layer.

25 10. The method of claim 9 wherein fabrication of the organic light emitting device includes the step of depositing a separate emissive layer comprised of non-polymeric organic material over the hole transporting layer

61293-423

prior to vacuum depositing the electron transporting layer over the hole transporting layer.

11. A method of fabricating a flexible organic light emitting device comprising:

5 providing a flexible substrate coated with an indium tin oxide layer;

depositing a hole transporting layer consisting essentially of non-polymeric organic material over the indium tin oxide layer;

10 depositing an electron transporting layer consisting essentially of non-polymeric organic material over the hole transporting layer; and

depositing a cathode layer over the electron transporting layer; the indium tin oxide layer being
15 sufficiently uniform such that bending of the device does not appreciably change either the current-voltage or the light-current characteristics of the device relative to the current-voltage or light-current characteristics of the device prior to bending.

20 12. The method of claim 11, further comprising the step of depositing a separate emissive layer consisting essentially of non-polymeric organic material over the hole transporting layer prior to depositing the electron transporting layer over the hole transporting layer.

25 13. The method of claim 12 wherein the bending of the device to a radius of curvature of about 0.5 cm does not appreciably change either the current-voltage or the light-current characteristics of the device relative to the

61293-423

current-voltage or light-current characteristics of the device prior to bending.

14. The method of any of claims 8 to 12 wherein the flexible substrate comprises a polyester substrate.

5 15. A flexible organic light emitting device, comprising:

a flexible substrate;

10 a first electrode comprising an ITO film disposed over the flexible substrate, the ITO having a surface roughness that does not exceed about 3.6 nm;

a first organic layer comprising a non-polymeric organic layer disposed over the first electrode;

a second electrode disposed over the first non-polymeric organic material.

15 16. A flexible organic light emitting device, comprising:

a flexible substrate;

20 a first electrode comprising an ITO film disposed over the flexible substrate, the ITO having a surface roughness that does not exceed about 3.6 nm;

a first organic layer consisting essentially of a non-polymeric organic material disposed over the first electrode;

25 a second electrode disposed over the first non-polymeric organic material.

61293-423

17. A flexible organic light emitting device, comprising:

a flexible substrate;

5 a first electrode comprising an ITO film disposed over the flexible substrate;

a first organic layer comprising a non-polymeric organic layer disposed over the first electrode;

a second electrode disposed over the first non-polymeric organic material;

10 wherein the indium tin oxide layer is sufficiently uniform such that bending of the device does not appreciably change either the current-voltage or the light-current characteristics of the device relative to the current-voltage or light-current characteristics of the device prior 15 to bending.

18. The device of claim 17 wherein bending of the device to a radius of curvature of about 0.5 cm does not appreciably change either the current-voltage or the light-current characteristics of the device relative to the 20 current-voltage or light-current characteristics of the device prior to bending.

19. The device of any of claims 15 to 18 wherein the first organic layer comprises a hole transporting layer.

20. The device of claim 19, further comprising a 25 second organic layer disposed between the first organic layer and the second electrode, wherein the second organic layer is an electron transporting layer.

61293-423

21. The device of claim 20, further comprising a third non-polymeric organic layer disposed between the first and second non-polymeric organic layers, wherein the third non-polymeric organic layer is a separate emissive layer.

5 22. The device of any of claims 15 to 21 wherein the flexible substrate comprises a flexible polymeric substrate.

23. The device of claim 22 wherein the flexible polymeric substrate comprises a flexible polyester substrate.

10 24. The device of any of claims 15 to 23 wherein the first non-polymeric organic layer comprises N,N'-diphenyl-N,N'-bis(3-methylphenyl)1,1'biphenyl-4,4'diamine.

25. The device of any of claims 15 to 24 wherein the first electrode is an anode.

15 26. The device of any of claims 15 to 25 wherein the first non-polymeric organic layer is vacuum deposited.

27. A display incorporating the device of any of claims 15 to 26.

SMART & BIGGAR
OTTAWA, CANADA

PATENT AGENTS

1/5

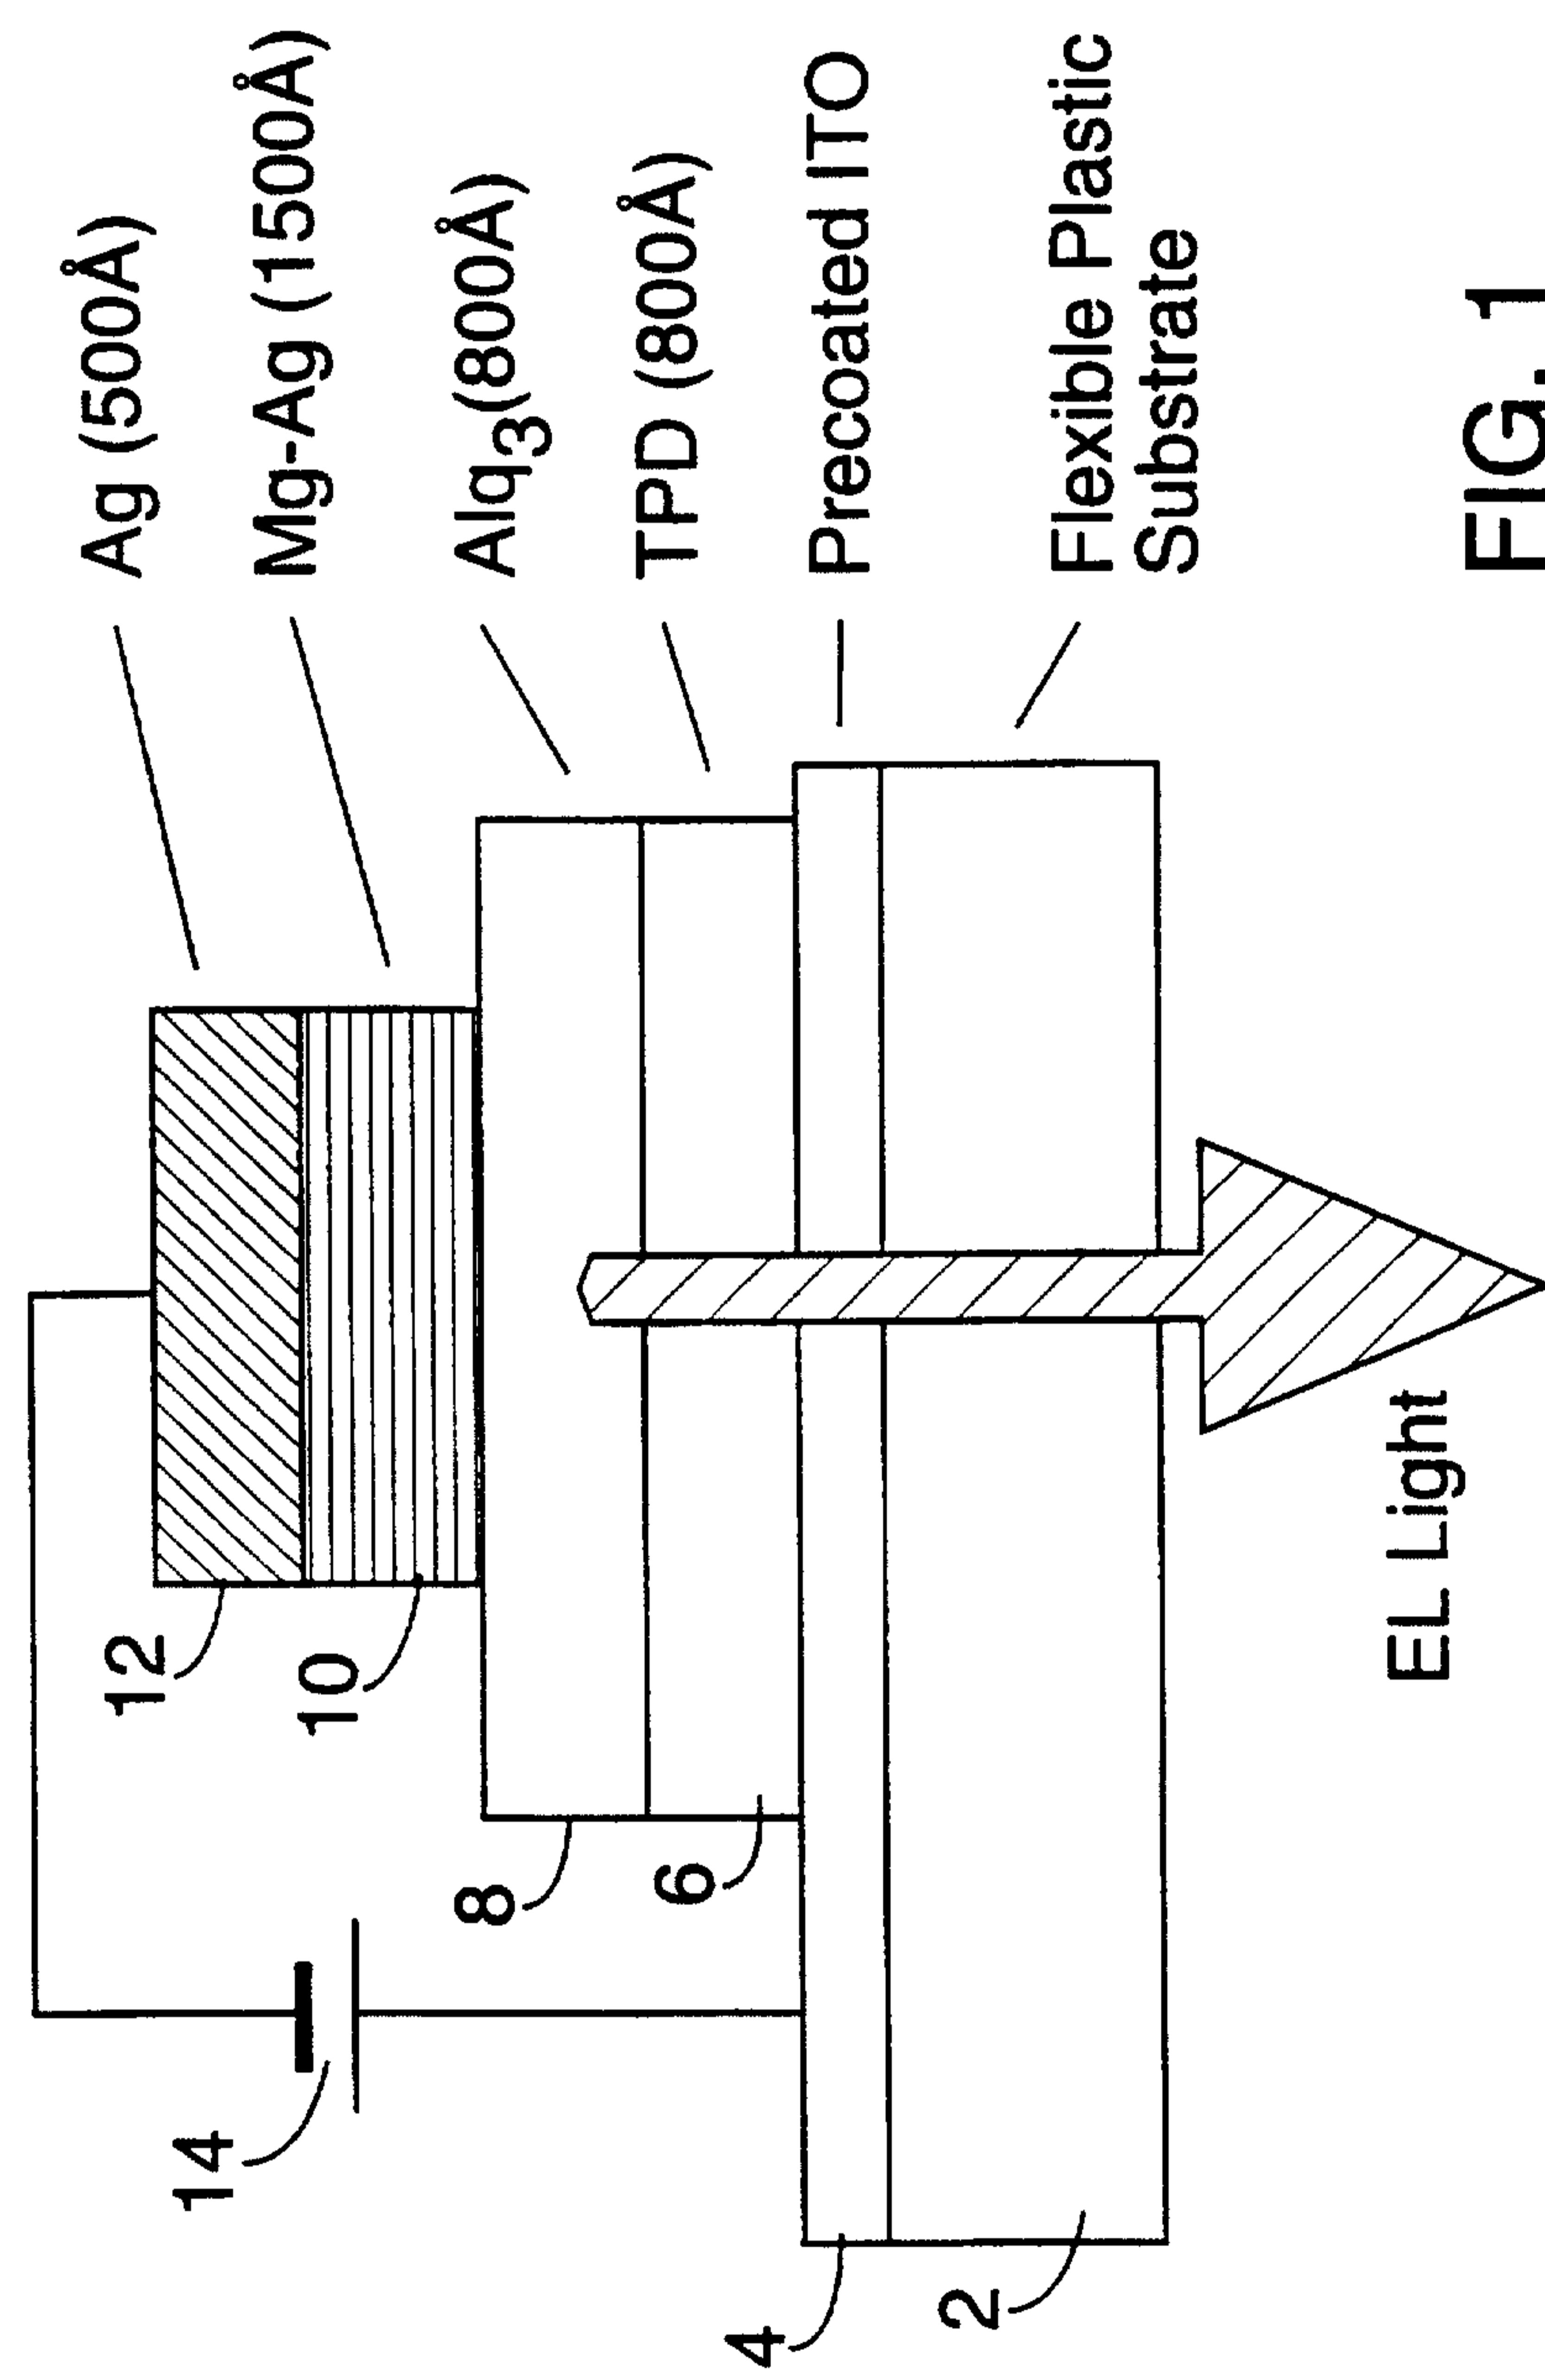


FIG. 1

2/5


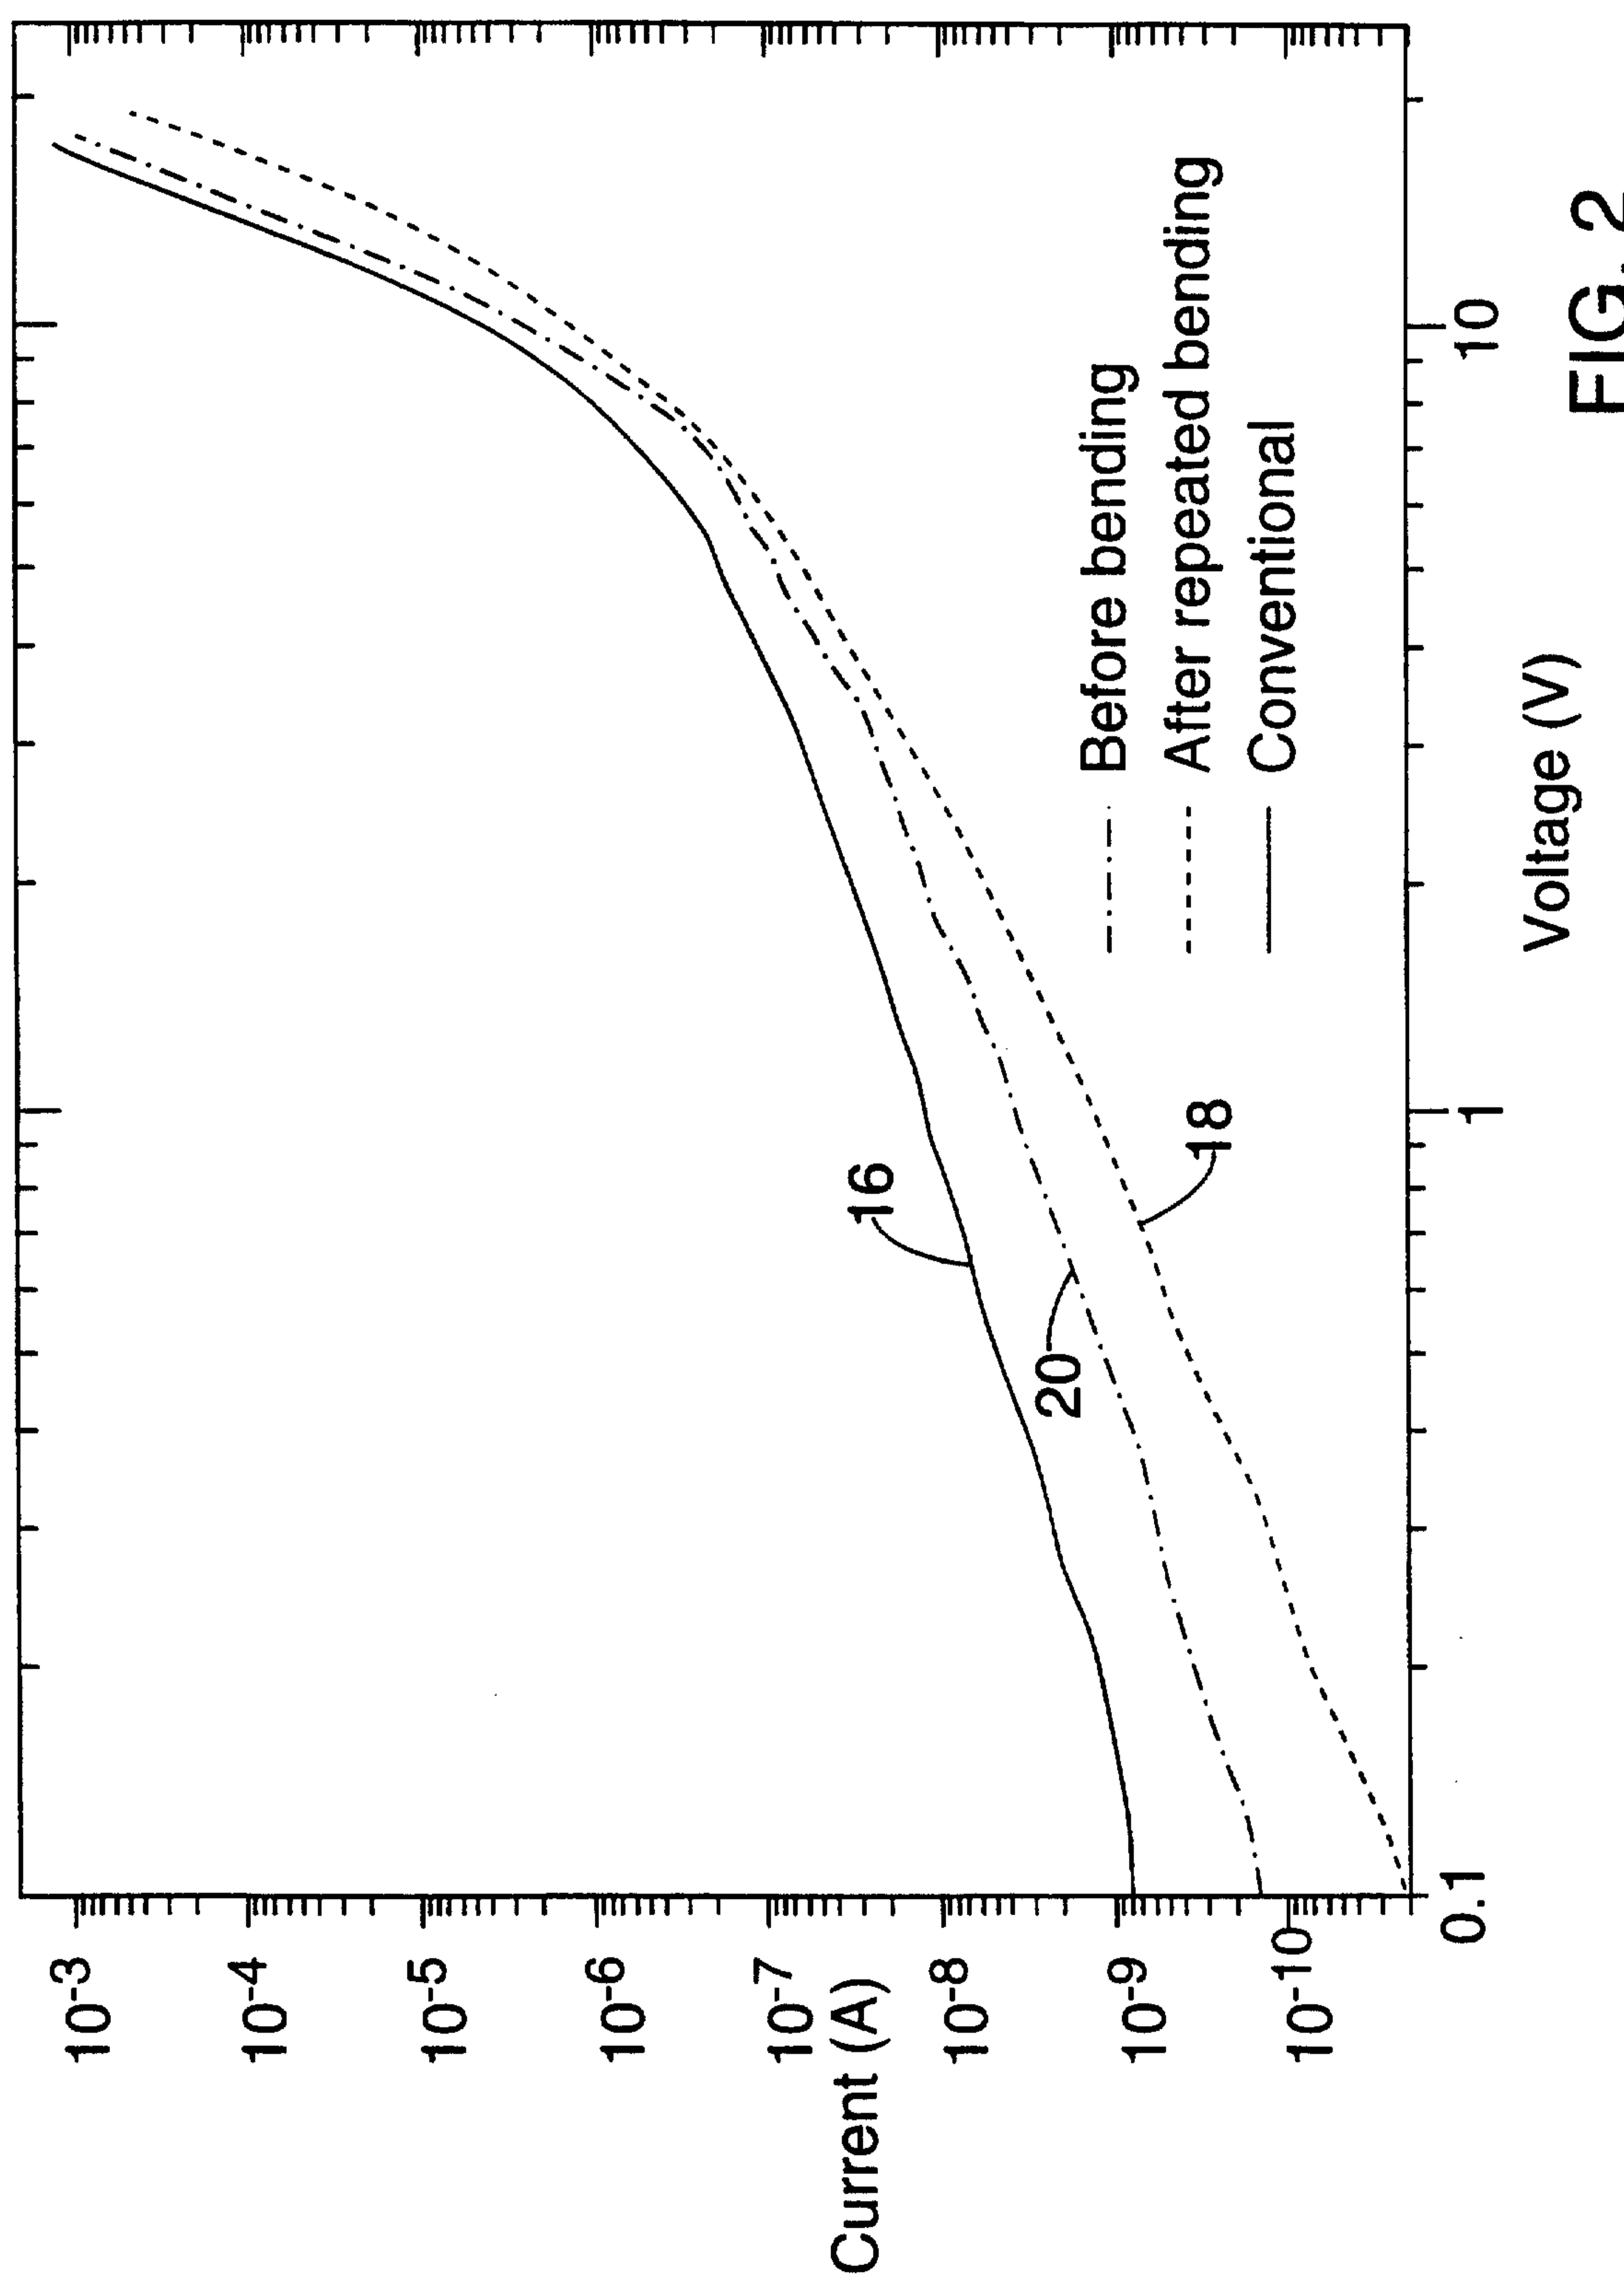


FIG. 2

3/5

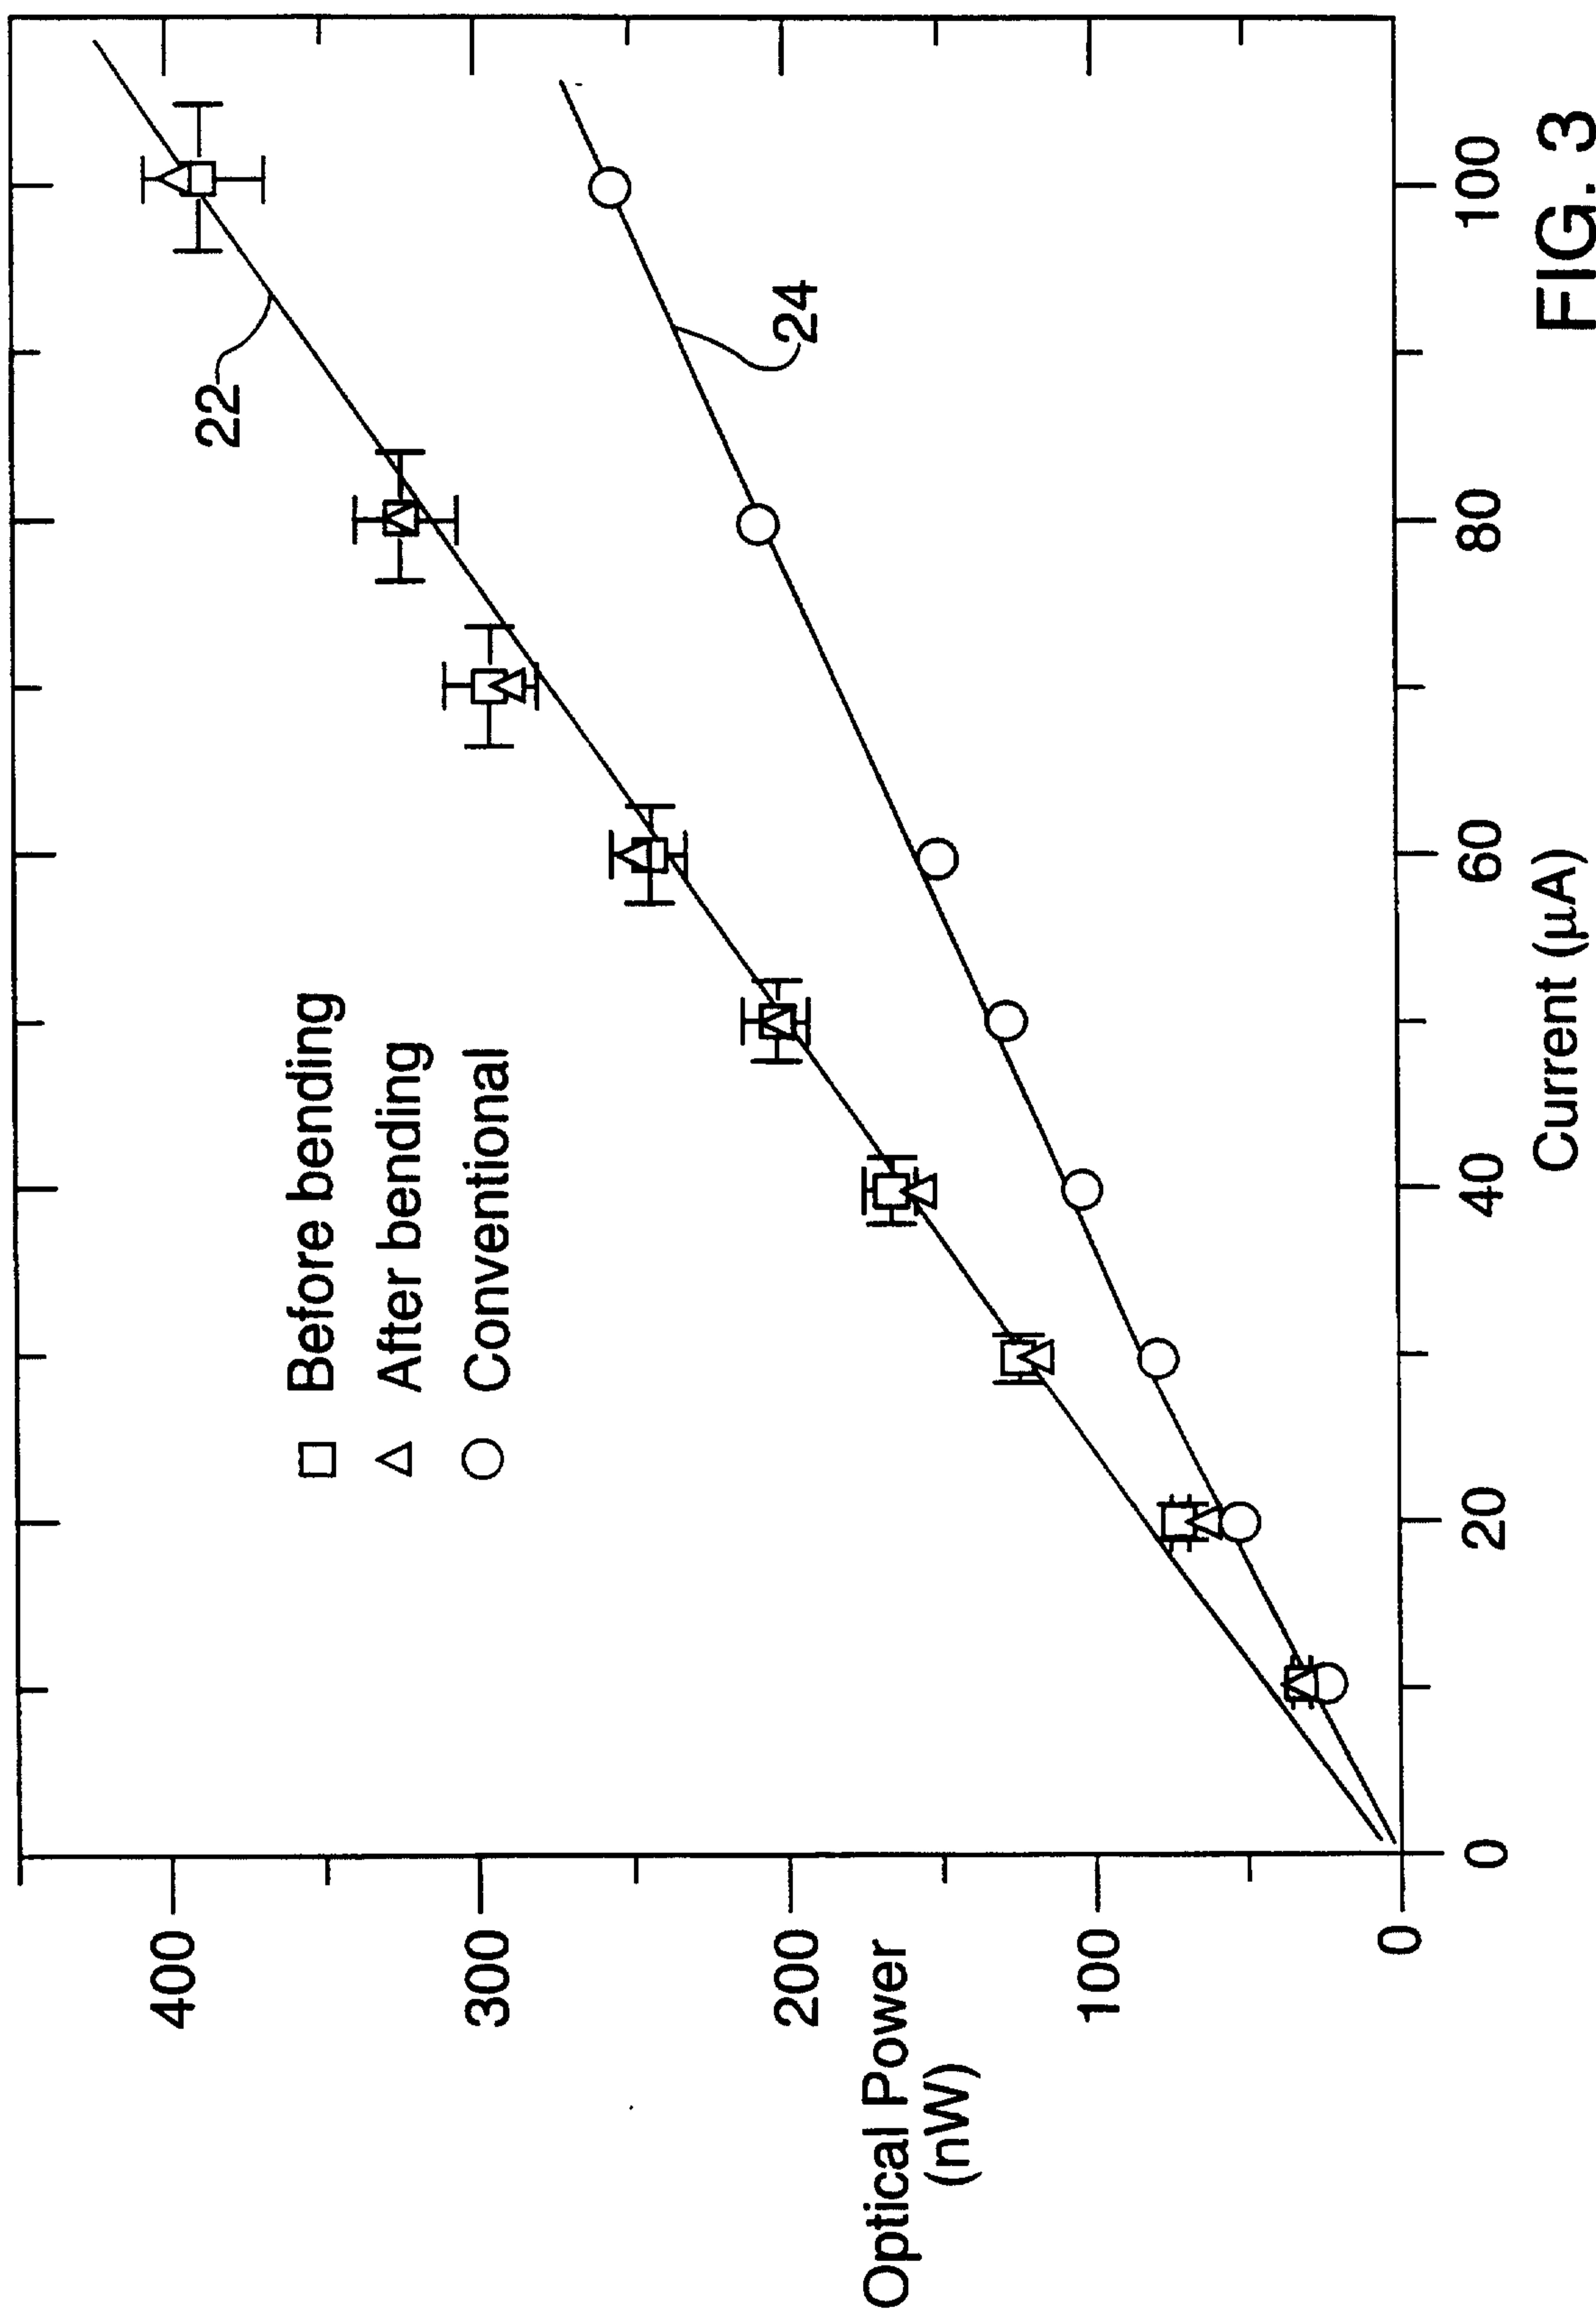

4/5

FIG. 4A


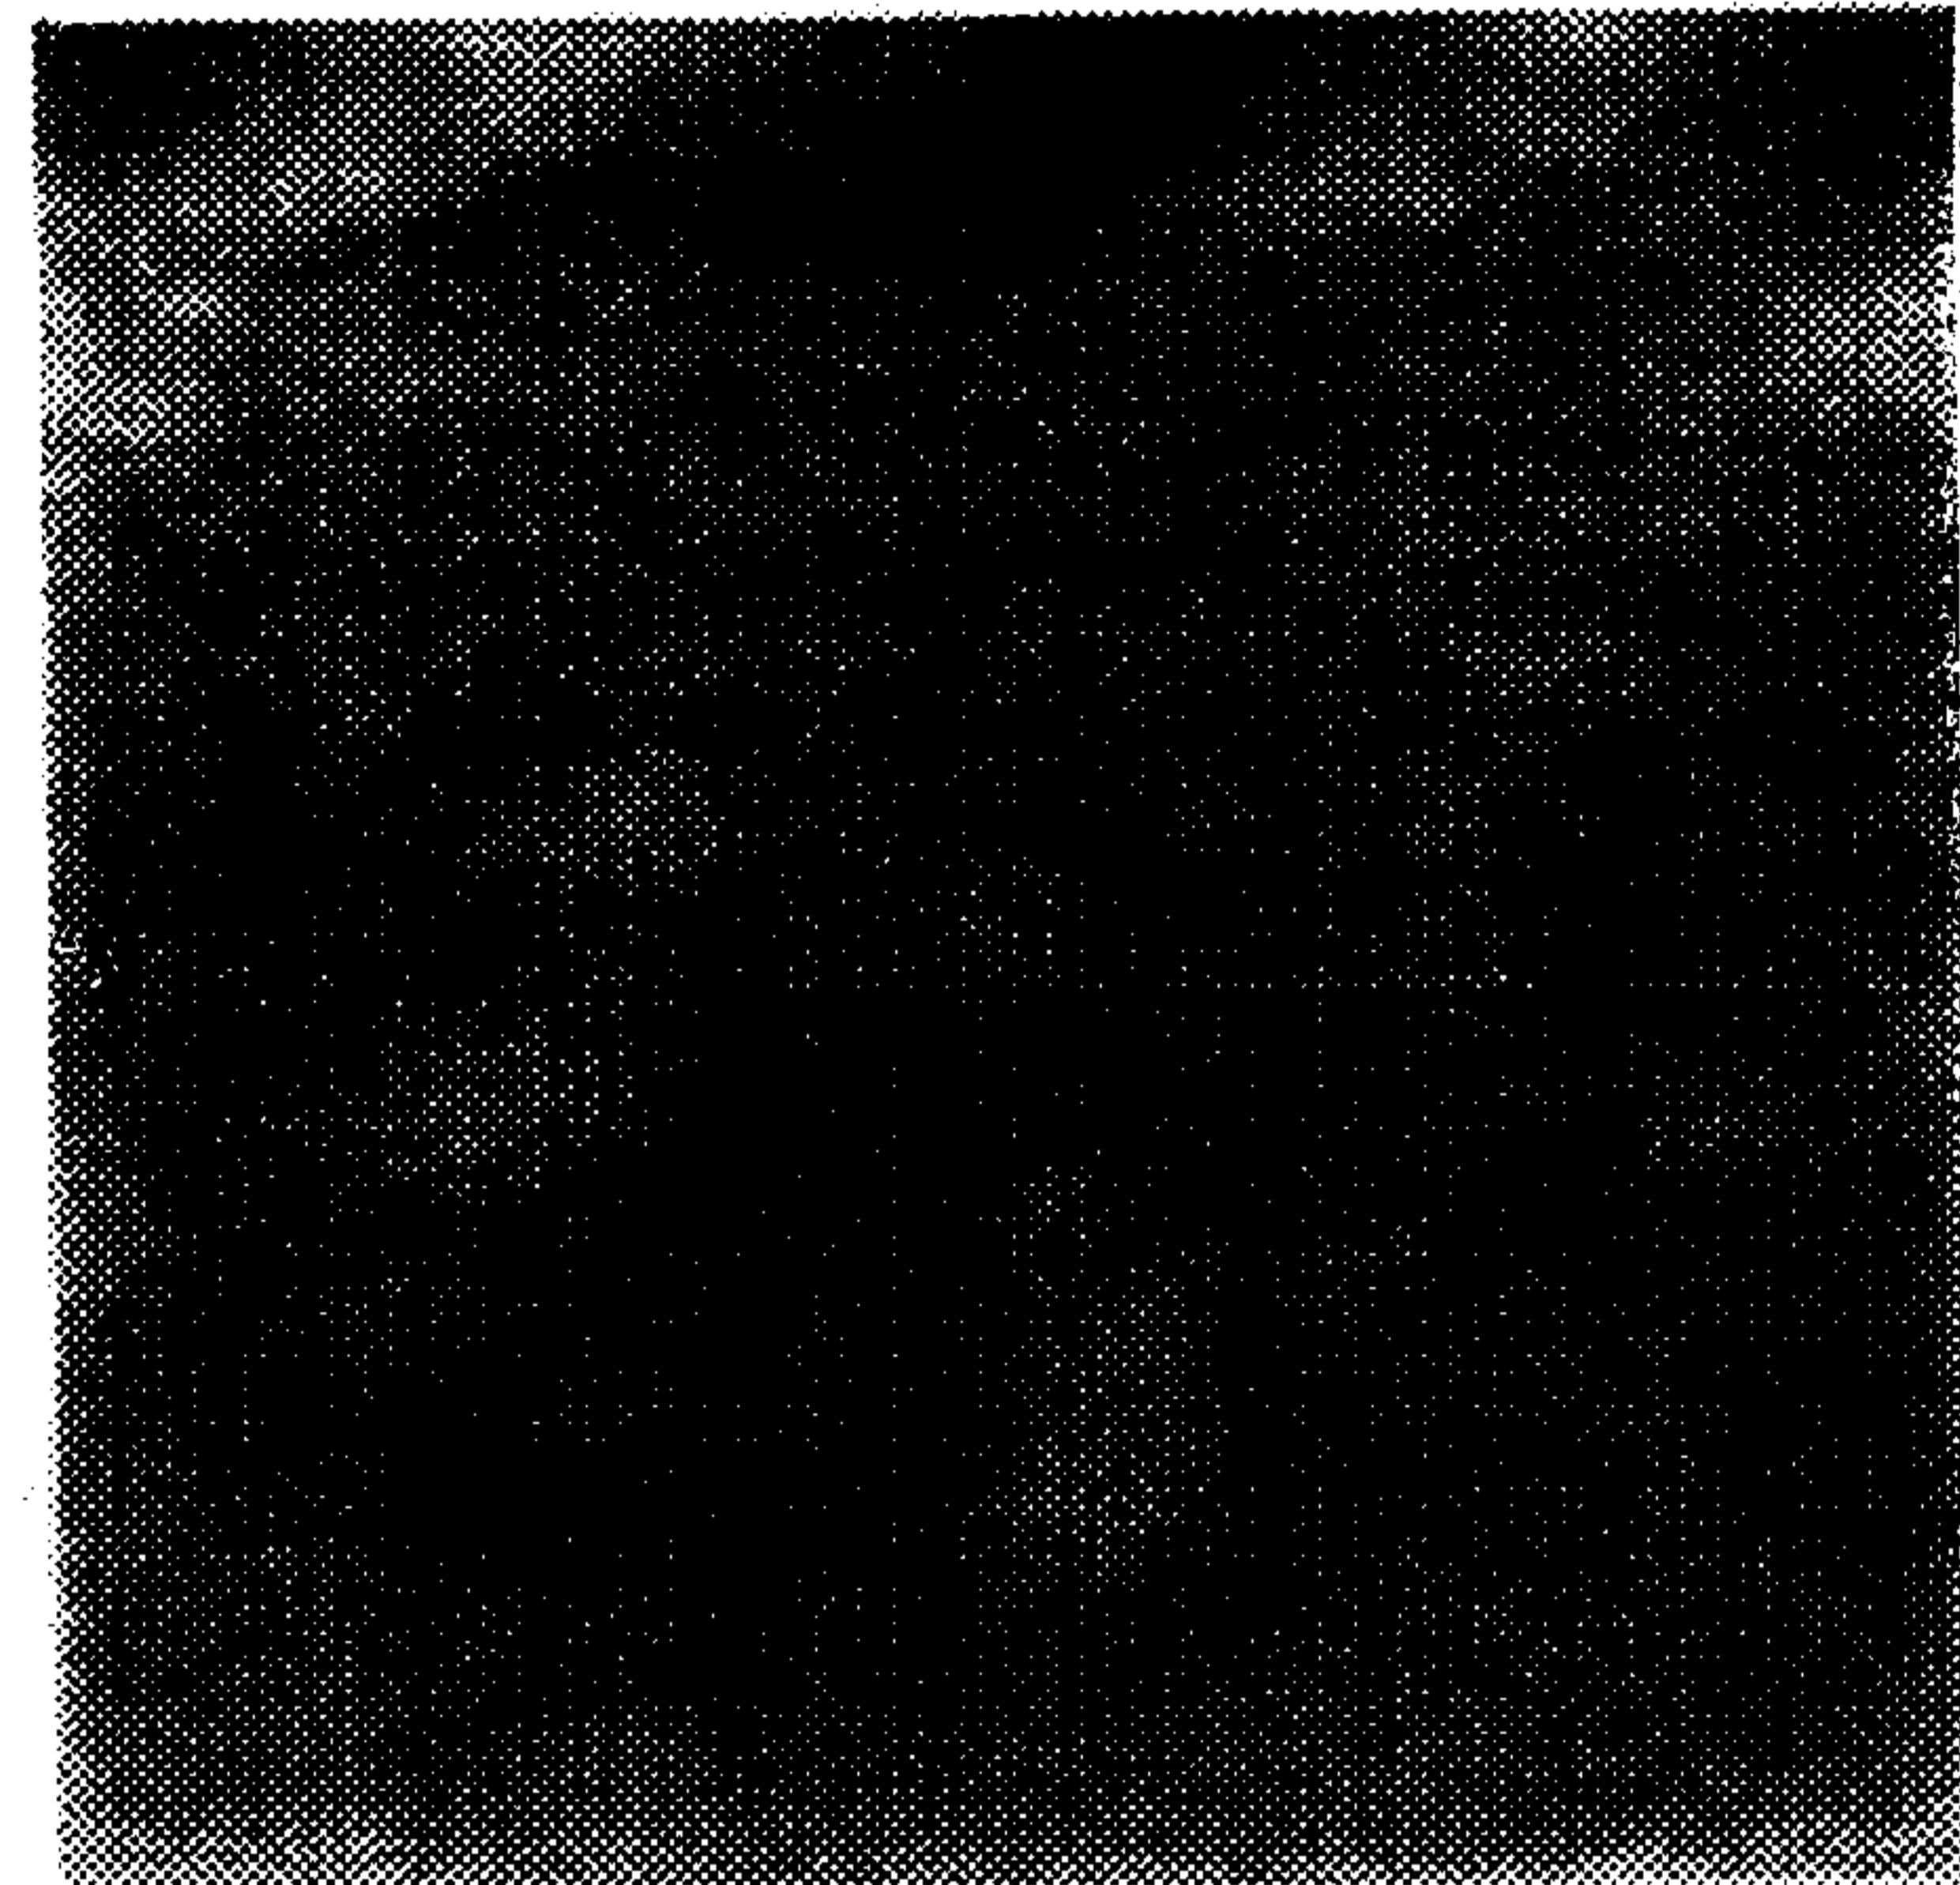


FIG. 4B



5/5

FIG. 5

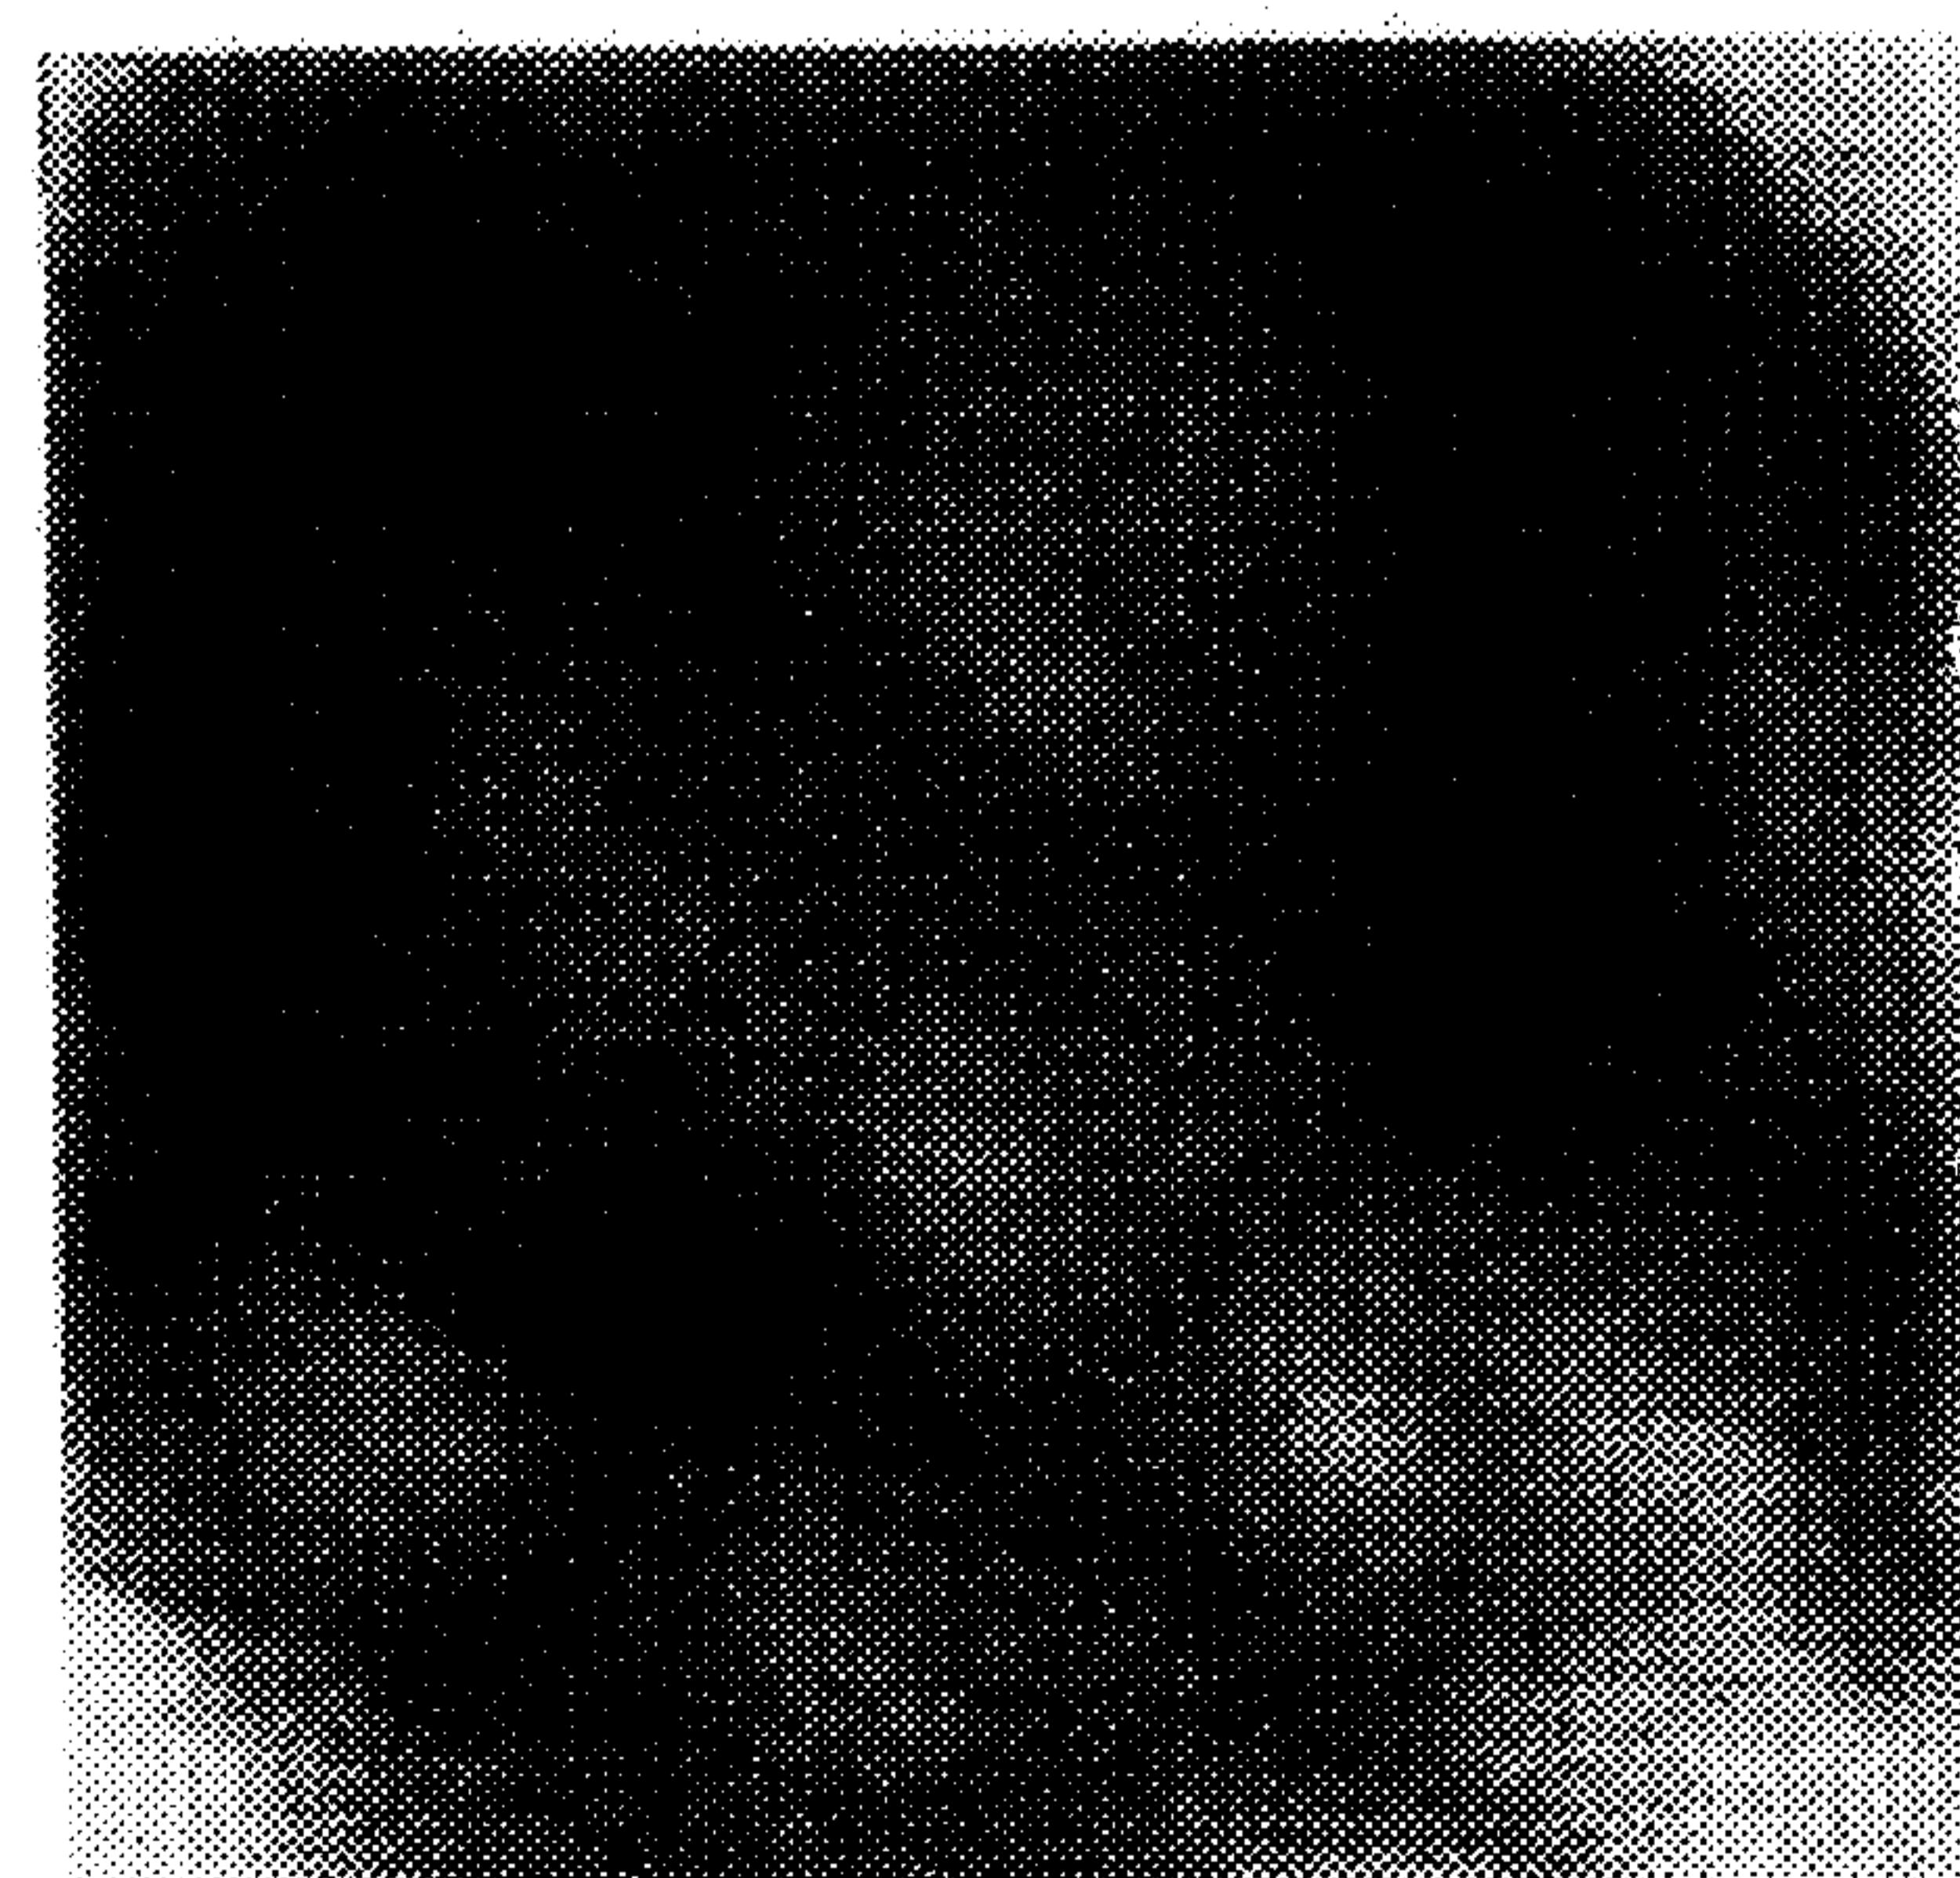